

FCC

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
LoRaWAN Module

ISSUED TO
RuiXingHengFang Network(Shenzhen) Co., Ltd.

Suite B3019, 3rd tower of Elite(YiLiDa) building, NO.1092 NanShan
blvd. NanShan District, Shenzhen, China



Tested by: Hu Chao
Hu Chao
(Engineer)

Date: Jul. 26, 2018

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: Jul. 26, 2018

Report No.: BL-SZ1850102-601

EUT Name: LoRaWAN Module

Model Name: RHF0M003

Brand Name: RisingHF

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2AJUZ0M003

Test Conclusion: Pass

Test Date: May 21, 2018 ~ May 30, 2018

Date of Issue: Jul. 26, 2018

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. BALUN Laboratory. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jul. 18, 2018</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Jul. 23, 2018</u>	<u>Update equipment list on page 10/11. Updated the applicant information, manufacturer information and factory information</u>
<u>Rev. 03</u>	<u>Jul. 26, 2018</u>	<u>Update the RF cable calibration data on page 11/12</u>

TABLE OF CONTENTS

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)6

1.1 Identification of the Testing Laboratory6

1.2 Identification of the Responsible Testing Location6

1.3 Laboratory Condition6

1.4 Announce6

2 PRODUCT INFORMATION7

2.1 Applicant Information.....7

2.2 Manufacturer Information7

2.3 Factory Information7

2.4 General Description for Equipment under Test (EUT)7

2.5 Ancillary Equipment.....7

2.6 Technical Information8

2.7 Additional Instructions9

3 SUMMARY OF TEST RESULTS..... 10

3.1 Test Standards 10

3.2 Verdict 10

4 GENERAL TEST CONFIGURATIONS 11

4.1 Test Environments 11

4.2 Test Equipment List..... 11

4.3 Measurement Uncertainty 12

4.4 Description of Test Setup 13

4.4.1 For Antenna Port Test 13

4.4.2	For AC Power Supply Port Test	13
4.4.3	For Radiated Test (Below 30 MHz)	14
4.4.4	For Radiated Test (30 MHz-1 GHz)	14
4.4.5	For Radiated Test (Above 1 GHz).....	15
4.5	Measurement Results Explanation Example.....	16
4.5.1	For conducted test items:	16
4.5.2	For radiated band edges and spurious emission test:.....	16
5	TEST ITEMS.....	17
5.1	Antenna Requirements.....	17
5.1.1	Relevant Standards	17
5.1.2	Antenna Anti-Replacement Construction	17
5.1.3	Antenna Gain	18
5.2	Output Power	19
5.2.1	Test Limit.....	19
5.2.2	Test Setup	19
5.2.3	Test Procedure	19
5.2.4	Test Result	20
5.3	Occupied Bandwidth	21
5.3.1	Limit.....	21
5.3.2	Test Setup	21
5.3.3	Test Procedure	21
5.3.4	Test Result	21
5.4	Conducted Spurious Emission	22
5.4.1	Limit.....	22
5.4.2	Test Setup	22
5.4.3	Test Procedure	22
5.4.4	Test Result	23
5.5	Band Edge (Authorized-band band-edge).....	24
5.5.1	Limit.....	24
5.5.2	Test Setup	24
5.5.3	Test Procedure	24

5.5.4	Test Result	24
5.6	Conducted Emission	25
5.6.1	Limit.....	25
5.6.2	Test Setup	25
5.6.3	Test Procedure.....	25
5.6.4	Test Result	25
5.7	Radiated Spurious Emission	26
5.7.1	Limit.....	26
5.7.2	Test Setup	26
5.7.3	Test Procedure.....	26
5.7.4	Test Result	27
5.8	Band Edge (Restricted-band band-edge).....	28
5.8.1	Limit.....	28
5.8.2	Test Setup	28
5.8.3	Test Procedure.....	28
1.1.1	Test Result	28
5.9	Power Spectral density (PSD).....	29
5.9.1	Limit.....	29
5.9.2	Test Setup	29
5.9.3	Test Procedure.....	29
5.9.4	Test Result	29
ANNEX A	TEST RESULT	30
A.1	Output Power	30
A.2	Occupied Bandwidth	31
A.3	Conducted Spurious Emissions	33
A.4	Band Edge (Authorized-band band-edge).....	36
A.5	Conducted Emissions.....	37
A.6	Radiated Spurious Emission	39
A.7	Band Edge (Restricted-band band-edge).....	48
A.8	Power Spectral Density (PSD)	48
ANNEX B	TEST SETUP PHOTOS	49

ANNEX C EUT EXTERNAL PHOTOS.....49

ANNEX D EUT INTERNAL PHOTOS49

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	<p>The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1.</p> <p>The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.</p> <p>The laboratory is a testing organization accredited by American Association for Laboratory Accreditation(A2LA) according to ISO/IEC 17025.The accreditation certificate is 4344.01.</p> <p>The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L6791.</p>
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	RuiXingHengFang Network(Shenzhen) Co., Ltd.
Address	Suite B3019, 3rd tower of Elite(YiLiDa) building, NO.1092 NanShan blvd. NanShan District, Shenzhen, China

2.2 Manufacturer Information

Manufacturer	RuiXingHengFang Network(Shenzhen) Co., Ltd.
Address	Suite B3019, 3rd tower of Elite(YiLiDa) building, NO.1092 NanShan blvd. NanShan District, Shenzhen, China

2.3 Factory Information

Factory	RuiXingHengFang Network(Shenzhen) Co., Ltd.
Address	Suite B3019, 3rd tower of Elite(YiLiDa) building, NO.1092 NanShan blvd. NanShan District, Shenzhen, China

2.4 General Description for Equipment under Test (EUT)

EUT Name	LoRaWAN Module
Model Name Under Test	RHF0M003
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	v2.1
Software Version	v2.1.18
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Antenna
-----------------------	---------

2.6 Technical Information

Network and Wireless connectivity	Lora Spread Spectrum, LoraWAN
-----------------------------------	-------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS
Modulation Type	LoRa
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Frequency Range	The frequency range used is 902 MHz to 928 MHz.
Number of channel	11
Tested Channel	0 (902.5 MHz), 5 (915 MHz), 10 (927.5 MHz)
Antenna Type	Dipole Antenna
Antenna Gain	-2 dBi (In test items related to antenna gain, the final results reflect this figure.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
0	902.5	6	917.5
1	905	7	920
2	907.5	8	922.5
3	910	9	925
4	912.5	10	927.5
5	915		


2.7 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

Power level setup in software		
Test Software Version	sscom32	
Mode	Channel	Soft Set
LoRa	ALL	TX LEVEL is built-in set parameters and cannot be changed and selected.

Run Software

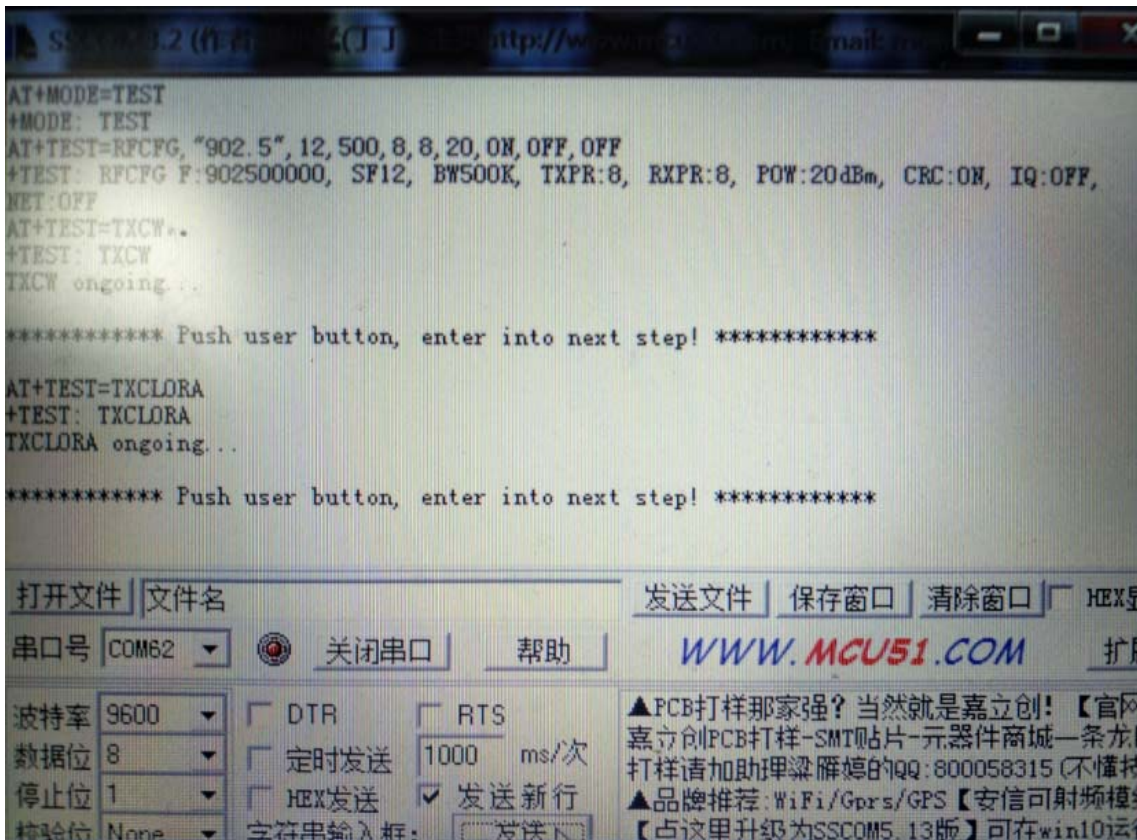

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-16 Edition)	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v04	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	N/A	--	Pass ^{Note1}
2	Output Power	15.247(b)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	Low/ High	ANNEX A.4	Pass
6	Conducted Emission	15.207	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	Low/Middle/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	Low/Middle/High	ANNEX A.8	Pass

Note¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2017.06.12	2018.06.11
Vector Signal Generator	ROHDE&SCHWARZ	SMBV100A	260592	2017.06.12	2018.06.11
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2017.06.12	2018.06.11
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2017.06.12	2018.06.11
Spectrum Analyzer	AGILENT	E4440A	MY45304434	2017.11.07	2018.11.06
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2017.06.22	2018.06.21
LISN	SCHWARZBECK	NSLK 8127	8127-687	2017.06.22	2018.06.21
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2017.06.12	2018.06.11
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2017.06.22	2018.06.21
Temperature Chamber	ANGELANTIONI SCIENCE	NTH64-40A	1310	2017.06.27	2018.06.26
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2017.11.07	2019.11.08
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2017.07.22	2019.07.21
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1148	2016.07.12	2018.07.11
Test Antenna-Horn(15-26.5 GHz)	SCHWARZBECK	BBHA 9170	9170-305	2017.06.22	2018.06.21
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	N/A	2019.01.06
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2019.02.20
Anechoic Chamber	EMC TECHNOLOGY LTD	21.1m*11.6m*7.35m	N/A	2016.08.09	2018.08.08
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2017.06.12	2018.06.11
Power Amplifier	OPHIR RF	5225F	1037	2017.02.17	2019.02.15
Power Amplifier	OPHIR RF	5273F	1016	2017.02.17	2019.02.15

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A
Feld Strength Meter	Narda	EP601	511WX51129	2018.05.21	2019.05.20
Mouth Simulator	B&K	4227	2423931	2017.11.16	2018.11.15
Sound Calibrator	B&K	4231	2430337	2017.11.16	2018.11.15
Sound Level Meter	B&K	NL-20	00844023	2017.11.16	2018.11.15
Ear Simulator	B&K	4185	2409449	2017.11.16	2018.11.15
Ear Simulator	B&K	4195	2418189	2017.11.16	2018.11.15
Laptop	Lenovo	X220	4286A17	N/A	N/A
RF cable	Balun	Balun1	SRD01	2018.07.25	2018.10.24
RF cable	Balun	Balun2	SRD02	2018.07.25	2018.10.24
RF cable	Balun	EMC1	EMC01	2018.07.25	2018.10.24
RF cable	Huber&suhner	Boa-flex I	N/A	2018.07.25	2018.10.24
RF cable	Huber&suhner	Steel-flex I	N/A	2018.07.25	2018.10.24

Note: the calibration period of the RF cable is three month.

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

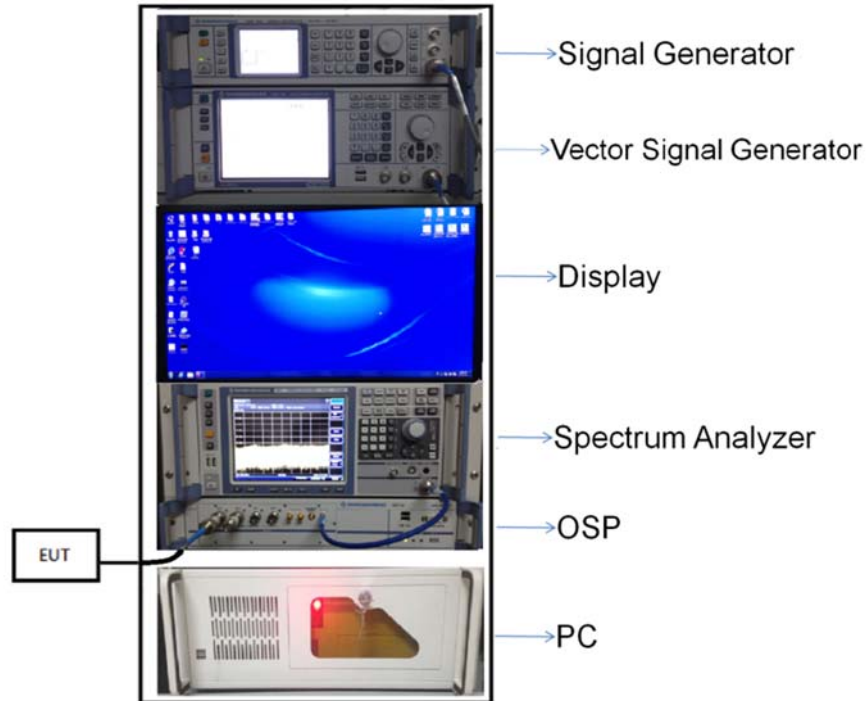


(Diagram 1)

4.4.2 For AC Power Supply Port Test

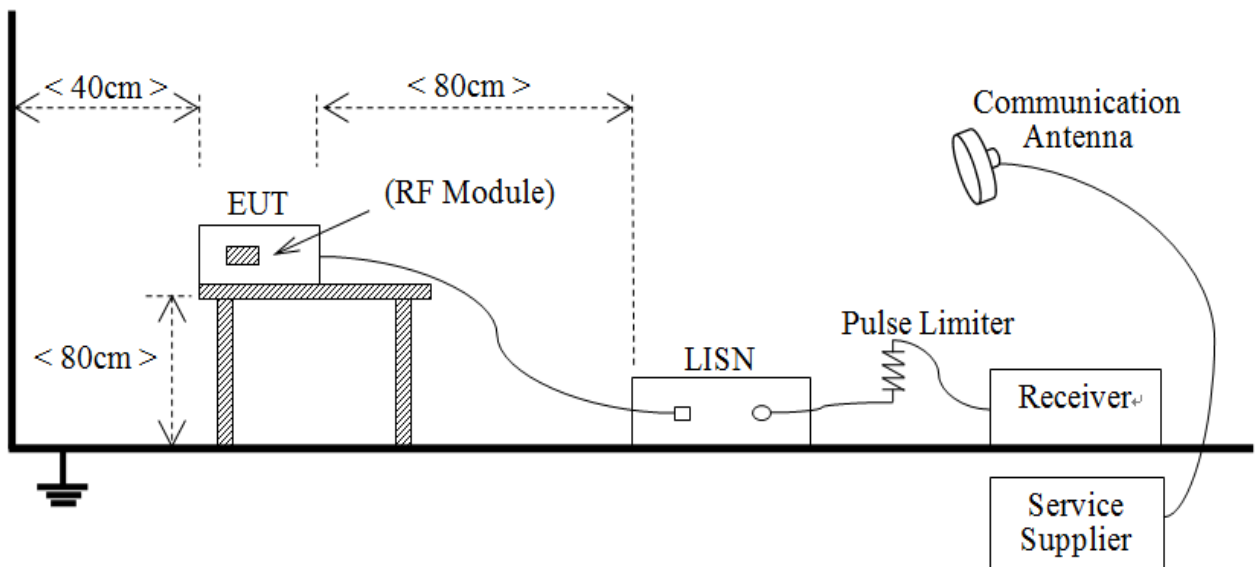


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

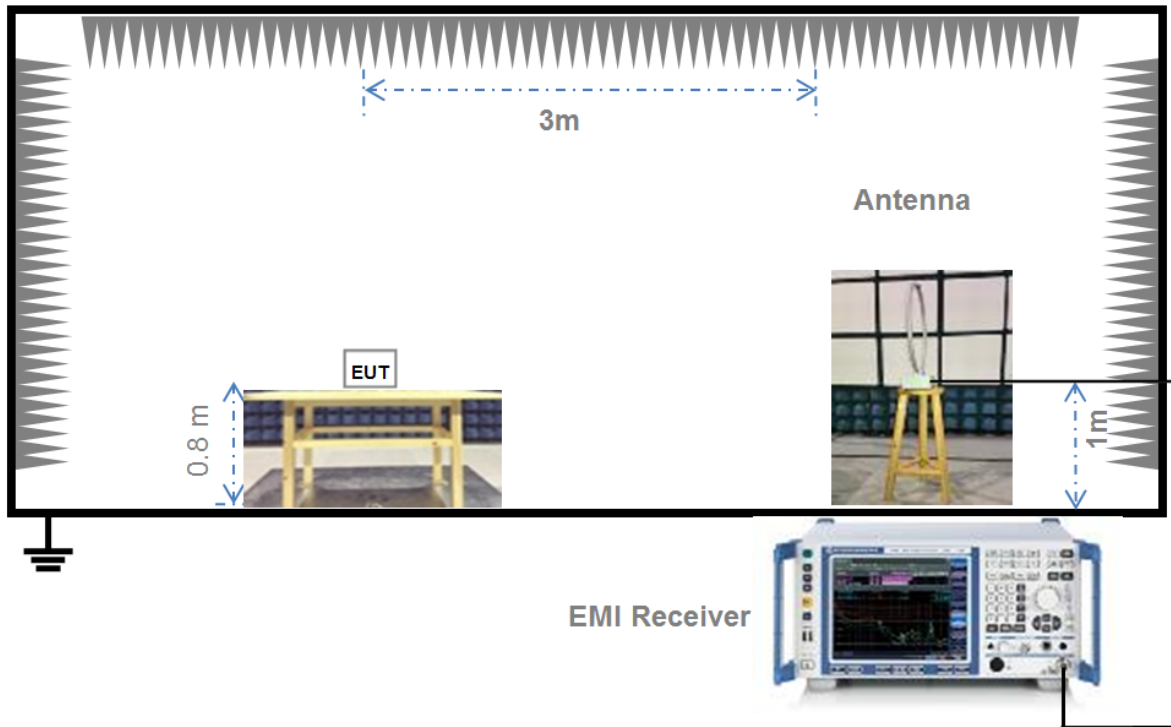


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

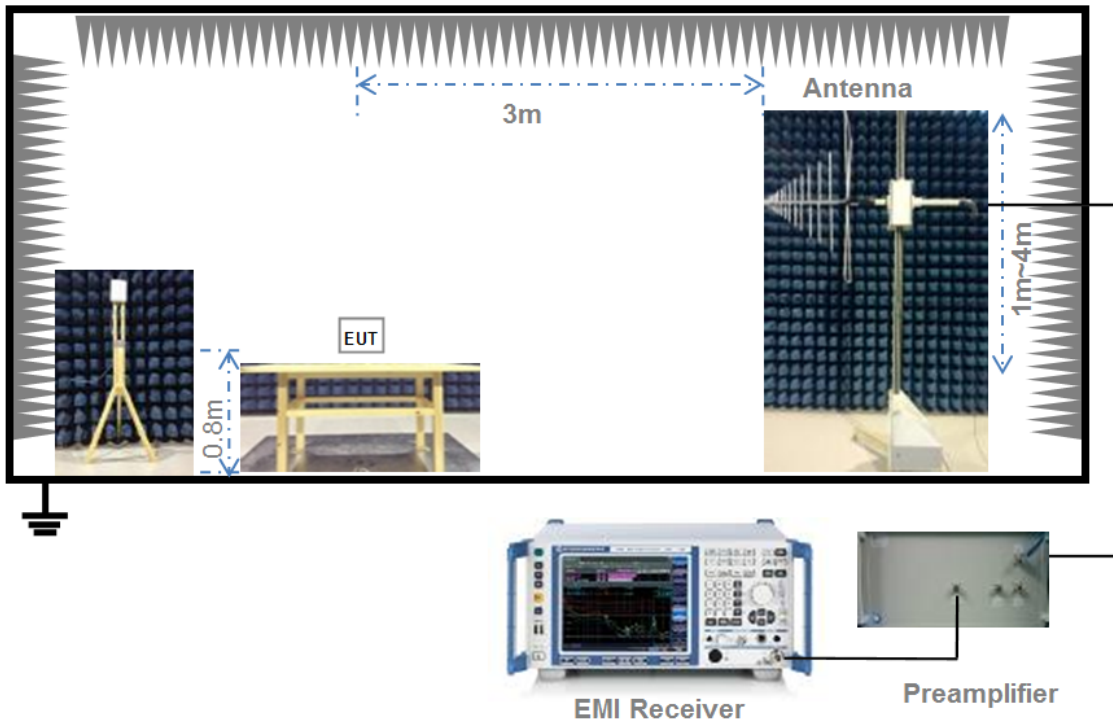

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

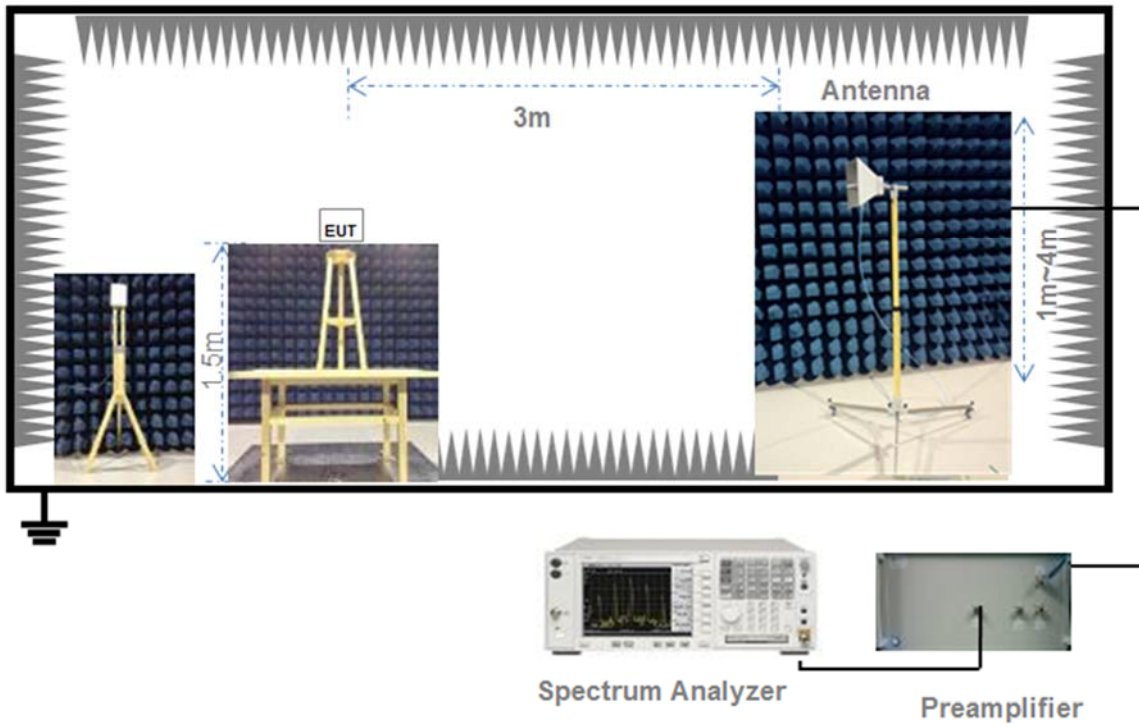

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

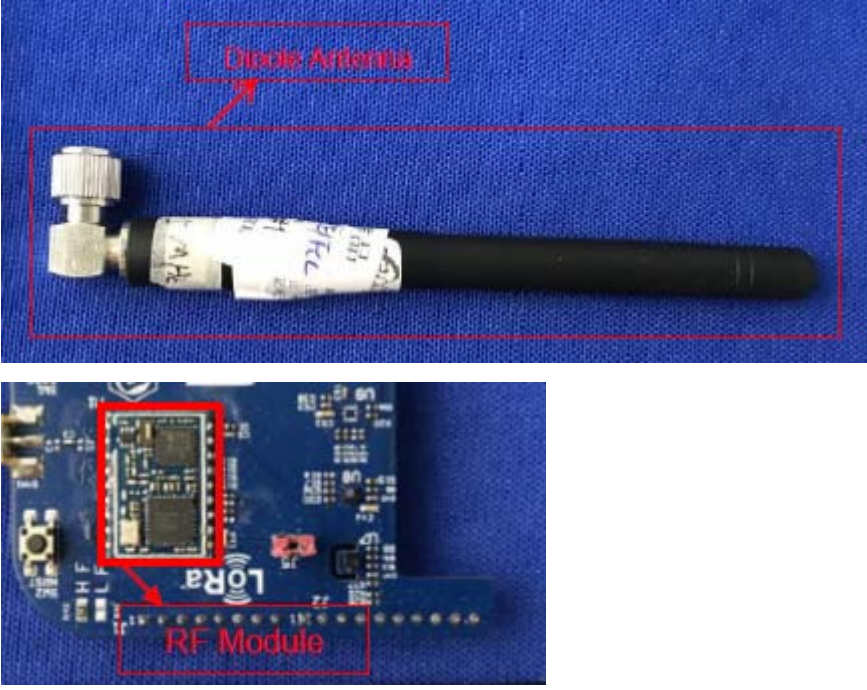Reference Documents	Item
Photo	 <p>The top photograph shows a disc antenna with a white label and a black handle, mounted on a blue PCB. A red box highlights the antenna, and a red arrow points to it with the label "Disc Antenna".</p> <p>The bottom photograph shows a blue PCB with a red box highlighting a component labeled "RF Module". A red arrow points to the component with the label "RF Module".</p>

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW \geq DTS bandwidth.

Set VBW $\geq 3 \times$ RBW.

Set span $\geq 3 \times$ RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value.

Set VBW \geq RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of

sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = 20*log[Field Strength ($\mu\text{V}/\text{m}$)].
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

1.1.1 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW ≥ 3 RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT


A.1 Output Power

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	17.98	62.81	30	1000	Pass
Middle	17.66	58.34			Pass
High	17.42	55.21			Pass


Test plots

LOW CHANNEL

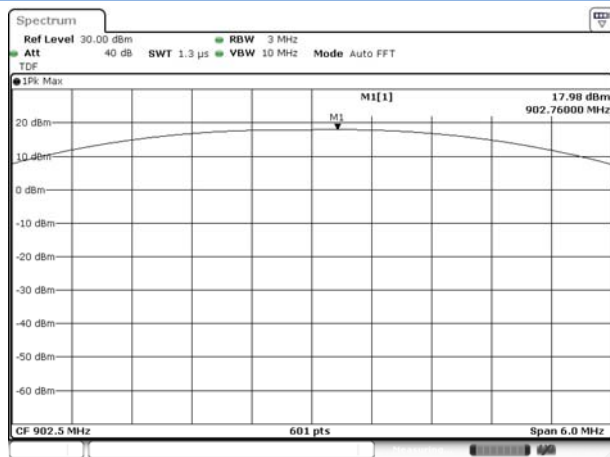


Date: 21.MAY.2018 17:34:15

MIDDLE CHANNEL

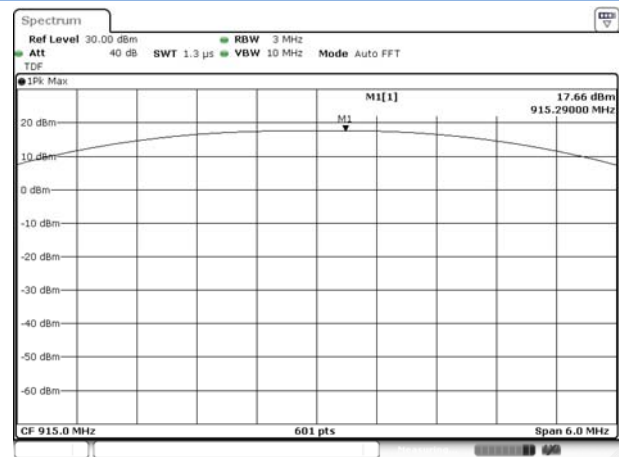

Date: 21.MAY.2018 17:38:35

HIGH CHANNEL

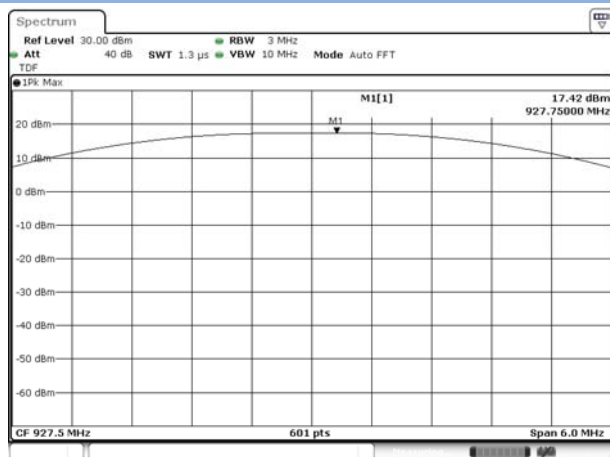

Date: 21.MAY.2018 17:40:44


A.2 Occupied Bandwidth

Test Data

Test Mode	LoRa		
Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
Low Channel	0.727539	0.586975	≥500
Middle Channel	0.744934	0.590449	≥500
High Channel	0.765259	0.619392	≥500


Test plots (6 dB Bandwidth)

LOW CHANNEL

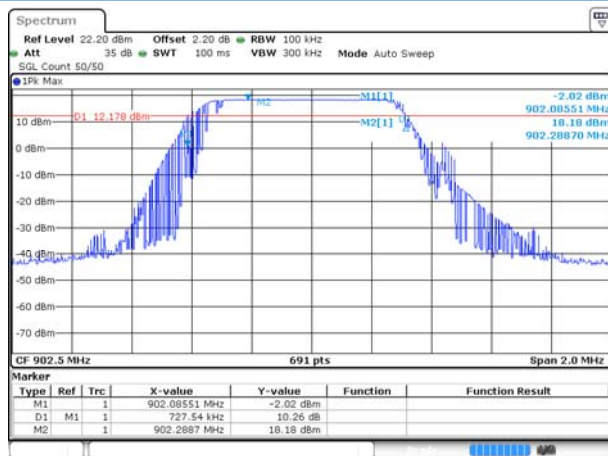


Date: 29 MAY 2018 18:44:26

MIDDLE CHANNEL

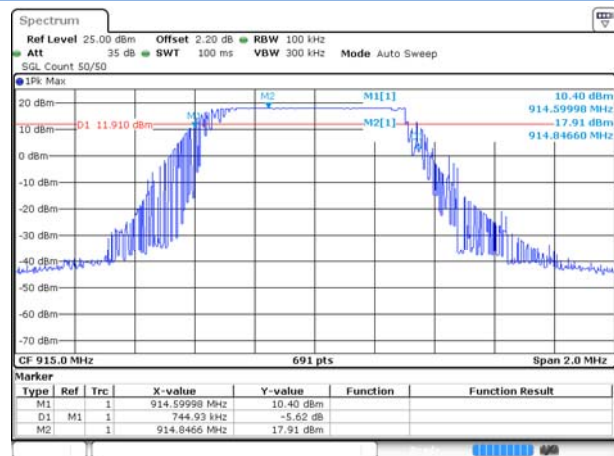

Date: 29 MAY 2018 18:43:35


HIGH CHANNEL

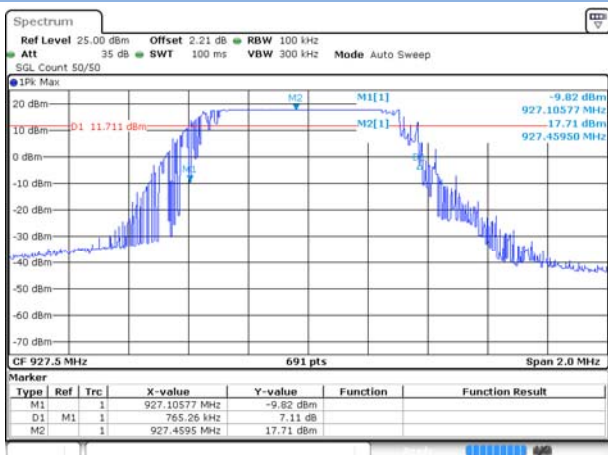


Date: 29 MAY 2018 18:39:56

Test plots (99% Bandwidth)


LOW CHANNEL

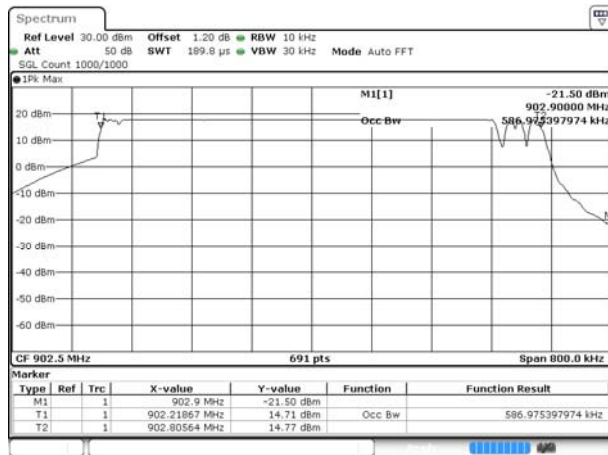

MIDDLE CHANNEL

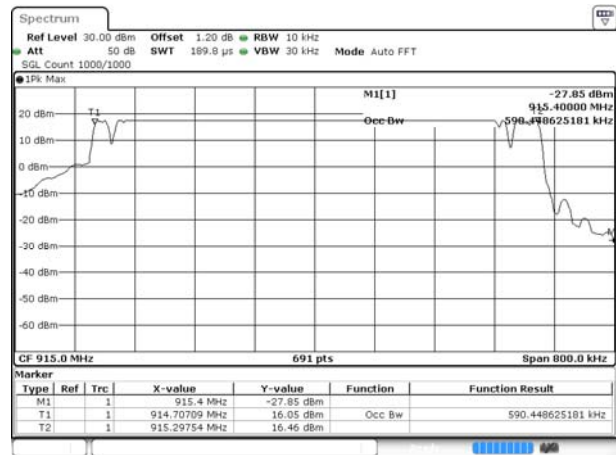

HIGH CHANNEL

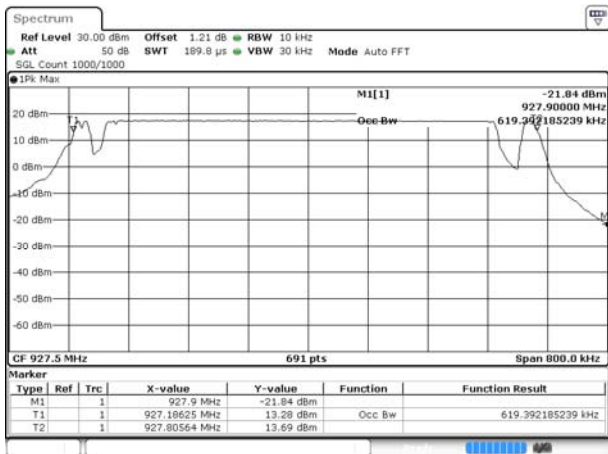


A.3 Conducted Spurious Emissions

Test Data

LoRa				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.99	17.85	-2.15	Pass
Middle	-39.41	17.53	-2.47	Pass
High	-39.84	17.39	-2.61	Pass


Test Plots

LOW CHANNEL , CARRIER LEVEL

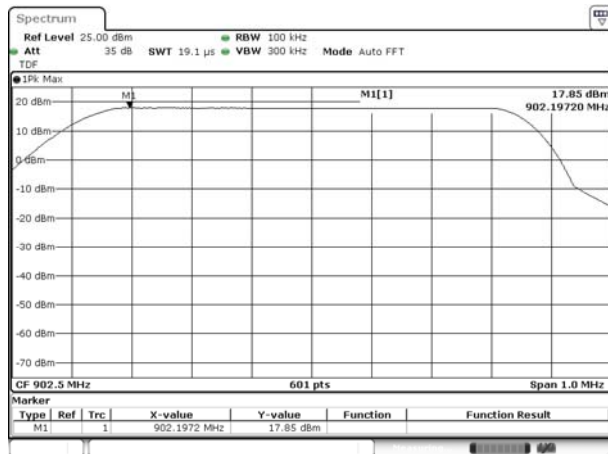


Date: 21.MAY.2018 17:34:38

LOW CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

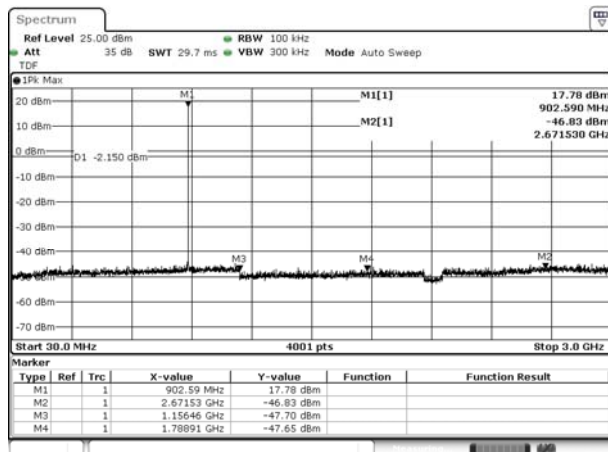


Date: 21.MAY.2018 17:35:09

LOW CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

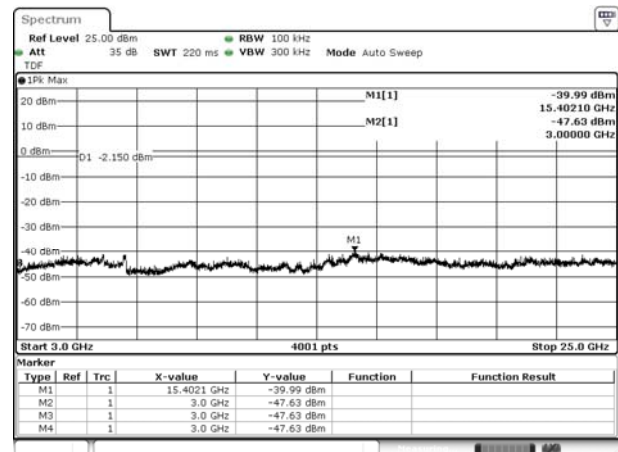


Date: 21.MAY.2018 17:35:28

MIDDLE CHANNEL , CARRIER LEVEL

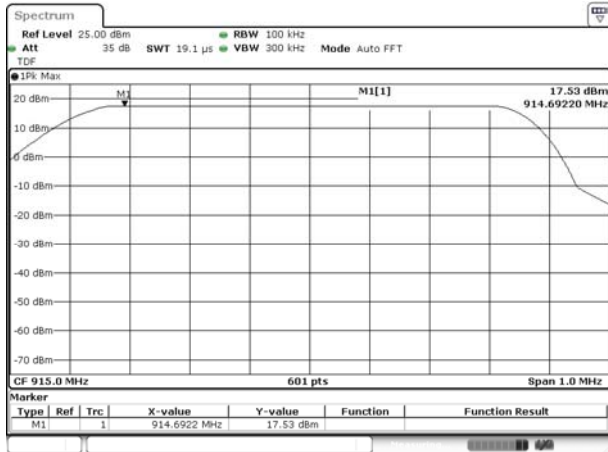


Date: 21 MAY 2018 17:38:59

MIDDLE CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

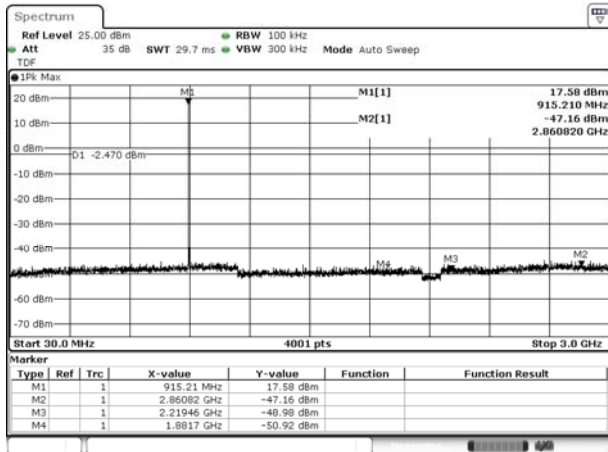


Date: 21 MAY 2018 17:39:21

MIDDLE CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

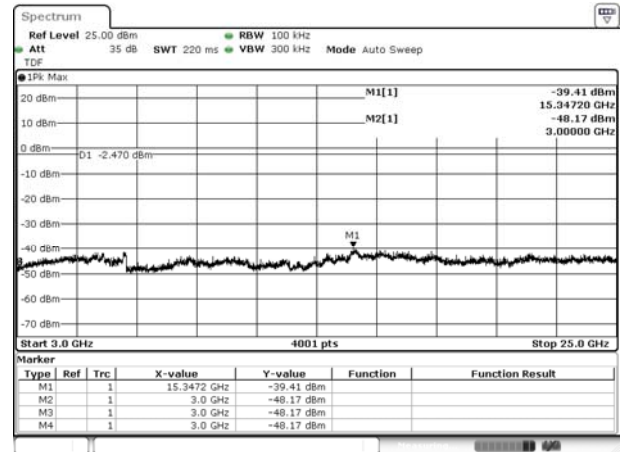


Date: 21 MAY 2018 17:39:38

High CHANNEL , CARRIER LEVEL

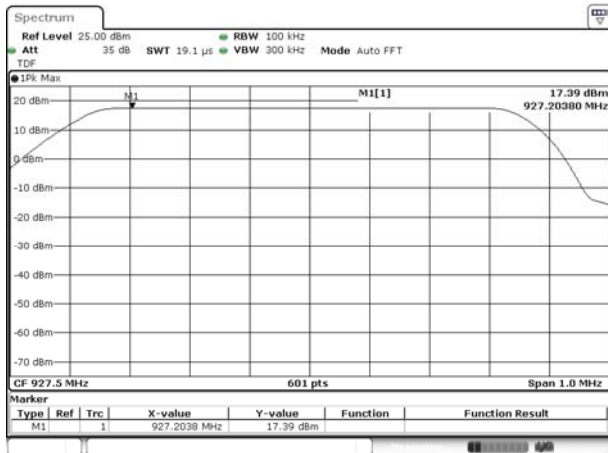


Date: 21 MAY 2018 17:41:13

HIGH CHANNEL , SPURIOUS 30 MHz ~ 3 GHz

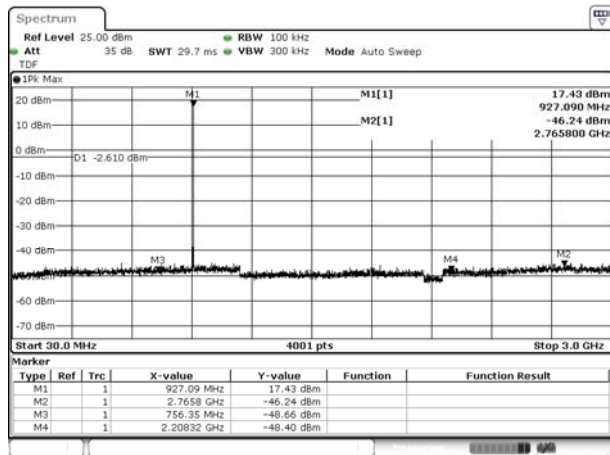

Date: 21.MAY.2018 17:41:36

HIGH CHANNEL , SPURIOUS 3 GHz ~ 25 GHz

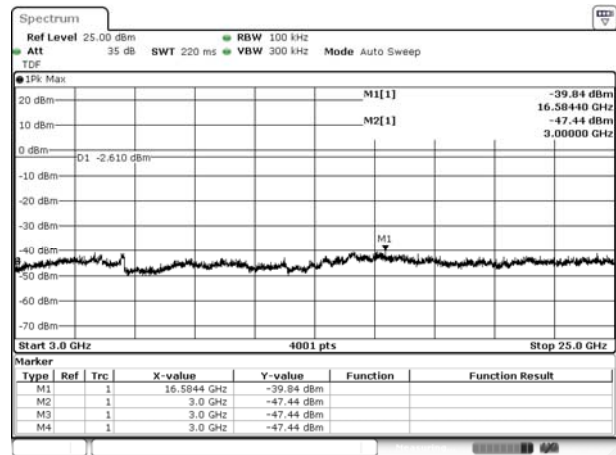

Date: 21.MAY.2018 17:41:54

A.4 Band Edge (Authorized-band band-edge)


Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Test Data

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-3.32	17.85	-2.15	Pass
High Channel	-14.30	17.39	-2.61	Pass


Test Plots

LOW CHANNEL, Carrier level

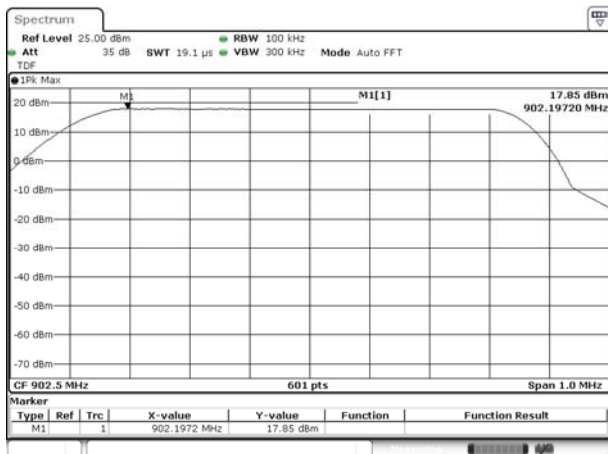


Date: 21.MAY.2018 17:34:38

LOW CHANNEL, Band Edge

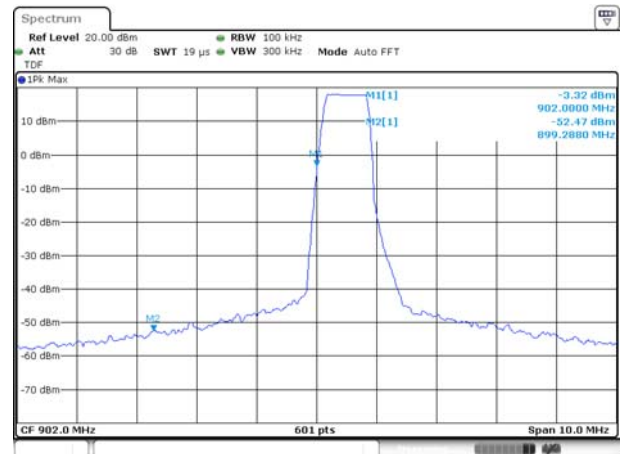


Date: 31.MAY.2018 10:09:46

High CHANNEL, Carrier level

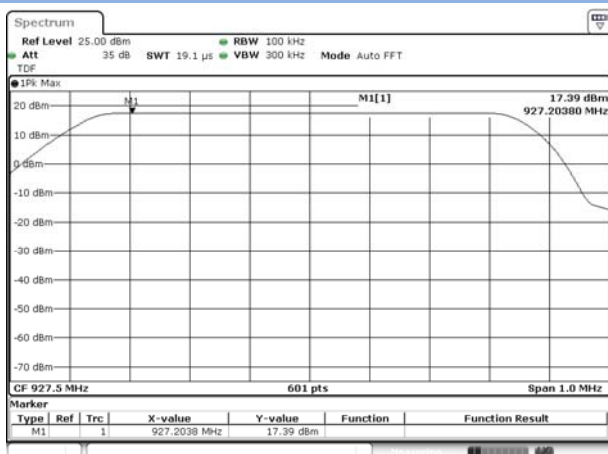

Date: 21.MAY.2018 17:41:13

LOW CHANNEL, Band Edge

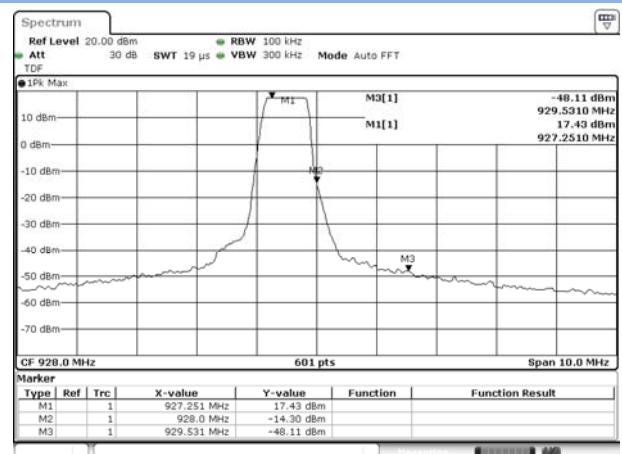


Date: 21.MAY.2018 17:42:26

A.5 Conducted Emissions


Note: The EUT is working in the Normal link mode.

Test Data and Plots

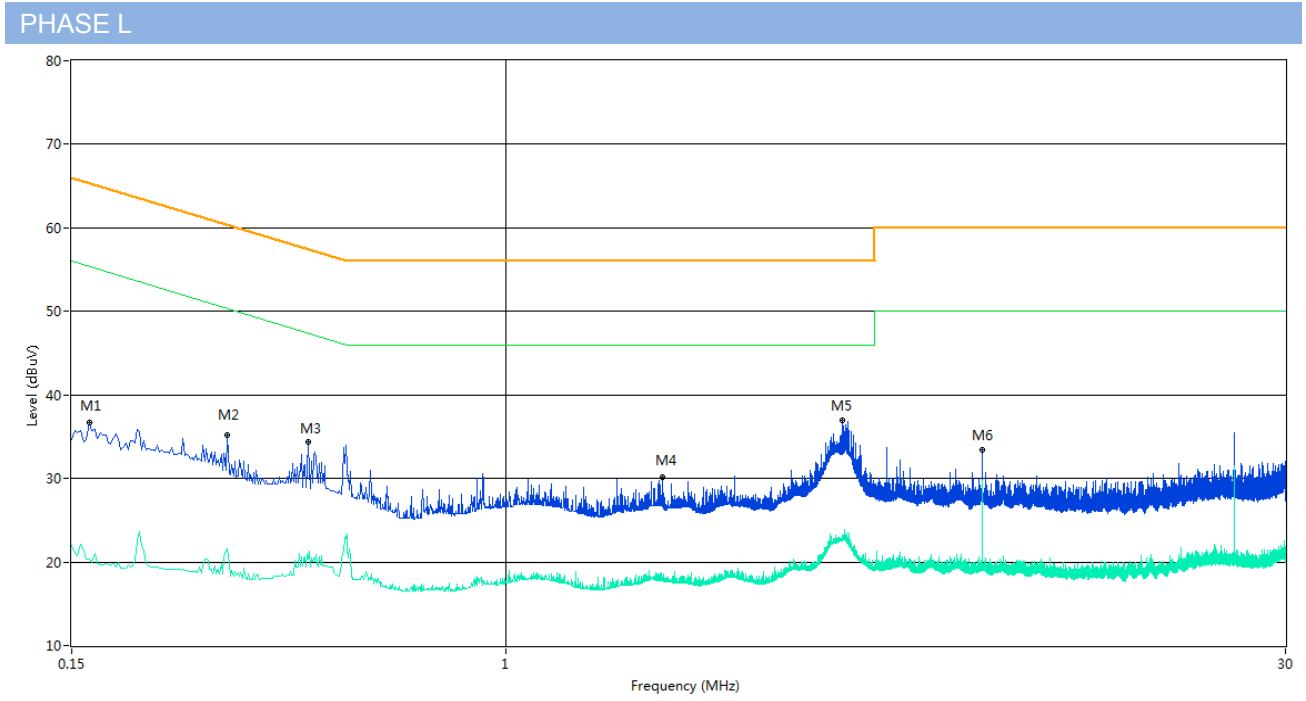

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.162	36.6	10.04	65.4	28.80	Peak	L Line	Pass
1**	0.162	20.4	10.04	55.4	35.00	AV	L Line	Pass
2	0.296	35.2	10.04	60.4	25.20	Peak	L Line	Pass
2**	0.296	21.6	10.04	50.4	28.80	AV	L Line	Pass
3	0.422	34.4	10.04	57.4	23.00	Peak	L Line	Pass
3**	0.422	20.4	10.04	47.4	27.00	AV	L Line	Pass
4	1.982	30.1	10.09	56.0	25.90	Peak	L Line	Pass
4**	1.982	18.2	10.09	46.0	27.80	AV	L Line	Pass
5	4.326	37.0	10.15	56.0	19.00	Peak	L Line	Pass
5**	4.326	22.5	10.15	46.0	23.50	AV	L Line	Pass
6	7.996	33.4	10.26	60.0	26.60	Peak	L Line	Pass
6**	7.996	29.7	10.26	50.0	20.30	AV	L Line	Pass

PHASE N

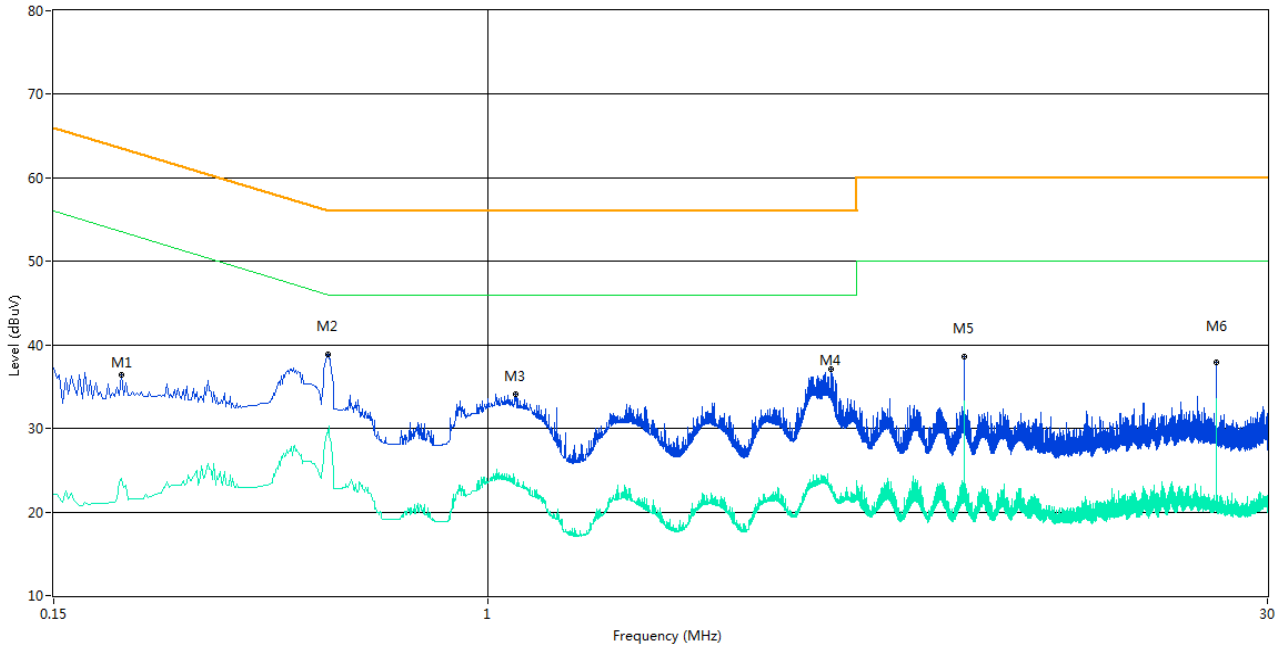

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.202	36.4	10.04	63.5	27.10	Peak	N Line	Pass
1**	0.202	24.1	10.04	53.5	29.40	AV	N Line	Pass
2	0.496	38.9	10.05	56.1	17.20	Peak	N Line	Pass
2**	0.496	29.5	10.05	46.1	16.60	AV	N Line	Pass
3	1.128	34.0	10.06	56.0	22.00	Peak	N Line	Pass
3**	1.128	23.3	10.06	46.0	22.70	AV	N Line	Pass
4	4.472	37.1	10.16	56.0	18.90	Peak	N Line	Pass
4**	4.472	22.5	10.16	46.0	23.50	AV	N Line	Pass
5	7.996	38.6	10.26	60.0	21.40	Peak	N Line	Pass
5**	7.996	33.3	10.26	50.0	16.70	AV	N Line	Pass
6	23.998	37.9	10.70	60.0	22.10	Peak	N Line	Pass
6**	23.998	32.8	10.70	50.0	17.20	AV	N Line	Pass

A.6 Radiated Spurious Emission

Note 1: The symbol of "--" in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The marked spikes near 900 MHz with circle should be ignored because they are Fundamental signal.


Test Data and Plots

902.75 MHz, ANT V

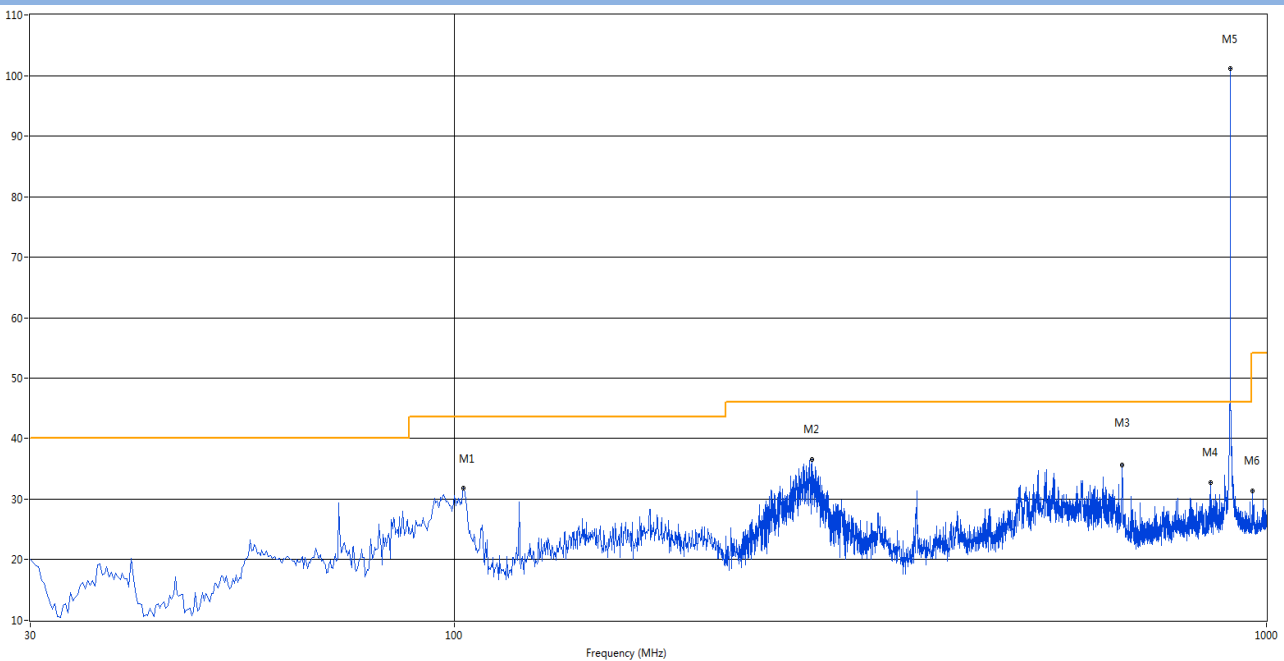


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	102.507	31.77	-25.58	43.5	11.73	Peak	298.60	100	Vertical	Pass
2	275.653	36.50	-23.56	46.0	9.50	Peak	190.80	200	Vertical	Pass
3	663.653	35.65	-14.48	46.0	10.35	Peak	186.90	100	Vertical	Pass
4	854.015	32.70	-11.93	46.0	13.30	Peak	325.40	100	Vertical	Pass
5	902.758	101.10	-10.89	46.0	-55.10	Peak	36.80	200	Vertical	N/A
6	961.442	31.33	-10.43	54.0	22.67	Peak	316.40	100	Vertical	Pass

902.75 MHz, ANT H

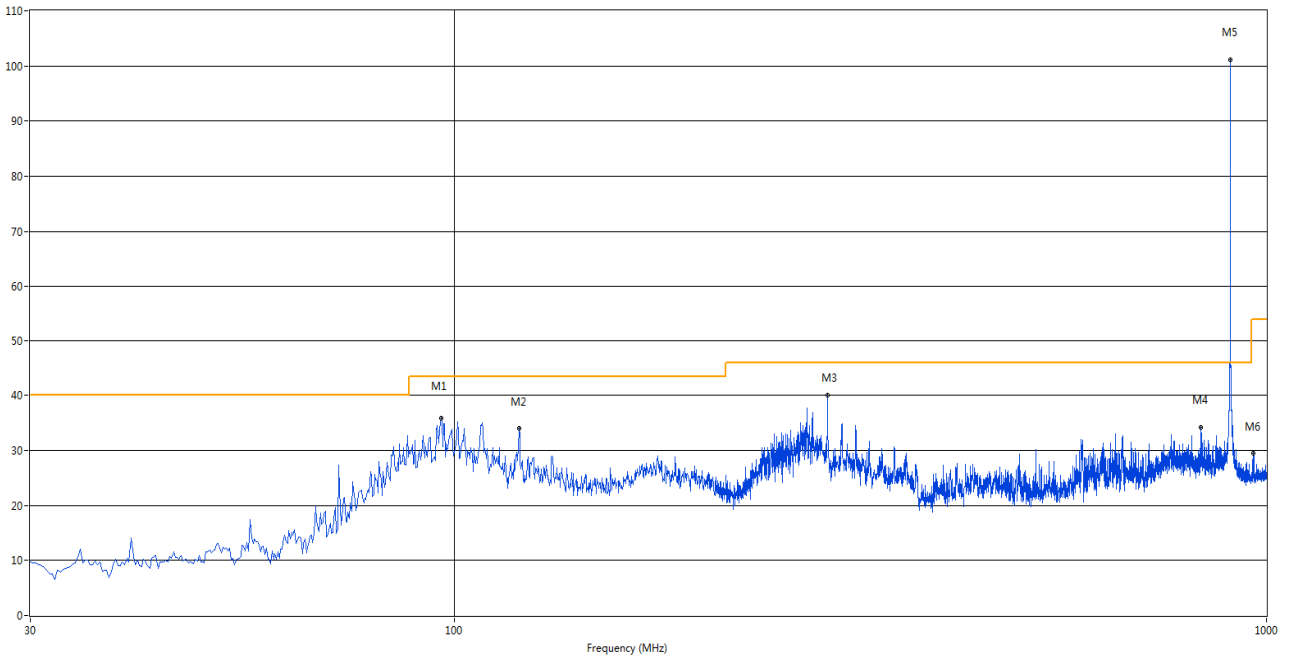


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	96.202	35.89	-26.21	43.5	7.61	Peak	185.40	200	Horizontal	Pass
2	119.967	33.98	-27.19	43.5	9.52	Peak	185.40	200	Horizontal	Pass
3	288.020	40.00	-23.10	46.0	6.00	Peak	252.20	100	Horizontal	Pass
4	829.765	34.23	-12.09	46.0	11.77	Peak	305.40	200	Horizontal	Pass
5	902.758	101.10	-10.89	46.0	-55.10	Peak	18.80	100	Horizontal	N/A
6	963.140	29.43	-10.45	54.0	24.57	Peak	0.00	200	Horizontal	Pass

915 MHz, ANT V

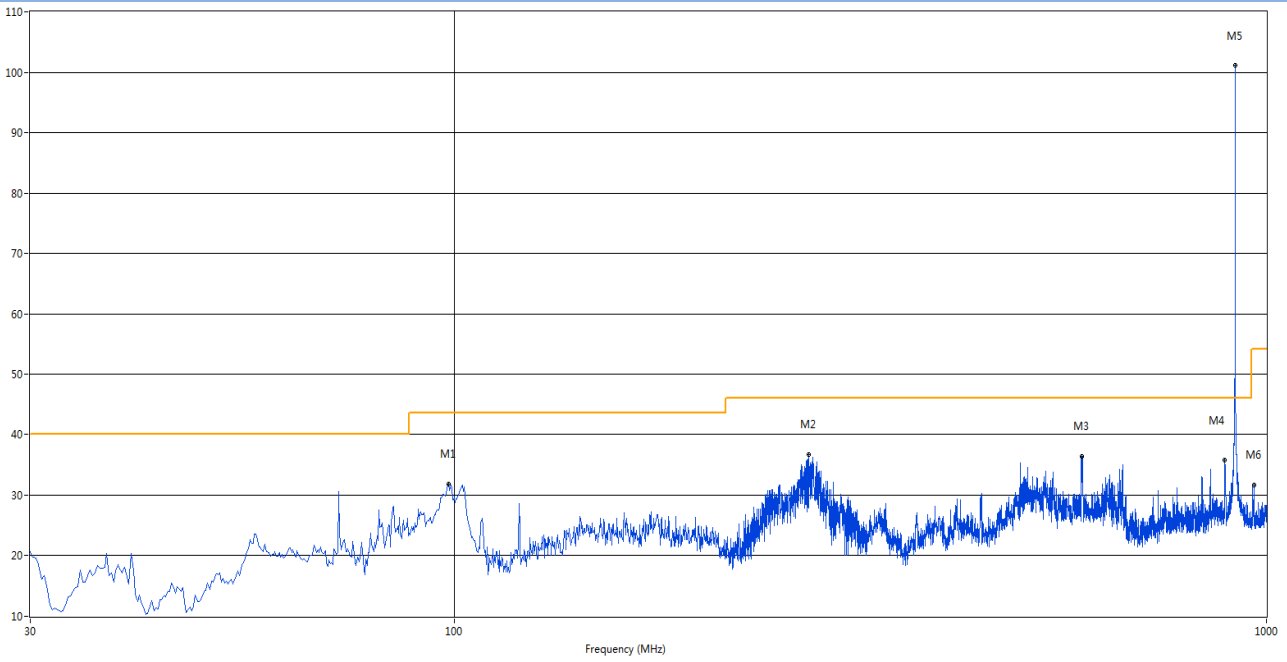


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	98.385	31.84	-25.86	43.5	11.66	Peak	285.40	100	Vertical	Pass
2	272.742	36.67	-23.68	46.0	9.33	Peak	191.30	200	Vertical	Pass
3	591.873	36.35	-15.76	46.0	9.65	Peak	0.00	200	Vertical	Pass
4	888.692	35.80	-11.07	46.0	10.20	Peak	311.80	100	Vertical	Pass
5	915.125	101.10	-10.71	46.0	-55.10	Peak	293.10	200	Vertical	N/A
6	965.322	31.66	-10.51	54.0	22.34	Peak	320.40	100	Vertical	Pass

915 MHz, ANT H

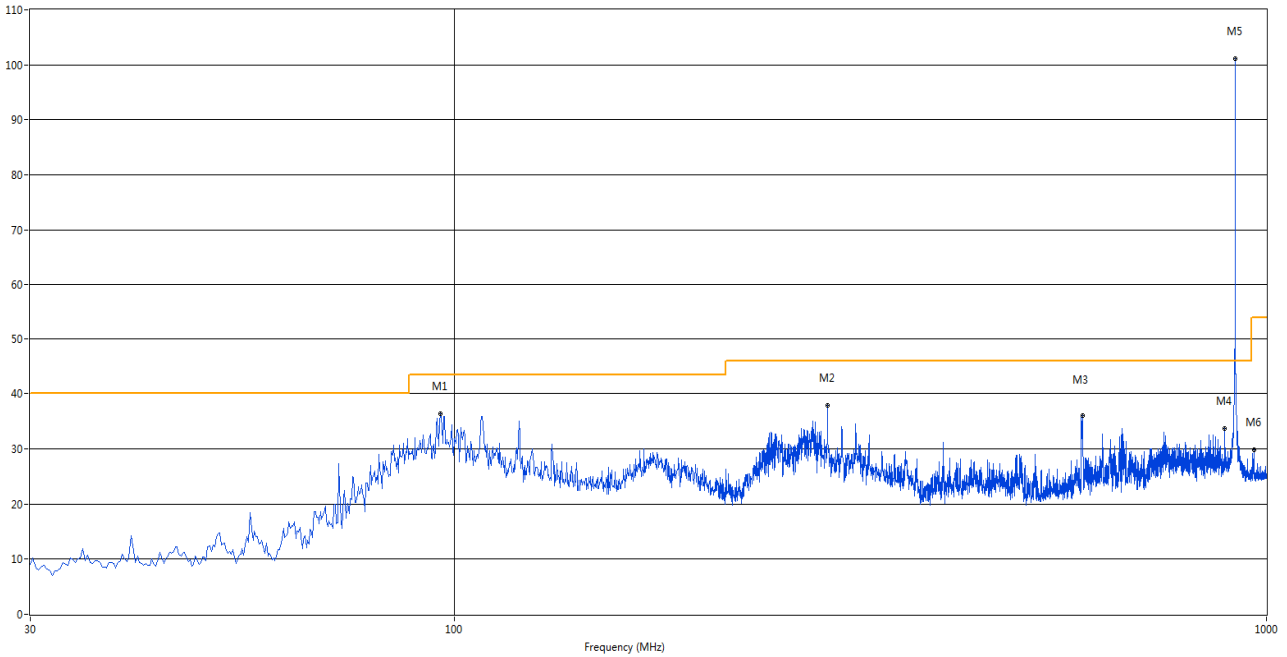


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	95.960	36.43	-26.26	43.5	7.07	Peak	0.00	200	Horizontal	Pass
2	288.020	37.96	-23.10	46.0	8.04	Peak	240.60	100	Horizontal	Pass
3	594.055	36.07	-15.73	46.0	9.93	Peak	271.60	100	Horizontal	Pass
4	888.450	33.67	-11.07	46.0	12.33	Peak	254.50	200	Horizontal	Pass
5	914.882	101.12	-10.72	46.0	-55.12	Peak	49.70	200	Horizontal	N/A
6	964.595	29.83	-10.51	54.0	24.17	Peak	330.00	100	Horizontal	Pass

927.25 MHz, ANT V

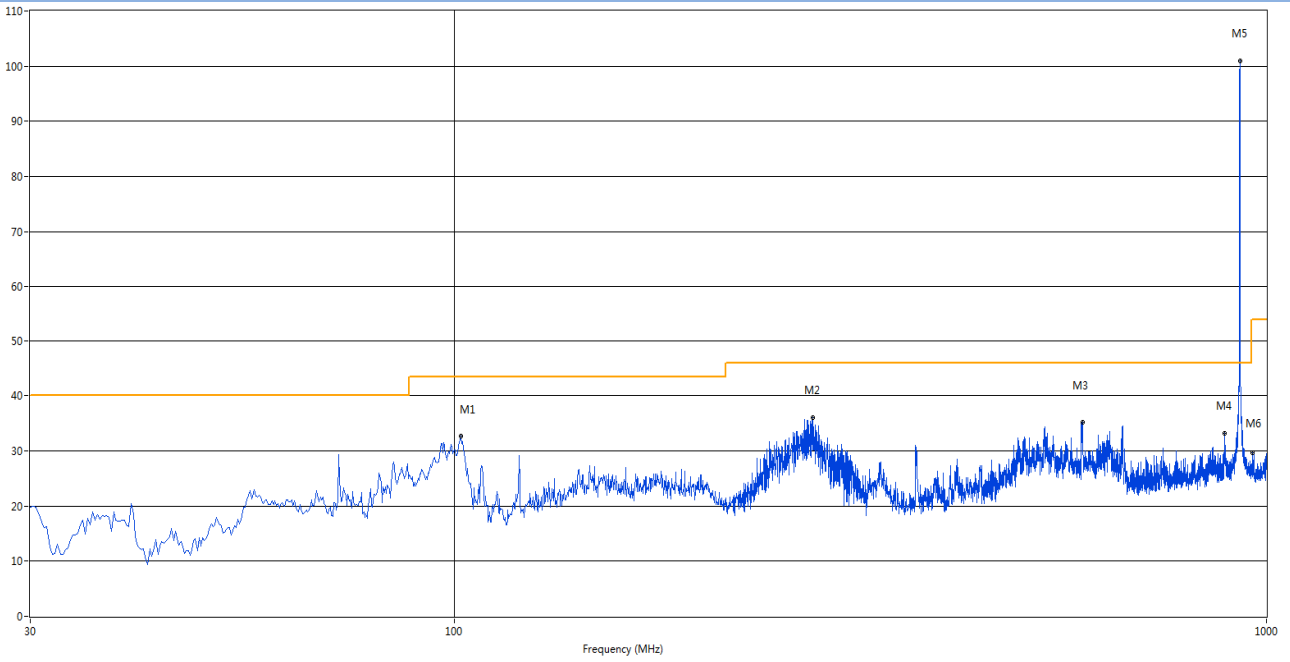

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	101.780	32.68	-25.58	43.5	10.82	Peak	285.40	100	Vertical	Pass
2	276.380	36.08	-23.53	46.0	9.92	Peak	178.40	200	Vertical	Pass
3	594.055	35.23	-15.73	46.0	10.77	Peak	0.00	200	Vertical	Pass
4	887.480	33.23	-11.08	46.0	12.77	Peak	227.90	100	Vertical	Pass
5	927.250	100.93	-10.68	46.0	-54.93	Peak	103.30	200	Vertical	N/A
6	961.442	29.75	-10.43	54.0	24.25	Peak	329.30	100	Vertical	Pass

927.25 MHz, ANT H

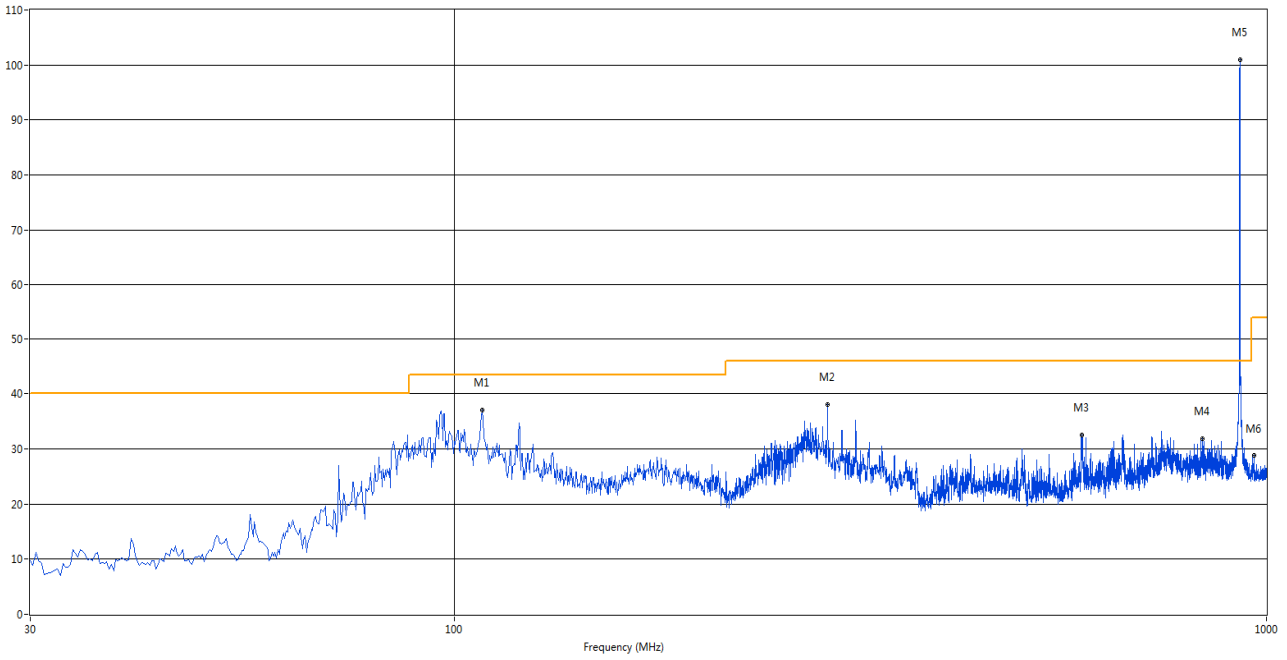

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1	108.085	37.00	-25.73	43.5	6.50	Peak	0.00	200	Horizontal	Pass
2	288.020	38.09	-23.10	46.0	7.91	Peak	256.80	100	Horizontal	Pass
3	591.873	32.60	-15.76	46.0	13.40	Peak	278.60	100	Horizontal	Pass
4	833.887	31.91	-12.09	46.0	14.09	Peak	265.40	100	Horizontal	Pass
5	927.250	100.95	-10.68	46.0	-54.95	Peak	164.90	100	Horizontal	N/A
6	965.322	28.76	-10.51	54.0	25.24	Peak	0.00	200	Horizontal	Pass

LOW CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1805.000	38.6	-10.68	54.0	15.40	AV	6.00	150	Vertical	Pass
1	1805.000	46.43	-10.68	74.0	27.57	Peak	6.00	150	Vertical	Pass
2**	1994.500	43.1	-8.51	54.0	10.90	AV	8.00	150	Vertical	Pass
2	1994.500	54.24	-8.51	74.0	19.76	Peak	8.00	150	Vertical	Pass
3**	2248.500	35.9	-5.08	54.0	18.10	AV	8.00	150	Vertical	Pass
3	2248.500	46.66	-5.08	74.0	27.34	Peak	8.00	150	Vertical	Pass
4**	2913.000	38.5	-1.66	54.0	15.50	AV	3.00	150	Vertical	Pass
4	2913.000	50.24	-1.66	74.0	23.76	Peak	3.00	150	Vertical	Pass
5**	3629.250	36.6	-4.44	54.0	17.40	AV	13.00	150	Vertical	Pass
5	3629.250	48.22	-4.44	74.0	25.78	Peak	13.00	150	Vertical	Pass
6**	4640.250	39.2	-2.22	54.0	14.80	AV	5.00	150	Vertical	Pass
6	4640.250	49.70	-2.22	74.0	24.30	Peak	5.00	150	Vertical	Pass

LOW CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1805.000	40.4	-10.68	54.0	13.60	AV	176.00	150	Horizontal	Pass
1	1805.000	46.52	-10.68	74.0	27.48	Peak	176.00	150	Horizontal	Pass
2**	1994.000	37.6	-8.57	54.0	16.40	AV	282.00	150	Horizontal	Pass
2	1994.000	50.68	-8.57	74.0	23.32	Peak	282.00	150	Horizontal	Pass
3**	2243.500	35.8	-4.98	54.0	18.20	AV	79.00	150	Horizontal	Pass
3	2243.500	47.99	-4.98	74.0	26.01	Peak	79.00	150	Horizontal	Pass
4**	2864.000	38.1	-1.27	54.0	15.90	AV	344.00	150	Horizontal	Pass
4	2864.000	50.87	-1.27	74.0	23.13	Peak	344.00	150	Horizontal	Pass
5**	3632.250	37.3	-4.32	54.0	16.70	AV	263.00	150	Horizontal	Pass
5	3632.250	48.22	-4.32	74.0	25.78	Peak	263.00	150	Horizontal	Pass
6**	4575.000	39.0	-2.43	54.0	15.00	AV	202.00	150	Horizontal	Pass
6	4575.000	51.13	-2.43	74.0	22.87	Peak	202.00	150	Horizontal	Pass

MIDDLE CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1830.500	38.5	-10.82	54.0	15.50	AV	3.00	150	Vertical	Pass
1	1830.500	46.40	-10.82	74.0	27.60	Peak	3.00	150	Vertical	Pass
2**	1995.000	41.8	-8.46	54.0	12.20	AV	4.00	150	Vertical	Pass
2	1995.000	52.19	-8.46	74.0	21.81	Peak	4.00	150	Vertical	Pass
3**	2620.000	36.1	-3.69	54.0	17.90	AV	5.00	150	Vertical	Pass
3	2620.000	47.82	-3.69	74.0	26.18	Peak	5.00	150	Vertical	Pass
4**	2980.500	38.0	-0.76	54.0	16.00	AV	8.00	150	Vertical	Pass
4	2980.500	50.83	-0.76	74.0	23.17	Peak	8.00	150	Vertical	Pass
5**	3906.000	37.2	-4.06	54.0	16.80	AV	1.00	150	Vertical	Pass
5	3906.000	49.05	-4.06	74.0	24.95	Peak	1.00	150	Vertical	Pass
6**	4665.000	39.3	-1.86	54.0	14.70	AV	9.00	150	Vertical	Pass
6	4665.000	50.34	-1.86	74.0	23.66	Peak	9.00	150	Vertical	Pass

MIDDLE CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1829.500	32.5	-10.82	54.0	21.50	AV	5.00	150	Horizontal	Pass
1	1829.500	45.68	-10.82	74.0	28.32	Peak	5.00	150	Horizontal	Pass
2**	2246.500	35.5	-4.94	54.0	18.50	AV	1.00	150	Horizontal	Pass
2	2246.500	47.17	-4.94	74.0	26.83	Peak	1.00	150	Horizontal	Pass
3**	2631.500	35.8	-3.73	54.0	18.20	AV	10.00	150	Horizontal	Pass
3	2631.500	47.75	-3.73	74.0	26.25	Peak	10.00	150	Horizontal	Pass
4**	2912.000	38.0	-1.68	54.0	16.00	AV	12.00	150	Horizontal	Pass
4	2912.000	50.63	-1.68	74.0	23.37	Peak	12.00	150	Horizontal	Pass
5**	3631.500	37.3	-4.30	54.0	16.70	AV	10.00	150	Horizontal	Pass
5	3631.500	47.19	-4.30	74.0	26.81	Peak	10.00	150	Horizontal	Pass
6**	4483.500	38.5	-2.55	54.0	15.50	AV	12.00	150	Horizontal	Pass
6	4483.500	49.52	-2.55	74.0	24.48	Peak	12.00	150	Horizontal	Pass

HIGH CHANNEL 1 GHz to 10 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1854.500	34.6	-10.05	54.0	19.40	AV	15.00	150	Vertical	Pass
1	1854.500	44.90	-10.05	74.0	29.10	Peak	15.00	150	Vertical	Pass
2**	1993.500	38.2	-8.63	54.0	15.80	AV	12.00	150	Vertical	Pass
2	1993.500	50.92	-8.63	74.0	23.08	Peak	12.00	150	Vertical	Pass
3**	2337.500	35.6	-5.39	54.0	18.40	AV	12.00	150	Vertical	Pass
3	2337.500	47.49	-5.39	74.0	26.51	Peak	12.00	150	Vertical	Pass
4**	2883.000	37.6	-2.02	54.0	16.40	AV	6.00	150	Vertical	Pass
4	2883.000	50.24	-2.02	74.0	23.76	Peak	6.00	150	Vertical	Pass
5**	3757.500	36.4	-4.77	54.0	17.60	AV	13.00	150	Vertical	Pass
5	3757.500	47.89	-4.77	74.0	26.11	Peak	13.00	150	Vertical	Pass
6**	4487.250	39.6	-2.40	54.0	14.40	AV	6.00	150	Vertical	Pass
6	4487.250	49.58	-2.40	74.0	24.42	Peak	6.00	150	Vertical	Pass

HIGH CHANNEL 1 GHz to 10 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (o)	Height (cm)	ANT	Verdict
1**	1855.500	37.8	-9.95	54.0	16.20	AV	10.00	150	Horizontal	Pass
1	1855.500	45.03	-9.95	74.0	28.97	Peak	10.00	150	Horizontal	Pass
2**	2184.500	34.3	-6.49	54.0	19.70	AV	11.00	150	Horizontal	Pass
2	2184.500	47.02	-6.49	74.0	26.98	Peak	11.00	150	Horizontal	Pass
3**	2598.000	35.7	-3.58	54.0	18.30	AV	15.00	150	Horizontal	Pass
3	2598.000	48.95	-3.58	74.0	25.05	Peak	15.00	150	Horizontal	Pass
4**	2955.000	37.6	-0.60	54.0	16.40	AV	11.00	150	Horizontal	Pass
4	2955.000	49.98	-0.60	74.0	24.02	Peak	11.00	150	Horizontal	Pass
5**	3629.250	37.0	-4.44	54.0	17.00	AV	5.00	150	Horizontal	Pass
5	3629.250	47.62	-4.44	74.0	26.38	Peak	5.00	150	Horizontal	Pass
6**	4428.750	38.0	-3.15	54.0	16.00	AV	8.00	150	Horizontal	Pass
6	4428.750	49.26	-3.15	74.0	24.74	Peak	8.00	150	Horizontal	Pass

A.7 Band Edge (Restricted-band band-edge)

Pass

Note: The adjacent to the restricted frequency band (608-614MHz and 960-1240MHz) is far away the fundamental, it is noise only. Please refer to Section A.6 for test data.

A.8 Power Spectral Density (PSD)

Test Data


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	2.75	8	Pass
Middle Channel	2.71	8	Pass
High Channel	2.70	8	Pass

Test plots

LOW CHANNEL



MIDDLE CHANNEL

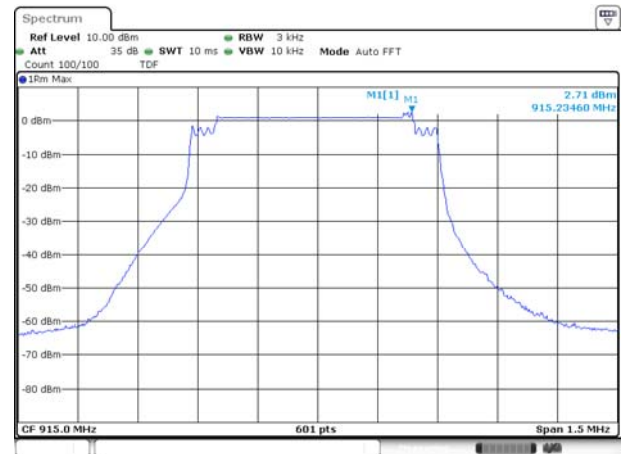

HIGH CHANNEL



ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ1850102-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL-SZ1850102-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL-SZ1850102-AI.PDF".

--END OF REPORT--