

RF

TEST REPORT

ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
LoRaWAN communication node

ISSUED TO
Ruixing Hengfang Network (Shenzhen) Co., Ltd

Room 201, building 6 Software Park(Phase 1), Gaoxin Mid 3rd Road,
Science and Technology Park, NanShan District, Shenzhen,
Guangdong, China 518017



Tested by: Julie Zhu
Julie Zhu
Date Feb. 16, 2022

Approved by: Liao Jianming
Liao Jianming
(Technical Director)
Date Feb. 16, 2022

Report No.: BL-SZ21C0555-602
EUT Name: LoRaWAN communication node
Model Name: RHF0M084
Brand Name: RisingHF
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 2
(refer section 3.1)
FCC ID: 2AJUZ0M084
ISED Number: 22005-0M084
Test Conclusion: Pass
Test Date: Dec. 20, 2021 ~ Dec. 30, 2021
Date of Issue: Feb. 16, 2022

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jan. 18, 2022</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Feb. 16, 2022</u>	<u>Updated applicant and manufacturer addresses</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Test Software List	10
4.4	Measurement Uncertainty	11
4.5	Description of Test Setup	11
4.5.1	For Antenna Port Test	11
4.5.2	For AC Power Supply Port Test	12
4.5.3	For Radiated Test (Below 30 MHz)	12
4.5.4	For Radiated Test (30 MHz-1 GHz)	13

4.5.5	For Radiated Test (Above 1 GHz)	13
4.6	Measurement Results Explanation Example.....	14
4.6.1	For conducted test items:	14
4.6.2	For radiated band edges and spurious emission test:.....	14
5	TEST ITEMS	15
5.1	Antenna Requirements	15
5.1.1	Relevant Standards.....	15
5.1.2	Antenna Anti-Replacement Construction	15
5.1.3	Antenna Gain	15
5.2	Output Power	16
5.2.1	Test Limit.....	16
5.2.2	Test Setup.....	16
5.2.3	Test Procedure.....	16
5.2.4	Test Result	17
5.3	Occupied Bandwidth.....	18
5.3.1	Limit.....	18
5.3.2	Test Setup.....	18
5.3.3	Test Procedure.....	18
5.3.4	Test Result	18
5.4	Conducted Spurious Emission.....	19
5.4.1	Limit.....	19
5.4.2	Test Setup.....	19
5.4.3	Test Procedure.....	19
5.4.4	Test Result	20
5.5	Band Edge (Authorized-band band-edge).....	21
5.5.1	Limit.....	21
5.5.2	Test Setup.....	21
5.5.3	Test Procedure.....	21
5.5.4	Test Result	21
5.6	Conducted Emission.....	22
5.6.1	Limit.....	22
5.6.2	Test Setup.....	22

5.6.3	Test Procedure	22
5.6.4	Test Result	22
5.7	Radiated Spurious Emission	23
5.7.1	Limit	23
5.7.2	Test Setup	23
5.7.3	Test Procedure	23
5.7.4	Test Result	24
5.8	Band Edge (Restricted-band band-edge)	25
5.8.1	Limit	25
5.8.2	Test Setup	25
5.8.3	Test Procedure	25
1.1.1	Test Result	25
5.9	Power Spectral density (PSD)	26
5.9.1	Limit	26
5.9.2	Test Setup	26
5.9.3	Test Procedure	26
5.9.4	Test Result	26
ANNEX A	TEST RESULT	27
A.1	Output Power	27
A.2	Occupied Bandwidth	29
A.3	Conducted Spurious Emissions	31
A.4	Band Edge (Authorized-band band-edge)	34
A.5	Conducted Emissions	35
A.6	Radiated Spurious Emission	37
A.7	Band Edge (Restricted-band band-edge)	49
A.8	Power Spectral Density (PSD)	52
ANNEX B	TEST SETUP PHOTOS	53
ANNEX C	EUT EXTERNAL PHOTOS	53
ANNEX D	EUT INTERNAL PHOTOS	53

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v2.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Ruixing Hengfang Network (Shenzhen) Co., Ltd
Address	Room 201, building 6 Software Park(Phase 1), Gaoxin Mid 3rd Road, Science and Technology Park, NanShan District, Shenzhen, Guangdong, China 518017

2.2 Manufacturer Information

Manufacturer	Ruixing Hengfang network (Shenzhen) Co.,Ltd
Address	Room 201, building 6 Software Park(Phase 1), Gaoxin Mid 3rd Road, Science and Technology Park, NanShan District, Shenzhen, Guangdong, China 518017

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	LoRaWAN communication node
Model Name Under Test	RHF0M084
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	0M0842063A00001
Hardware Version	RHF0M084_V2.0
Software Version	v5.0.2
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	2.4G ISM Band (GFSK modulation), LoRa
-----------------------------------	---------------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS
Modulation Type	LoRa
Product Type	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Frequency Range	The frequency range used is 923.3 MHz to 927.5 MHz. The frequency block is 902MHz to 928MHz.
Number of channel	8
Tested Channel	1 (923.3 MHz), 5 (925.7 MHz), 8 (927.5 MHz)
Antenna Type	Dipole Antenna
Antenna Gain	1.0 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna System(MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel number	Freq. (MHz)	Channel number	Freq. (MHz)
1	923.3	5	925.7
2	923.9	6	926.3
3	924.5	7	926.9
4	925.1	8	927.5

2.6 Additional Instructions

EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Run Software

Power level setup in software			
Test Software Version	SSCOM V5.13.1		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	HP	N/A
Mode	Frequency (MHz)		Soft Set
LoRa	All		Power parameter Settings is 14

Run Software:



3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	KDB Publication 662911 D01v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
6	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (6)	--	Pass ^{Note1}
2	Output Power	15.247(b)	RSS-247, 5.4 (4)	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.6; RSS-247, 5.2 (1)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-GEN, 8.9; RSS-247, 5.5	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (2)	ANNEX A.8	Pass

Note¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2021.06.01	2022.05.31
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2021.06.01	2022.05.31
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2021.06.01	2022.05.31
LISN	SCHWARZBECK	NSLK 8127	8127-687	2021.06.01	2022.05.31
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2021.08.20	2024.08.19
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2022.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.07.02	2023.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2019.08.08	2022.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V19.8.28.435	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.82°C
Humidity	4.1%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

$$\text{Conducted value (dBm)} = \text{Measurement value (dBm)} + \text{cable loss (dB)}$$


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

$$\text{Conducted value (dBm)} = 10 \text{ dBm} + 0.5 \text{ dB} = 10.5 \text{ dBm}$$

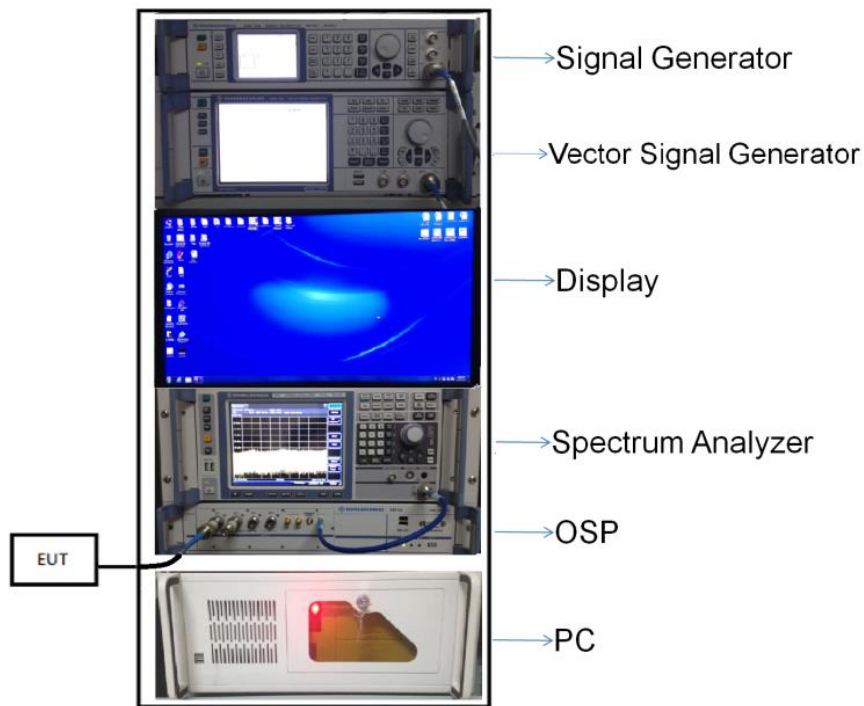


(Diagram 1)

4.5.2 For AC Power Supply Port Test

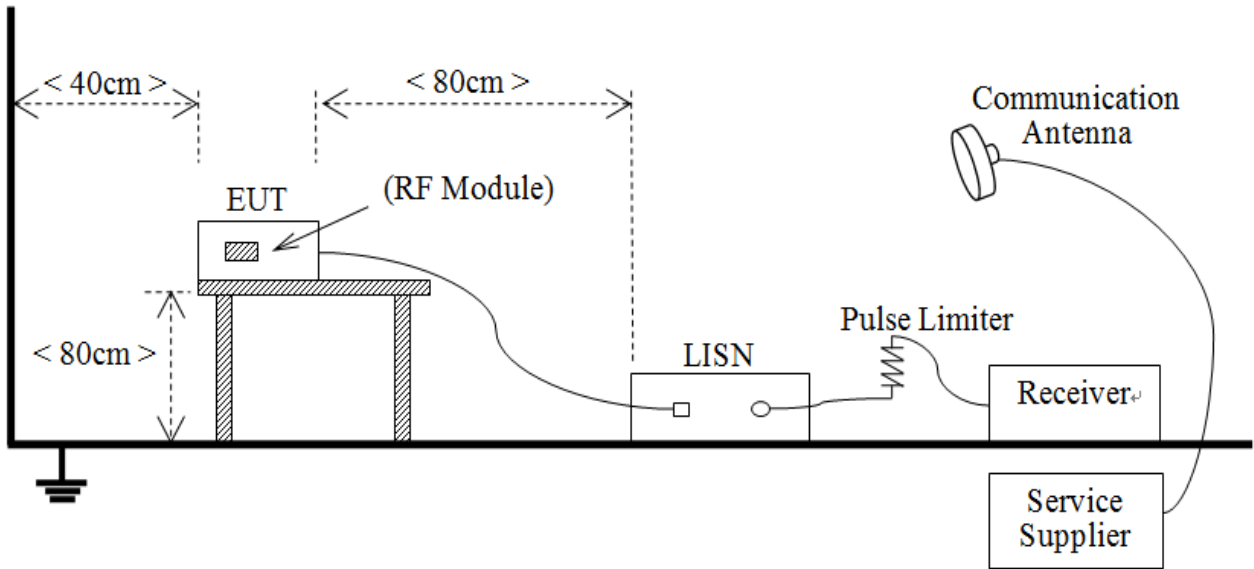


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

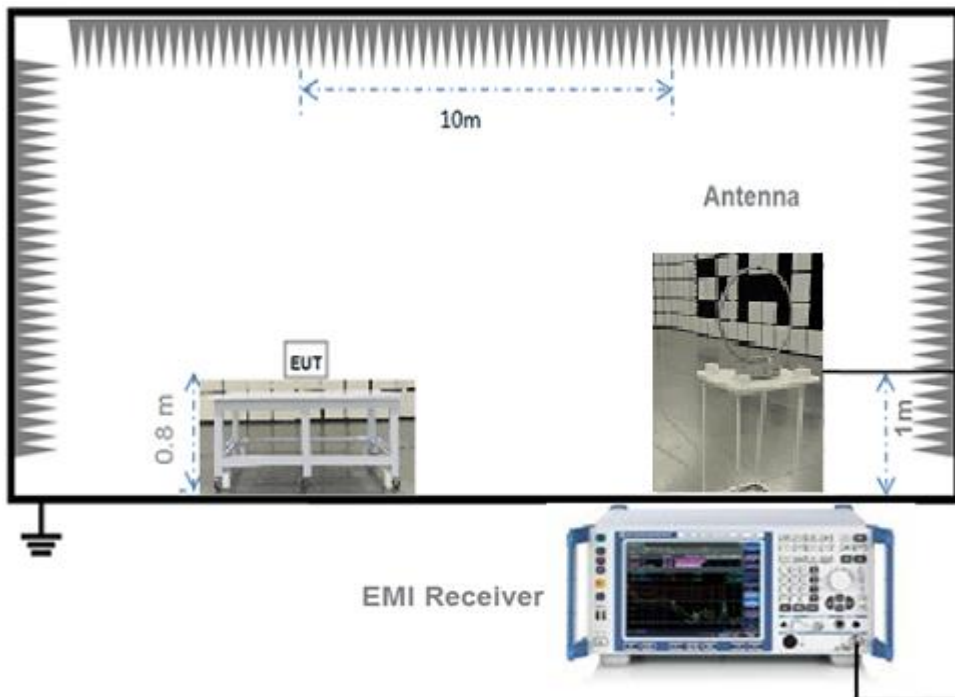


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

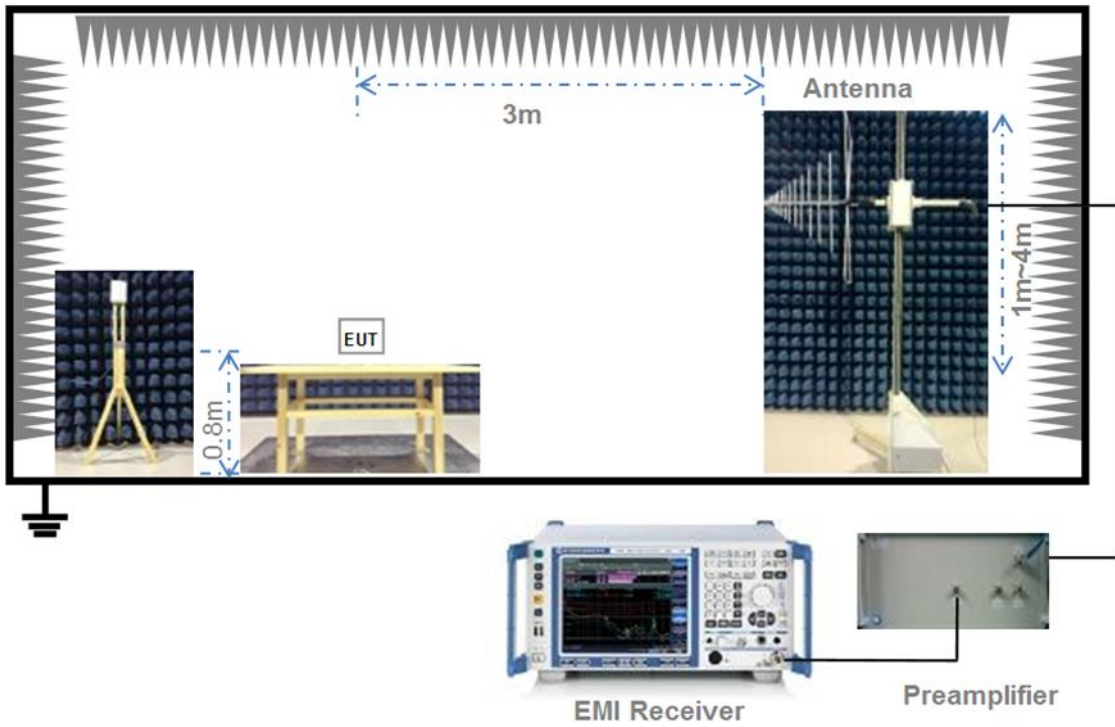

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

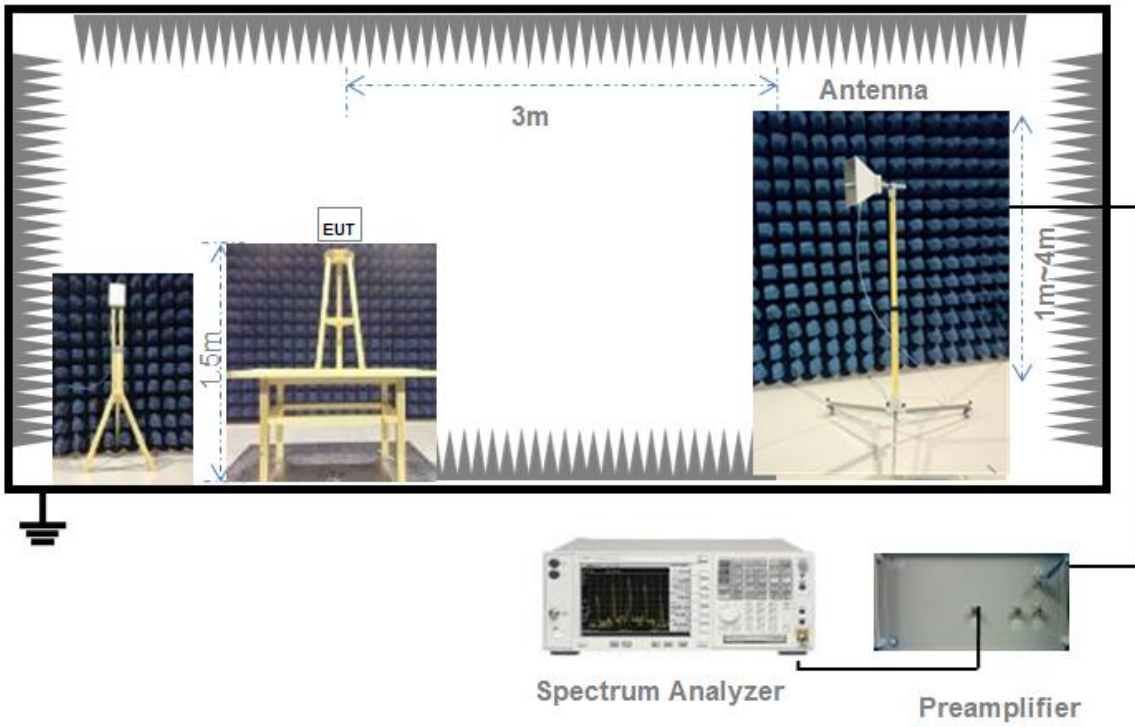

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP= Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (4)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW \geq DTS bandwidth.

Set VBW \geq 3 x RBW.

Set span \geq 3 x RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value.

Set VBW \geq RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the

zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 5.1 (1); RSS-GEN, 6.6

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V}/\text{m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360° , and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

1.1.1 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (2)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.7.

ANNEX A TEST RESULT

A.1 Output Power


Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	LoRa		dBm	mW	
	dBm	mW			
Low	11.49	14.10	30	1000	Pass
Middle	11.47	14.02			Pass
High	11.39	13.78			Pass


E.I.R.P Test Data (For ISED)

Channel	E.I.R.P		Limit		Verdict
	GFSK		dBm	mW	
	dBm	mW			
Low	12.49	17.74	36	4000	Pass
Middle	12.47	17.66			Pass
High	12.39	17.34			Pass

Test plots

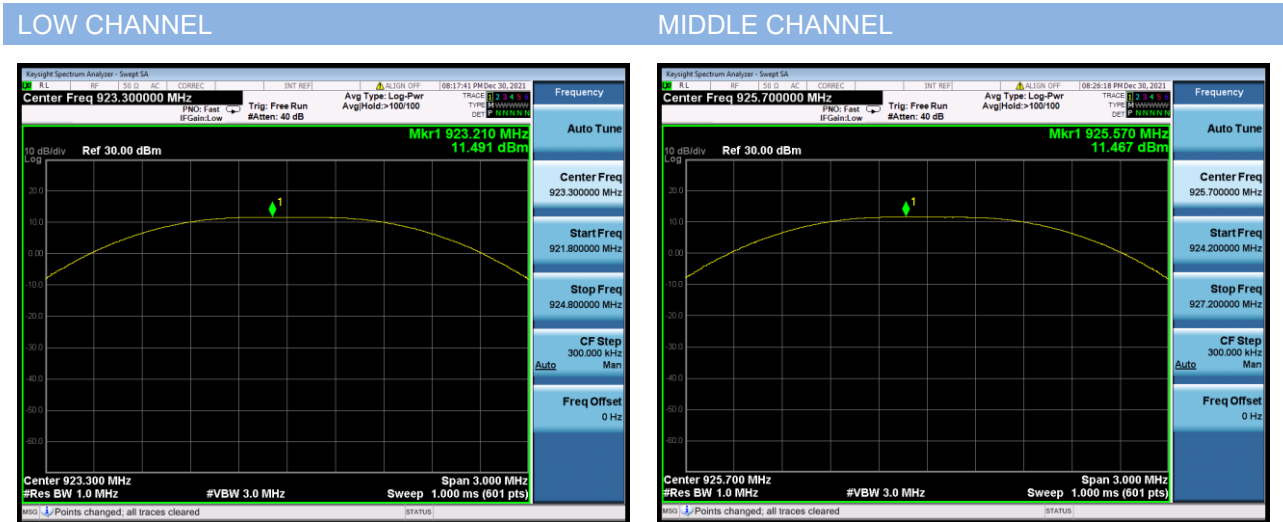

HIGH CHANNEL

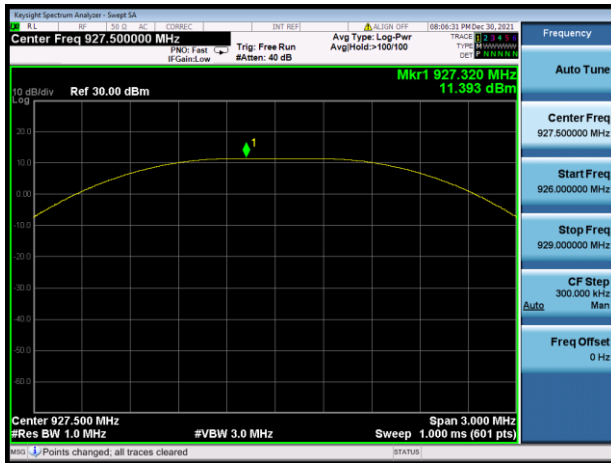

A.2 Occupied Bandwidth

Test Data


Test Mode	LoRa		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	650	508	≥500
Middle Channel	650	508	≥500
High Channel	650	509	≥500

Test plots (6 dB Bandwidth)

LOW CHANNEL



MIDDLE CHANNEL

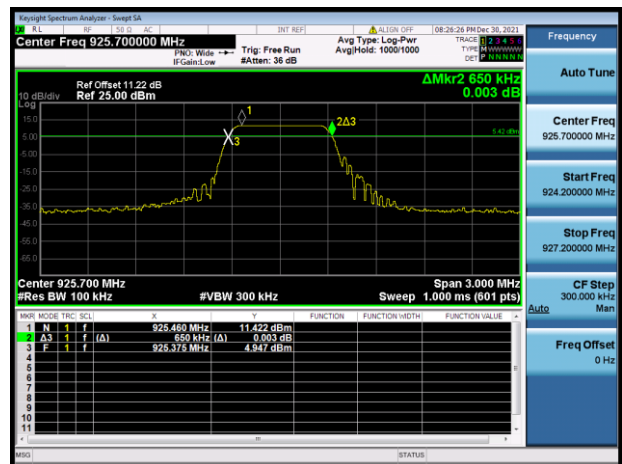


HIGH CHANNEL



Test plots (99% Bandwidth)

LOW CHANNEL

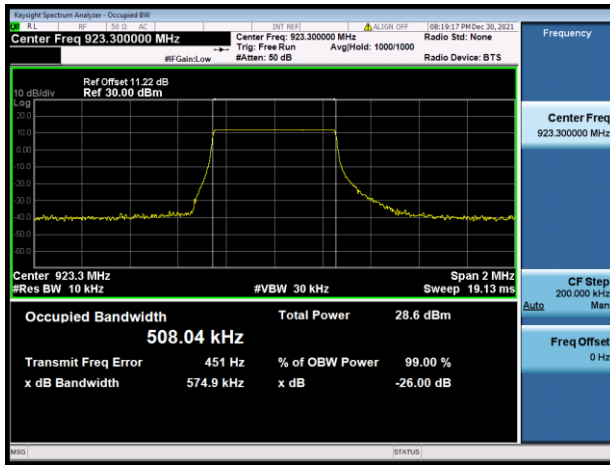

MIDDLE CHANNEL



HIGH CHANNEL




A.3 Conducted Spurious Emissions

Test Data


LoRa				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-33.22	11.44	-8.56	Pass
Middle	-32.99	11.37	-8.63	Pass
High	-32.97	11.39	-8.61	Pass

Test Plots


LOW CHANNEL, CARRIER LEVEL

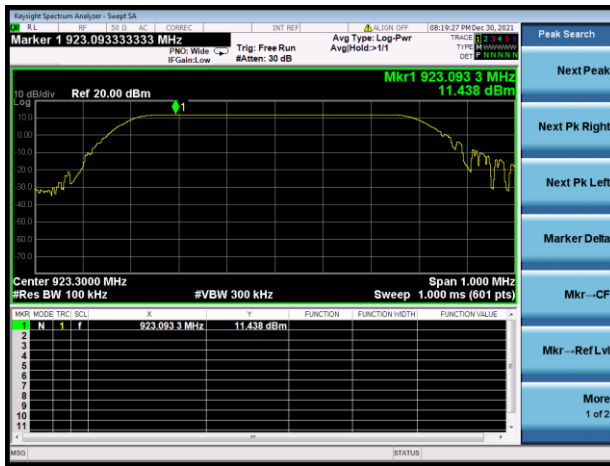


LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

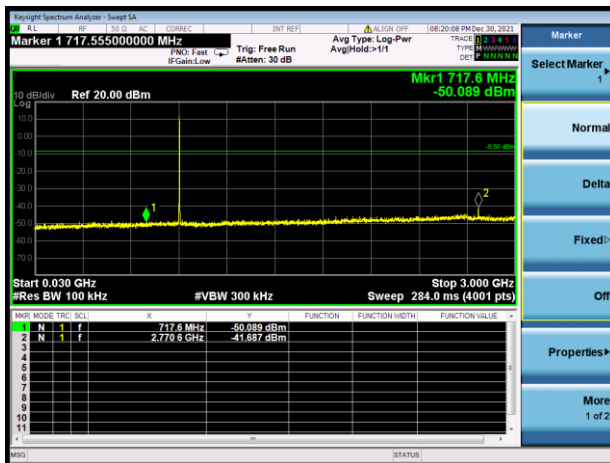


LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

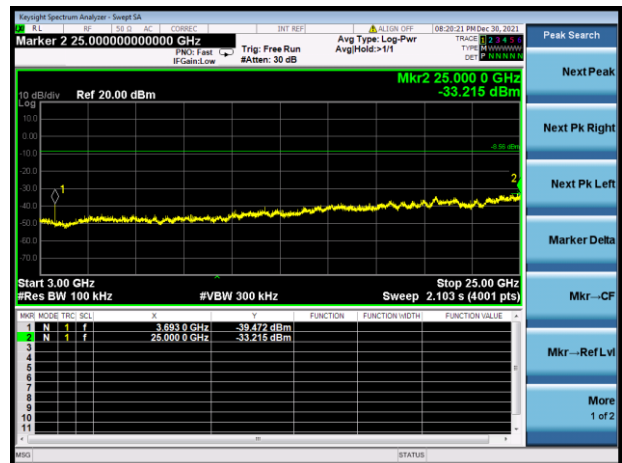


MIDDLE CHANNEL, CARRIER LEVEL

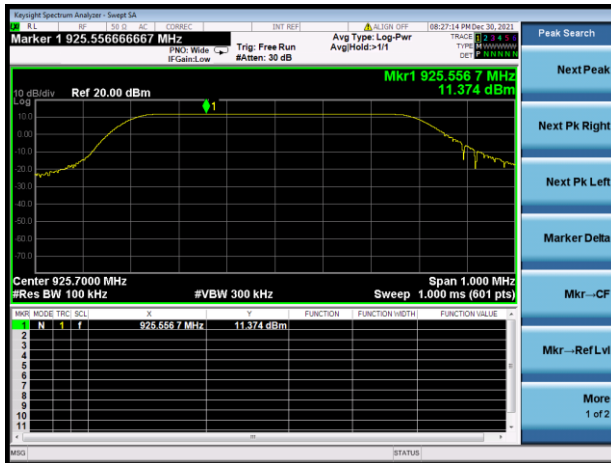


MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

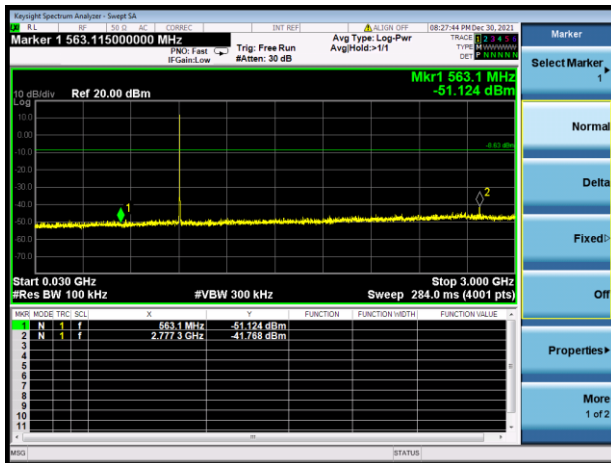

MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz


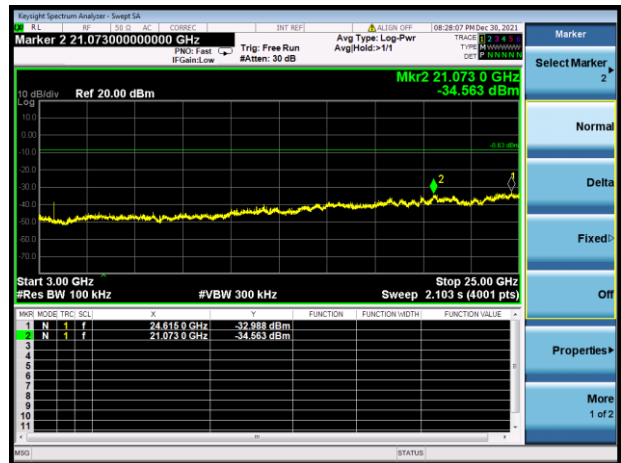


High CHANNEL, CARRIER LEVEL

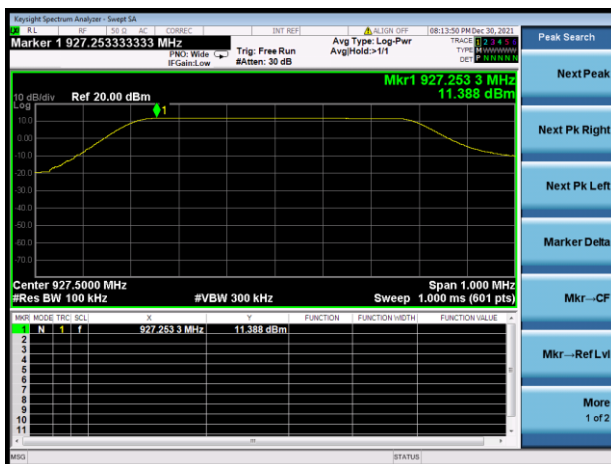

HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

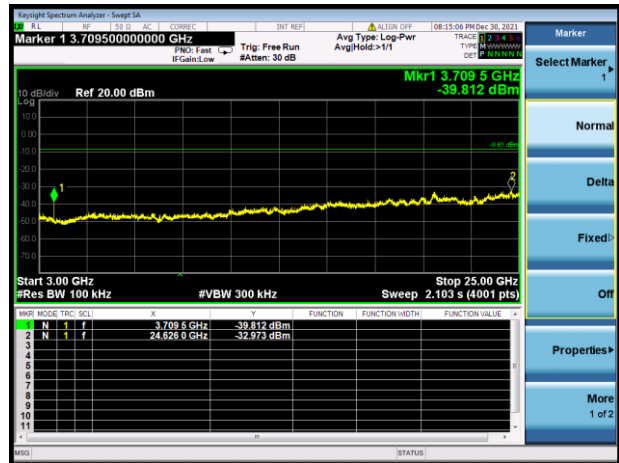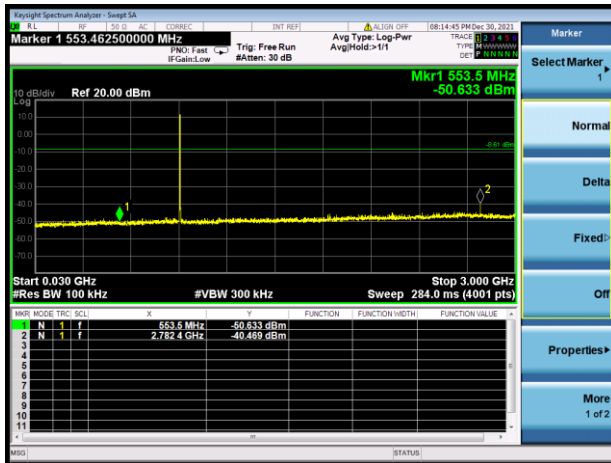


A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-49.43	11.44	-8.56	Pass
High Channel	-10.69	11.39	-8.61	Pass

Test Plots


LOW CHANNEL, Carrier level

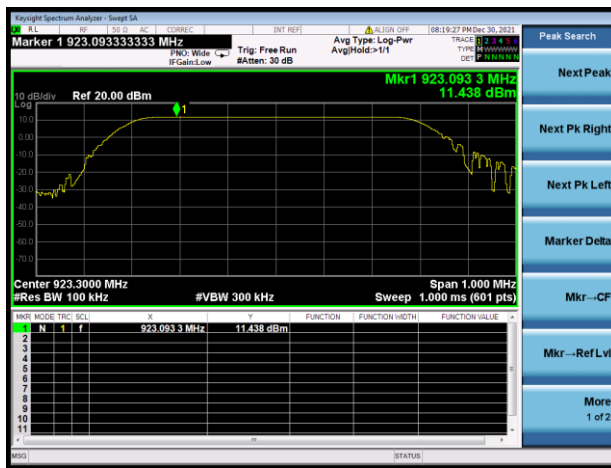


LOW CHANNEL, Band Edge

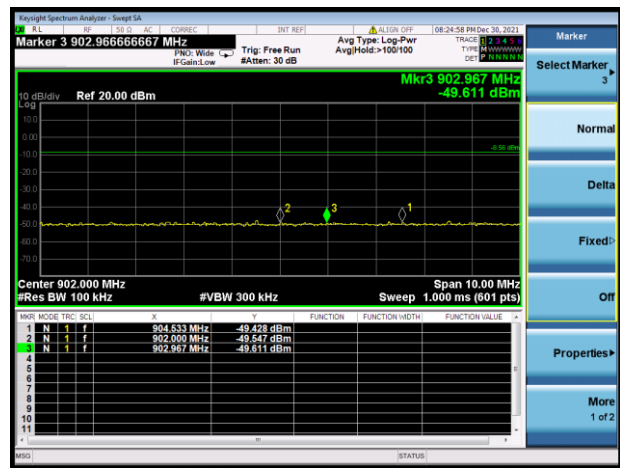

High CHANNEL, Carrier level

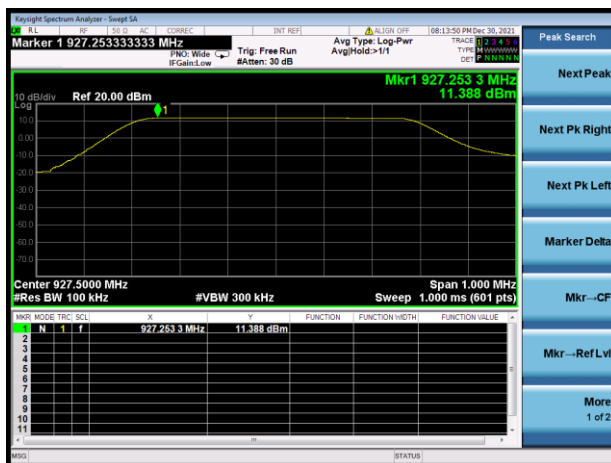

HIGH CHANNEL, Band Edge

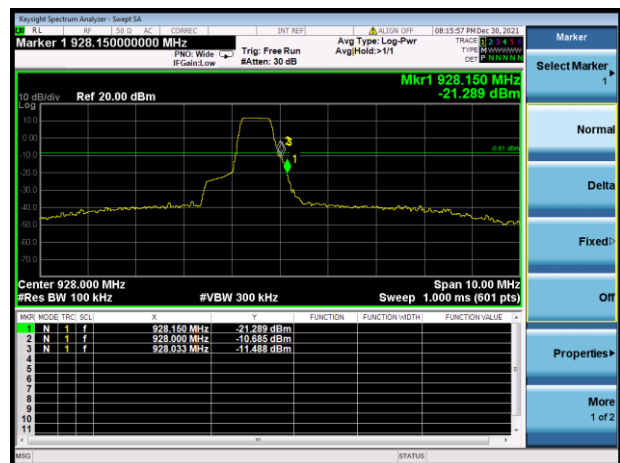

A.5 Conducted Emissions


Note 1: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Note 2: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

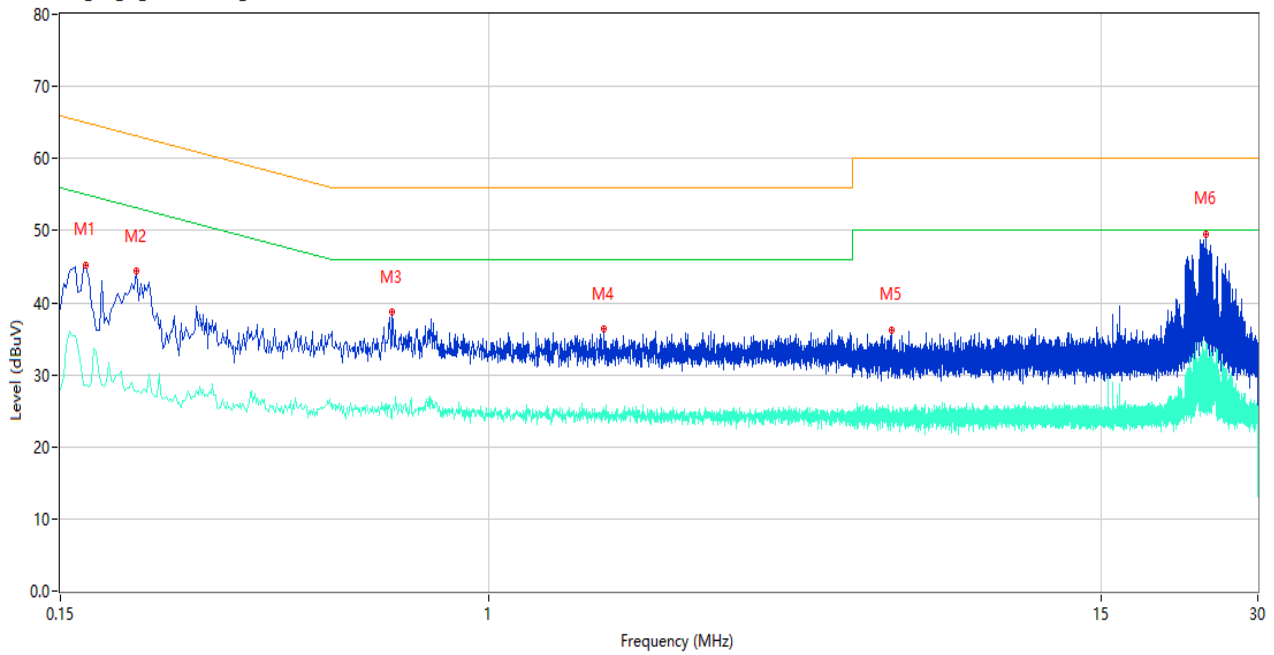

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.168	45.21	10.98	65.06	-19.85	Peak	L	Pass
1**	0.168	28.61	10.98	55.06	-26.45	AV	L	Pass
2	0.210	44.39	10.95	63.21	-18.82	Peak	L	Pass
2**	0.210	27.53	10.95	53.21	-25.68	AV	L	Pass
3	0.652	38.69	10.85	56.00	-17.31	Peak	L	Pass
3**	0.652	24.63	10.85	46.00	-21.37	AV	L	Pass
4	1.660	36.32	10.73	56.00	-19.68	Peak	L	Pass
4**	1.660	24.56	10.73	46.00	-21.44	AV	L	Pass
5	5.948	36.10	10.72	60.00	-23.90	Peak	L	Pass
5**	5.948	24.84	10.72	50.00	-25.16	AV	L	Pass
6	23.828	49.54	10.57	60.00	-10.46	Peak	L	Pass
6**	23.828	33.16	10.57	50.00	-16.84	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

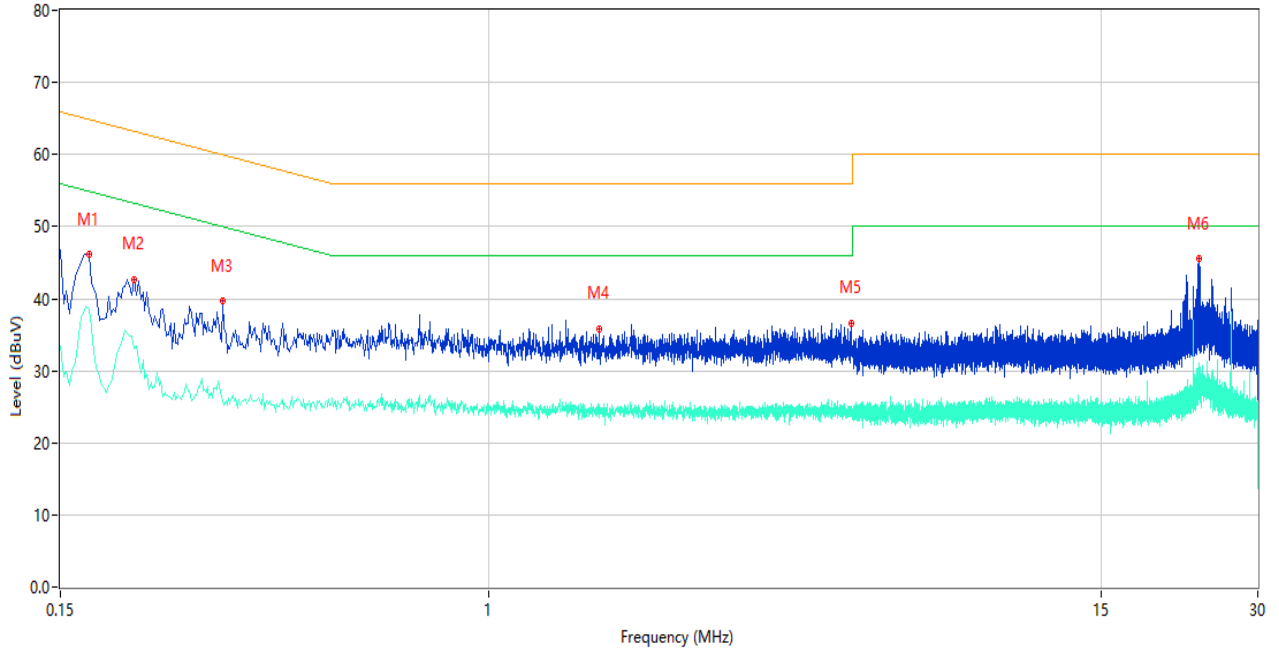

No.	Frequency (MHz)	Results (dBUV)	Factor (dB)	Limit (dBUV)	Over Limit (dB)	Detector	Line	Verdict
1	0.170	46.08	10.98	64.96	-18.88	Peak	N	Pass
1**	0.170	38.48	10.98	54.96	-16.48	AV	N	Pass
2	0.208	42.66	10.95	63.28	-20.62	Peak	N	Pass
2**	0.208	32.99	10.95	53.28	-20.29	AV	N	Pass
3	0.308	39.69	10.88	60.02	-20.33	Peak	N	Pass
3**	0.308	25.79	10.88	50.02	-24.23	AV	N	Pass
4	1.626	35.83	10.73	56.00	-20.17	Peak	N	Pass
4**	1.626	25.14	10.73	46.00	-20.86	AV	N	Pass
5	4.970	36.63	10.68	56.00	-19.37	Peak	N	Pass
5**	4.970	24.24	10.68	46.00	-21.76	AV	N	Pass
6	23.088	45.55	10.70	60.00	-14.45	Peak	N	Pass
6**	23.088	30.85	10.70	50.00	-19.15	AV	N	Pass

A.6 Radiated Spurious Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and GFSK-Middle channel mode is the worst.

Note 5: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Test Data and Plots

LOW CHANNEL ANT V


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

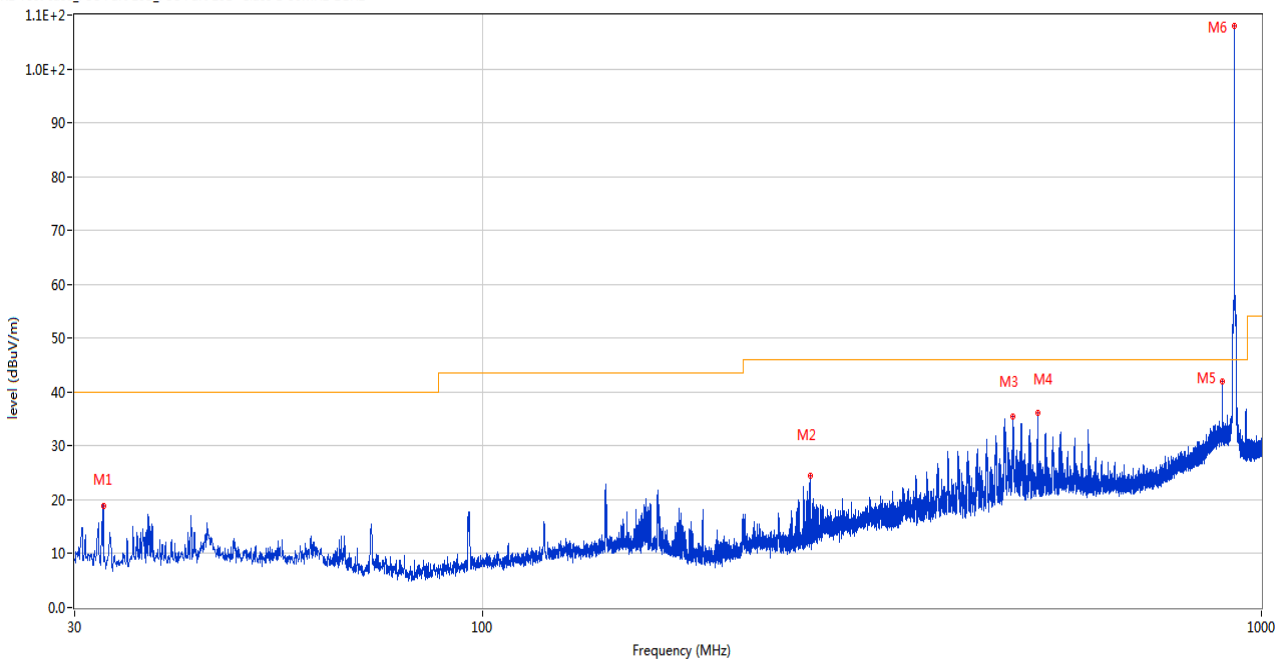

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	32.667	18.94	-26.84	40.0	-21.06	Peak	176.00	100	Vertical	Pass
2	264.013	24.47	-25.20	46.0	-21.53	Peak	233.00	100	Vertical	Pass
3	479.934	35.40	-18.77	46.0	-10.60	Peak	268.00	100	Vertical	Pass
4	515.970	36.10	-17.80	46.0	-9.90	Peak	245.00	100	Vertical	Pass
5	891.214	41.93	-8.01	46.0	-4.07	Peak	332.00	100	Vertical	Pass
6	923.273	107.88	-7.70	46.0	61.88	Peak	320.00	100	Vertical	N/A

LOW CHANNEL ANT H


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

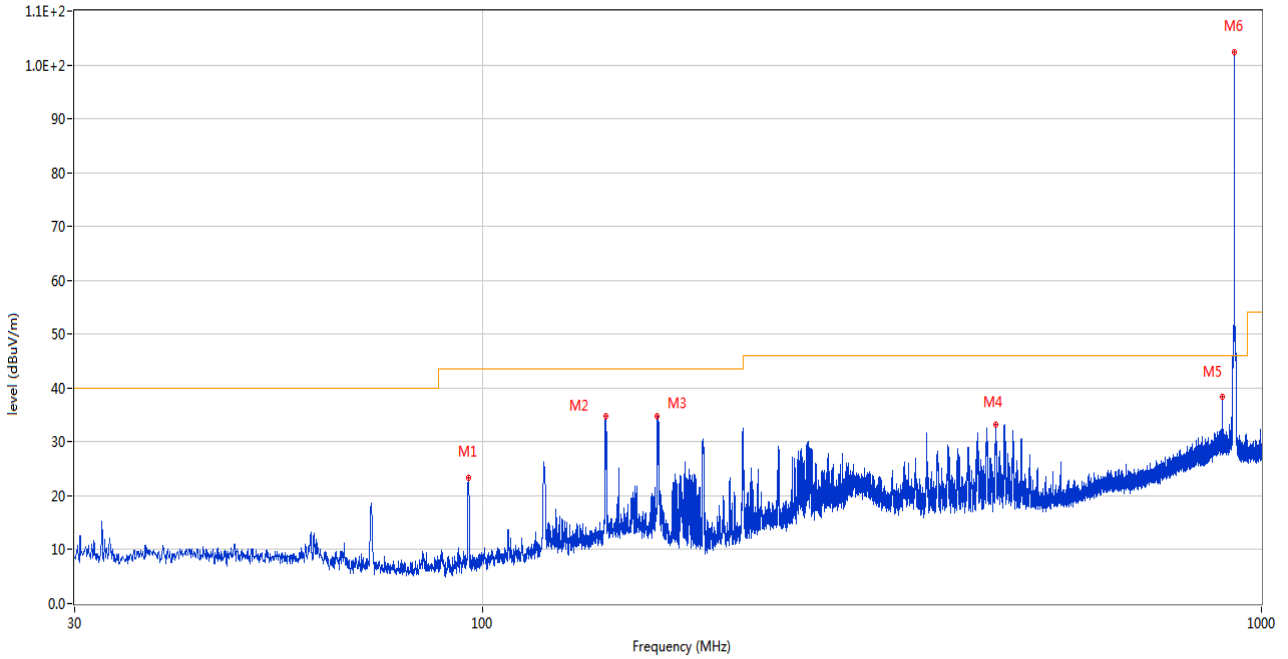

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.008	23.37	-29.07	43.5	-20.13	Peak	191.00	100	Horizontal	Pass
2	144.024	34.73	-24.63	43.5	-8.77	Peak	70.00	100	Horizontal	Pass
3	167.886	34.70	-24.77	43.5	-8.80	Peak	87.00	100	Horizontal	Pass
4	456.073	33.22	-19.32	46.0	-12.78	Peak	301.00	100	Horizontal	Pass
5	891.069	38.41	-8.02	46.0	-7.59	Peak	277.00	100	Horizontal	Pass
6	923.225	102.37	-7.70	46.0	56.37	Peak	323.00	100	Horizontal	N/A

MIDDLE CHANNEL ANT V


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

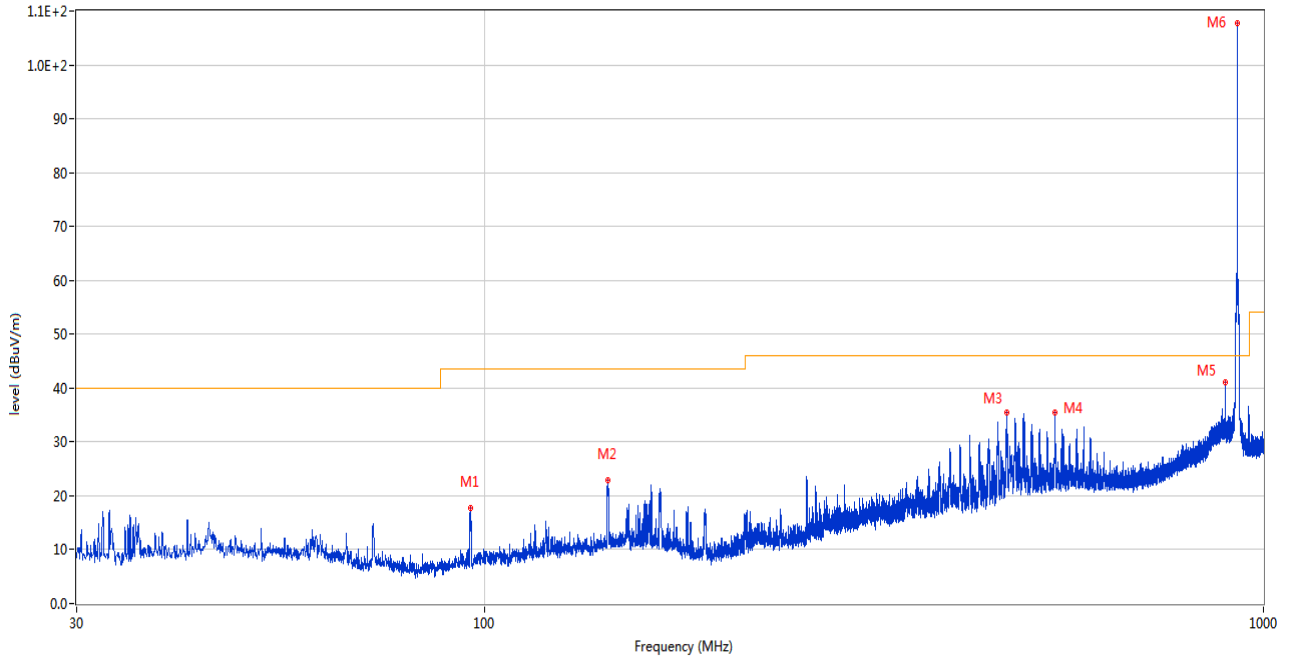

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.057	17.63	-29.07	43.5	-25.87	Peak	309.00	100	Vertical	Pass
2	144.072	22.93	-24.63	43.5	-20.57	Peak	151.00	100	Vertical	Pass
3	468.100	35.37	-18.87	46.0	-10.63	Peak	263.00	100	Vertical	Pass
4	540.074	35.51	-17.12	46.0	-10.49	Peak	263.00	100	Vertical	Pass
5	893.688	41.02	-7.89	46.0	-4.98	Peak	297.00	100	Vertical	Pass
6	925.504	107.65	-7.76	46.0	61.65	Peak	321.00	100	Vertical	N/A

MIDDLE CHANNEL ANT H


RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

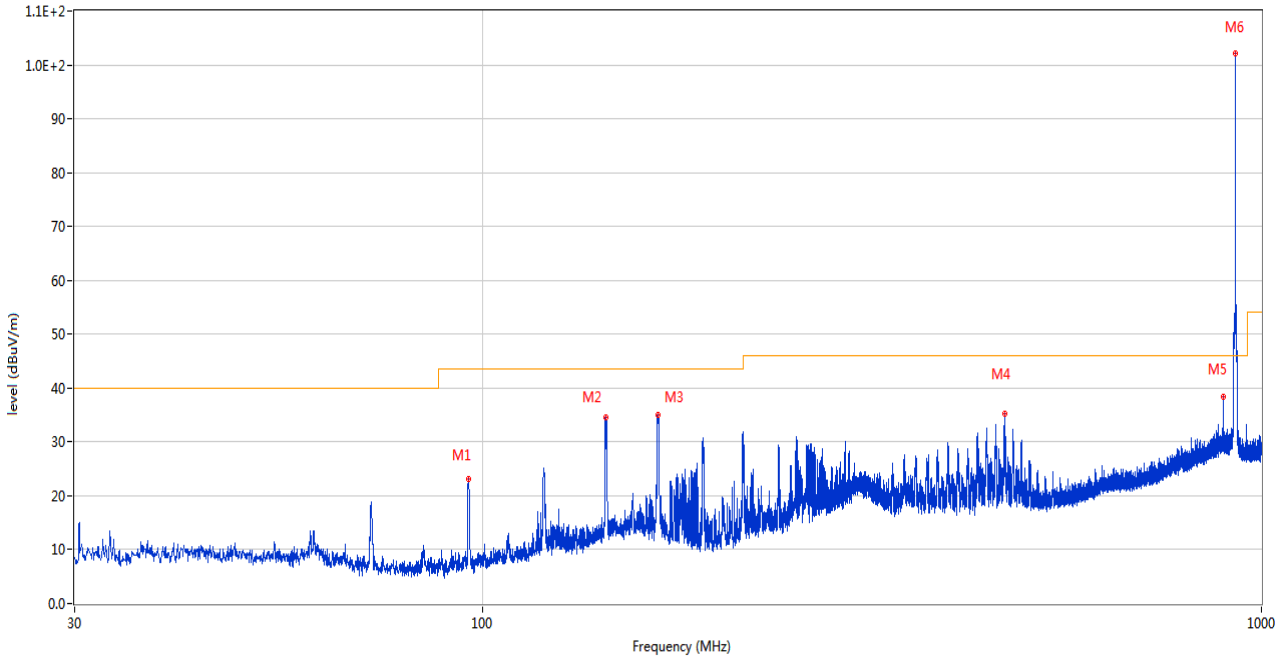

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.008	23.13	-29.07	43.5	-20.37	Peak	198.00	100	Horizontal	Pass
2	144.120	34.67	-24.62	43.5	-8.83	Peak	55.00	100	Horizontal	Pass
3	168.031	35.04	-24.78	43.5	-8.46	Peak	85.00	100	Horizontal	Pass
4	468.004	35.15	-18.87	46.0	-10.85	Peak	306.00	100	Horizontal	Pass
5	893.737	38.33	-7.89	46.0	-7.67	Peak	278.00	100	Horizontal	Pass
6	925.746	102.12	-7.78	46.0	56.12	Peak	323.00	100	Horizontal	N/A

HIGH CHANNEL ANT V


RE Test case FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

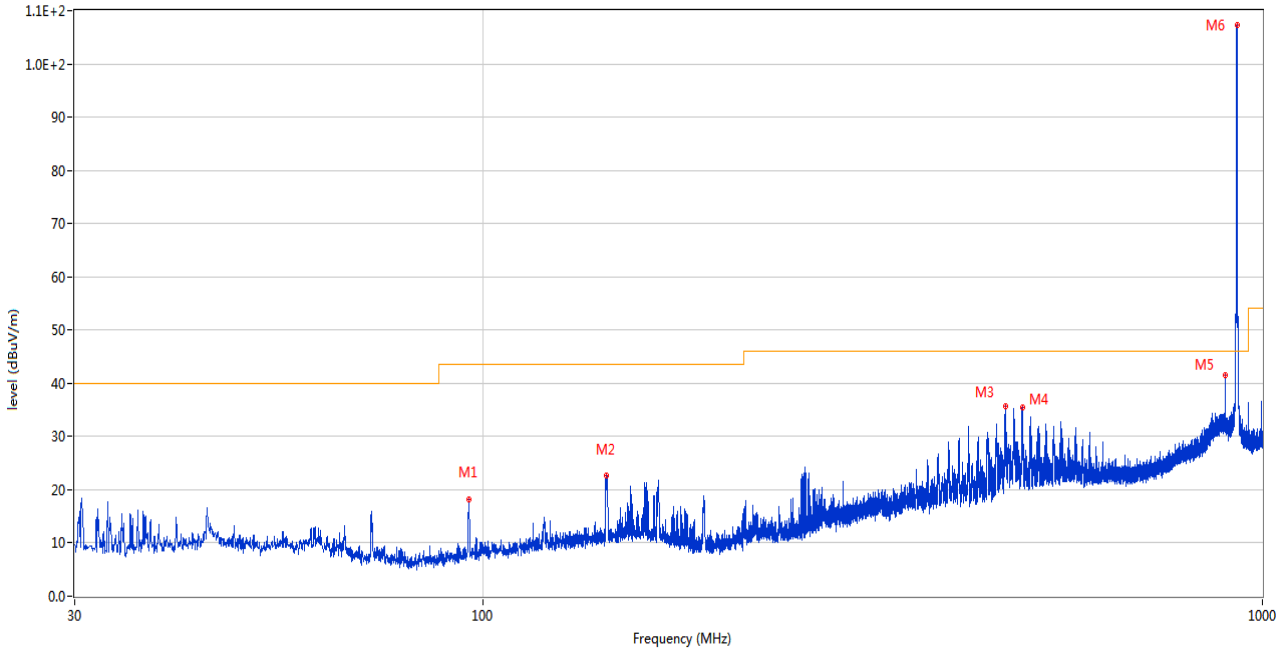

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.154	18.25	-29.06	43.5	-25.25	Peak	296.00	100	Vertical	Pass
2	144.024	22.71	-24.63	43.5	-20.79	Peak	106.00	100	Vertical	Pass
3	468.052	35.73	-18.87	46.0	-10.27	Peak	260.00	100	Vertical	Pass
4	492.108	35.43	-18.52	46.0	-10.57	Peak	265.00	100	Vertical	Pass
5	895.628	41.61	-7.88	46.0	-4.39	Peak	306.00	100	Vertical	Pass
6	927.298	107.34	-7.81	46.0	61.34	Peak	312.00	100	Vertical	N/A

HIGH CHANNEL ANT H

RE Test case_FCC Part 15B_FCC Part 15B Class B 30MHz-1GHz

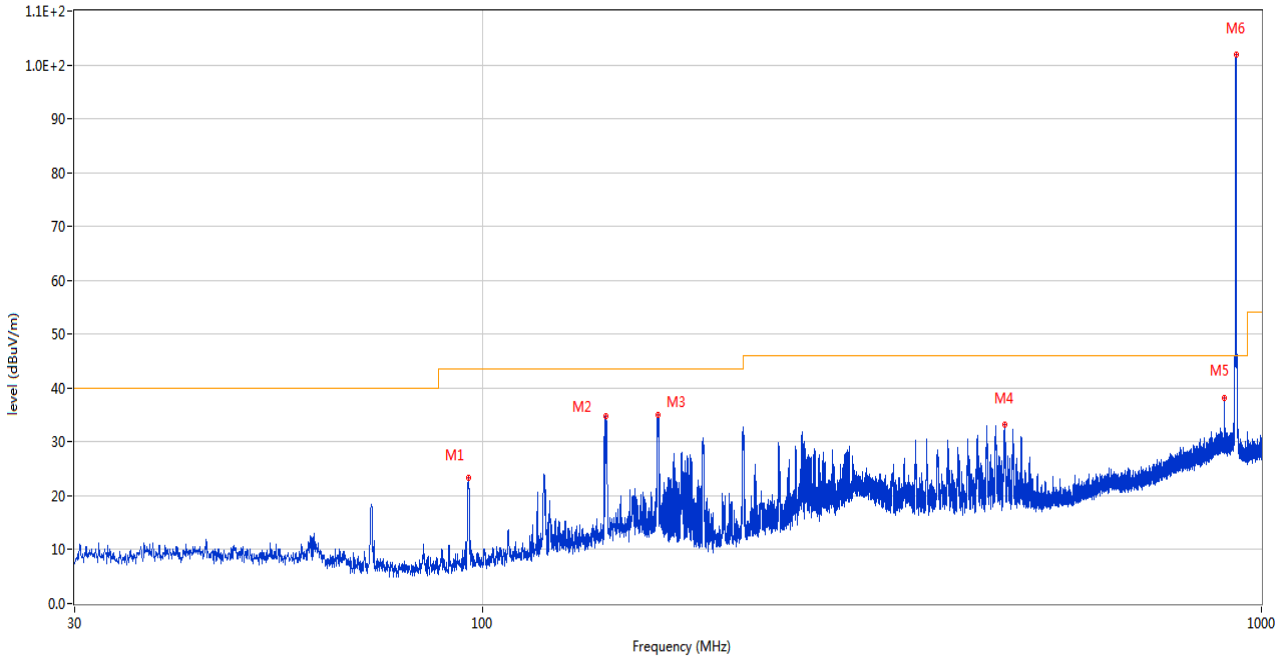


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	96.057	23.33	-29.07	43.5	-20.17	Peak	209.00	100	Horizontal	Pass
2	144.120	34.89	-24.62	43.5	-8.61	Peak	65.00	100	Horizontal	Pass
3	168.080	35.00	-24.79	43.5	-8.50	Peak	83.00	100	Horizontal	Pass
4	467.858	33.25	-18.86	46.0	-12.75	Peak	322.00	100	Horizontal	Pass
5	895.434	38.25	-7.88	46.0	-7.75	Peak	332.00	100	Horizontal	Pass
6	927.396	101.87	-7.80	46.0	55.87	Peak	327.00	100	Horizontal	N/A

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

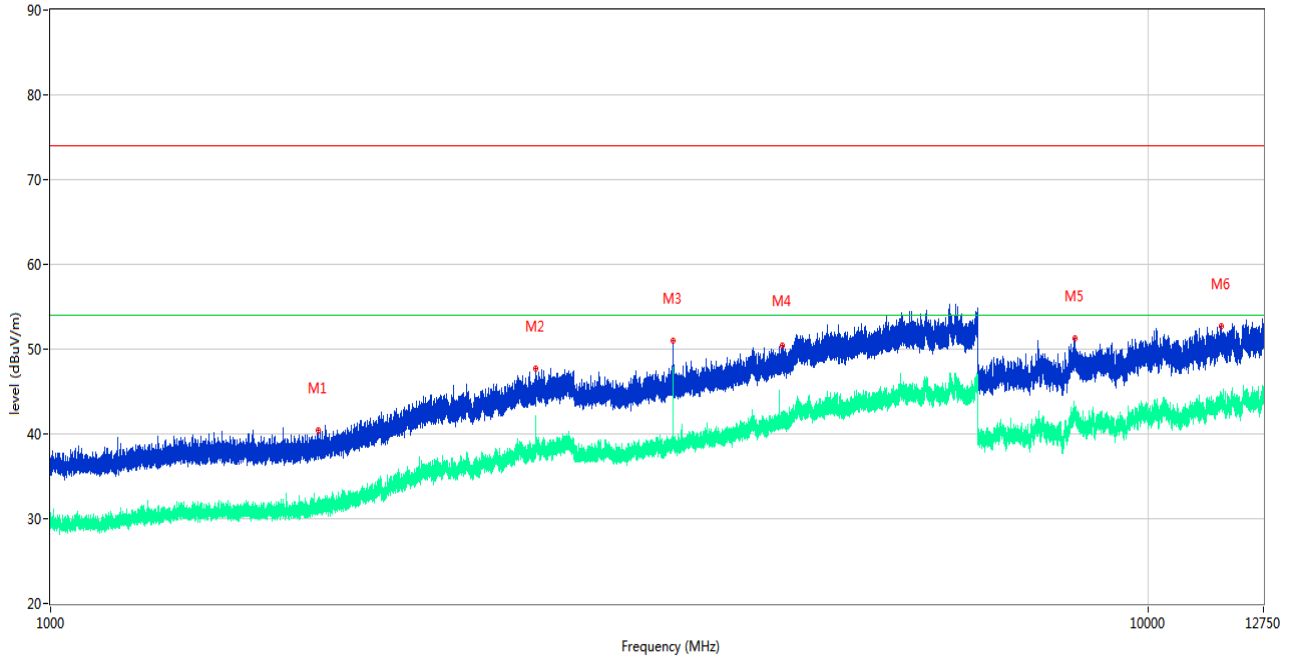

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1753.500	40.36	-17.15	74.0	-33.64	Peak	312.00	150	Horizontal	Pass
1**	1753.500	31.90	-17.15	54.0	-22.10	AV	312.00	150	Horizontal	Pass
2	2769.300	47.71	-10.84	74.0	-26.29	Peak	280.00	150	Horizontal	Pass
2**	2769.300	41.36	-10.84	54.0	-12.64	AV	280.00	150	Horizontal	Pass
3	3692.200	51.02	-5.90	74.0	-22.98	Peak	204.00	150	Horizontal	Pass
3**	3692.200	46.80	-5.90	54.0	-7.20	AV	204.00	150	Horizontal	Pass
4	4644.800	50.36	-3.54	74.0	-23.64	Peak	96.00	150	Horizontal	Pass
4**	4644.800	41.52	-3.54	54.0	-12.48	AV	96.00	150	Horizontal	Pass
5	8591.887	51.22	-2.15	74.0	-22.78	Peak	14.00	150	Horizontal	Pass
5**	8591.887	41.83	-2.15	54.0	-12.17	AV	14.00	150	Horizontal	Pass
6	11676.188	52.71	0.24	74.0	-21.29	Peak	149.00	150	Horizontal	Pass
6**	11676.188	43.56	0.24	54.0	-10.44	AV	149.00	150	Horizontal	Pass

LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

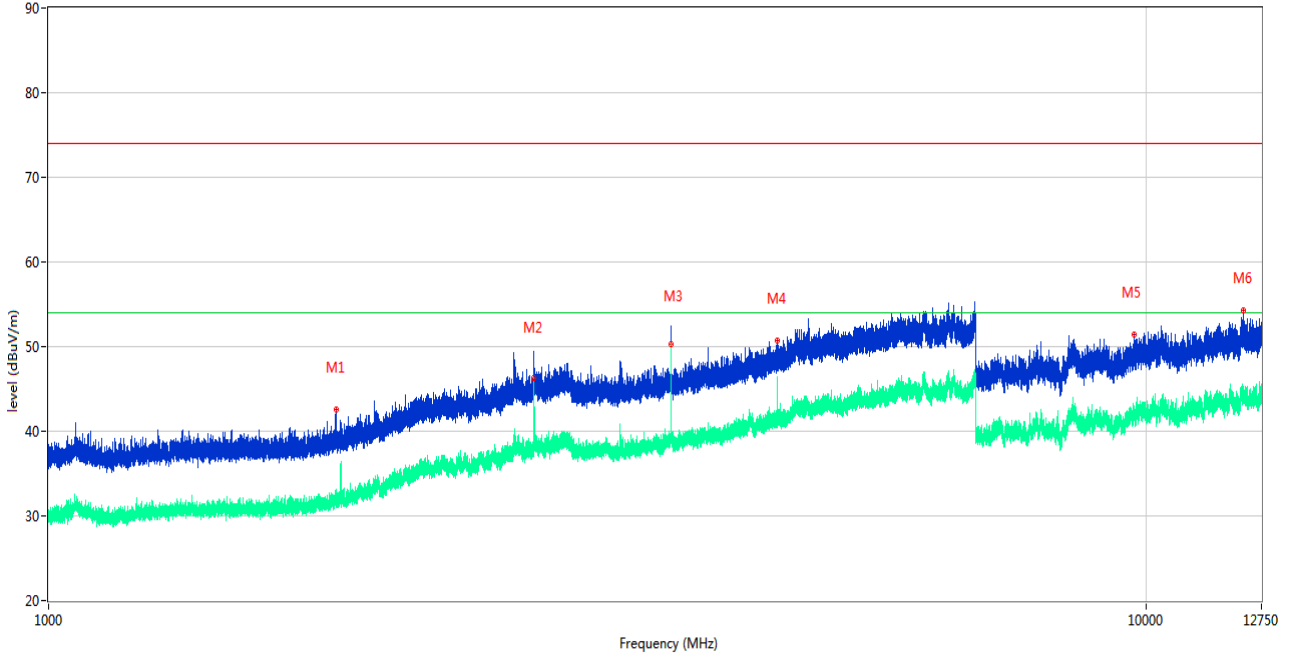

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1830.800	42.57	-16.66	74.0	-31.43	Peak	196.00	150	Vertical	Pass
1**	1830.800	33.10	-16.66	54.0	-20.90	AV	196.00	150	Vertical	Pass
2	2769.600	49.23	-10.79	74.0	-24.77	Peak	204.00	150	Vertical	Pass
2**	2769.600	46.27	-10.79	54.0	-7.73	AV	204.00	150	Vertical	Pass
3	3694.200	52.19	-5.85	74.0	-21.81	Peak	134.00	150	Vertical	Pass
3**	3694.200	50.32	-5.85	54.0	-3.68	AV	134.00	150	Vertical	Pass
4	4615.600	50.66	-4.23	74.0	-23.34	Peak	0.00	150	Vertical	Pass
4**	4615.600	44.23	-4.23	54.0	-9.77	AV	0.00	150	Vertical	Pass
5	9755.112	51.47	-0.39	74.0	-22.53	Peak	251.00	150	Vertical	Pass
5**	9755.112	41.94	-0.39	54.0	-12.06	AV	251.00	150	Vertical	Pass
6	12275.912	54.31	1.65	74.0	-19.69	Peak	270.00	150	Vertical	Pass
6**	12275.912	44.63	1.65	54.0	-9.37	AV	270.00	150	Vertical	Pass

MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

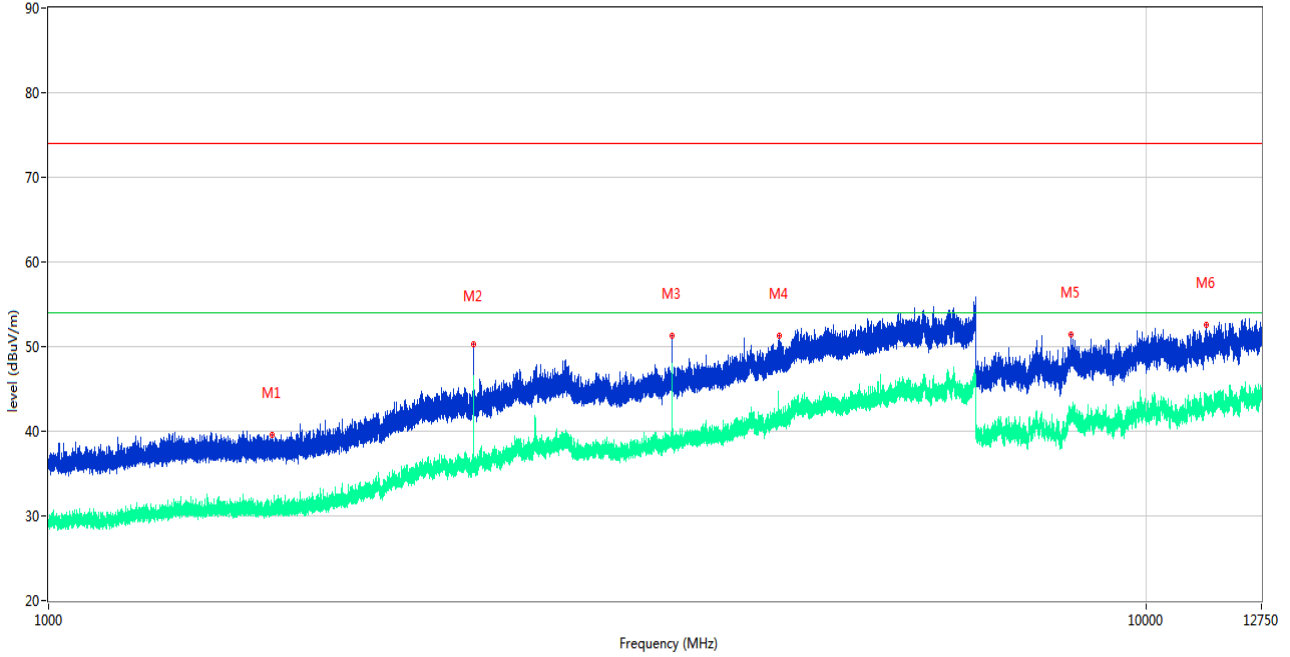

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1598.000	39.57	-17.61	74.0	-34.43	Peak	229.00	150	Horizontal	Pass
1**	1598.000	30.77	-17.61	54.0	-23.23	AV	229.00	150	Horizontal	Pass
2	2441.000	50.24	-12.87	74.0	-23.76	Peak	149.00	150	Horizontal	Pass
2**	2441.000	45.97	-12.87	54.0	-8.03	AV	149.00	150	Horizontal	Pass
3	3702.200	51.32	-6.02	74.0	-22.68	Peak	304.00	150	Horizontal	Pass
3**	3702.200	47.85	-6.02	54.0	-6.15	AV	304.00	150	Horizontal	Pass
4	4635.200	51.28	-3.46	74.0	-22.72	Peak	343.00	150	Horizontal	Pass
4**	4635.200	41.55	-3.46	54.0	-12.45	AV	343.00	150	Horizontal	Pass
5	8557.675	51.37	-2.10	74.0	-22.63	Peak	218.00	150	Horizontal	Pass
5**	8557.675	41.47	-2.10	54.0	-12.53	AV	218.00	150	Horizontal	Pass
6	11365.687	52.50	-0.24	74.0	-21.50	Peak	146.00	150	Horizontal	Pass
6**	11365.687	42.66	-0.24	54.0	-11.34	AV	146.00	150	Horizontal	Pass

MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

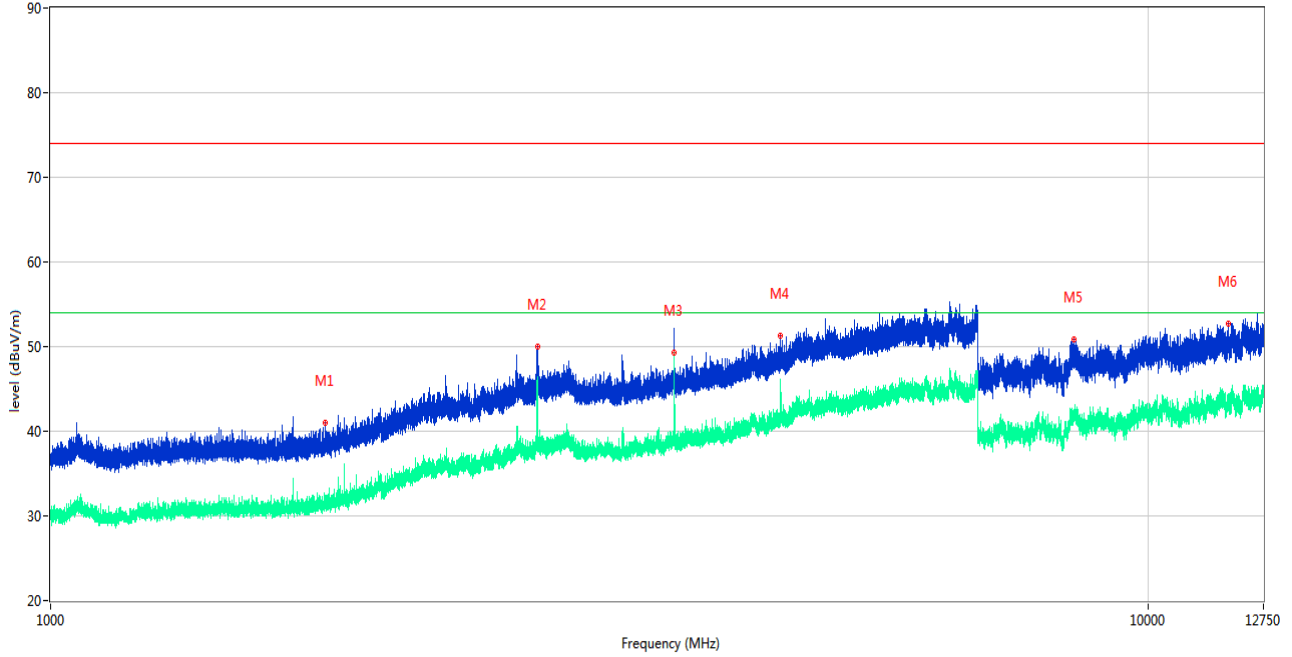

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1779.900	41.04	-16.98	74.0	-32.96	Peak	329.00	150	Vertical	Pass
1**	1779.900	31.36	-16.98	54.0	-22.64	AV	329.00	150	Vertical	Pass
2	2777.500	50.04	-10.49	74.0	-23.96	Peak	122.00	150	Vertical	Pass
2**	2777.500	44.75	-10.49	54.0	-9.25	AV	122.00	150	Vertical	Pass
3	3703.000	51.68	-6.01	74.0	-22.32	Peak	110.00	150	Vertical	Pass
3**	3703.000	49.29	-6.01	54.0	-4.71	AV	110.00	150	Vertical	Pass
4	4629.600	51.34	-3.65	74.0	-22.66	Peak	44.00	150	Vertical	Pass
4**	4629.600	43.69	-3.65	54.0	-10.31	AV	44.00	150	Vertical	Pass
5	8560.838	50.88	-2.10	74.0	-23.12	Peak	328.00	150	Vertical	Pass
5**	8560.838	42.16	-2.10	54.0	-11.84	AV	328.00	150	Vertical	Pass
6	11841.787	52.65	1.14	74.0	-21.35	Peak	99.00	150	Vertical	Pass
6**	11841.787	43.51	1.14	54.0	-10.49	AV	99.00	150	Vertical	Pass

HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

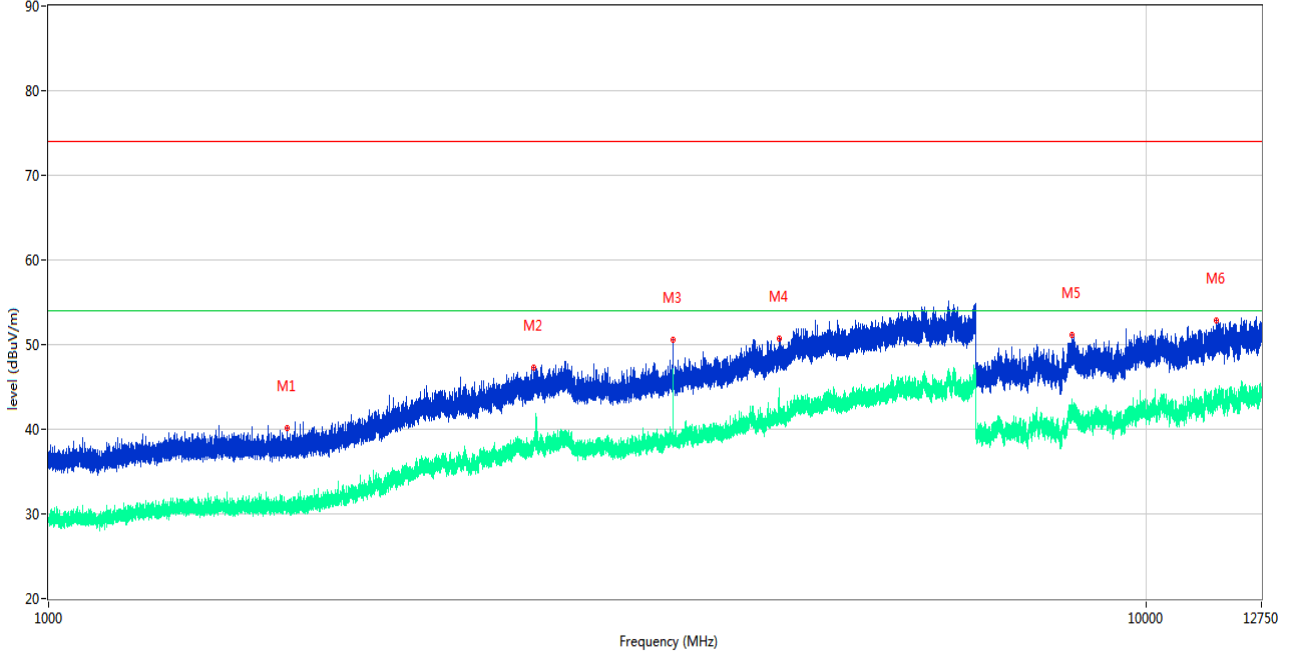

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1650.100	40.17	-17.66	74.0	-33.83	Peak	71.00	150	Horizontal	Pass
1**	1650.100	30.38	-17.66	54.0	-23.62	AV	71.00	150	Horizontal	Pass
2	2768.700	47.35	-10.90	74.0	-26.65	Peak	298.00	150	Horizontal	Pass
2**	2768.700	37.88	-10.90	54.0	-16.12	AV	298.00	150	Horizontal	Pass
3	3710.600	50.50	-6.39	74.0	-23.50	Peak	10.00	150	Horizontal	Pass
3**	3710.600	45.61	-6.39	54.0	-8.39	AV	10.00	150	Horizontal	Pass
4	4637.800	50.69	-3.61	74.0	-23.31	Peak	248.00	150	Horizontal	Pass
4**	4637.800	44.49	-3.61	54.0	-9.51	AV	248.00	150	Horizontal	Pass
5	8568.312	51.08	-2.07	74.0	-22.92	Peak	200.00	150	Horizontal	Pass
5**	8568.312	41.56	-2.07	54.0	-12.44	AV	200.00	150	Horizontal	Pass
6	11599.713	52.89	-0.07	74.0	-21.11	Peak	175.00	150	Horizontal	Pass
6**	11599.713	43.24	-0.07	54.0	-10.76	AV	175.00	150	Horizontal	Pass

HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-12.75GHz

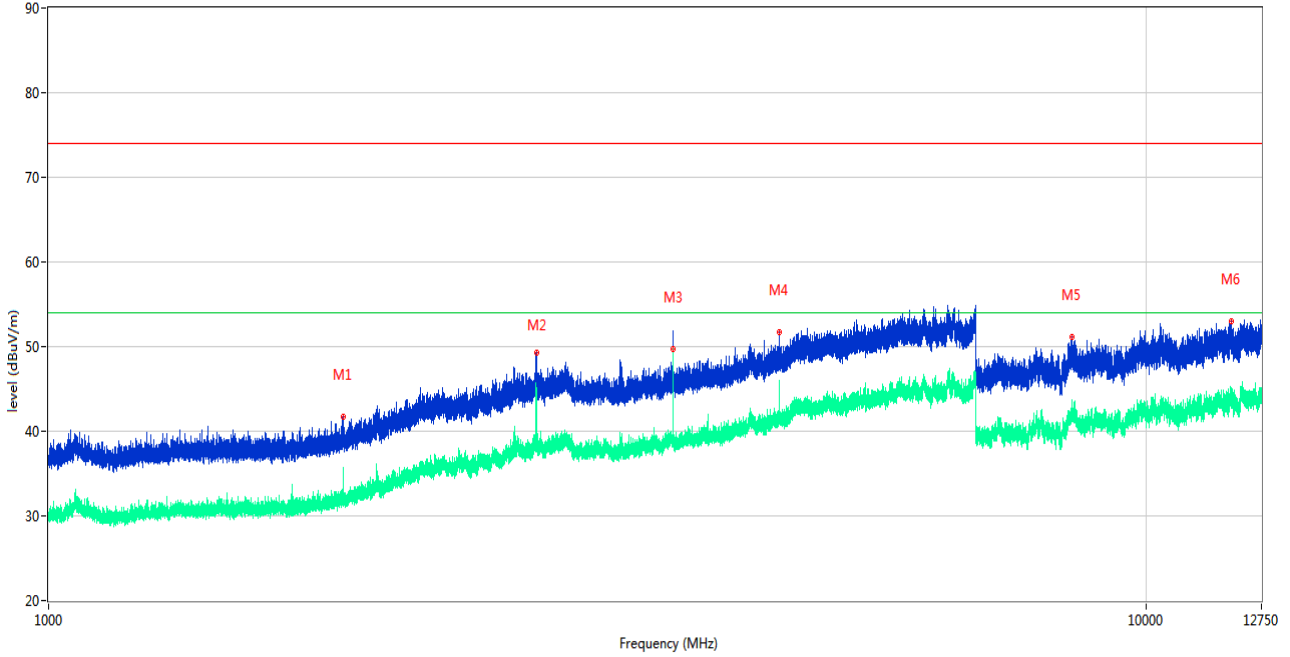

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1854.400	41.70	-16.63	74.0	-32.30	Peak	306.00	150	Vertical	Pass
1**	1854.400	34.91	-16.63	54.0	-19.09	AV	306.00	150	Vertical	Pass
2	2783.000	49.31	-10.35	74.0	-24.69	Peak	289.00	150	Vertical	Pass
2**	2783.000	45.17	-10.35	54.0	-8.83	AV	289.00	150	Vertical	Pass
3	3709.600	51.12	-6.29	74.0	-22.88	Peak	127.00	150	Vertical	Pass
3**	3709.600	49.78	-6.29	54.0	-4.22	AV	127.00	150	Vertical	Pass
4	4637.400	51.70	-3.63	74.0	-22.30	Peak	114.00	150	Vertical	Pass
4**	4637.400	44.53	-3.63	54.0	-9.47	AV	114.00	150	Vertical	Pass
5	8567.737	51.17	-2.08	74.0	-22.83	Peak	-2.00	150	Vertical	Pass
5**	8567.737	41.72	-2.08	54.0	-12.28	AV	-2.00	150	Vertical	Pass
6	11966.850	53.07	0.84	74.0	-20.93	Peak	170.00	150	Vertical	Pass
6**	11966.850	44.00	0.84	54.0	-10.00	AV	170.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note 1: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note 2: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note 3: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 4: The Level (dBuV/m) has been corrected by factor.

Test Data


LOW CHANNEL

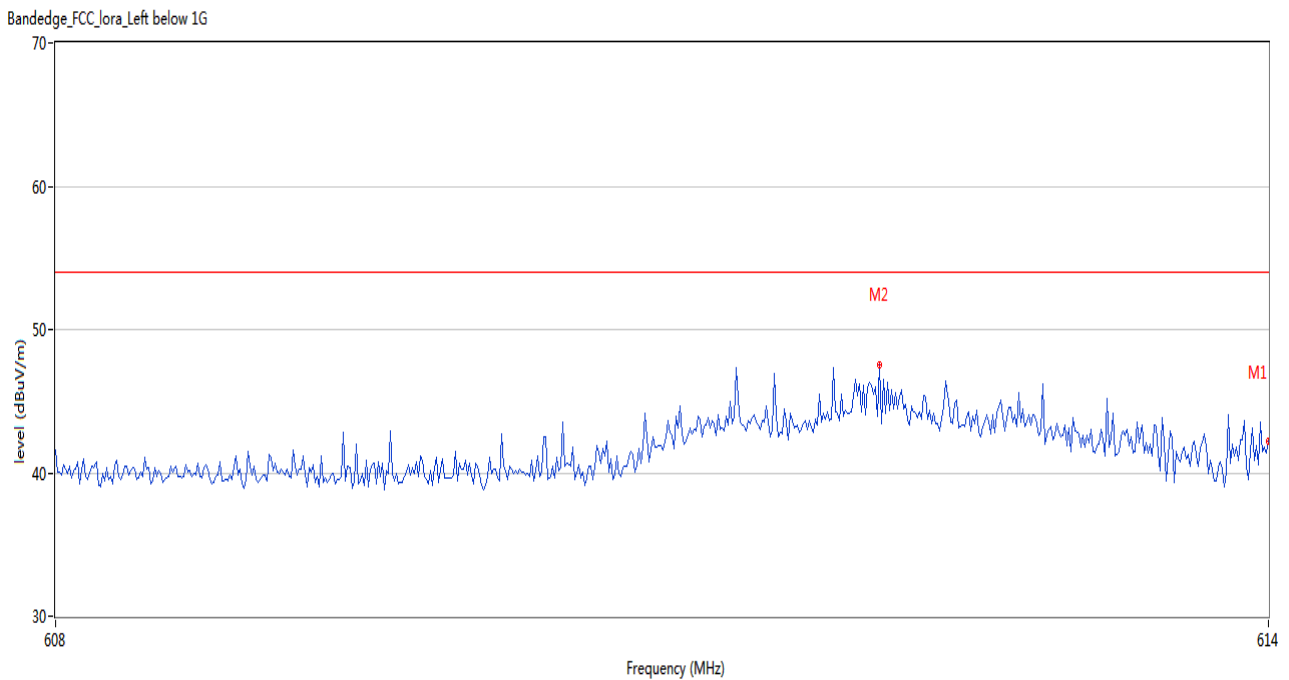

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	614.000	42.21	3.31	54.0	-11.79	Peak	209.00	100	Vertical	Pass
2	612.070	47.50	3.29	54.0	-6.50	Peak	104.00	100	Vertical	Pass

MiddleCHANNEL


Bandedge_FCC_lora_Right below 1G

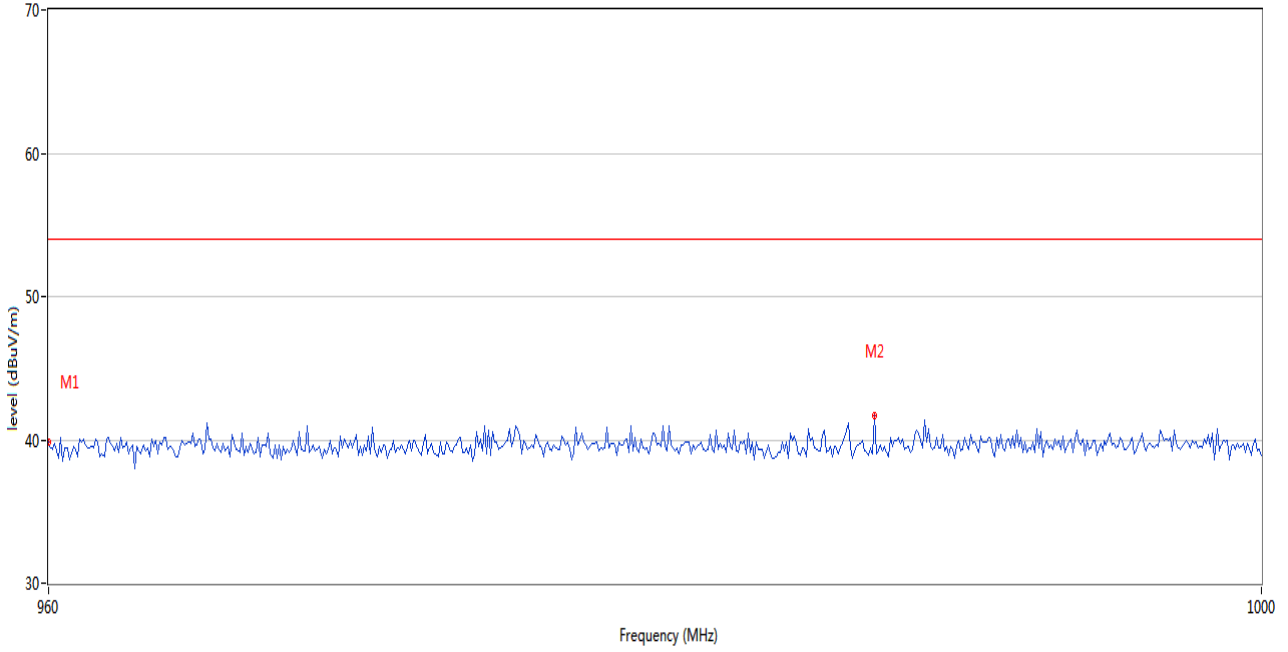

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	960.000	39.81	-3.60	54.0	-14.19	Peak	244.00	150	Vertical	Pass
2	987.067	41.70	-3.53	54.0	-12.30	Peak	286.00	150	Vertical	Pass

HIGH CHANNEL

Bandedge_FCC_lora_Right above 1G

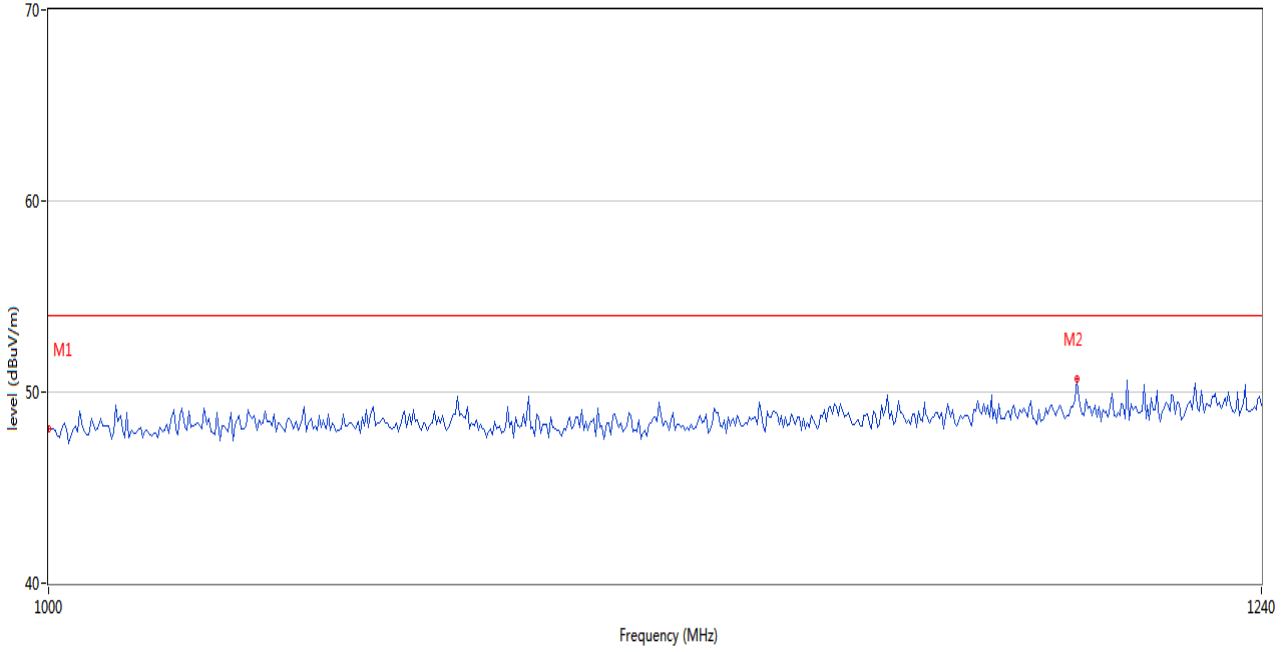

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1000.000	48.06	-6.22	54.0	-5.94	Peak	324.00	150	Vertical	Pass
2	1200.000	50.72	-5.84	54.0	-3.28	Peak	87.00	150	Vertical	Pass

A.8 Power Spectral Density (PSD)

Test Data

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	7.26	8	Pass
Middle Channel	7.90	8	Pass
High Channel	7.86	8	Pass

Test plots


LOW CHANNEL



MIDDLE CHANNEL



HIGH CHANNEL

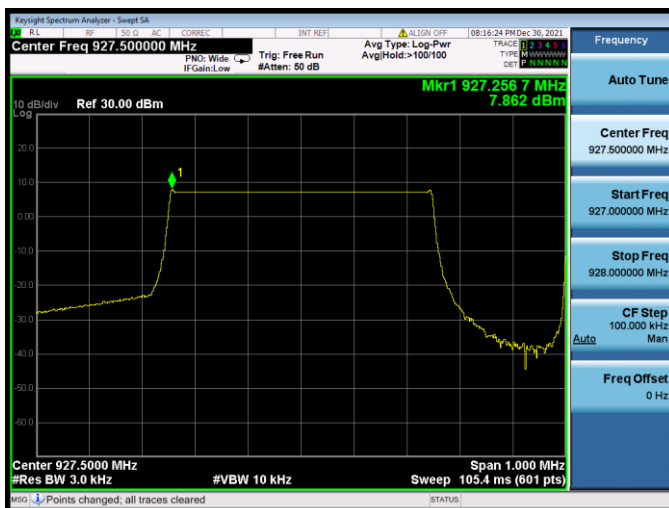

ANNEX B TEST SETUP PHOTOS

Please refer the document "BL-SZ21C0555-AR.PDF".

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document "BL- SZ21C0555-AW.PDF".

ANNEX D EUT INTERNAL PHOTOS

Please refer the document "BL- SZ21C0555-AI.PDF".

--END OF REPORT--