

FCC TEST REPORT

for

Foto Electric Supply Co., INC.

Tablet PC

Model Number: TAB101, CBT1X1

FCC ID: 2AJVK-TAB101

Prepared for : Foto Electric Supply Co., INC.
Address : 1 Rewe St. Brooklyn, New York 11211, United States

Prepared by : Keyway Testing Technology Co., Ltd.
Address : Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China




Tel: 86-769-8718 2258
Fax: 86-769-8718 1058

Report No. : 16KWE104564F
Date of Test : Oct.10~Oct.28, 2016
Date of Report : Oct. 29, 2016

TABLE OF CONTENTS

| | Page |
|--|-----------|
| Test Report Declaration | 4 |
| 1. TEST SUMMARY | 4 |
| 2. GENERAL PRODUCT INFORMATION | 4 |
| 2.1. Product Function..... | 4 |
| 2.2. Description of Device (EUT) | 4 |
| 2.3. Independent Operation Modes..... | 5 |
| 2.4. Test Supporting System | 5 |
| 2.5. TEST SITES..... | 5 |
| 2.6. List of Test and Measurement Instruments | 6 |
| 3. TEST SET-UP AND OPERATION MODES..... | 7 |
| 3.1. Principle of Configuration Selection..... | 7 |
| 3.2. Block Diagram of Test Set-up..... | 7 |
| 3.3. Test Operation Mode and Test Software..... | 7 |
| 3.4. Special Accessories and Auxiliary Equipment..... | 7 |
| 3.5. Countermeasures to Achieve EMC Compliance | 7 |
| 4. EMISSION TEST RESULTS | 8 |
| 4.1. Conducted Emission at the Mains Terminals Test..... | 8 |
| 4.2. Radiated Emission Test..... | 11 |
| 5. BAND EDGE COMPLIANCE TEST | 31 |
| 5.1. Limits | 31 |
| 5.2. Test setup | 31 |
| 5.3. Test Procedure | 32 |
| 6. 6DB&20DB BANDWIDTH TEST | 38 |
| 6.1. Limits | 38 |
| 6.2. Test Procedure | 38 |
| 7. OUTPUT POWER TEST | 42 |
| 7.1. Limits | 42 |
| 7.2. Test procedure..... | 42 |
| 7.3. TEST SETUP | 42 |
| 8. DUTY CYCLE..... | 44 |
| 8.1. Test Procedure | 44 |
| 8.2. TEST SETUP | 44 |
| 9. POWER SPECTRAL DENSITY TEST..... | 47 |
| 9.1. Limits | 47 |
| 9.2. Test setup | 47 |
| 9.3. Test result..... | 48 |
| 10. ANTENNA REQUIREMENTS | 55 |
| 10.1. Limits | 55 |
| 10.2. Result | 55 |
| 11. PHOTOGRAPHS OF TEST SET-UP | 56 |
| 12. PHOTOGRAPHS OF THE EUT | 58 |

Keyway Testing Technology Co., Ltd.

| | | | |
|---|---|---|----------------------|
| Applicant: | Foto Electric Supply Co., INC. | | |
| Address: | 1 Rewe St. Brooklyn, New York 11211, United States | | |
| Manufacturer: | Foto Electric Supply Co., INC. | | |
| Address: | 1 Rewe St. Brooklyn, New York 11211, United States | | |
| E.U.T: | Tablet PC | | |
| Model Number: | TAB101, CBT1X1 | | |
| Trade Name: | SLIDE, COBY® | Serial No.: | ----- |
| Date of Receipt: | Oct. 09, 2016 | Date of Test: | Oct.10~Oct. 28, 2016 |
| Test Specification: | FCC Part 15, Subpart 15.247: 2015 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r05 | | |
| Test Result: | The equipment under test was found to be compliance with the requirements of the standards applied. | | |
| | Issue Date: Oct. 29, 2016 | | |
| Tested by: | Reviewed by: | Approved by: | |
|  |  |  | |
| _____ Keven Wu / Engineer | _____ Mike Xu / Supervisor | _____ Andy Gao / Supervisor | |
| Other Aspects: | None. | | |
| <i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i> | | | |
| <i>This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.</i> | | | |

1.TEST SUMMARY

| Test Items | Test Requirement | Result |
|----------------------------|----------------------------|--------|
| Conducted Emissions | 15.207 | PASS |
| Radiated Emissions | 15.205(a)/15.209/15.247(d) | PASS |
| 6dB&99% Bandwidth | 15.247(a)(2) | PASS |
| Power density | 15.247(e) | PASS |
| Maximum Peak Output Power | 15.247(b)(3) | PASS |
| Emissions from out of band | 15.247(d) | PASS |
| Antenna Requirement | 15.203 | PASS |

2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

| | |
|----------------------------|--|
| Product Name: | Tablet PC |
| Model No.: | TAB101, CBT1X1 |
| Model Difference | All the models are the same circuit and RF module, except the model name ,colour and Trade Name |
| Operation Frequency: | 2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40)) |
| Channel numbers: | 11 for 802.11b/802.11g/802.11n(H20) ,7 for 802.11n(H40) |
| Modulation technology: | Direct Sequence Spread Spectrum (DSSS) for (IEEE 802.11b) Orthogonal Frequency Division Multiplexing(OFDM) for (IEEE 802.11g/802.11n) |
| Data speed (IEEE 802.11b): | 1Mbps, 2Mbps, 5.5Mbps, 11Mbps |
| Data speed (IEEE 802.11g): | 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps |
| Data speed (IEEE 802.11n): | Up to 150Mbps |
| Antenna Type: | FPCB |
| Antenna gain: | 1.0dBi |
| Power supply: | DC 3.7V or DC 5V from adapter |
| Adapter: | Model:KSAS0100500200HU INPUT:100-240V~50/60Hz 0.4A OUTPUT:5V,2A |

2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work WFI TX mode, and frequency as below:

| | | |
|--------|----------------|-----------|
| Mode 1 | 802.11b | Frequency |
| | | 2412MHz |
| | | 2437MHz |
| Mode 2 | 802.11g | 2462MHz |
| | | 2412MHz |
| | | 2437MHz |
| Mode 3 | 802.11n(HT20) | 2462MHz |
| | | 2412MHz |
| | | 2437MHz |
| Mode 4 | 802.11 n(HT40) | 2462MHz |
| | | 2422MHz |
| | | 2437MHz |
| Mode 5 | LINK Mode | |

NOTE:

802.11b mode:1Mbps ,802.11g mode:6Mbps , 802.11n HT20 mode:MCS0, 802.11n HT40 mode:MCS0 was test.

2.4. Test Supporting System

None.

2.5. TEST SITES

2.5.1. Test Facilities

Lab Qualifications : Certificated by Industry Canada
Registration No.: 9868A
Date of registration: December 8, 2011

Certificated by FCC, USA
Registration No.: 370994
Date of registration: February 21, 2012

Certificated by CNAS China
Registration No.: CNAS L5783
Date of registration: August 8, 2012

2.6. List of Test and Measurement Instruments

2.6.1. For conducted emission at the mains terminals test

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|--------------------------------|---------------|-----------|------------|------------|------------|
| EMI Test Receiver | Rohde&Schwarz | ESCI | 101156 | Apr. 09,16 | Apr. 09,17 |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 101315 | Apr. 09,16 | Apr. 09,17 |
| Artificial Mains Network (AUX) | Rohde&Schwarz | ENV216 | 101314 | Apr. 09,16 | Apr. 09,17 |
| RF Cable | FUJIKURA | 3D-2W | 944 Cable | Apr. 09,16 | Apr. 09,17 |

2.6.2. For radiated emission test

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|---------------------------------------|---------------|---------------|--------------|------------|------------|
| EMI Test Receiver | Rohde&Schwarz | ESCI | 101156 | Apr. 09,16 | Apr. 09,17 |
| Bilog Antenna | ETS-LINDGREEN | 3142D | 135452 | Apr. 09,16 | Apr. 09,17 |
| Spectrum Analyzer | Agilent | E4411B | MY4511304 | Apr. 09,16 | Apr. 09,17 |
| Spectrum Analyzer | Agilent | N9020A | MY56070279 | Jul.26,16 | Jul.25,17 |
| 3m Semi-anechoic Chamber | ETS-LINDGREEN | 966 | KW01 | Apr. 09,16 | Apr. 09,17 |
| Signal Amplifier | SONOMA | 310 | 187016 | Apr. 09,16 | Apr. 09,17 |
| Signal Amplifier | Agilent | 8449B | 3008A00251 | Apr. 09,16 | Apr. 09,17 |
| RF Cable | IMRO | IMRO-400 | 966 Cable 1# | N/A | N/A |
| MULTI-DEVICE Controller | ETS-LINDGREEN | 2090 | 126913 | N/A | N/A |
| Horn Antenna | SCHWARZBECK | BBHA9170 | 9170-068 | Apr. 09,16 | Apr. 09,17 |
| Attenuation | MCE | 24-10-34 | BN9258 | Apr. 09,16 | Apr. 09,17 |
| Spectrum Analyzer | Agilent | E4408B | MY44211125 | Apr. 09,16 | Apr. 09,17 |
| High Pass filter | Micro | HPM50111 | 324216 | Apr. 09,16 | Apr. 09,17 |
| Constant temperature and humidity box | GF | GTH-800-40-1P | MAA9906-005 | Apr. 09,16 | Apr. 09,17 |
| Attenuation | MCE | 24-10-34 | BN9258 | Apr. 02,16 | Apr. 02,17 |
| Loop Antenna | ARA | PLA-1030/B | 1029 | Apr. 02,16 | Apr. 02,17 |
| Power Meter | Anritsu | ML2495A | 1204003 | Apr. 24,16 | Apr. 24,17 |
| Power Sensor | Anritsu | MA2411B | 1126150 | Apr. 24,16 | Apr. 24,17 |


3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: Tablet PC)

3.3. Test Operation Mode and Test Software

None.

3.4. Special Accessories and Auxiliary Equipment

| | |
|----------|---|
| Adapter: | Model:KSAS0100500200HU INPUT:100-240V~50/60Hz 0.4A OUTPUT:5V,2A |
|----------|---|

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test

4.1.1. Limit 15.209 limits

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB μ V) | |
|-----------------------------|------------------------------|----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 | 56 to 46 |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

4.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.


The bandwidth of the test receiver was set at 9 kHz.

Pretest for AC120V and AC 240V, The test data of the worst case condition(s) was AC 240V reported on the following page.

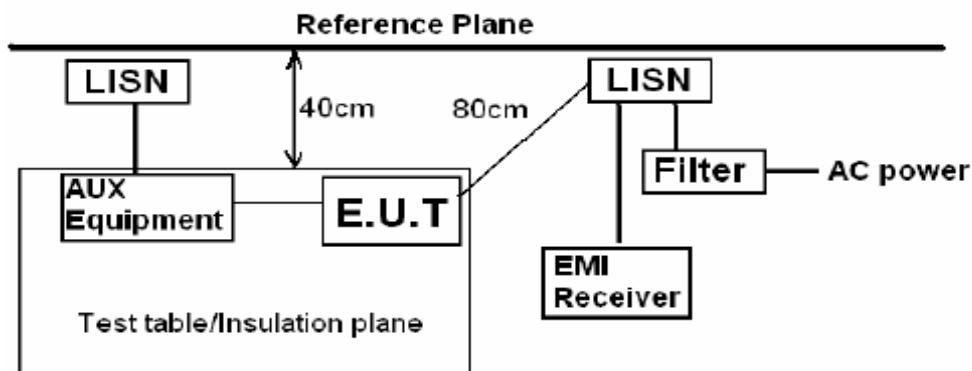

Remark:
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m


| | | | |
|----------------|--------------------------------------|---------------------|--------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010hPa | Phase : | L |
| Test Voltage : | DC 5.0V form Adapter AC 240V/60Hz | Test Mode : | Mode 5 |

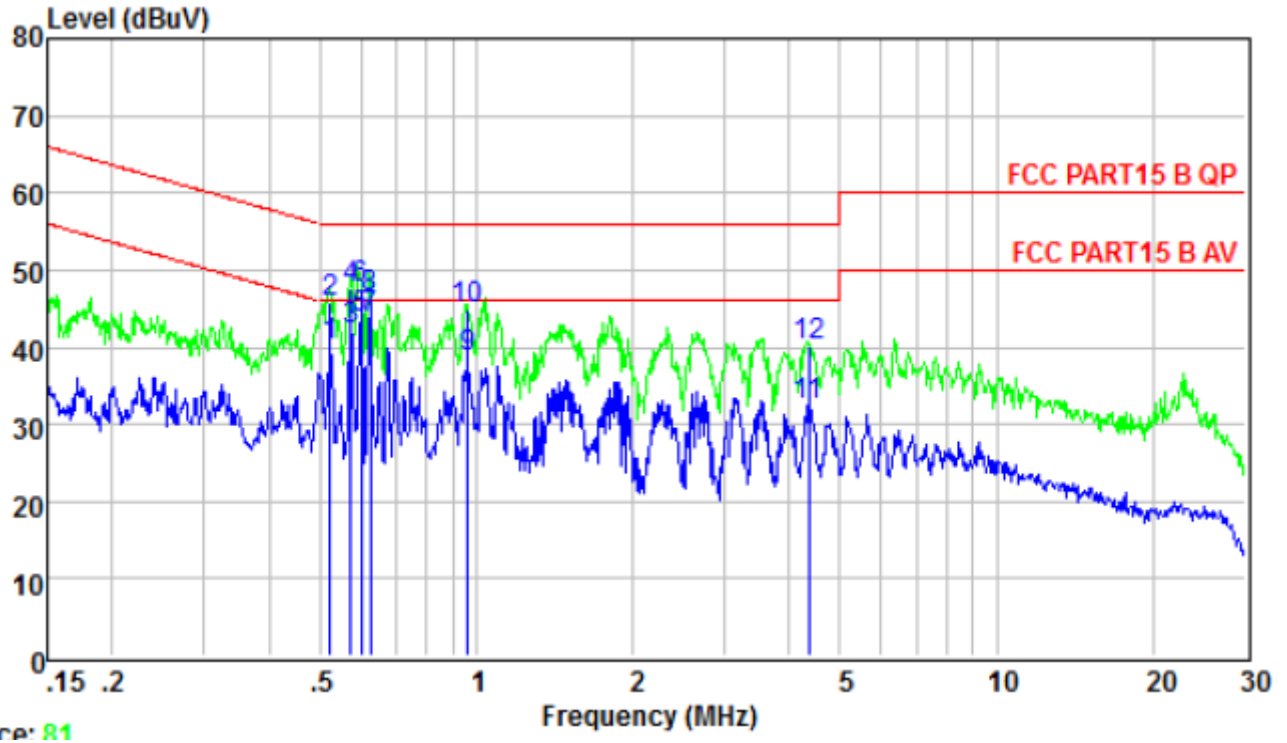

Trace: 81

| | Freq | Level | Limit | Over | Remark |
|----|-------|-------|-------|--------|---------|
| | MHz | dBuV | dBuV | dB | |
| 1 | 0.524 | 40.09 | 46.00 | -5.91 | Average |
| 2 | 0.524 | 45.76 | 56.00 | -10.24 | QP |
| 3 | 0.573 | 42.10 | 46.00 | -3.90 | Average |
| 4 | 0.573 | 47.45 | 56.00 | -8.55 | QP |
| 5 | 0.601 | 43.60 | 46.00 | -2.40 | Average |
| 6 | 0.601 | 47.45 | 56.00 | -8.55 | QP |
| 7 | 0.627 | 43.72 | 46.00 | -2.28 | Average |
| 8 | 0.627 | 46.43 | 56.00 | -9.57 | QP |
| 9 | 0.963 | 38.54 | 46.00 | -7.46 | Average |
| 10 | 0.963 | 45.04 | 56.00 | -10.96 | QP |
| 11 | 4.361 | 32.36 | 46.00 | -13.64 | Average |
| 12 | 4.361 | 40.01 | 56.00 | -15.99 | QP |

| | | | |
|----------------|--------------------------------------|---------------------|--------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 26 °C | Relative Humidity : | 54% |
| Pressure : | 1010hPa | Phase : | N |
| Test Voltage : | DC 5.0V form Adapter AC 240V/60Hz | Test Mode : | Mode 5 |

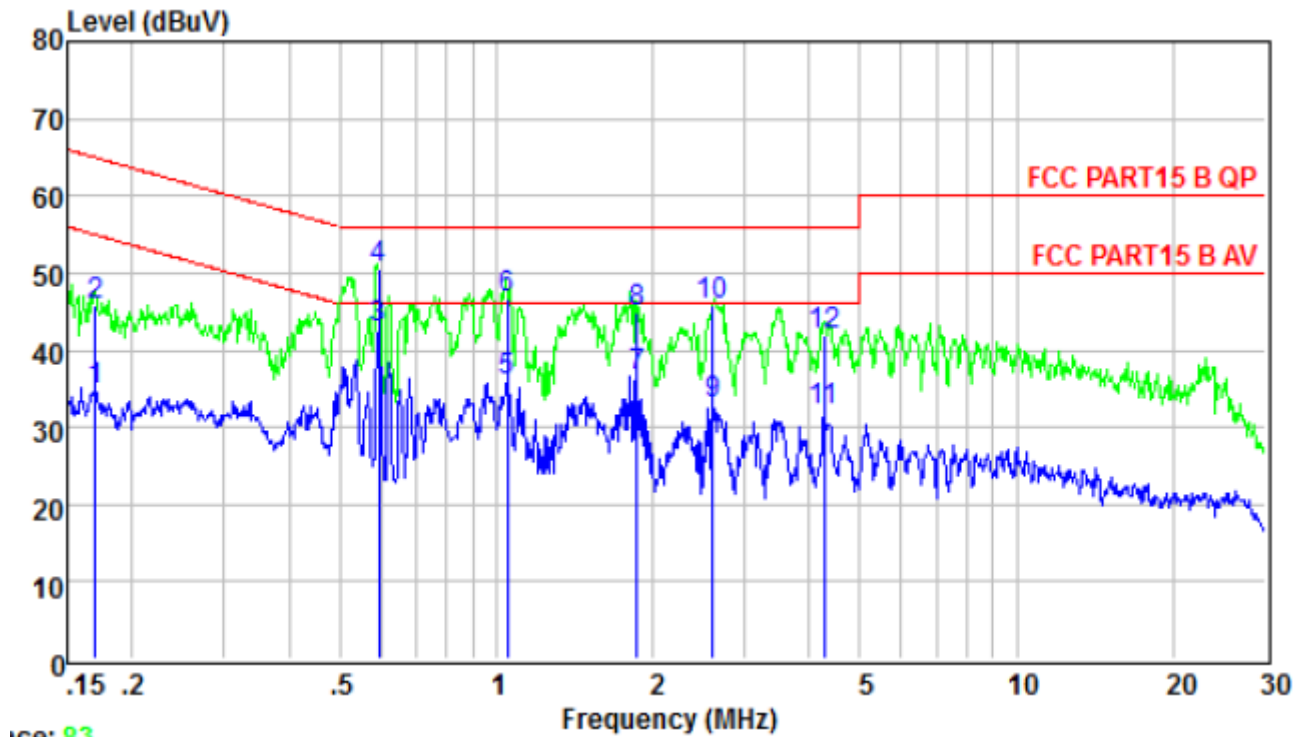

ice: 83

| | Freq | Level | Limit | Over | Remark |
|----|-------|-------|-------|--------|---------|
| | MHz | dBuV | dBuV | dB | |
| 1 | 0.169 | 34.65 | 54.99 | -20.34 | Average |
| 2 | 0.169 | 45.87 | 64.99 | -19.12 | QP |
| 3 | 0.595 | 42.82 | 46.00 | -3.18 | Average |
| 4 | 0.595 | 50.63 | 56.00 | -5.37 | QP |
| 5 | 1.049 | 35.86 | 46.00 | -10.14 | Average |
| 6 | 1.049 | 46.67 | 56.00 | -9.33 | QP |
| 7 | 1.868 | 36.71 | 46.00 | -9.29 | Average |
| 8 | 1.868 | 44.76 | 56.00 | -11.24 | QP |
| 9 | 2.608 | 33.02 | 46.00 | -12.98 | Average |
| 10 | 2.608 | 45.87 | 56.00 | -10.13 | QP |
| 11 | 4.269 | 32.20 | 46.00 | -13.80 | Average |
| 12 | 4.269 | 41.79 | 56.00 | -14.21 | QP |

4.2. Radiated Emission Test

4.2.1. Limit 15.209 limits

| FREQUENCY MHz | DISTANCE Meters | FIELD STRENGTHS LIMIT | |
|------------------|--------------------|---|-----------------------------------|
| | | $\mu\text{V}/\text{m}$ | $\text{dB}(\mu\text{V})/\text{m}$ |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 | 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) | |

4.2.2. Restricted bands of operation

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m (above 1GHz, the high was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.

2. Measurement Uncertainty: ± 3.2 dB at a level of confidence of 95%.


3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.


5. For Both PK and AV value above 1GHz, PK detector is used.

6. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).


Radiated Emission Test-Up Frequency Below 30MHz

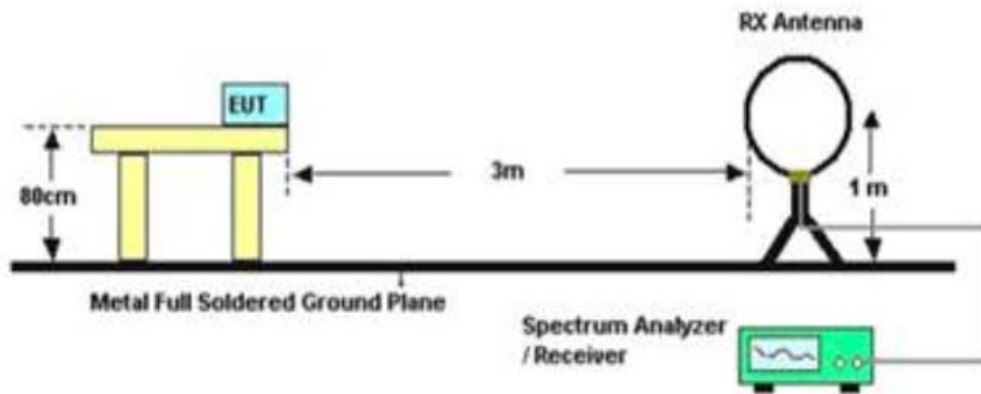

Below 1GHz

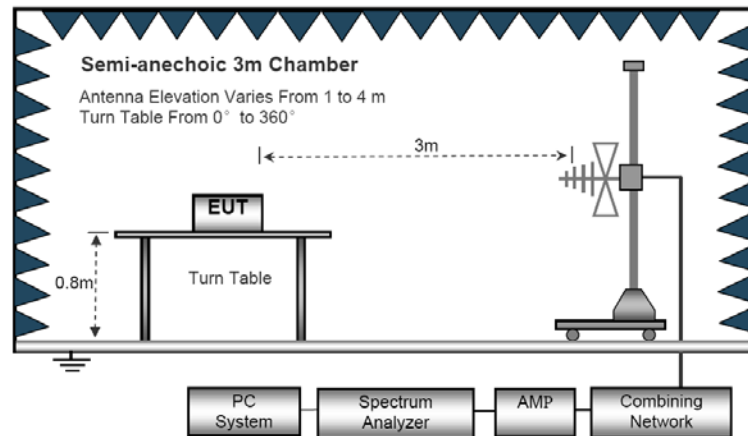

Above 1GHz

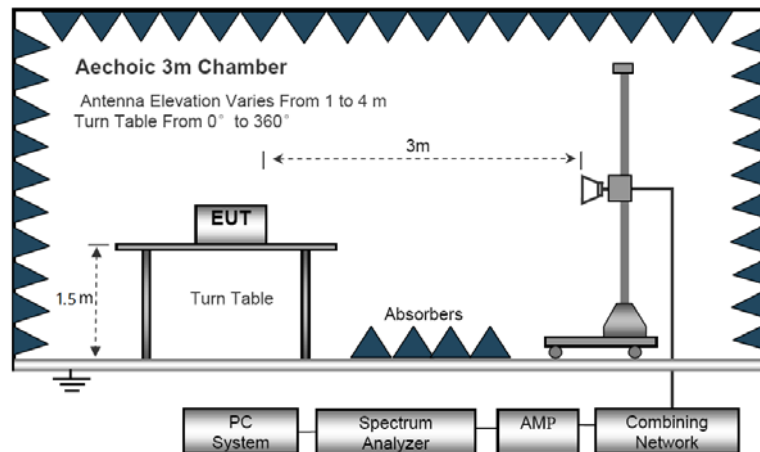

| | | | |
|----------------|-----------|---------------------|--------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | TX |
| Test Voltage : | DC 3.7V | | |

Below 30MHz

| Freq. | Reading | Limit | Margin | State |
|-------|----------|----------|--------|-------|
| (MHz) | (dBuV/m) | (dBuV/m) | (dB) | P/F |
| -- | -- | -- | -- | P |
| -- | -- | -- | -- | P |

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Below 1GHz


| | | | |
|----------------|-----------|---------------------|------------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | 802.11B-TX |
| Test Voltage : | DC 3.7V | | |

Vertical

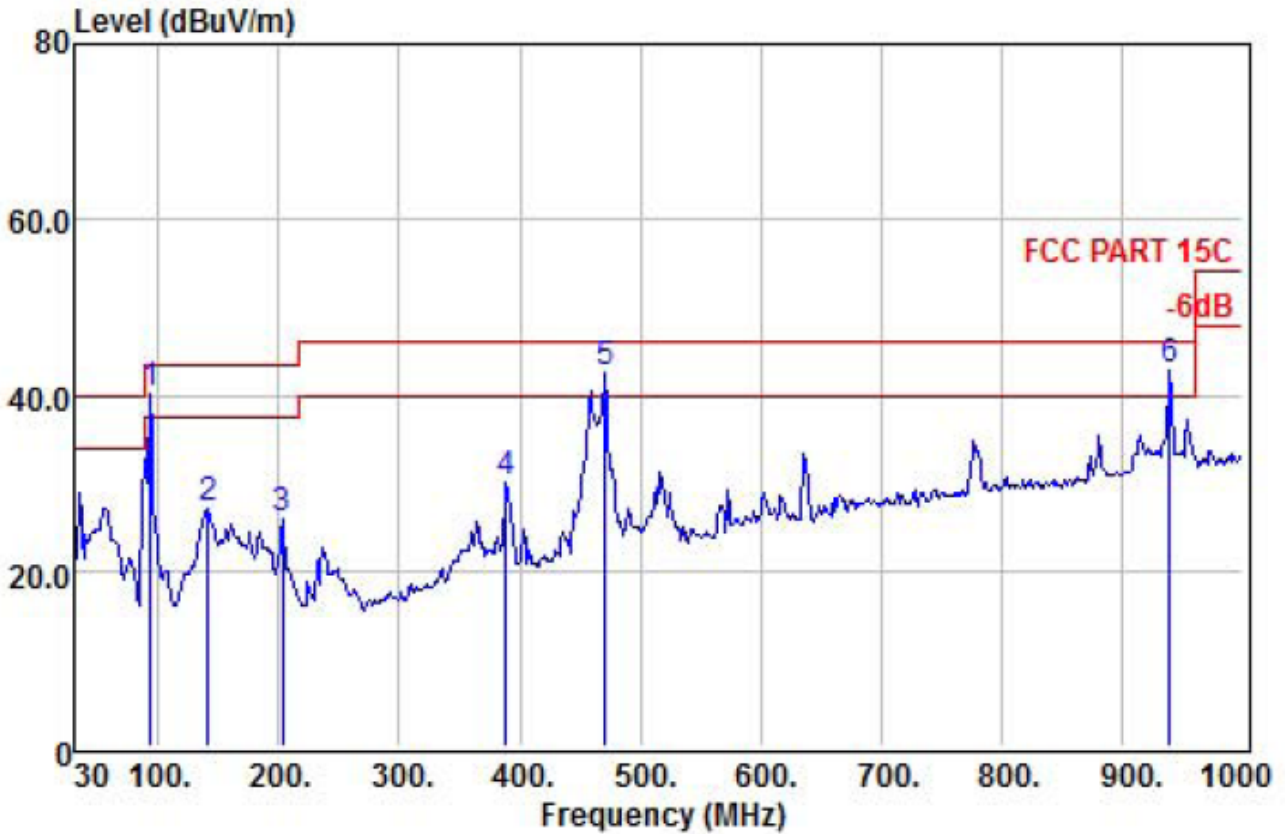

| | Read Freq | Preamp Level | Antenna Factor | Cable Loss | Limit Line | Over Limit | Remark |
|-----|-----------|--------------|----------------|------------|------------|------------|-----------------|
| | MHz | dBuV | dB | dB | dBuV/m | dB | |
| 1 ! | 93.050 | 61.30 | 31.35 | 9.25 | 0.94 | 40.14 | 43.50 -3.36 QP |
| 2 | 141.550 | 48.65 | 31.22 | 8.49 | 1.22 | 27.14 | 43.50 -16.36 QP |
| 3 | 202.660 | 44.32 | 31.09 | 11.13 | 1.46 | 25.82 | 43.50 -17.68 QP |
| 4 | 388.900 | 42.10 | 30.62 | 16.25 | 2.37 | 30.10 | 46.00 -15.90 QP |
| 5 ! | 471.350 | 52.35 | 30.60 | 18.20 | 2.69 | 42.64 | 46.00 -3.36 QP |
| 6 ! | 939.860 | 42.86 | 29.71 | 24.64 | 4.89 | 42.68 | 46.00 -3.32 QP |

Horizontal

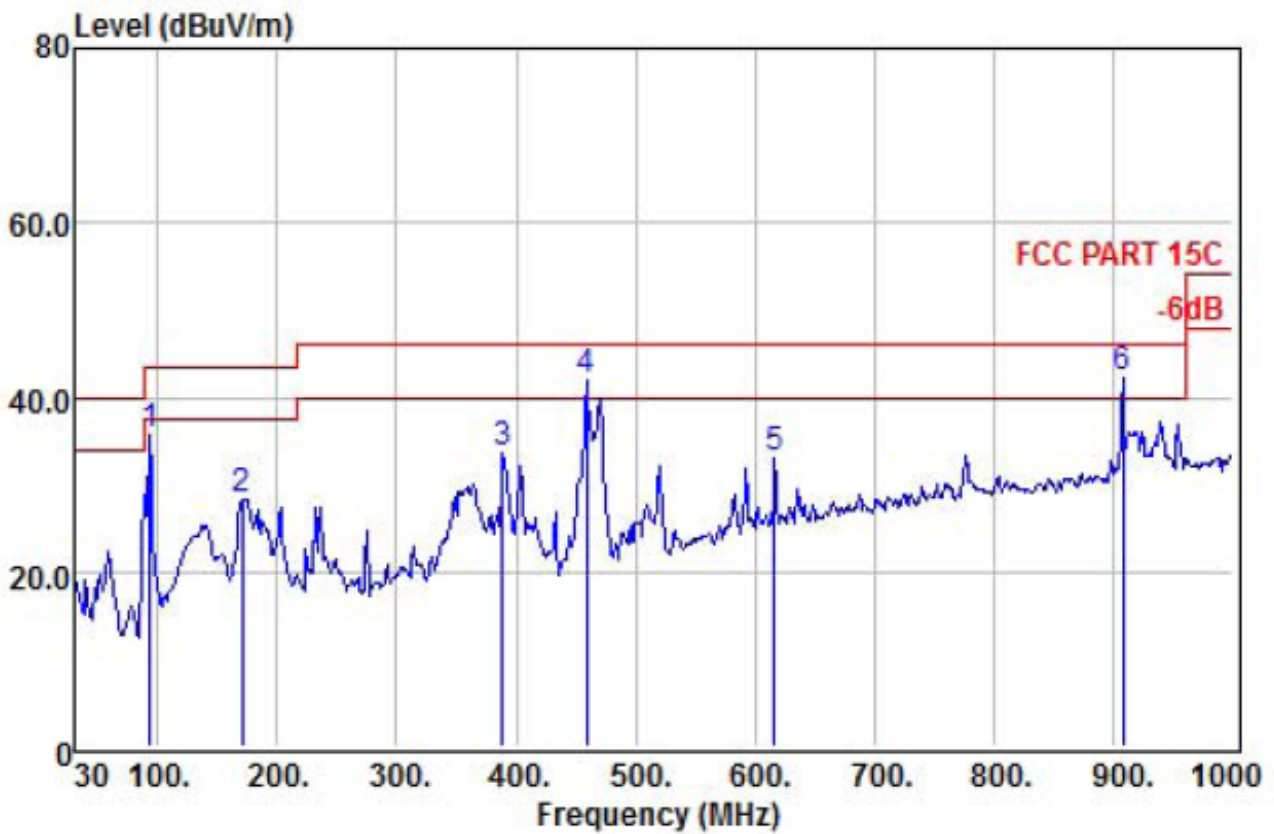

| | Read Freq | Preamp Level | Antenna Factor | Cable Loss | Limit Line | Over Limit | Remark |
|-----|-----------|--------------|----------------|------------|------------|------------|--------|
| | MHz | dBuV | dB | dB | dBuV/m | dB | |
| 1 | 93.050 | 56.83 | 31.35 | 0.94 | 43.50 | -7.83 | QP |
| 2 | 170.650 | 48.14 | 31.19 | 1.30 | 43.50 | -15.13 | QP |
| 3 | 388.900 | 45.70 | 30.62 | 2.37 | 46.00 | -12.30 | QP |
| 4 ! | 458.740 | 52.05 | 30.61 | 2.62 | 46.00 | -4.10 | QP |
| 5 | 616.850 | 39.30 | 30.64 | 3.38 | 46.00 | -12.89 | QP |
| 6 ! | 907.850 | 43.08 | 30.00 | 4.84 | 46.00 | -3.86 | QP |


NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,

Over Limit= Absolute Level – Limit


| | | | |
|----------------|-----------|---------------------|------------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | 802.11G-TX |
| Test Voltage : | DC 3.7V | | |

Vertical

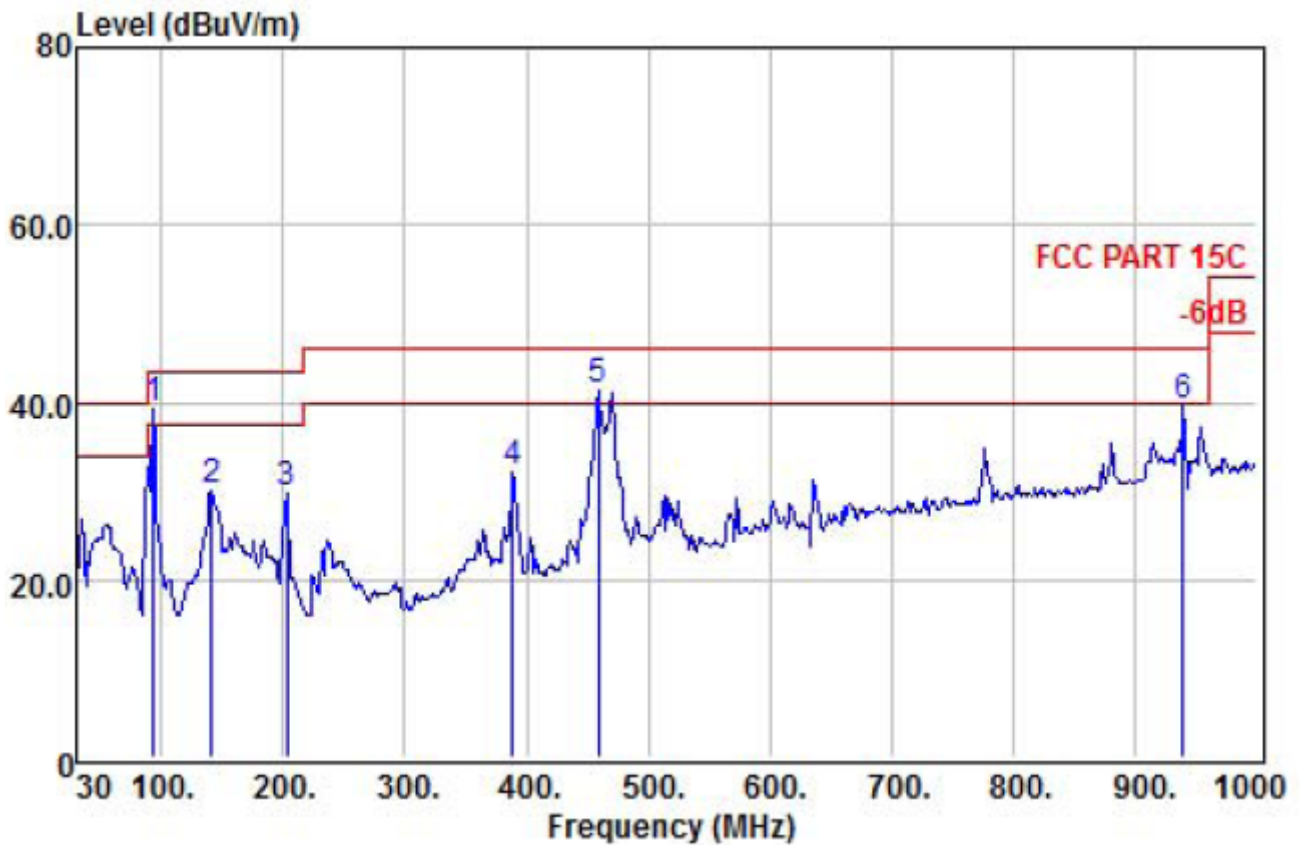

| | Read Freq | Preamp Level | Antenna Factor | Cable Factor | Cable Loss | Limit Level | Over Limit | Remark |
|-----|-----------|--------------|----------------|--------------|------------|-------------|------------|-----------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dB | |
| 1 ! | 93.05 | 60.47 | 31.35 | 9.25 | 0.94 | 39.31 | 43.50 | -4.19 QP |
| 2 | 141.55 | 51.65 | 31.22 | 8.49 | 1.22 | 30.14 | 43.50 | -13.36 QP |
| 3 | 202.66 | 48.32 | 31.09 | 11.13 | 1.46 | 29.82 | 43.50 | -13.68 QP |
| 4 | 388.90 | 44.10 | 30.62 | 16.25 | 2.37 | 32.10 | 46.00 | -13.90 QP |
| 5 ! | 458.74 | 51.61 | 30.61 | 17.84 | 2.62 | 41.46 | 46.00 | -4.54 QP |
| 6 | 939.86 | 39.78 | 29.71 | 24.64 | 4.89 | 39.60 | 46.00 | -6.40 QP |

Horizontal

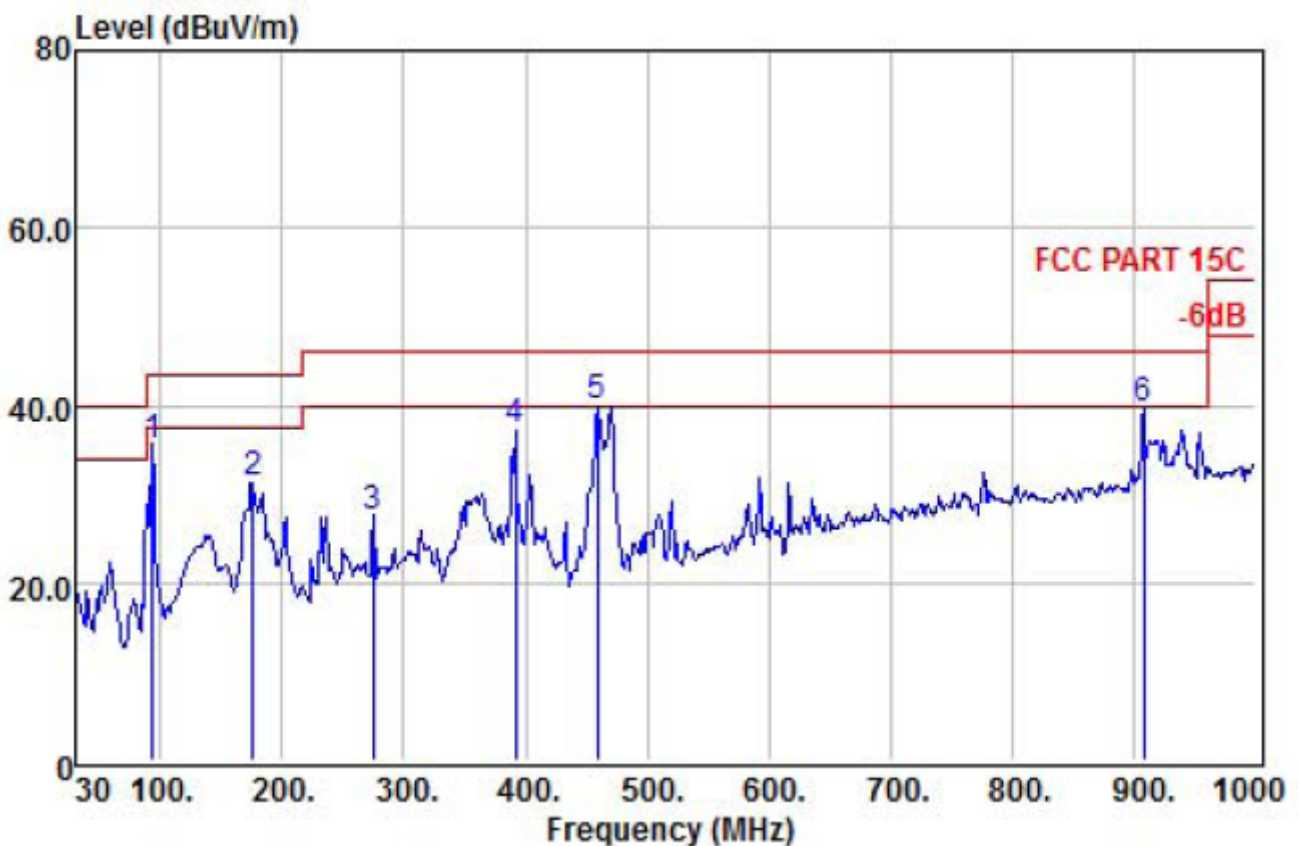


| | Read Freq | Level | Preamp Factor | Antenna Factor | Cable Loss | Level | Limit | Over Limit | Remark |
|---|-----------|-------|---------------|----------------|------------|--------|--------|------------|--------|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dBuV/m | dB | |
| 1 | 93.05 | 56.63 | 31.35 | 9.25 | 0.94 | 35.47 | 43.50 | -8.03 | QP |
| 2 | 175.50 | 50.86 | 31.17 | 10.27 | 1.39 | 31.35 | 43.50 | -12.15 | QP |
| 3 | 274.44 | 43.58 | 30.95 | 13.00 | 1.78 | 27.41 | 46.00 | -18.59 | QP |
| 4 | 391.81 | 49.11 | 30.63 | 16.26 | 2.37 | 37.11 | 46.00 | -8.89 | QP |
| 5 | 458.74 | 50.05 | 30.61 | 17.84 | 2.62 | 39.90 | 46.00 | -6.10 | QP |
| 6 | 908.82 | 40.43 | 29.99 | 24.25 | 4.84 | 39.53 | 46.00 | -6.47 | QP |

NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,
 Over Limit= Absolute Level – Limit


| | | | |
|----------------|-----------|---------------------|--------------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | 802.11N20-TX |
| Test Voltage : | DC 3.7V | | |

Vertical

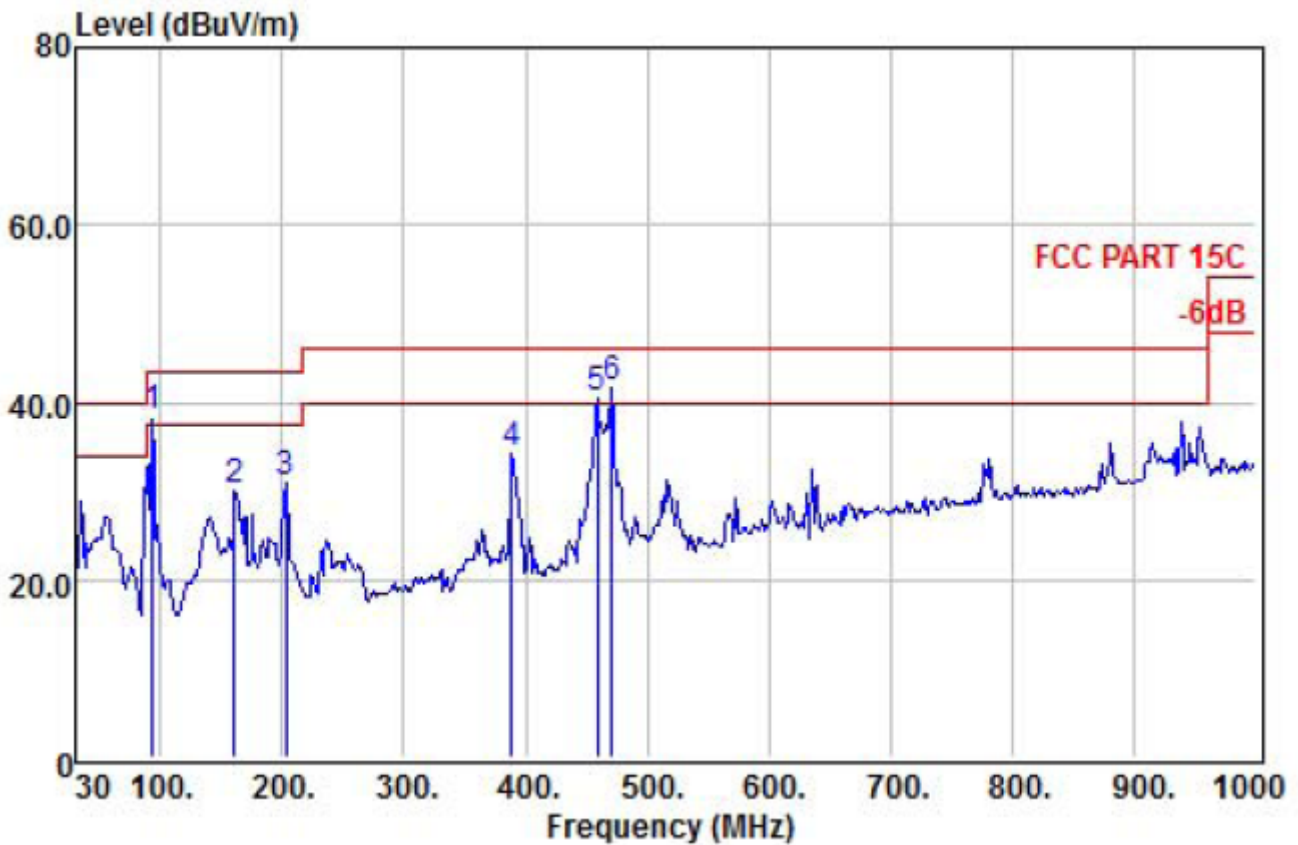

| | Read Freq | Preamp Level | Antenna Factor | Cable Loss | Limit Line | Over Limit | Remark |
|-----|-----------|--------------|----------------|------------|------------|------------|-----------------|
| | MHz | dBuV | dB | dB/m | dB | dB | |
| 1 ! | 93.05 | 59.43 | 31.35 | 9.25 | 0.94 | 38.27 | 43.50 -5.23 QP |
| 2 | 160.95 | 50.80 | 31.22 | 9.29 | 1.30 | 30.17 | 43.50 -13.33 QP |
| 3 | 202.66 | 49.32 | 31.09 | 11.13 | 1.46 | 30.82 | 43.50 -12.68 QP |
| 4 | 388.90 | 46.10 | 30.62 | 16.25 | 2.37 | 34.10 | 46.00 -11.90 QP |
| 5 ! | 458.74 | 50.61 | 30.61 | 17.84 | 2.62 | 40.46 | 46.00 -5.54 QP |
| 6 ! | 471.35 | 51.35 | 30.60 | 18.20 | 2.69 | 41.64 | 46.00 -4.36 QP |

Horizontal

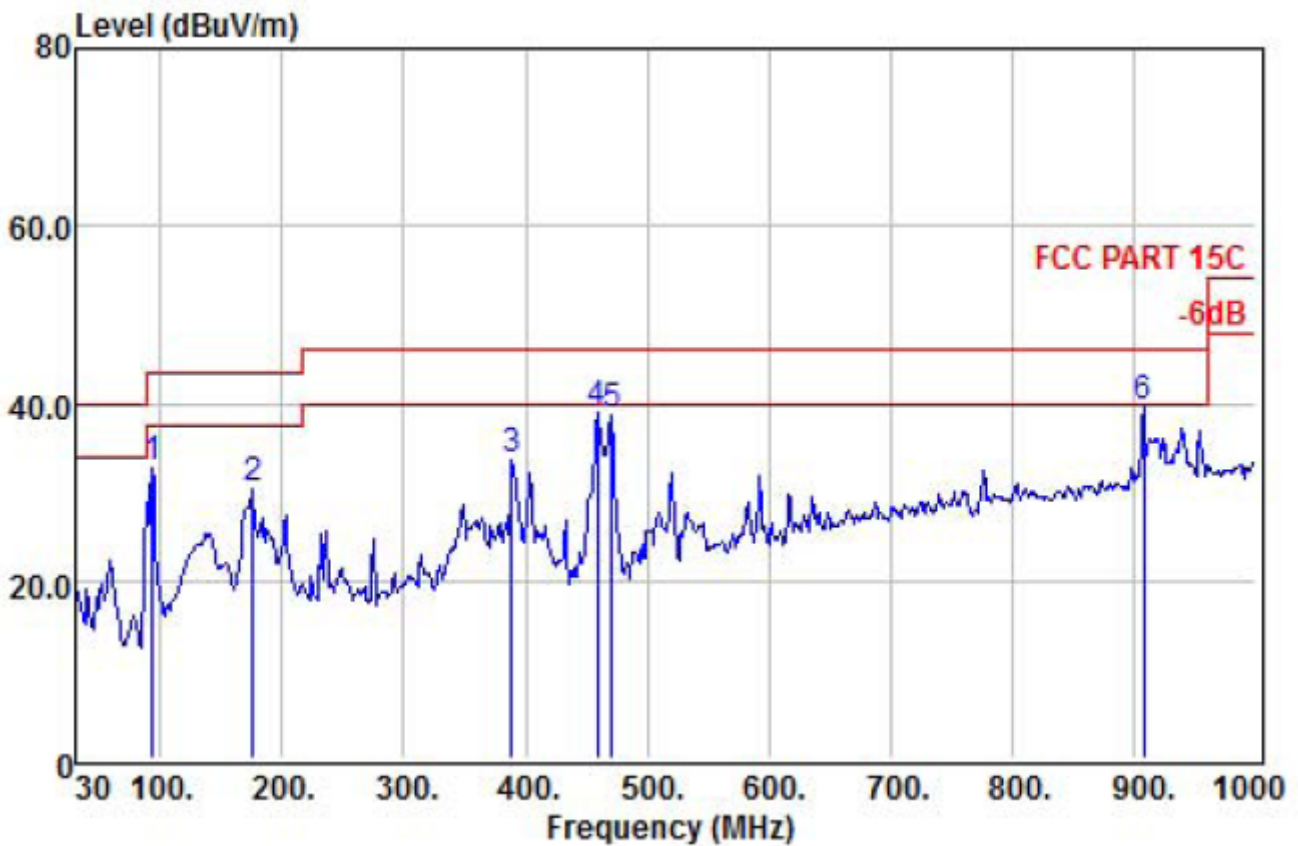


| | Read Freq | Preamp Level | Antenna Factor | Cable Loss | Limit Line | Over Limit | Remark |
|---|-----------|--------------|----------------|------------|------------|------------|--------|
| | MHz | dBuV | dB | dB | dBuV/m | dB | |
| 1 | 93.05 | 53.83 | 31.35 | 0.94 | 43.50 | -10.83 | QP |
| 2 | 175.50 | 49.86 | 31.17 | 1.39 | 43.50 | -13.15 | QP |
| 3 | 388.90 | 45.70 | 30.62 | 2.37 | 46.00 | -12.30 | QP |
| 4 | 458.74 | 49.05 | 30.61 | 2.62 | 46.00 | -7.10 | QP |
| 5 | 471.35 | 48.42 | 30.60 | 2.69 | 46.00 | -7.29 | QP |
| 6 | 908.82 | 40.43 | 29.99 | 4.84 | 46.00 | -6.47 | QP |

NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,
 Over Limit= Absolute Level – Limit


| | | | |
|----------------|-----------|---------------------|--------------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | 802.11N40-TX |
| Test Voltage : | DC 3.7V | | |

Vertical

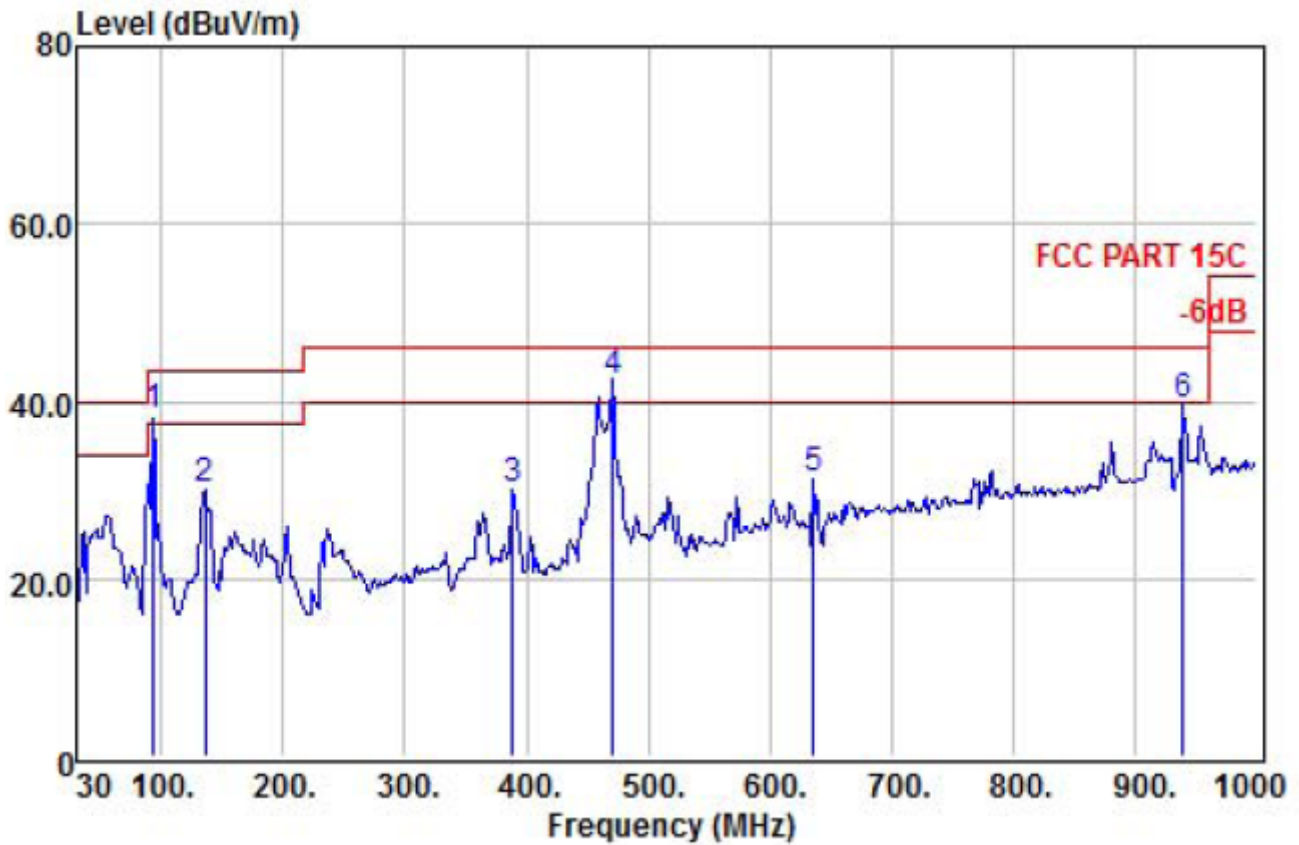

| | Read Freq | Preamp Level | Antenna Factor | Cable Loss | Limit Line | Over Limit | Remark |
|-----|-----------|--------------|----------------|------------|------------|------------|-----------|
| | MHz | dBuV | dB | dB | dBuV/m | dB | |
| 1 ! | 93.05 | 59.38 | 31.35 | 0.94 | 38.22 | 43.50 | -5.28 QP |
| 2 | 135.73 | 51.81 | 31.20 | 1.12 | 30.09 | 43.50 | -13.41 QP |
| 3 | 388.90 | 42.10 | 30.62 | 2.37 | 30.10 | 46.00 | -15.90 QP |
| 4 ! | 471.35 | 52.07 | 30.60 | 2.69 | 42.36 | 46.00 | -3.64 QP |
| 5 | 636.25 | 37.24 | 30.74 | 3.47 | 31.31 | 46.00 | -14.69 QP |
| 6 | 939.86 | 39.86 | 29.71 | 4.89 | 39.68 | 46.00 | -6.32 QP |

Horizontal

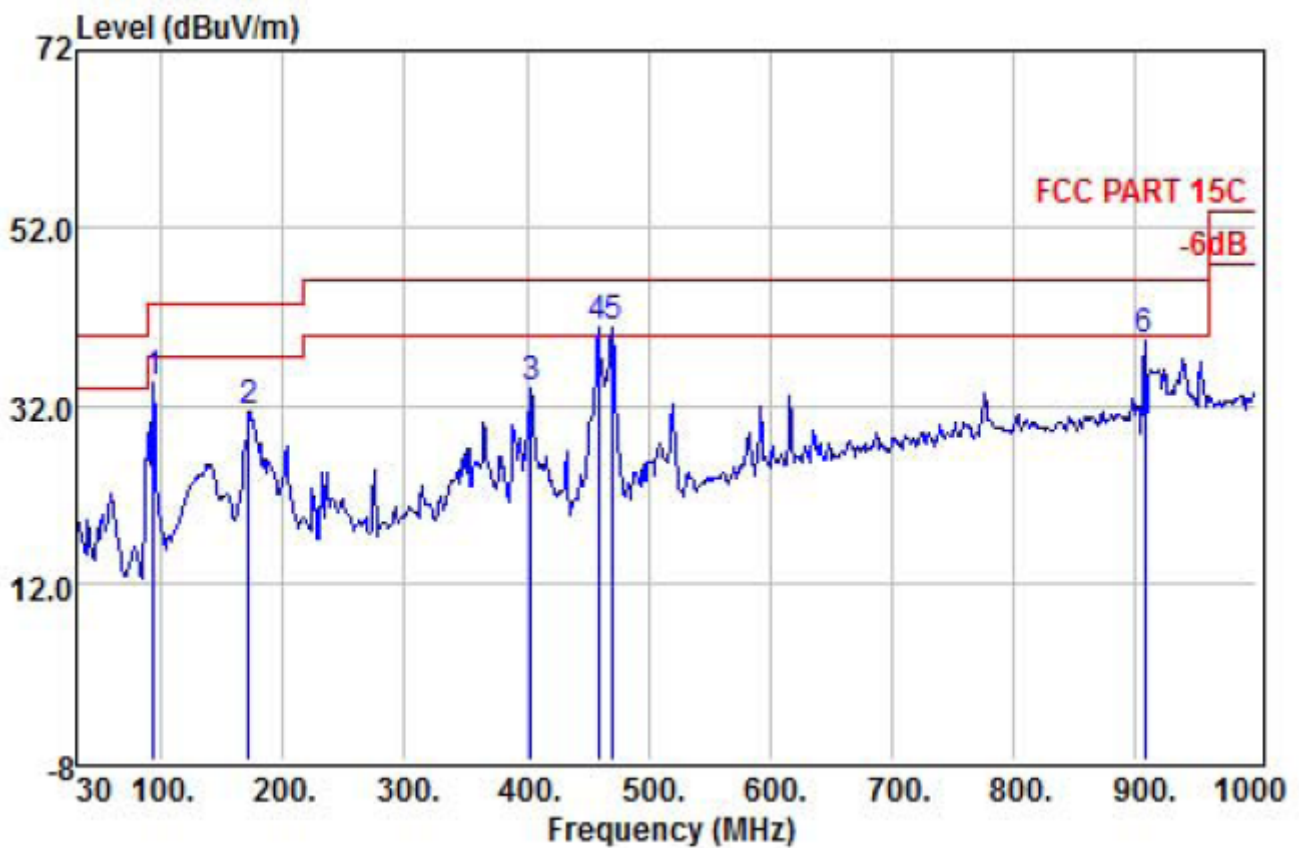

| | Read Freq | Preamp Level | Antenna Factor | Cable Loss | Limit Line | Over Limit | Remark | | |
|-----|-----------|--------------|----------------|------------|------------|------------|--------|--------|----|
| | MHz | dBuV | dB | dB/m | dB | dBuV/m | dB | | |
| 1 | 93.05 | 55.63 | 31.35 | 9.25 | 0.94 | 34.47 | 43.50 | -9.03 | QP |
| 2 | 171.62 | 51.07 | 31.19 | 10.15 | 1.30 | 31.33 | 43.50 | -12.17 | QP |
| 3 | 403.45 | 45.92 | 30.63 | 16.41 | 2.37 | 34.07 | 46.00 | -11.93 | QP |
| 4 ! | 458.74 | 51.05 | 30.61 | 17.84 | 2.62 | 40.90 | 46.00 | -5.10 | QP |
| 5 ! | 471.35 | 50.42 | 30.60 | 18.20 | 2.69 | 40.71 | 46.00 | -5.29 | QP |
| 6 | 907.85 | 40.08 | 30.00 | 24.22 | 4.84 | 39.14 | 46.00 | -6.86 | QP |


NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,
 Over Limit= Absolute Level – Limit

Above 1GHz


| | | | |
|----------------|-----------|---------------------|---------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | TX-2412 |
| Test Voltage : | DC 3.7V | | |

Vertical

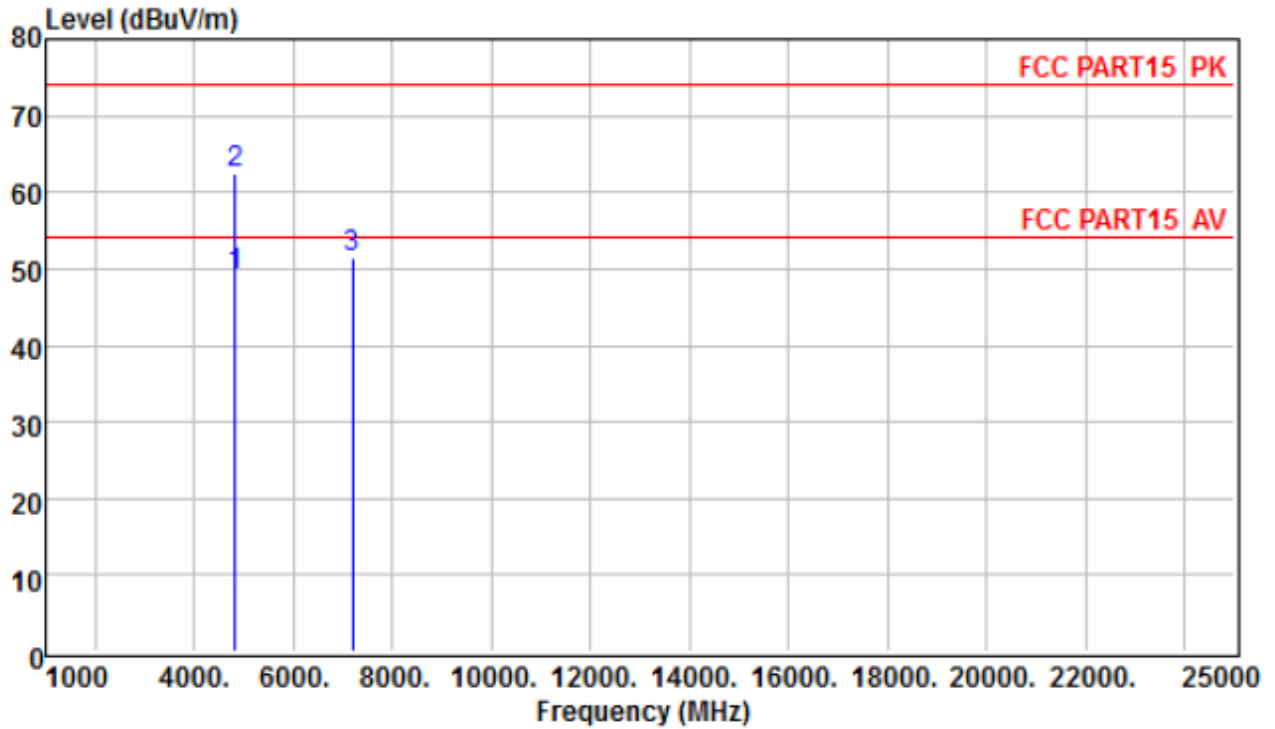

| | ReadAntenna | Cable | Preamp | Limit | Over | | | |
|------|-------------|--------|--------|--------|--------|--------|-------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 4824.000 | 32.43 | 31.99 | 12.01 | 27.50 | 48.93 | 54.00 | -5.07 Average |
| 2 | 4824.000 | 46.02 | 31.99 | 12.01 | 27.50 | 62.52 | 74.00 | -11.48 Peak |
| 3 | 7206.000 | 37.44 | 25.28 | 16.61 | 27.94 | 51.39 | 74.00 | -22.61 Peak |


Horizontal

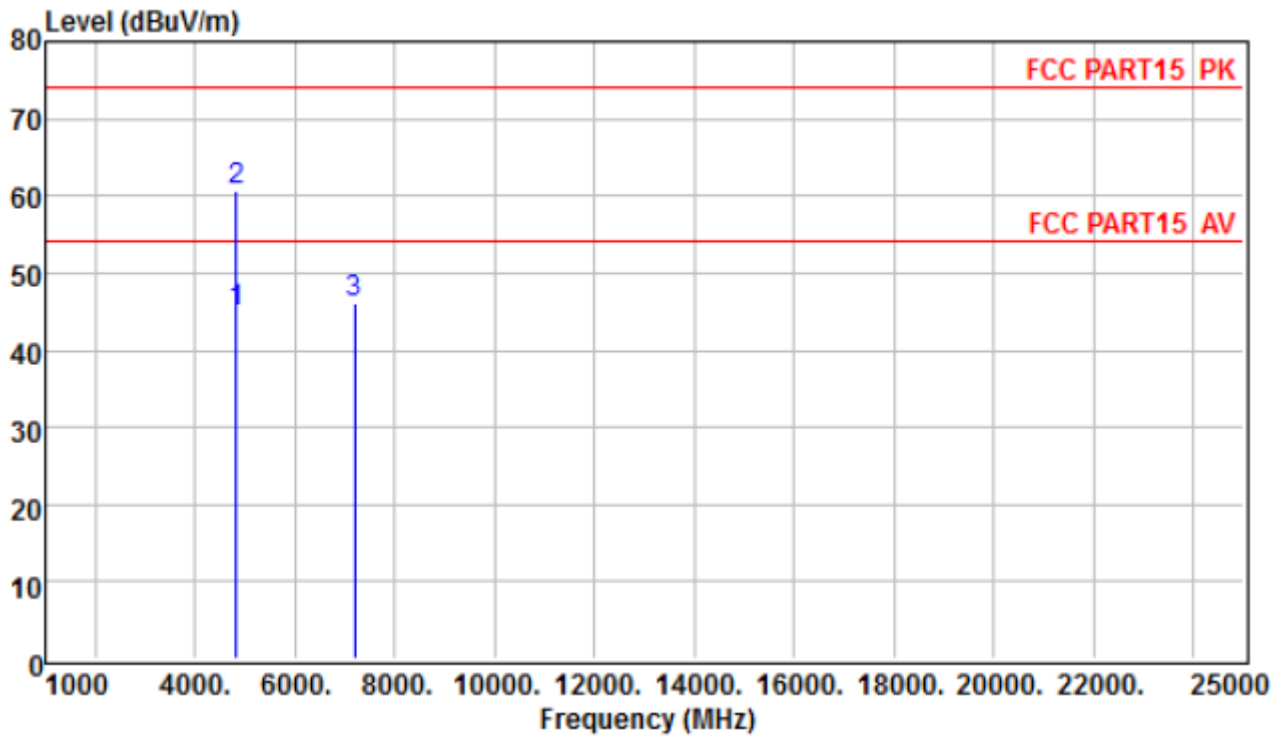

| | ReadAntenna | Cable | Preamp | Limit | Over | | | |
|------|-------------|--------|--------|--------|--------|--------|-------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 4824.000 | 28.31 | 31.99 | 12.01 | 27.50 | 44.81 | 54.00 | -9.19 Average |
| 2 | 4824.000 | 44.22 | 31.99 | 12.01 | 27.50 | 60.72 | 74.00 | -13.28 Peak |
| 3 | 7206.000 | 32.23 | 25.28 | 16.61 | 27.94 | 46.18 | 74.00 | -27.82 Peak |


| | | | |
|----------------|-----------|---------------------|---------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | TX-2437 |
| Test Voltage : | DC 3.7V | | |

Vertical

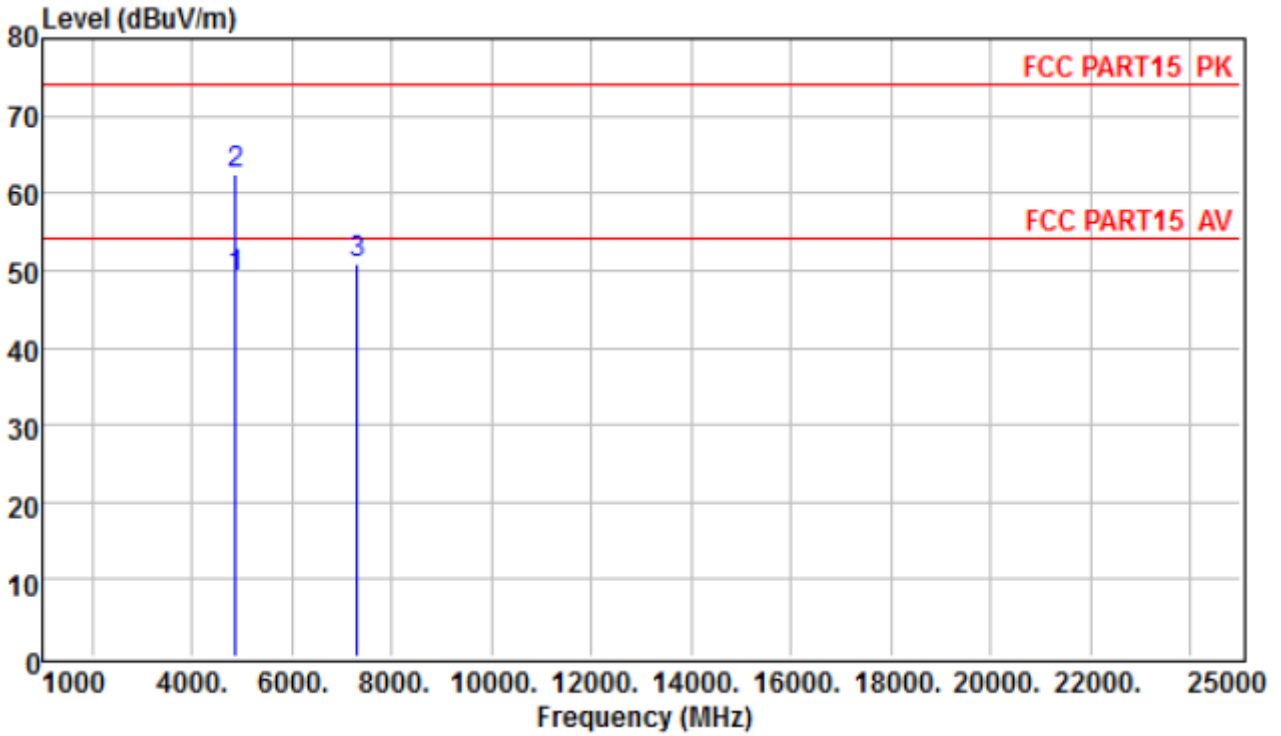

| | ReadAntenna | Cable | Preamp | Limit | Over | | | |
|------|-------------|--------|--------|--------|--------|--------|-------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 4874.000 | 32.45 | 32.11 | 12.14 | 27.53 | 49.17 | 54.00 | -4.83 Average |
| 2 | 4874.000 | 45.86 | 32.11 | 12.14 | 27.53 | 62.58 | 74.00 | -11.42 Peak |
| 3 | 7311.000 | 37.95 | 24.32 | 16.62 | 27.96 | 50.93 | 74.00 | -23.07 Peak |


Horizontal

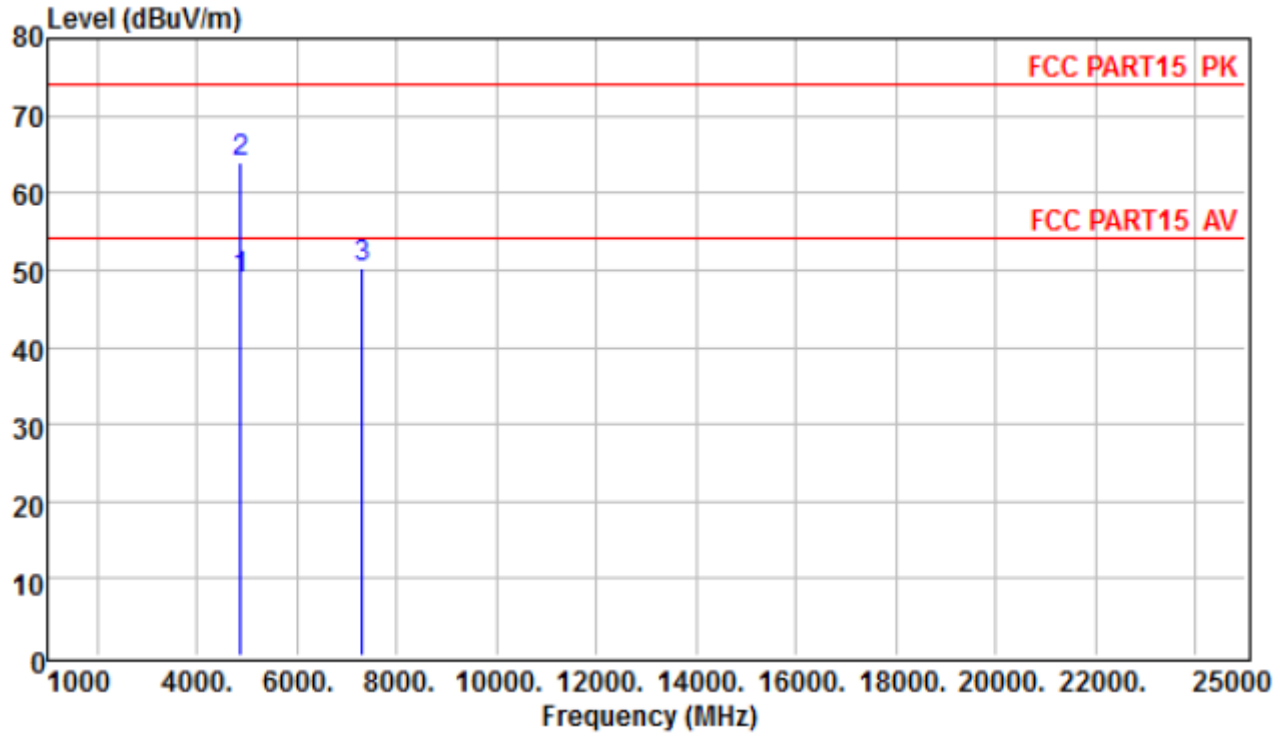

| | ReadAntenna | Cable | Preamp | Limit | Over | | | |
|------|-------------|--------|--------|--------|--------|--------|-------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 4874.000 | 32.11 | 32.11 | 12.14 | 27.53 | 48.83 | 54.00 | -5.17 Average |
| 2 | 4874.000 | 47.32 | 32.11 | 12.14 | 27.53 | 64.04 | 74.00 | -9.96 Peak |
| 3 | 7311.000 | 37.22 | 24.32 | 16.62 | 27.96 | 50.20 | 74.00 | -23.80 Peak |


| | | | |
|----------------|-----------|---------------------|---------|
| EUT : | Tablet PC | Model Name : | TAB101 |
| Temperature : | 20 °C | Relative Humidity : | 48% |
| Pressure : | 1010hPa | Test Mode : | TX-2462 |
| Test Voltage : | DC 3.7V | | |

Vertical

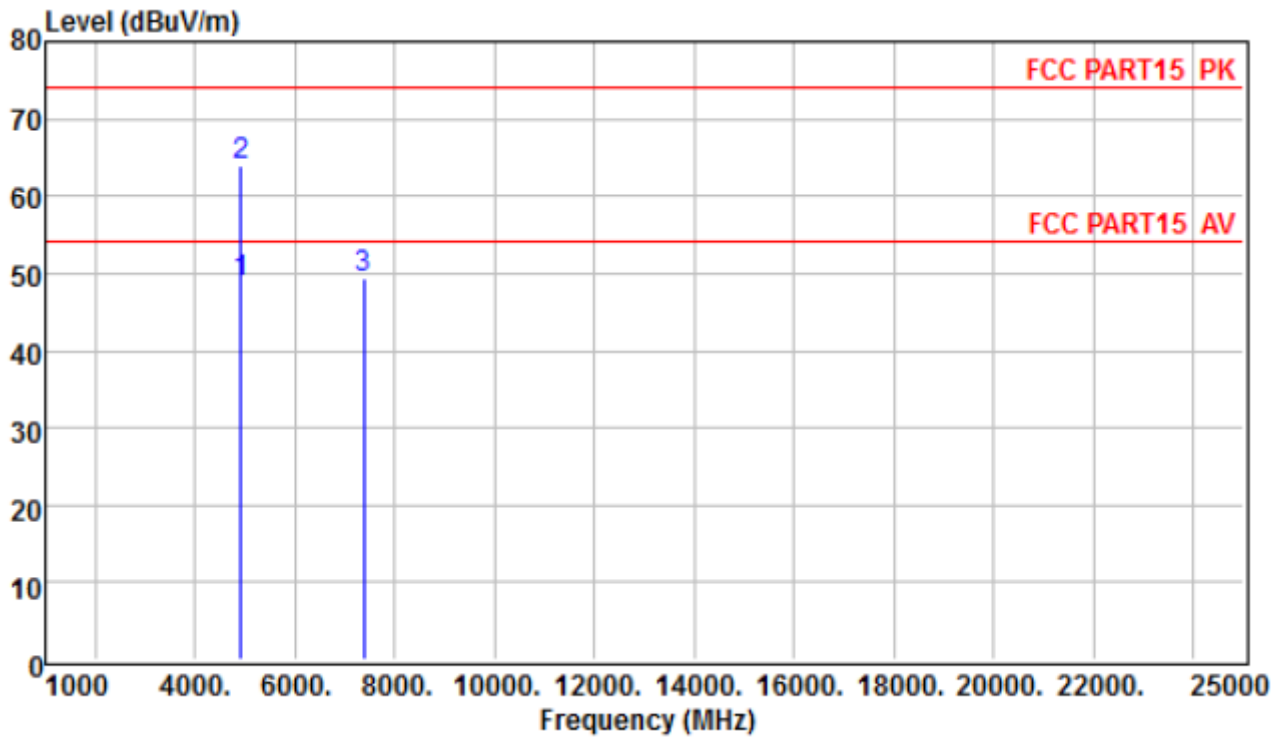

| | ReadAntenna | Cable | Preamp | Limit | Over | | | |
|------|-------------|--------|--------|--------|--------|--------|-------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 4924.000 | 31.76 | 32.23 | 12.28 | 27.56 | 48.71 | 54.00 | -5.29 Average |
| 2 | 4924.000 | 46.98 | 32.23 | 12.28 | 27.56 | 63.93 | 74.00 | -10.07 Peak |
| 3 | 7386.000 | 36.34 | 24.36 | 16.62 | 27.98 | 49.34 | 74.00 | -24.66 Peak |

Horizontal

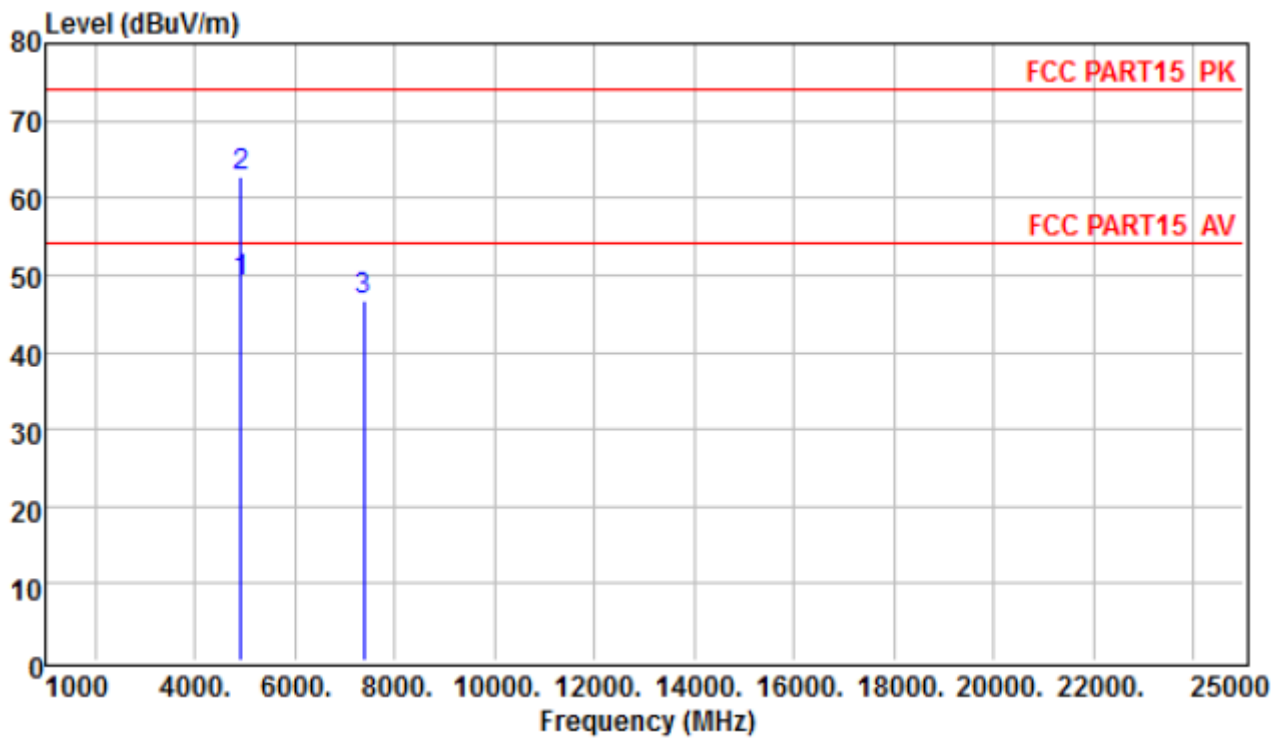

| | ReadAntenna | Cable | Preamp | Limit | Over | | | |
|------|-------------|--------|--------|--------|--------|--------|-------|---------------|
| Freq | Level | Factor | Loss | Factor | Level | Line | Limit | Remark |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 4924.000 | 32.11 | 32.23 | 12.28 | 27.56 | 49.06 | 54.00 | -4.94 Average |
| 2 | 4924.000 | 45.87 | 32.23 | 12.28 | 27.56 | 62.82 | 74.00 | -11.18 Peak |
| 3 | 7386.000 | 33.65 | 24.36 | 16.62 | 27.98 | 46.65 | 74.00 | -27.35 Peak |

Note: "802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

Spurious Emission in Restricted Band (1-25G) :

All the modulation modes have been tested and all other emissions more than 20dB below the limit, the worst result was report as below:

| Polar (H/V) | Frequency | Meter Reading | antenna Factor | cable loss | preamp factor | Emission Level | Limits | Margin | Detector Type |
|-------------|-----------|---------------|----------------|------------|---------------|----------------|----------|--------|---------------|
| | (MHz) | (dBuV) | (dB) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | |
| 802.11b | | | | | | | | | |
| Vertical | 3264.000 | 36.34 | 30.26 | 9.96 | 26.63 | 49.93 | 74 | -24.07 | Pk |
| Horizontal | 3264.000 | 35.34 | 30.26 | 9.96 | 26.63 | 48.93 | 74 | -25.07 | PK |
| Vertical | 3336.000 | 36.45 | 30.33 | 9.96 | 26.66 | 50.08 | 74 | -23.92 | Pk |
| Horizontal | 3336.000 | 37.45 | 30.33 | 9.96 | 26.66 | 51.08 | 74 | -22.92 | PK |
| Vertical | 4100.000 | 36.34 | 31.64 | 10.61 | 27.06 | 51.53 | 74 | -22.47 | Pk |
| Horizontal | 4100.000 | 35.36 | 31.64 | 10.61 | 27.06 | 50.55 | 74 | -23.45 | PK |
| Vertical | 11764.000 | 34.15 | 26.64 | 17.32 | 28.98 | 49.13 | 74 | -24.87 | Pk |
| Horizontal | 11764.000 | 35.32 | 26.64 | 17.32 | 28.98 | 50.3 | 74 | -23.7 | PK |
| Vertical | 17732.000 | 33.24 | 26.27 | 22.01 | 30.39 | 51.13 | 74 | -22.87 | Pk |
| Horizontal | 17732.000 | 32.47 | 26.27 | 22.01 | 30.39 | 50.36 | 74 | -23.64 | PK |
| 802.11g | | | | | | | | | |
| Vertical | 3264.000 | 34.34 | 30.26 | 9.96 | 26.63 | 47.93 | 74 | -26.07 | Pk |
| Horizontal | 3264.000 | 33.12 | 30.26 | 9.96 | 26.63 | 46.71 | 74 | -27.29 | PK |
| Vertical | 3336.000 | 33.85 | 30.33 | 9.96 | 26.66 | 47.48 | 74 | -26.52 | Pk |
| Horizontal | 3336.000 | 32.56 | 30.33 | 9.96 | 26.66 | 46.19 | 74 | -27.81 | PK |
| Vertical | 4100.000 | 33.16 | 31.64 | 10.61 | 27.06 | 48.35 | 74 | -25.65 | Pk |
| Horizontal | 4100.000 | 35.51 | 31.64 | 10.61 | 27.06 | 50.7 | 74 | -23.3 | PK |
| Vertical | 11764.000 | 32.65 | 26.64 | 17.32 | 28.98 | 47.63 | 74 | -26.37 | Pk |
| Horizontal | 11764.000 | 34.87 | 26.64 | 17.32 | 28.98 | 49.85 | 74 | -24.15 | PK |
| Vertical | 17732.000 | 32.65 | 26.27 | 22.01 | 30.39 | 50.54 | 74 | -23.46 | Pk |
| Horizontal | 17732.000 | 34.76 | 26.27 | 22.01 | 30.39 | 52.65 | 74 | -21.35 | PK |
| 802.11n(20) | | | | | | | | | |
| Vertical | 3264.000 | 32.21 | 30.26 | 9.96 | 26.63 | 45.8 | 74 | -28.2 | Pk |
| Horizontal | 3264.000 | 33.14 | 30.26 | 9.96 | 26.63 | 46.73 | 74 | -27.27 | PK |
| Vertical | 3336.000 | 34.12 | 30.33 | 9.96 | 26.66 | 47.75 | 74 | -26.25 | Pk |
| Horizontal | 3336.000 | 33.54 | 30.33 | 9.96 | 26.66 | 47.17 | 74 | -26.83 | PK |
| Vertical | 4100.000 | 33.45 | 31.64 | 10.61 | 27.06 | 48.64 | 74 | -25.36 | Pk |
| Horizontal | 4100.000 | 34.14 | 31.64 | 10.61 | 27.06 | 49.33 | 74 | -24.67 | PK |
| Vertical | 11764.000 | 32.56 | 26.64 | 17.32 | 28.98 | 47.54 | 74 | -26.46 | Pk |
| Horizontal | 11764.000 | 33.12 | 26.64 | 17.32 | 28.98 | 48.1 | 74 | -25.9 | PK |
| Vertical | 17732.000 | 31.24 | 26.27 | 22.01 | 30.39 | 49.13 | 74 | -24.87 | Pk |
| Horizontal | 17732.000 | 34.15 | 26.27 | 22.01 | 30.39 | 52.04 | 74 | -21.96 | PK |
| 802.11n(40) | | | | | | | | | |
| Vertical | 3264.000 | 32.56 | 30.26 | 9.96 | 26.63 | 46.15 | 74 | -27.85 | Pk |
| Horizontal | 3264.000 | 31.25 | 30.26 | 9.96 | 26.63 | 44.84 | 74 | -29.16 | PK |
| Vertical | 3336.000 | 32.67 | 30.33 | 9.96 | 26.66 | 46.3 | 74 | -27.7 | Pk |
| Horizontal | 3336.000 | 33.36 | 30.33 | 9.96 | 26.66 | 46.99 | 74 | -27.01 | PK |
| Vertical | 4100.000 | 31.76 | 31.64 | 10.61 | 27.06 | 46.95 | 74 | -27.05 | Pk |
| Horizontal | 4100.000 | 31.54 | 31.64 | 10.61 | 27.06 | 46.73 | 74 | -27.27 | PK |
| Vertical | 11764.000 | 32.87 | 26.64 | 17.32 | 28.98 | 47.85 | 74 | -26.15 | Pk |
| Horizontal | 11764.000 | 33.15 | 26.64 | 17.32 | 28.98 | 48.13 | 74 | -25.87 | PK |
| Vertical | 17732.000 | 29.13 | 26.27 | 22.01 | 30.39 | 47.02 | 74 | -26.98 | Pk |
| Horizontal | 17732.000 | 27.14 | 26.27 | 22.01 | 30.39 | 45.03 | 74 | -28.97 | PK |

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

Spurious Emission in Band Edge:

| Frequency (MHz) | Meter Reading (dB μ V) | antenna Factor (dB) | cable loss (dB) | preamp factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type | Comment |
|--------------------|----------------------------------|---------------------------|-----------------------|--------------------------|-------------------------------------|--------------------------|----------------|------------------|------------|
| 802.11b | | | | | | | | | |
| 2390 | 38.98 | 30.44 | 8.94 | 26.32 | 52.04 | 74 | -21.96 | peak | Vertical |
| 2390 | 37.65 | 30.44 | 8.94 | 26.32 | 50.71 | 74 | -23.29 | peak | Horizontal |
| 2483.5 | 38.95 | 30.05 | 9.07 | 26.34 | 51.73 | 74 | -22.27 | peak | Vertical |
| 2483.5 | 39.23 | 30.05 | 9.07 | 26.34 | 52.01 | 74 | -21.99 | peak | Horizontal |
| 802.11g | | | | | | | | | |
| 2390 | 36.83 | 30.44 | 8.94 | 26.32 | 49.89 | 74 | -24.11 | peak | Vertical |
| 2390 | 35.76 | 30.44 | 8.94 | 26.32 | 48.82 | 74 | -25.18 | peak | Horizontal |
| 2483.5 | 37.82 | 30.05 | 9.07 | 26.34 | 50.6 | 74 | -23.4 | peak | Vertical |
| 2483.5 | 36.54 | 30.05 | 9.07 | 26.34 | 49.32 | 74 | -24.68 | peak | Horizontal |
| 802.11n(HT20) | | | | | | | | | |
| 2390 | 37.34 | 30.44 | 8.94 | 26.32 | 50.4 | 74 | -23.6 | peak | Vertical |
| 2390 | 36.23 | 30.44 | 8.94 | 26.32 | 49.29 | 74 | -24.71 | peak | Horizontal |
| 2483.5 | 37.31 | 30.05 | 9.07 | 26.34 | 50.09 | 74 | -23.91 | peak | Vertical |
| 2483.5 | 32.15 | 30.05 | 9.07 | 26.34 | 44.93 | 74 | -29.07 | peak | Horizontal |
| 802.11n(HT40) | | | | | | | | | |
| 2390 | 35.12 | 30.44 | 8.94 | 26.32 | 48.18 | 74 | -25.82 | peak | Vertical |
| 2390 | 34.65 | 30.44 | 8.94 | 26.32 | 47.71 | 74 | -26.29 | peak | Horizontal |
| 2483.5 | 36.36 | 30.05 | 9.07 | 26.34 | 49.14 | 74 | -24.86 | peak | Vertical |
| 2483.5 | 35.24 | 30.05 | 9.07 | 26.34 | 48.02 | 74 | -25.98 | peak | Horizontal |


If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

5. BAND EDGE COMPLIANCE TEST

5.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see §15.205(c)).

5.2. Test setup

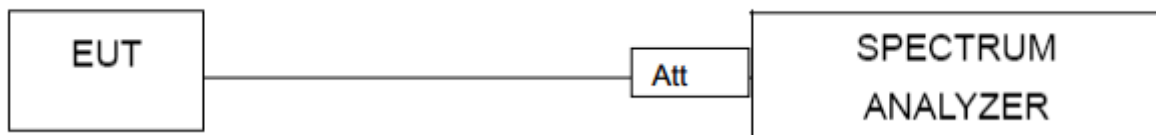

5.3. Test Procedure


- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

| Frequency Band MHz | Delta to band emission (dBc) | > Limit (dBc) | Result |
|-----------------------|---------------------------------|------------------|--------|
| 802.11b mode | | | |
| Left band | 44.116 | 20 | Pass |
| Right band | 37.57 | 20 | Pass |
| 802.11g mode | | | |
| Left band | 30.537 | 20 | Pass |
| Right band | 36.023 | 20 | Pass |
| 802.11n-HT20 mode | | | |
| Left band | 34.673 | 20 | Pass |
| Right band | 36.439 | 20 | Pass |
| 802.11n-HT40 mode | | | |
| Left band | 32.389 | 20 | Pass |
| Right band | 30.418 | 20 | Pass |


802.11b: Band Edge, low channel



802.11b: Band Edge, high channel

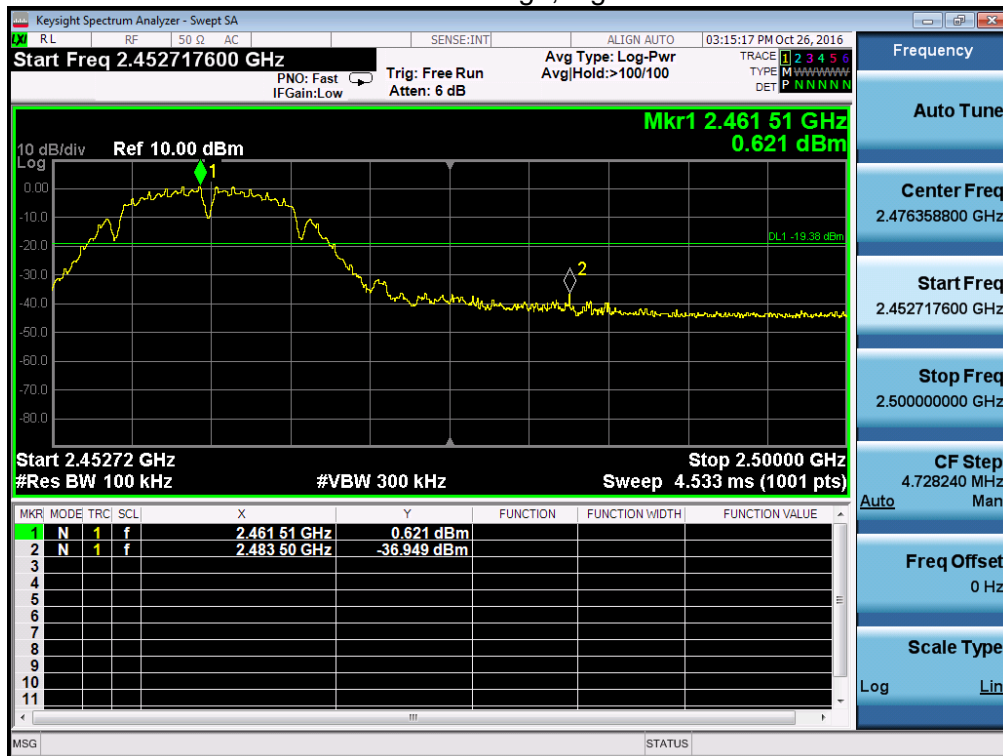


802.11g: Band Edge, low channel

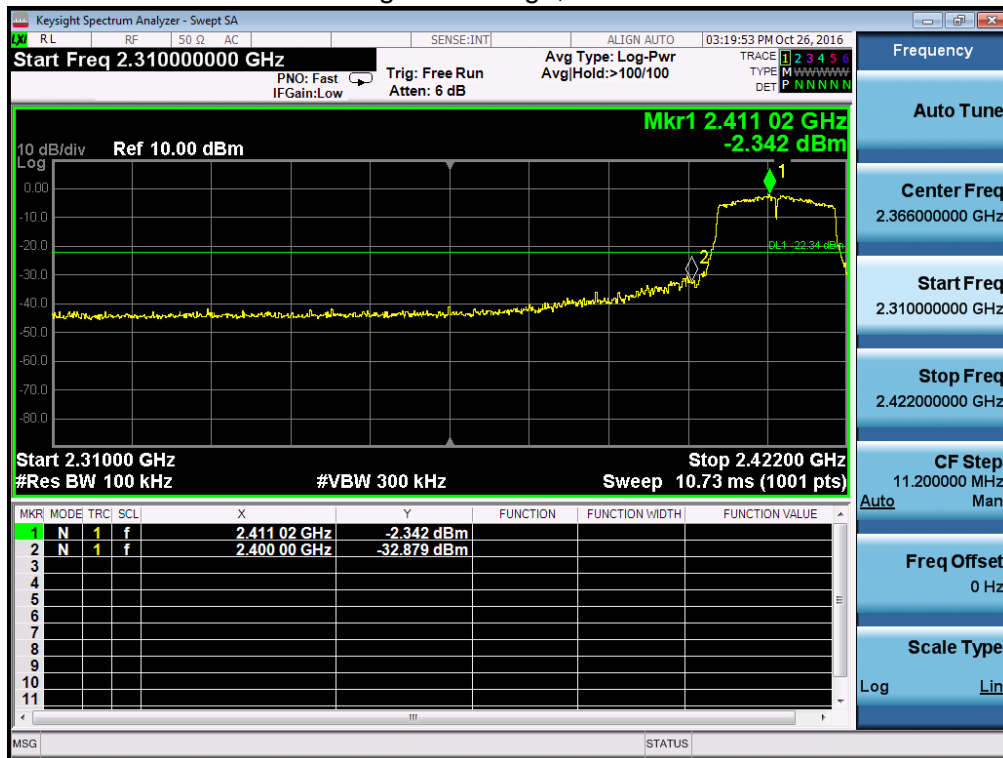

802.11g: Band Edge, high channel




802.11n-HT20: Band Edge, low channel

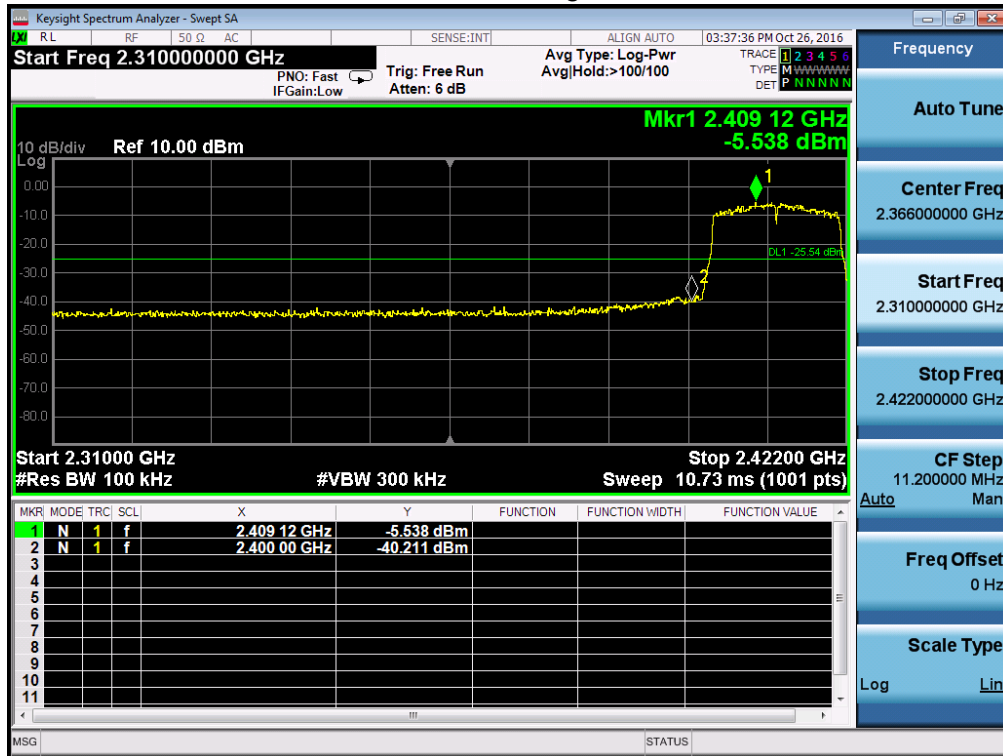


802.11n-HT20: Band Edge, high channel



802.11n-HT40: Band Edge, low channel

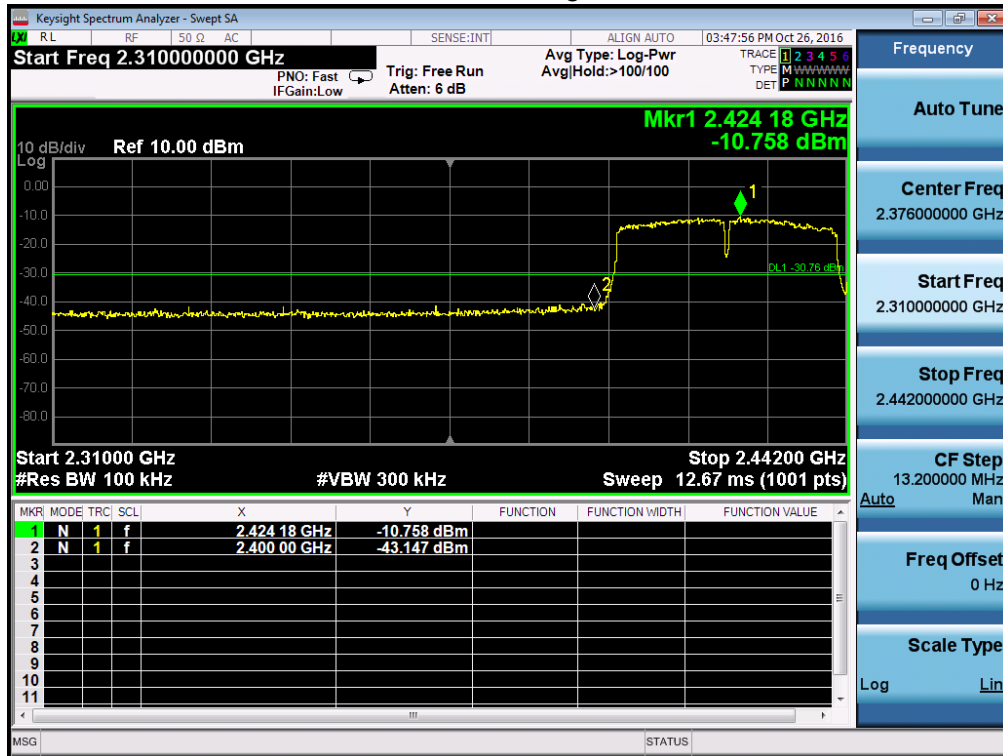

802.11n-HT40: Band Edge, high channel

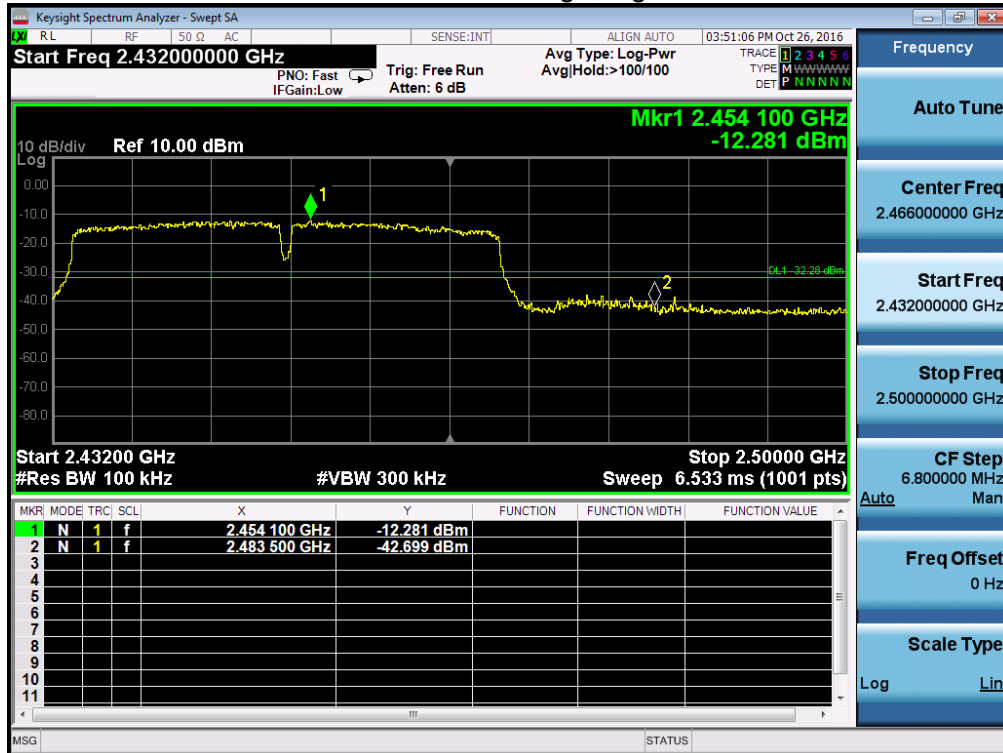

6. 6DB&20DB BANDWIDTH TEST

6.1. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

6.2. Test Procedure


6dB bandwidth

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

20dB bandwidth

C63.10 Occupied Bandwidth (OBW=20dB bandwidth)

1. Set RBW = 1%-5% OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Set the span range between 2 times and 5 times of the OBW.
4. Sweep time=Auto, Detector=PK, Trace=Max hold.
5. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst-case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level

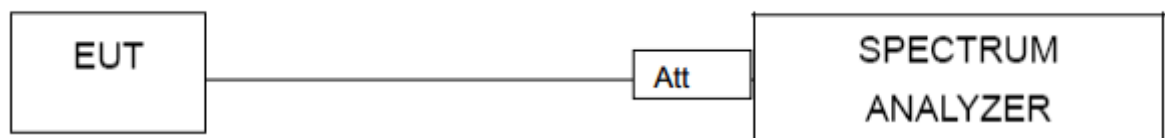

Test data:

| | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (MHz) | Result |
|-------------------|----------------------------|------------------------------------|------------------------|---------------|
| 802.11b | 2412 | 9.159 | >0.5 | Pass |
| | 2437 | 9.157 | >0.5 | Pass |
| | 2462 | 9.161 | >0.5 | Pass |
| 802.11g | 2412 | 15.48 | >0.5 | Pass |
| | 2437 | 15.10 | >0.5 | Pass |
| | 2462 | 16.39 | >0.5 | Pass |
| 802.11n (HT20) | 2412 | 17.63 | >0.5 | Pass |
| | 2437 | 17.61 | >0.5 | Pass |
| | 2462 | 17.63 | >0.5 | Pass |
| 802.11n (HT40) | 2422 | 36.34 | >0.5 | Pass |
| | 2437 | 36.08 | >0.5 | Pass |
| | 2452 | 36.34 | >0.5 | Pass |

Test plot as follows:
6dB bandwidth

802.11b 2412MHz



802.11g 2412MHz



802.11b 2437MHz



802.11g 2437MHz



802.11b 2462MHz




802.11g 2462MHz



802.11n (HT20) 2412MHz




802.11n (HT40) 2422MHz

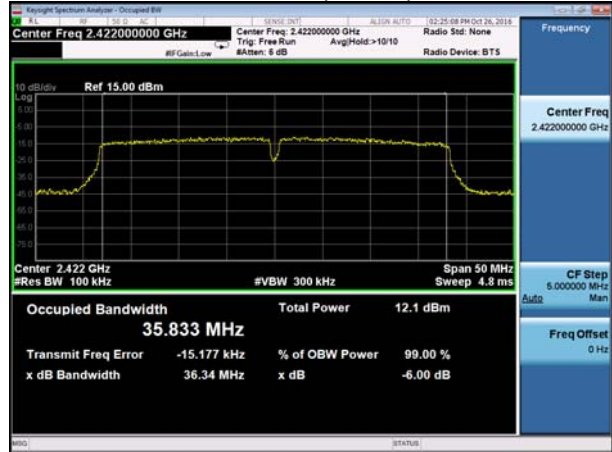

802.11n (HT20) 2437MHz




802.11n (HT40) 2437MHz

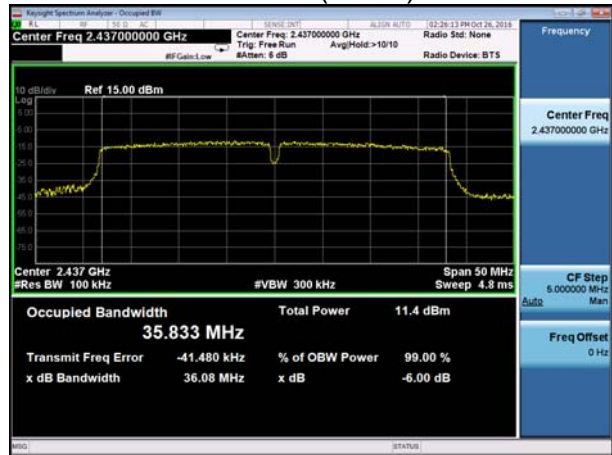

802.11n(HT20) 2462MHz



802.11n (HT40)2452MHz

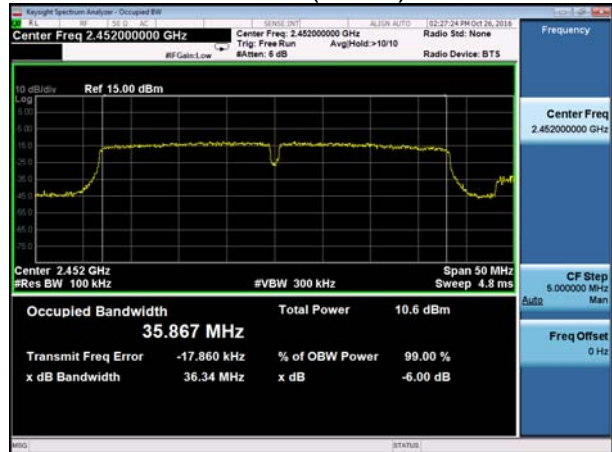

7. OUTPUT POWER TEST

7.1. Limits

For systems using digital modulation in the 2400~2483.5MHz, The out put Power shall not exceed 1W (30dBm)

7.2. Test procedure

1. - The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

7.3. TEST SETUP



| Test Channel | Frequency | Maximum Conducted Output Power (PK) | Maximum Conducted Output Power (AV) | LIMIT |
|----------------------------|-----------|-------------------------------------|-------------------------------------|-------|
| | (MHz) | (dBm) | (dBm) | dBm |
| TX 802.11b Mode | | | | |
| CH01 | 2412 | 12.74 | 9.42 | 30 |
| CH06 | 2437 | 12.56 | 9.31 | 30 |
| CH11 | 2462 | 12.38 | 9.21 | 30 |
| TX 802.11g Mode | | | | |
| CH01 | 2412 | 11.41 | 8.42 | 30 |
| CH06 | 2437 | 11.38 | 8.40 | 30 |
| CH11 | 2462 | 11.23 | 8.32 | 30 |
| TX 802.11n(20) Mode | | | | |
| CH01 | 2412 | 10.25 | 7.61 | 30 |
| CH06 | 2437 | 10.22 | 7.49 | 30 |
| CH11 | 2462 | 10.15 | 7.38 | 30 |
| TX 802.11n(40) Mode | | | | |
| CH03 | 2422 | 10.20 | 7.48 | 30 |
| CH06 | 2437 | 10.12 | 7.34 | 30 |
| CH09 | 2452 | 10.14 | 7.37 | 30 |

Note: For power test the duty cycle is 100% in continuous transmitting mode.

8. DUTY CYCLE

8.1. Test Procedure

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

The EUT was operating in controlled its channel.

Use the following spectrum analyzer settings:

Span = Zero Span

RBW = 8MHz

VBW =50MHz


Number of points in Sweep >100

Detector function = peak


Trace = Clear write Measure T_{total} and T_{on}

Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor= $10 \cdot \log(1/Duty\ Cycle)$


8.2. TEST SETUP

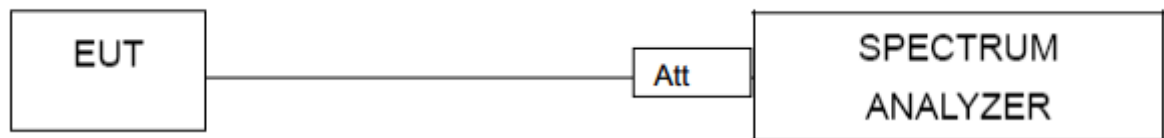


Test plot of Duty Cycle for 802.11b

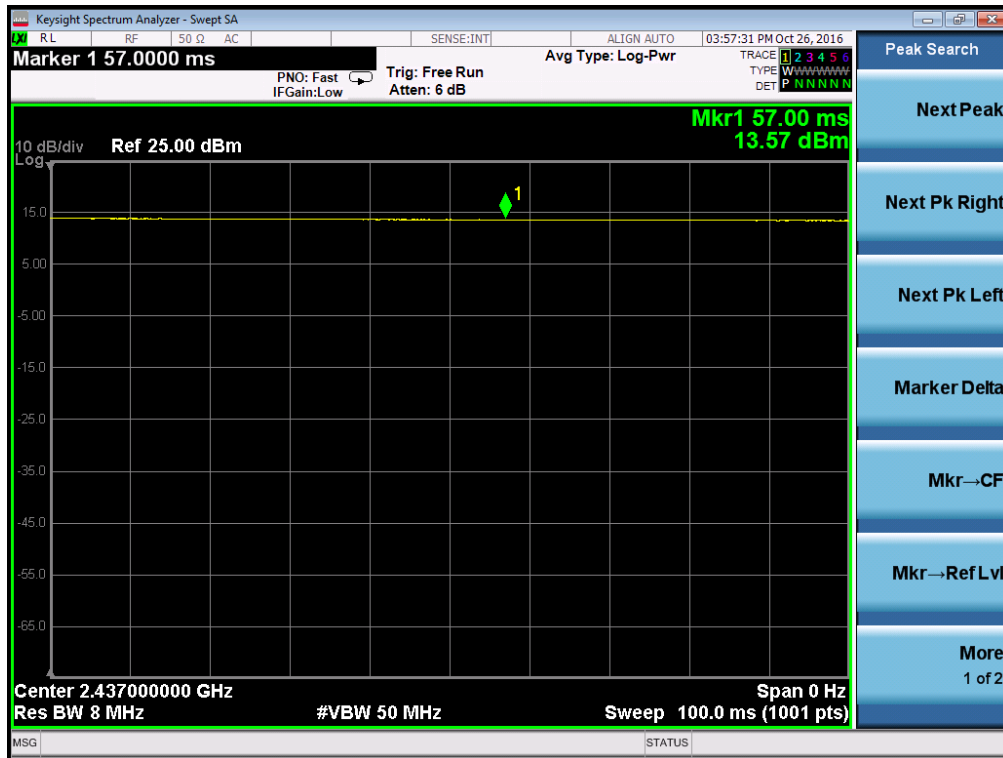


Test plot of Duty Cycle for 802.11g

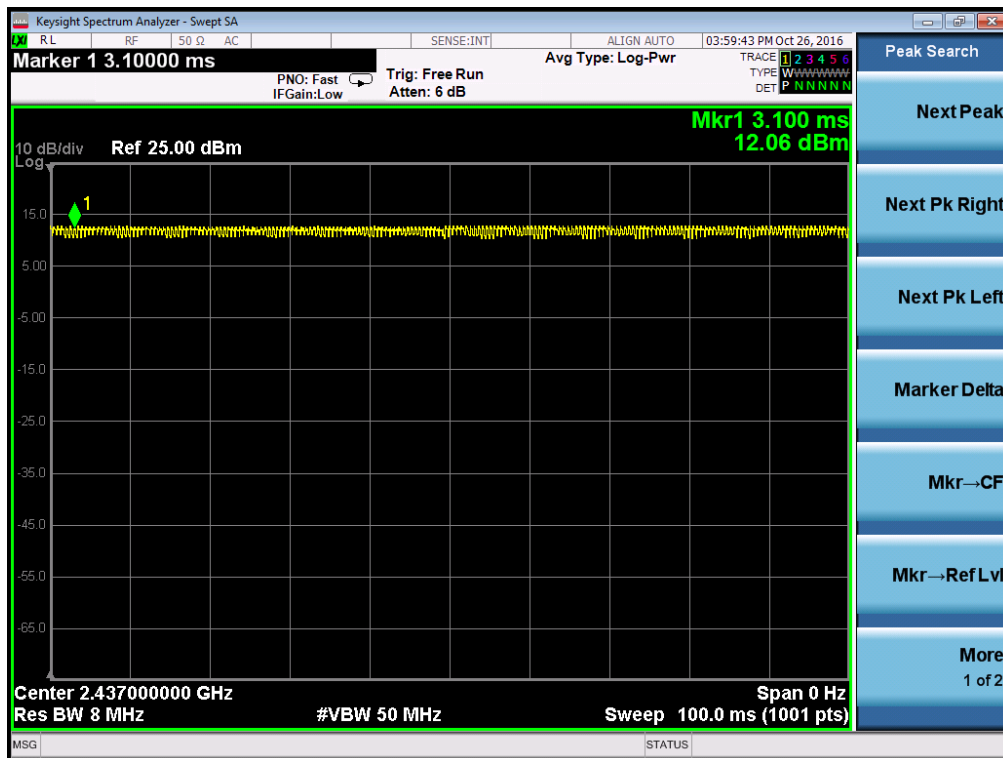

Test plot of Duty Cycle for 802.11n(HT20)

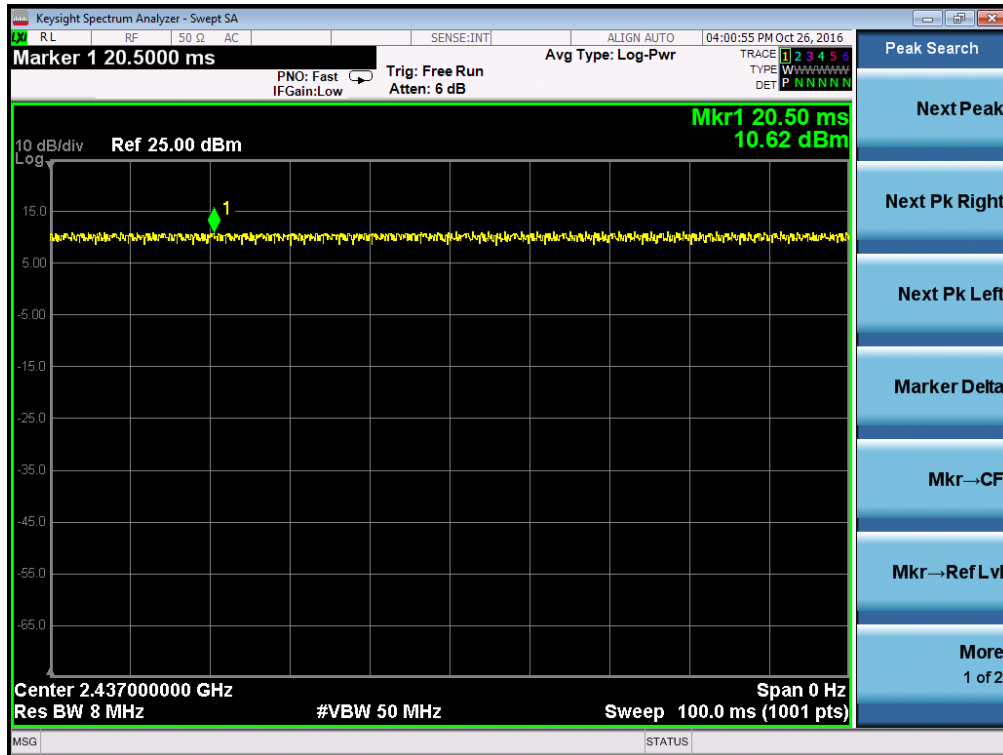

Test plot of Duty Cycle for 802.11n(HT40)

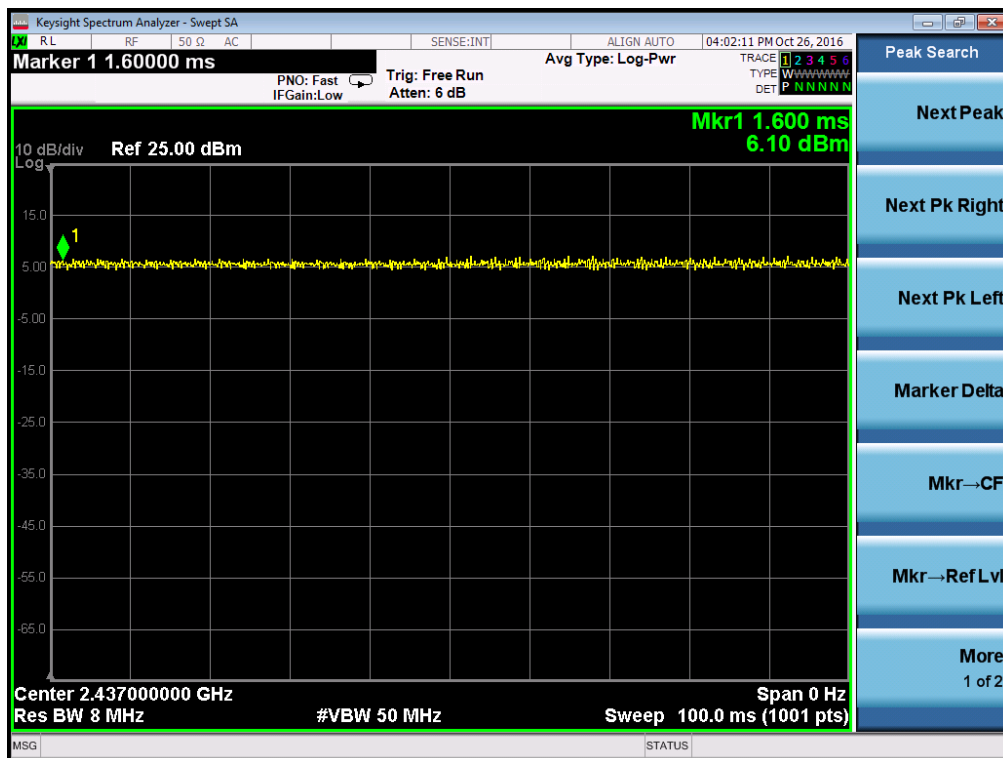


9. POWER SPECTRAL DENSITY TEST

9.1. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

9.2. Test setup


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW =3kHz.
4. Set the VBW ≥ 3 times RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.

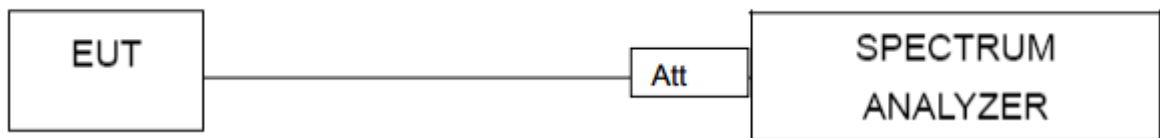


9.3. Test result

| | Channel Frequency (MHz) | Power density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|----------------|--------------------------------|---------------------------------|-------------------------|---------------|
| 802.11b | 2412 | -15.958 | 8 | Pass |
| | 2437 | -17.362 | 8 | Pass |
| | 2462 | -17.546 | 8 | Pass |
| 802.11g | 2412 | -17.155 | 8 | Pass |
| | 2437 | -17.319 | 8 | Pass |
| | 2462 | -19.154 | 8 | Pass |
| 802.11n (HT20) | 2412 | -19.460 | 8 | Pass |
| | 2437 | -20.122 | 8 | Pass |
| | 2462 | -21.349 | 8 | Pass |
| 802.11n (HT40) | 2422 | -25.284 | 8 | Pass |
| | 2437 | -24.597 | 8 | Pass |
| | 2452 | -25.833 | 8 | Pass |


802.11b 2412MHz

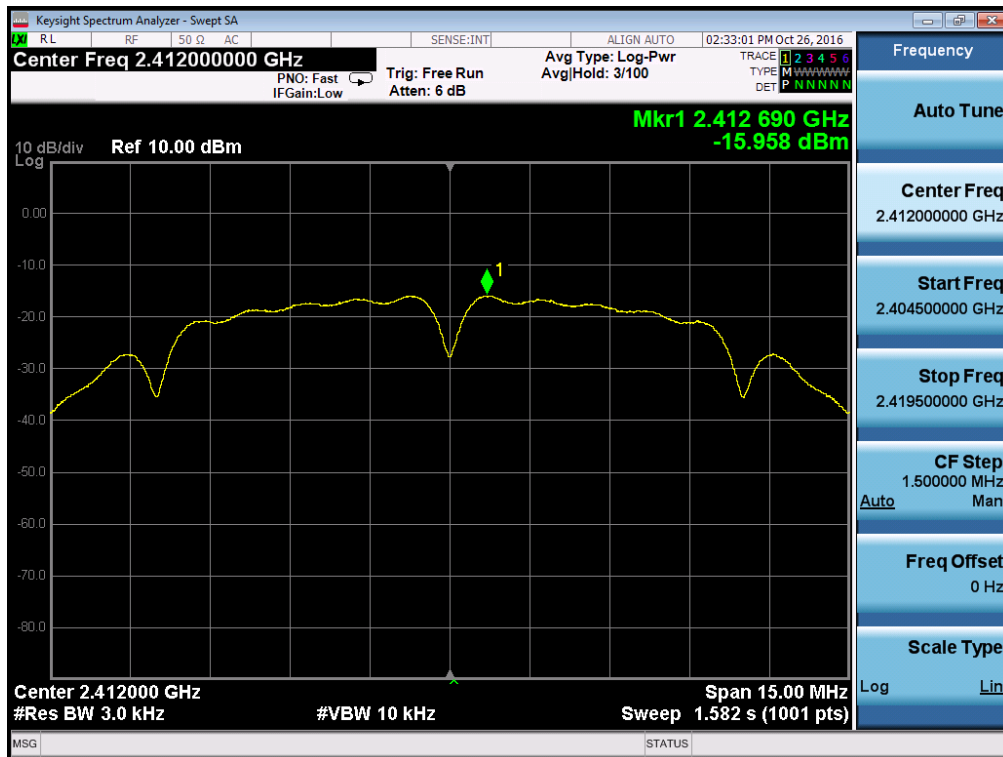


802.11b 2437MHz

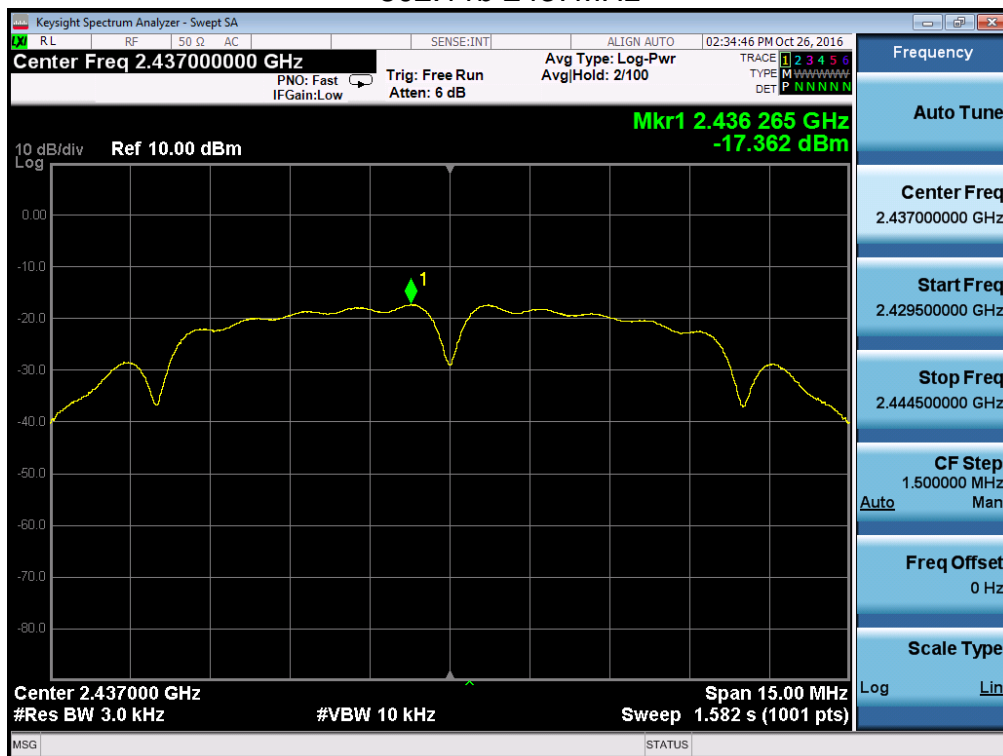


802.11b 2462MHz

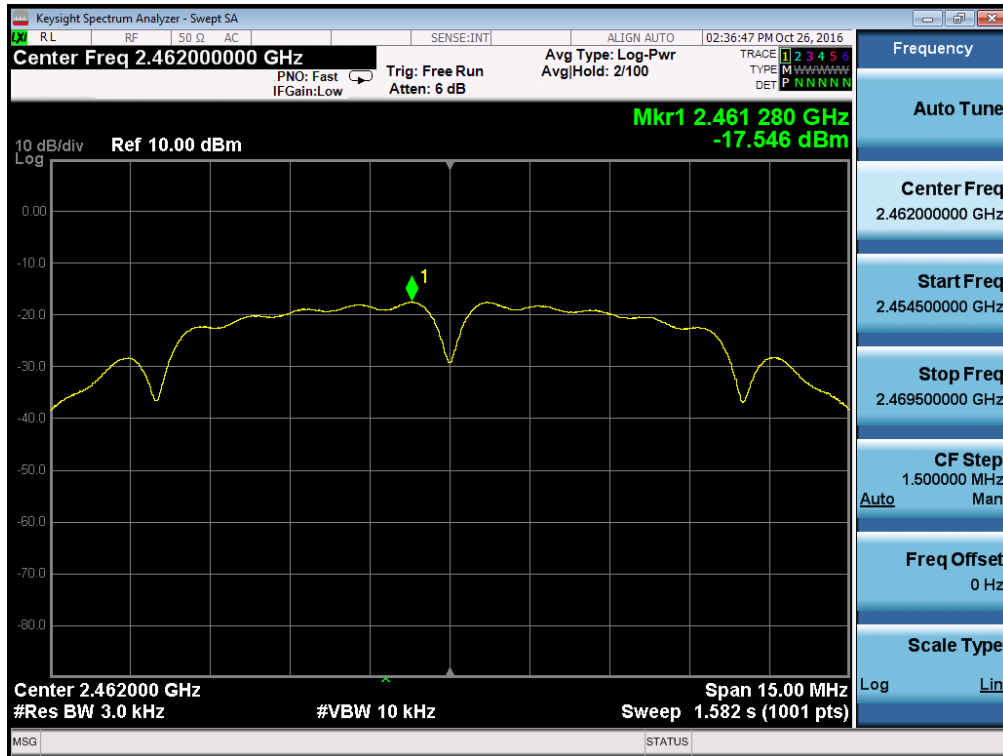


802.11g 2412MHz

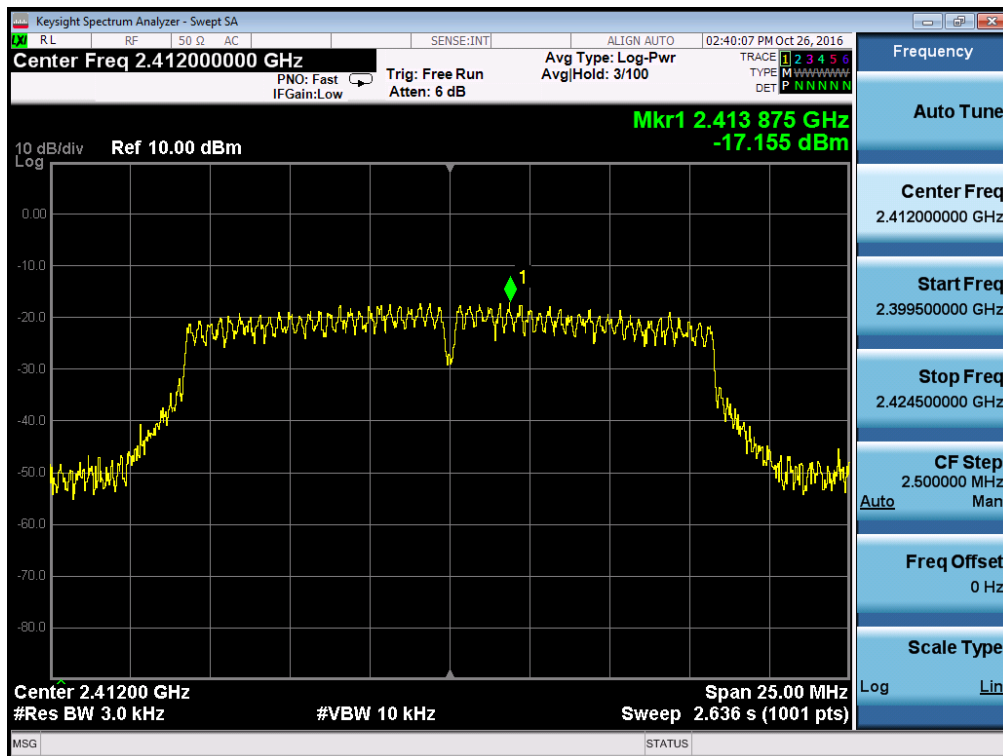


802.11g 2437MHz

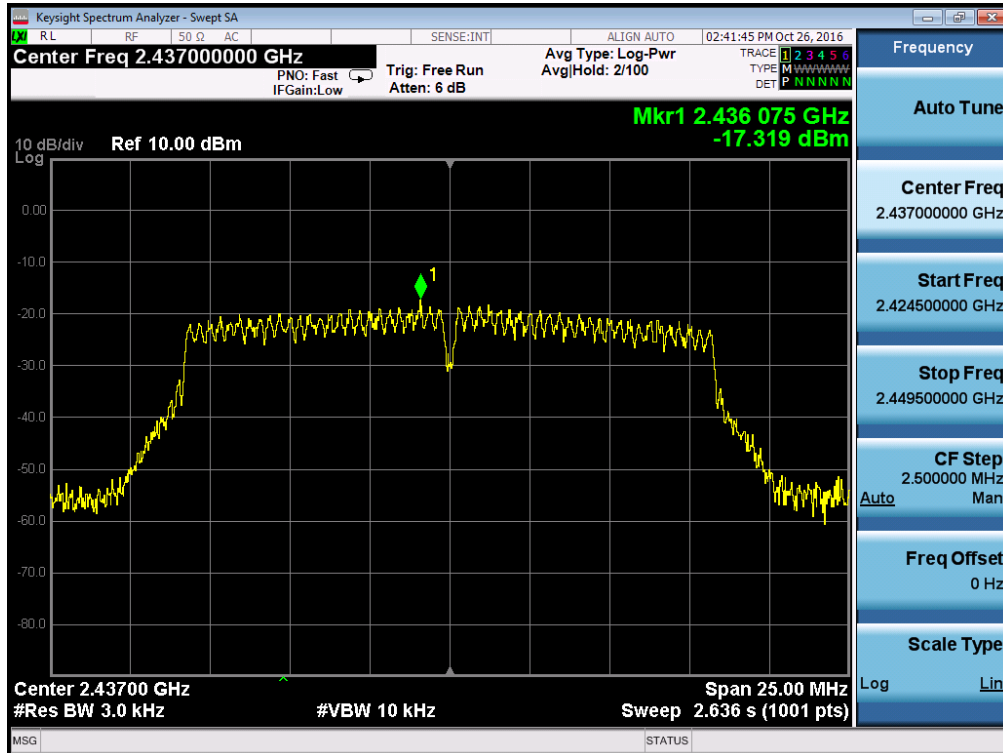


802.11g 2462MHz

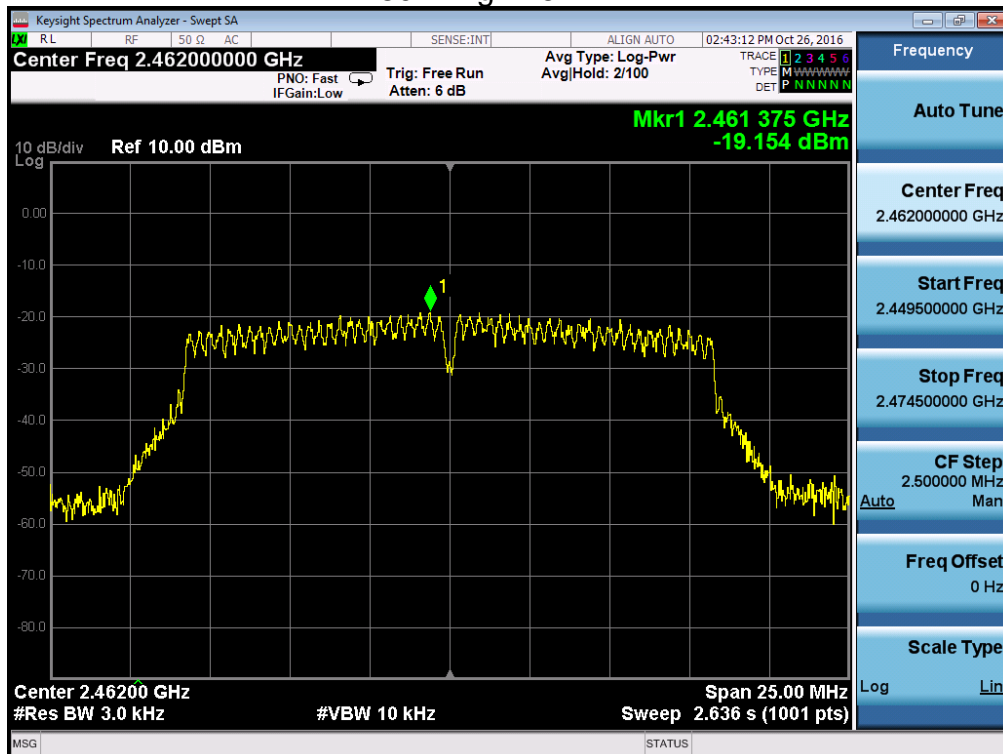


802.11n (HT20) 2412MHz

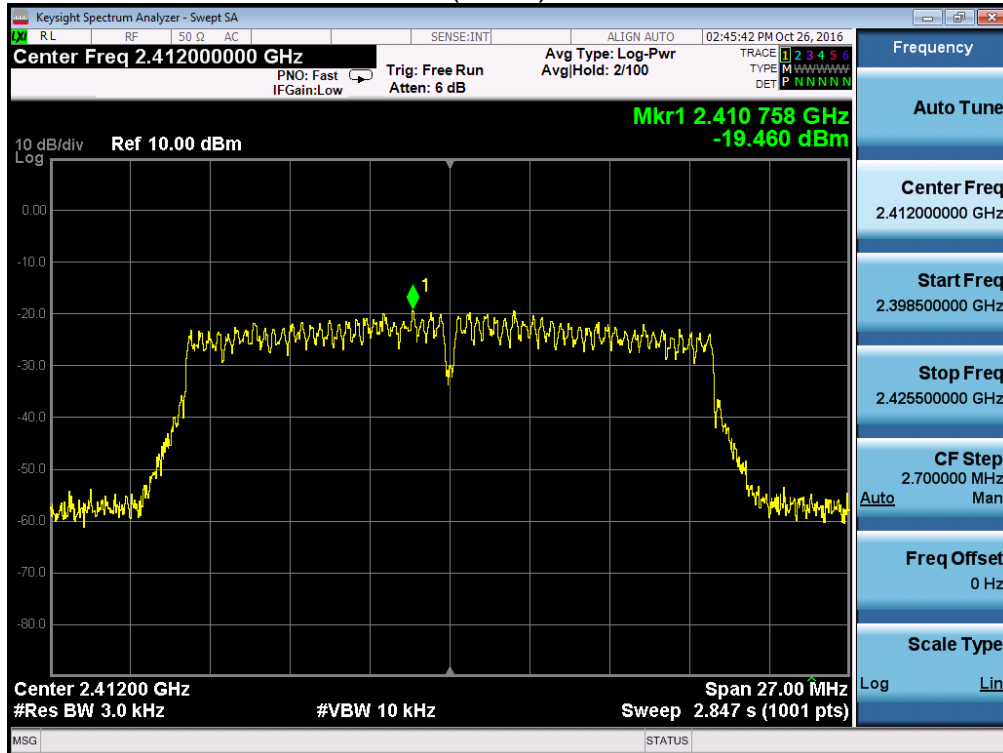


802.11n (HT20) 2437MHz

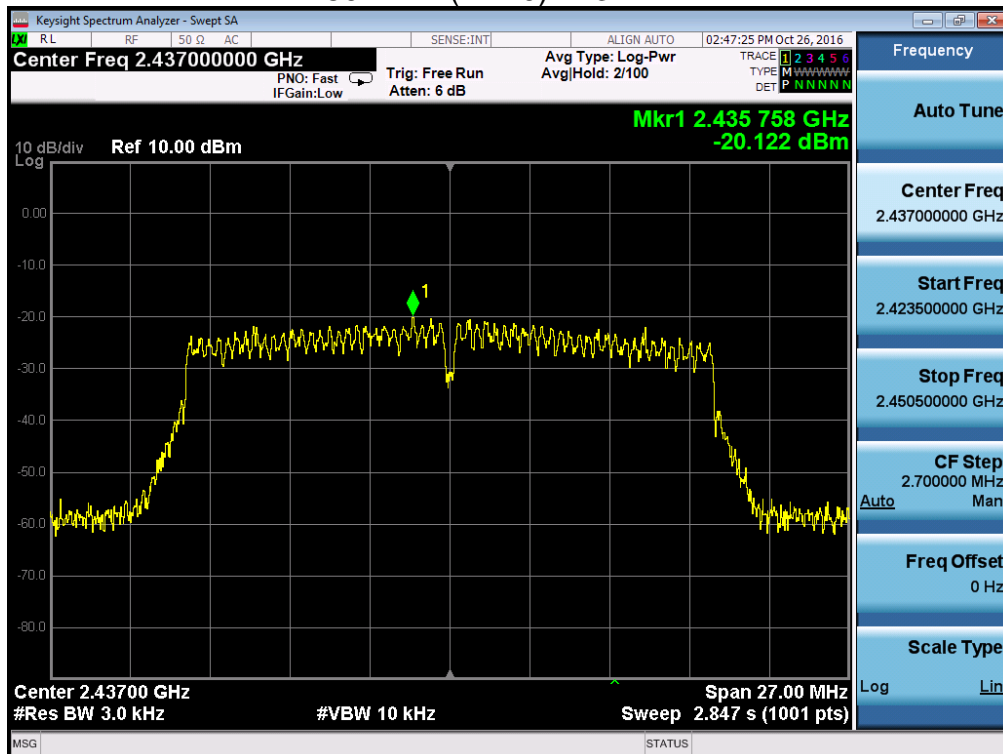


802.11n(HT20) 2462MHz

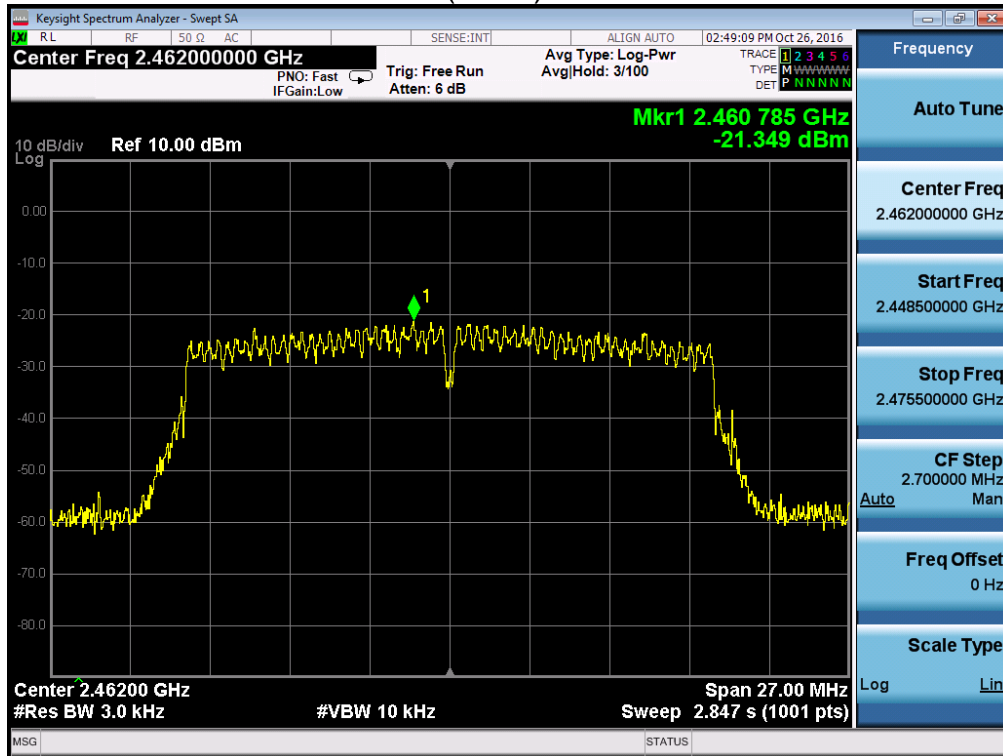


802.11 n (HT40) 2422MHz

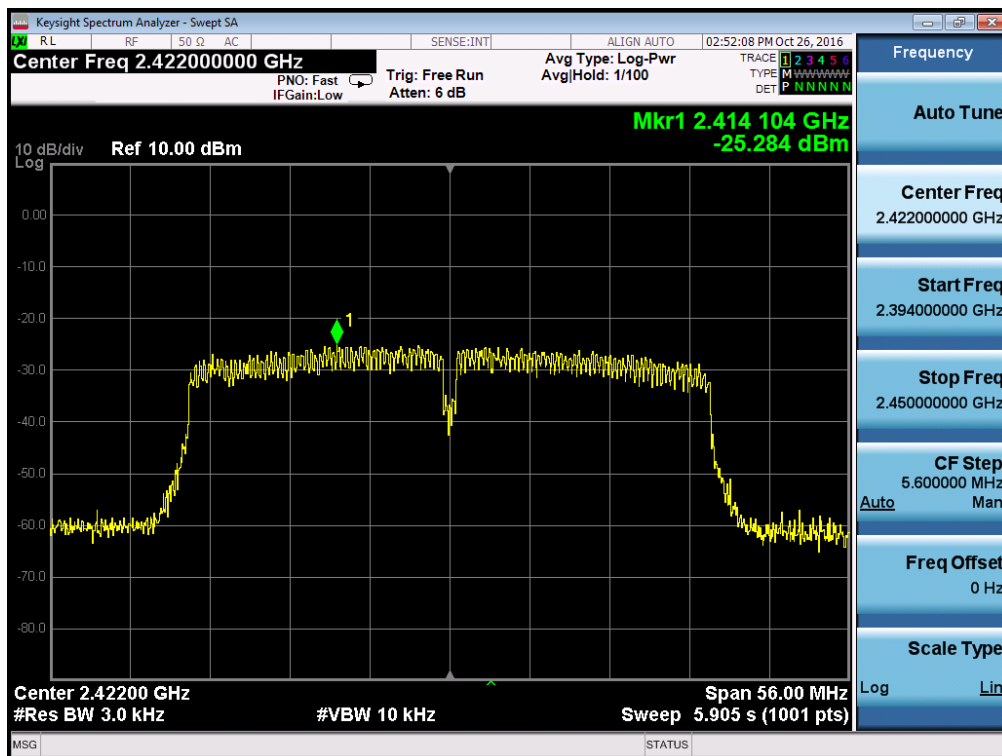

802.11 n (HT40) 2437MHz

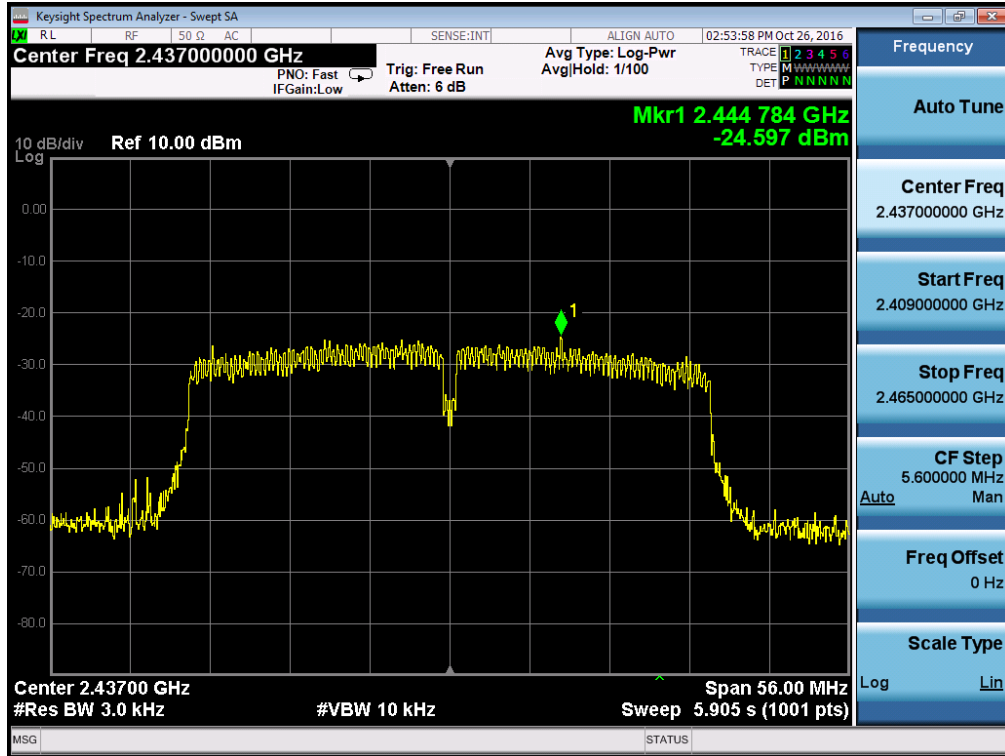

802.11 n (HT40) 2452MHz

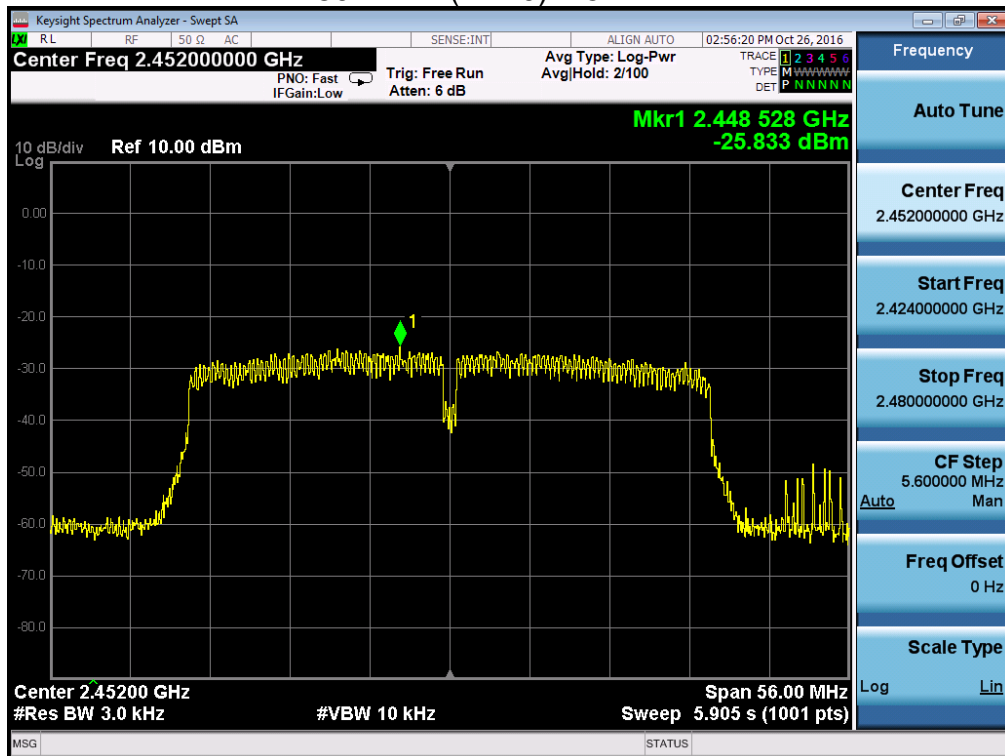

10. ANTENNA REQUIREMENTS

10.1. Limits

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Result

The antennas used for this product is FPCB antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

11. PHOTOGRAPHS OF TEST SET-UP


Conducted Emission



Radiated Emission Test






12. PHOTOGRAPHS OF THE EUT

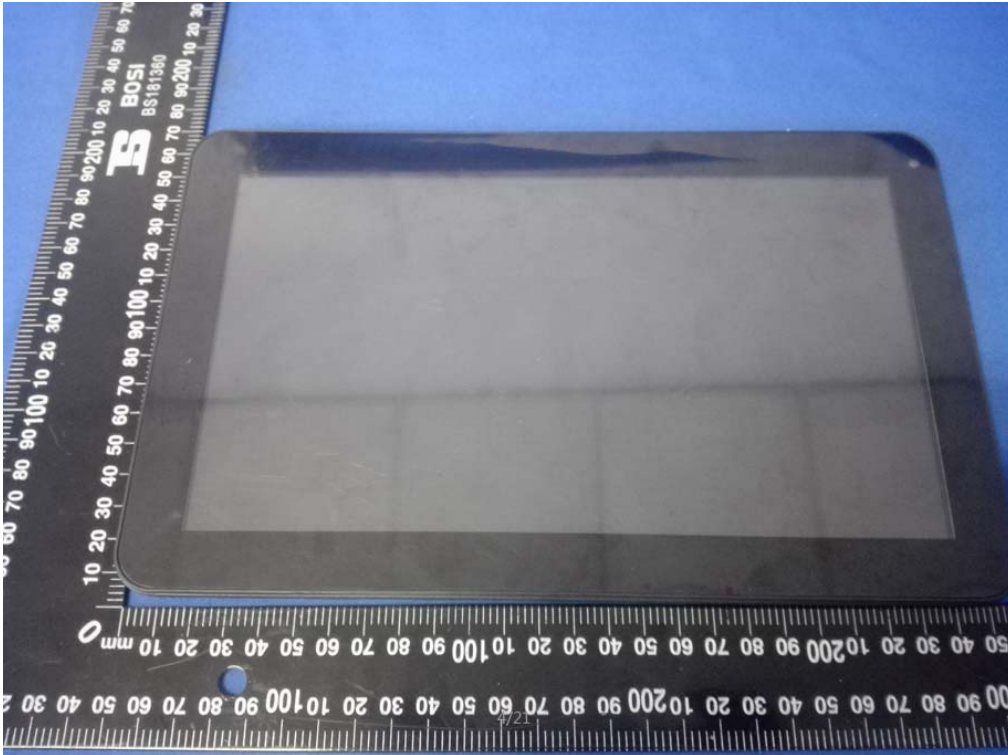






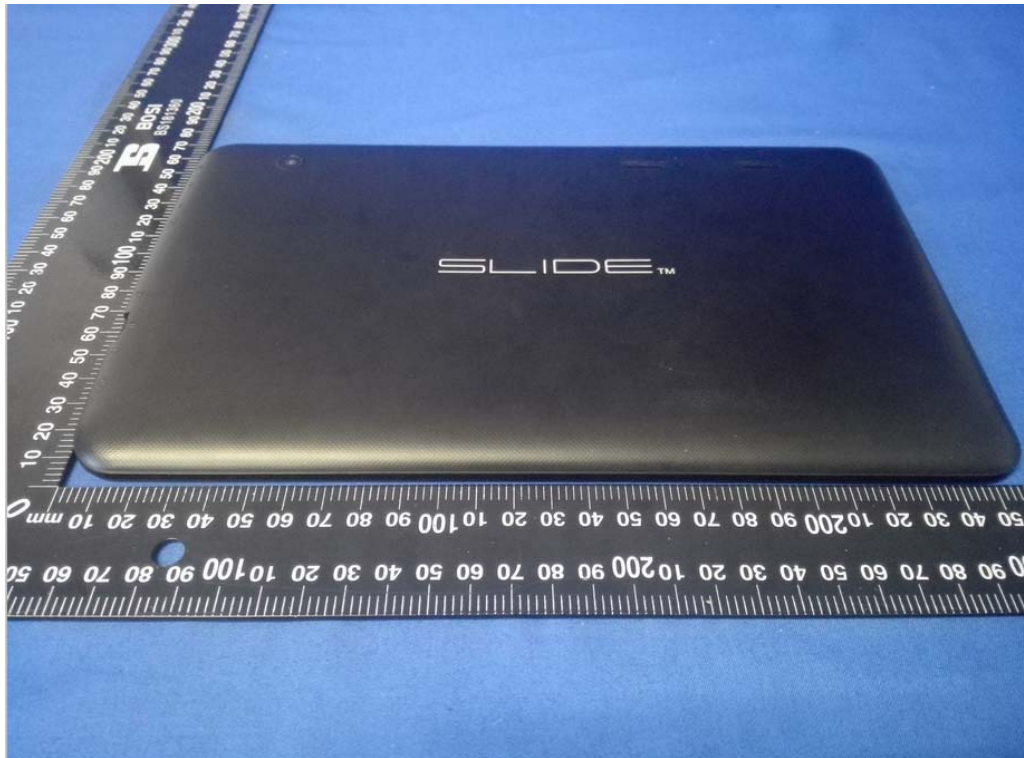

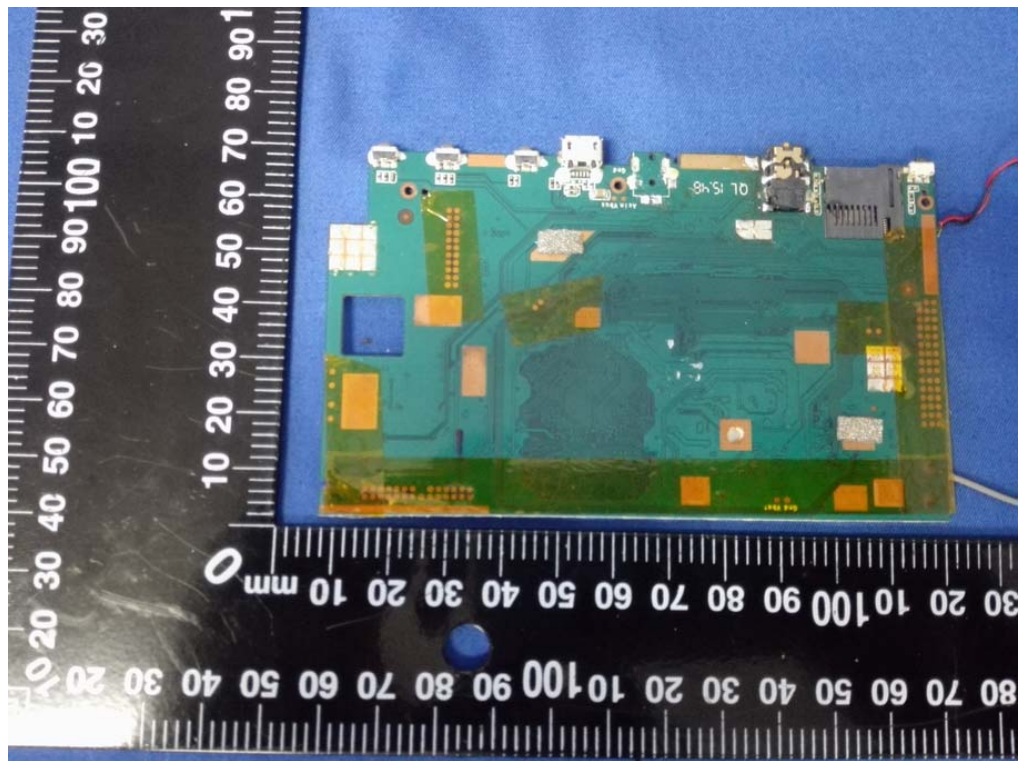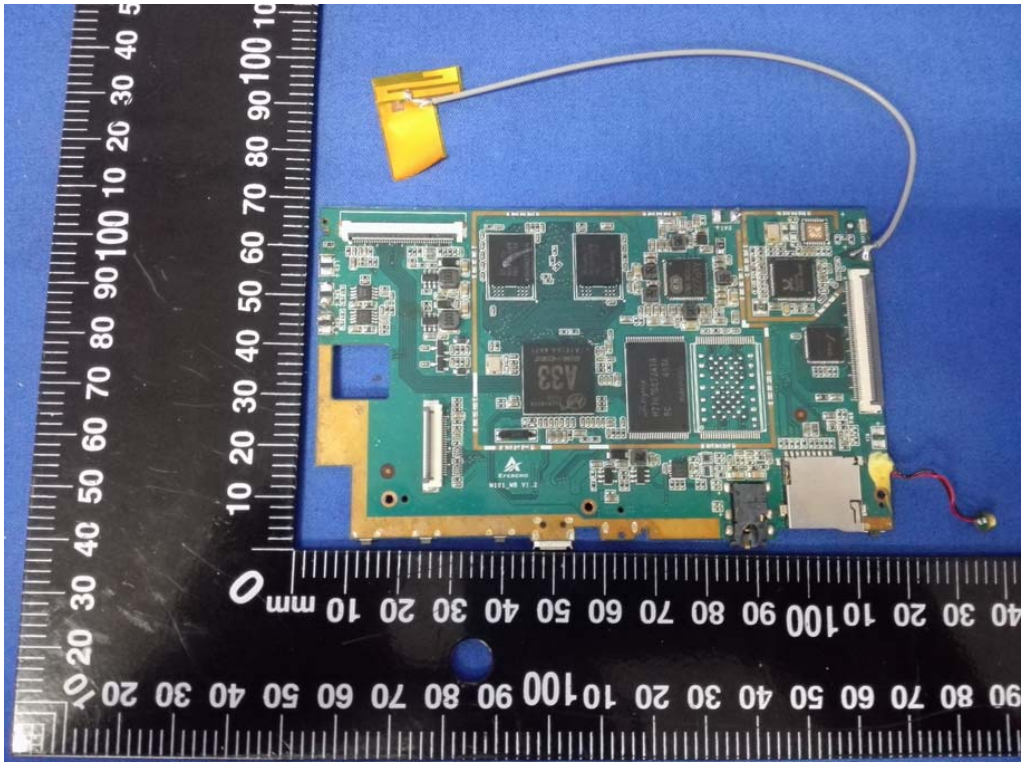

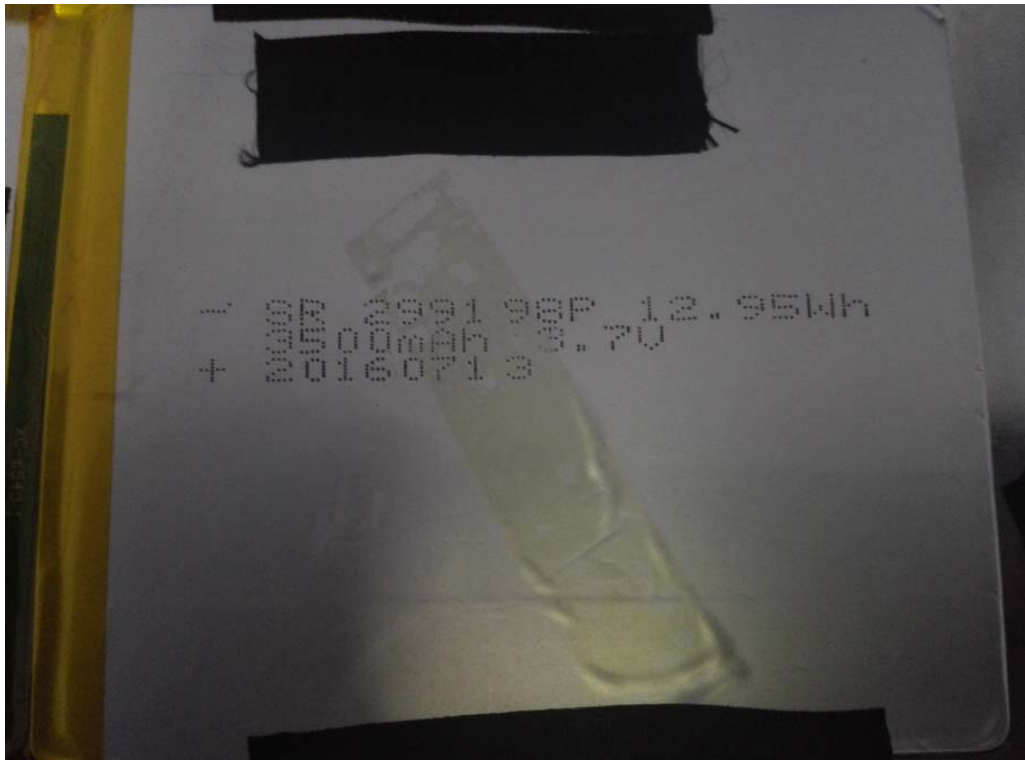

-----END-----