



Test Mode: 802.11a


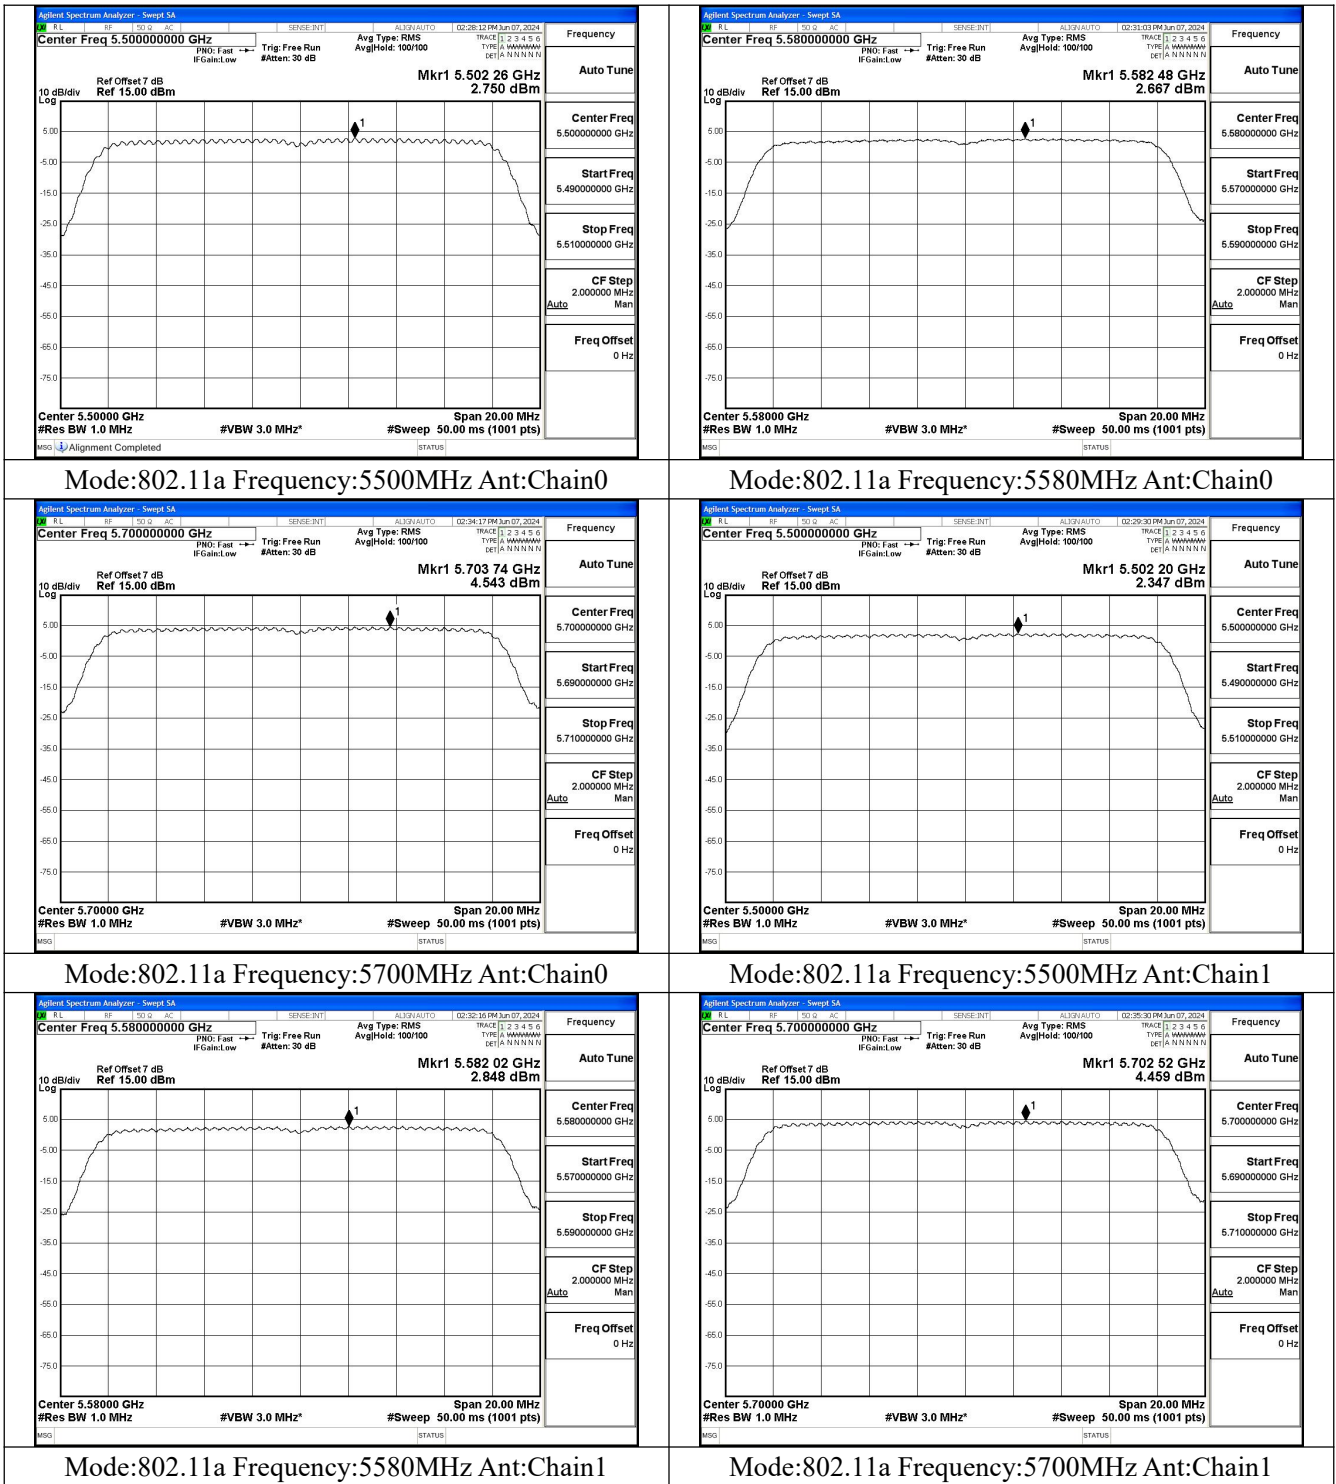


Test Mode: 802.11n HT20

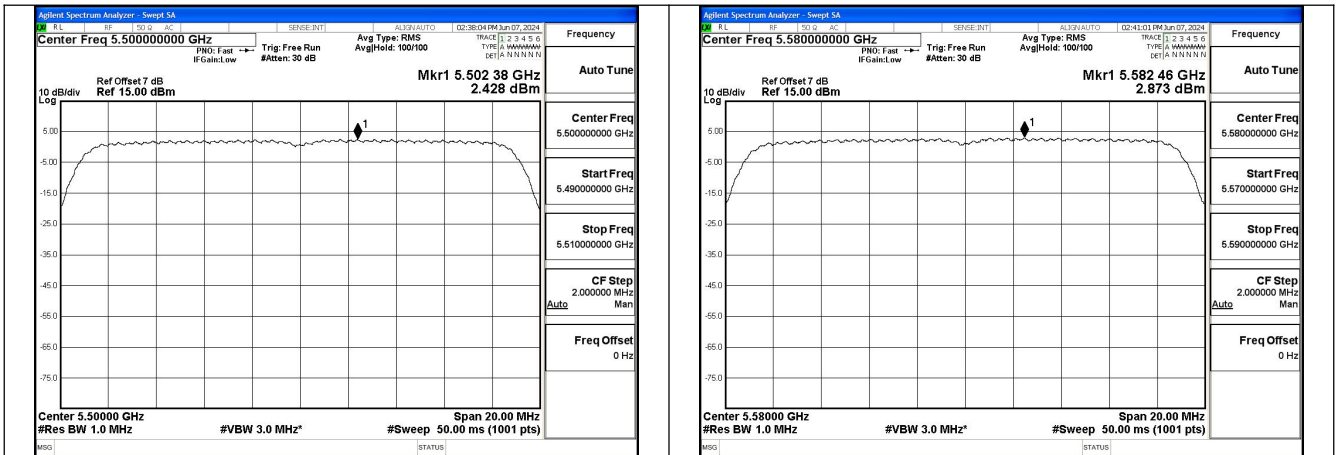



Mode:802.11n HT20 Frequency:5500MHz Ant:Chain0

Mode:802.11n HT20 Frequency:5580MHz Ant:Chain0

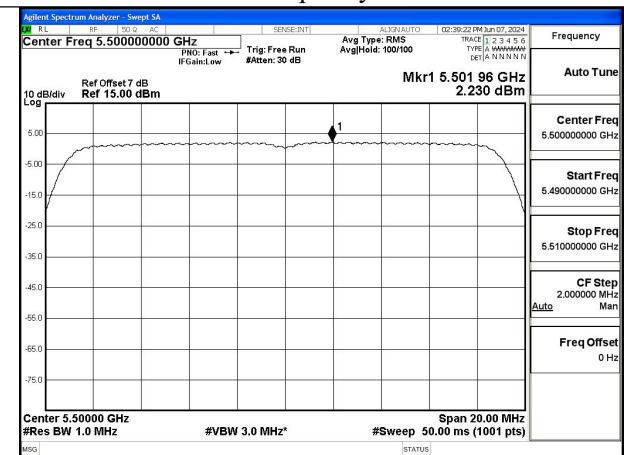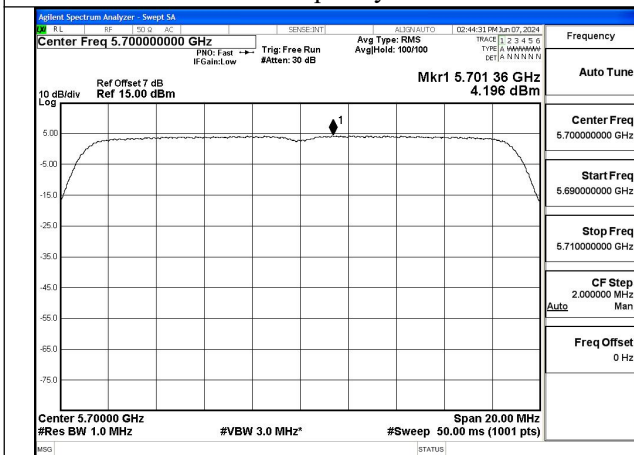

Mode:802.11n HT20 Frequency:5700MHz Ant:Chain0


Mode:802.11n HT20 Frequency:5500MHz Ant:Chain1

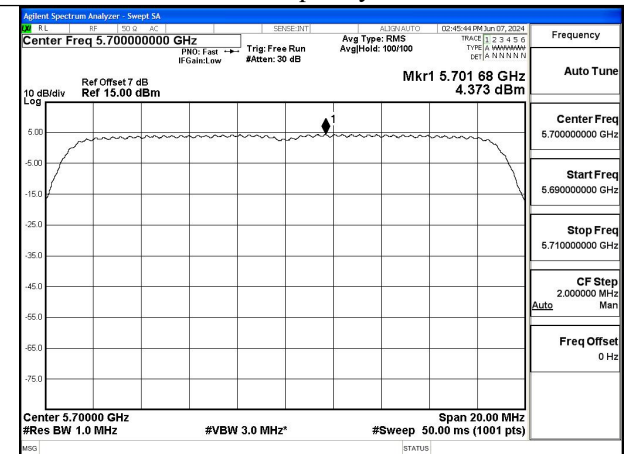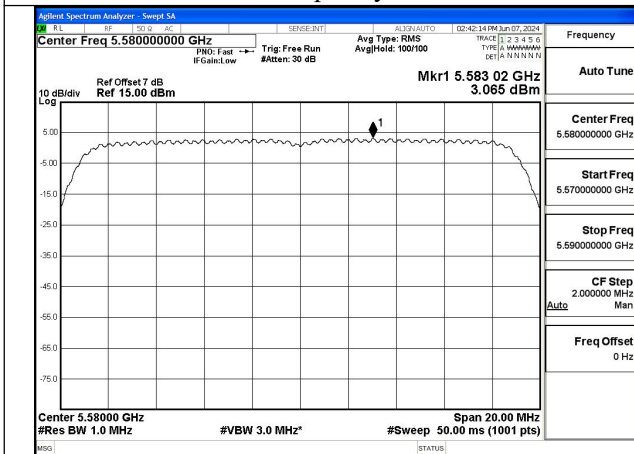


Mode:802.11n HT20 Frequency:5580MHz Ant:Chain1

Mode:802.11n HT20 Frequency:5700MHz Ant:Chain1


Test Mode: 802.11ac VHT20

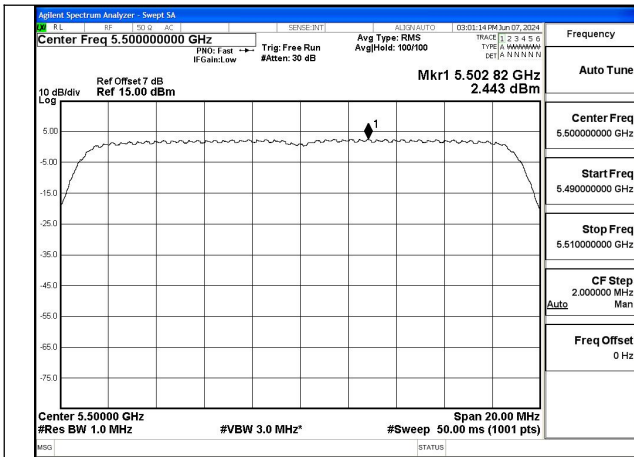


Mode:802.11ac VHT20 Frequency:5500MHz
Ant:Chain0

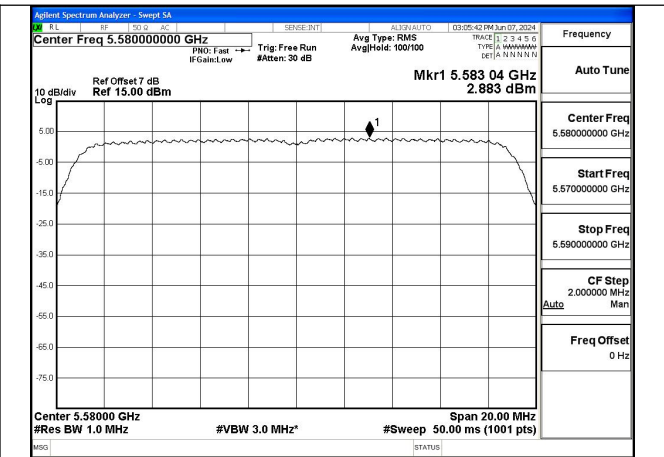


Mode:802.11ac VHT20 Frequency:5580MHz
Ant:Chain0

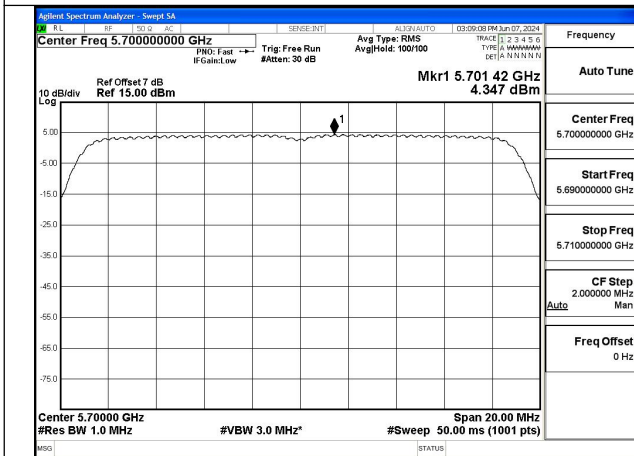


Mode:802.11ac VHT20 Frequency:5700MHz
Ant:Chain0

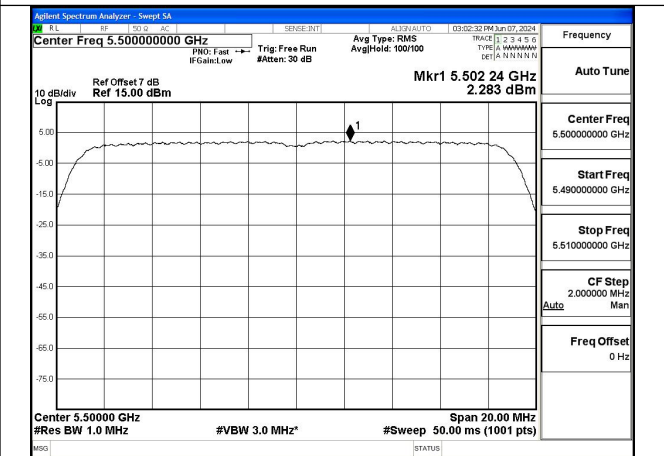

Mode:802.11ac VHT20 Frequency:5500MHz
Ant:Chain1

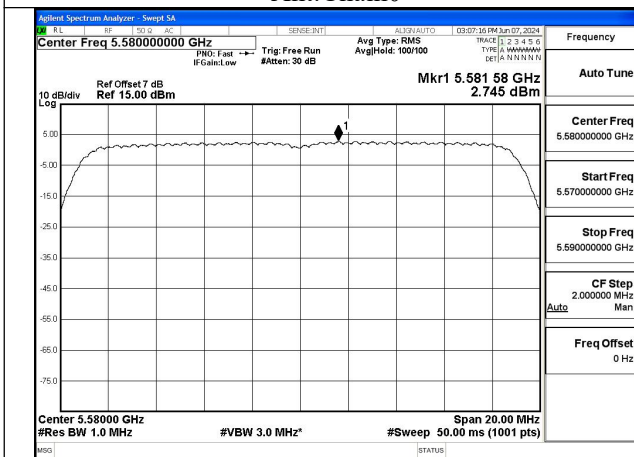


Mode:802.11ac VHT20 Frequency:5580MHz
Ant:Chain1

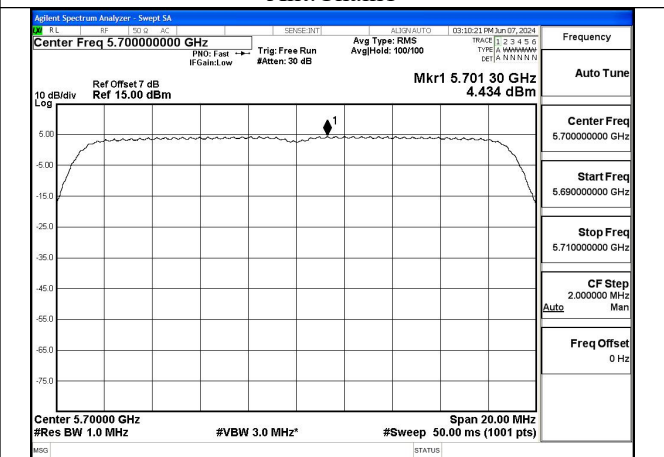


Mode:802.11ac VHT20 Frequency:5700MHz
Ant:Chain1


Test Mode: 802.11n HT40

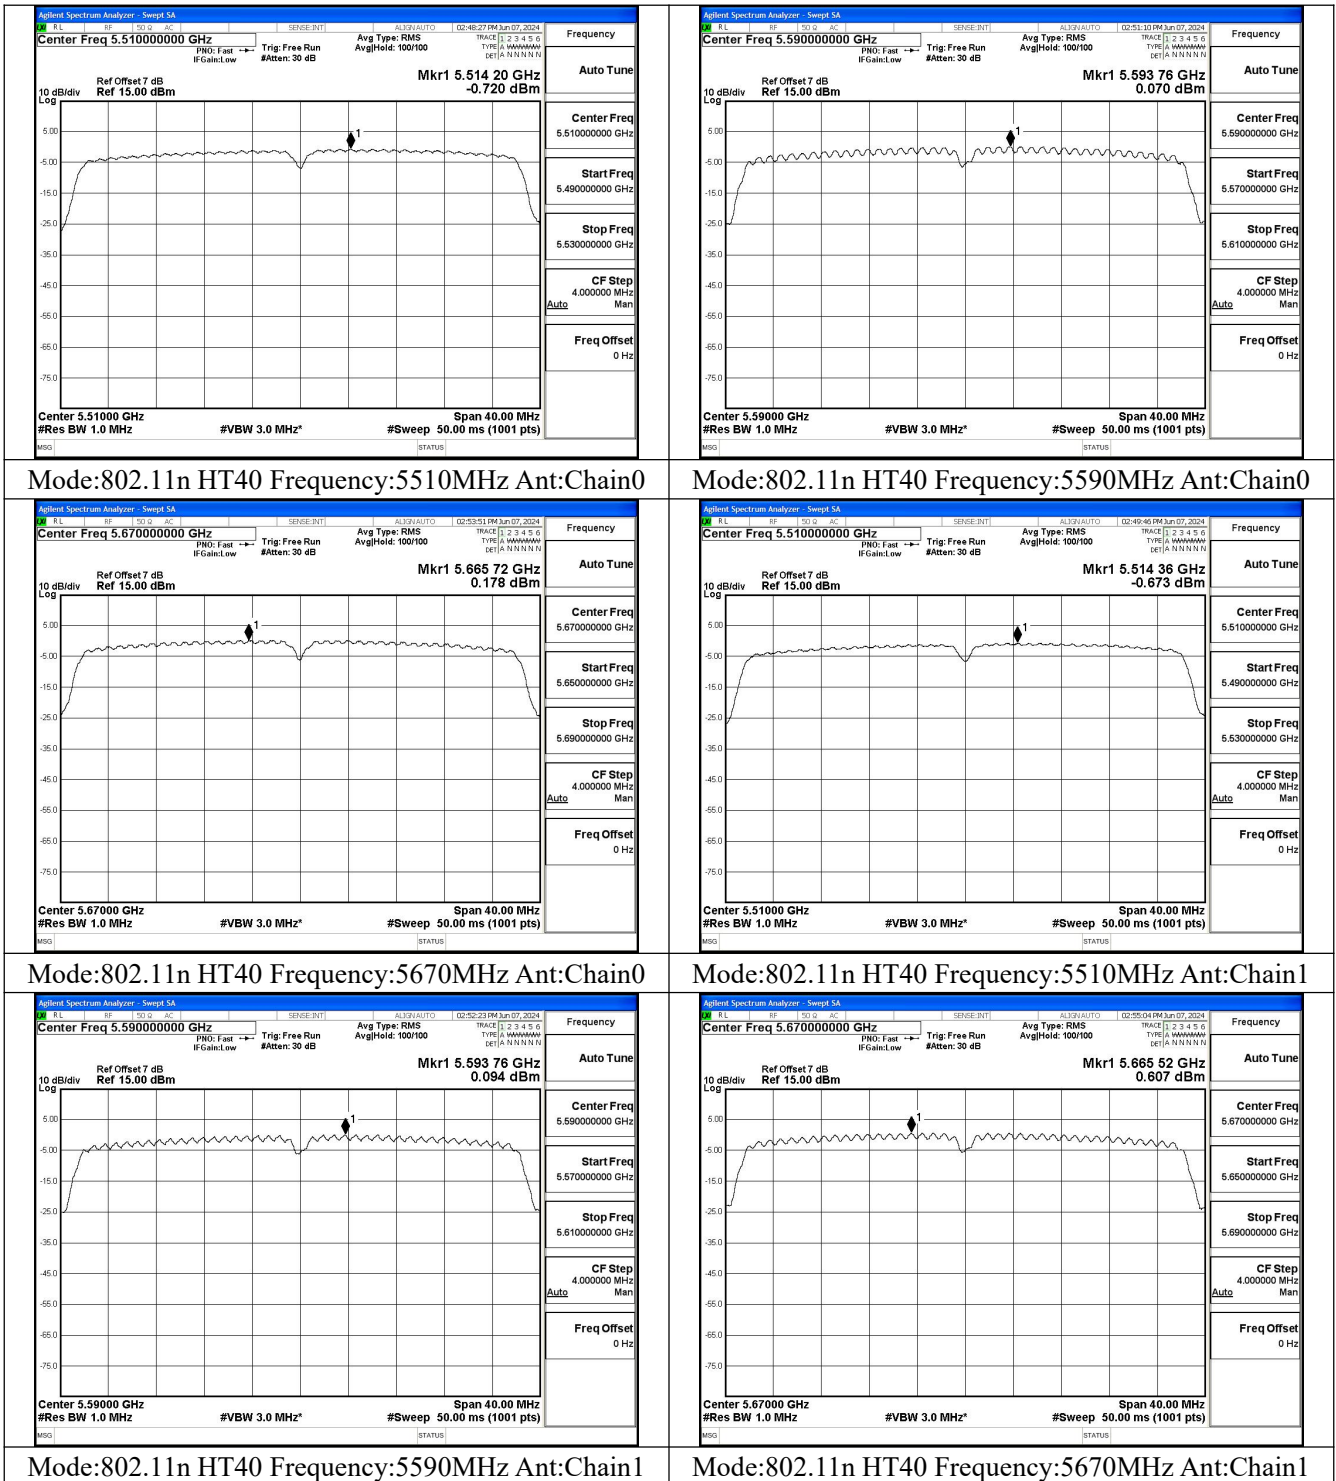

Test Mode: 802.11ac VHT40

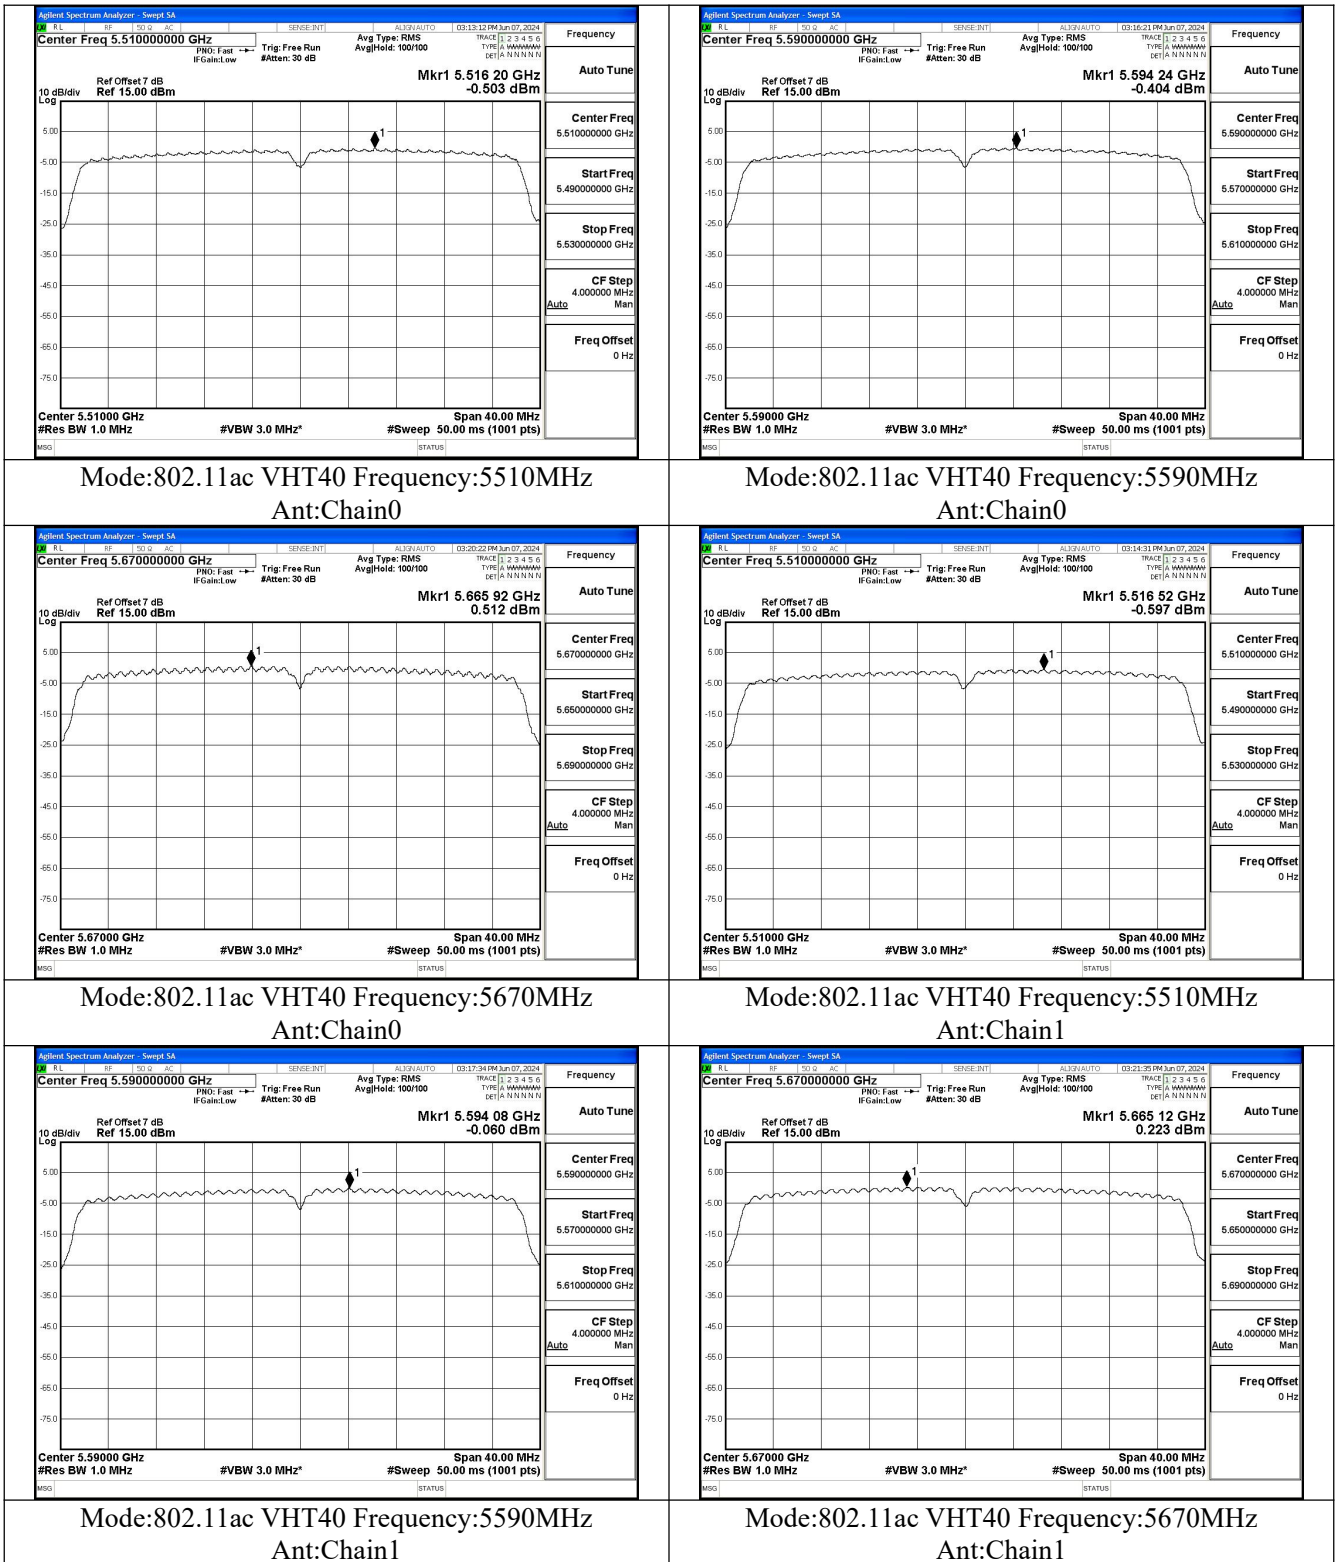

Test Mode: 802.11ac VHT80

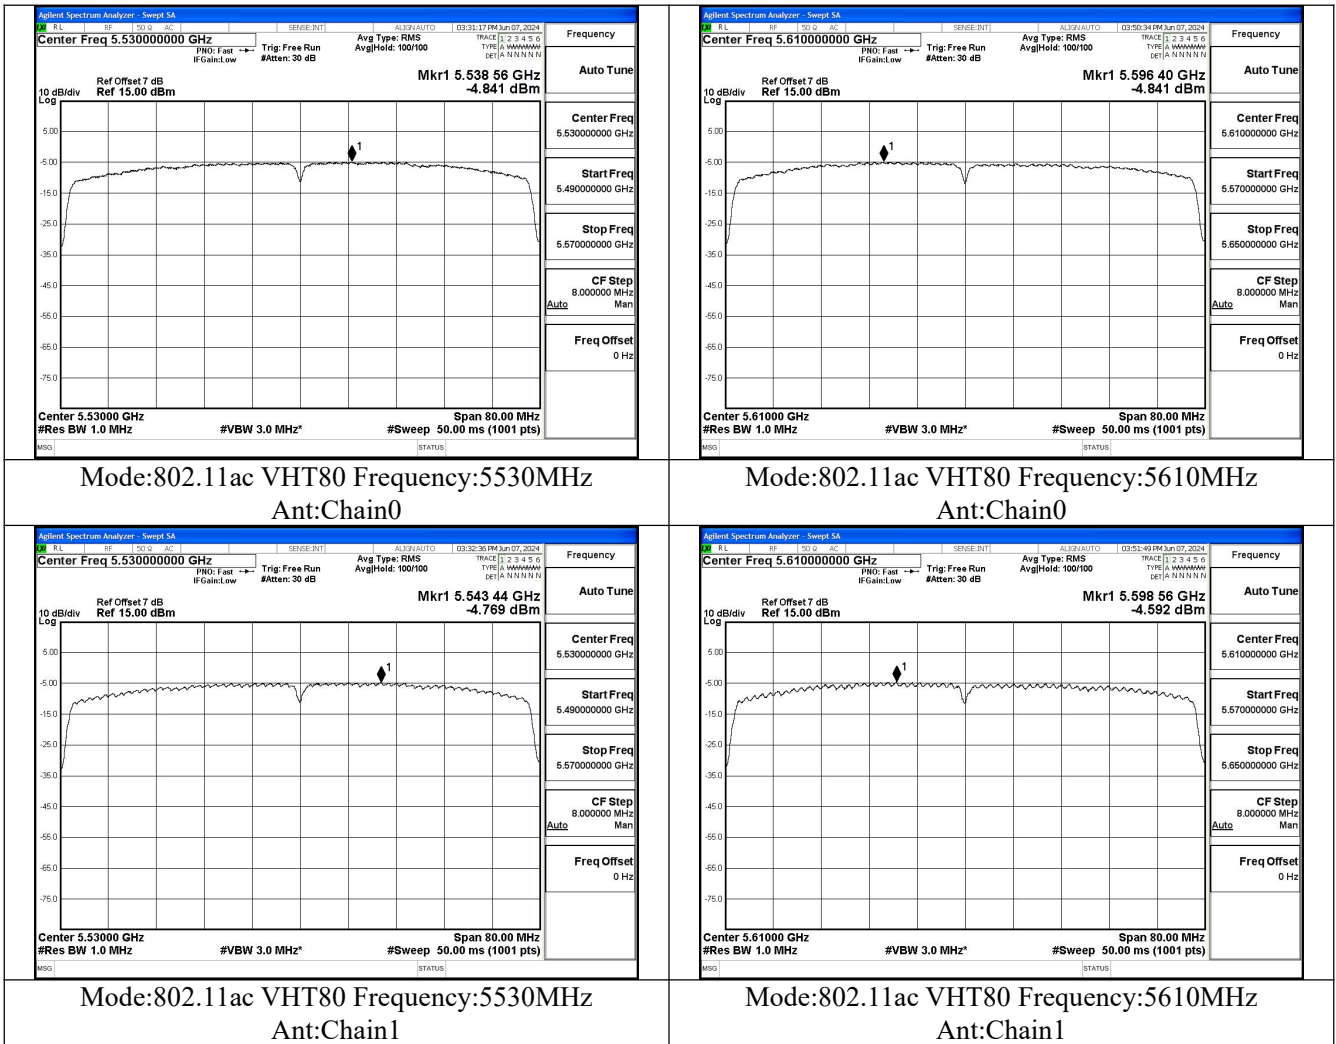


**Dynamic Frequency Selection
DESCRIPTION OF Master Device**

The Master Device is Qingdao Intelligent & Precise Electronics Co., Ltd., The rated output power of the Master unit is > 23dBm (EIRP). Therefore the required interference threshold level is -64dBm

Radar Waveform Calibration Result

<20MHz / 5320 MHz> Radar Type 0


Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

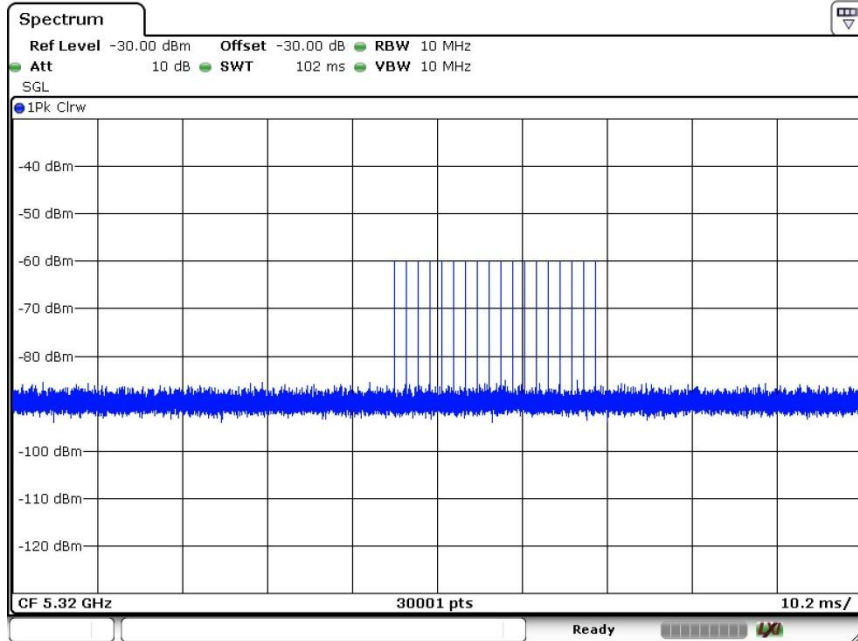

Date: 21.JUN.2024 19:16:59


<80MHz / 5530 MHz> Radar Type 0

Radar / DFS detection threshold level and the burst of pulses on the Channel frequency

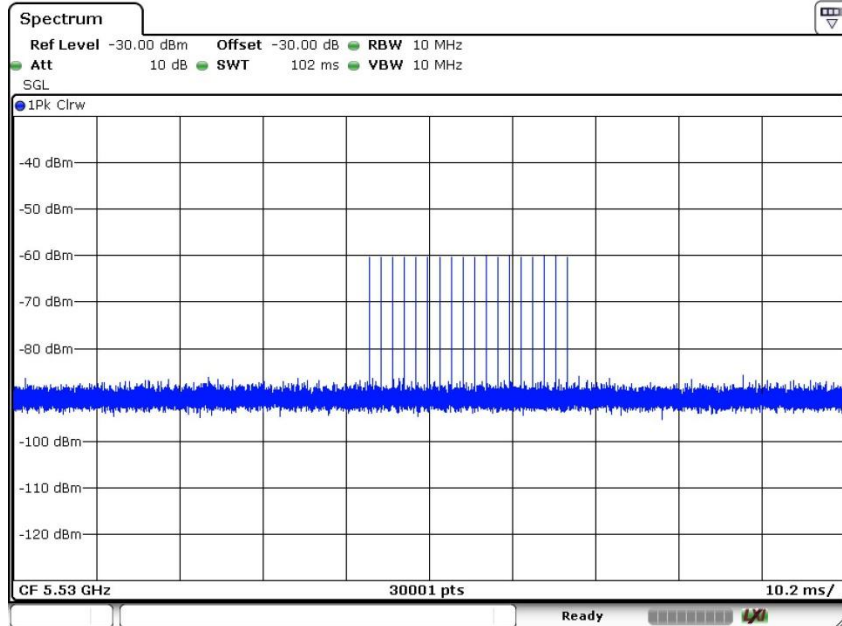

Date: 21.JUN.2024 19:15:08

Data Traffic and Noise Floor Plots


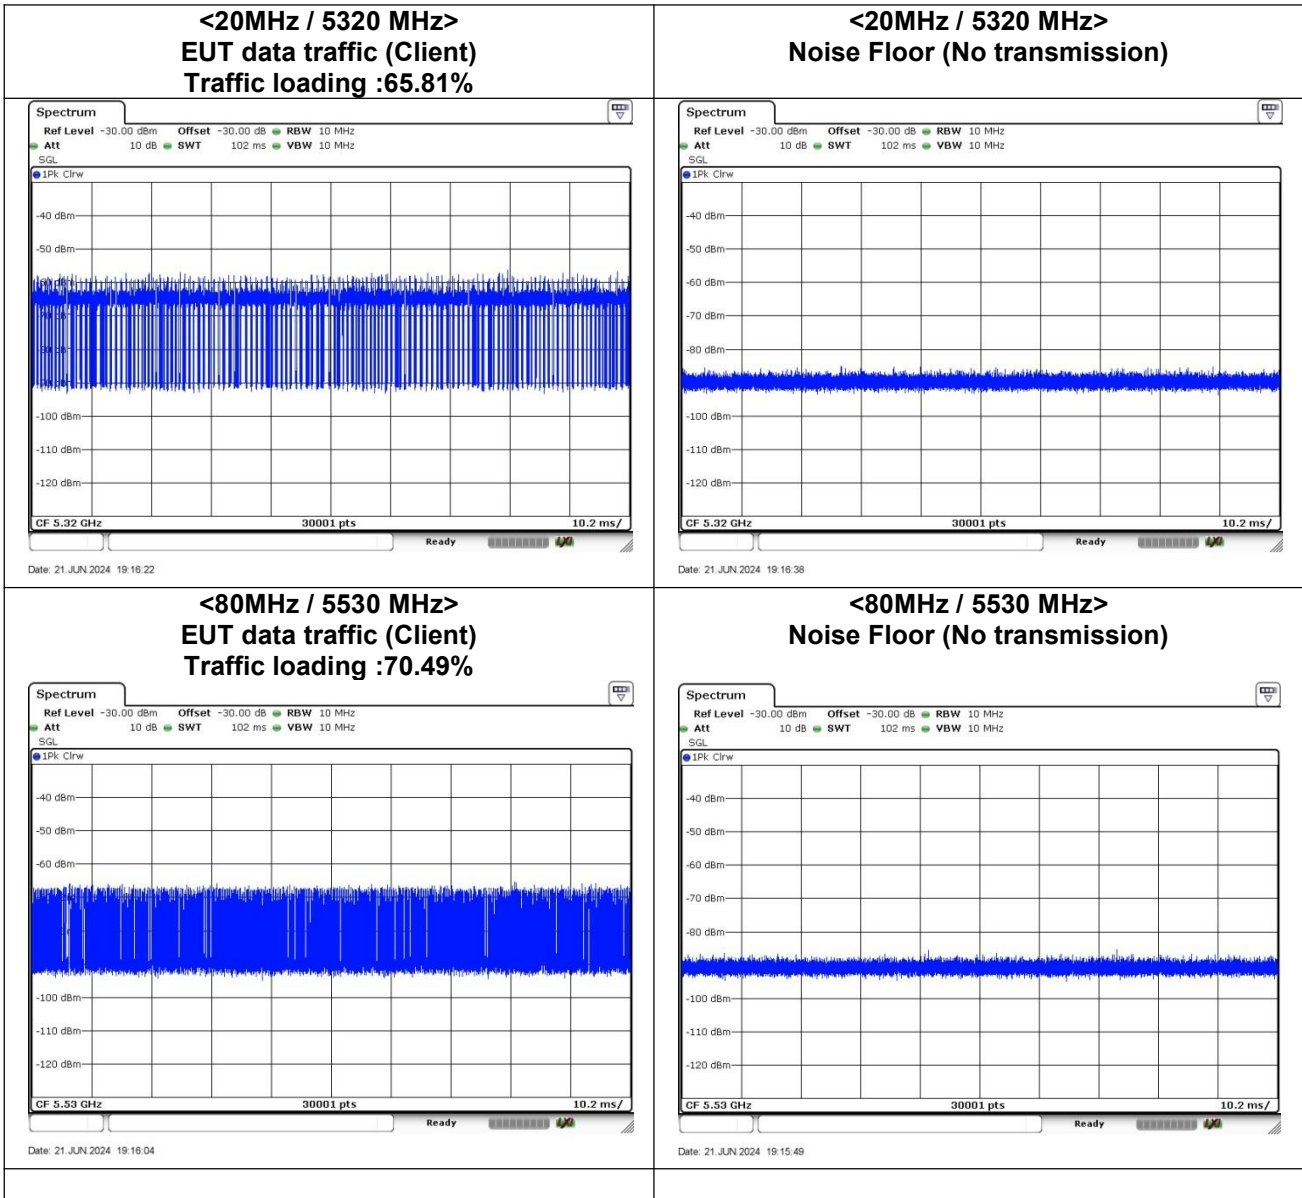


Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test

Frequency	Test Item	Test Result	Limit	Pass/Fail
5320MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	200.0ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass
5530MHz	Channel Move Time	< 10s*	< 10s	Pass
	Channel Closing Transmission Time	200.8ms	< 260ms	Pass
	Non-Occupancy Period	≥ 30	≥ 30 min	Pass

Note*: We notice clearly that “Channel Move Time” is less than 10s from the figure. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period for Client Beacon Test Plots

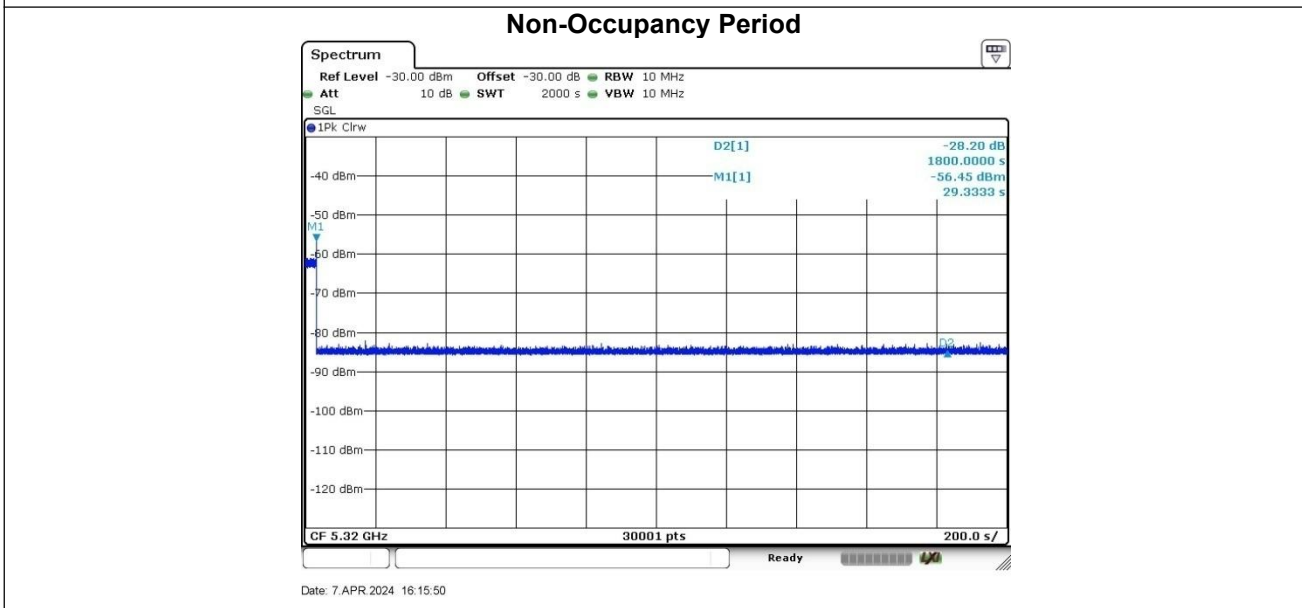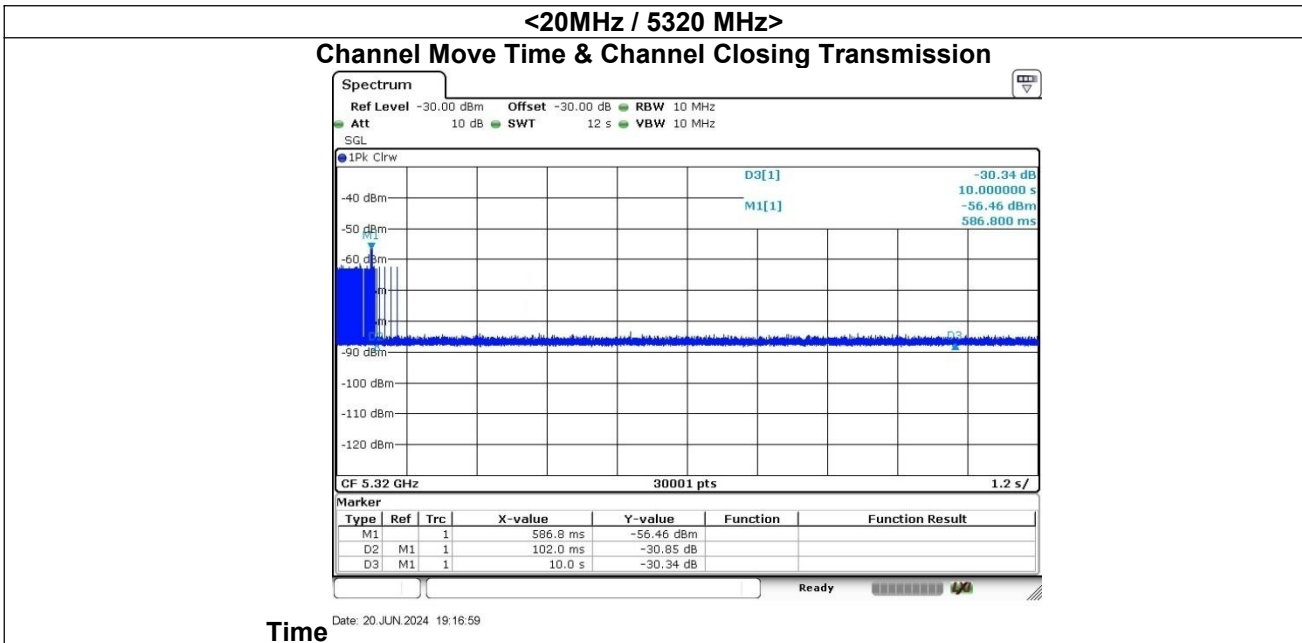


Note:

Dwell (0.4 ms) = Sweep Time (12000 ms) / Sweep Point Bins (30000)
Channel Closing Transmission Time (200 ms) = 200 + Number of beacon after 200ms(0) X Dwell (0.4 ms) < 260ms


<80MHz / 5530 MHz>

Channel Move Time & Channel Closing Transmission Time

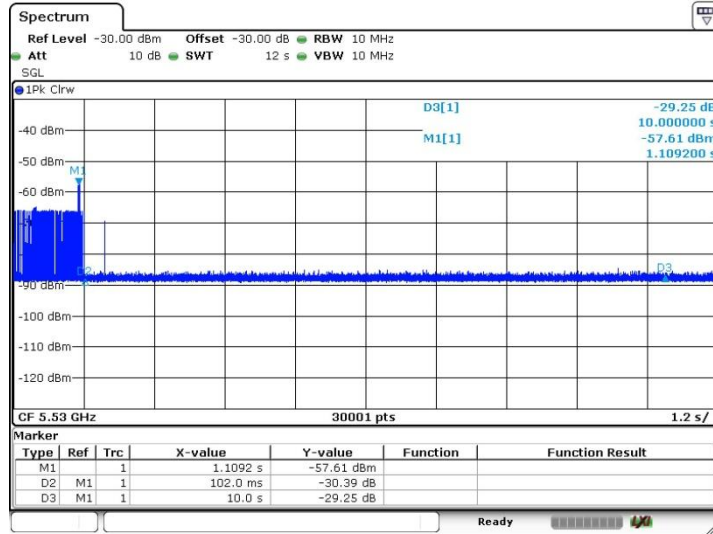

Date: 9 APR 2024 17:36:36

Non-Occupancy Period

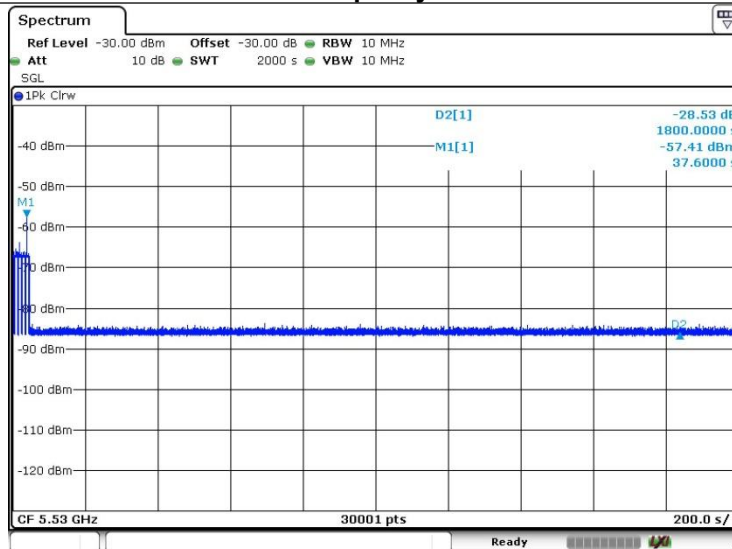

Date: 7 APR 2024 21:02:36

Note:

Dwell (0.4 ms) = Sweep Time (12000 ms) / Sweep Point Bins (30000)

Channel Closing Transmission Time (200 + 0.8 ms) = 200 + Number of beacon after 200ms(2) X Dwell (0.4 ms) < 260ms