


Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

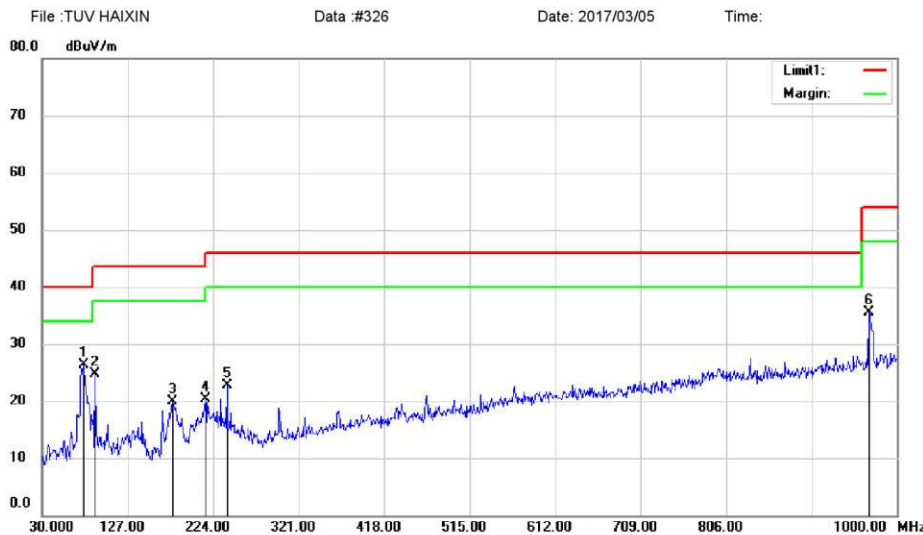

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11nHT20 5260(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	76.5600	46.56	-20.32	26.24	40.00	-13.76	QP		
2		90.1400	41.12	-16.41	24.71	43.50	-18.79	QP		
3		177.4400	37.05	-17.20	19.85	43.50	-23.65	QP		
4		215.2700	35.22	-14.92	20.30	43.50	-23.20	QP		
5		239.5200	36.72	-14.09	22.63	46.00	-23.37	QP		
6		967.9900	35.67	-0.20	35.47	54.00	-18.53	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

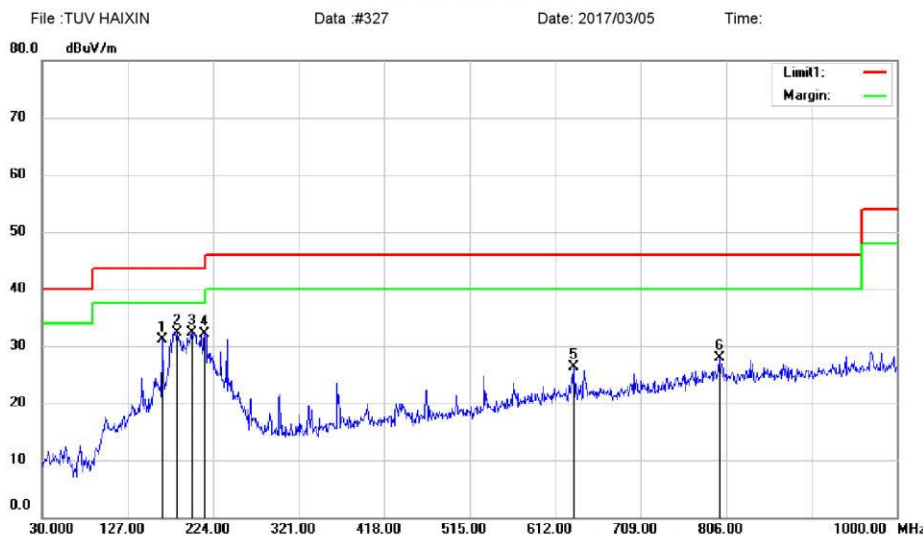

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11nHT20 5240(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		166.7700	49.46	-18.31	31.15	43.50	-12.35			QP	
2		183.2600	52.15	-19.84	32.31	43.50	-11.19			QP	
3	*	199.7500	48.55	-16.21	32.34	43.50	-11.16			QP	
4		214.3000	47.16	-15.01	32.15	43.50	-11.35			QP	
5		633.3400	30.92	-4.69	26.23	46.00	-19.77			QP	
6		798.2400	29.87	-2.05	27.82	46.00	-18.18			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

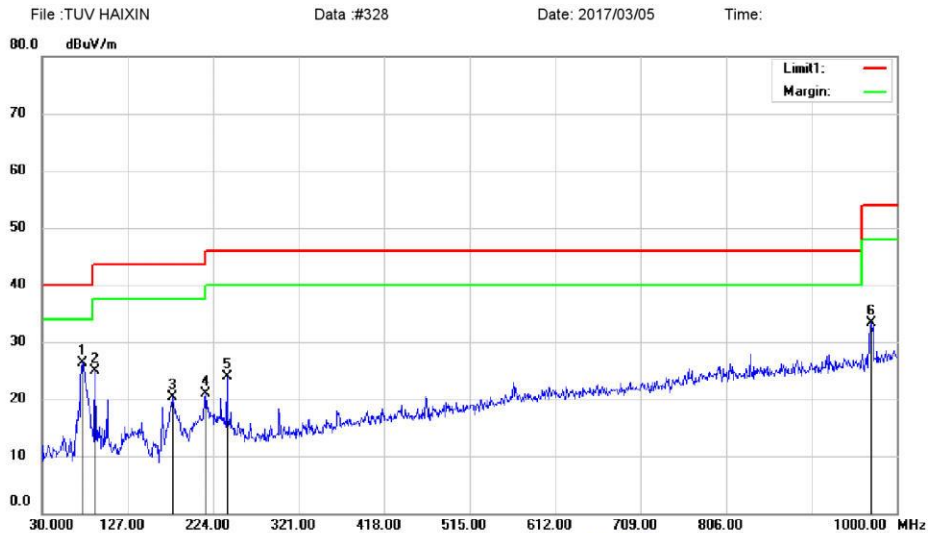

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11nHT20 5240(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	75.5900	46.85	-20.54	26.31	40.00	-13.69	QP			
2		90.1400	41.26	-16.41	24.85	43.50	-18.65	QP			
3		177.4400	37.59	-17.20	20.39	43.50	-23.11	QP			
4		215.2700	35.89	-14.92	20.97	43.50	-22.53	QP			
5		239.5200	38.02	-14.09	23.93	46.00	-22.07	QP			
6		970.9000	33.39	-0.17	33.22	54.00	-20.78	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

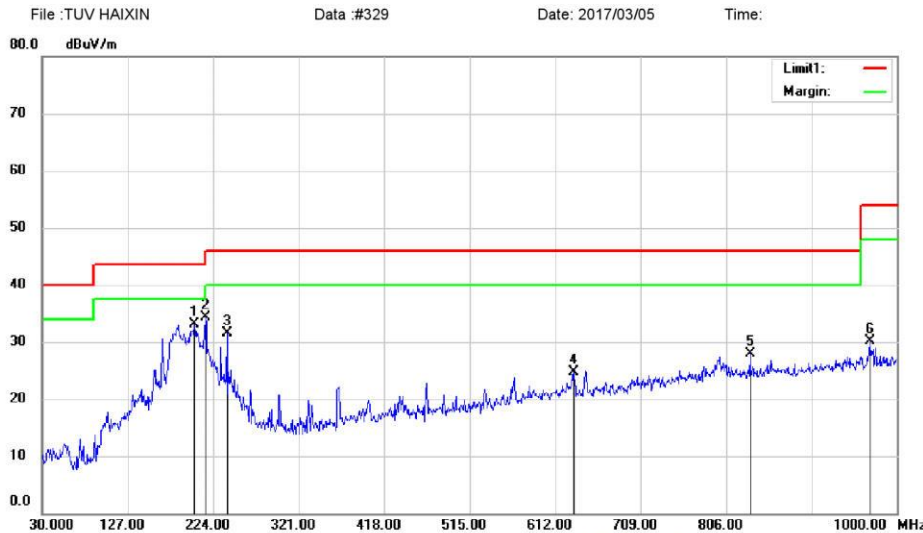

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11nHT20 5200(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		202.6600	49.05	-15.97	33.08	43.50	-10.42	QP		
2	*	215.2700	49.14	-14.92	34.22	43.50	-9.28	QP		
3		239.5200	45.61	-14.09	31.52	46.00	-14.48	QP		
4		633.3400	29.38	-4.69	24.69	46.00	-21.31	QP		
5		833.1600	29.54	-1.67	27.87	46.00	-18.13	QP		
6		968.9600	30.34	-0.20	30.14	54.00	-23.86	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

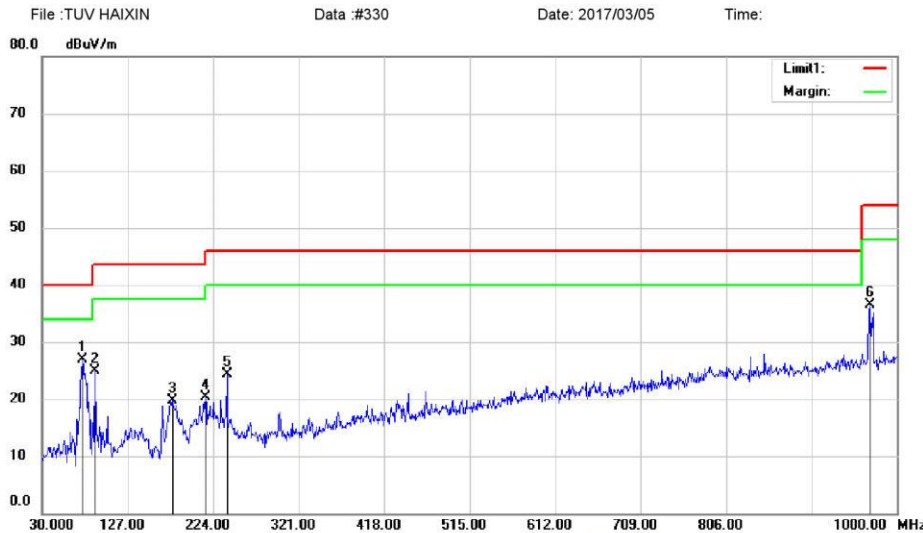

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11nHT20 5200(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	75.5900	47.38	-20.54	26.84	40.00	-13.16	QP		
2		90.1400	41.26	-16.41	24.85	43.50	-18.65	QP		
3		177.4400	36.84	-17.20	19.64	43.50	-23.86	QP		
4		215.2700	35.26	-14.92	20.34	43.50	-23.16	QP		
5		239.5200	38.36	-14.09	24.27	46.00	-21.73	QP		
6		968.9600	36.67	-0.20	36.47	54.00	-17.53	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

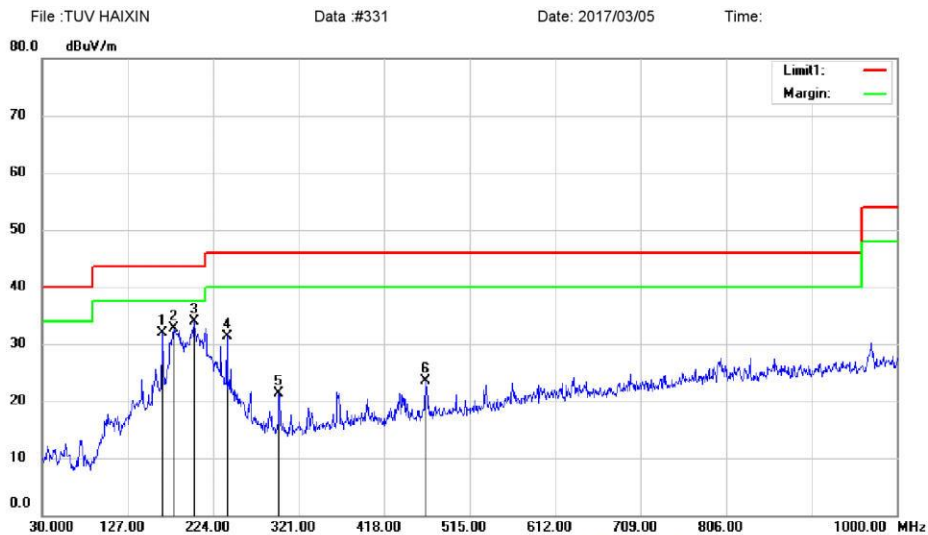

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11nHT20 5180(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		166.7700	50.20	-18.31	31.89	43.50	-11.61	QP		
2		179.3800	52.62	-19.92	32.70	43.50	-10.80	QP		
3	*	202.6600	49.87	-15.97	33.90	43.50	-9.60	QP		
4		239.5200	45.47	-14.09	31.38	46.00	-14.62	QP		
5		298.6900	33.32	-12.07	21.25	46.00	-24.75	QP		
6		464.5600	31.85	-8.38	23.47	46.00	-22.53	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

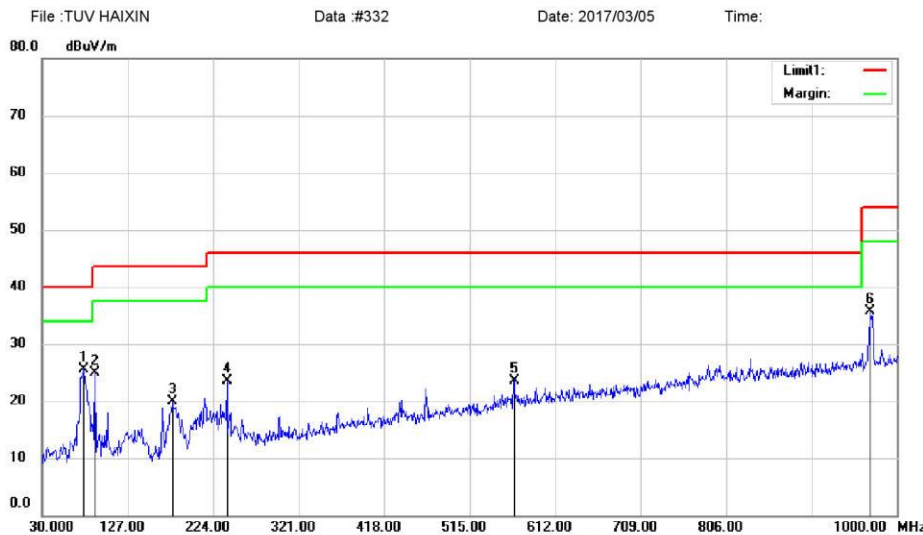

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11nHT20 5180(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	45.74	-20.32	25.42	40.00	-14.58	QP			
2		90.1400	41.22	-16.41	24.81	43.50	-18.69	QP			
3		177.4400	37.11	-17.20	19.91	43.50	-23.59	QP			
4		239.5200	37.57	-14.09	23.48	46.00	-22.52	QP			
5		565.4400	29.43	-5.90	23.53	46.00	-22.47	QP			
6		969.9300	35.88	-0.19	35.69	54.00	-18.31	QP			

*:Maximum data x:Over limit !:over margin

Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5180(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		166.7700	50.12	-18.31	31.81	43.50	-11.69	QP		
2		177.4400	52.19	-20.20	31.99	43.50	-11.51	QP		
3	*	215.2700	48.52	-14.92	33.60	43.50	-9.90	QP		
4		239.5200	45.14	-14.09	31.05	46.00	-14.95	QP		
5		631.4000	31.57	-4.71	26.86	46.00	-19.14	QP		
6		967.9900	31.49	-0.20	31.29	54.00	-22.71	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

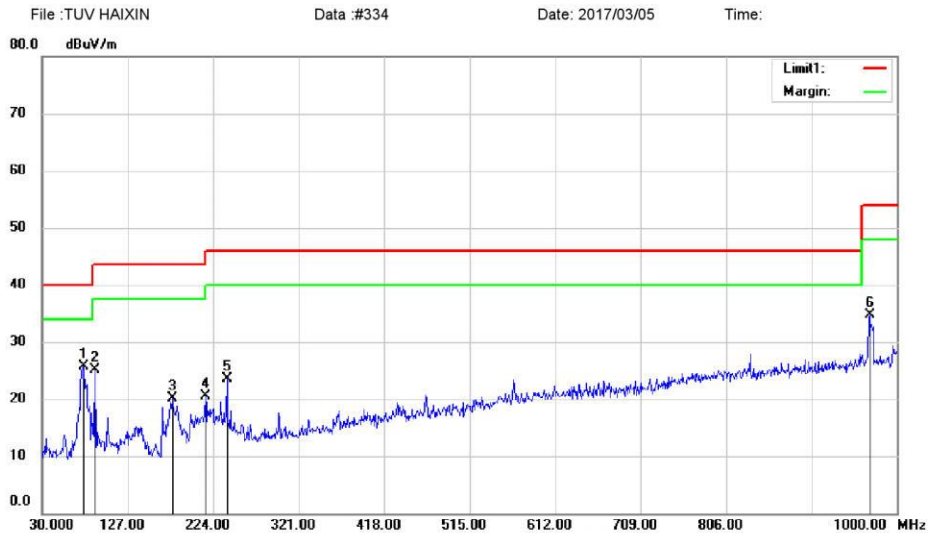

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5180(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	46.11	-20.32	25.79	40.00	-14.21	QP			
2		90.1400	41.57	-16.41	25.16	43.50	-18.34	QP			
3		177.4400	37.40	-17.20	20.20	43.50	-23.30	QP			
4		215.2700	35.41	-14.92	20.49	43.50	-23.01	QP			
5		239.5200	37.54	-14.09	23.45	46.00	-22.55	QP			
6		968.9600	34.84	-0.20	34.64	54.00	-19.36	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

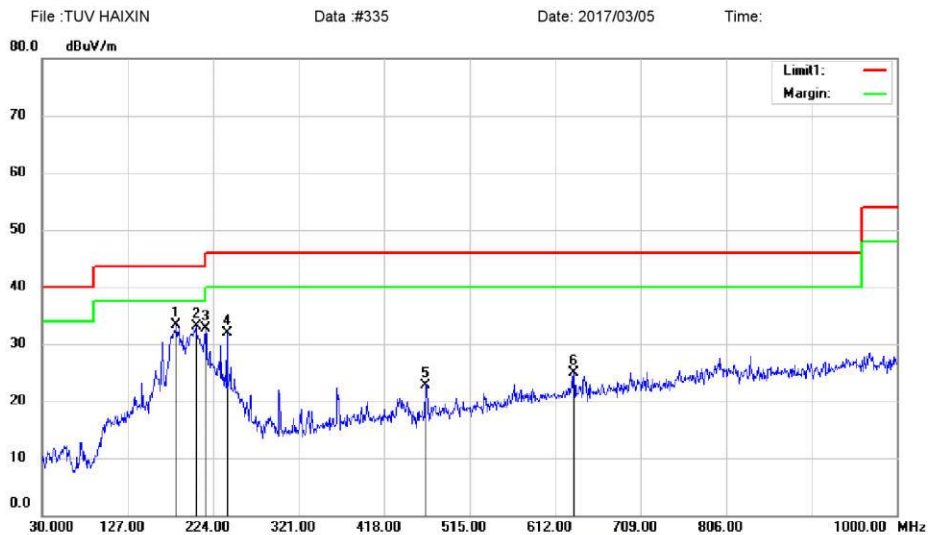

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5200(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	182.2900	53.11	-19.83	33.28	43.50	-10.22	QP		
2		204.6000	48.83	-15.81	33.02	43.50	-10.48	QP		
3		215.2700	47.70	-14.92	32.78	43.50	-10.72	QP		
4		239.5200	46.02	-14.09	31.93	46.00	-14.07	QP		
5		464.5600	31.17	-8.38	22.79	46.00	-23.21	QP		
6		633.3400	29.50	-4.69	24.81	46.00	-21.19	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

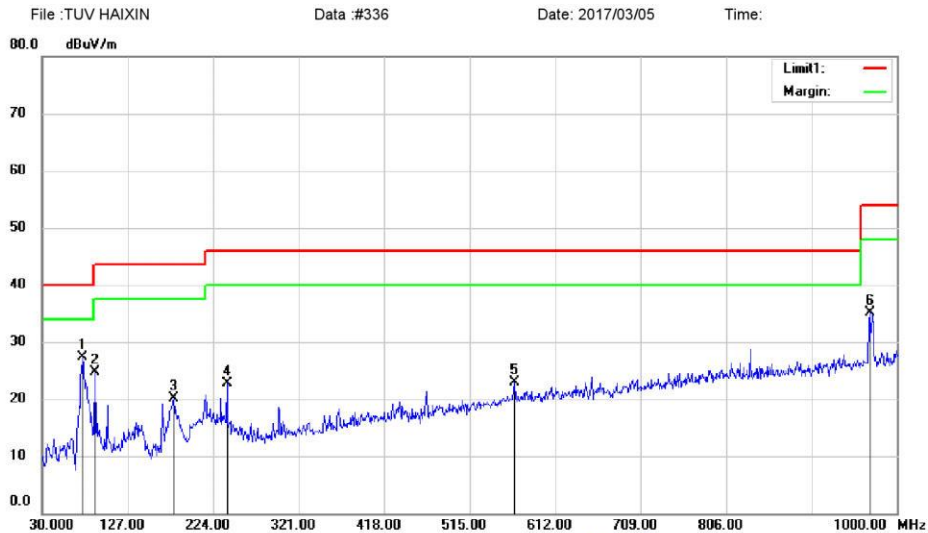

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5200(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	75.5900	47.85	-20.54	27.31	40.00	-12.69	QP		
2		90.1400	41.14	-16.41	24.73	43.50	-18.77	QP		
3		179.3800	36.97	-16.92	20.05	43.50	-23.45	QP		
4		239.5200	36.84	-14.09	22.75	46.00	-23.25	QP		
5		565.4400	28.81	-5.90	22.91	46.00	-23.09	QP		
6		968.9600	35.40	-0.20	35.20	54.00	-18.80	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV HAIXIN Data: #337 Date: 2017/03/05 Time:

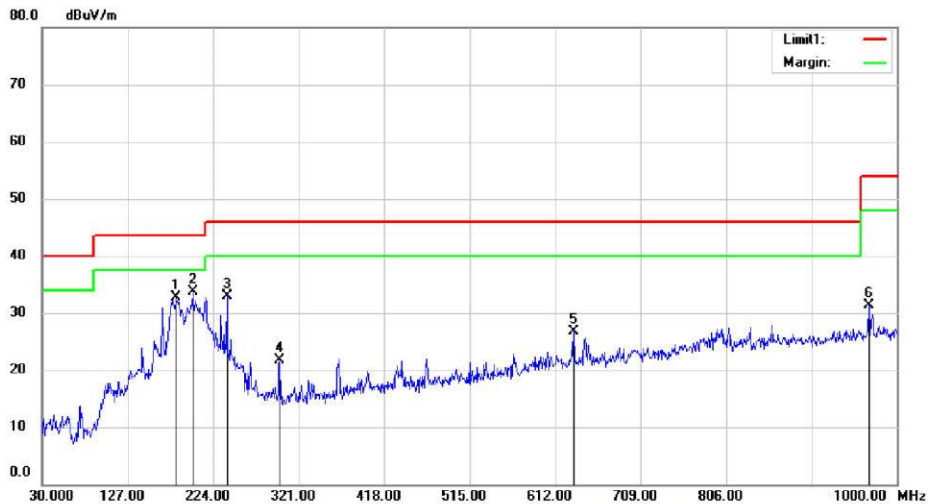

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5240(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		182.2900	52.52	-19.83	32.69	43.50	-10.81	QP		
2	*	200.7200	49.76	-16.14	33.62	43.50	-9.88	QP		
3		239.5200	47.06	-14.09	32.97	46.00	-13.03	QP		
4		299.6600	33.76	-12.02	21.74	46.00	-24.26	QP		
5		633.3400	31.35	-4.69	26.66	46.00	-19.34	QP		
6		967.9900	31.51	-0.20	31.31	54.00	-22.69	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

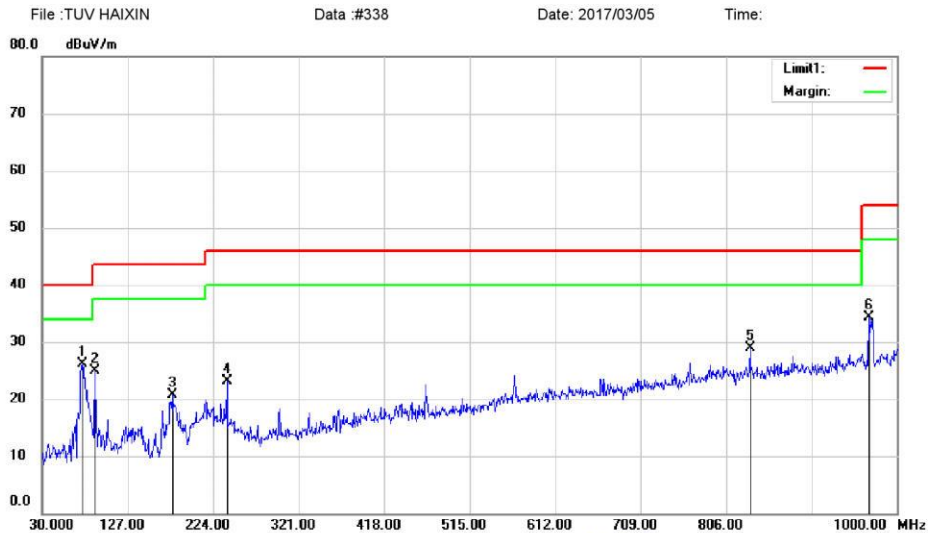

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5240(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	75.5900	46.68	-20.54	26.14	40.00	-13.86	QP			
2		90.1400	41.41	-16.41	25.00	43.50	-18.50	QP			
3		177.4400	37.95	-17.20	20.75	43.50	-22.75	QP			
4		239.5200	37.23	-14.09	23.14	46.00	-22.86	QP			
5		833.1600	30.62	-1.67	28.95	46.00	-17.05	QP			
6		967.9900	34.43	-0.20	34.23	54.00	-19.77	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

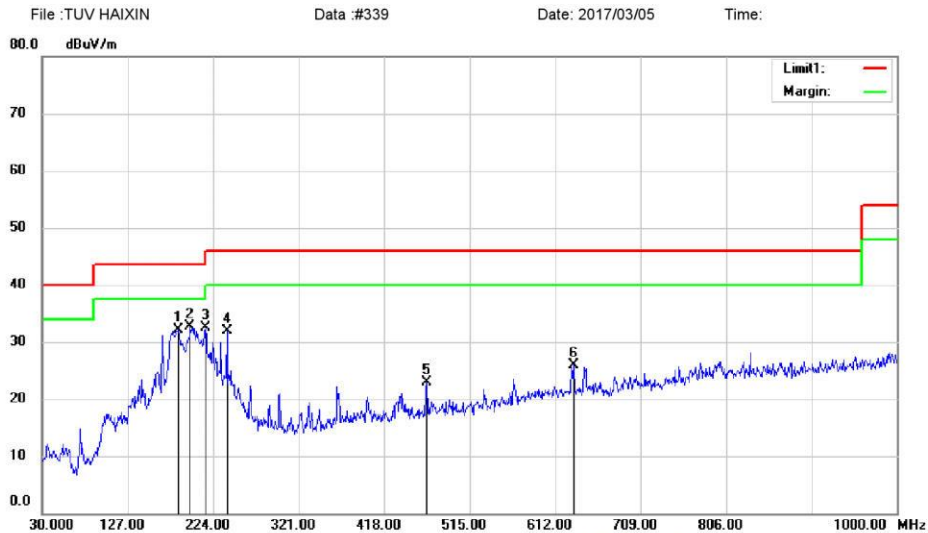

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5260(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		184.2300	51.84	-19.83	32.01	43.50	-11.49	QP		
2	*	197.8100	48.95	-16.33	32.62	43.50	-10.88	QP		
3		215.2700	47.39	-14.92	32.47	43.50	-11.03	QP		
4		239.5200	46.05	-14.09	31.96	46.00	-14.04	QP		
5		466.5000	31.19	-8.30	22.89	46.00	-23.11	QP		
6		633.3400	30.62	-4.69	25.93	46.00	-20.07	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

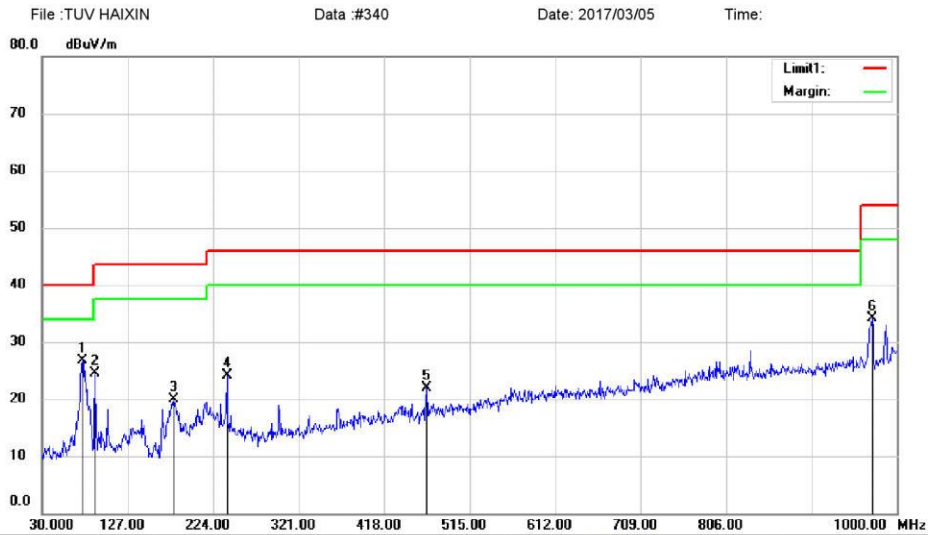

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5260(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	75.5900	47.19	-20.54	26.65	40.00	-13.35	QP		
2		90.1400	40.93	-16.41	24.52	43.50	-18.98	QP		
3		179.3800	36.73	-16.92	19.81	43.50	-23.69	QP		
4		239.5200	38.27	-14.09	24.18	46.00	-21.82	QP		
5		466.5000	30.26	-8.30	21.96	46.00	-24.04	QP		
6		971.8700	34.33	-0.16	34.17	54.00	-19.83	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

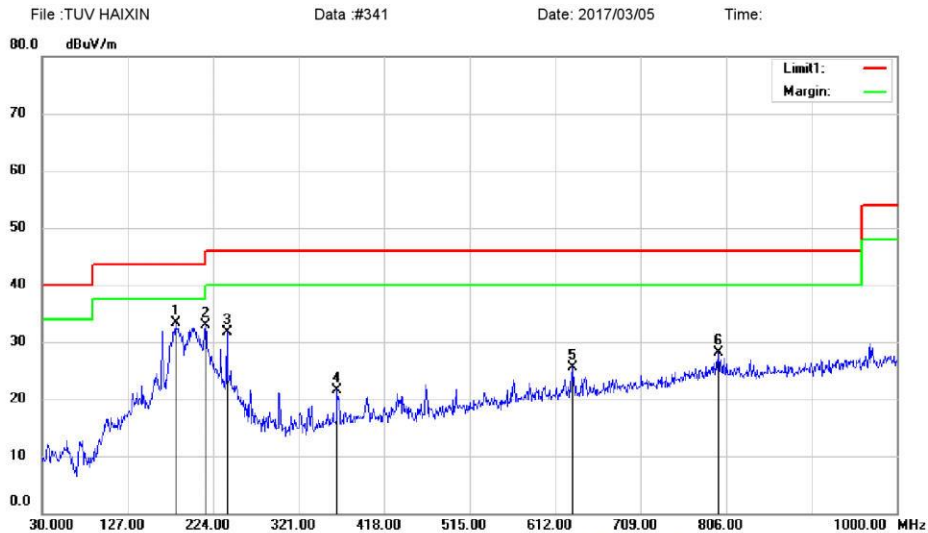

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5280(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	181.3200	53.10	-19.83	33.27	43.50	-10.23	QP			
2		215.2700	47.73	-14.92	32.81	43.50	-10.69	QP			
3		239.5200	45.77	-14.09	31.68	46.00	-14.32	QP			
4		364.6500	31.79	-10.29	21.50	46.00	-24.50	QP			
5		631.4000	30.29	-4.71	25.58	46.00	-20.42	QP			
6		797.2700	30.19	-2.07	28.12	46.00	-17.88	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

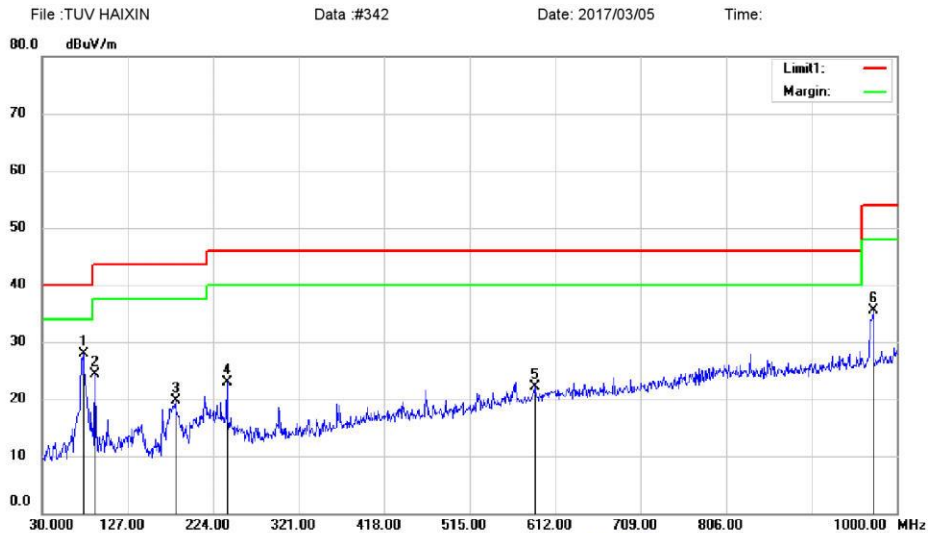

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5280(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	48.23	-20.32	27.91	40.00	-12.09	QP			
2		90.1400	40.80	-16.41	24.39	43.50	-19.11	QP			
3		181.3200	36.47	-16.83	19.64	43.50	-23.86	QP			
4		239.5200	37.06	-14.09	22.97	46.00	-23.03	QP			
5		589.6900	27.39	-5.31	22.08	46.00	-23.92	QP			
6		972.8400	35.57	-0.15	35.42	54.00	-18.58	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

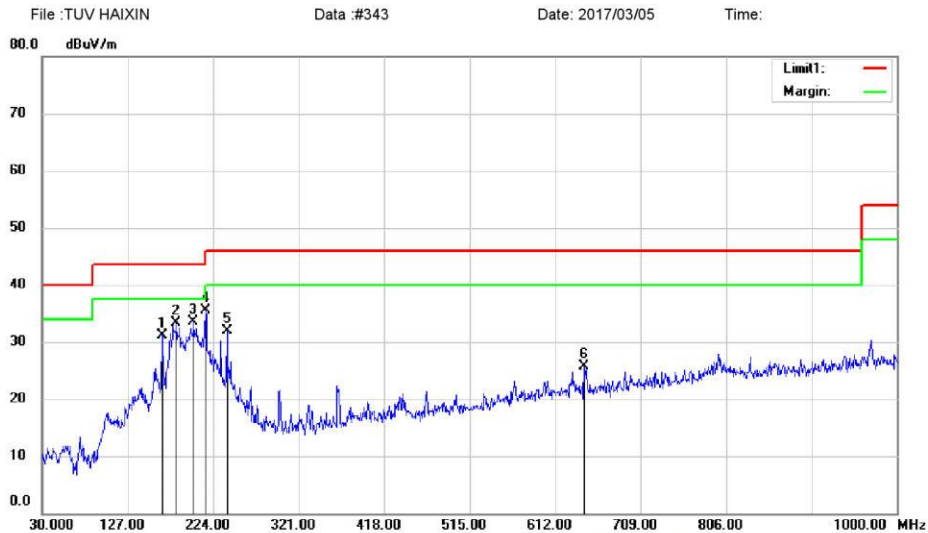

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5320(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		165.8000	49.46	-18.31	31.15	43.50	-12.35	QP		
2		182.2900	53.04	-19.83	33.21	43.50	-10.29	QP		
3		201.6900	49.49	-16.05	33.44	43.50	-10.06	QP		
4	*	215.2700	50.42	-14.92	35.50	43.50	-8.00	QP		
5		239.5200	45.99	-14.09	31.90	46.00	-14.10	QP		
6		644.9800	30.33	-4.58	25.75	46.00	-20.25	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

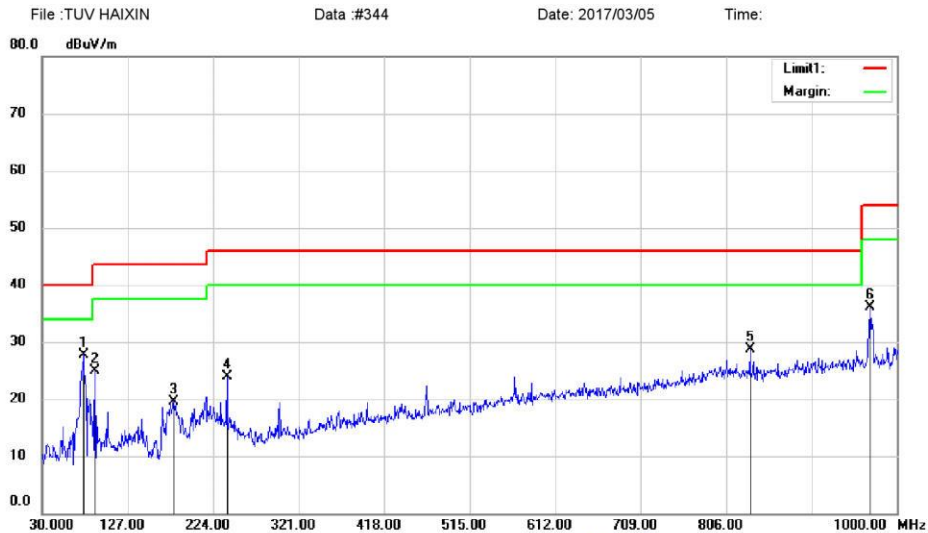

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5320(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	76.5600	48.00	-20.32	27.68	40.00	-12.32	QP		
2		90.1400	41.31	-16.41	24.90	43.50	-18.60	QP		
3		179.3800	36.36	-16.92	19.44	43.50	-24.06	QP		
4		239.5200	37.90	-14.09	23.81	46.00	-22.19	QP		
5		833.1600	30.34	-1.67	28.67	46.00	-17.33	QP		
6		969.9300	36.36	-0.19	36.17	54.00	-17.83	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

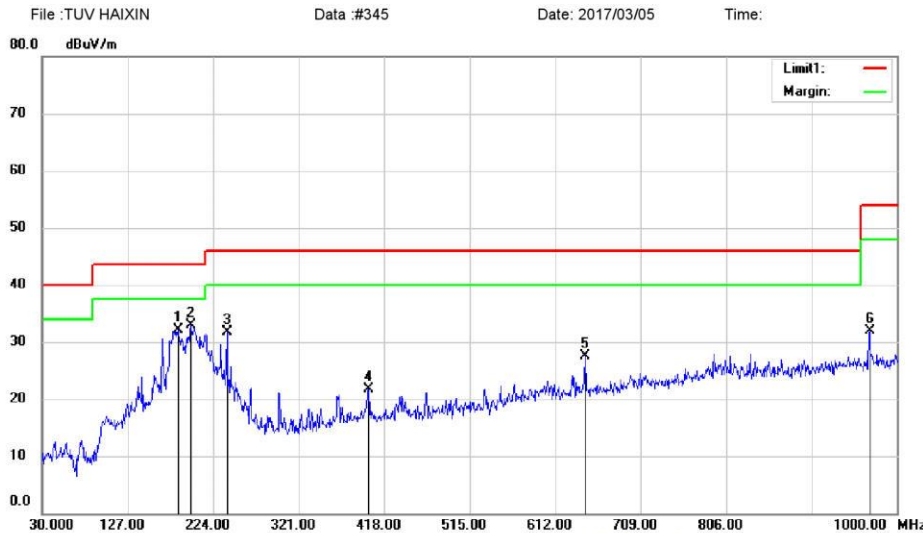

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5500(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		184.2300	51.86	-19.83	32.03	43.50	-11.47	QP		
2	*	198.7800	49.18	-16.27	32.91	43.50	-10.59	QP		
3		239.5200	45.88	-14.09	31.79	46.00	-14.21	QP		
4		400.5400	30.88	-9.24	21.64	46.00	-24.36	QP		
5		645.9500	32.16	-4.56	27.60	46.00	-18.40	QP		
6		968.9600	32.03	-0.20	31.83	54.00	-22.17	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

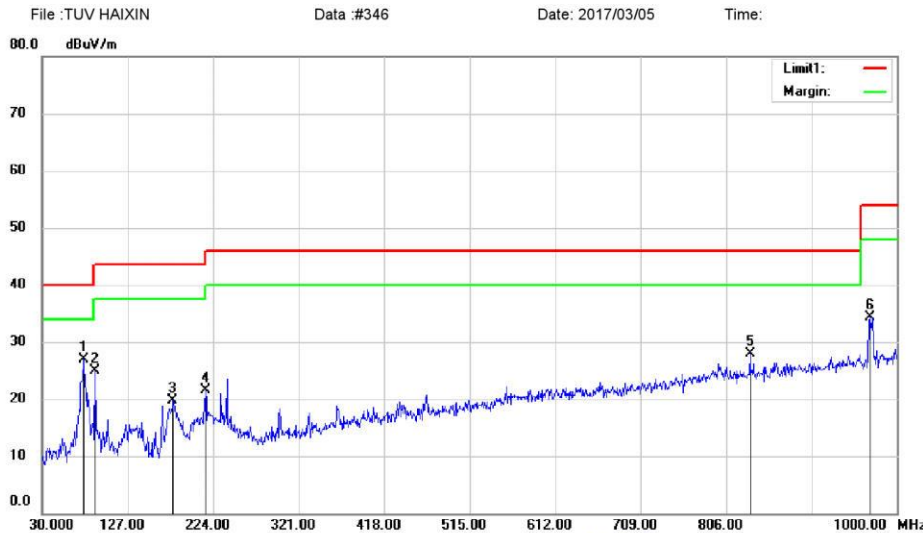

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5500(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	47.23	-20.32	26.91	40.00	-13.09	QP			
2		90.1400	41.28	-16.41	24.87	43.50	-18.63	QP			
3		178.4100	36.77	-17.05	19.72	43.50	-23.78	QP			
4		215.2700	36.42	-14.92	21.50	43.50	-22.00	QP			
5		833.1600	29.62	-1.67	27.95	46.00	-18.05	QP			
6		968.9600	34.41	-0.20	34.21	54.00	-19.79	QP			

*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV HAIXIN Data: #347 Date: 2017/03/05 Time:

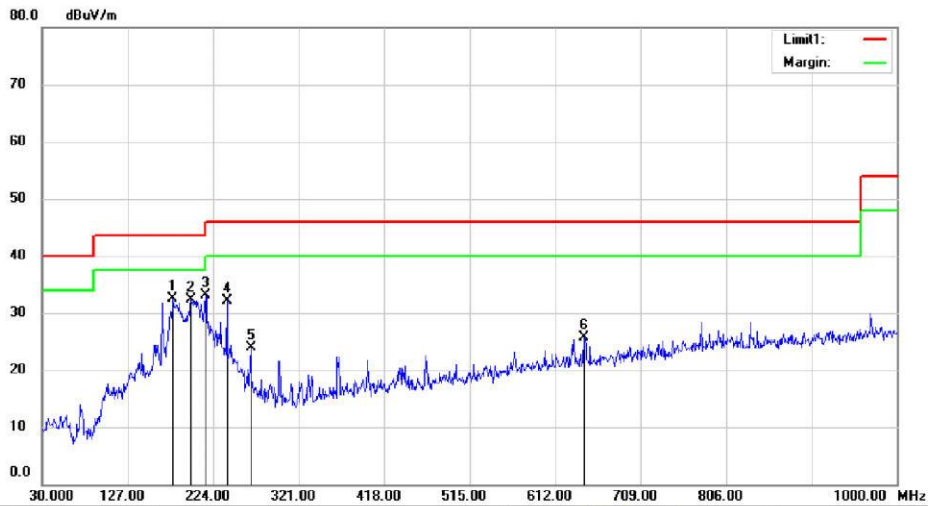

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5600(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		178.4100	52.56	-20.05	32.51	43.50	-10.99	QP		
2		198.7800	48.62	-16.27	32.35	43.50	-11.15	QP		
3	*	215.2700	48.05	-14.92	33.13	43.50	-10.37	QP		
4		239.5200	46.21	-14.09	32.12	46.00	-13.88	QP		
5		266.6800	37.04	-13.09	23.95	46.00	-22.05	QP		
6		644.9800	30.19	-4.58	25.61	46.00	-20.39	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

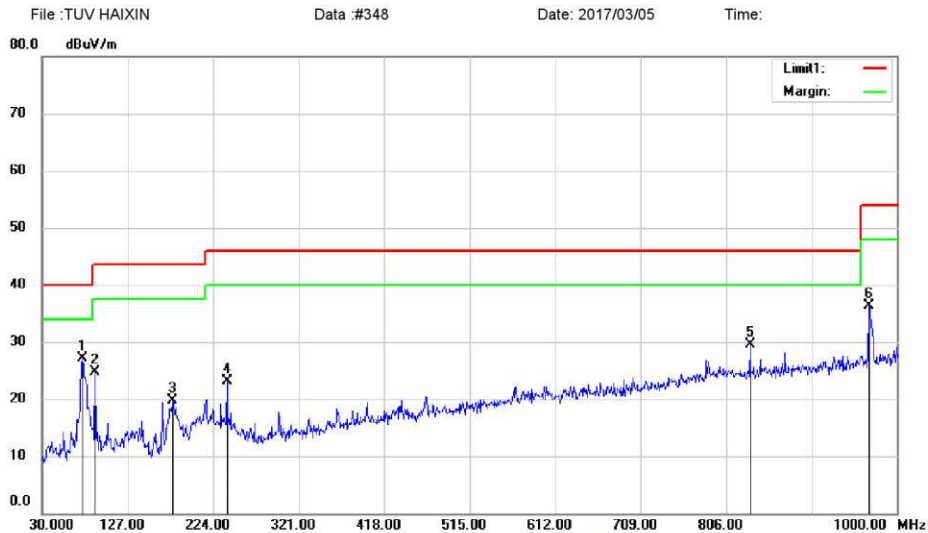

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5600(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	75.5900	47.65	-20.54	27.11	40.00	-12.89	QP			
2		90.1400	41.02	-16.41	24.61	43.50	-18.89	QP			
3		178.4100	36.70	-17.05	19.65	43.50	-23.85	QP			
4		239.5200	37.25	-14.09	23.16	46.00	-22.84	QP			
5		833.1600	31.22	-1.67	29.55	46.00	-16.45	QP			
6		967.9900	36.57	-0.20	36.37	54.00	-17.63	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

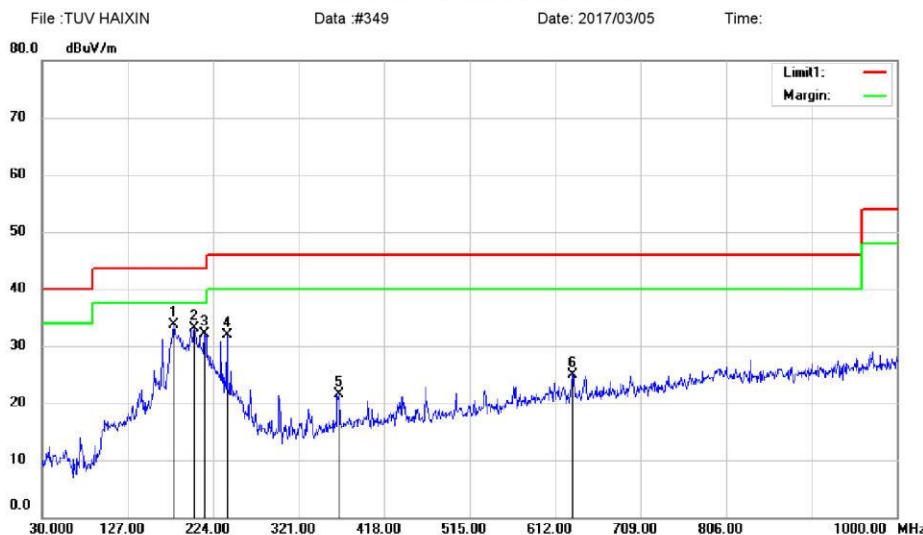

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5700(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	179.3800	53.53	-19.92	33.61	43.50	-9.89	QP			
2		202.6600	49.07	-15.97	33.10	43.50	-10.40	QP			
3		214.3000	47.03	-15.01	32.02	43.50	-11.48	QP			
4		239.5200	46.07	-14.09	31.98	46.00	-14.02	QP			
5		366.5900	31.83	-10.26	21.57	46.00	-24.43	QP			
6		631.4000	29.66	-4.71	24.95	46.00	-21.05	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

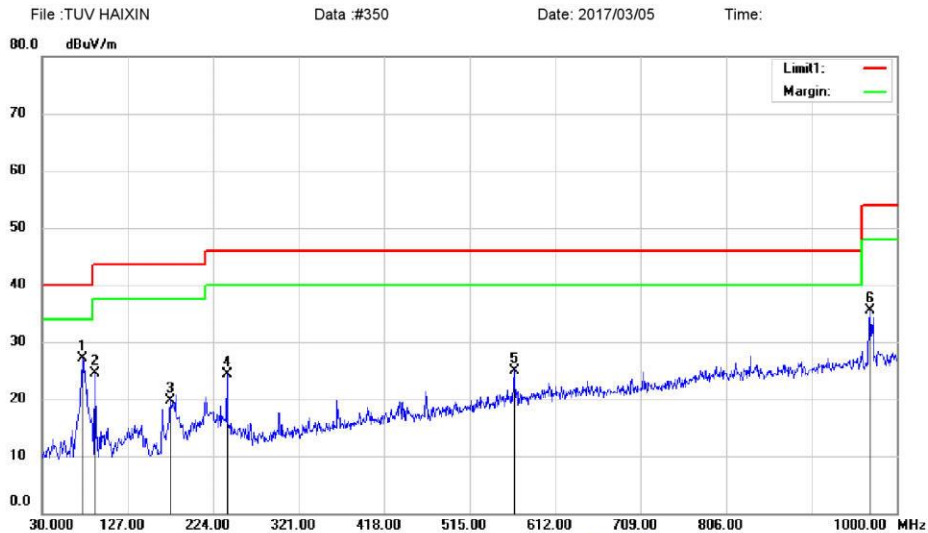

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5700(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	75.5900	47.57	-20.54	27.03	40.00	-12.97	QP		
2		90.1400	40.82	-16.41	24.41	43.50	-19.09	QP		
3		175.5000	37.15	-17.48	19.67	43.50	-23.83	QP		
4		239.5200	38.35	-14.09	24.26	46.00	-21.74	QP		
5		565.4400	30.81	-5.90	24.91	46.00	-21.09	QP		
6		969.9300	35.72	-0.19	35.53	54.00	-18.47	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

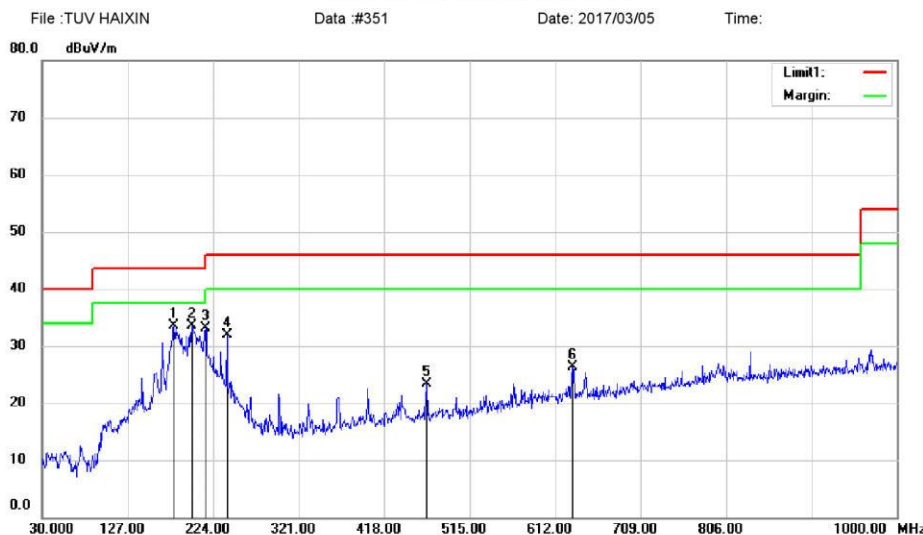

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5745(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		179.3800	53.37	-19.92	33.45	43.50	-10.05			QP	
2	*	199.7500	49.78	-16.21	33.57	43.50	-9.93			QP	
3		215.2700	48.10	-14.92	33.18	43.50	-10.32			QP	
4		239.5200	45.97	-14.09	31.88	46.00	-14.12			QP	
5		466.5000	31.59	-8.30	23.29	46.00	-22.71			QP	
6		631.4000	31.04	-4.71	26.33	46.00	-19.67			QP	

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

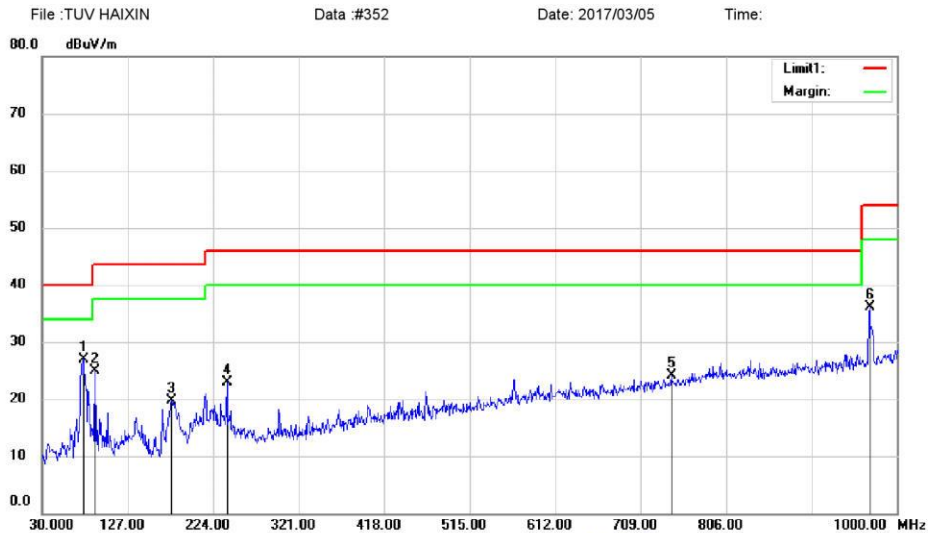

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5745(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	76.5600	47.31	-20.32	26.99	40.00	-13.01	QP		
2		90.1400	41.24	-16.41	24.83	43.50	-18.67	QP		
3		176.4700	37.12	-17.34	19.78	43.50	-23.72	QP		
4		239.5200	37.09	-14.09	23.00	46.00	-23.00	QP		
5		743.9200	27.27	-3.12	24.15	46.00	-21.85	QP		
6		968.9600	36.25	-0.20	36.05	54.00	-17.95	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV HAIXIN Data: #353 Date: 2017/03/05 Time:

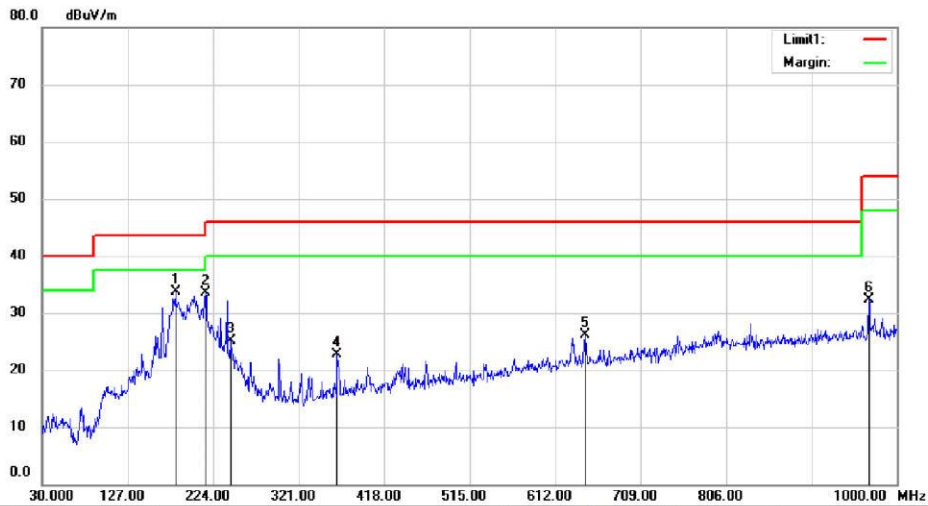

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5785(Ant0)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	181.3200	53.53	-19.83	33.70	43.50	-9.80	QP			
2		215.2700	48.37	-14.92	33.45	43.50	-10.05	QP			
3		243.4000	38.95	-13.90	25.05	46.00	-20.95	QP			
4		364.6500	32.99	-10.29	22.70	46.00	-23.30	QP			
5		645.9500	30.59	-4.56	26.03	46.00	-19.97	QP			
6		967.9900	32.46	-0.20	32.26	54.00	-21.74	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

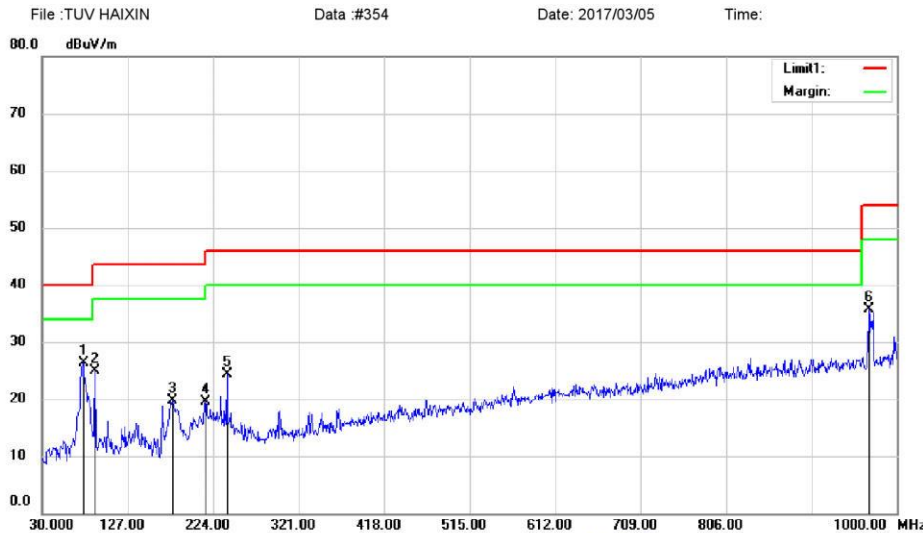

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5785(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	76.5600	46.68	-20.32	26.36	40.00	-13.64	QP		
2		90.1400	41.27	-16.41	24.86	43.50	-18.64	QP		
3		178.4100	36.76	-17.05	19.71	43.50	-23.79	QP		
4		215.2700	34.50	-14.92	19.58	43.50	-23.92	QP		
5		239.5200	38.31	-14.09	24.22	46.00	-21.78	QP		
6		967.9900	35.85	-0.20	35.65	54.00	-18.35	QP		

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

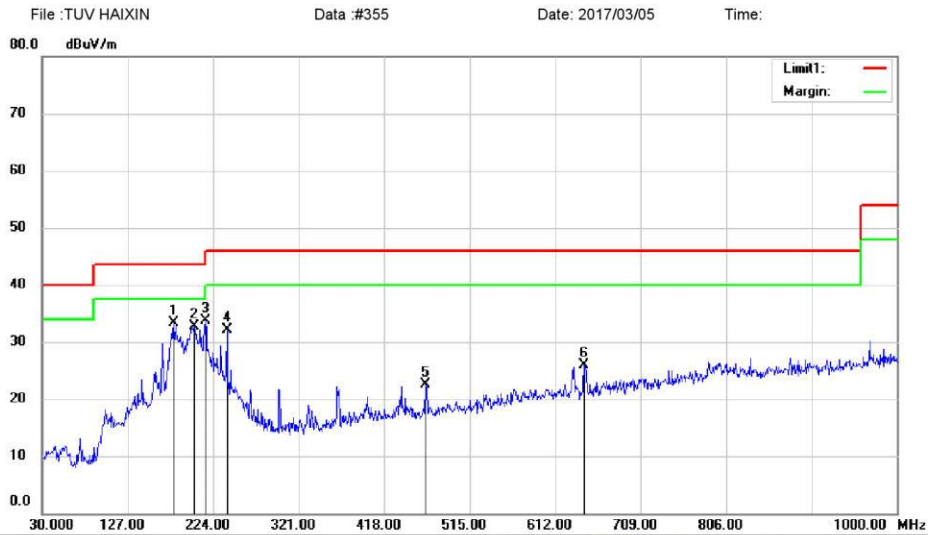

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5825(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		179.3800	53.23	-19.92	33.31	43.50	-10.19	QP			
2		202.6600	48.62	-15.97	32.65	43.50	-10.85	QP			
3	*	215.2700	48.62	-14.92	33.70	43.50	-9.80	QP			
4		239.5200	46.10	-14.09	32.01	46.00	-13.99	QP			
5		464.5600	30.81	-8.38	22.43	46.00	-23.57	QP			
6		644.9800	30.54	-4.58	25.96	46.00	-20.04	QP			

*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte
 Products

Shenzhen EMTEK Co., Ltd.
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

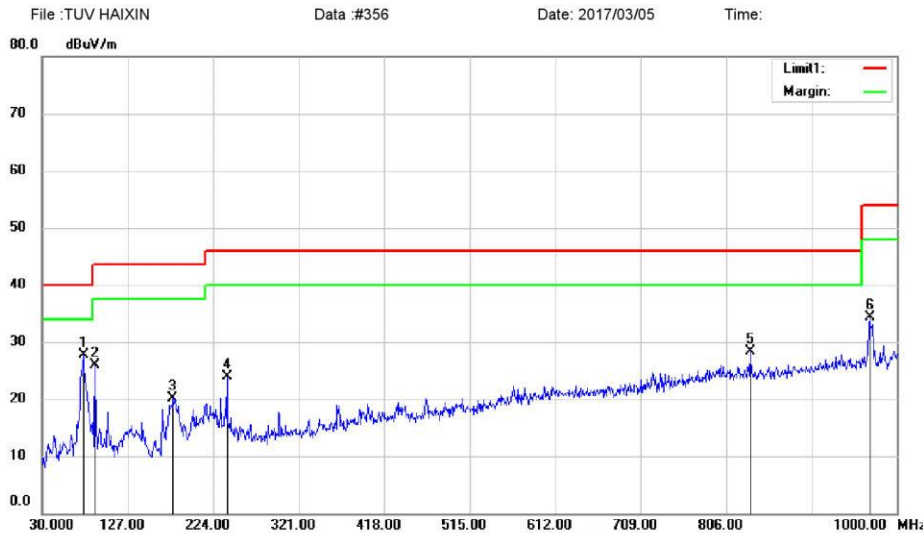

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %
 EUT: WIFI Module
 M/N:
 Mode: 11ac20 5825(Ant0)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	76.5600	48.00	-20.32	27.68	40.00	-12.32	QP		
2		90.1400	42.22	-16.41	25.81	43.50	-17.69	QP		
3		178.4100	37.14	-17.05	20.09	43.50	-23.41	QP		
4		239.5200	37.98	-14.09	23.89	46.00	-22.11	QP		
5		833.1600	30.06	-1.67	28.39	46.00	-17.61	QP		
6		968.9600	34.58	-0.20	34.38	54.00	-19.62	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK