


Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

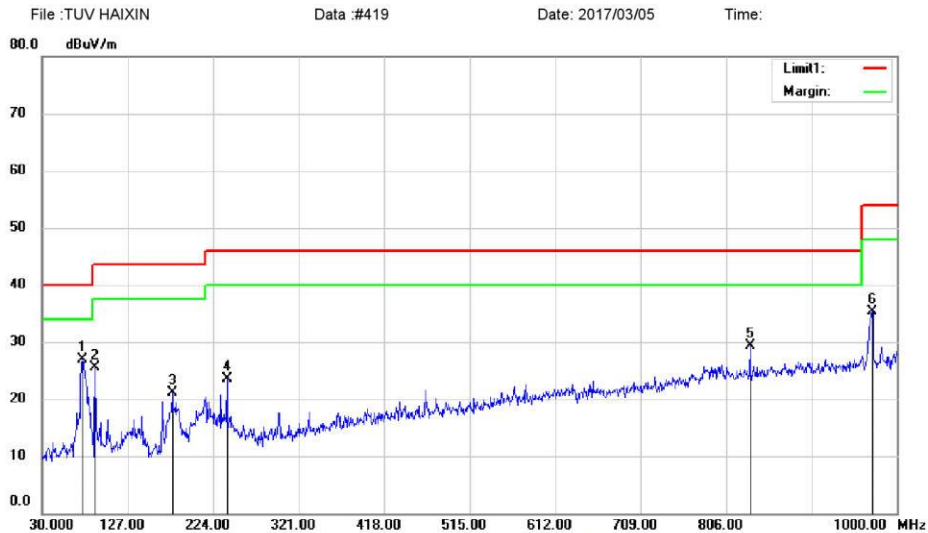

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5310(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	75.5900	47.36	-20.54	26.82	40.00	-13.18	QP			
2		90.1400	41.86	-16.41	25.45	43.50	-18.05	QP			
3		177.4400	38.26	-17.20	21.06	43.50	-22.44	QP			
4		239.5200	37.55	-14.09	23.46	46.00	-22.54	QP			
5		833.1600	31.07	-1.67	29.40	46.00	-16.60	QP			
6		971.8700	35.55	-0.16	35.39	54.00	-18.61	QP			


\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

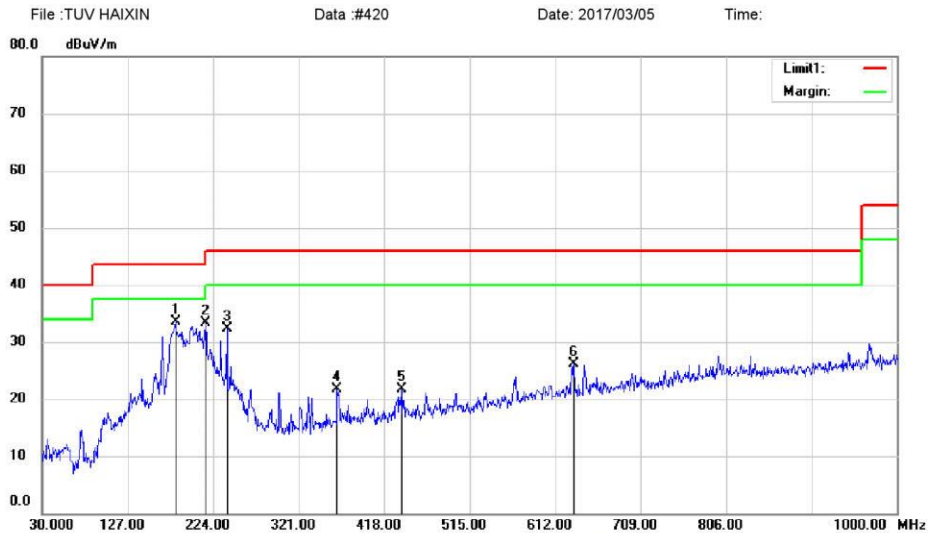

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5310(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	181.3200	53.29	-19.83	33.46	43.50	-10.04	QP			
2		215.2700	48.18	-14.92	33.26	43.50	-10.24	QP			
3		239.5200	46.49	-14.09	32.40	46.00	-13.60	QP			
4		364.6500	31.93	-10.29	21.64	46.00	-24.36	QP			
5		437.4000	30.30	-8.65	21.65	46.00	-24.35	QP			
6		633.3400	30.70	-4.69	26.01	46.00	-19.99	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

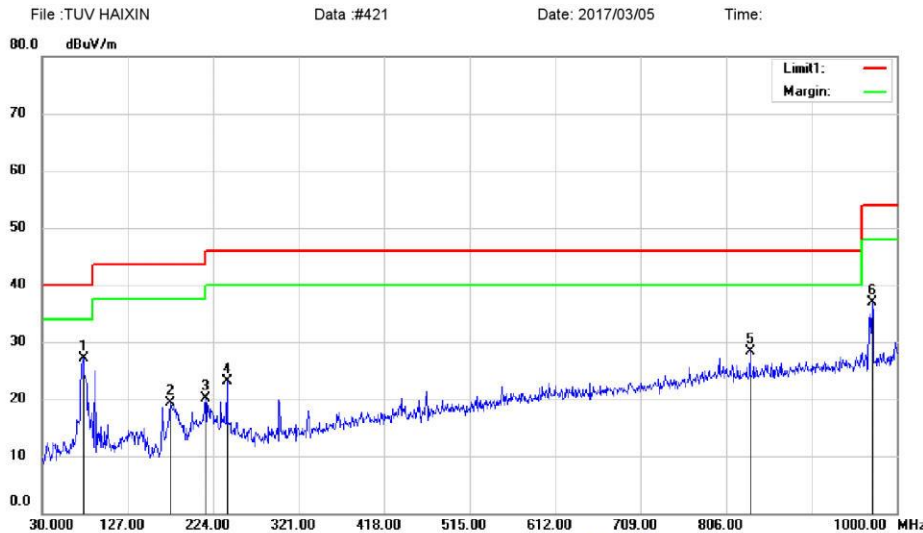

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5510(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	76.5600	47.34	-20.32	27.02	40.00	-12.98	QP		
2		175.5000	36.75	-17.48	19.27	43.50	-24.23	QP		
3		215.2700	35.08	-14.92	20.16	43.50	-23.34	QP		
4		239.5200	37.21	-14.09	23.12	46.00	-22.88	QP		
5		833.1600	29.98	-1.67	28.31	46.00	-17.69	QP		
6		971.8700	37.13	-0.16	36.97	54.00	-17.03	QP		

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

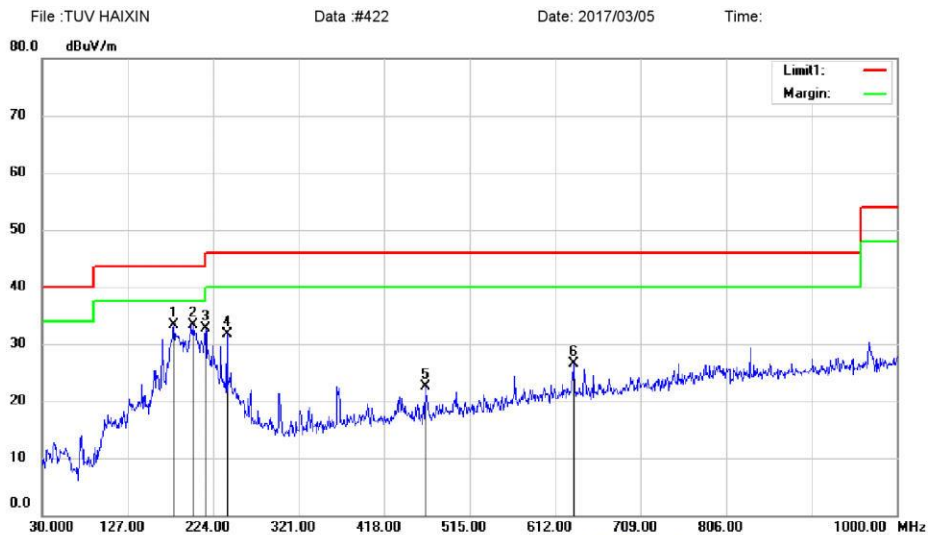

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5510(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	179.3800	53.32	-19.92	33.40	43.50	-10.10	QP			
2		201.6900	49.43	-16.05	33.38	43.50	-10.12	QP			
3		215.2700	47.67	-14.92	32.75	43.50	-10.75	QP			
4		239.5200	45.75	-14.09	31.66	46.00	-14.34	QP			
5		464.5600	30.95	-8.38	22.57	46.00	-23.43	QP			
6		633.3400	31.10	-4.69	26.41	46.00	-19.59	QP			


\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

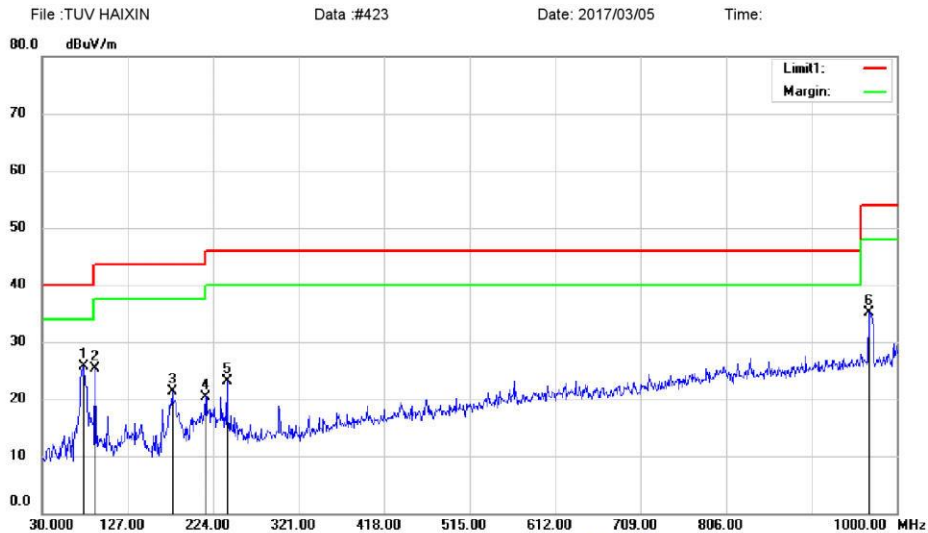

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5670(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	77.5300	45.85	-20.09	25.76	40.00	-14.24	QP			
2		90.1400	41.69	-16.41	25.28	43.50	-18.22	QP			
3		177.4400	38.43	-17.20	21.23	43.50	-22.27	QP			
4		215.2700	35.21	-14.92	20.29	43.50	-23.21	QP			
5		239.5200	37.20	-14.09	23.11	46.00	-22.89	QP			
6		967.9900	35.36	-0.20	35.16	54.00	-18.84	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

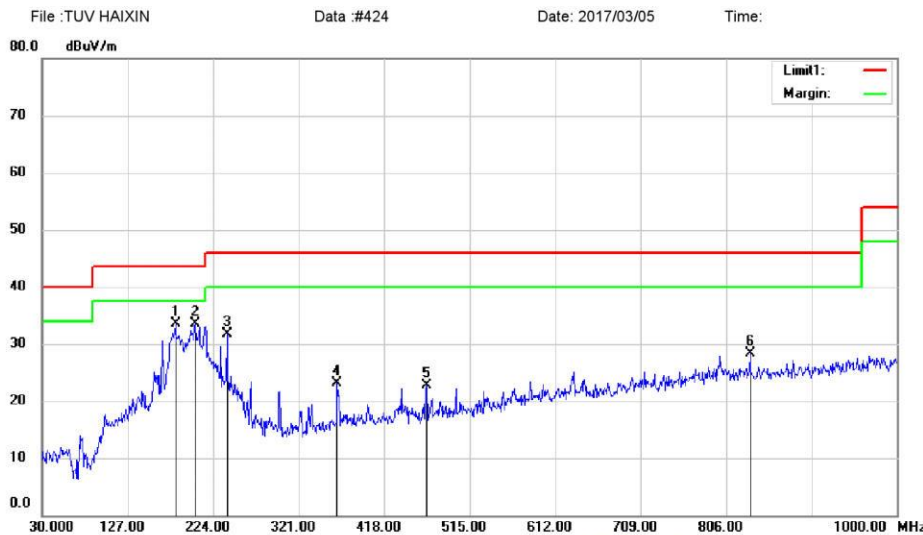

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5670(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	181.3200	53.40	-19.83	33.57	43.50	-9.93	QP			
2		203.6300	49.30	-15.89	33.41	43.50	-10.09	QP			
3		239.5200	45.75	-14.09	31.66	46.00	-14.34	QP			
4		364.6500	33.38	-10.29	23.09	46.00	-22.91	QP			
5		466.5000	30.96	-8.30	22.66	46.00	-23.34	QP			
6		833.1600	30.00	-1.67	28.33	46.00	-17.67	QP			


\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

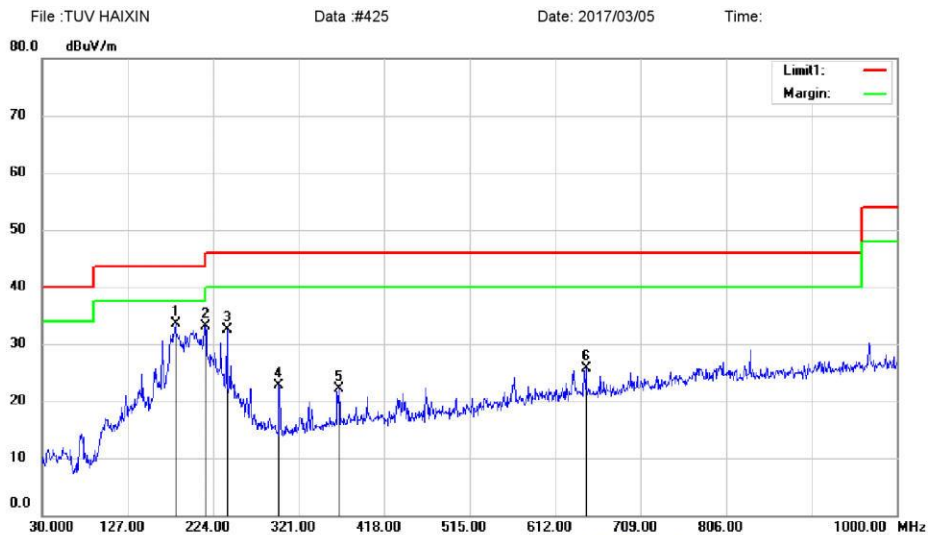

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5755(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	181.3200	53.39	-19.83	33.56	43.50	-9.94			QP	
2		215.2700	48.10	-14.92	33.18	43.50	-10.32			QP	
3		239.5200	46.53	-14.09	32.44	46.00	-13.56			QP	
4		298.6900	34.70	-12.07	22.63	46.00	-23.37			QP	
5		366.5900	32.40	-10.26	22.14	46.00	-23.86			QP	
6		646.9200	30.22	-4.56	25.66	46.00	-20.34			QP	

\*:Maximum data x:Over limit !:over margin


Operator: KK



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

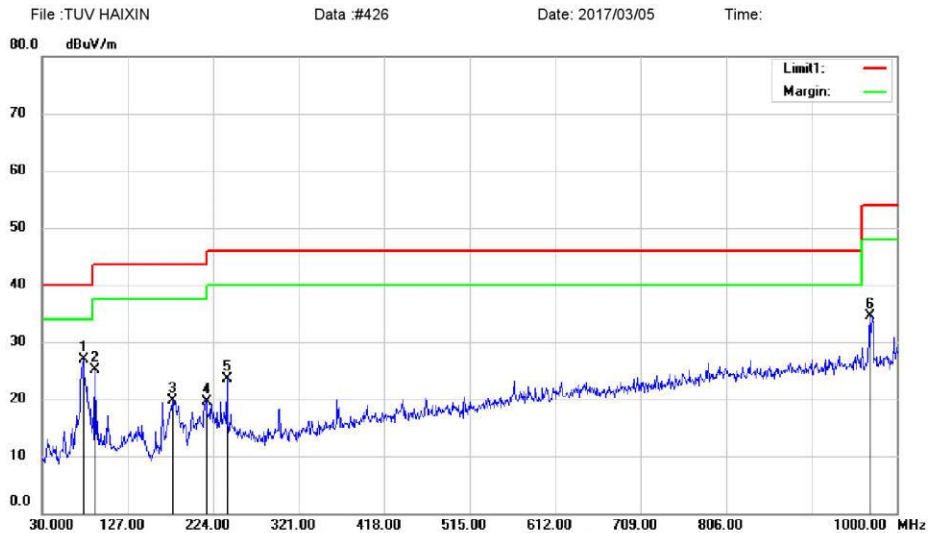

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5755(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	76.5600	47.29	-20.32	26.97	40.00	-13.03	QP		
2		90.1400	41.55	-16.41	25.14	43.50	-18.36	QP		
3		177.4400	36.84	-17.20	19.64	43.50	-23.86	QP		
4		216.2400	34.45	-14.85	19.60	46.00	-26.40	QP		
5		239.5200	37.63	-14.09	23.54	46.00	-22.46	QP		
6		968.9600	34.63	-0.20	34.43	54.00	-19.57	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK




Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

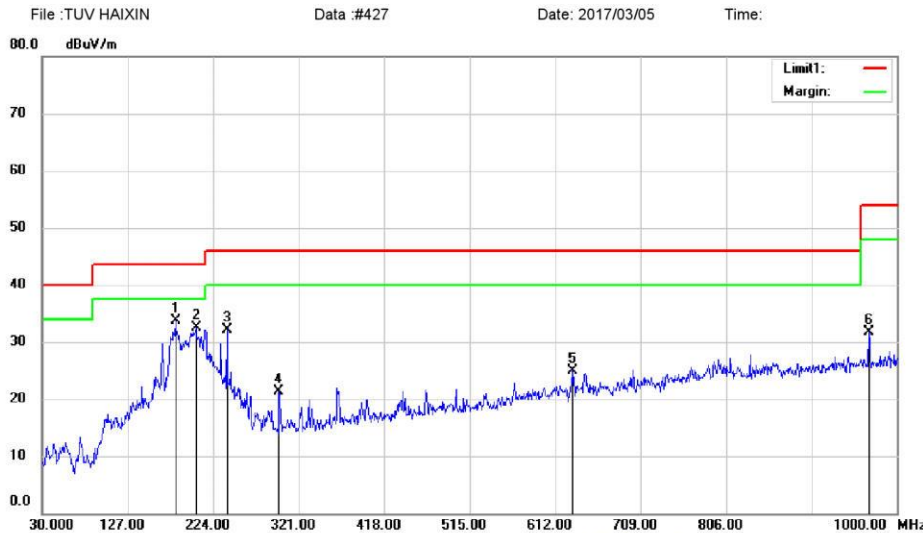

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5795(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	181.3200	53.52	-19.83	33.69	43.50	-9.81	QP		
2		204.6000	48.31	-15.81	32.50	43.50	-11.00	QP		
3		239.5200	46.14	-14.09	32.05	46.00	-13.95	QP		
4		298.6900	33.38	-12.07	21.31	46.00	-24.69	QP		
5		631.4000	29.62	-4.71	24.91	46.00	-21.09	QP		
6		967.9900	31.99	-0.20	31.79	54.00	-22.21	QP		


\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

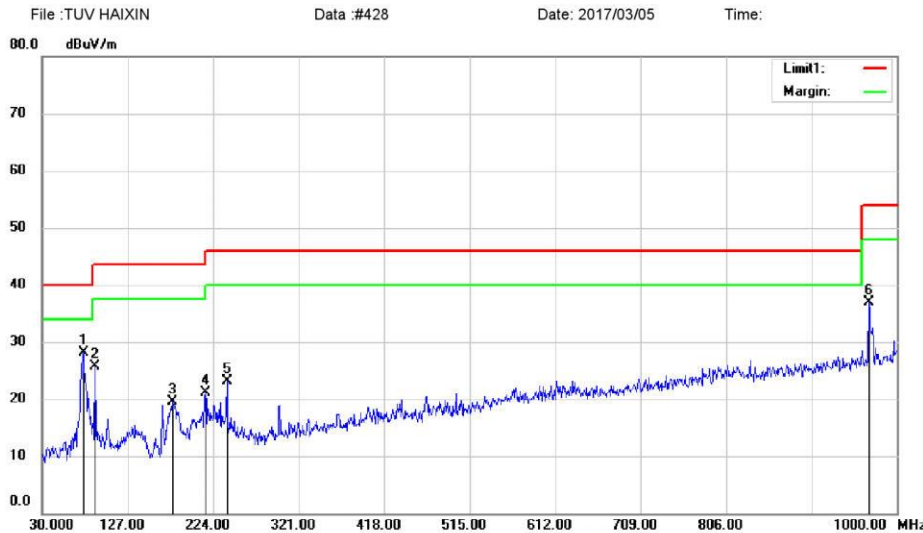

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5795(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	76.5600	48.42	-20.32	28.10	40.00	-11.90	QP		
2		90.1400	42.04	-16.41	25.63	43.50	-17.87	QP		
3		178.4100	36.55	-17.05	19.50	43.50	-24.00	QP		
4		215.2700	36.07	-14.92	21.15	43.50	-22.35	QP		
5		239.5200	37.17	-14.09	23.08	46.00	-22.92	QP		
6		967.9900	37.06	-0.20	36.86	54.00	-17.14	QP		

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

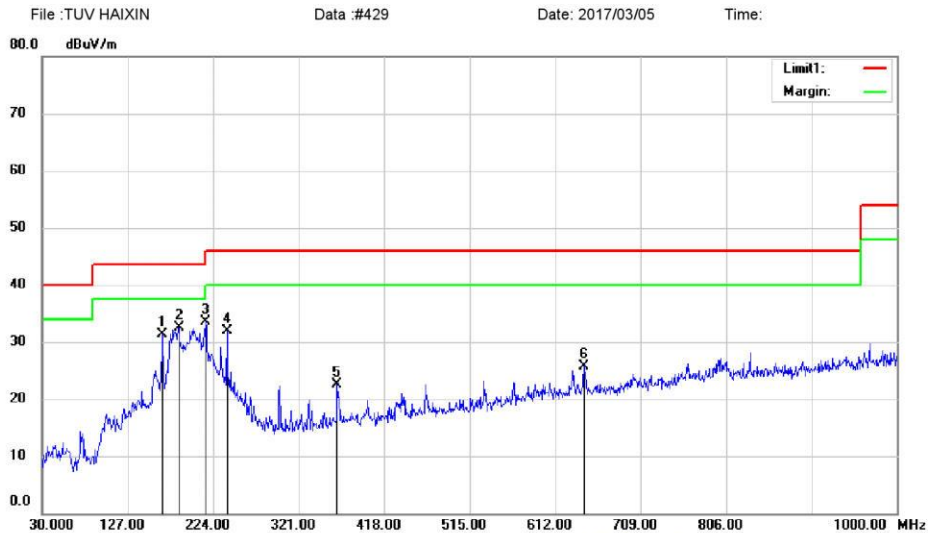

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5795(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		166.7700	49.70	-18.31	31.39	43.50	-12.11			QP	
2		185.2000	52.34	-19.84	32.50	43.50	-11.00			QP	
3	*	215.2700	48.50	-14.92	33.58	43.50	-9.92			QP	
4		239.5200	45.90	-14.09	31.81	46.00	-14.19			QP	
5		364.6500	32.84	-10.29	22.55	46.00	-23.45			QP	
6		644.9800	30.38	-4.58	25.80	46.00	-20.20			QP	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

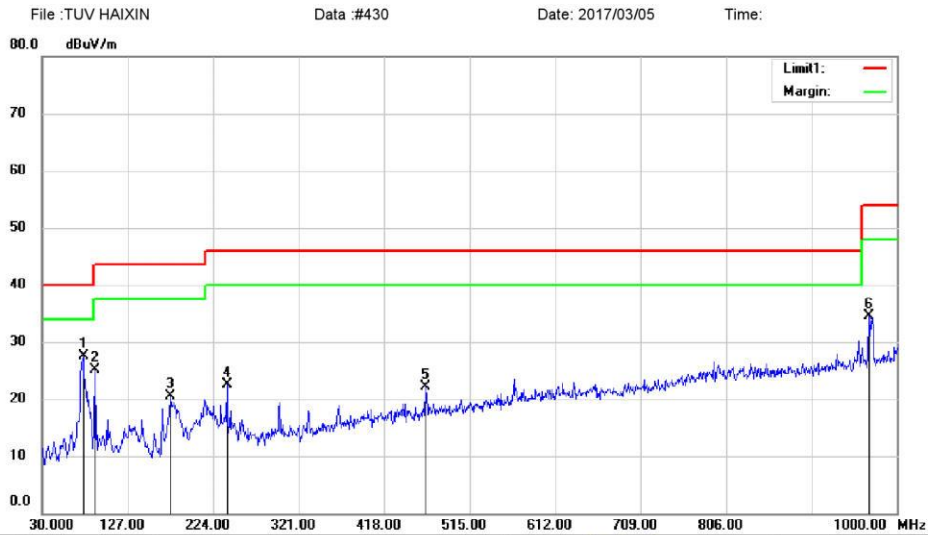

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5795(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	47.76	-20.32	27.44	40.00	-12.56	QP			
2		90.1400	41.48	-16.41	25.07	43.50	-18.43	QP			
3		175.5000	37.90	-17.48	20.42	43.50	-23.08	QP			
4		239.5200	36.60	-14.09	22.51	46.00	-23.49	QP			
5		464.5600	30.45	-8.38	22.07	46.00	-23.93	QP			
6		967.9900	34.62	-0.20	34.42	54.00	-19.58	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

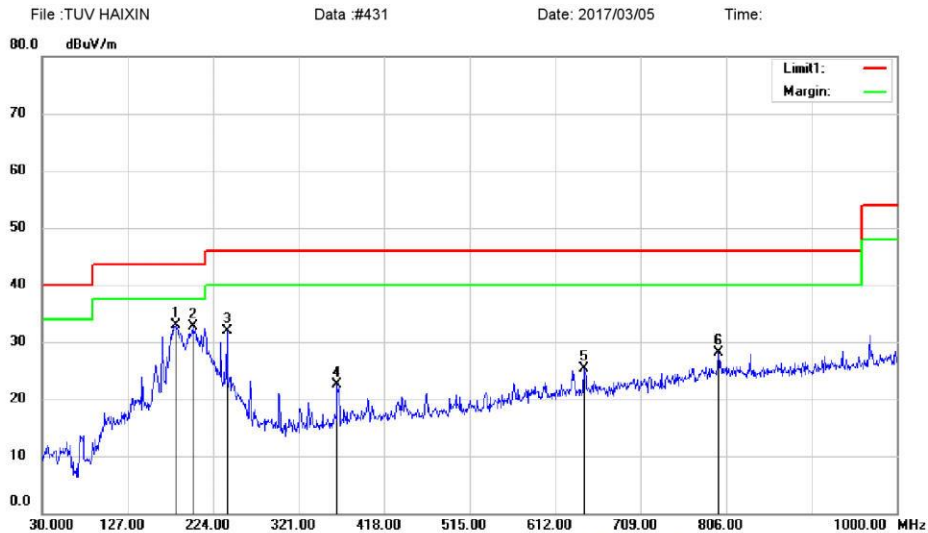

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5755(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	181.3200	52.78	-19.83	32.95	43.50	-10.55	QP			
2		200.7200	48.92	-16.14	32.78	43.50	-10.72	QP			
3		239.5200	45.98	-14.09	31.89	46.00	-14.11	QP			
4		364.6500	32.81	-10.29	22.52	46.00	-23.48	QP			
5		644.9800	29.93	-4.58	25.35	46.00	-20.65	QP			
6		797.2700	30.19	-2.07	28.12	46.00	-17.88	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

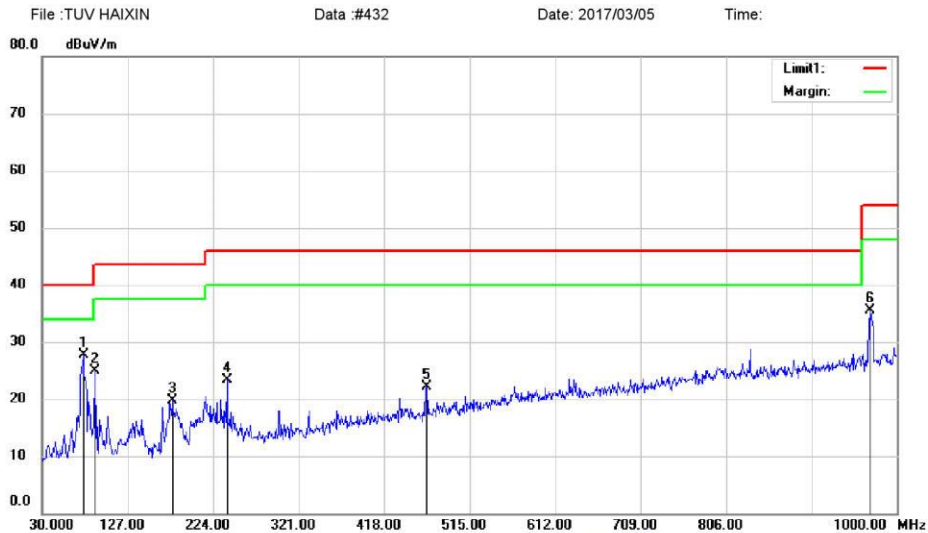

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5755(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	47.97	-20.32	27.65	40.00	-12.35	QP			
2		90.1400	41.22	-16.41	24.81	43.50	-18.69	QP			
3		177.4400	36.84	-17.20	19.64	43.50	-23.86	QP			
4		239.5200	37.45	-14.09	23.36	46.00	-22.64	QP			
5		466.5000	30.38	-8.30	22.08	46.00	-23.92	QP			
6		969.9300	35.62	-0.19	35.43	54.00	-18.57	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

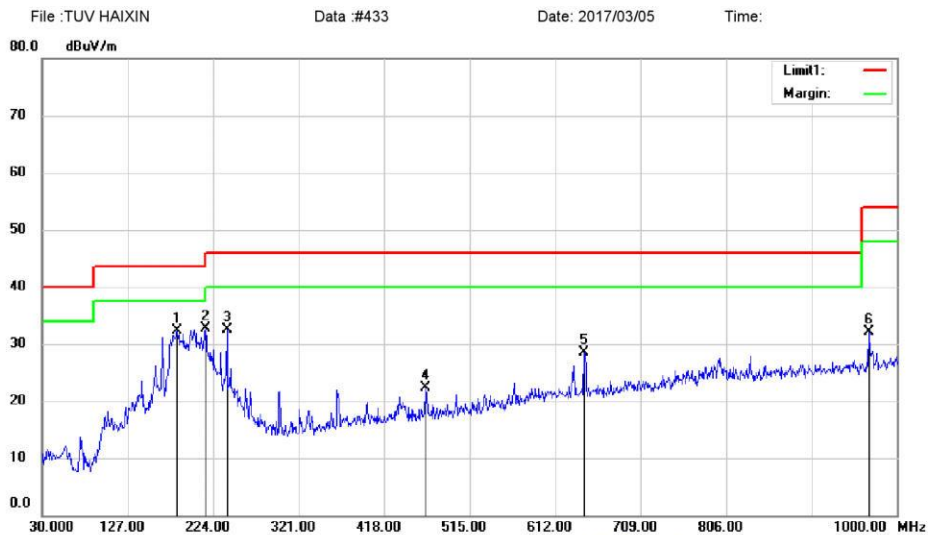

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5670(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		183.2600	52.18	-19.84	32.34	43.50	-11.16			QP	
2	*	215.2700	47.61	-14.92	32.69	43.50	-10.81			QP	
3		239.5200	46.60	-14.09	32.51	46.00	-13.49			QP	
4		464.5600	30.61	-8.38	22.23	46.00	-23.77			QP	
5		644.9800	33.02	-4.58	28.44	46.00	-17.56			QP	
6		967.9900	32.29	-0.20	32.09	54.00	-21.91			QP	

\*:Maximum data x:Over limit !:over margin


Operator: KK



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

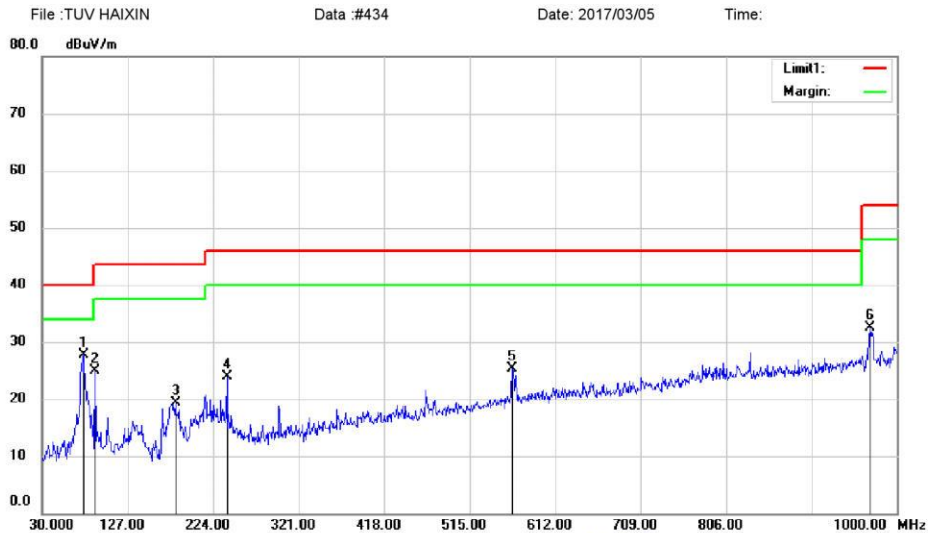

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5670(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	48.01	-20.32	27.69	40.00	-12.31	QP			
2		90.1400	41.27	-16.41	24.86	43.50	-18.64	QP			
3		181.3200	36.10	-16.83	19.27	43.50	-24.23	QP			
4		239.5200	37.91	-14.09	23.82	46.00	-22.18	QP			
5		563.5000	31.17	-5.95	25.22	46.00	-20.78	QP			
6		969.9300	32.63	-0.19	32.44	54.00	-21.56	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

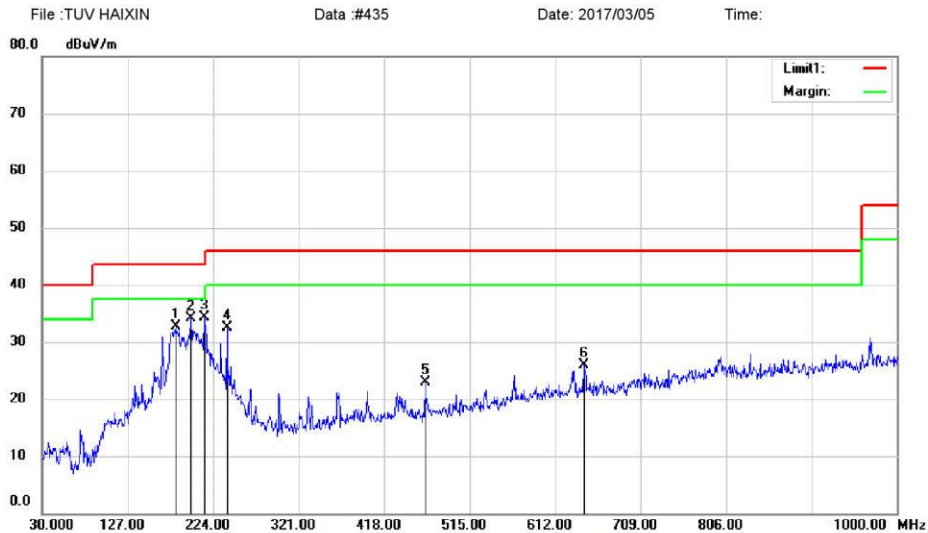

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5590(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		181.3200	52.62	-19.83	32.79	43.50	-10.71	QP		
2		198.7800	50.43	-16.27	34.16	43.50	-9.34	QP		
3	*	214.3000	49.30	-15.01	34.29	43.50	-9.21	QP		
4		239.5200	46.63	-14.09	32.54	46.00	-13.46	QP		
5		464.5600	31.26	-8.38	22.88	46.00	-23.12	QP		
6		644.9800	30.48	-4.58	25.90	46.00	-20.10	QP		

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

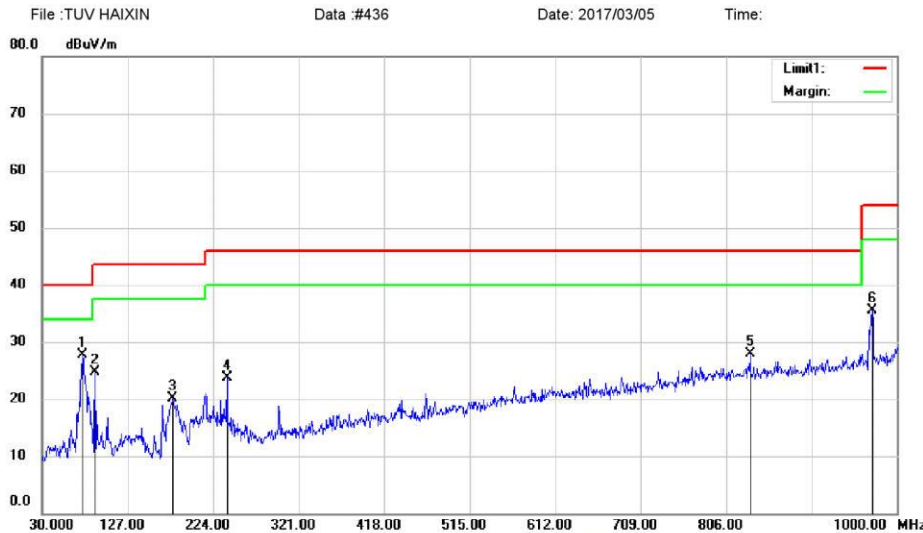

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5590(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	75.5900	48.31	-20.54	27.77	40.00	-12.23	QP			
2		90.1400	41.14	-16.41	24.73	43.50	-18.77	QP			
3		178.4100	37.08	-17.05	20.03	43.50	-23.47	QP			
4		239.5200	37.83	-14.09	23.74	46.00	-22.26	QP			
5		833.1600	29.66	-1.67	27.99	46.00	-18.01	QP			
6		971.8700	35.62	-0.16	35.46	54.00	-18.54	QP			

\*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

File: TUV HAIXIN Data: #437 Date: 2017/03/05 Time:

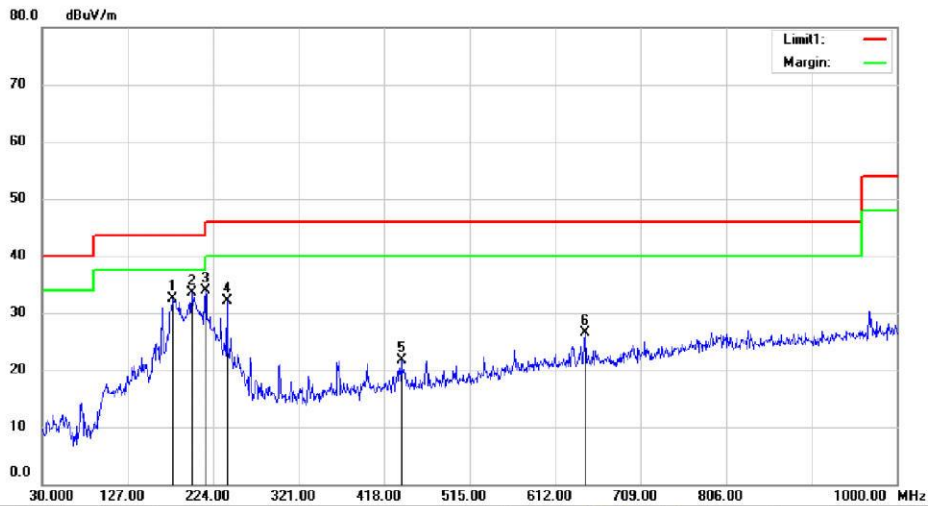

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5510(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		178.4100	52.51	-20.05	32.46	43.50	-11.04			QP	
2		199.7500	49.62	-16.21	33.41	43.50	-10.09			QP	
3	*	215.2700	48.84	-14.92	33.92	43.50	-9.58			QP	
4		239.5200	46.22	-14.09	32.13	46.00	-13.87			QP	
5		437.4000	30.40	-8.65	21.75	46.00	-24.25			QP	
6		645.9500	31.06	-4.56	26.50	46.00	-19.50			QP	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

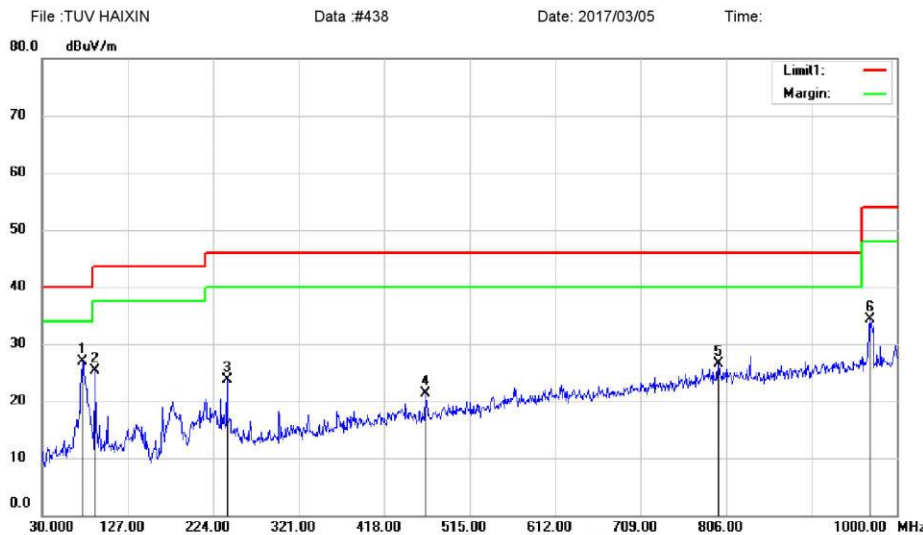

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5510(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	75.5900	47.37	-20.54	26.83	40.00	-13.17	QP			
2		90.1400	41.64	-16.41	25.23	43.50	-18.27	QP			
3		239.5200	37.86	-14.09	23.77	46.00	-22.23	QP			
4		464.5600	29.74	-8.38	21.36	46.00	-24.64	QP			
5		797.2700	28.66	-2.07	26.59	46.00	-19.41	QP			
6		968.9600	34.46	-0.20	34.26	54.00	-19.74	QP			

\*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

File: TUV HAIXIN Data: #439 Date: 2017/03/05 Time:

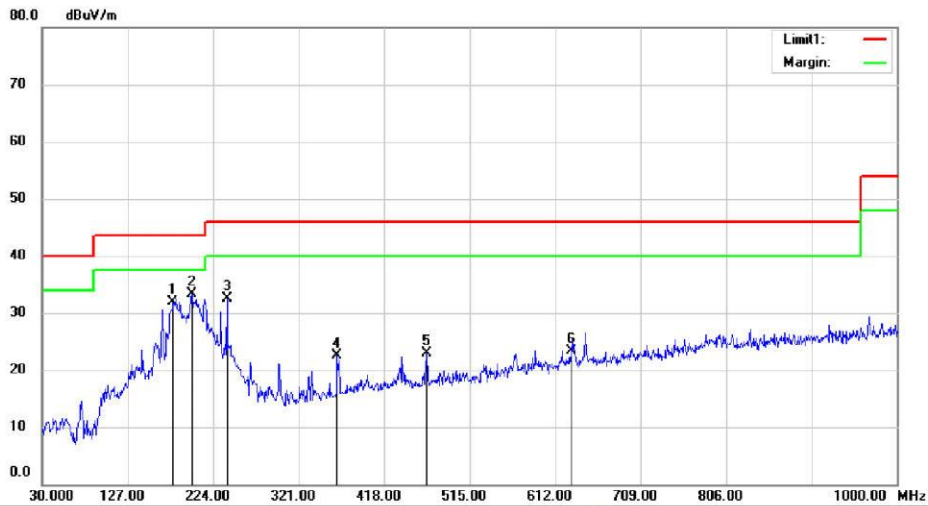

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5310(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		178.4100	52.03	-20.05	31.98	43.50	-11.52	QP		
2	*	199.7500	49.58	-16.21	33.37	43.50	-10.13	QP		
3		239.5200	46.51	-14.09	32.42	46.00	-13.58	QP		
4		364.6500	32.84	-10.29	22.55	46.00	-23.45	QP		
5		466.5000	31.12	-8.30	22.82	46.00	-23.18	QP		
6		630.4300	28.03	-4.73	23.30	46.00	-22.70	QP		

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

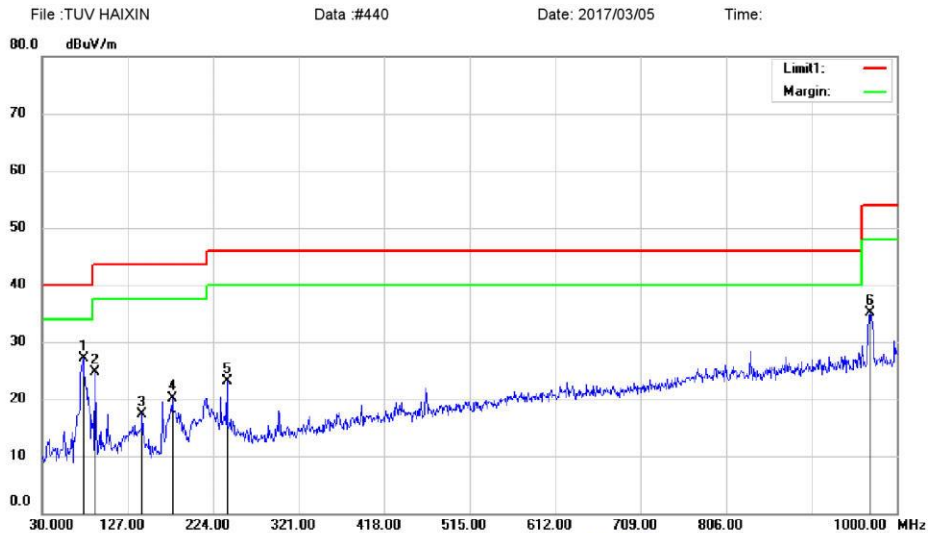

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5310(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	76.5600	47.39	-20.32	27.07	40.00	-12.93	QP			
2		90.1400	41.18	-16.41	24.77	43.50	-18.73	QP			
3		143.4900	36.45	-19.09	17.36	43.50	-26.14	QP			
4		177.4400	37.24	-17.20	20.04	43.50	-23.46	QP			
5		239.5200	37.17	-14.09	23.08	46.00	-22.92	QP			
6		969.9300	35.34	-0.19	35.15	54.00	-18.85	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

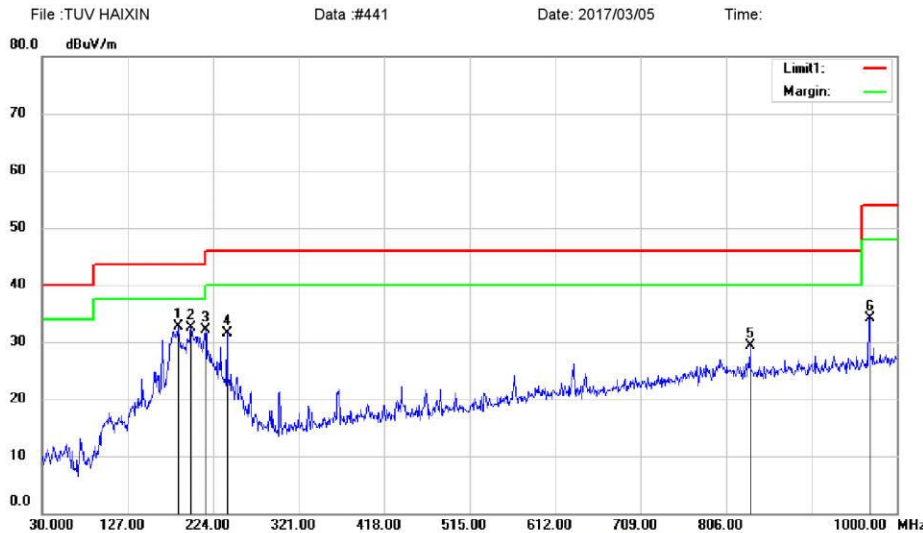

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5270(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	184.2300	52.54	-19.83	32.71	43.50	-10.79	QP			
2		198.7800	48.73	-16.27	32.46	43.50	-11.04	QP			
3		215.2700	47.06	-14.92	32.14	43.50	-11.36	QP			
4		239.5200	45.50	-14.09	31.41	46.00	-14.59	QP			
5		833.1600	31.06	-1.67	29.39	46.00	-16.61	QP			
6		968.9600	34.35	-0.20	34.15	54.00	-19.85	QP			


\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

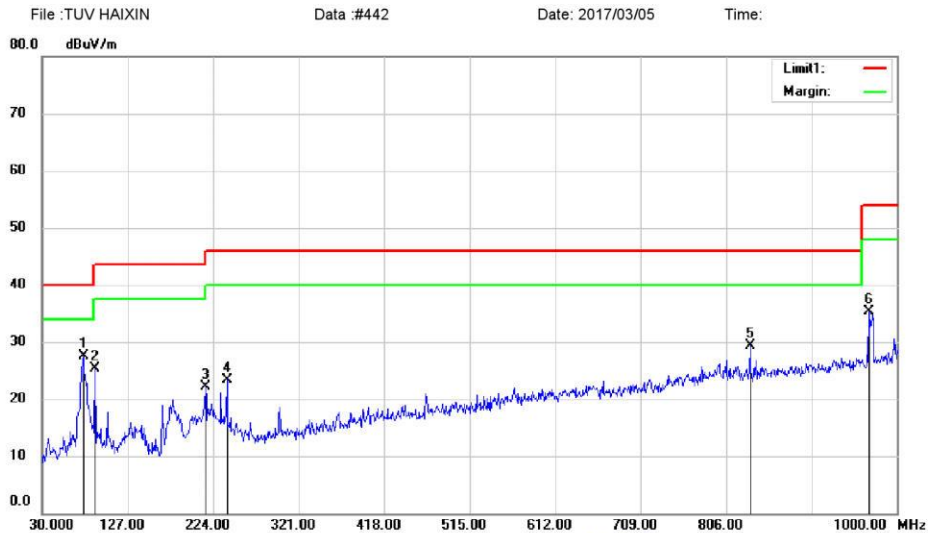

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5270(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	76.5600	47.76	-20.32	27.44	40.00	-12.56	QP		
2		90.1400	41.77	-16.41	25.36	43.50	-18.14	QP		
3		215.2700	37.01	-14.92	22.09	43.50	-21.41	QP		
4		239.5200	37.43	-14.09	23.34	46.00	-22.66	QP		
5		833.1600	30.92	-1.67	29.25	46.00	-16.75	QP		
6		967.9900	35.52	-0.20	35.32	54.00	-18.68	QP		

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

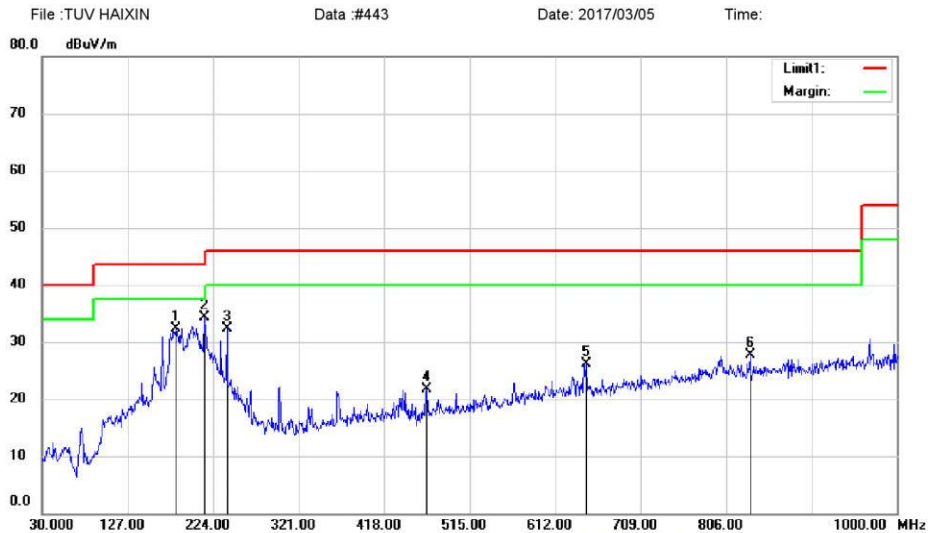

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5230(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		181.3200	52.04	-19.83	32.21	43.50	-11.29	QP		
2	*	214.3000	49.27	-15.01	34.26	43.50	-9.24	QP		
3		239.5200	46.38	-14.09	32.29	46.00	-13.71	QP		
4		466.5000	30.03	-8.30	21.73	46.00	-24.27	QP		
5		647.8900	30.74	-4.54	26.20	46.00	-19.80	QP		
6		833.1600	29.42	-1.67	27.75	46.00	-18.25	QP		

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

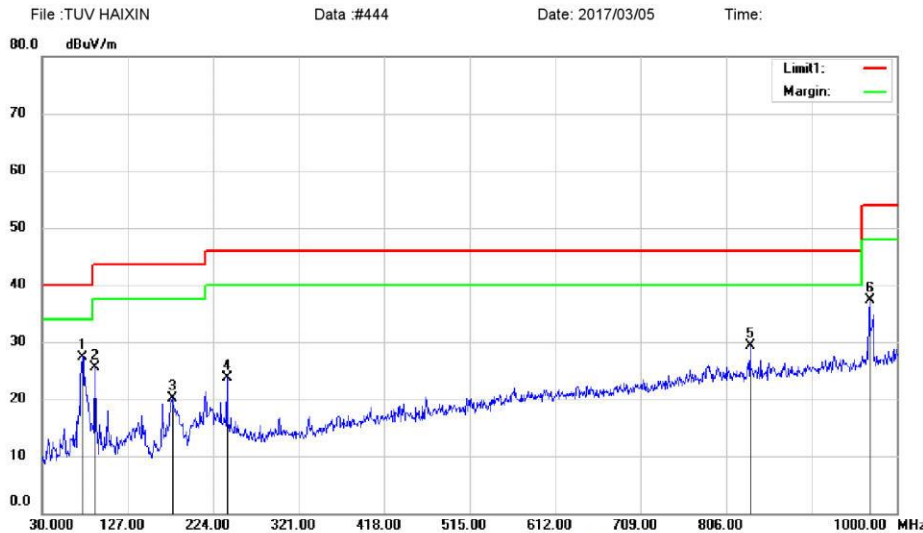

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5230(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	75.5900	47.86	-20.54	27.32	40.00	-12.68	QP		
2		90.1400	41.88	-16.41	25.47	43.50	-18.03	QP		
3		177.4400	37.40	-17.20	20.20	43.50	-23.30	QP		
4		239.5200	37.73	-14.09	23.64	46.00	-22.36	QP		
5		833.1600	31.04	-1.67	29.37	46.00	-16.63	QP		
6		968.9600	37.44	-0.20	37.24	54.00	-16.76	QP		

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

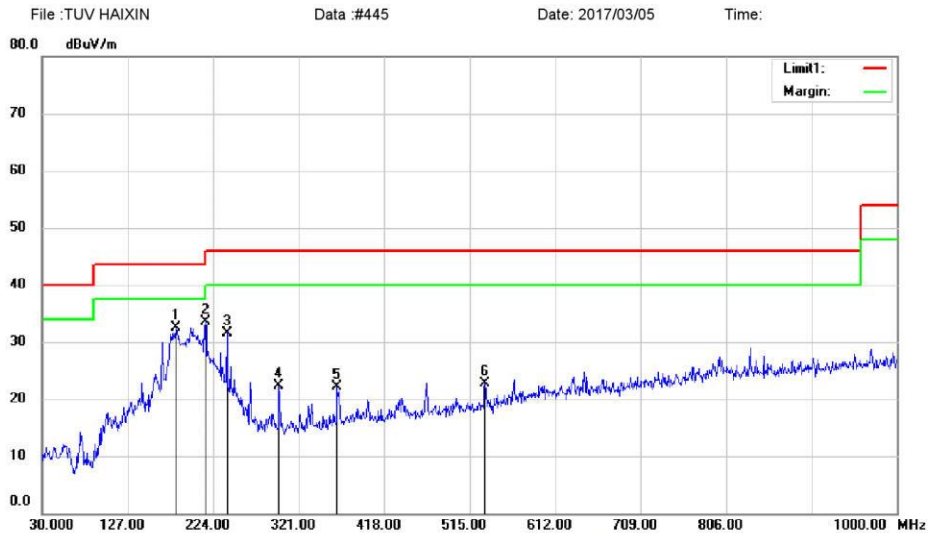

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5190(Ant0+Ant1)  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		182.2900	52.29	-19.83	32.46	43.50	-11.04	QP			
2	*	215.2700	48.44	-14.92	33.52	43.50	-9.98	QP			
3		239.5200	45.69	-14.09	31.60	46.00	-14.40	QP			
4		298.6900	34.32	-12.07	22.25	46.00	-23.75	QP			
5		364.6500	32.44	-10.29	22.15	46.00	-23.85	QP			
6		532.4600	29.35	-6.72	22.63	46.00	-23.37	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

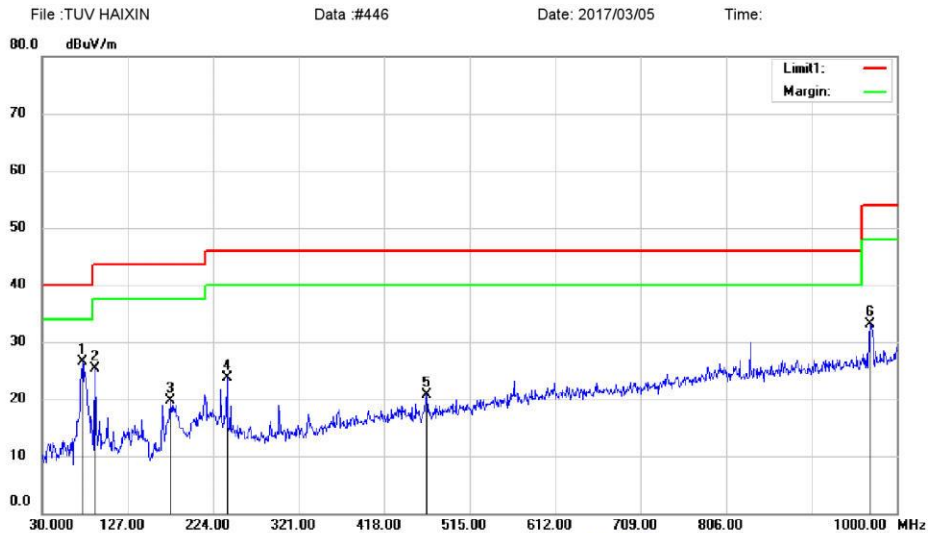

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5190(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	75.5900	47.07	-20.54	26.53	40.00	-13.47	QP		
2		90.1400	41.69	-16.41	25.28	43.50	-18.22	QP		
3		175.5000	37.21	-17.48	19.73	43.50	-23.77	QP		
4		239.5200	37.77	-14.09	23.68	46.00	-22.32	QP		
5		466.5000	28.92	-8.30	20.62	46.00	-25.38	QP		
6		968.9600	33.31	-0.20	33.11	54.00	-20.89	QP		


\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

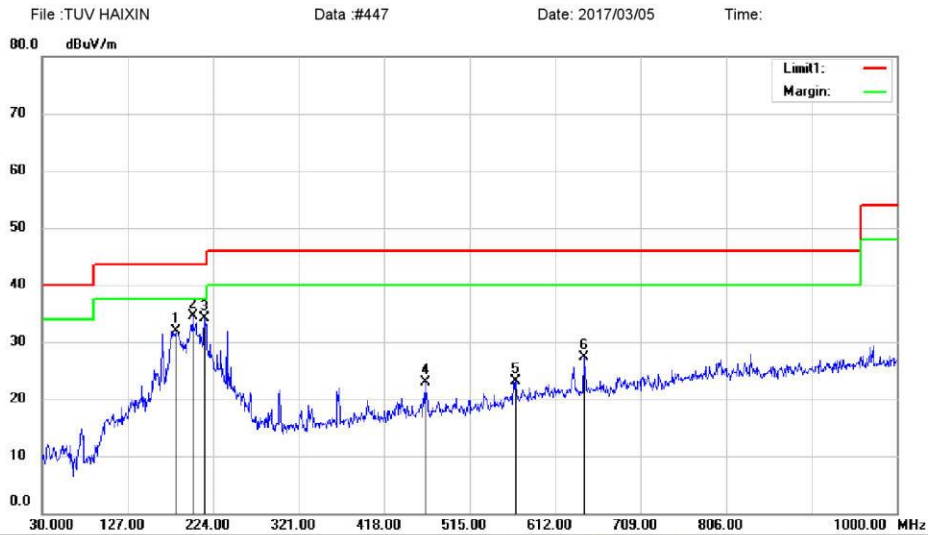

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT20 5180(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		182.2900	51.82	-19.83	31.99	43.50	-11.51	QP		
2	*	200.7200	50.57	-16.14	34.43	43.50	-9.07	QP		
3		214.3000	49.06	-15.01	34.05	43.50	-9.45	QP		
4		464.5600	31.20	-8.38	22.82	46.00	-23.18	QP		
5		567.3800	28.96	-5.86	23.10	46.00	-22.90	QP		
6		644.9800	31.85	-4.58	27.27	46.00	-18.73	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK




Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

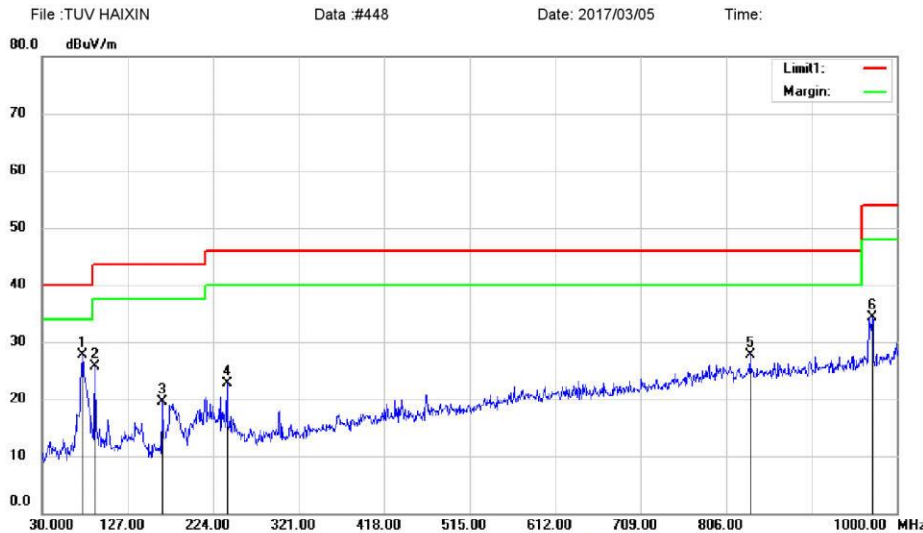

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT20 5180(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	75.5900	48.32	-20.54	27.78	40.00	-12.22	QP			
2		90.1400	42.04	-16.41	25.63	43.50	-17.87	QP			
3		166.7700	37.86	-18.31	19.55	43.50	-23.95	QP			
4		239.5200	36.87	-14.09	22.78	46.00	-23.22	QP			
5		833.1600	29.34	-1.67	27.67	46.00	-18.33	QP			
6		971.8700	34.47	-0.16	34.31	54.00	-19.69	QP			

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

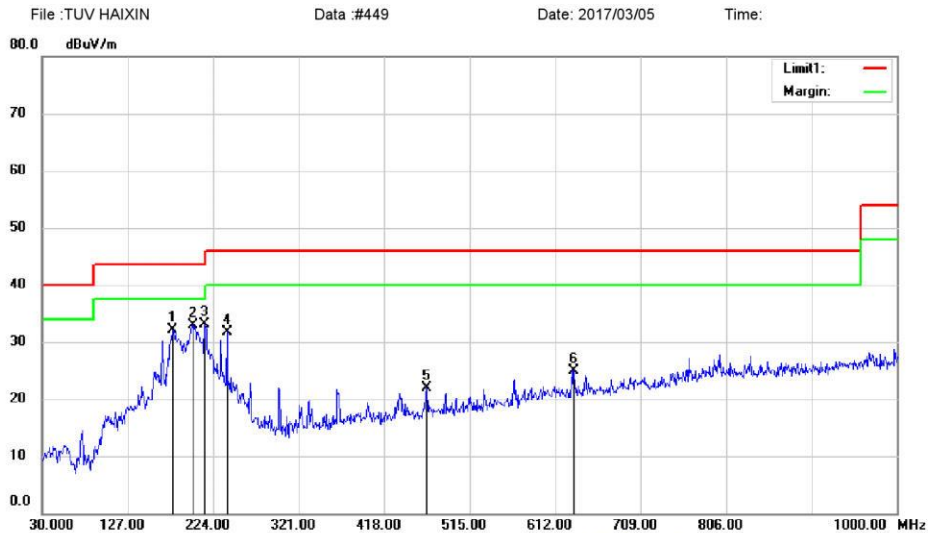

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT20 5200(Ant0+Ant1)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		177.4400	52.31	-20.20	32.11	43.50	-11.39	QP		
2		200.7200	49.09	-16.14	32.95	43.50	-10.55	QP		
3	*	214.3000	48.16	-15.01	33.15	43.50	-10.35	QP		
4		239.5200	45.86	-14.09	31.77	46.00	-14.23	QP		
5		466.5000	30.22	-8.30	21.92	46.00	-24.08	QP		
6		633.3400	29.68	-4.69	24.99	46.00	-21.01	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK