


Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

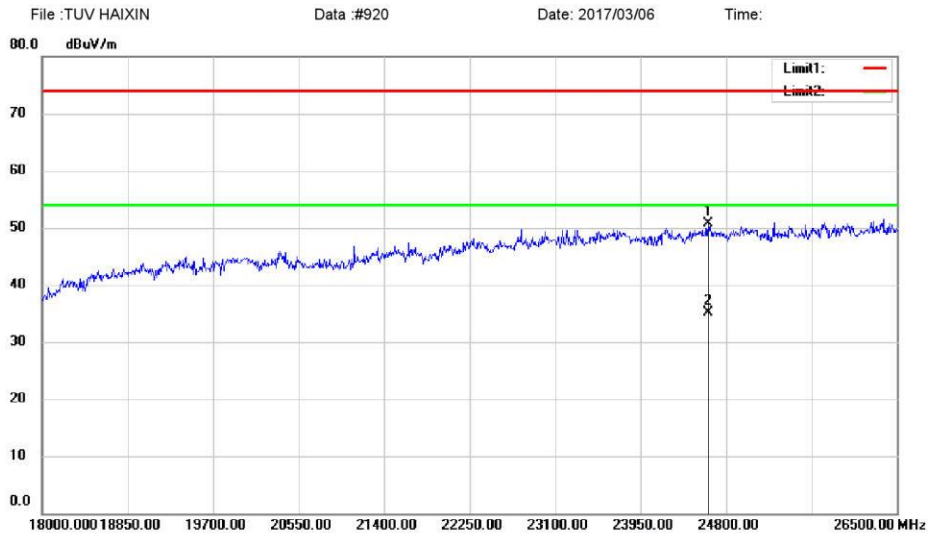

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5510(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24621.50	87.69	-37.06	50.63	74.00	-23.37	peak	0	
2	*	24621.50	72.16	-37.06	35.10	54.00	-18.90	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

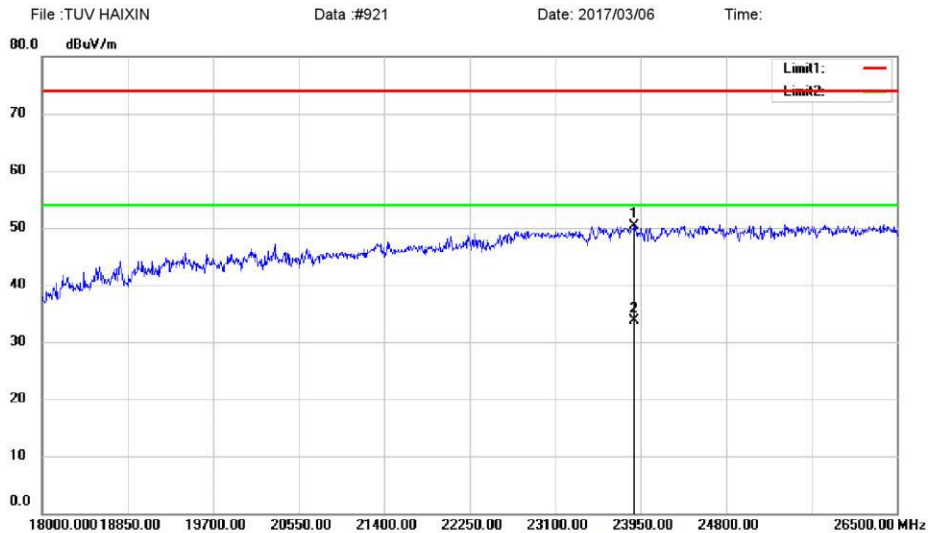

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5590(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23882.00	87.46	-37.25	50.21	74.00	-23.79	peak	0	
2	*	23882.00	70.95	-37.25	33.70	54.00	-20.30	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

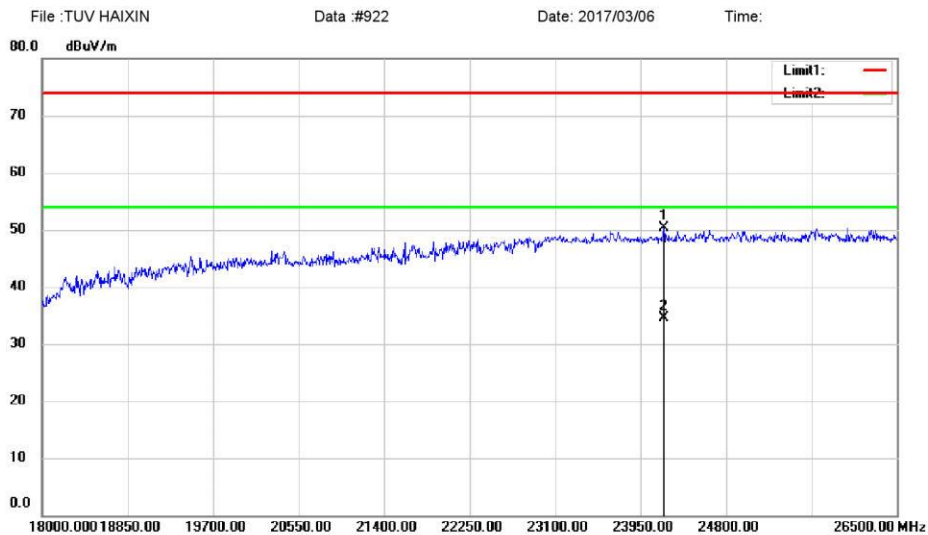

Site: 3m Chamber #3      Polarization: **Vertical**      Temperature: 24 C  
 Limit: (RE)FCC PART 15 C      Power:      Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5590(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24179.50	87.46	-37.11	50.35	74.00	-23.65	peak	0	
2	*	24179.50	71.71	-37.11	34.60	54.00	-19.40	AVG	0	

\*:Maximum data    x:Over limit    !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

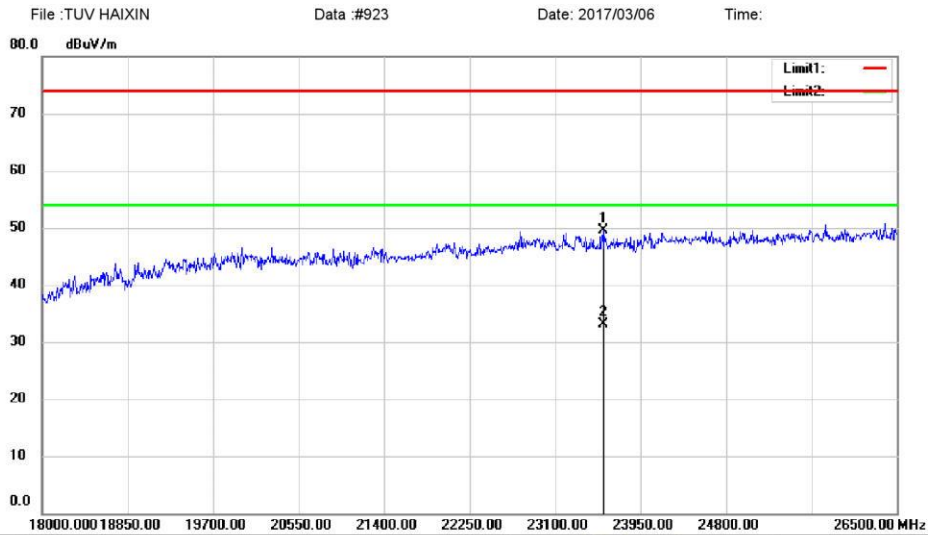

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5670(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23584.50	87.00	-37.57	49.43	74.00	-24.57	peak	0	
2	*	23584.50	70.77	-37.57	33.20	54.00	-20.80	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

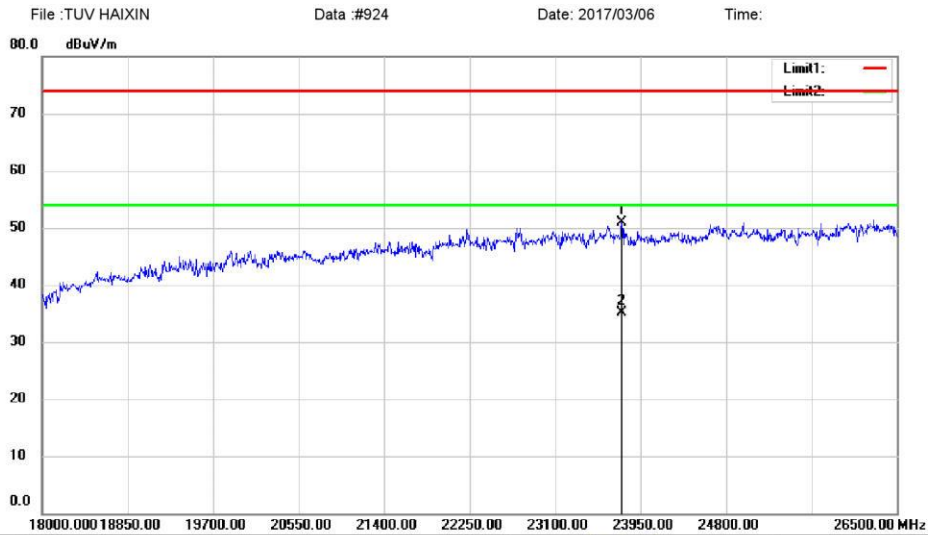

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5670(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23763.00	88.29	-37.38	50.91	74.00	-23.09	peak	0	
2	*	23763.00	72.58	-37.38	35.20	54.00	-18.80	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

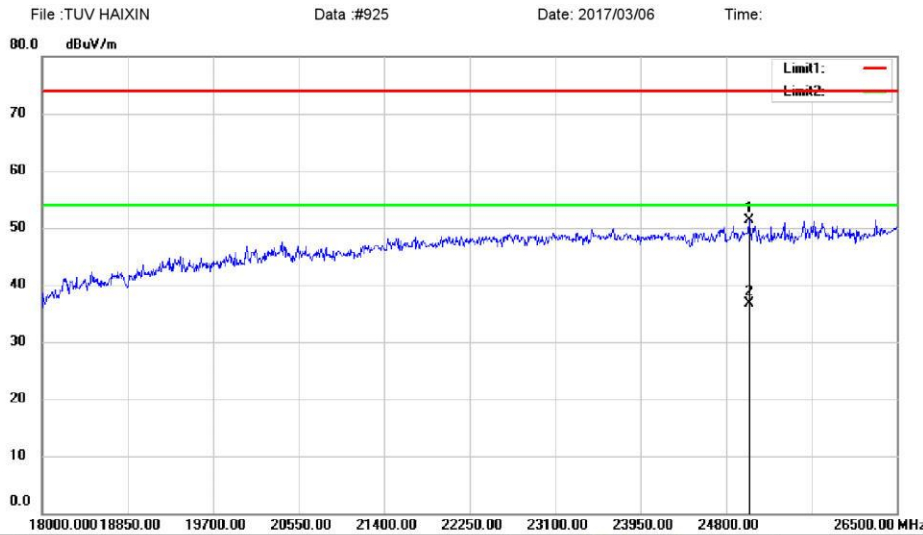

Site: 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: (RE)FCC PART 15 C      Power:      Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5755(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25029.50	88.20	-36.97	51.23	74.00	-22.77	peak	0	
2	*	25029.50	73.67	-36.97	36.70	54.00	-17.30	AVG	0	

\*:Maximum data    x:Over limit    !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

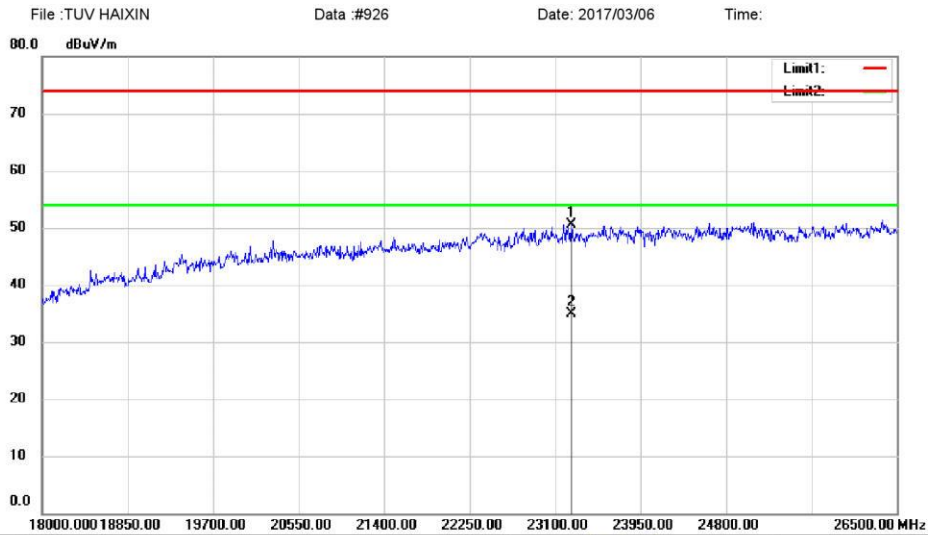

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5755(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23261.50	88.51	-37.91	50.60	74.00	-23.40	peak	0	
2	*	23261.50	72.81	-37.91	34.90	54.00	-19.10	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

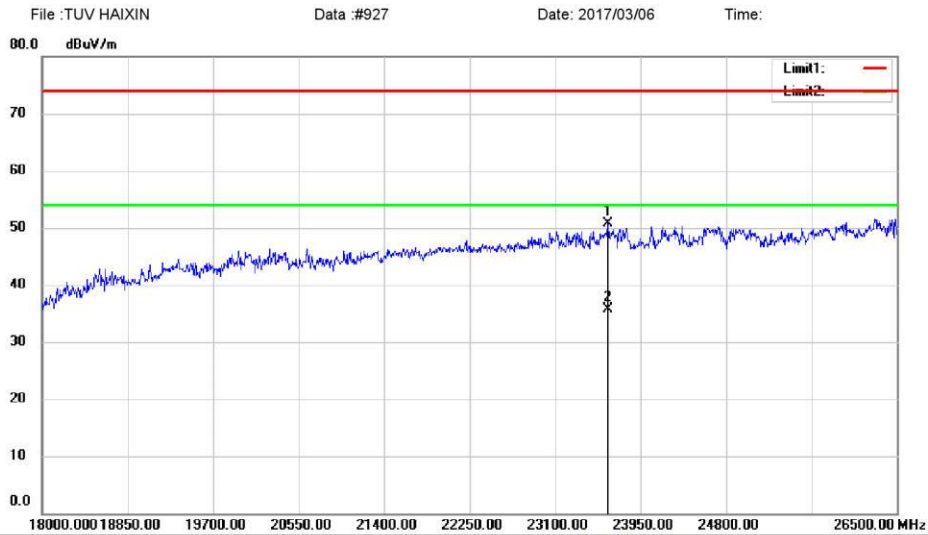

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5795(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23627.00	88.19	-37.52	50.67	74.00	-23.33	peak	0	
2	*	23627.00	73.32	-37.52	35.80	54.00	-18.20	AVG	0	

\*:Maximum data x:Over limit !:over margin

Operator: KK




Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

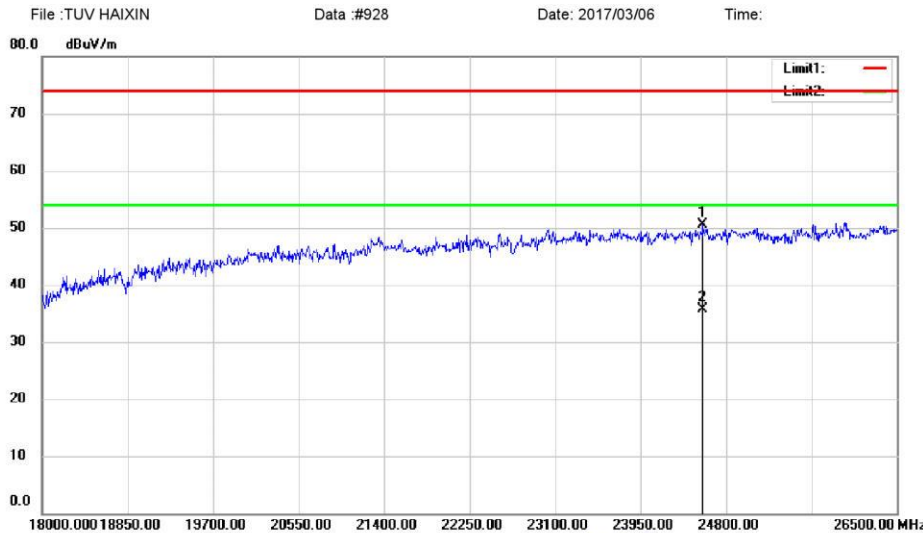

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11nHT40 5795(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24570.50	87.57	-37.06	50.51	74.00	-23.49	peak	0	
2	*	24570.50	72.86	-37.06	35.80	54.00	-18.20	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

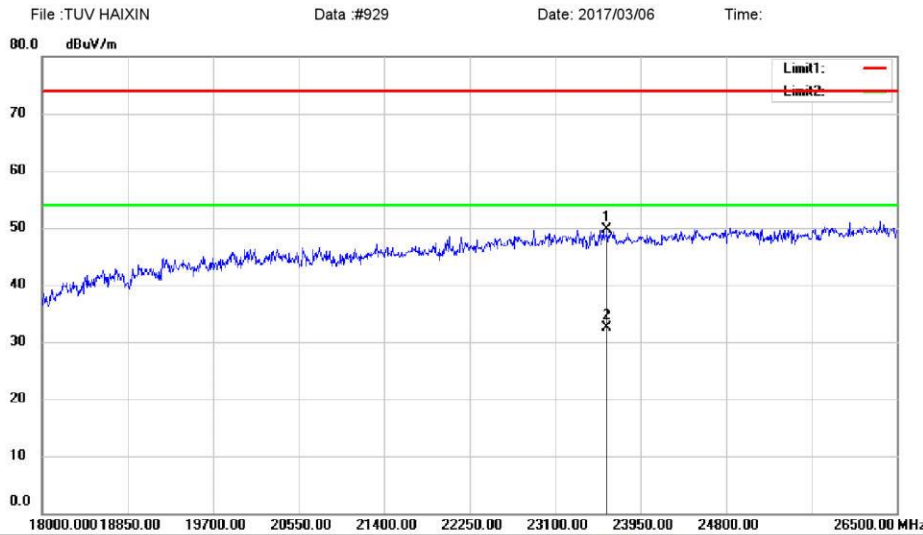

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5795(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23618.50	87.14	-37.53	49.61	74.00	-24.39	peak	0	
2	*	23618.50	70.03	-37.53	32.50	54.00	-21.50	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

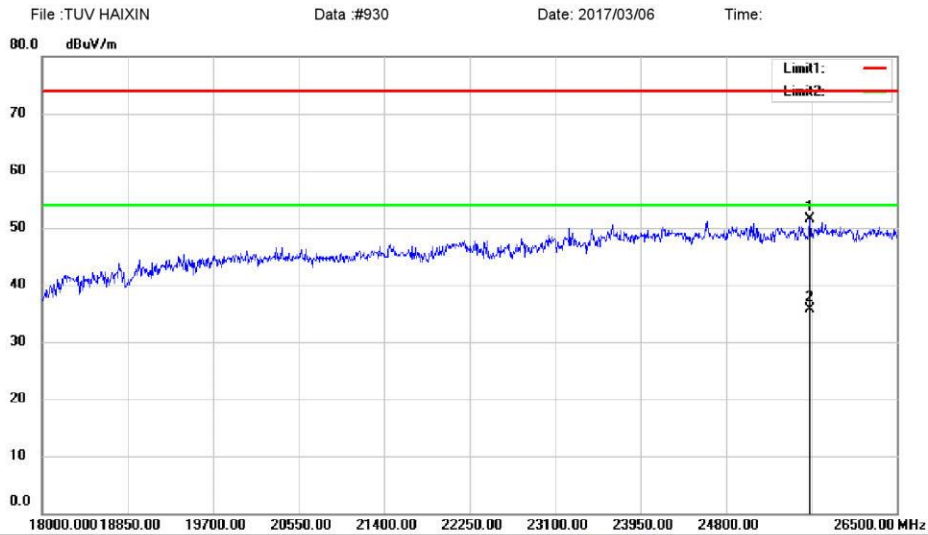

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5795(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25633.00	87.82	-36.24	51.58	74.00	-22.42	peak	0	
2	*	25633.00	72.04	-36.24	35.80	54.00	-18.20	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

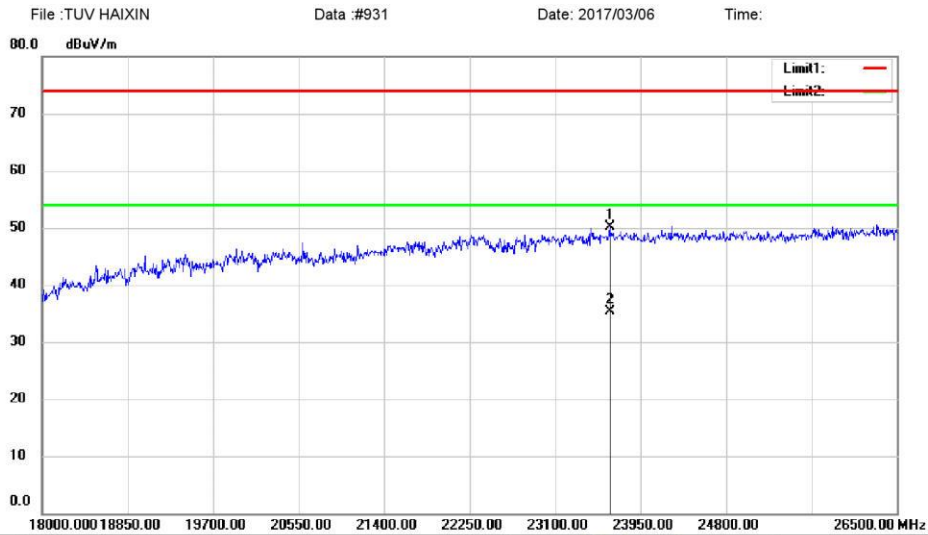

Site: 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: (RE)FCC PART 15 C      Power:      Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5755(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23644.00	87.54	-37.50	50.04	74.00	-23.96	peak	0	
2	*	23644.00	72.90	-37.50	35.40	54.00	-18.60	AVG	0	

\*:Maximum data    x:Over limit    !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

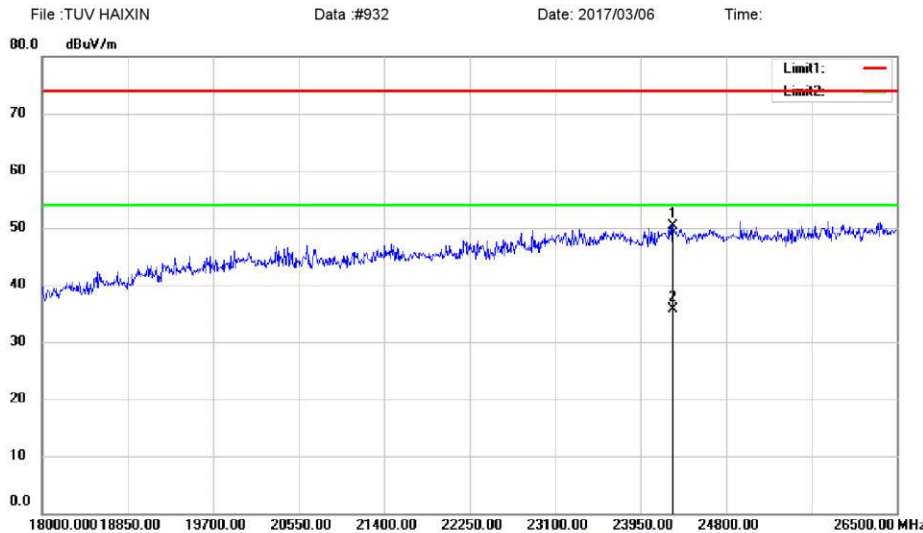

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5755(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24273.00	87.46	-37.10	50.36	74.00	-23.64	peak	0	
2	*	24273.00	72.90	-37.10	35.80	54.00	-18.20	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

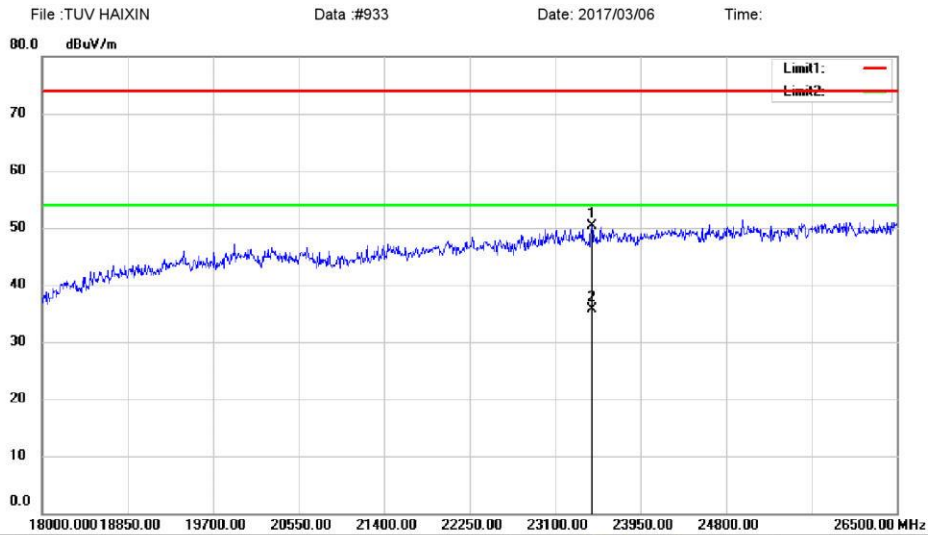

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5670(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23465.50	87.96	-37.69	50.27	74.00	-23.73	peak	0	
2	*	23465.50	73.49	-37.69	35.80	54.00	-18.20	AVG	0	

\*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

File: TUV HAIXIN Data: #934 Date: 2017/03/06 Time:

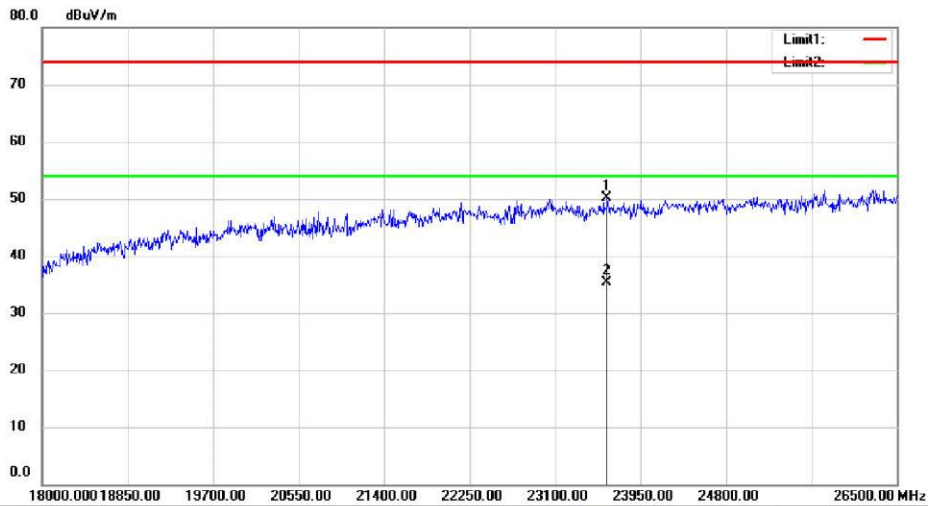

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5670(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23618.50	87.71	-37.53	50.18	74.00	-23.82	peak	0	
2	*	23618.50	72.93	-37.53	35.40	54.00	-18.60	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

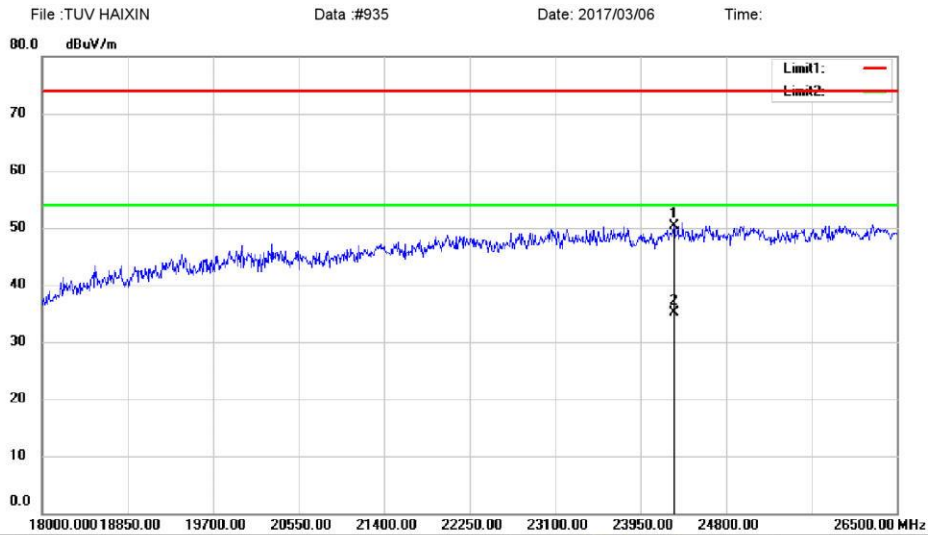

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5590(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24281.50	87.43	-37.10	50.33	74.00	-23.67	peak	0	
2	*	24281.50	72.30	-37.10	35.20	54.00	-18.80	AVG	0	

\*:Maximum data x:Over limit !:over margin

Operator: KK




Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

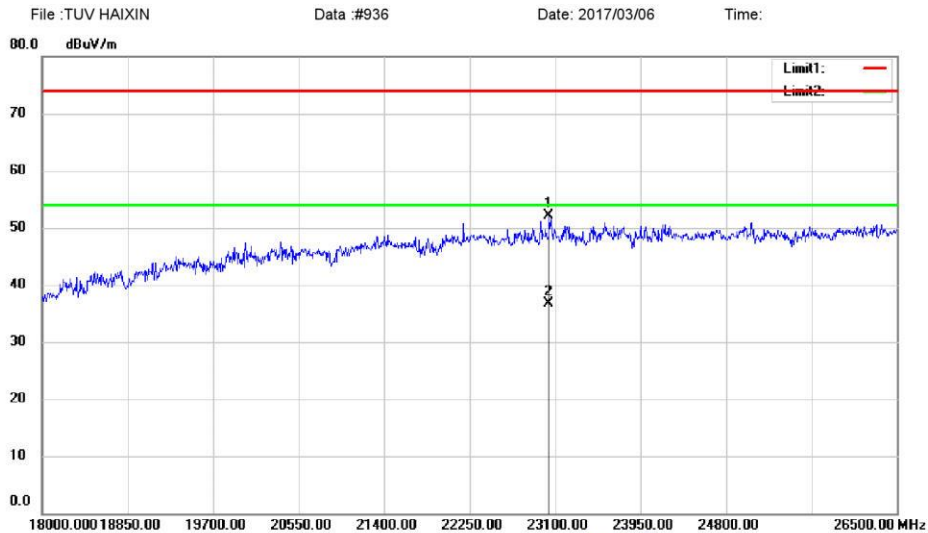

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5590(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23040.50	90.25	-38.14	52.11	74.00	-21.89	peak	0	
2	*	23040.50	74.84	-38.14	36.70	54.00	-17.30	AVG	0	

\*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

File: TUV HAIXIN Data: #937 Date: 2017/03/06 Time:

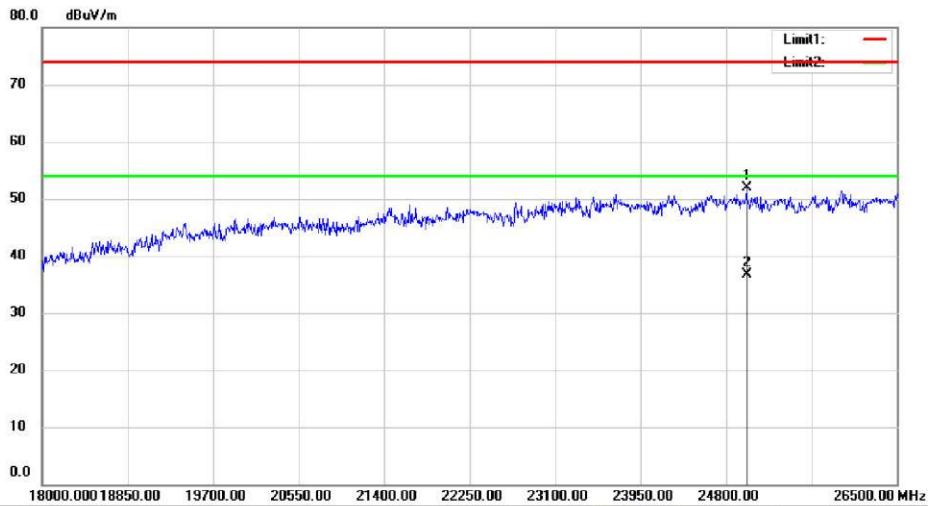

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5510(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25004.00	88.84	-37.01	51.83	74.00	-22.17	peak	0	
2	*	25004.00	73.71	-37.01	36.70	54.00	-17.30	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

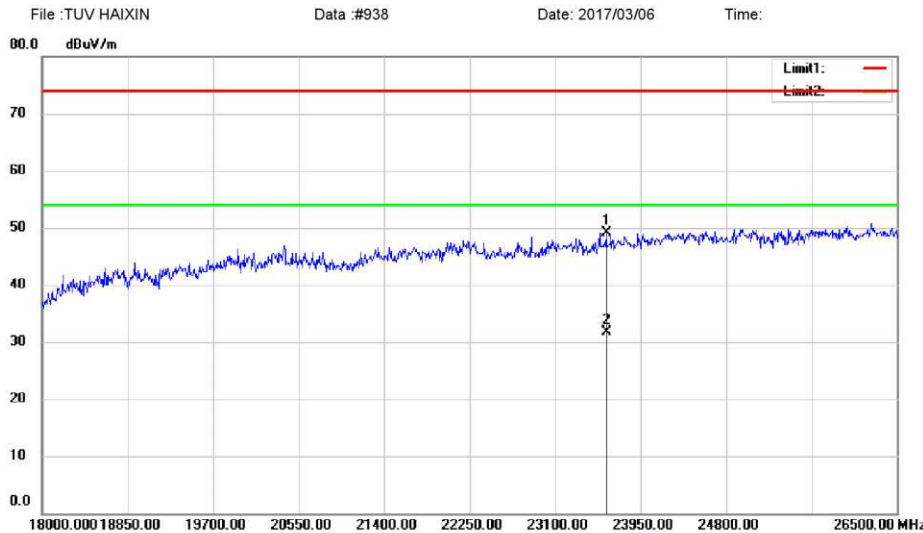

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5510(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23610.00	86.60	-37.54	49.06	74.00	-24.94	peak	0	
2	*	23610.00	69.34	-37.54	31.80	54.00	-22.20	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

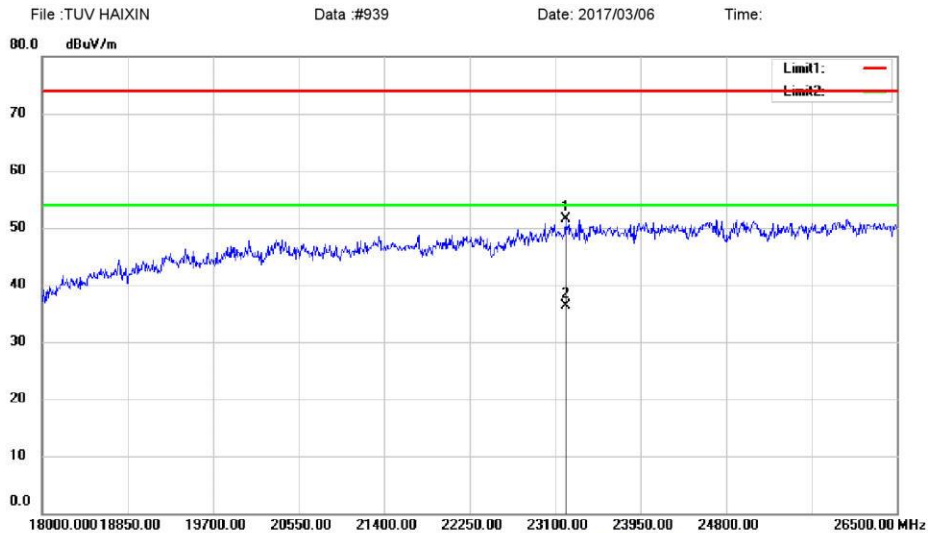

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5310(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23202.00	89.56	-37.97	51.59	74.00	-22.41	peak	0	
2	*	23202.00	74.37	-37.97	36.40	54.00	-17.60	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

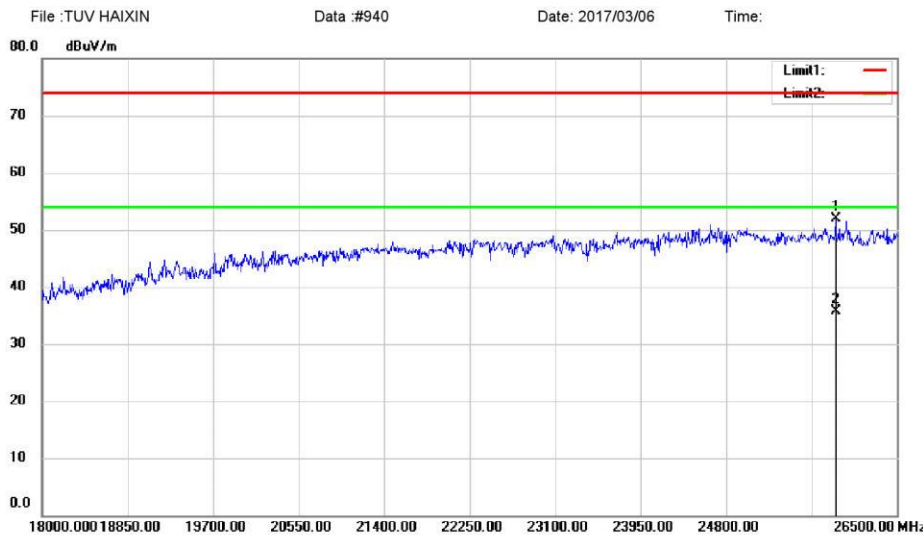

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5310(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25888.00	87.92	-35.93	51.99	74.00	-22.01	peak	0	
2	*	25888.00	71.73	-35.93	35.80	54.00	-18.20	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

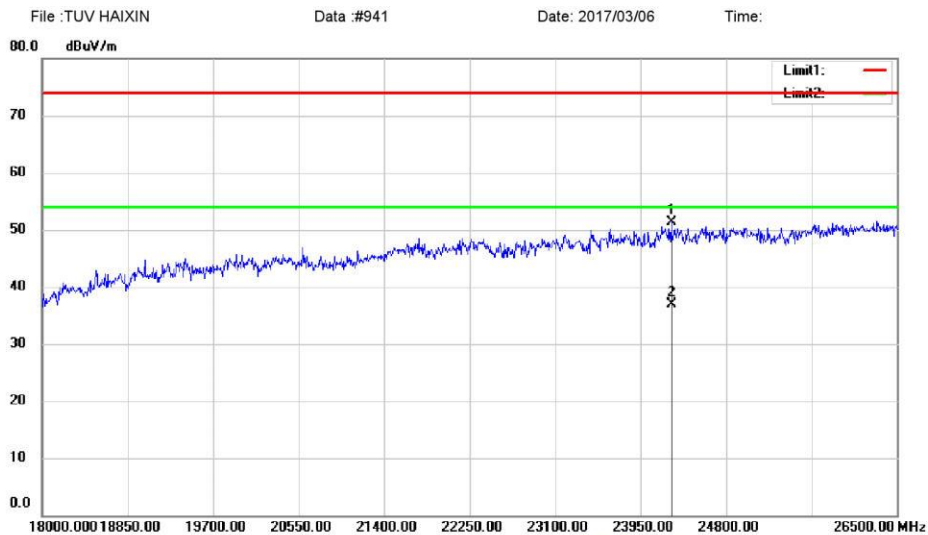

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5270(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24256.00	88.37	-37.10	51.27	74.00	-22.73	peak	0	
2	*	24256.00	74.00	-37.10	36.90	54.00	-17.10	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

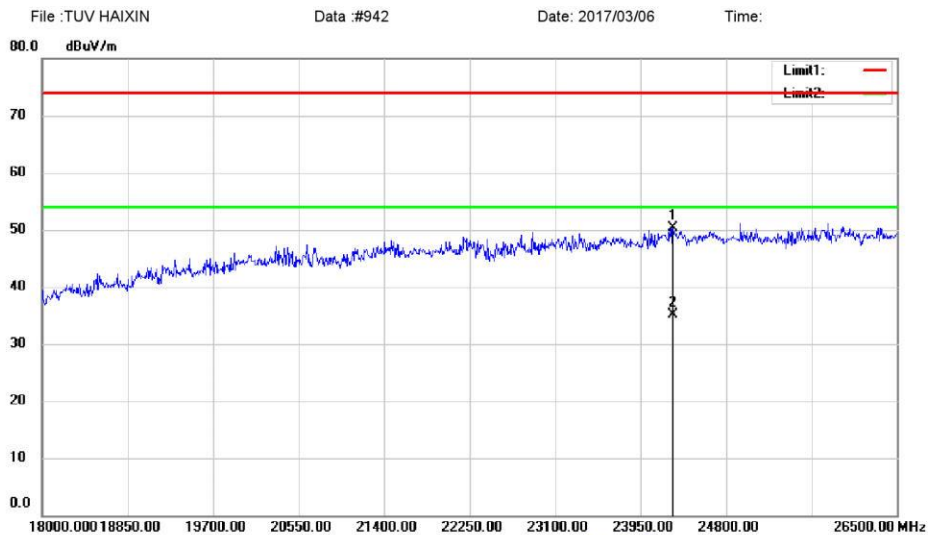

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5270(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24273.00	87.46	-37.10	50.36	74.00	-23.64	peak	0	
2	*	24273.00	72.30	-37.10	35.20	54.00	-18.80	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

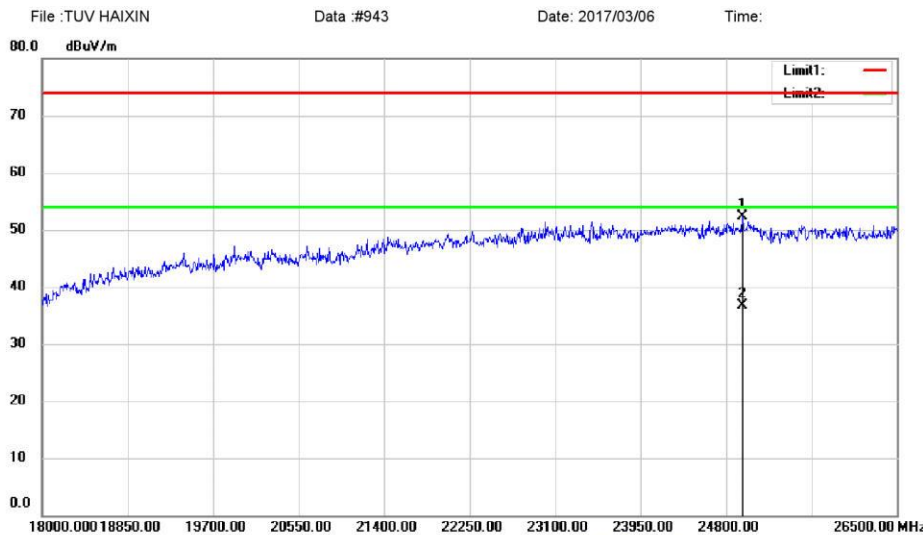

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5230(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24961.50	89.24	-37.01	52.23	74.00	-21.77	peak	0	
2	*	24961.50	73.71	-37.01	36.70	54.00	-17.30	AVG	0	

\*:Maximum data x:Over limit !:over margin

Operator: KK




Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

File: TUV HAIXIN Data: #944 Date: 2017/03/06 Time:

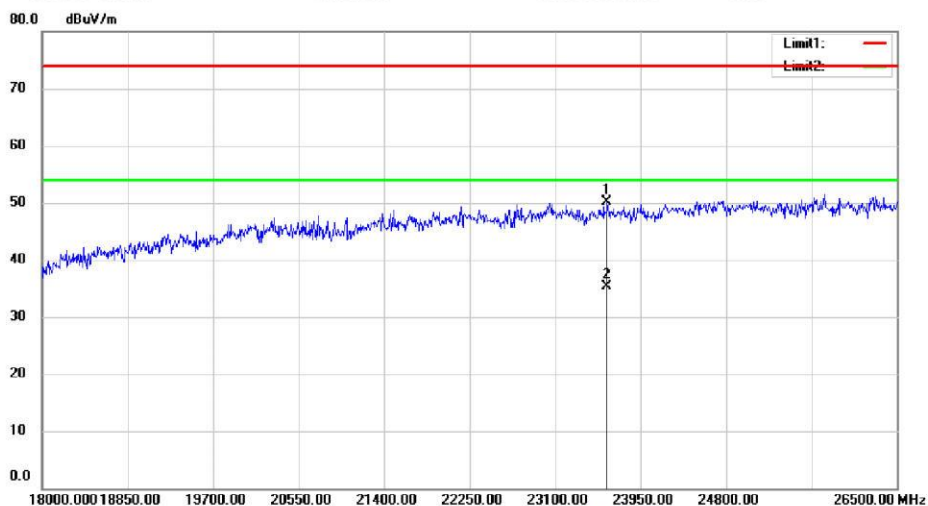

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5230(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23618.50	87.71	-37.53	50.18	74.00	-23.82	peak	0	
2	*	23618.50	72.93	-37.53	35.40	54.00	-18.60	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

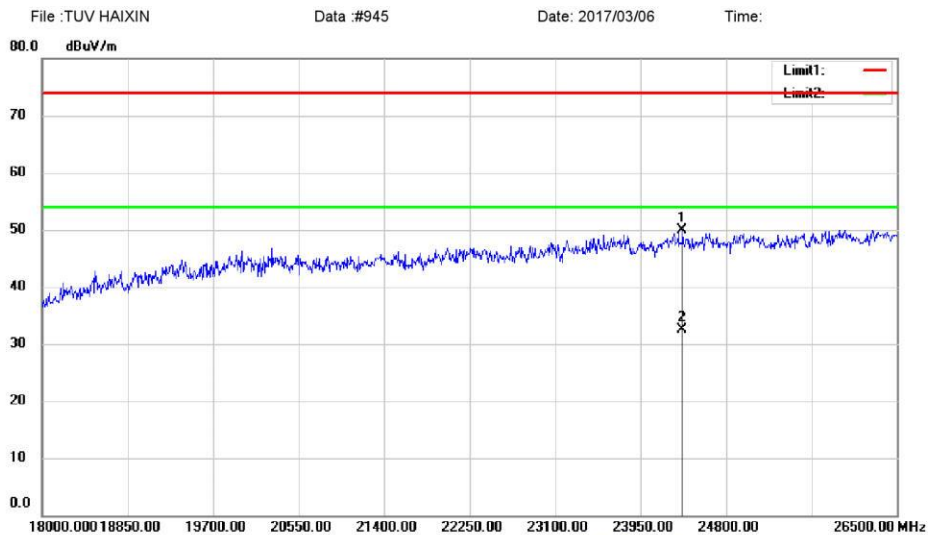

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5190(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24366.50	86.90	-37.09	49.81	74.00	-24.19	peak	0	
2	*	24366.50	69.59	-37.09	32.50	54.00	-21.50	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

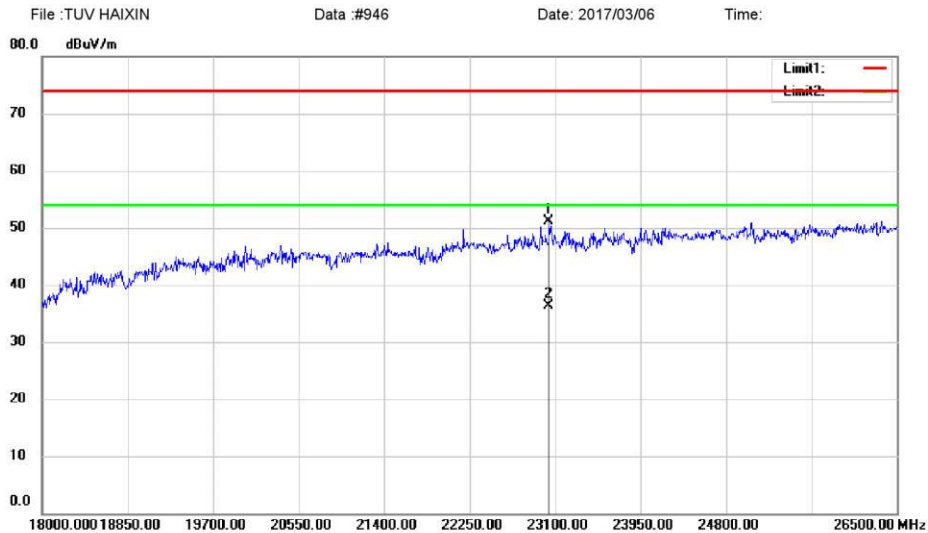

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac40 5190(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23040.50	89.25	-38.14	51.11	74.00	-22.89	peak	0	
2	*	23040.50	74.54	-38.14	36.40	54.00	-17.60	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

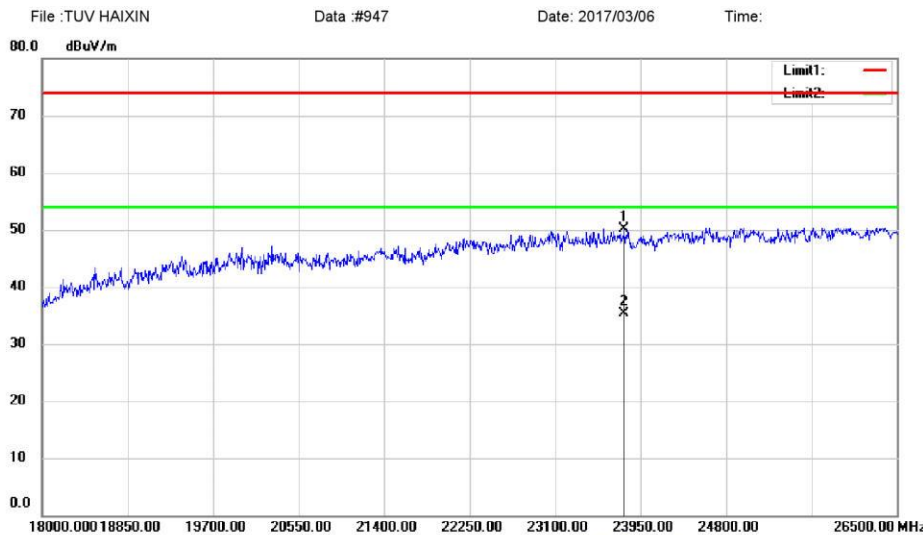

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac80 5210(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23788.50	87.45	-37.35	50.10	74.00	-23.90	peak	0	
2	*	23788.50	72.75	-37.35	35.40	54.00	-18.60	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

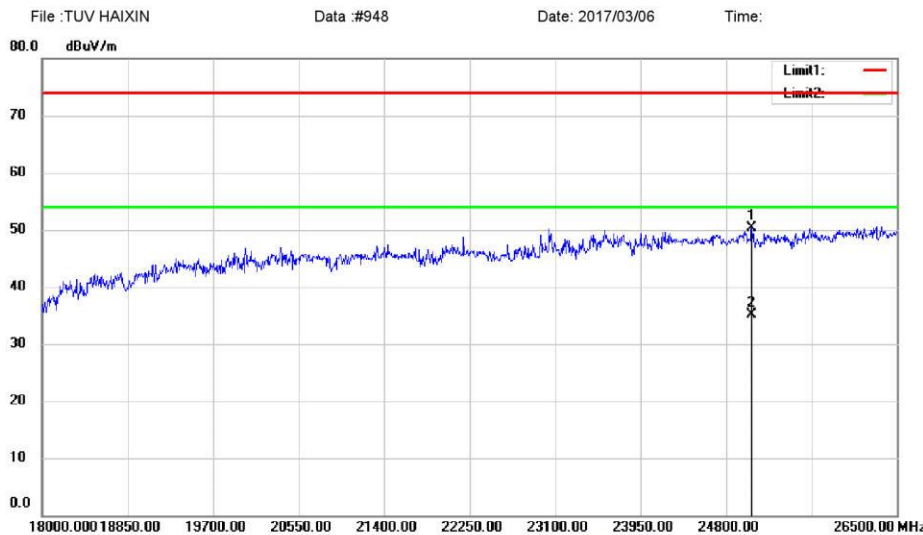

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac80 5210(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25055.00	87.33	-36.94	50.39	74.00	-23.61	peak	0	
2	*	25055.00	72.14	-36.94	35.20	54.00	-18.80	AVG	0	

\*:Maximum data x:Over limit !:over margin

Operator: KK


Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

File: TUV HAIXIN Data: #949 Date: 2017/03/06 Time:

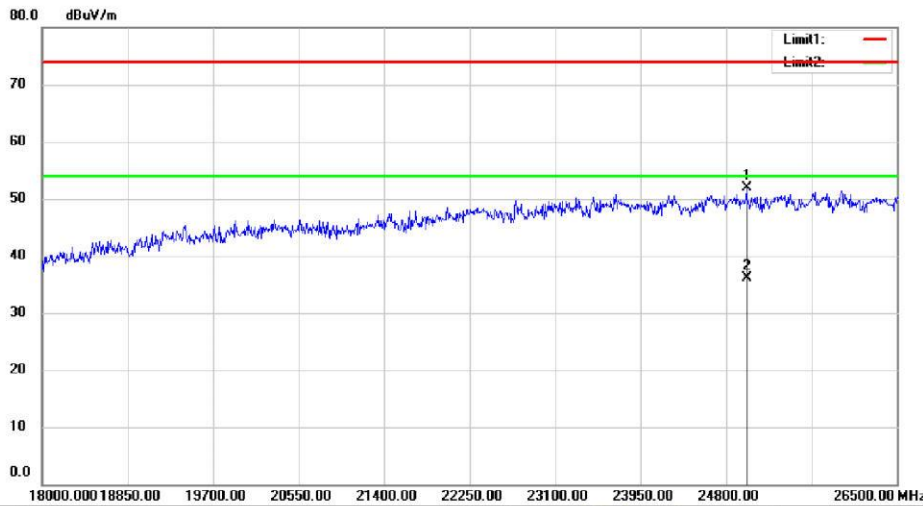

Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac80 5290(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25004.00	88.84	-37.01	51.83	74.00	-22.17	peak	0	
2	*	25004.00	73.11	-37.01	36.10	54.00	-17.90	AVG	0	

\*:Maximum data x:Over limit !:over margin


Operator: KK

Produkte  
 Products

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



**Radiated Emission Measurement**

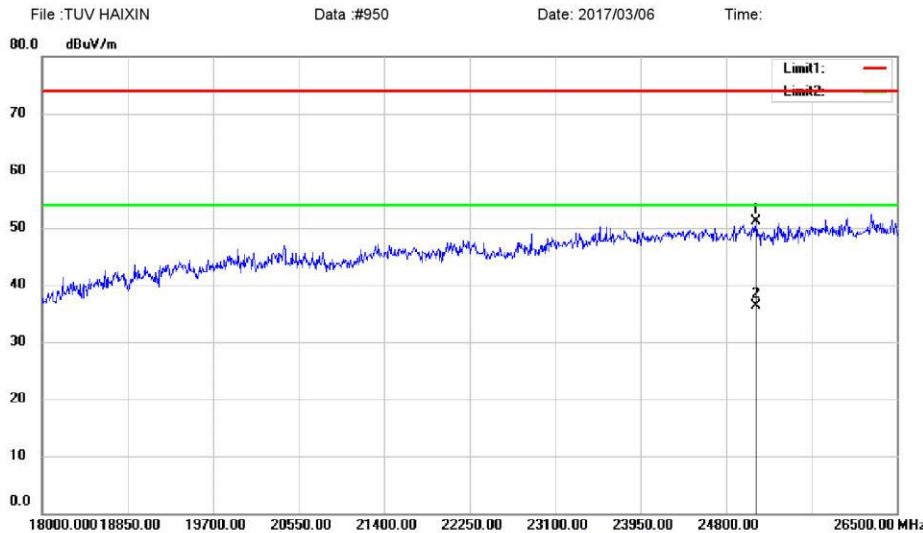

Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 C Power: Humidity: 53 %  
 EUT: WIFI Module  
 M/N:  
 Mode: 11ac80 5290(Ant0)  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25097.50	87.98	-36.89	51.09	74.00	-22.91	peak	0	
2	*	25097.50	73.29	-36.89	36.40	54.00	-17.60	AVG	0	

\*:Maximum data x:Over limit !:over margin

Operator: KK