

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>50074914 001</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	<b>164085698</b>	<b>Seite 1 von 23</b> <i>Page 1 of 23</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	<b>14.02.2017</b>		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Qingdao Intelligent&amp;Precise Electronics Co.,Ltd.</b> No.218,Qianwangang Road Qingdao Economic&Technological Development Zone, Qingdao, Shandong, China				
<b>Prüfgegenstand:</b> <i>Test item:</i>	IEEE 802.11 a/b/g/n/ac 2.4GHz+5GHz 2T2R USB Module				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	ZDGFMT7612U				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Certification				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part15: Subpart C Section 15.247 CFR47 FCC Part15: Subpart C Section 15.207 CFR47 FCC Part15: Subpart C Section 15.209 CFR47 FCC Part2: Section 2.1091 KDB 447498 D01 General RF Exposure Guidance v06				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	14.02.2017	Refer to Photo Document			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	ZDGFMT7612U-002				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	14.02.2017 - 23.03.2017				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMTEK (Shenzhen) Co., Ltd.				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	PASS				
<b>geprüft von / tested by:</b>			<b>kontrolliert von / reviewed by:</b>		
01.04.2017	Lin Lin / Project Manager		01.04.2017	Sam Lin / Technical Certifier	
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b> FCC ID: 2AJVQ-ZDGFMT7612U					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut    2 = gut    3 = befriedigend    4 = ausreichend    5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n)    F(ail) = entspricht nicht o.g. Prüfgrundlage(n)    N/A = nicht anwendbar    N/T = nicht getestet Legend: 1 = very good    2 = good    3 = satisfactory    4 = sufficient    5 = poor P(ass) = passed a.m. test specification(s)    F(ail) = failed a.m. test specification(s)    N/A = not applicable    N/T = not tested					
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

**TEST SUMMARY****5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER***RESULT: Pass***5.1.3 POWER SPECTRAL DENSITY***RESULT: Pass***5.1.4 6dB BANDWIDTH AND 99% BANDWIDTH***RESULT: Pass***5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH***RESULT: Pass***5.1.6 RADIATED SPURIOUS EMISSION***RESULT: Pass***5.1.7 CONDUCTED EMISSION ON AC MAINS***RESULT: Pass*

### *Table of Contents*

1.	GENERAL REMARKS.....	4
1.1	COMPLEMENTARY MATERIALS .....	4
2.	TEST SITES .....	5
2.1	TEST FACILITIES .....	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS .....	5
2.3	TRACEABILITY .....	6
2.4	CALIBRATION .....	6
2.5	UNCERTAINTY OF MEASUREMENT .....	6
2.6	LOCATION OF ORIGINAL DATA .....	6
2.7	STATUS OF FACILITY USED FOR TESTING .....	6
3.	GENERAL PRODUCT INFORMATION .....	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS .....	7
3.3	INDEPENDENT OPERATION MODES .....	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS .....	9
3.5	SUBMITTED DOCUMENTS.....	9
4.	TEST SET-UP AND OPERATION MODES .....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION .....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....	10
4.4	COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE .....	10
4.5	TEST SETUP DIAGRAM .....	11
5.	TEST RESULTS .....	13
5.1	RADIO TEST REQUIREMENT & TEST SUITES (2.4GHZ BAND) .....	13
5.1.1	<i>Antenna Requirement</i> .....	13
5.1.2	<i>Maximum peak conducted output power</i> .....	14
5.1.3	<i>Power Spectral Density</i> .....	15
5.1.4	<i>6dB Bandwidth and 99% Bandwidth</i> .....	16
5.1.5	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i> .....	17
5.1.6	<i>Radiated Spurious Emission</i> .....	18
5.1.7	<i>Conducted Emission on AC Mains</i> .....	19
6.	PHOTOGRAPHS OF THE TEST SET-UP .....	20
7.	LIST OF TABLES .....	23
8.	LIST OF PHOTOGRAPHS.....	23

**Prüfbericht - Nr.: 50074914 001***Test Report No.***Seite 4 von 23***Page 4 of 23*

## **1. General Remarks**

### **1.1 Complementary Materials**

All attachments are integral parts of this test report. This applies especially to the following appendixes:

Appendix A: Test data of 2.4GHz band WiFi

Appendix B: Test data of RF Exposure

## 2. Test Sites

### 2.1 Test Facilities

EMTEK (Shenzhen) Co., Ltd.  
 Address: Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China.

FCC Registration No.: 406365

Note: The tests at the test site have been conducted under the supervision of a TÜV engineer.

### 2.2 List of Test and Measurement Instruments

Table 1: List of Radio Test and Measurement Equipment

Radio (EMTEK)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Analyzer	Agilent	N9010A	My53470879	May.28, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	FSV40	132.1-3008K39-100967-AP	May 28, 2016	1 Year
3.	Power Analyzer	Agilent	PS-X10-200	N/A	May.28, 2016	1 Year
4.	Test Accessories	Agilent	PS-X10-100	N/A	May.28, 2016	1 Year
5.	Cable	Agilent	N/A	3#	May.28, 2016	1 Year
6.	Cable	Agilent	N/A	5#	May.28, 2016	1 Year
Spurious Emissions (EMTEK)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101414	May 28, 2016	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	1519-012	May 28, 2016	1 Year
3.	Pre-Amplifier	LUNAR-EM	LNA30M3G-25	J10100000071	May 28, 2016	1 Year
4.	Bilog Antenna	Schwarzbeck	VULB9163	660	May 29, 2016	1 Year
5.	Cable	H+B	NmSm-05-C15052		May 29, 2016	1 Year
6.	Cable	H+B	NmSm-2-C15201		May 29, 2016	1 Year
7.	Cable	H+B	NmNm-7-C15702		May 29, 2016	1 Year
8.	EMI Test Receiver	Rohde & Schwarz	FSV40	132.1-3008K39-100967-AP	May 28, 2016	1 Year
9.	Pre-Amplifier	Lunar EM	LNA1G18-48	J1011131010001	May 28, 2016	1 Year
10.	Pre-Amplifier	Lunar EM	LNA18G26-40	J1012131010001	May 28, 2016	1 Year
11.	Horn Antenna	Schwarzbeck	BBHA 9120	1178	May 29, 2016	1 Year
12.	Horn Antenna	Schwarzbeck	BBHA 9170	RS1307229170547	May 29, 2016	1 Year
13.	Horn Antenna	AHS/USA	SAS-573	184	May 29, 2016	1 Year
14.	Cable	H+B	SAC-40G-1	414	May 29, 2016	1 Year
15.	Cable	H+B	SUCOFLEX104	MY14871/4	May 29, 2016	1 Year
16.	Cable	H+B	BLU18A-NmSm-	D8501	May 29, 2016	1 Year

			6500			
17.	Cable	A.H	SAC-40G-1	413	May 29, 2016	1 Year
<b>Conducted Emissions (EMTEK)</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 28, 2016	1 Year
2.	L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 28, 2016	1 Year
3.	50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 29, 2016	1 Year
4.	Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	May 29, 2016	1 Year

### 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

### 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

### 2.5 Uncertainty of Measurement

The value of the measurement uncertainty of each parameter is listed as below:

Table 2: Measurement Uncertainty

Test Item	Uncertainty
RF Output Power	±1.5 dB
Power Spectral Density	±3.0 dB
Frequency Error	±3.3%
Occupied Channel Bandwidth	±5%
Conducted Spurious Emissions	±3.0 dB
Radiated Spurious Emissions	±3.7dB (below 30MHz) ±3.78dB (30MHz~1GHz) ±4.46dB (1~6GHz) ±4.96dB (6~18GHz)
Conducted Emissions	±2.9dB
Temperature	±3.2%
Humidity	±2.5%

### 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A and Appendix B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

### 2.7 Status of Facility Used for Testing

The EMTEK (Shenzhen) Co., Ltd. Test facility located at Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is a WiFi module which that support IEEE 802.11 a/b/g/n/ac protocols.

Note: This report is for 2.4GHz Band only.

For details refer to user manual and circuit diagram.

#### 3.2 Ratings and System Details

Table 3: Technical Specification

Technical Specification	Value	
Frequency Bands	2400-2483.5MHz 5150-5350MHz 5470-5725MHz 5725-5850MHz	
Operating Frequency/Channels/Protocol	20MHz Bandwidth	2412-2462MHz/11CH/802.11b/g/n-HT20 5180-5320MHz/8CH/802.11a/n-HT20/ac20 5500-5700MHz/11CH/802.11a/n-HT20/ac20 5745-5825MHz/5CH/802.11a/n-HT20/ac20
	40MHz Bandwidth	2422-2452MHz/7CH/802.11n-HT40 5190-5310MHz/4CH/802.11n-HT40/ac40 5510-5670MHz/5CH/802.11n-HT40/ac40 5755-5795MHz/2CH/802.11n-HT40/ac40
	80MHz Bandwidth	5210-5290MHz/2CH/802.11ac80 5530-5610MHz/2CH/802.11ac80 5775MHz/1CH/802.11ac80
Channel Spacing	5 MHz	
Extreme Temperature Range	-10~+70 °C	
Type of Product	Client Device without Radar Detection	
TX Power Control (TPC)	Not Supported	
Modulation	CCK, DSSS, OFDM	
Antenna Number	2	
Antenna Type	Onboard Omni-directional antenna	
Antenna Gain	Ant0: 2.9dBi, Ant1: 2.9dBi	
Operation Voltage	USB Operated	

Table 4: 2.4GHz Band channel and frequency (2.4GHz Band, 20MHz bandwidth)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

Table 5: 2.4GHz Band channel and frequency (2.4GHz Band, 40MHz bandwidth)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
------------	-----------------	------------	-----------------

3	2422	8	2447
4	2427	9	2452
5	2432	10	2457
6	2437	11	2462
7	2442		

**Table 6: 5GHz Bands channel and frequency (U-NII-1 and U-NII-2A Bands, 20MHz bandwidth)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
36	5180	52	5260
40	5200	56	5280
44	5220	60	5300
48	5240	64	5320

**Table 7: 5GHz Bands channel and frequency (U-NII-2C Band, 20MHz bandwidth)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
100	5500	124	5620
104	5520	128	5640
108	5540	132	5660
112	5560	136	5680
116	5580	140	5700
120	5600		

**Table 8: 5GHz Bands channel and frequency (U-NII-3 Band, 20MHz bandwidth)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

**Table 9: 5GHz Bands channel and frequency (U-NII-1 and U-NII-2A Bands, 40MHz bandwidth)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
38	5190	54	5270
46	5230	62	5310

**Table 10: 5GHz Bands channel and frequency (U-NII-2C Band, 40MHz bandwidth)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
102	5510	126	5630
110	5550	134	5670
118	5590		

**Table 11: 5GHz Bands channel and frequency (U-NII-3 Band, 40MHz bandwidth)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
151	5755	159	5795

**Table 12: 5GHz Bands channel and frequency (U-NII-1 and U-NII-2A Bands, 80MHz bandwidth)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
42	5210	58	5290



Table 13: 5GHz Band channel and frequency (U-NII-2C Band, 80MHz bandwidth)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
106	5530	122	5610

Table 14: 5GHz Band channel and frequency (U-NII-3 Bands, 80MHz bandwidth)

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
155	5775		

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. Tx, (2.4GHz Band, 802.11b/g/n)
  - 1. Lowest channel
  - 2. Middle channel
  - 3. Highest channel
- B. WiFi on
- C. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

### 3.5 Submitted Documents

- Application Form
- Circuit Diagram
- Instruction Manual
- Photo Documents
- Technical Description
- Bill of Material
- Rating Label

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emissions:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10:2013.

Table 15: 2.4GHz band Test channels

Test channels	20MHz Bandwidth	CH1-2412/CH6-2437/CH11-2462
	40MHz Bandwidth	CH1-2422/CH6-2437/CH11-2452

Table 16: Antenna operation modes

Operating Mode	1Tx/1Rx	2Tx/2Rx
802.11b/g/n	Ant0	
802.11n		Ant0+Ant1

Table 17: Worst case test modes

Operating Mode	Worst Test Mode	
	Mode	Duty Cycle
802.11b	11 Mbit/s	>98%
802.11g	54 Mbit/s	>98%
802.11n-HT20	MCS0 and MCS8	>98%
802.11n-HT40	MCS0 and MCS8	>98%

### 4.3 Special Accessories and Auxiliary Equipment

Table 18: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N
Notebook	LENOVO	WB0205140E	WB06355728
Monitor	DELL	E2013HC	CN-0841PW-64180-341-0KRS
PC	LENOVO	9702	L3C4410
Printer	HP	C89520	CN25S182N6
Wireless Access Point	Cisco	AIR-CAP3702E-A-K9	FTX182276QD FCC ID: LDK102087 IC ID: 2461B-102087
USB Cable	Hisense	Shielded, 30cm	--

### 4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

### 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

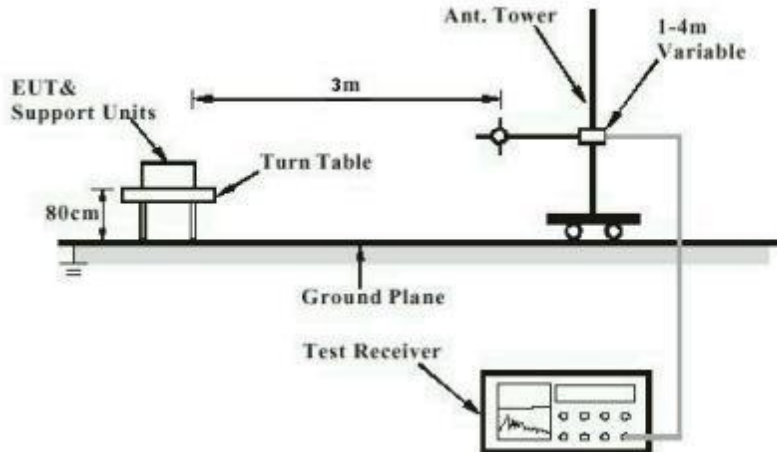


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

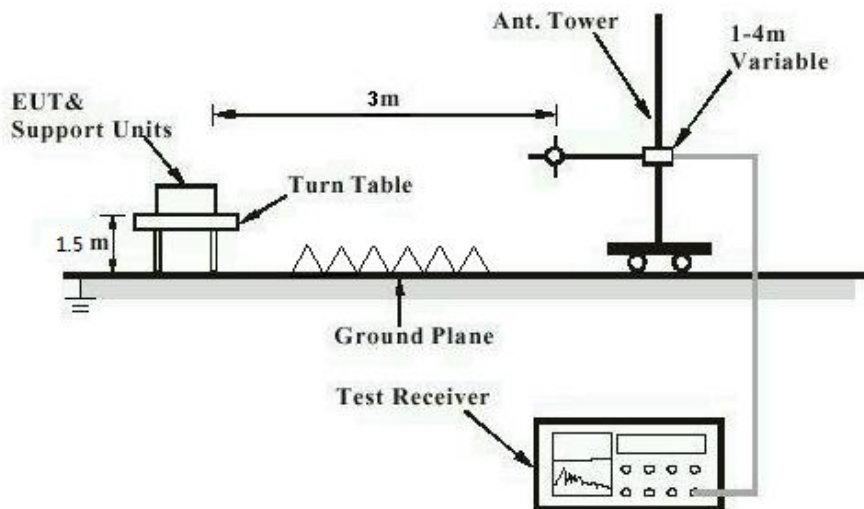


Diagram of Measurement Configuration for Mains Conduction Measurement


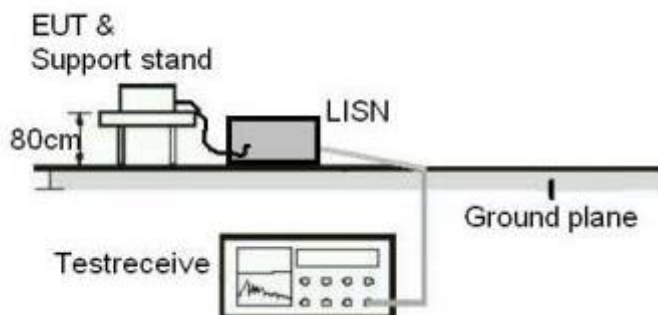


Diagram of Measurement Configuration for Conducted Transmitter Measurement

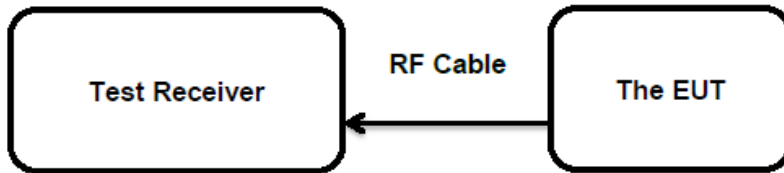

## 5. Test Results

### 5.1 Radio Test Requirement & Test Suites (2.4GHz Band)

#### 5.1.1 Antenna Requirement

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.203

The EUT has an Onboard Omni-directional antenna, the directional gain of antenna is 2.9dBi for Ant0, 2.9dBi for Ant1 and Total antenna gain (Ant0+Ant1) is 5.9dBi (KDB 662911 D01), and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

**5.1.2 Maximum peak conducted output power****RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(b)(3)  
Basic standard : ANSI C63.10:2013  
Limits : < 1 Watt  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2017.03.08  
Input voltage : USB Operated  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 25 °C  
Relative humidity : 56 %  
Atmospheric pressure : 101 kPa

Refer to attached Appendix A for details of test data.

**Prüfbericht - Nr.: 50074914 001**

Test Report No.

Seite 15 von 23

Page 15 of 23

**5.1.3 Power Spectral Density****RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.247(e)  
Basic standard : ANSI C63.10:2013  
Limits : < 8dBm/3kHz  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2017.03.08  
Input voltage : USB Operated  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 25 °C  
Relative humidity : 56 %  
Atmospheric pressure : 101 kPa

Refer to attached Appendix A for details of test data.

**5.1.4 6dB Bandwidth and 99% Bandwidth****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(2)
Basic standard	: ANSI C63.10:2013
Limits	: > 500KHz
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2017.03.08
Input voltage	: USB Operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Refer to attached Appendix A for details of test data.



**Prüfbericht - Nr.: 50074914 001**

Test Report No.

Seite 17 von 23

Page 17 of 23

**5.1.5 Conducted Spurious Emissions Measured in 100 kHz Bandwidth****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10:2013
Limits	: 20dBc (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power)
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2017.03.08 to 2017.03.09
Input voltage	: USB Operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Refer to attached Appendix A for details of test data.

**5.1.6 Radiated Spurious Emission****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205 & FCC Part 15.209
Basic standard	: ANSI C63.10:2013
Limits	: Refer to 15.209
Kind of test site	: 3m Semi-Anechoic Chamber (below 1GHz) : 3m Anechoic Chamber (above 1GHz)

**Test Setup**

Date of testing	: 2017.03.05 to 2017.03.06
Input voltage	: USB Operated
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 23 °C
Relative humidity	: 48 %
Atmospheric pressure	: 101 kPa

Refer to attached Appendix A for details of test data.

**5.1.7 Conducted Emission on AC Mains****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.207
Basic standard	: ANSI C63.10:2013
Frequency range	: 0.15 - 30MHz
Limits	: FCC Part 15.207
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2017.03.10
Input voltage	: USB Operated from PC
Operation mode	: B
Earthing	: Not connected
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Refer to attached Appendix A for details of test data.