



FCC REPORT

Applicant: Current Products Corp.

Address of Applicant: 1995 Hollywood Ave. Pensacola, Florida 32505, United States

Manufacturer: Current Products Corp.

Address of Manufacturer: 1995 Hollywood Ave. Pensacola, Florida 32505, United States

Equipment Under Test (EUT)

Product Name: Remote

Model No.: CP16A0402_02, CP16A0402_05, CP16A0397_03

Trade Mark: current

FCC ID: 2AJXX-CP16A

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.231

Date of sample receipt: March 23, 2018

Date of Test: March 24-28, 2018

Date of report issued: March 29, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

| Version No. | Date | Description |
|-------------|----------------|-------------|
| 00 | March 29, 2018 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:

Tiger Chen

Date:

March 29, 2018

Project Engineer

Check By:

Andy Wu

Date:

March 29, 2018

Reviewer

3 Contents

| | Page |
|---|------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 CONTENTS | 3 |
| 4 TEST SUMMARY | 4 |
| 4.1 MEASUREMENT UNCERTAINTY | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 GENERAL DESCRIPTION OF EUT | 5 |
| 5.2 TEST MODE | 6 |
| 5.3 TEST FACILITY..... | 6 |
| 5.4 TEST LOCATION | 6 |
| 5.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 6 |
| 5.6 ADDITIONAL INSTRUCTIONS..... | 6 |
| 6 TEST INSTRUMENTS LIST | 7 |
| 7 TEST RESULTS AND MEASUREMENT DATA..... | 8 |
| 7.1 ANTENNA REQUIREMENT | 8 |
| 7.2 RADIATED EMISSION METHOD | 9 |
| 7.2.1 Transmitter Field Strength of Emissions..... | 12 |
| 7.2.2 Spurious emissions..... | 13 |
| 7.3 20dB OCCUPY BANDWIDTH | 14 |
| 7.4 DEACTIVATION TESTING..... | 15 |
| 8 TEST SETUP PHOTO | 16 |
| 9 EUT CONSTRUCTIONAL DETAILS | 17 |

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|--------------------------------|--------------------|--------|
| Antenna requirement | 15.203 | Pass |
| Restricted bands of operation. | 15.205 | Pass |
| Conduction Emission | 15.207 | N/A |
| Spurious Emissions | 15.231(b) & 15.209 | Pass |
| 20dB Bandwidth | 15.231(c) | Pass |
| Deactivation Testing | 15.231(a)(1) | Pass |

Pass: The EUT complies with the essential requirements in the standard.

N/A: Not applicable

4.1 Measurement Uncertainty

| Test Item | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission | 9kHz ~ 30MHz | ± 4.34dB | (1) |
| Radiated Emission | 30MHz ~ 1000MHz | ± 4.24dB | (1) |
| Radiated Emission | 1GHz ~ 26.5GHz | ± 4.68dB | (1) |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | ± 3.45dB | (1) |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

| | |
|------------------------|---|
| Product Name: | Remote |
| Model No.: | CP16A0402_02, CP16A0402_05, CP16A0397_03 |
| Test Model: | CP16A0402_02 |
| Remark: | <i>All above models are identical in the same PCB layout, interior structure and electrical circuits. The only difference is the model name for commercial purpose.</i> |
| Serial No.: | NCP16A0402001 |
| Test sample(s) ID: | GTS201803000251-1 |
| Sample(s) Status: | Engineer sample |
| Hardware: | CP16E0358 REV 0 |
| Software: | V1.1 |
| Operation Frequency: | 434MHz |
| Channel numbers: | 1 |
| Modulation technology: | FSK |
| Antenna Type: | Integral Antenna |
| Antenna gain: | 0 dBi (declare by Manufacturer) |
| Power supply: | DC 3.0V (1*CR2032) |

5.2 Test mode

| | |
|-------------------|------------------------------------|
| Transmitting mode | Keep the EUT in transmitting mode. |
|-------------------|------------------------------------|

Per-test mode.

We have verified the construction and function in typical operation, The EUT was placed on three different polar directions; i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:

| Axis | X | Y | Z |
|------------------------|-------|-------|-------|
| Field Strength(dBuV/m) | 79.31 | 77.48 | 77.06 |

Final Test Mode:

According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”:
Y axis (see the test setup photo)

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.
No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,
Xixiang Road, Baoan District, Shenzhen, Guangdong, China
Tel: 0755-27798480
Fax: 0755-27798960

5.5 Other Information Requested by the Customer

None.

5.6 Additional instructions

Software (Used for test) from client

The test software was built-in by manufacturer, it can be continuously transmitting once power on, and the transmitting power setting as default.


6 Test Instruments list

| RF Test | | | | | | |
|---------|-------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | July 03 2015 | July 02 2020 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | Spectrum Analyzer | Agilent | E4440A | GTS533 | June 28 2017 | June 27 2018 |
| 4 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | June 28 2017 | June 27 2018 |
| 5 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | June 28 2017 | June 27 2018 |
| 6 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | 9120D-829 | GTS208 | June 28 2017 | June 27 2018 |
| 7 | Horn Antenna | ETS-LINDGREN | 3160 | GTS217 | June 28 2017 | June 27 2018 |
| 8 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 9 | Coaxial Cable | GTS | N/A | GTS213 | June 28 2017 | June 27 2018 |
| 10 | Coaxial Cable | GTS | N/A | GTS211 | June 28 2017 | June 27 2018 |
| 11 | Coaxial cable | GTS | N/A | GTS210 | June 28 2017 | June 27 2018 |
| 12 | Coaxial Cable | GTS | N/A | GTS212 | June 28 2017 | June 27 2018 |
| 13 | Amplifier(100kHz-3GHz) | HP | 8347A | GTS204 | June 28 2017 | June 27 2018 |
| 14 | Amplifier(2GHz-20GHz) | HP | 8349B | GTS206 | June 28 2017 | June 27 2018 |
| 15 | Amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | GTS218 | June 28 2017 | June 27 2018 |
| 16 | Band filter | Amindeon | 82346 | GTS219 | June 28 2017 | June 27 2018 |
| 17 | Power Meter | Anritsu | ML2495A | GTS540 | June 28 2017 | June 27 2018 |
| 18 | Power Sensor | Anritsu | MA2411B | GTS541 | June 28 2017 | June 27 2018 |
| 19 | Loop Antenna | Zhinan | ZN30900A | GTS215 | June. 28 2017 | June. 27 2018 |


| General used equipment: | | | | | | |
|-------------------------|----------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Barometer | ChangChun | DYM3 | GTS257 | June 28 2017 | June 27 2018 |


7 Test results and Measurement Data

7.1 Antenna requirement


| | |
|--|-----------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 |
| 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. | |
| EUT Antenna: | |
| The antenna is Integral antenna, the best case gain of the antenna is 0dBi | |
|  | |

7.2 Radiated Emission Method
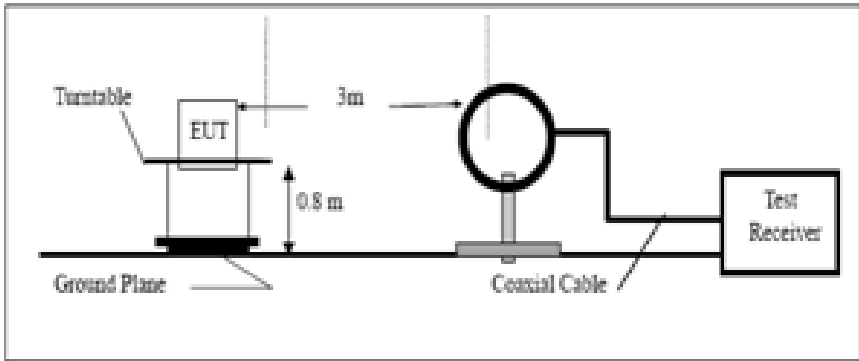
| | | | | | |
|--|--|--------------------|--------|------------------|------------------|
| Test Requirement: | FCC Part15 C Section 15.205, 15.209 & 15.231(b) | | | | |
| Test Method: | ANSI C63.10:2013 | | | | |
| Test Frequency Range: | 9kHz to 5000MHz | | | | |
| Test site: | Measurement Distance: 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 9kHz-150kHz | Quasi-peak | 200Hz | 300Hz | Quasi-peak Value |
| | 150kHz-30MHz | Quasi-peak | 9kHz | 10kHz | Quasi-peak Value |
| | 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| Peak | | 1MHz | 10Hz | Average Value | |
| Limit: (Transmitter Field Strength of Emissions) | Frequency | Limit (dBuV/m @3m) | | Remark | |
| | 434MHz | 80.83 | | Average Value | |
| | | 100.83 | | Peak Value | |
| Limit: (Spurious Emissions) | Frequency | Limit (uV/m) | | Remark | |
| | 0.009MHz-0.490MHz | 2400/F(kHz) @300m | | Quasi-peak Value | |
| | 0.490MHz-1.705MHz | 24000/F(kHz) @30m | | Quasi-peak Value | |
| | 1.705MHz-30.0MHz | 30 @30m | | Quasi-peak Value | |
| | 30MHz-88MHz | 100 @3m | | Quasi-peak Value | |
| | 88MHz-216MHz | 150 @3m | | Quasi-peak Value | |
| | 216MHz-960MHz | 200 @3m | | Quasi-peak Value | |
| | 960MHz-1GHz | 500 @3m | | Quasi-peak Value | |
| | Above 1GHz | 500 @3m | | Average Value | |
| 5000 @3m | | Peak Value | | | |
| Or The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level whichever limit permits a higher field strength. | | | | | |
| Test setup: | <p>Below 1GHz</p>  | | | | |

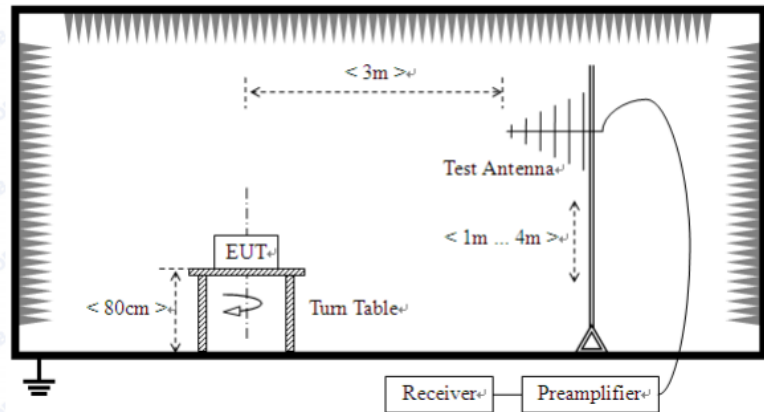

Above 1GHz

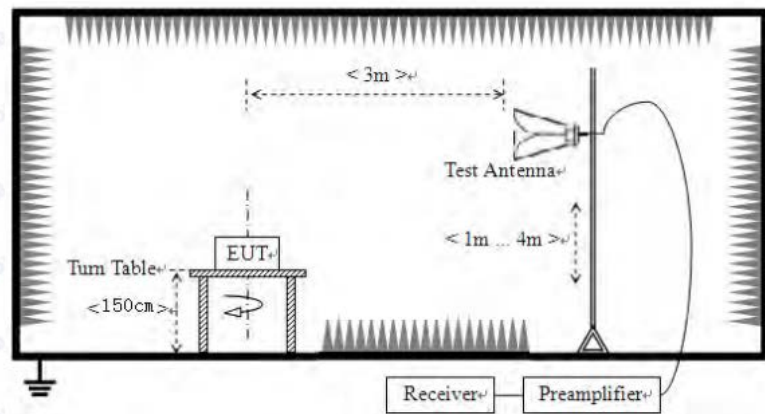

Test Procedure:

1. During the test, the New Battery was used.
2. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
3. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
4. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
5. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
6. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have

| | |
|-------------------|--|
| | 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement data:

7.2.1 Transmitter Field Strength of Emissions

Peak value:


| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 434 | 95.31 | 16.03 | 3.02 | 37.52 | 76.84 | 100.83 | -23.99 | Horizontal |
| 434 | 97.78 | 16.03 | 3.02 | 37.52 | 79.31 | 100.83 | -21.52 | Vertical |

Average value:

| Frequency (MHz) | Peak Value (dBuV/m) | Duty cycle factor | Average value (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|---------------------|-------------------|------------------------|---------------------|-----------------|--------------|
| 434 | 76.84 | -12.04 | 64.80 | 80.83 | -16.03 | Horizontal |
| 434 | 79.31 | -12.04 | 67.27 | 80.83 | -13.56 | Vertical |

| Average value: | |
|--------------------|--|
| Calculate Formula: | Average value=Peak value + Duty Cycle Factor |
| | Duty cycle factor=20 log(Duty cycle) |
| | Duty cycle=on time/100 milliseconds or period, whichever is less |
| Test data: | T on time =24.83(ms) |
| | T period 63.17(ms) |
| | Duty cycle=0.25 |
| | duty cycle factor=-12.04 |

Test plot as follows:

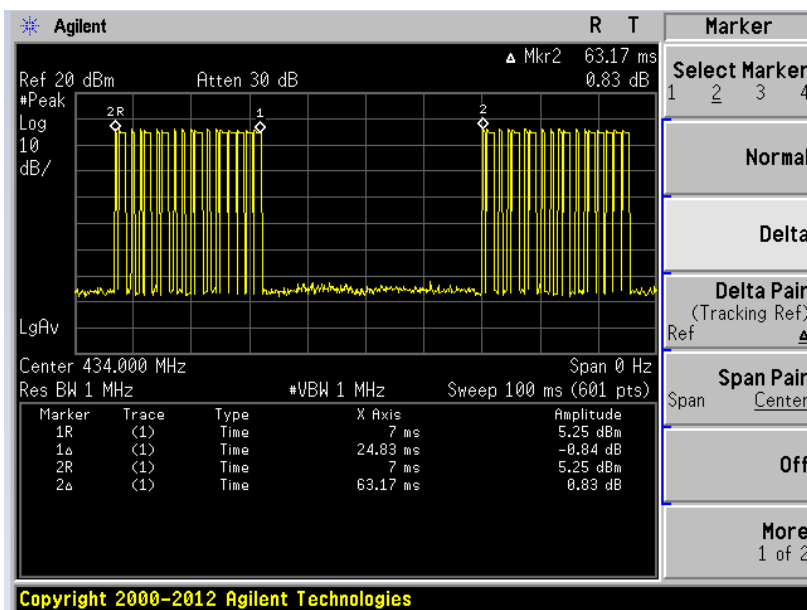

7.2.2 Spurious emissions

■ Below 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ Below 1GHz

| Quasi-peak Value Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|----------------------------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 30.853 | 40.82 | 11.30 | 0.56 | 35.06 | 17.62 | 40.00 | -22.38 | Vertical |
| 36.509 | 41.17 | 11.20 | 0.62 | 35.45 | 17.54 | 40.00 | -22.46 | Vertical |
| 42.451 | 38.82 | 12.27 | 0.69 | 35.80 | 15.98 | 40.00 | -24.02 | Vertical |
| 48.332 | 38.69 | 12.23 | 0.75 | 36.10 | 15.57 | 40.00 | -24.43 | Vertical |
| 55.609 | 38.20 | 11.67 | 0.82 | 36.26 | 14.43 | 40.00 | -25.57 | Vertical |
| 106.759 | 38.45 | 11.50 | 1.25 | 36.78 | 14.42 | 43.50 | -29.08 | Vertical |
| 30.638 | 40.65 | 11.30 | 0.56 | 35.05 | 17.46 | 40.00 | -22.54 | Horizontal |
| 35.749 | 41.75 | 11.20 | 0.62 | 35.41 | 18.16 | 40.00 | -21.84 | Horizontal |
| 41.132 | 39.35 | 12.27 | 0.67 | 35.73 | 16.56 | 40.00 | -23.44 | Horizontal |
| 49.359 | 37.85 | 12.20 | 0.77 | 36.15 | 14.67 | 40.00 | -25.33 | Horizontal |
| 54.452 | 39.25 | 11.93 | 0.81 | 36.25 | 15.74 | 40.00 | -24.26 | Horizontal |
| 96.099 | 37.90 | 11.35 | 1.16 | 36.69 | 13.72 | 43.50 | -29.78 | Horizontal |


■ Above 1GHz

| Frequency (MHz) | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|-----------------|--------------------|----------------|---------------------|-----------------|--------------|
| 1500 | 36.96 | 25.30 | 4.68 | 36.17 | 30.77 | 74.00 | -43.23 | Vertical |
| 1850 | 35.80 | 25.88 | 4.88 | 36.41 | 30.15 | 74.00 | -43.85 | Vertical |
| 2250 | 36.76 | 26.95 | 5.24 | 36.73 | 32.22 | 74.00 | -41.78 | Vertical |
| 2775 | 35.22 | 28.10 | 5.73 | 37.15 | 31.90 | 74.00 | -42.10 | Vertical |
| 3310 | 33.77 | 28.40 | 6.58 | 37.33 | 31.42 | 74.00 | -42.58 | Vertical |
| 4010 | 34.23 | 29.80 | 7.87 | 37.40 | 34.50 | 74.00 | -39.50 | Vertical |
| 1550 | 36.83 | 25.40 | 4.71 | 36.21 | 30.73 | 74.00 | -43.27 | Horizontal |
| 1790 | 36.51 | 25.79 | 4.85 | 36.37 | 30.78 | 74.00 | -43.22 | Horizontal |
| 2230 | 35.56 | 26.87 | 5.21 | 36.71 | 30.93 | 74.00 | -43.07 | Horizontal |
| 2805 | 34.62 | 28.14 | 5.76 | 37.17 | 31.35 | 74.00 | -42.65 | Horizontal |
| 3380 | 35.40 | 28.40 | 6.72 | 37.34 | 33.18 | 74.00 | -40.82 | Horizontal |
| 4130 | 33.38 | 30.05 | 8.00 | 37.46 | 33.97 | 74.00 | -40.03 | Horizontal |

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor

7.3 20dB Occupy Bandwidth

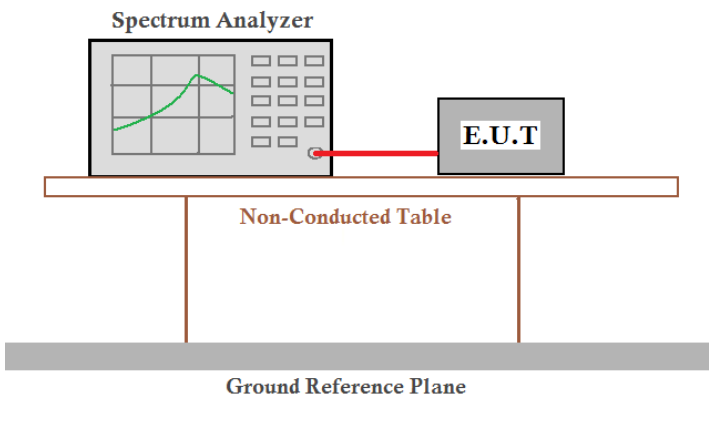
| | |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.231 (c) |
| Test Method: | ANSI C63.10:2013 |
| Limit: | The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier. |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement Data


| Test Frequency (MHz) | 20dB bandwidth (MHz) | Limit (MHz) | Result |
|----------------------|----------------------|-------------|--------|
| 434 | 0.0545 | 1.085 | Pass |

Note: Limit (434MHz) = Fundamental frequency \times 0.25%=434 \times 0.25%=1.085MHz

Test plot as follows:

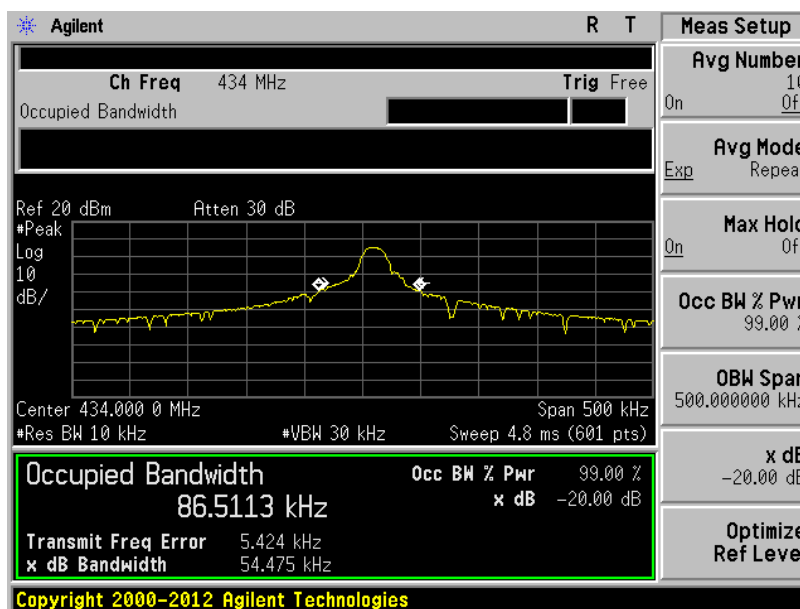


7.4 Deactivation Testing
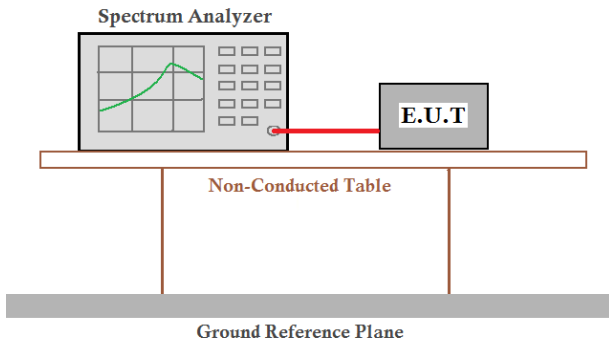
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.231 (a) |
| Test Method: | ANSI C63.10:2013 |
| Receiver setup: | RBW=1000KHz, VBW=1000KHz, span=0Hz, detector: Peak |
| Limit: | Not more than 5 seconds |
| Test setup: |  |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement data:

| Test Frequency (MHz) | Activation Time (second) | Limit (second) | Result |
|----------------------|--------------------------|----------------|--------|
| 434 | 0.667 | <5.0 | Pass |

Test plot as follows:

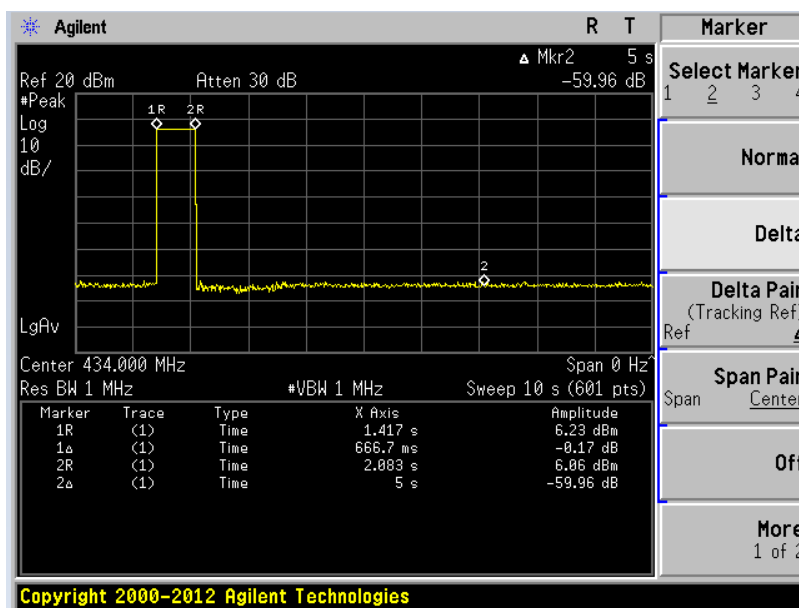




8 Test Setup Photo


Radiated Emission




9 EUT Constructional Details

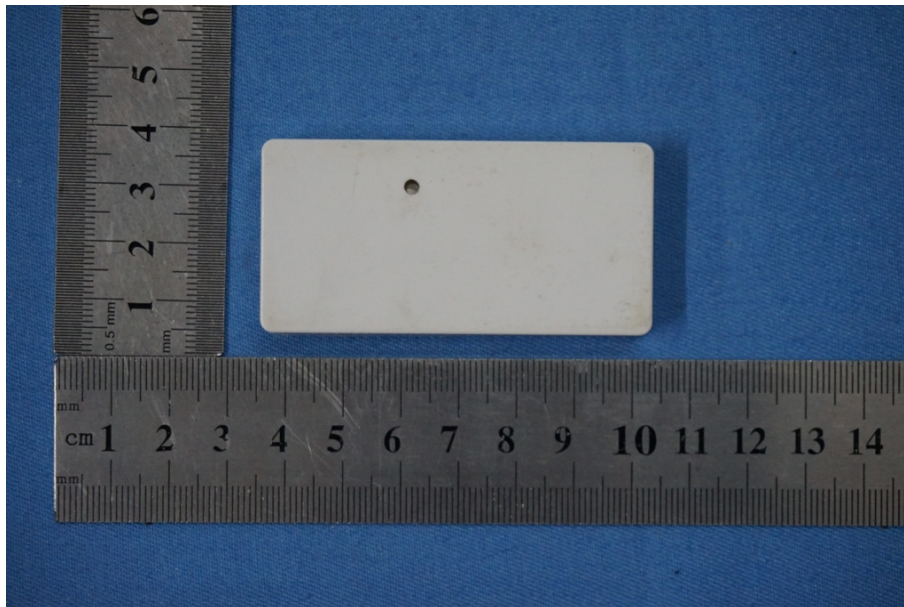

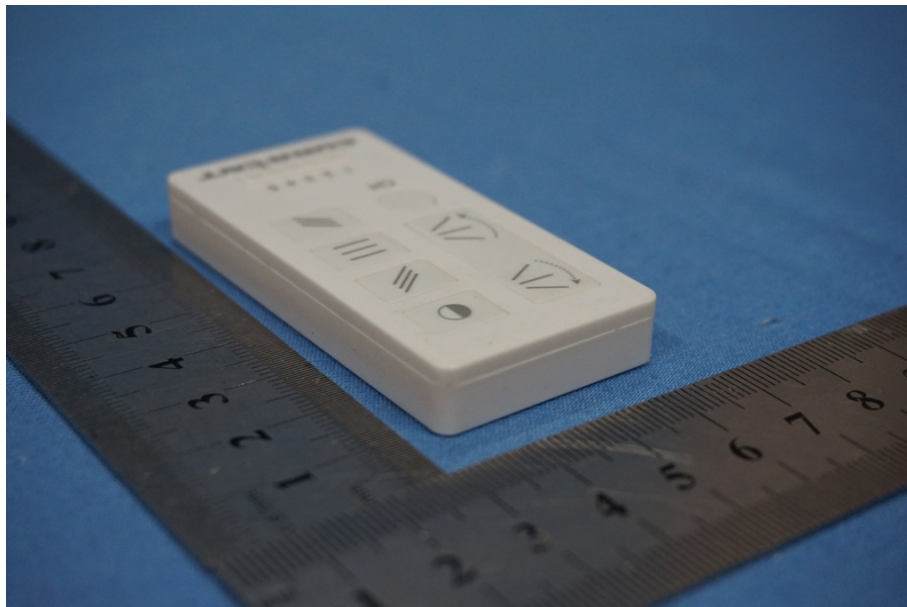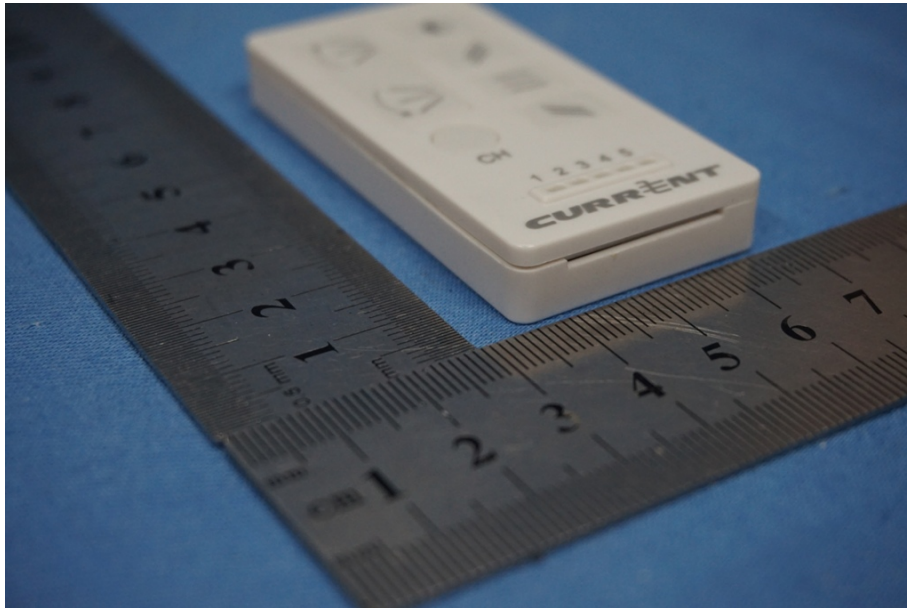

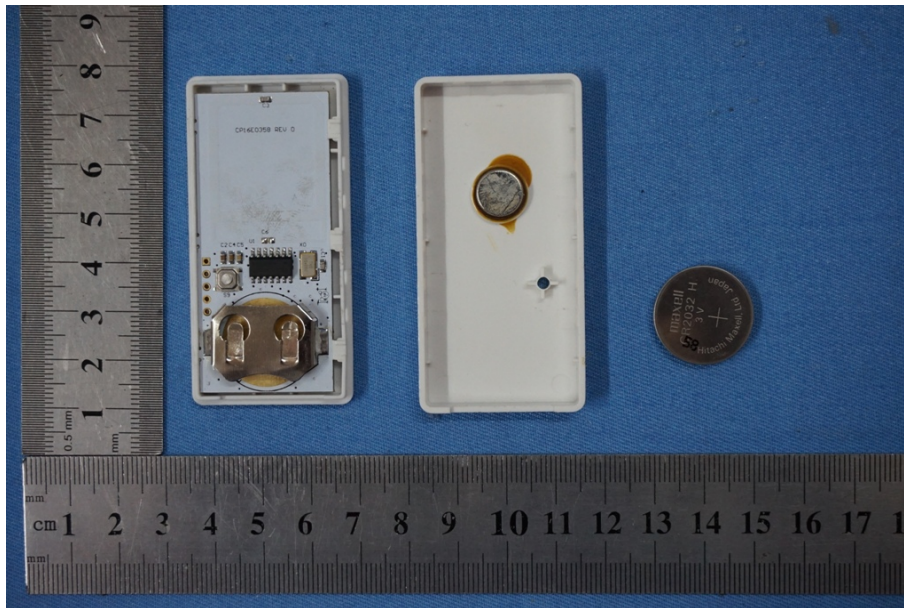

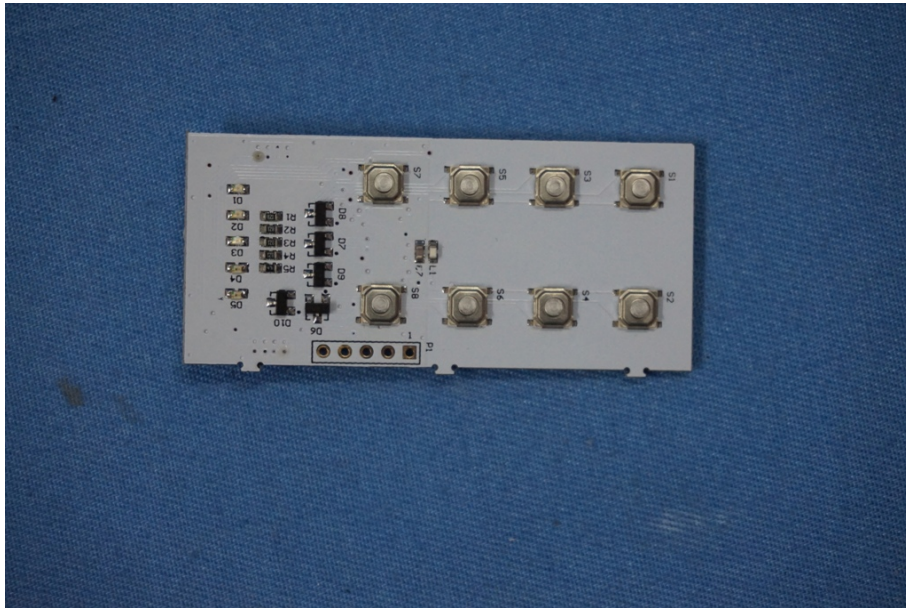

----- End -----