



Test Report - FCC Part 97

Applicant: Acom Ltd.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 4/17/2023

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.



Table of Contents

1.1	PART 97 TEST RESULT SUMMARY	4
2.	LOCATION OF TESTING	5
2.1	TEST LABORATORY	5
2.1	TESTING WAS PERFORMED, REVIEWED BY	5
3.	TEST SAMPLE(S) (EUT/DUT)	6
3.1	DESCRIPTION OF THE EUT	6
3.2	CONFIGURATION OF EUT	7
3.3	TEST SETUP OF EUT	7
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS	8
4.1	TEST METHODS/STANDARDS/GUIDANCE:	8
4.2	APPLIED LIMITS AND REGULATORY LIMITS:	8
5.	MEASUREMENT UNCERTAINTY	8
6.	ENVIRONMENTAL CONDITIONS	8
6.1	TEMPERATURE & HUMIDITY	8
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY	9
7.1	LIST OF TEST EQUIPMENT	9
8.	TEST RESULTS	10
8.1	POWER AT THE FINAL AMPLIFIER	11
8.2	RF OUTPUT POWER	12
8.3	EMISSION LIMITATIONS, OUT-OF-BAND	13
8.3.1	Conducted Emissions, Below 30MHz, 1.9 MHz	14
8.3.2	Conducted Emissions Above 30MHz, 1.9 MHz	15
8.3.3	Conducted Emissions Below 30MHz, 3.8 MHz	16
8.3.4	Conducted Emissions Above 30MHz, 3.8 MHz	17
8.3.5	Conducted Emissions Below 30MHz, 5.455 MHz	18
8.3.6	Conducted Emissions Above 30MHz, 5.455 MHz	19
8.3.7	Conducted Emissions, Below 30MHz, 7.3 MHz	20
8.3.8	Conducted Emissions Above 30MHz, 7.3 MHz	21
8.3.9	Conducted Emissions Below 30MHz, 10.12 MHz	22
8.3.10	Conducted Emissions Above 30MHz, 10.12 MHz	23
8.3.11	Conducted Emissions Below 30MHz, 14.2 MHz	24
8.3.12	Conducted Emissions Above 30MHz, 14.2 MHz	25
8.3.13	Conducted Emissions Below 30MHz, 18.1 MHz	26
8.3.14	Conducted Emissions Above 30MHz, 18.1 MHz	27
8.3.15	Conducted Emissions Below 30MHz, 21.2 MHz	28
8.3.16	Conducted Emissions, Above 30MHz, 21.2 MHz	29
8.3.17	Conducted Emissions Below 30MHz, 24.9 MHz	30
8.3.18	Conducted Emissions Above 30MHz, 24.9 MHz	31



8.3.19	Conducted Emissions Below 30MHz, 29 MHz	32
8.3.20	Conducted Emissions Above 30MHz, 29 MHz.....	33
8.3.21	Conducted Emissions Below 30MHz, 52 MHz.....	34
8.3.22	Conducted Emissions Above 30MHz, 52 MHz.....	35
8.4	STRENGTH OF RADIATED SPURIOUS EMISSIONS.....	36
8.4.1	Radiated Emissions, 1.9 MHz	37
8.4.2	Radiated Emissions, 3.8 MHz.....	38
8.4.3	Radiated Emissions, 5.455 MHz.....	39
8.4.4	Radiated Emissions, 7.3 MHz.....	40
8.4.5	Radiated Emissions, 10.12 MHz.....	41
8.4.6	Radiated Emissions, 14.2 MHz.....	42
8.4.7	Radiated Emissions, 18.1 MHz	43
8.4.8	Radiated Emissions, 21.2 MHz	44
8.4.9	Radiated Emissions, 24.9 MHz	45
8.4.10	Radiated Emissions, 29 MHz	46
8.4.11	Radiated Emissions, 52 MHz	47
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	48
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	48
11.	HISTORY OF TEST REPORT CHANGES.....	48



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

CUSTOMER INFORMATION

Applicant: Acom Ltd.
Address: 6 Valeri Petrov Str.
Sofia-Bozhurishte Economic Zone,
Bozhurishte, Bulgaria

1.1 Part 97 Test Result Summary

The following test procedure and guidance were used for measuring FCC PART 97 (Amateur Radio Service); ANSI/ TIA 603-C:2004 & ANSI C63.4-2004. Full test results are available in this report.

Applicable Clauses from Part 2		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
2.1033 (c)(8)	Power at the Final Amplifier	Reported
2.1046 (a)	RF Output Power	Pass
2.1051	Spurious emissions at antenna terminals	Pass
2.1053	Field strength of spurious radiation	Pass

Applicable Clauses from Part 90		
FCC Clauses	Description of the requirements	Result: (Pass, Fail, N/A)
97.313	Transmitter Power	Pass
97.307(d)(e)	Emission Standards	Reported

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA").

Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A

EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.1 Testing was performed, reviewed by

Dates of Testing: 3/27/2023- 3/28/2023

Signature:

Sr. EMC Engineer
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

4/17/2023

Signature:

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

4/17/2023



3. Test Sample(s) (EUT/DUT)

The test sample was received: 3/22/2023

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	2AJXZ500S
Brief Description	Solid-State Linear Amplifier
Model(s) #	ACOM 500S
Firmware version	N/A
Software version	N/A
Serial Number	N/A

Technical Characteristics	
Frequency Range	1.8-54 MHz
RF O/P Power (Max.)	56.29 dBm/ 425.6 W
Duty Cycle	100%
Antenna Connector	UFL
Voltage Rating (AC or Batt.)	120 VAC

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.



3.2 Configuration of EUT

Test Modes	
Range	Test Frequencies (MHz)
1.8-2	1.9
3.5-4	3.8
5.02-5.455	5.455
7-7.3	7.3
10.1-10.15	10.12
14-14.35	14.2
18.086-18.168	18.1
21-21.45	21.2
24.89-24.99	24.9
28-29.7	29
50-54	52

Operating conditions during Testing:

The device was operated without the provided antenna(s).

No other modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT) were made.

Peripherals used during Testing:

No peripherals used.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.



4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance:

Test procedures and guidance for measuring Licensed Part 97 Licensed device:

- 1) ANSI/ TIA 603-C:2004
- 2) ANSI C63.4-2003

4.2 Applied Limits and Regulatory Limits:

- 1) FCC CFR 47 Part 97
- 2) FCC CRF 47 Part 15

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

6.1 Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	



7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

7.1 List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna	Active Loop	ETS-Lindgren	6502	00062529	10/20/20	10/20/2023
Antenna	Biconical 1057	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
CHAMBER	CHAMBER	Panashield	3M	N/A	3/12/19	12/21/2023
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	3/29/19	8/03/2025

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016



8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Unless noted otherwise in the referenced standard, the measurements of **ac power-line conducted emissions and conducted power output** will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of **radiated emissions** will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m

$EIRP = P_{cond} \text{ (dBm)} + dBi$



8.1 Power at the Final Amplifier

Limits from FCC Parts 2.1033(c)(8), and 97.313; and test procedure from ANSI/ TIA 603-C:2004 & ANSI C63.4-2003

TEST PROCEDURES: Radiation Interference: The test procedure used was ANSI/TIA 603-C: 2004 using a Agilent spectrum analyzer with a preselector. In the frequency range 10 kHz to 30 MHz the RBW was 10 kHz and from 30-1000 MHz the RBW of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz.

Formula of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example: Freq (MHz) Meter Reading + ACF + CL = FS 33 20 dBuV + 10.36 dB/m +0.4 dB = 30.76 dBuV/m @ 3m


Test Results		
EUT Operating Voltage (V)	EUT Current (A)	Power at the Final Amplifier (W)
8.512	50	425.6



8.2 RF Output Power

Limits from FCC Parts 2.1046(a), and 97.313; and test procedure from ANSI/ TIA 603-C:2004 & ANSI C63.4-2003

Test Procedure: RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector with a nominal input voltage of 240 AC Volts.

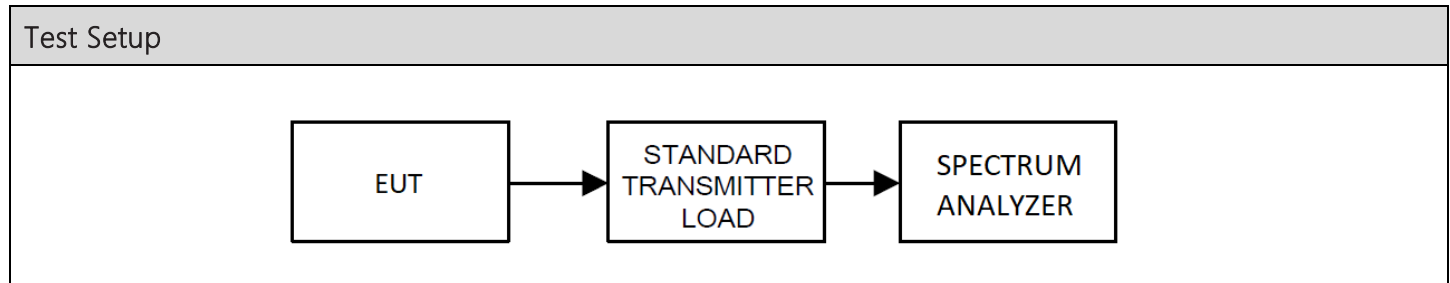

Test Results		
Tuned Frequency (MHz)	Power Output (dBm)	Power Output (W)
1.9	53.88	244.34
3.8	55.25	334.96
5.455	55.36	343.55
7.3	55.63	365.59
10.12	55.21	331.89
14.2	55.15	327.34
18.1	54.85	305.49
21.2	56.18	414.95
24.9	56.29	425.59
29	55.7	371.53
52	56.25	421.69




Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.3 Emission Limitations, Out-of-Band

Limits from FCC Parts 2.1053, and 97.307(d)(e); and test procedure from ANSI/ TIA 603-C:2004 & ANSI C63.4-2003

Requirements: The FCC Limits for spurious emissions of a transmitting operating on a frequency below 30 MHz must be at least 43dB below the mean power. For the transmitter frequency operating at 50 MHz, the RF spurious emissions must be at least 60 dB below the mean power of the fundamental.


Conducted Test Setup





Conducted Emissions Spectrum Plots


8.3.1 Conducted Emissions, Below 30MHz, 1.9 MHz

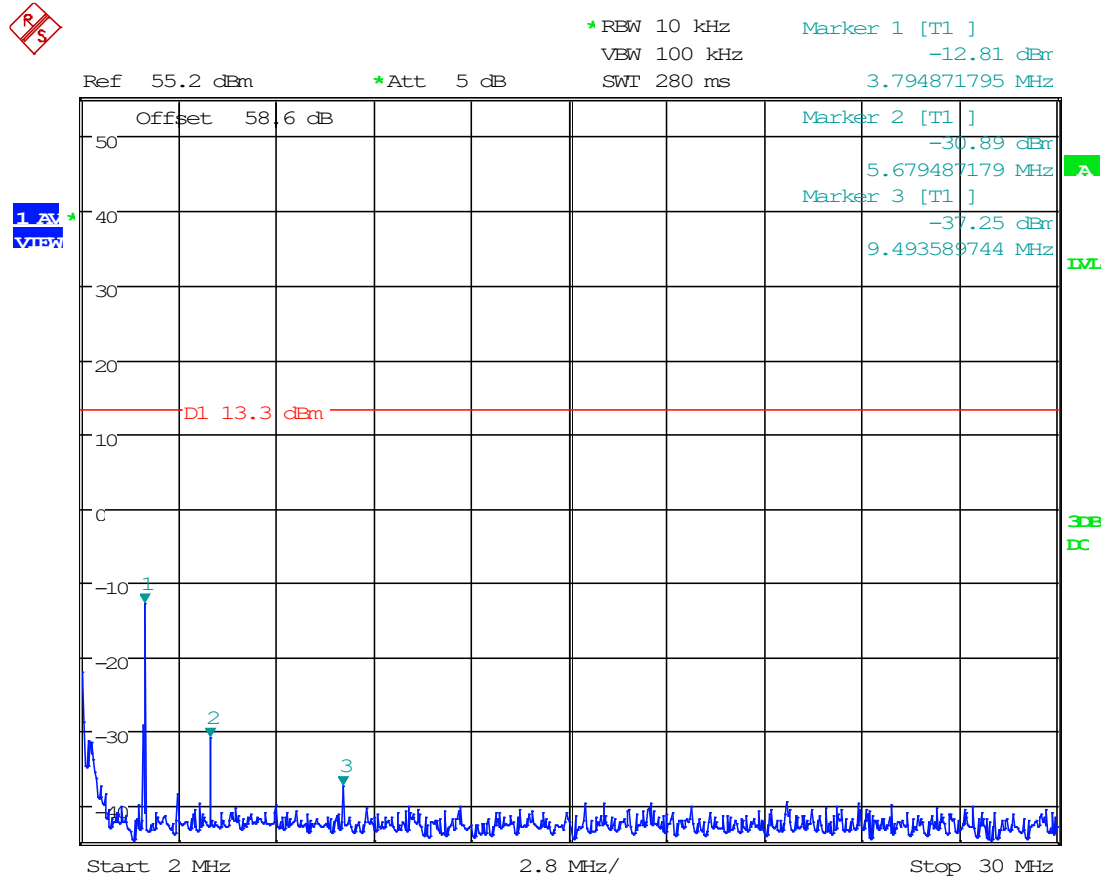

Date: 27.MAR.2023 10:10:46




8.3.2 Conducted Emissions Above 30MHz, 1.9 MHz

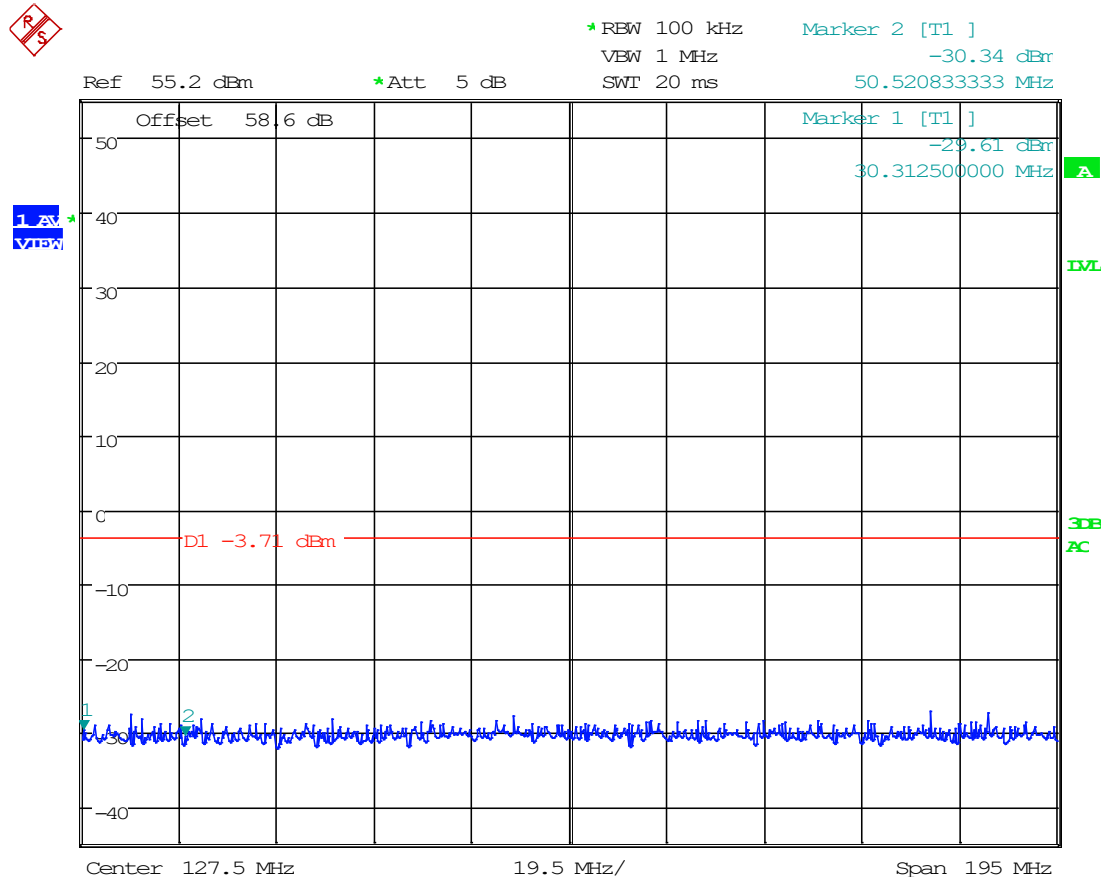

Date: 27.MAR.2023 09:59:09


8.3.3 Conducted Emissions Below 30MHz, 3.8 MHz

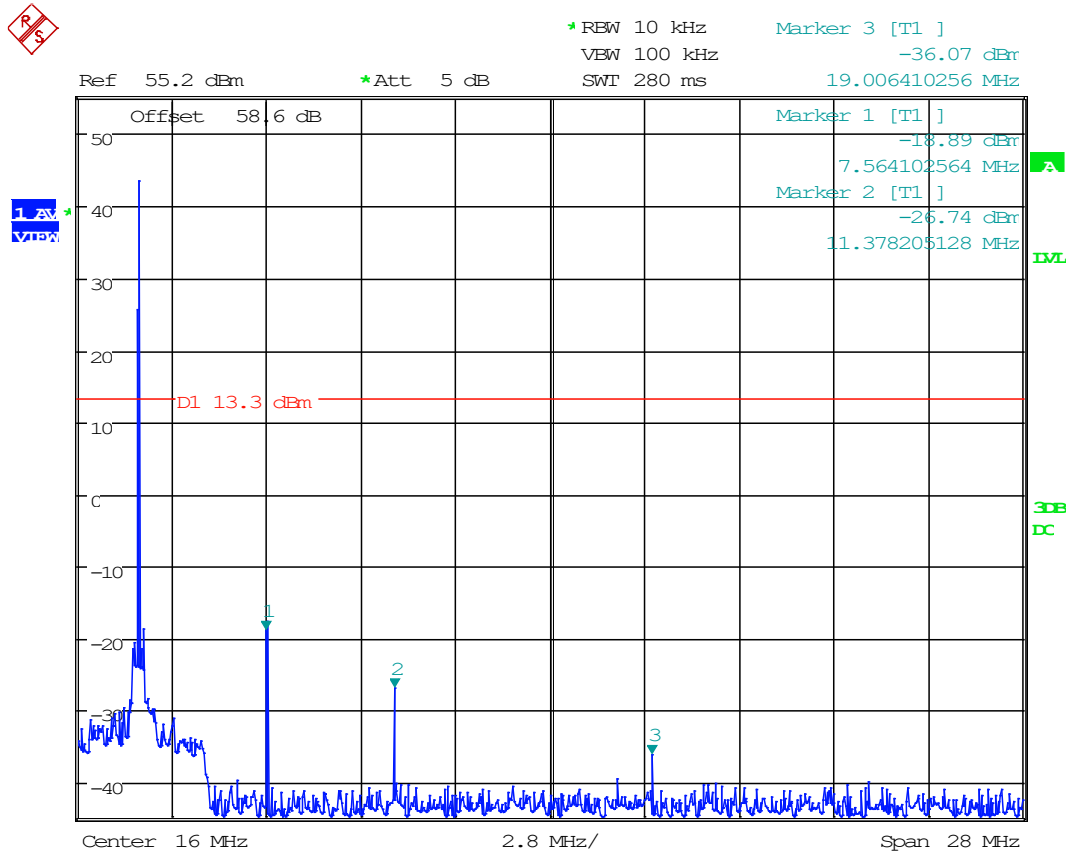

Date: 27.MAR.2023 10:19:13




8.3.4 Conducted Emissions Above 30MHz, 3.8 MHz

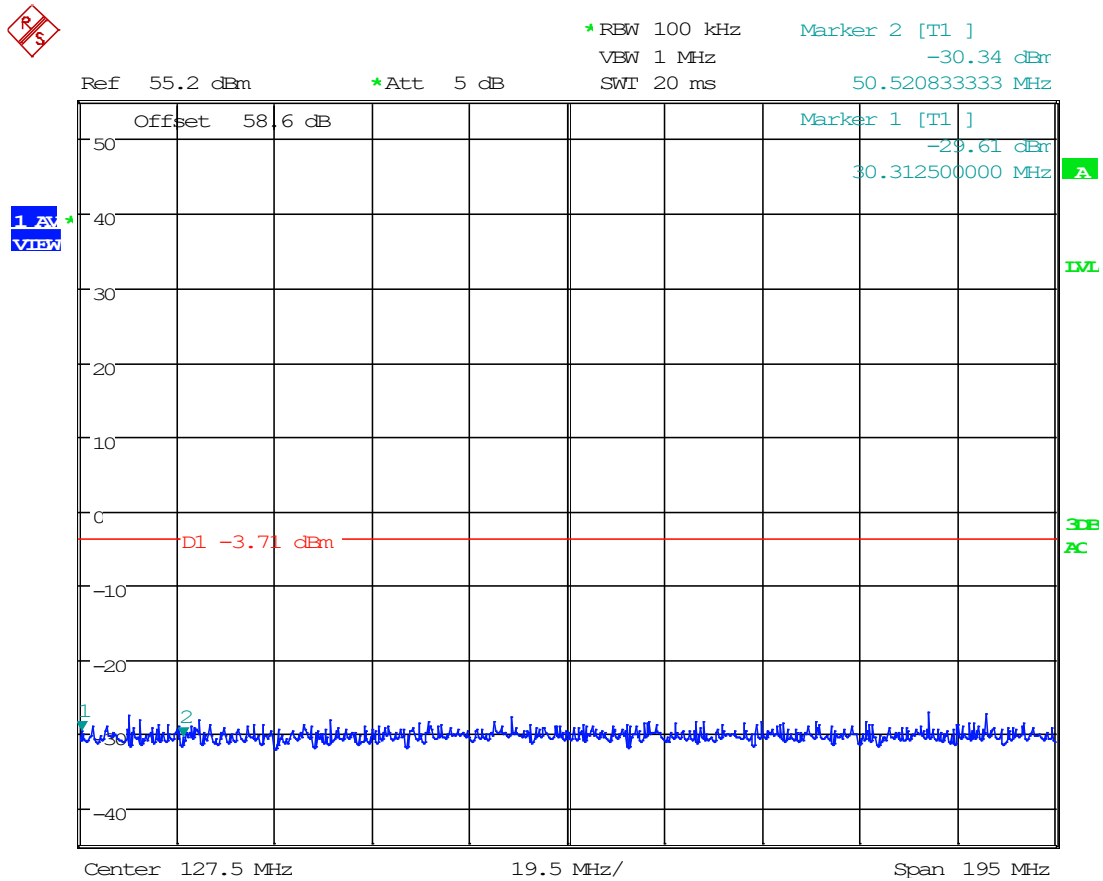

Date: 27.MAR.2023 09:59:09


8.3.5 Conducted Emissions Below 30MHz, 5.455 MHz

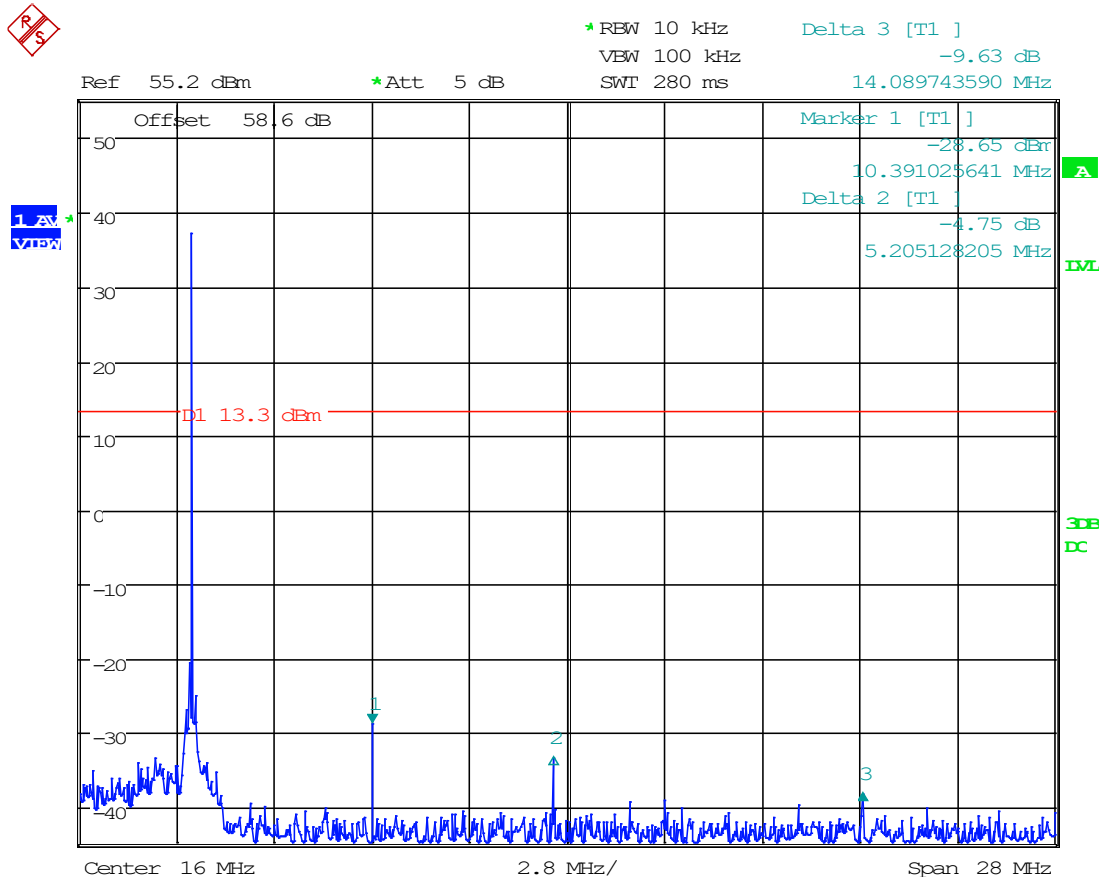

Date: 27.MAR.2023 10:30:23




8.3.6 Conducted Emissions Above 30MHz, 5.455 MHz

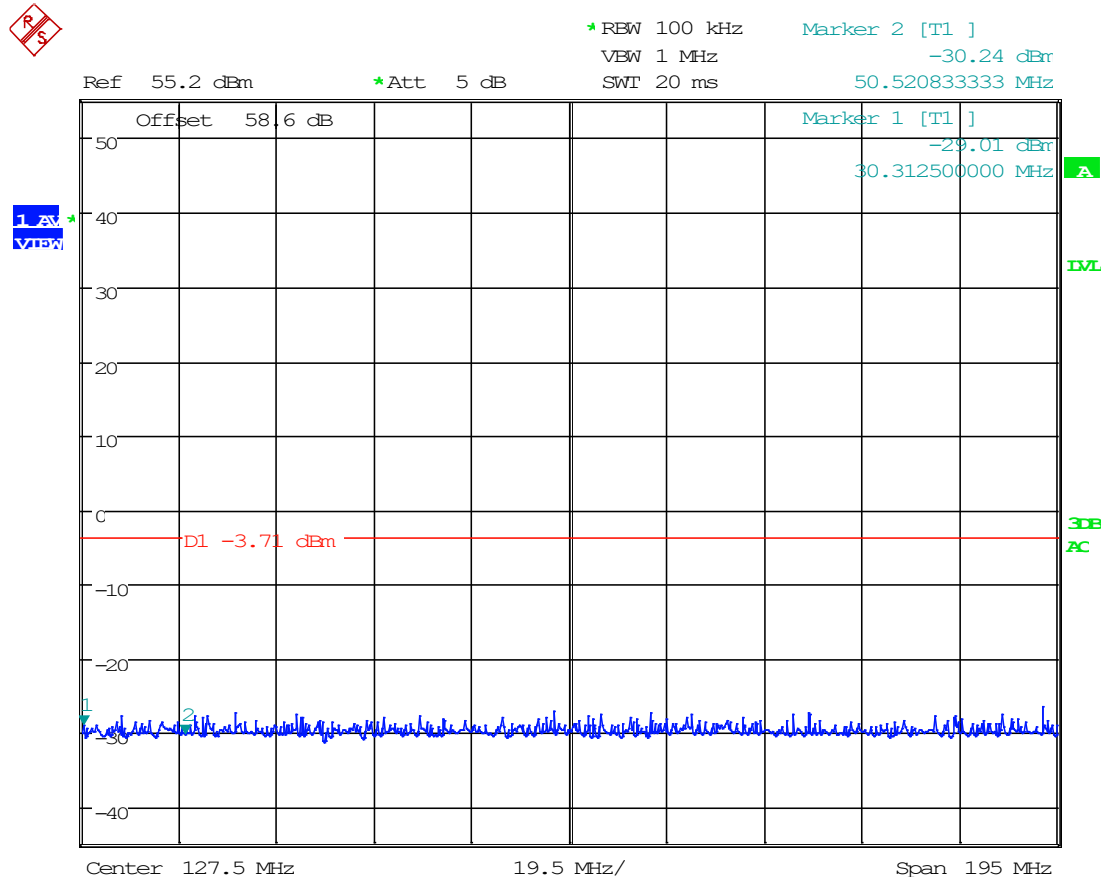

Date: 27.MAR.2023 10:00:30


8.3.7 Conducted Emissions, Below 30MHz, 7.3 MHz

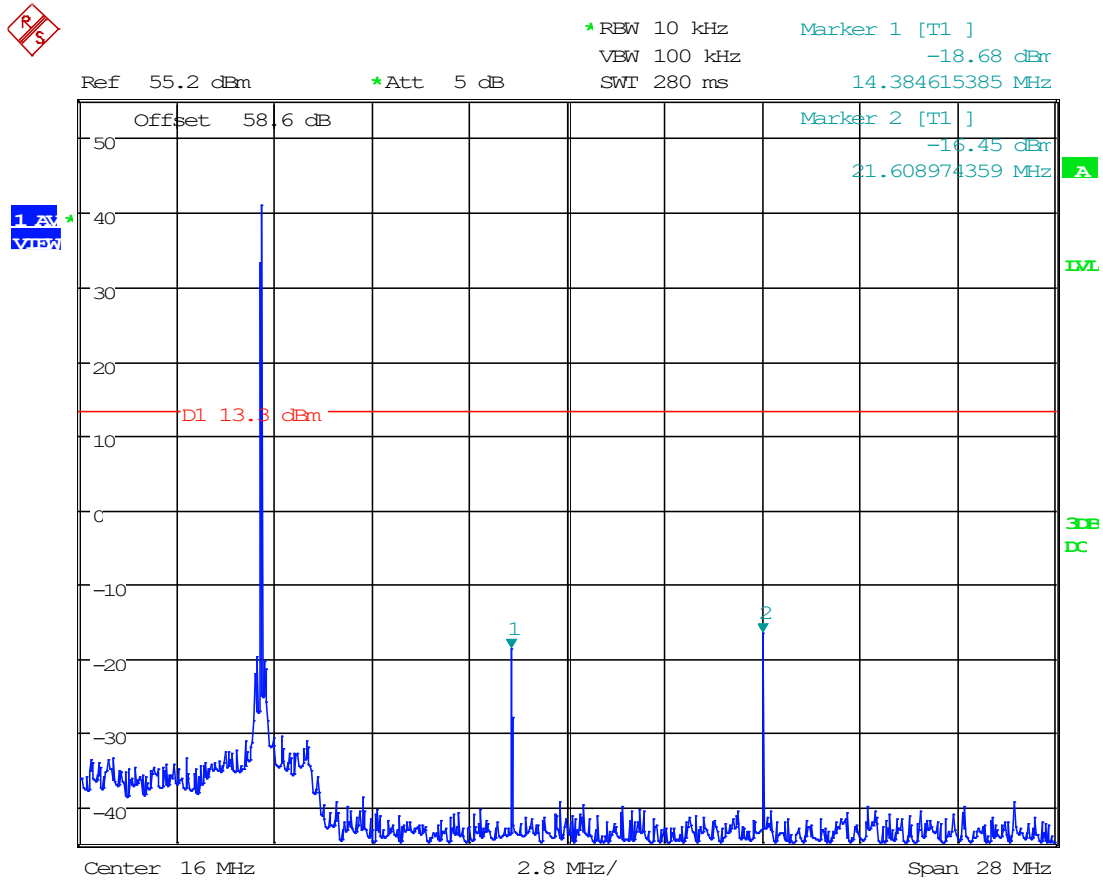

Date: 27.MAR.2023 10:21:06




8.3.8 Conducted Emissions Above 30MHz, 7.3 MHz

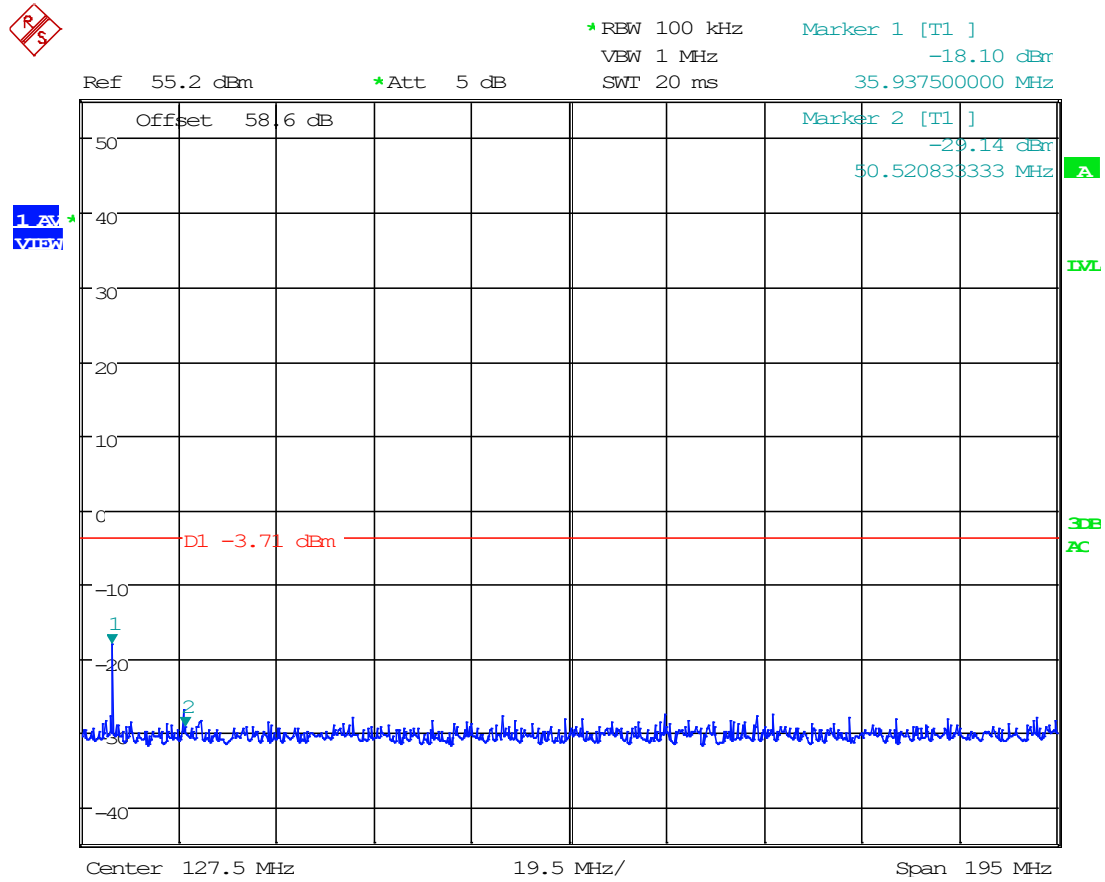


Date: 27.MAR.2023 10:01:03

8.3.9 Conducted Emissions Below 30MHz, 10.12 MHz

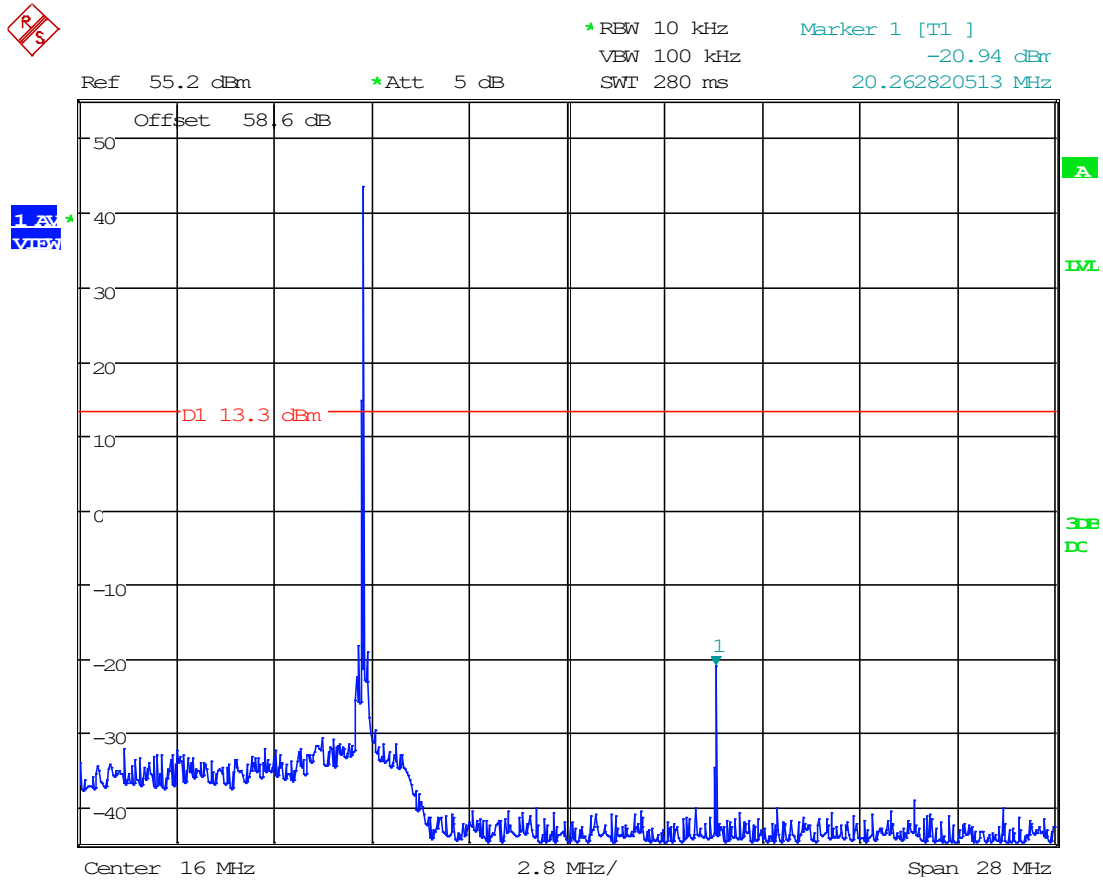


Date: 27.MAR.2023 10:25:59

8.3.10 Conducted Emissions Above 30MHz, 10.12 MHz

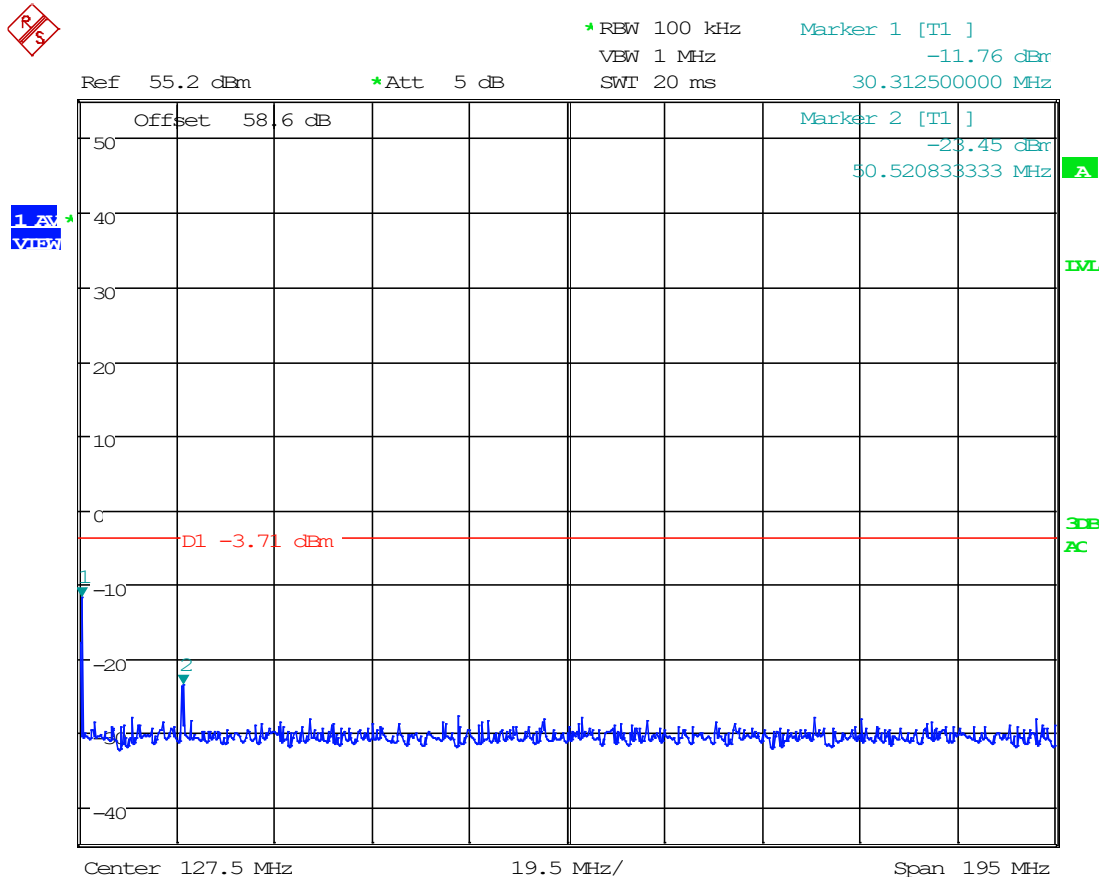

Date: 27.MAR.2023 10:01:28


8.3.11 Conducted Emissions Below 30MHz, 14.2 MHz

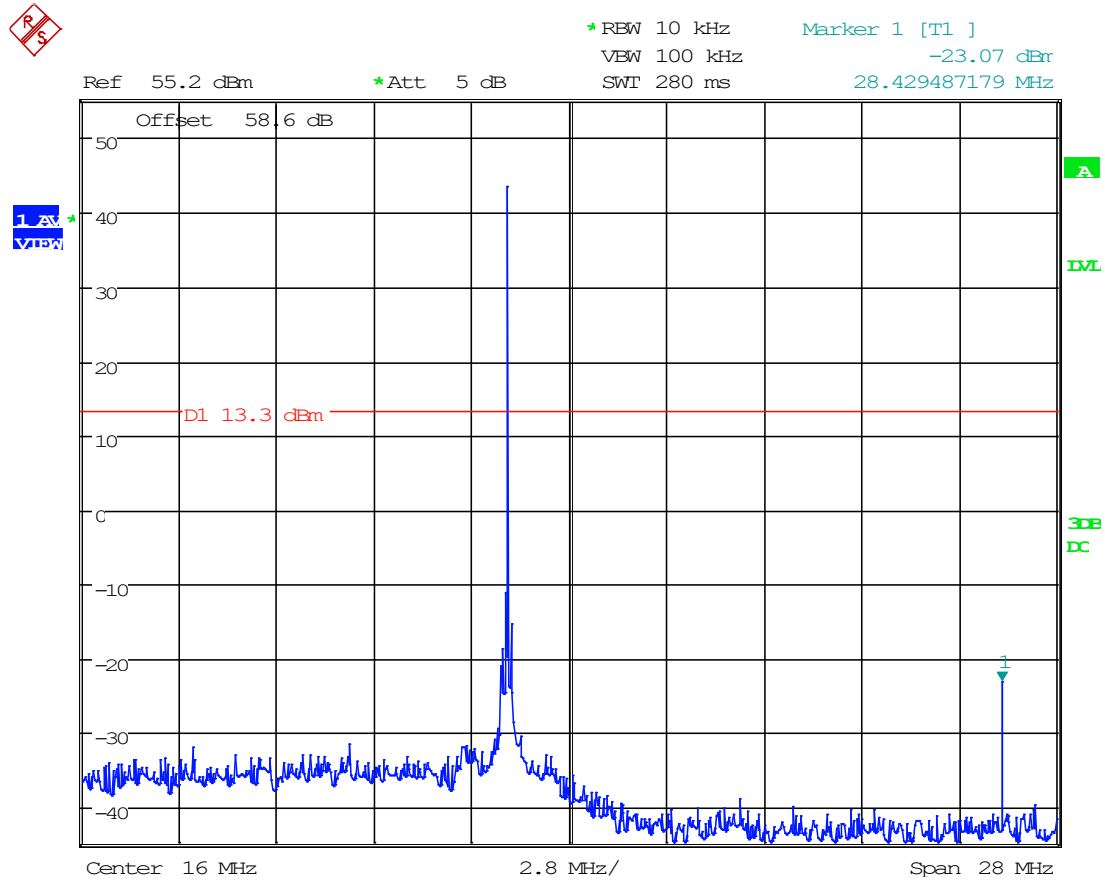

Date: 27.MAR.2023 10:26:40




8.3.12 Conducted Emissions Above 30MHz, 14.2 MHz

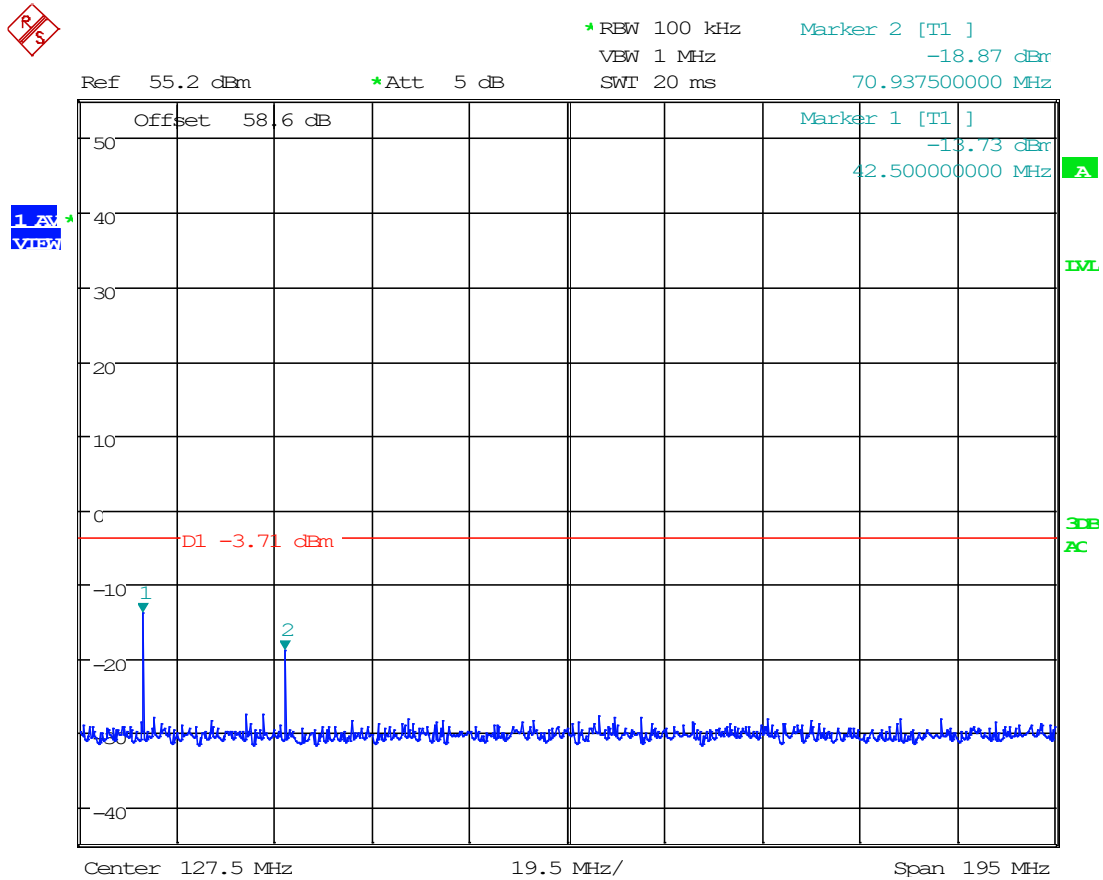


Date: 27.MAR.2023 10:02:06

8.3.13 Conducted Emissions Below 30MHz, 18.1 MHz

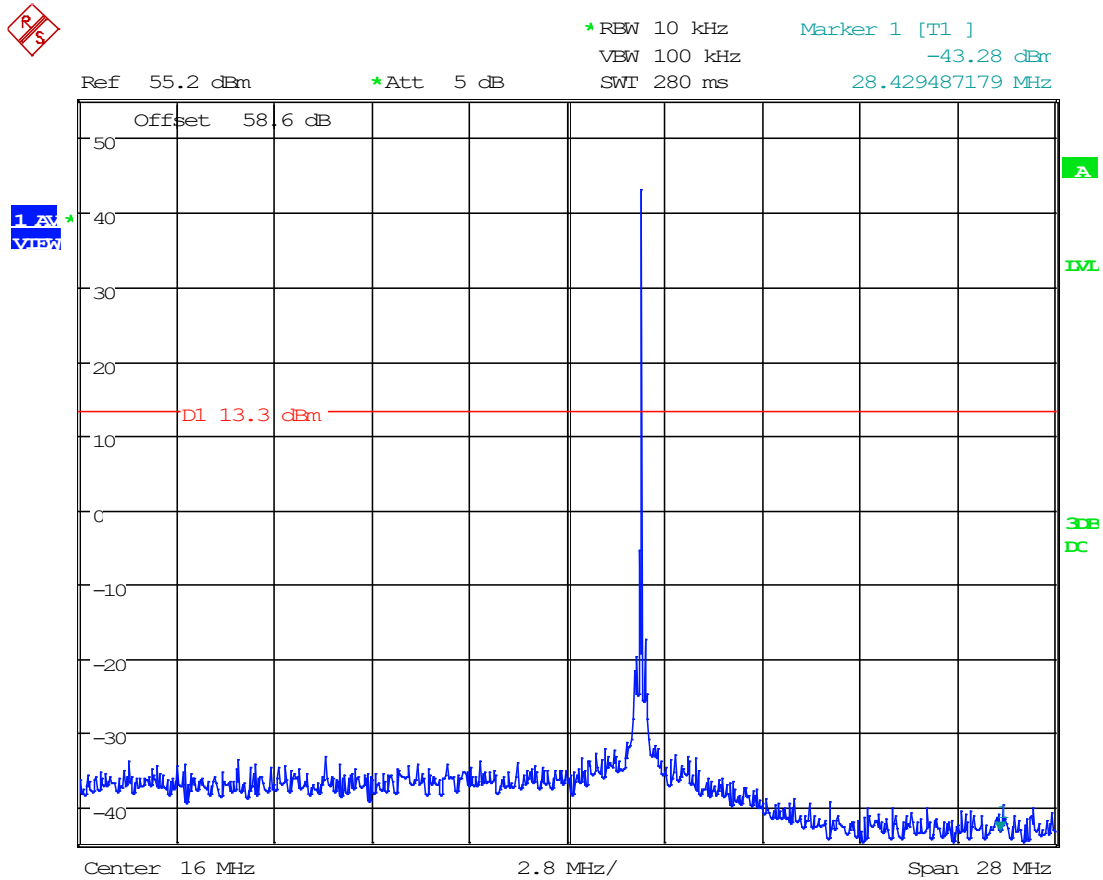


Date: 27.MAR.2023 10:27:10

8.3.14 Conducted Emissions Above 30MHz, 18.1 MHz

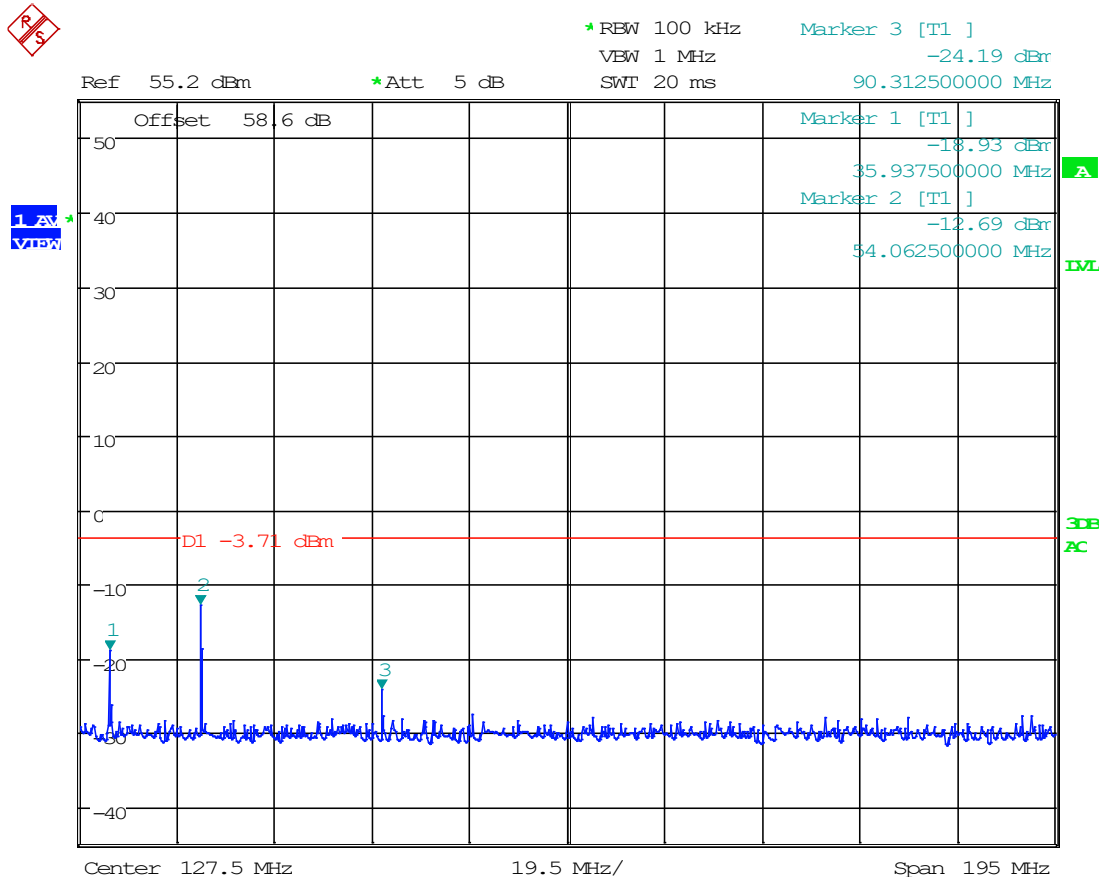

Date: 27.MAR.2023 10:02:55


8.3.15 Conducted Emissions Below 30MHz, 21.2 MHz

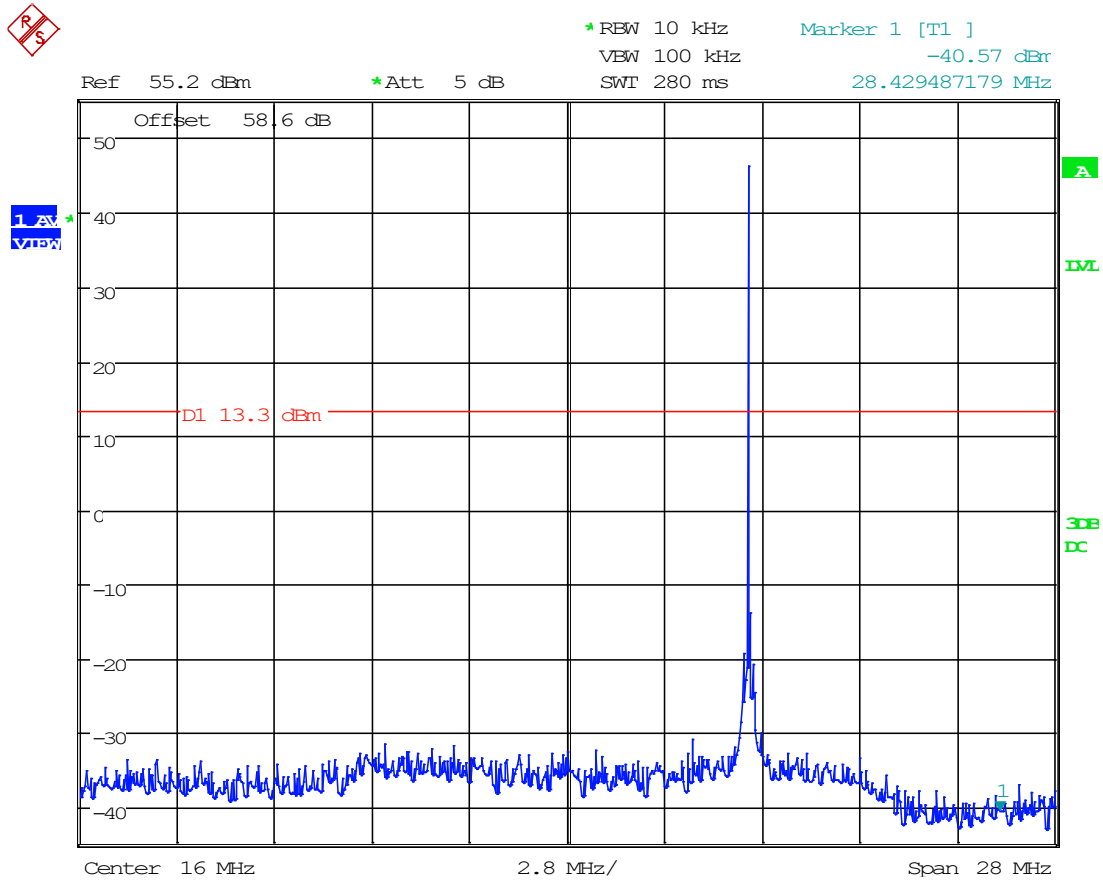

Date: 27.MAR.2023 10:27:38




8.3.16 Conducted Emissions, Above 30MHz, 21.2 MHz

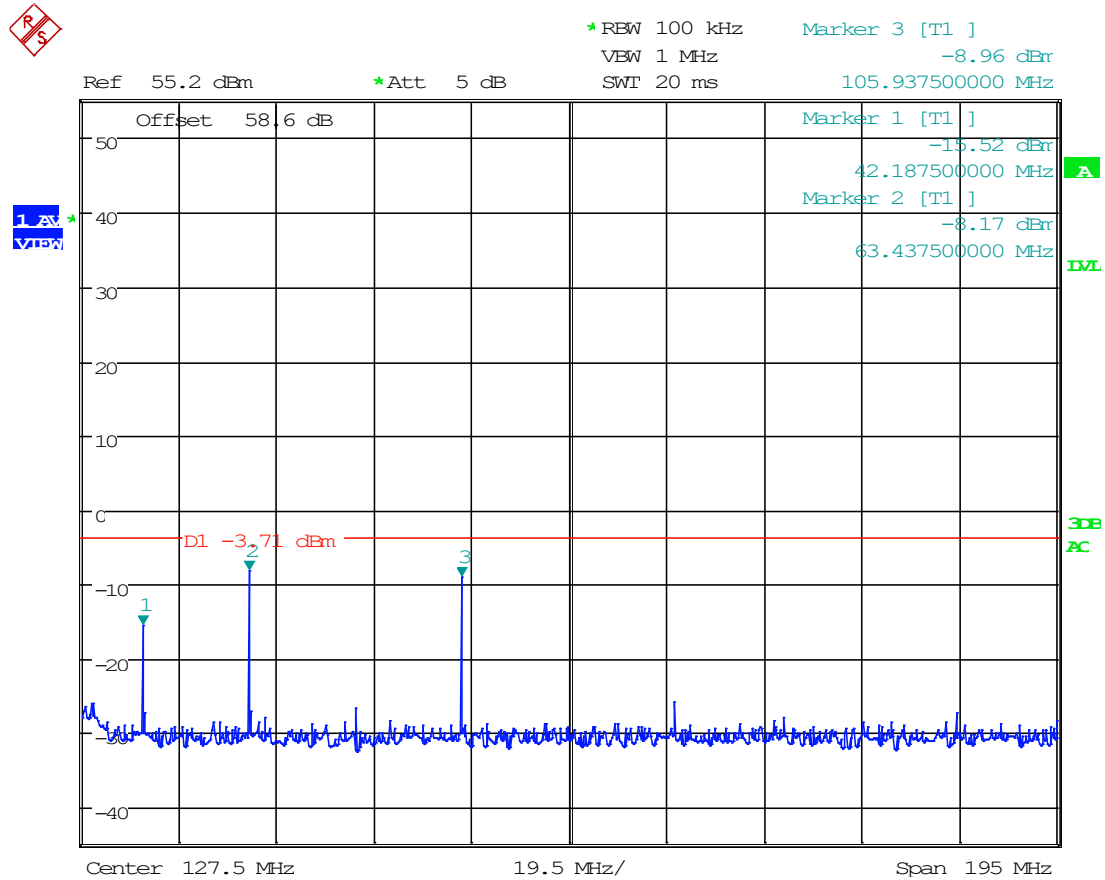


Date: 27.MAR.2023 10:03:50

8.3.17 Conducted Emissions Below 30MHz, 24.9 MHz

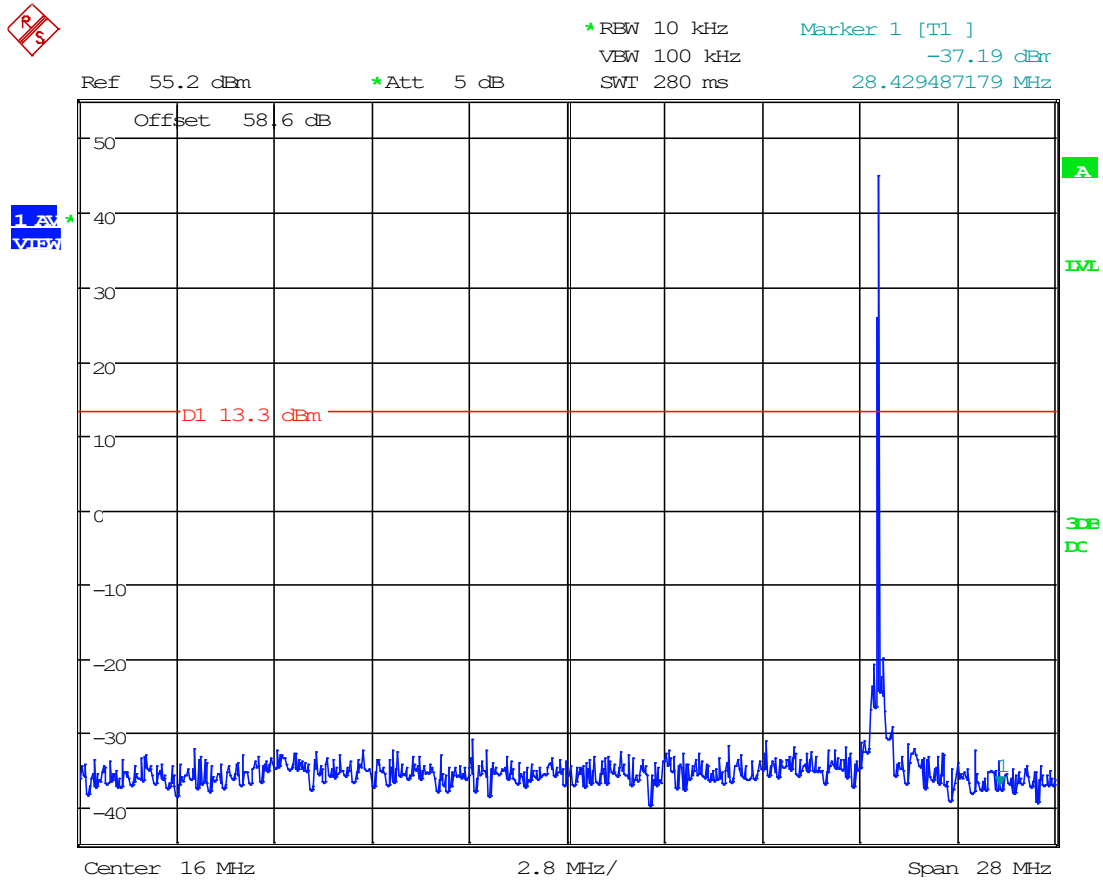


Date: 27.MAR.2023 10:28:01

8.3.18 Conducted Emissions Above 30MHz, 24.9 MHz

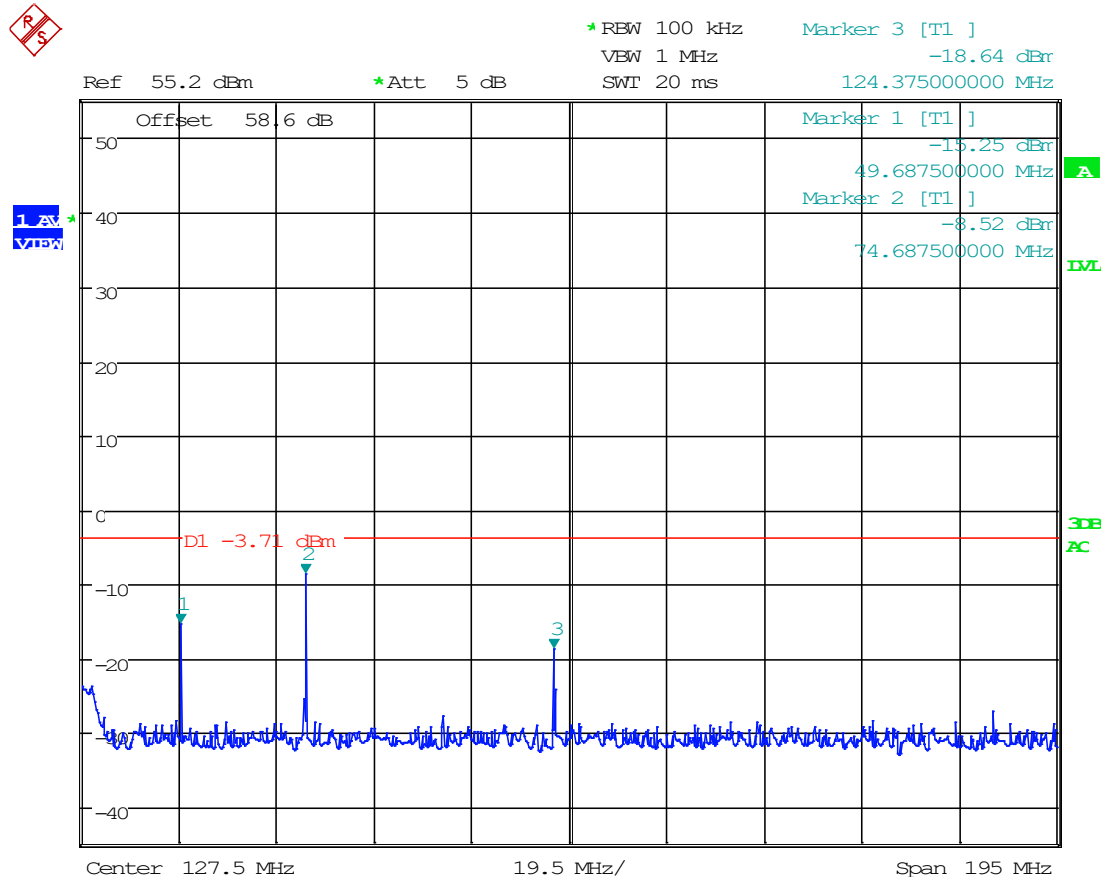


Date: 27.MAR.2023 10:04:50

8.3.19 Conducted Emissions Below 30MHz, 29 MHz

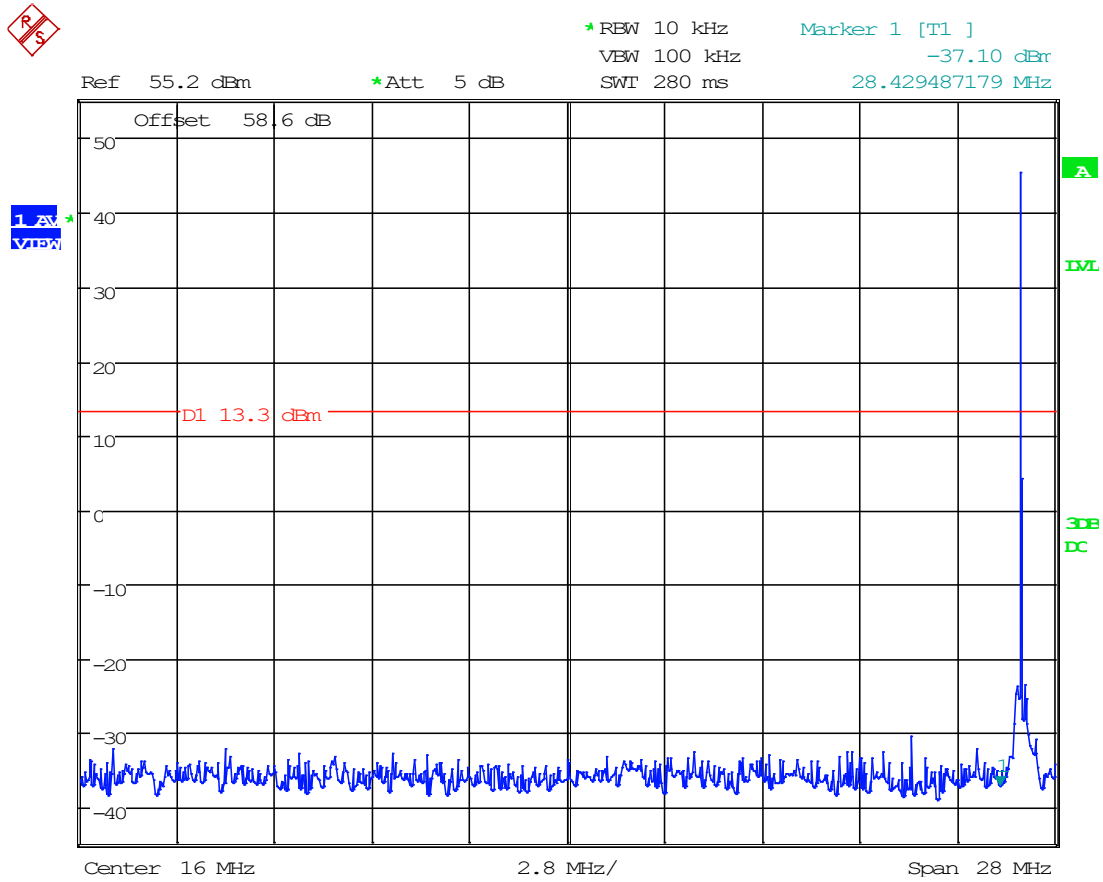

Date: 27.MAR.2023 10:28:28


8.3.20 Conducted Emissions Above 30MHz, 29 MHz

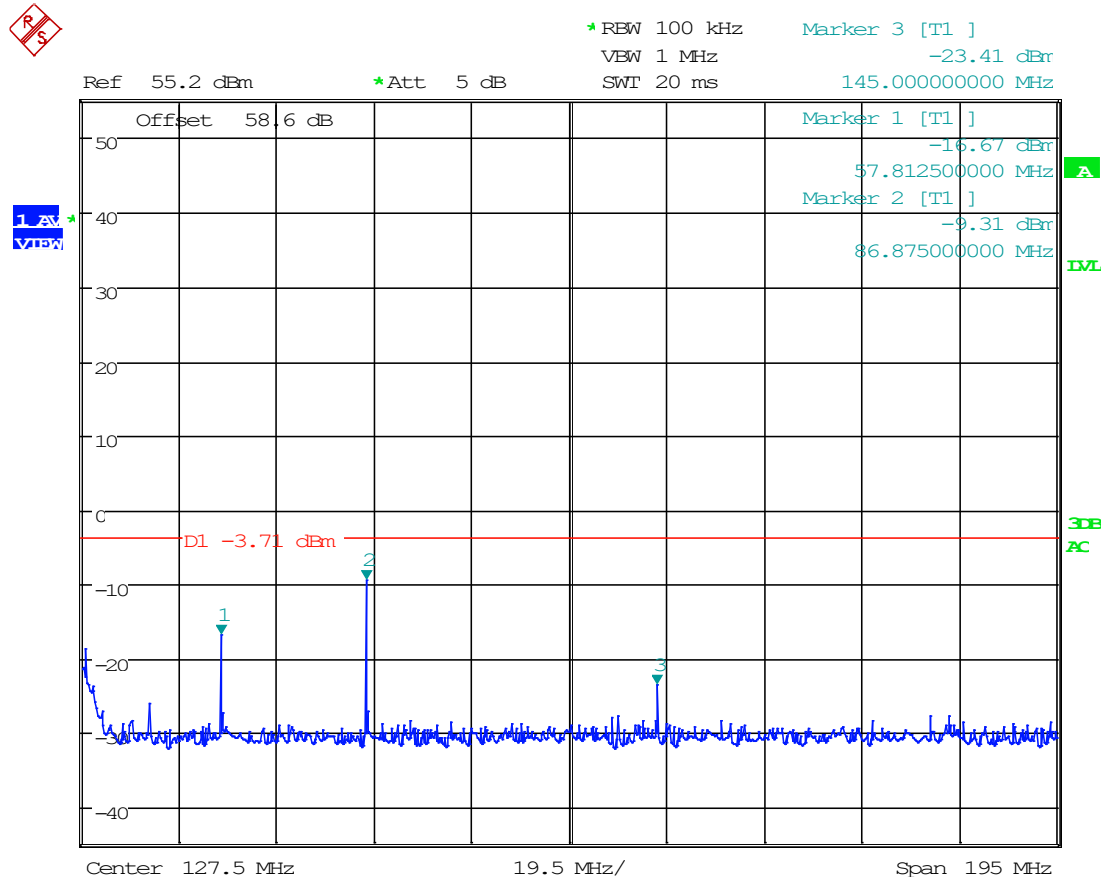

Date: 27.MAR.2023 10:05:34




8.3.21 Conducted Emissions Below 30MHz, 52 MHz

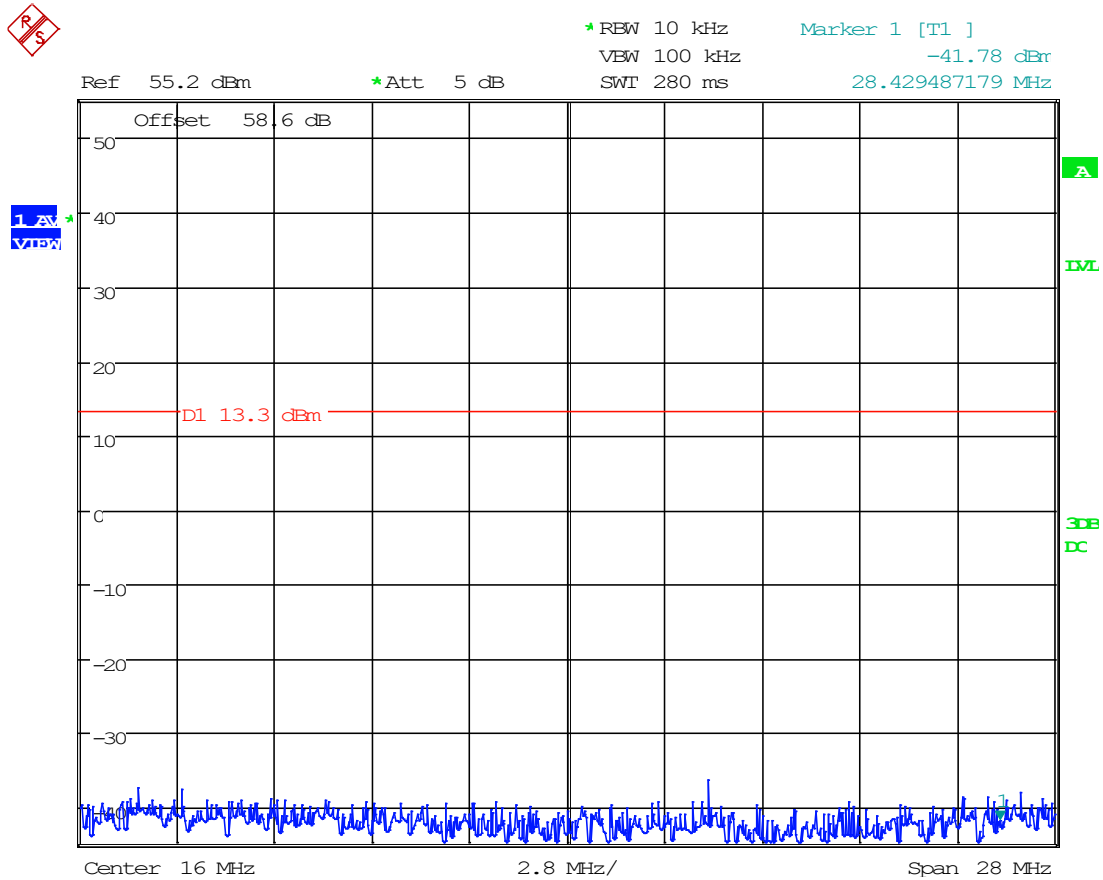

Date: 27.MAR.2023 10:28:57

8.3.22 Conducted Emissions Above 30MHz, 52 MHz

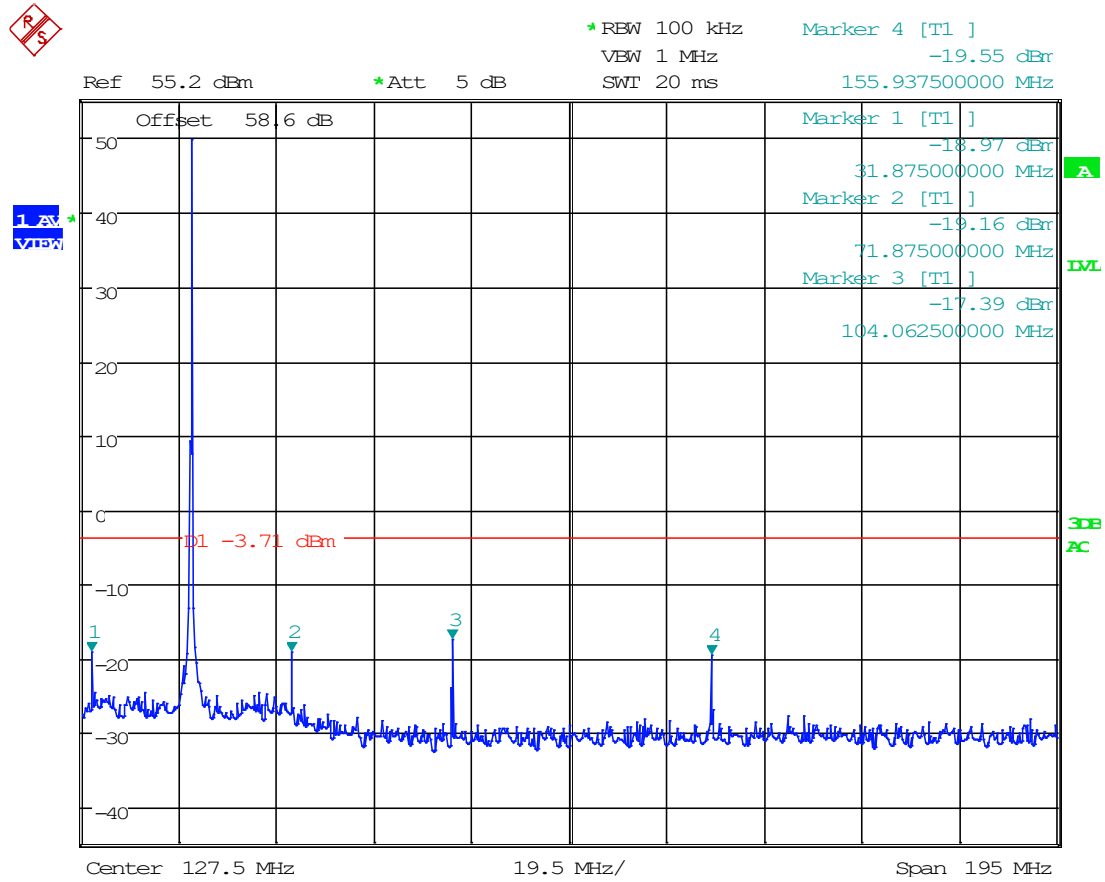


Date: 27.MAR.2023 10:06:40

8.4 Strength of Radiated Spurious Emissions


Limits from FCC Parts 2.1053, and 97.307(d)(e); and test procedure from ANSI/ TIA 603-C:2004 & ANSI C63.4-2003

Requirements: The FCC Limits for spurious emissions of a transmitting operating on and above 50 MHz, the RF spurious emissions must be at least 60 dB below the mean power of the fundamental.

Radiated Test Setup, 30 – 1000 MHz

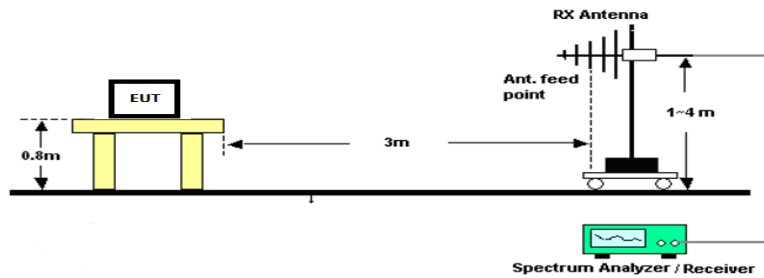

Radiated Test Setup, Above 1000 MHz

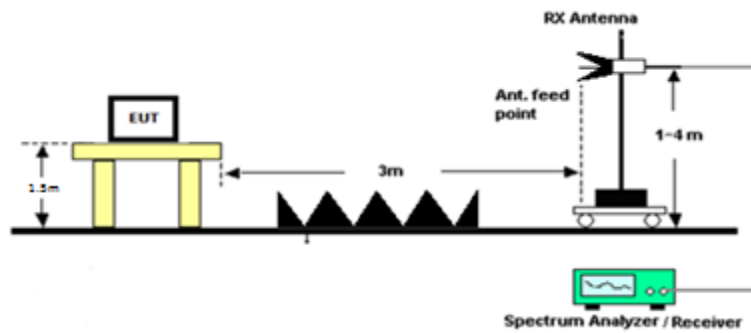



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

Radiated Emissions, Tabular Data

8.4.1 Radiated Emissions, 1.9 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
1.90	3.80	PK	30.80	V	0.63	11.30	3.00	42.73	-54.65	13.30	67.95
1.90	5.70	PK	25.90	V	0.63	11.03	3.00	37.56	-59.82	13.30	73.12
1.90	7.60	PK	23.20	V	0.63	10.78	3.00	34.61	-62.77	13.30	76.07
1.90	9.50	PK	22.40	V	0.63	10.65	3.00	33.68	-63.70	13.30	77.00
1.90	11.40	PK	20.50	V	0.63	10.60	3.00	31.73	-65.65	13.30	78.95
1.90	13.30	PK	20.50	V	0.63	10.60	3.00	31.73	-65.65	13.30	78.95
1.90	15.20	PK	20.10	V	0.63	10.48	3.00	31.21	-66.17	13.30	79.47
1.90	17.10	PK	20.40	V	0.63	10.29	3.00	31.32	-66.06	13.30	79.36
1.90	19.00	PK	18.60	V	0.63	10.20	3.00	29.43	-67.95	13.30	81.25



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.2 Radiated Emissions, 3.8 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
3.80	7.60	PK	23.40	V	0.63	10.78	3.00	34.81	-62.57	13.30	75.87
3.80	11.40	PK	21.70	V	0.63	10.60	3.00	32.93	-64.45	13.30	77.75
3.80	15.20	PK	20.10	V	0.63	10.48	3.00	31.21	-66.17	13.30	79.47
3.80	19.00	PK	19.10	V	0.63	10.20	3.00	29.93	-67.45	13.30	80.75
3.80	22.80	PK	19.30	V	0.63	9.64	3.00	29.57	-67.81	13.30	81.11
3.80	26.60	PK	19.70	V	0.63	8.98	3.00	29.31	-68.07	13.30	81.37
3.80	30.40	PK	-0.50	H	0.63	12.88	3.00	13.01	-84.37	-3.71	80.66
3.80	30.40	PK	0.10	V	0.63	12.88	3.00	13.61	-83.77	-3.71	80.06
3.80	34.20	PK	-2.20	H	0.63	13.30	3.00	11.73	-85.65	-3.71	81.94
3.80	34.20	PK	-1.70	V	0.63	13.30	3.00	12.23	-85.15	-3.71	81.44
3.80	38.00	PK	-2.60	H	0.63	13.40	3.00	11.43	-85.95	-3.71	82.24
3.80	38.00	PK	-2.10	V	0.63	13.40	3.00	11.93	-85.45	-3.71	81.74



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.3 Radiated Emissions, 5.455 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
5.46	10.91	PK	22.40	V	0.63	10.61	3.00	33.64	-63.74	13.30	77.04
5.46	16.37	PK	20.00	V	0.63	10.36	3.00	30.99	-66.38	13.30	79.68
5.46	21.82	PK	19.10	V	0.63	9.82	3.00	29.55	-67.83	13.30	81.13
5.46	27.28	PK	19.40	V	0.63	8.85	3.00	28.88	-68.50	13.30	81.80
5.46	32.73	PK	-1.10	H	0.63	13.20	3.00	12.73	-84.65	-3.71	80.94
5.46	32.73	PK	-0.50	V	0.63	13.20	3.00	13.33	-84.05	-3.71	80.34
5.46	38.19	PK	-2.40	H	0.63	13.38	3.00	11.61	-85.77	-3.71	82.06
5.46	38.19	PK	-2.00	V	0.63	13.38	3.00	12.01	-85.37	-3.71	81.66
5.46	43.64	PK	-1.10	H	0.63	12.77	3.00	12.30	-85.08	-3.71	81.37
5.46	43.64	PK	-1.20	V	0.63	12.77	3.00	12.20	-85.18	-3.71	81.47
5.46	49.10	PK	-3.30	H	0.63	11.47	3.00	8.80	-88.58	-3.71	84.87
5.46	49.10	PK	-2.90	V	0.63	11.47	3.00	9.20	-88.18	-3.71	84.47
5.46	54.55	PK	-0.90	H	0.63	9.58	3.00	9.31	-88.07	-3.71	84.36
5.46	54.55	PK	-0.90	V	0.63	9.58	3.00	9.31	-88.07	-3.71	84.36



Timco Engineering, Inc., an IIA Company
 849 NW State Road 45, Newberry, Florida 32669
 (352) 472-5500 / testing@timcoengr.com

8.4.4 Radiated Emissions, 7.3 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
7.30	14.60	PK	19.70	V	0.63	10.54	3.00	30.87	-66.51	13.30	79.81
7.30	21.90	PK	18.60	V	0.63	9.81	3.00	29.04	-68.34	13.30	81.64
7.30	29.20	PK	24.80	V	0.63	8.46	3.00	33.89	-63.49	13.30	76.79
7.30	36.50	PK	-2.40	H	0.63	13.40	3.00	11.63	-85.75	-3.71	82.04
7.30	36.50	PK	-2.30	V	0.63	13.40	3.00	11.73	-85.65	-3.71	81.94
7.30	43.80	PK	-1.50	H	0.63	12.74	3.00	11.87	-85.51	-3.71	81.80
7.30	43.80	PK	-1.90	V	0.63	12.74	3.00	11.47	-85.91	-3.71	82.20
7.30	51.10	PK	-1.00	H	0.63	10.87	3.00	10.50	-86.88	-3.71	83.17
7.30	51.10	PK	-0.90	V	0.63	10.87	3.00	10.60	-86.78	-3.71	83.07
7.30	58.40	PK	-2.80	H	0.63	8.14	3.00	5.97	-91.41	-3.71	87.70
7.30	58.40	PK	-2.40	V	0.63	8.14	3.00	6.37	-91.01	-3.71	87.30
7.30	65.70	PK	-1.30	H	0.63	6.13	3.00	5.46	-91.92	-3.71	88.21
7.30	65.70	PK	-1.10	V	0.63	6.13	3.00	5.66	-91.72	-3.71	88.01
7.30	73.00	PK	-1.20	H	0.63	6.50	3.00	5.93	-91.45	-3.71	87.74
7.30	73.00	PK	-0.80	V	0.63	6.50	3.00	6.33	-91.05	-3.71	87.34



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.5 Radiated Emissions, 10.12 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
10.12	20.24	PK	21.90	V	0.63	10.05	3.00	32.58	-64.80	13.30	78.10
10.12	30.36	PK	-0.60	H	0.63	12.87	3.00	12.90	-84.48	13.30	97.78
10.12	30.36	PK	23.70	V	0.63	12.87	3.00	37.20	-60.18	13.30	73.48
10.12	40.48	PK	-0.90	H	0.63	13.25	3.00	12.98	-84.40	-3.71	80.69
10.12	40.48	PK	8.10	V	0.63	13.25	3.00	21.98	-75.40	-3.71	71.69
10.12	50.60	PK	-0.80	H	0.63	11.02	3.00	10.85	-86.53	-3.71	82.82
10.12	50.60	PK	6.70	V	0.63	11.02	3.00	18.35	-79.03	-3.71	75.32
10.12	60.72	PK	-0.80	H	0.63	7.28	3.00	7.11	-90.26	-3.71	86.55
10.12	60.72	PK	6.90	V	0.63	7.28	3.00	14.81	-82.56	-3.71	78.85
10.12	70.84	PK	-0.70	H	0.63	6.08	3.00	6.01	-91.36	-3.71	87.65
10.12	70.84	PK	11.90	V	0.63	6.08	3.00	18.61	-78.76	-3.71	75.05
10.12	80.96	PK	-1.20	H	0.63	8.78	3.00	8.21	-89.16	-3.71	85.45
10.12	80.96	PK	4.70	V	0.63	8.78	3.00	14.11	-83.26	-3.71	79.55
10.12	91.08	PK	-0.40	H	0.63	10.61	3.00	10.84	-86.54	-3.71	82.83
10.12	91.08	PK	0.10	V	0.63	10.61	3.00	11.34	-86.04	-3.71	82.33
10.12	101.20	PK	-1.30	H	0.63	10.78	3.00	10.11	-87.27	-3.71	83.56
10.12	101.20	PK	1.10	V	0.63	10.78	3.00	12.51	-84.87	-3.71	81.16



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.6 Radiated Emissions, 14.2 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
14.20	28.40	PK	34.30	V	0.63	8.62	3.00	43.55	-53.83	13.30	67.13
14.20	42.60	PK	-1.90	H	0.63	12.98	3.00	11.71	-85.67	-3.71	81.96
14.20	42.60	PK	19.80	V	0.63	12.98	3.00	33.41	-63.97	-3.71	60.26
14.20	56.80	PK	-2.30	H	0.63	8.76	3.00	7.09	-90.29	-3.71	86.58
14.20	56.80	PK	12.50	V	0.63	8.76	3.00	21.89	-75.49	-3.71	71.78
14.20	71.00	PK	1.50	H	0.63	6.10	3.00	8.23	-89.15	-3.71	85.44
14.20	71.00	PK	14.70	V	0.63	6.10	3.00	21.43	-75.95	-3.71	72.24
14.20	85.20	PK	-1.80	H	0.63	9.82	3.00	8.65	-88.73	-3.71	85.02
14.20	85.20	PK	-0.40	V	0.63	9.82	3.00	10.05	-87.33	-3.71	83.62
14.20	99.40	PK	-2.30	H	0.63	10.86	3.00	9.19	-88.19	-3.71	84.48
14.20	99.40	PK	-0.60	V	0.63	10.86	3.00	10.89	-86.49	-3.71	82.78
14.20	113.60	PK	-1.00	H	0.63	10.10	3.00	9.73	-87.65	-3.71	83.94
14.20	113.60	PK	3.90	V	0.63	10.10	3.00	14.63	-82.75	-3.71	79.04
14.20	127.80	PK	-2.10	H	0.63	12.44	3.00	10.97	-86.41	-3.71	82.70
14.20	127.80	PK	0.30	V	0.63	12.44	3.00	13.37	-84.01	-3.71	80.30
14.20	142.00	PK	-1.40	H	0.63	15.60	3.00	14.83	-82.55	-3.71	78.84
14.20	142.00	PK	-1.40	V	0.63	15.60	3.00	14.83	-82.55	-3.71	78.84



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.7 Radiated Emissions, 18.1 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
18.10	36.20	PK	-2.30	H	0.63	13.40	3.00	11.73	-85.65	-3.71	81.94
18.10	36.20	PK	14.80	V	0.63	13.40	3.00	28.83	-68.55	-3.71	64.84
18.10	54.30	PK	5.70	H	0.63	9.68	3.00	16.01	-81.37	-3.71	77.66
18.10	54.30	PK	36.80	V	0.63	9.68	3.00	47.11	-50.27	-3.71	46.56
18.10	72.40	PK	1.40	H	0.63	6.38	3.00	8.41	-88.97	-3.71	85.26
18.10	72.40	PK	6.50	V	0.63	6.38	3.00	13.51	-83.87	-3.71	80.16
18.10	90.50	PK	-1.40	H	0.63	10.55	3.00	9.78	-87.60	-3.71	83.89
18.10	90.50	PK	6.20	V	0.63	10.55	3.00	17.38	-80.00	-3.71	76.29
18.10	108.60	PK	0.40	H	0.63	10.24	3.00	11.27	-86.11	-3.71	82.40
18.10	108.60	PK	7.30	V	0.63	10.24	3.00	18.17	-79.21	-3.71	75.50
18.10	126.70	PK	6.70	H	0.63	12.14	3.00	19.47	-77.91	-3.71	74.20
18.10	126.70	PK	4.30	V	0.63	12.14	3.00	17.07	-80.31	-3.71	76.60
18.10	144.80	PK	1.20	H	0.63	15.96	3.00	17.79	-79.59	-3.71	75.88
18.10	144.80	PK	-1.00	V	0.63	15.96	3.00	15.59	-81.79	-3.71	78.08
18.10	162.90	PK	3.00	H	0.63	16.31	3.00	19.94	-77.44	-3.71	73.73
18.10	162.90	PK	3.20	V	0.63	16.31	3.00	20.14	-77.24	-3.71	73.53
18.10	181.00	PK	-1.60	H	0.63	13.70	3.00	12.73	-84.65	-3.71	80.94
18.10	181.00	PK	3.10	V	0.63	13.70	3.00	17.43	-79.95	-3.71	76.24



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.8 Radiated Emissions, 21.2 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
21.20	42.40	PK	-0.90	H	0.63	13.02	3.00	12.75	-84.63	-3.71	80.92
21.20	42.40	PK	23.00	V	0.63	13.02	3.00	36.65	-60.73	-3.71	57.02
21.20	63.60	PK	3.20	H	0.63	6.48	3.00	10.31	-87.07	-3.71	83.36
21.20	63.60	PK	51.10	V	0.63	6.48	3.00	58.21	-39.17	-3.71	35.46
21.20	84.80	PK	-1.50	H	0.63	9.76	3.00	8.89	-88.49	-3.71	84.78
21.20	84.80	PK	19.30	V	0.63	9.76	3.00	29.69	-67.69	-3.71	63.98
21.20	106.00	PK	0.10	H	0.63	10.40	3.00	11.13	-86.25	-3.71	82.54
21.20	106.00	PK	14.10	V	0.63	10.40	3.00	25.13	-72.25	-3.71	68.54
21.20	127.20	PK	-1.70	H	0.63	12.26	3.00	11.19	-86.19	-3.71	82.48
21.20	127.20	PK	29.70	V	0.63	12.26	3.00	42.59	-54.79	-3.71	51.08
21.20	148.40	PK	-2.20	H	0.63	16.34	3.00	14.77	-82.61	-3.71	78.90
21.20	148.40	PK	11.10	V	0.63	16.34	3.00	28.07	-69.31	-3.71	65.60
21.20	169.60	PK	-0.40	H	0.63	15.34	3.00	15.57	-81.81	-3.71	78.10
21.20	169.60	PK	33.30	V	0.63	15.34	3.00	49.27	-48.11	-3.71	44.40
21.20	190.80	PK	0.80	H	0.63	13.98	3.00	15.41	-81.97	-3.71	78.26
21.20	190.80	PK	28.40	V	0.63	13.98	3.00	43.01	-54.37	-3.71	50.66
21.20	212.00	PK	34.80	H	0.63	10.46	3.00	45.89	-51.49	-3.71	47.78
21.20	212.00	PK	29.80	V	0.63	10.46	3.00	40.89	-56.49	-3.71	52.78



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.9 Radiated Emissions, 24.9 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
24.90	49.80	PK	0.10	H	0.63	11.26	3.00	11.99	-85.39	-3.71	81.68
24.90	49.80	PK	18.90	V	0.63	11.26	3.00	30.79	-66.59	-3.71	62.88
24.90	74.70	PK	11.30	H	0.63	6.91	3.00	18.84	-78.54	-3.71	74.83
24.90	74.70	PK	18.00	V	0.63	6.91	3.00	25.54	-71.84	-3.71	68.13
24.90	99.60	PK	5.10	H	0.63	10.84	3.00	16.57	-80.81	-3.71	77.10
24.90	99.60	PK	8.20	V	0.63	10.84	3.00	19.67	-77.71	-3.71	74.00
24.90	124.50	PK	18.50	H	0.63	11.60	3.00	30.73	-66.65	-3.71	62.94
24.90	124.50	PK	13.30	V	0.63	11.60	3.00	25.53	-71.85	-3.71	68.14
24.90	149.40	PK	5.90	H	0.63	16.40	3.00	22.93	-74.45	-3.71	70.74
24.90	149.40	PK	-0.70	V	0.63	16.40	3.00	16.33	-81.05	-3.71	77.34
24.90	174.30	PK	22.40	H	0.63	16.73	3.00	39.76	-57.61	-3.71	53.90
24.90	174.30	PK	10.90	V	0.63	16.73	3.00	28.26	-69.11	-3.71	65.40
24.90	199.20	PK	-0.90	H	0.63	16.92	3.00	16.65	-80.73	-3.71	77.02
24.90	199.20	PK	10.30	V	0.63	16.92	3.00	27.85	-69.53	-3.71	65.82
24.90	224.10	PK	28.90	H	0.63	10.30	3.00	39.83	-57.55	-3.71	53.84
24.90	224.10	PK	27.50	V	0.63	10.30	3.00	38.43	-58.95	-3.71	55.24
24.90	249.00	PK	25.40	H	0.63	11.12	3.00	37.15	-60.23	-3.71	56.52
24.90	249.00	PK	47.30	V	0.63	11.12	3.00	59.05	-38.33	-3.71	34.62



Timco Engineering, Inc., an IIA Company
 849 NW State Road 45, Newberry, Florida 32669
 (352) 472-5500 / testing@timcoengr.com

8.4.10 Radiated Emissions, 29 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
29.00	58.00	PK	13.80	H	0.63	8.30	3.00	22.73	-74.65	-3.71	70.94
29.00	58.00	PK	53.40	V	0.63	8.30	3.00	62.33	-35.05	-3.71	31.34
29.00	87.00	PK	0.40	H	0.63	10.10	3.00	11.13	-86.25	-3.71	82.54
29.00	87.00	PK	48.60	V	0.63	10.10	3.00	59.33	-38.05	-3.71	34.34
29.00	116.00	PK	5.50	H	0.63	10.20	3.00	16.33	-81.05	-3.71	77.34
29.00	116.00	PK	28.10	V	0.63	10.20	3.00	38.93	-58.45	-3.71	54.74
29.00	145.00	PK	-0.60	H	0.63	16.00	3.00	16.03	-81.35	-3.71	77.64
29.00	145.00	PK	4.60	V	0.63	16.00	3.00	21.23	-76.15	-3.71	72.44
29.00	174.00	PK	2.80	H	0.63	16.73	3.00	20.16	-77.21	-3.71	73.50
29.00	174.00	PK	9.30	V	0.63	16.73	3.00	26.66	-70.71	-3.71	67.00
29.00	203.00	PK	24.30	H	0.63	10.74	3.00	35.67	-61.71	-3.71	58.00
29.00	203.00	PK	59.10	V	0.63	10.74	3.00	70.47	-26.91	-3.71	23.20
29.00	232.00	PK	21.00	H	0.63	10.34	3.00	31.97	-65.41	-3.71	61.70
29.00	232.00	PK	47.90	V	0.63	10.34	3.00	58.87	-38.51	-3.71	34.80
29.00	261.00	PK	27.20	H	0.63	11.82	3.00	39.65	-57.73	-3.71	54.02
29.00	261.00	PK	25.50	V	0.63	11.82	3.00	37.95	-59.43	-3.71	55.72
29.00	290.00	PK	26.30	H	0.63	13.20	3.00	40.13	-57.25	-3.71	53.54
29.00	290.00	PK	22.00	V	0.63	13.20	3.00	35.83	-61.55	-3.71	57.84



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

8.4.11 Radiated Emissions, 52 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
52.00	104.00	PK	14.70	H	0.63	10.60	3.00	25.93	-71.45	-3.71	67.74
52.00	104.00	PK	36.60	V	0.63	10.60	3.00	47.83	-49.55	-3.71	45.84
52.00	156.00	PK	19.30	H	0.63	16.60	3.00	36.53	-60.85	-3.71	57.14
52.00	156.00	PK	26.30	V	0.63	16.60	3.00	43.53	-53.85	-3.71	50.14
52.00	208.00	PK	71.80	H	0.63	10.58	3.00	83.01	-14.37	-3.71	10.66
52.00	208.00	PK	51.40	V	0.63	10.58	3.00	62.61	-34.77	-3.71	31.06
52.00	260.00	PK	61.30	H	0.63	11.80	3.00	73.73	-23.65	-3.71	19.94
52.00	260.00	PK	61.10	V	0.63	11.80	3.00	73.53	-23.85	-3.71	20.14
52.00	312.00	PK	45.10	H	0.63	14.78	3.00	60.51	-36.87	-3.71	33.16
52.00	312.00	PK	36.00	V	0.63	14.78	3.00	51.41	-45.97	-3.71	42.26
52.00	364.00	PK	34.10	H	0.63	14.34	3.00	49.07	-48.31	-3.71	44.60
52.00	364.00	PK	33.10	V	0.63	14.34	3.00	48.07	-49.31	-3.71	45.60
52.00	416.00	PK	34.30	H	0.63	15.08	3.00	50.01	-47.37	-3.71	43.66
52.00	416.00	PK	41.00	V	0.63	15.08	3.00	56.71	-40.67	-3.71	36.96
52.00	468.00	PK	23.30	H	0.63	16.52	3.00	40.45	-56.93	-3.71	53.22
52.00	468.00	PK	26.70	V	0.63	16.52	3.00	43.85	-53.53	-3.71	49.82
52.00	520.00	PK	19.00	H	0.63	17.20	3.00	36.83	-60.55	-3.71	56.84
52.00	520.00	PK	26.10	V	0.63	17.20	3.00	43.93	-53.45	-3.71	49.74



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in separate supplementary documents labelled EXTERNAL PHOTOS and INTERNAL PHOTOS.

10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate supplementary ANNEX-B document.

11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_7163-23_FCC 97_	1	Initial release	3/28/2023
	2	Updated address, Page 4	4/17/2023



Timco Engineering, Inc., an IIA Company
849 NW State Road 45, Newberry, Florida 32669
(352) 472-5500 / testing@timcoengr.com

END OF TEST REPORT
