

# **FCC Test Report**

Report No.: AGC12971230701FR01

**FCC ID** : 2AJYRNM01232285

APPLICATION PURPOSE Original Equipment

**PRODUCT DESIGNATION**: Base One Max (3-in-1) with MagSafe

**BRAND NAME** : NOMAD

**MODEL NAME** : NM01232285, NM01235385

**APPLICANT**: Nomad Goods, Inc

**DATE OF ISSUE** : Aug. 24, 2023

**STANDARD(S)** : FCC Part 15 Subpart C

**REPORT VERSION**: V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 34

# REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 24, 2023	Valid	Initial Release



# **TABLE OF CONTENTS**

1. (	GENERAL INFORMATION	5
2. F	PRODUCT INFORMATION	<del>6</del>
	2.1 PRODUCT TECHNICAL DESCRIPTION	6
	2.2 TEST FREQUENCY LIST	7
	2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
	2.4 TEST METHODOLOGY	8
	2.5 SPECIAL ACCESSORIES	8
	2.6 EQUIPMENT MODIFICATIONS	8
	2.7 ANTENNA REQUIREMENT	8
3. 1	TEST ENVIRONMENT	9
	3.1 ADDRESS OF THE TEST LABORATORY	9
	3.2 TEST FACILITY	9
	3.3 ENVIRONMENTAL CONDITIONS	10
	3.4 MEASUREMENT UNCERTAINTY	10
	3.5 LIST OF EQUIPMENTS USED	11
<b>4.</b> S	SYSTEM TEST CONFIGURATION	12
	4.1 EUT CONFIGURATION	12
	4.2 EUT EXERCISE	12
	4.3 CONFIGURATION OF TESTED SYSTEM	12
	4.4 EQUIPMENT USED IN TESTED SYSTEM	13
	4.5 SUMMARY OF TEST RESULTS	14
5. [	DESCRIPTION OF TEST MODES	15
6. F	FIELD STRENGTH OF FUNDAMENTAL	17
	6.1 PROVISIONS APPLICABLE	17
	6.3 FIELD STRENGTH CALCULATION	19
	6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	20
	6.5 MEASUREMENT RESULTS	21
7. 2	20 DB BANDWIDTH	27
	7.1 PROVISIONS APPLICABLE	27
	7.2 MEASUREMENT PROCEDURE	27
	7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	27
	7.4 MEASUREMENT RESULTS	28
8. <i>A</i>	AC POWER LINE CONDUCTED EMISSION TEST	30
	8.1 LIMITS OF LINE CONDUCTED EMISSION TEST	30
Anv r	8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION) report having not been signed by authorized approver, or having been aftered without authorization, or having not been stamped by the "Dedicated Testing/Ins	30


Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



Page 4 of 34

ΑP	PENDIX B: PHOTOGRAPHS OF TEST EUT	. 34
ΑP	PENDIX A: PHOTOGRAPHS OF TEST SETUP	. 34
	8.5 MEASUREMENT RESULTS	. 32
	8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 31
	8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	. 31





# 1. GENERAL INFORMATION

Applicant	Nomad Goods, Inc		
Address	1187 Coast Village Rd. #638, Santa Barbara, CA 93108, United States		
Manufacturer	NuVolta Technologies (Hefei) Co., Ltd.		
Address	Room 605/606, No.2800, Building F-1, Innovation Industrial Park Phase 2, Innovation Avenue, High-tech Zone, Hefei, Anhui, PRC.		
Factory	HUIZHOU MIKI TECHNOLOGY CO., LTD.		
Address	2F, 1# Building MIKI Industrial Park, Guangtaibei Road 39, Huinan Hi-Tech Industrial Park, Huizhou, Guangdong.		
Product Designation	Base One Max (3-in-1) with MagSafe		
Brand Name	NOMAD		
Test Model	NM01232285		
Series Model	NM01235385		
Difference Description	All the same except appearance color.		
Deviation from Standard	No any deviation from the test method		
Date of receipt of test item	Jul. 05, 2023		
Date of Test	Jul. 11, 2023~Aug. 24, 2023		
Test Result	Pass		
Test Report Form No	AGCTR-ER-FCC-WPTV1.0		

Reviewed By

Calvin Liu
(Reviewer)

Aug. 24, 2023



Page 6 of 34

# 2. PRODUCT INFORMATION

# 2.1 PRODUCT TECHNICAL DESCRIPTION

Hardware Version	T-NO3_V1.2		
Software Version	NU1708A2_Tx_JDM_T_NO3_A11a_BPP_5W_V0.10		
Frequency Band	WPT_1: 110.5kHz-205kHz WPT_2: 325kHz-330kHz WPT_3: 360kHz-365kHz		
Operation Frequency	146.6kHz, 326.5kHz, 360.0kHz		
Modulation Type	ASK		
Field Strength of Fundamental	66.77dBuV/m (Max)		
Antenna Designation	Coil Antenna		
Antenna Gain	0dBi		
EUT Input& Output Rating	Input: DC 12V 3A for adapter Output 1: DC 12V 1.25A Max 15W Output 2: DC 5V 0.5A Max 2.5W Output 3:DC 5V 1A Max 5W		
Wireless Charging Output Power	22.5W(total)		
Adapter Information	N/A		



Page 7 of 34

#### 2.2 TEST FREQUENCY LIST

# For AirPods Pro Case:

Frequency Band	Channel Number	Frequency	
110.5~205kHz	01	146.6kHz	

# For New Apple Wacth:

Frequency Band	Channel Number	Frequency	
325~330kHz	01	326.5kHz	

# **For Apple Mobile Phone:**

Frequency Band	Channel Number	Frequency	
360~365kHz	01	360.0kHz	



Page 8 of 34

# 2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AJYRNM01232285** filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

#### 2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Document Title	
1	FCC 47 CFR Part 2 Frequency allocations and radio treaty matters; general rules and rec	
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

#### 2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

#### 2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.7 ANTENNA REQUIREMENT

# **Standard Requirement**

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

# **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0 dBi.



Page 9 of 34

#### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

# A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

# FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 10 of 34

# 3.3 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS		
Temperature range (°C)	15 - 35	-20 - 50		
Relative humidty range	20 % - 75 %	20 % - 75 %		
Pressure range (kPa)	86 - 106	86 - 106		
Power supply				

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

#### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty	
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$	
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 4.2 \text{ dB}$	
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.8 \text{ dB}$	
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$	
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$	
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$	
Uncertainty of spurious emissions, conducted	U <sub>c</sub> = ±2 %	
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$	



Page 11 of 34

#### 3.5 LIST OF EQUIPMENTS USED

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test Software	R&S	Ver.V1.71	N/A	N/A	N/A
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025
Test Software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A
6dB attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024



#### **4.SYSTEM TEST CONFIGURATION**

#### **4.1 EUT CONFIGURATION**


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### **4.2 EUT EXERCISE**


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

#### 4.3 CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:





Page 13 of 34

# **4.4 EQUIPMENT USED IN TESTED SYSTEM**

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

☐ Test Accessories Come From The Laboratory

Item	Equipment Model No. Ident		Identifier	Note
1	Huawei Adapter	P60 Pro	Input: AC 100-240V, 24A Output: DC 5V, 2A/ DC 10V, 4A/ DC 11V, 6A/ DC 20V, 44A	Accessories
2	USB Cable	N/A	1m, Unshielded	Accessories

□ Test Accessories Come From The Manufacturer


Item	Equipment	Model No.	Identifier	Note
1	Base One Max (3-in-1) with MagSafe	NM01232285	2AJYRNM01232285	EUT
2	Apple Mobile Phone	iPhone 12	N/A	Accessories
3	New Apple Watch	Series 8	N/A	Accessories
4	Earphone	AirPods 3	N/A	Accessories



Page 14 of 34

#### 4.5 SUMMARY OF TEST RESULTS

Item	FCC Rules	FCC Rules Description Of Test	
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Radiated Spurious Emission	Pass
3	§15.215(c)	20dB Bandwidth	Pass
4	§15.205(a)	Restricted Bands of Operation	Pass
5	§15.207	AC Power Line Conducted Emission	Pass





# 5. DESCRIPTION OF TEST MODES

	Summary table of Test Cases
	Equipment type / Modulation
Test Item	WPT_(TX:146.6kHz, 326.5kHz, 360.0kHz)/ ASK
Radiated&Conducted Test Cases	Mode 1: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%) Mode 2: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%) Mode 3: AC/DC Adapter + EUT + Mobile Phone (Battery Status: 100%) Mode 4: AC/DC Adapter + EUT + Earphone (Battery Status: 11%) Mode 5: AC/DC Adapter + EUT + Earphone (Battery Status: <50%) Mode 6: AC/DC Adapter + EUT + Earphone (Battery Status: 100%) Mode 6: AC/DC Adapter + EUT + Apple Watch (Battery Status: 100%) Mode 7: AC/DC Adapter + EUT + Apple Watch (Battery Status: <1%) Mode 8: AC/DC Adapter + EUT + Apple Watch (Battery Status: <50%) Mode 9: AC/DC Adapter + EUT + Mobile Phone+ Earphone+ Apple Watch (Battery Status: <1%) Mode 10: AC/DC Adapter + EUT + Mobile Phone+ Earphone+ Apple Watch (Battery Status: <50%) Mode 11: AC/DC Adapter + EUT + Mobile Phone+ Earphone+ Apple Watch (Battery Status: <100%) Mode 12: AC/DC Adapter + EUT + Mobile Phone+ Earphone (Battery Status: <10%) Mode 13: AC/DC Adapter + EUT + Mobile Phone+ Earphone (Battery Status: <1%) Mode 14: AC/DC Adapter + EUT + Mobile Phone+ Earphone (Battery Status: <10%) Mode 15: AC/DC Adapter + EUT + Mobile Phone+ Earphone (Battery Status: <10%) Mode 16: AC/DC Adapter + EUT + Mobile Phone+ Apple Watch (Battery Status: <1%) Mode 17: AC/DC Adapter + EUT + Mobile Phone+ Apple Watch (Battery Status: <10%) Mode 18: AC/DC Adapter + EUT + Mobile Phone+ Apple Watch (Battery Status: <100%) Mode 19: AC/DC Adapter + EUT + Earphone+ Apple Watch (Battery Status: <100%) Mode 20: AC/DC Adapter + EUT + Earphone+ Apple Watch (Battery Status: <100%) Mode 20: AC/DC Adapter + EUT + Earphone+ Apple Watch (Battery Status: <100%) Mode 20: AC/DC Adapter + EUT + Earphone+ Apple Watch (Battery Status: <100%)
	Mode 1: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <1%) Mode 2: AC/DC Adapter + EUT + Mobile Phone (Battery Status: <50%) Mode 3: AC/DC Adapter + EUT + Mobile Phone (Battery Status: 100%) Mode 4: AC/DC Adapter + EUT + Earphone (Battery Status: <1%)
AC Conducted Emission	Mode 4: AC/DC Adapter + EUT + Earphone (Battery Status: <1%) Mode 5: AC/DC Adapter + EUT + Earphone (Battery Status: <50%) Mode 6: AC/DC Adapter + EUT + Earphonet (Battery Status: 100%) Mode 7: AC/DC Adapter + EUT + Apple Watch (Battery Status: <1%) Mode 8: AC/DC Adapter + EUT + Apple Watch (Battery Status: <50%) Mode 9: AC/DC Adapter + EUT + Apple Watch (Battery Status: 100%) Mode 10: AC/DC Adapter + EUT + Mobile Phone+ Earphone+ Apple Watch (Battery Status: <1%) Mode 11: AC/DC Adapter + EUT + Mobile Phone+ Earphone+ Apple Watch



Report No.: AGC12971230701FR01 Page 16 of 34

	Mode 12: AC/DC Adapter + EUT +Mobile Phone+ Earphone+Apple Watch
	(Battery Status: 100%)
	Mode 13: AC/DC Adapter + EUT +Mobile Phone+ Earphone
	(Battery Status: <1%)
	Mode 14: AC/DC Adapter + EUT +Mobile Phone+ Earphone
	(Battery Status: <50%)
	Mode 15: AC/DC Adapter + EUT +Mobile Phone+ Earphone
	(Battery Status: <100%)
	Mode 16: AC/DC Adapter + EUT +Mobile Phone+ Apple Watch
	(Battery Status: <1%)
	Mode 17: AC/DC Adapter + EUT +Mobile Phone+ Apple Watch
	(Battery Status: <50%)
	Mode 18: AC/DC Adapter + EUT +Mobile Phone+ Apple Watch
	(Battery Status: <100%)
	Mode 19: AC/DC Adapter + EUT + Earphone+ Apple Watch
	(Battery Status: <1%)
	Mode 20: AC/DC Adapter + EUT + Earphone+ Apple Watch
	(Battery Status: <50%)
	Mode 21: AC/DC Adapter + EUT + Earphone+ Apple Watch
	(Battery Status: <100%)
ote:	

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- The manufacturer provides wireless charging equipment for testing and evaluation (Apple Phone, New Apple Watch, Earphone).
- 4. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.



Page 17 of 34

# 6. FIELD STRENGTH OF FUNDAMENTAL

#### **6.1 PROVISIONS APPLICABLE**

Test Requirement:	FCC Part15 C Section 15.209					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	9kHz to 1GHz					
Test site:	Measurement Distance: 3m					
	Frequency	Detector	RBW	VBW	Value	
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak	
Receiver setup:	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak	
ixeceiver setup.	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak	
	Abovo 1CUz	Peak	1MHz	3MHz	Peak	
	Above 1GHz	Peak	1MHz	10Hz	Average	

# Limits for frequency below 30MHz

Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

# Limits for frequency Above 30MHz

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 4011	54.00	Average Value
Above 1GHz	74.00	Peak Value

Remark:

- (1) Emission level dB  $\mu$  V = 20 log Emission level  $\mu$  V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 18 of 34

#### **6.2 MEASUREMENT PROCEDURE**

- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC12971230701FR01 Page 19 of 34

#### **6.3 FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - AG - AV

where  $FS = Field Strength in dB\mu V/m$ 

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB/m AG = Amplifier Gain in dB AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

FS = RR + LF where  $FS = Field \ Strength \ in \ dB\mu V/m$   $RR = RA - AG - AV \ in \ dB\mu V$   $LF = CF + AF \ in \ dB$ 

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 dB $\mu$ V/m.

This value in dBµV/m was converted to its corresponding level in µV/m.

 $RA = 52.0 dB\mu V/m$ 

AF = 7.4 dB/m RR = 18.0 dB $\mu$ V

CF = 1.6 dB LF = 9.0 dB

AG = 29.0 dBAV = 5.0 dB

FS = RR + LF

 $FS = 18 + 9 = 27 dB\mu V/m$ 

Level in  $\mu$ V/m = Common Antilogarithm [(27 dB $\mu$ V/m)/20] = 22.4  $\mu$ V/m

Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFH[dB(S/m)]$ 

Where,

H is the magnetic field strength (to be compared with the limit),

V is the voltage level measured by the receiver or spectrum analyzer,

LC is the cable loss,

GPA is the gain of the preamplifier (if used), and

AFH is the magnetic antenna factor.

If the "electrical" antenna factor is used instead, the above equation becomes:

 $H[dB(\mu A/m)] = V[dB(\mu V)] + LC[dB] - GPA[dB] + AFE[dB(m-1)] - 51.5[dB\Omega]$ 

where AFE is the "electric" antenna factor, as provided by the antenna calibration laboratory.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




# 6.4 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

#### RADIATED EMISSION TEST SETUP 9kHz-30MHz

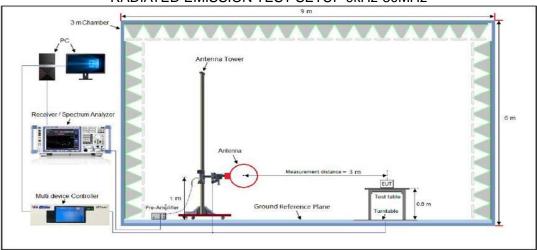

#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

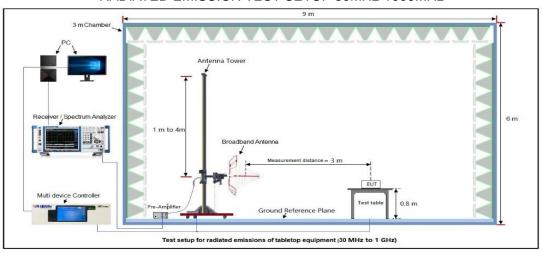


The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



# **6.5 MEASUREMENT RESULTS**


#### **ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz**

EUT	Base One Max (3-in-1) with MagSafe	Model Name	NM01232285
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna	Face

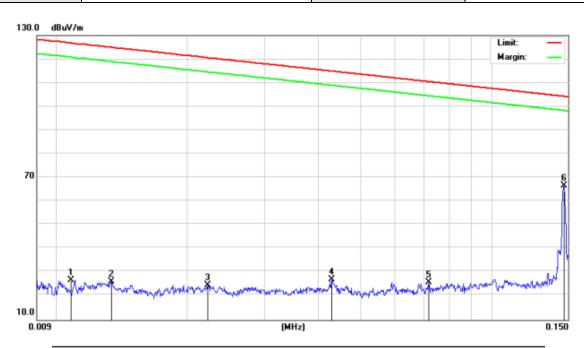

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		0.0108	-1.73	28.28	26.55	126.8	-100.27	peak
2		0.0134	-2.11	28.09	25.98	124.9	-98.98	peak
3		0.0223	-2.90	27.42	24.52	120.5	-96.03	peak
4		0.0429	1.09	25.88	26.97	114.8	-87.91	peak
5		0.0718	2.02	23.73	25.75	110.4	-84.67	peak
6	*	0.1466	45.10	21.53	66.63	104.2	-37.61	peak


# **RESULT: PASS**





# **ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 9kHz-150kHz**

EUT	Base One Max (3-in-1) with MagSafe	Model Name	NM01232285
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna	Side

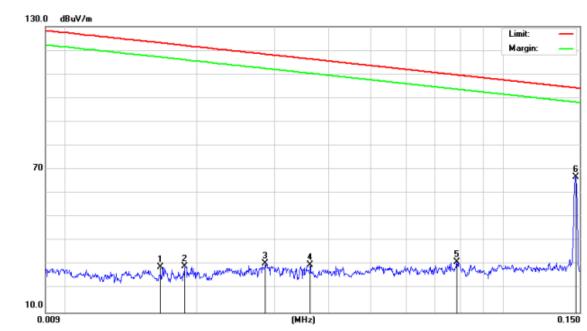


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	0.0165	1.22	27.85	29.07	123.1	-94.09	peak
2	0.0188	1.59	27.68	29.27	122.0	-92.76	peak
3	0.0286	3.64	26.95	30.59	118.3	-87.80	peak
4	0.0362	3.54	26.38	29.92	116.3	-86.43	peak
5	0.0785	8.04	23.23	31.27	109.6	-78.38	peak
6 *	0.1466	45.24	21.53	66.77	104.2	-37.47	peak

# **RESULT: PASS**




# **ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz**

EUT	Base One Max (3-in-1) with MagSafe	Model Name	NM01232285
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna	Face

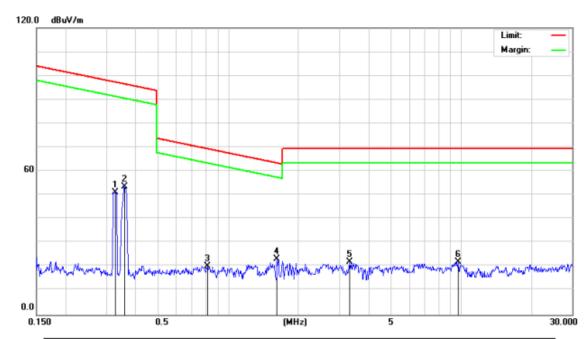

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	0.3265	30.04	21.20	51.24	97.30	-46.06	peak
2	0.3600	32.55	21.14	53.69	96.46	-42.77	peak
3	0.8131	-0.94	21.14	20.20	69.40	-49.20	peak
4 *	1.6189	1.36	21.80	23.16	63.42	-40.26	peak
5	3.3281	-0.48	22.51	22.03	69.54	-47.51	peak
6	9.7050	-2.33	24.30	21.97	69.54	-47.57	peak


# **RESULT: PASS**





### ELECTRIC FIELD TEST IN THE FREQUENCY RANGE 150kHz-30MHz

EUT	Base One Max (3-in-1) with MagSafe	Model Name	NM01232285
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna	Side

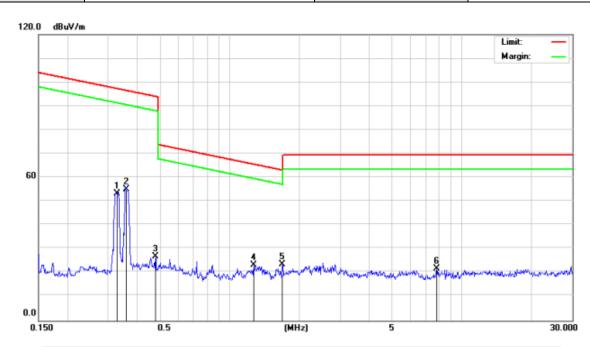

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	,
	MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	0.3265	32.13	21.20	53.33	97.30	-43.97	peak
2	0.3600	33.84	21.14	54.98	96.46	-41.48	peak
3	0.4786	5.87	20.92	26.79	94.00	-67.21	peak
4	1.2681	1.74	21.51	23.25	65.54	-42.29	peak
5 *	1.6891	1.60	21.85	23.45	63.05	-39.60	peak
6	7.8102	-2.12	23.78	21.66	69.54	-47.88	peak


# **RESULT: PASS**

# **NOTES:**

- 1. Peak detector is used for frequency below 30MHz.
- 2. Negative value in the margin column shows emission below limit.
- 3. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
- 4. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB)
- 5. Loop antenna is used for the emission under 30MHz.




RADIATED EMISSION BELOW 1GHz									
EUT	Base One Max (3-in-1) with MagSafe	Model Name	NM01232285						
Temperature	21° C	Relative Humidity	54%						
Pressure	960hPa	Test Voltage	Normal Voltage						
Test Mode	Mode 10	Antenna	Horizontal						
72.0 dBuV/m									
			Limit: — Margin: —						

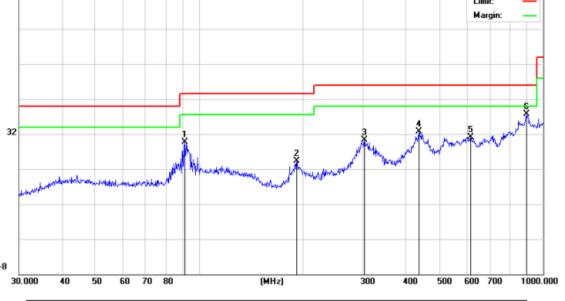

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		91.1745	14.97	14.83	29.80	43.50	-13.70	peak
2		192.4185	10.62	13.63	24.25	43.50	-19.25	peak
3	;	302.4812	13.78	16.50	30.28	46.00	-15.72	peak
4		435.5898	8.65	24.15	32.80	46.00	-13.20	peak
5	(	616.3718	5.96	25.18	31.14	46.00	-14.86	peak
6	*	896.9964	6.25	31.42	37.67	46.00	-8.33	peak


**RESULT: PASS** 





# **RADIATED EMISSION BELOW 1GHz**

EUT	Base One Max (3-in-1) with MagSafe	Model Name	NM01232285
Temperature	21° C	Relative Humidity	54%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 10	Antenna	Vertical

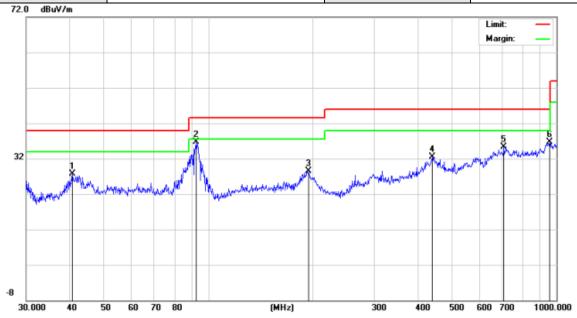

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment Lim		Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		40.7016	10.84	16.91	27.75	40.00	-12.25	peak
2	*	92.4624	21.39	15.22	36.61	43.50	-6.89	peak
3	•	193.7728	10.47	18.09	28.56	43.50	-14.94	peak
4	4	440.1963	6.51	26.09	32.60	46.00	-13.40	peak
5		706.6999	6.94	28.33	35.27	46.00	-10.73	peak
6	9	955.4381	6.38	30.38	36.76	46.00	-9.24	peak

# **RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Over=Measurement-Limit.

- 2. All test modes had been pre-tested. The mode 10 is the worst case and recorded in the report.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



Page 27 of 34

#### 7. 20 dB BANDWIDTH

### 7.1 PROVISIONS APPLICABLE


N/A

#### 7.2 MEASUREMENT PROCEDURE

Set the parameters of SPA as below:

- 1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
- 2. Centre frequency = Operation Frequency
- 3. The resolution bandwidth of 300 Hz and the video bandwidth of 1 kHz were used.
- 4. Span: 3kHz, Sweep time: Auto
- 5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 6. Measured the spectrum width with power higher than 20dB below carrier.
- 7. Measured the 99% OBW.
- 8. Record the plots and Reported.

# 7.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

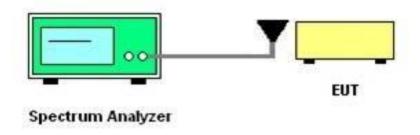




#### 7.4 MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth								
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (kHz)	width -20dB Bandwidth (kHz)		Pass or Fail			
ASK	0.1466	0.861	0.917	N/A	Pass			
ASK	0.3265	0.694	0.814	N/A	Pass			
ASK	0.3600	0.688	0.811	N/A	Pass			

# Test Graphs of Occupied Bandwidth&-20dB Bandwidth







# Test Graphs of Occupied Bandwidth & - 20dB Bandwidth



# Test Graphs of Occupied Bandwidth & - 20dB Bandwidth



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



# 8. AC POWER LINE CONDUCTED EMISSION TEST


#### **8.1 LIMITS OF LINE CONDUCTED EMISSION TEST**

Francos	Maximum RF Line Voltage			
Frequency	Q.P. (dBμV)	Average (dBμV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

# 8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

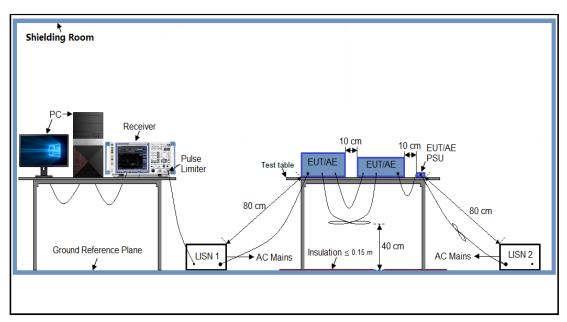



Report No.: AGC12971230701FR01 Page 31 of 34

#### 8.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

#### 8.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



#### **8.5 MEASUREMENT RESULTS**

st Mode	Mode 10	LISN line	Hot Side
80 70 60 50 40 77 30 10 10 150	[dBµV]	M 3M 4M 5M 6M 8M ency [Hz]	10M 20M 30M

# MEASUREMENT RESULT: "agc\_fin"

2023/7/14 18:14

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.590000	36.40	6.2	56	19.6	QP	L1
0.886000	36.00	6.2	56	20.0	QP	L1
2.062000	37.00	6.2	56	19.0	QP	L1
2.358000	37.10	6.3	56	18.9	QP	L1
3.534000	37.40	6.3	56	18.6	QP	L1
3.830000	37.10	6.3	56	18.9	QP	L1

# MEASUREMENT RESULT: "agc\_fin2"

2023/7/14 18:14


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line
0.590000	36.30	6.2	46	9.7	AV	L1
0.886000	35.30	6.2	46	10.7	AV	L1
2.062000	37.40	6.2	46	8.6	AV	L1
2.358000	36.70	6.3	46	9.3	AV	L1
3.534000	37.60	6.3	46	8.4	AV	L1
3.830000	37.20	6.3	46	8.8	AV	L1

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



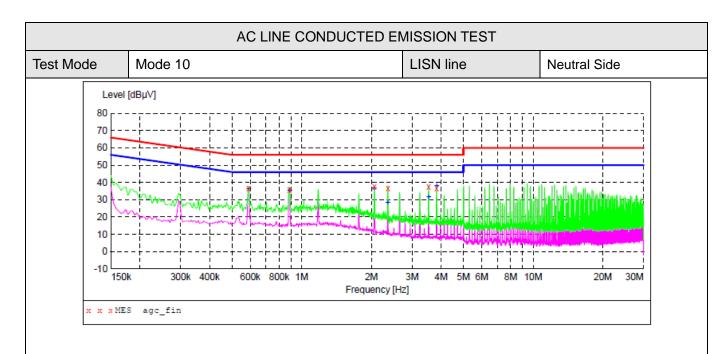

# MEASUREMENT RESULT: "agc\_fin"

2	023/7/14 18:						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.590000	36.50	6.2	56	19.5	QP	N
	0.886000	35.60	6.2	56	20.4	QP	N
	2.062000	37.60	6.2	56	18.4	QP	N
	2.358000	36.50	6.3	56	19.5	QP	N
	3.534000	37.70	6.3	56	18.3	QP	N
	3.830000	36.70	6.3	56	19.3	QP	N

# MEASUREMENT RESULT: "agc fin2"

2023/7/14 18:16							
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.590000	36.30	6.2	46	9.7	AV	N
	0.886000	35.20	6.2	46	10.8	AV	N
	2.062000	36.50	6.2	46	9.5	AV	N
	2.358000	28.20	6.3	46	17.8	AV	N
	3.534000	31.40	6.3	46	14.6	AV	N
	3.830000	37.90	6.3	46	8.1	AV	N

# **RESULT: PASS**



Page 34 of 34

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC12971230701AP01

APPENDIX B: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC12971230701AP02

----END OF REPORT-----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.