

# NORTHWEST EMC

**PicoBrew**


**Pico S**

**FCC 15.207:2016**

**FCC 15.225:2016**

**13.56 MHZ Radio using RFID**

**Report # PIBR0002**

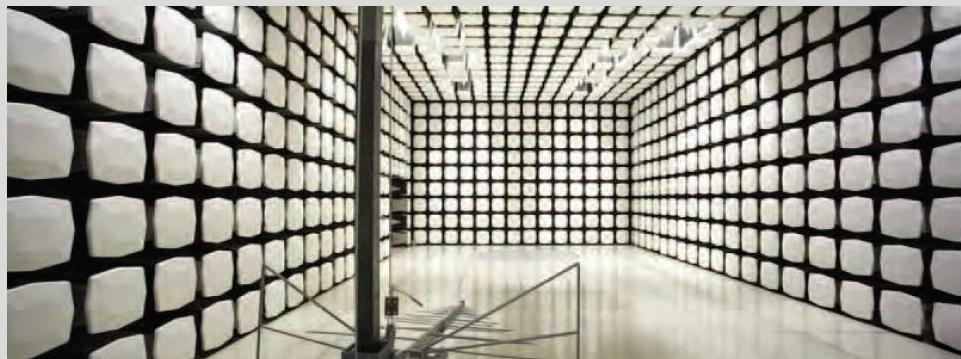

NVLAP Lab Code: 200629-0

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report may only be duplicated in its entirety*

# CERTIFICATE OF TEST

Last Date of Test: September 22, 2016

PicoBrew  
Model: Pico S

## Radio Equipment Testing

### Standards

Specification	Method
FCC 15.207:2016	
FCC 15.225:2016	ANSI C63.10:2013

### Results

Method Clause	Test Description	Applied	Results	Comments
6.2	AC – Powerline Conducted Emissions	Yes	Pass	
6.4	Field Strength of Fundamental	Yes	Pass	
6.4	Field Strength of Spurious Emissions Less Than 30 MHz	Yes	Pass	
6.5	Field Strength of Spurious Emissions Greater Than 30 MHz	Yes	Pass	
6.8	Frequency Stability	Yes	Pass	

### Deviations From Test Standards

None

### Approved By:



Rod Munro, Operations Manager

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.*

# REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

# ACCREDITATIONS AND AUTHORIZATIONS

## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

## Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

## European Union

**European Commission** – Validated by the European Commission as a Notified Body under the R&TTE Directive.

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

## Korea

**MSIP / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

## Israel

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

## Hong Kong

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

# MEASUREMENT UNCERTAINTY

## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<u>Test</u>	<u>+ MU</u>	<u>- MU</u>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.0 dB	-5.0 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

# FACILITIES



California	Minnesota	New York	Oregon	Texas	Washington
Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425)984-6600
<b>NVLAP</b>					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
<b>Innovation, Science and Economic Development Canada</b>					
2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
<b>BSMI</b>					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
<b>VCCI</b>					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
<b>Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA</b>					
US0158	US0175	N/A	US0017	US0191	US0157

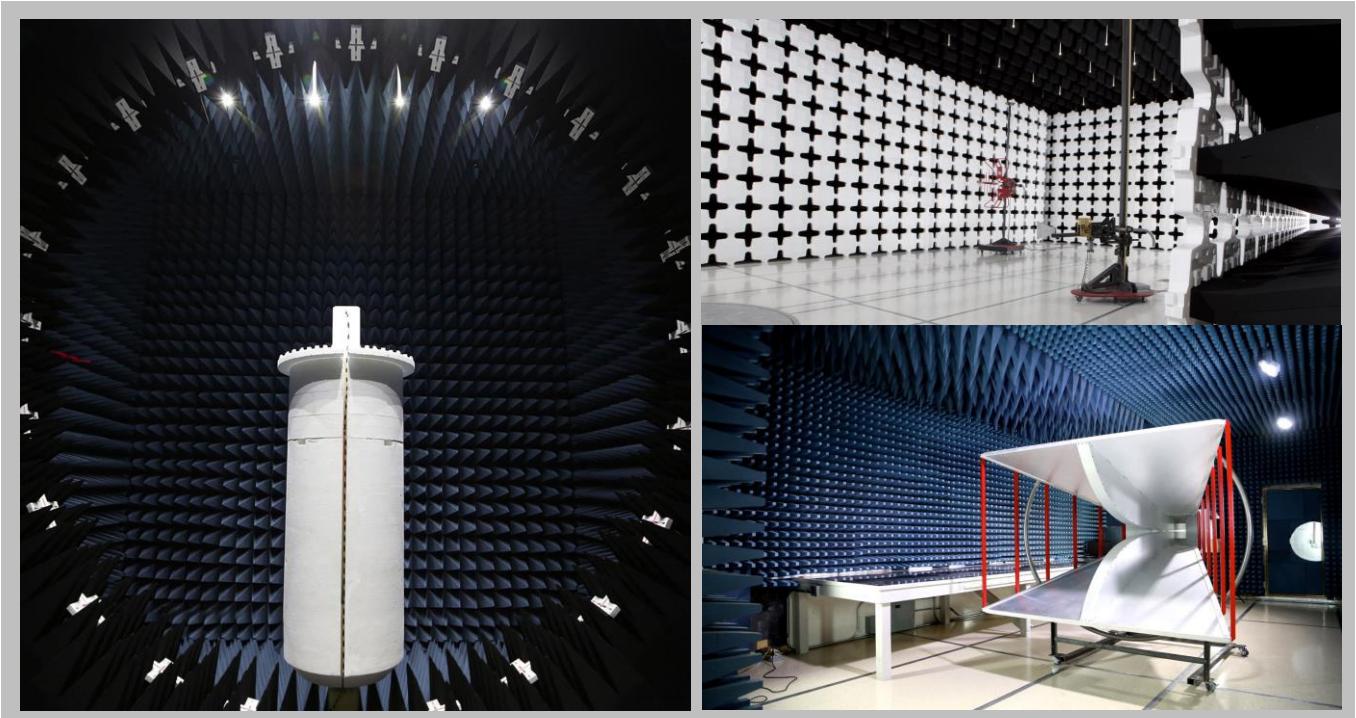

# PRODUCT DESCRIPTION

## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	PicoBrew
<b>Address:</b>	2121 North 35th Street Suite 100
<b>City, State, Zip:</b>	Seattle, WA 98103
<b>Test Requested By:</b>	Connor Lang
<b>Model:</b>	Pico S
<b>First Date of Test:</b>	September 14, 2016
<b>Last Date of Test:</b>	September 22, 2016
<b>Receipt Date of Samples:</b>	September 14, 2016
<b>Equipment Design Stage:</b>	Pre-production
<b>Equipment Condition:</b>	No Damage

## Information Provided by the Party Requesting the Test

### Functional Description of the EUT:

The Pico S automates the process of brewing craft beer in the home. It does so through the use of circulation pumps, fluid valves, and a steam injector to heat the liquid. Additionally, it is a smart, connected device that reads ingredient packs automatically through the use of a 13.56MHz RFID system, and logs data to the cloud via WiFi.

### Testing Objective:

To demonstrate compliance of the 13.56 MHz RFID radio to FCC Part 15.225 specifications.

# CONFIGURATIONS

## Configuration PIBR0002- 1

<b>Software/Firmware Running during test</b>	
<b>Description</b>	<b>Version</b>
Test Firmware	0.0.1

<b>EUT</b>				
<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>	
Smart Home Brewing Appliance (120VAC)	PicoBrew	100-001	PS20160818000047	

<b>Cables</b>					
<b>Cable Type</b>	<b>Shield</b>	<b>Length (m)</b>	<b>Ferrite</b>	<b>Connection 1</b>	<b>Connection 2</b>
AC Cable	No	1.2m	No	Smart Home Brewing Appliance (120VAC)	AC Mains

# MODIFICATIONS

## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	9/14/2016	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	9/14/2016	Field Strength of Spurious Emissions Less Than 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	9/16/2016	Field Strength of Spurious Emissions Greater Than 30 MHz	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	9/19/2016	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	9/22/2016	AC – Powerline Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# AC – POWERLINE CONDUCTED EMISSIONS

## TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Per the standard, an insulating material was also added to ground plane between the EUT's power and remote I/O cables. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
LISN	Solar Electronics	9252-50-R-24-BNC	LIM	11/3/2015	11/3/2016
Receiver	Rohde & Schwarz	ESCI	ARE	8/8/2016	8/8/2017
Cable - Conducted Cable Assembly	Northwest EMC	NC4, HHF, TYL	NC4A	5/6/2016	5/6/2017

## MEASUREMENT UNCERTAINTY

Description		
Expanded k=2	2.4 dB	-2.4 dB

## CONFIGURATIONS INVESTIGATED

PIBR0002-1

## MODES INVESTIGATED

RFID, 13.56 MHz

RFID, 13.56 MHz, Antenna port terminated with 50ohm load

# AC – POWERLINE CONDUCTED EMISSIONS

EUT:	Pico S	Work Order:	PIBR0002
Serial Number:	PS20160818000047	Date:	09/22/2016
Customer:	PicoBrew	Temperature:	22°C
Attendees:	Connor Lang	Relative Humidity:	45%
Customer Project:	None	Bar. Pressure:	1020 mb
Tested By:	Richard Mellroth	Job Site:	NC05
Power:	110VAC/60Hz	Configuration:	PIBR0002-1

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	1	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

## COMMENTS



None

## EUT OPERATING MODES

RFID, 13.56 MHz

## DEVIATIONS FROM TEST STANDARD

None

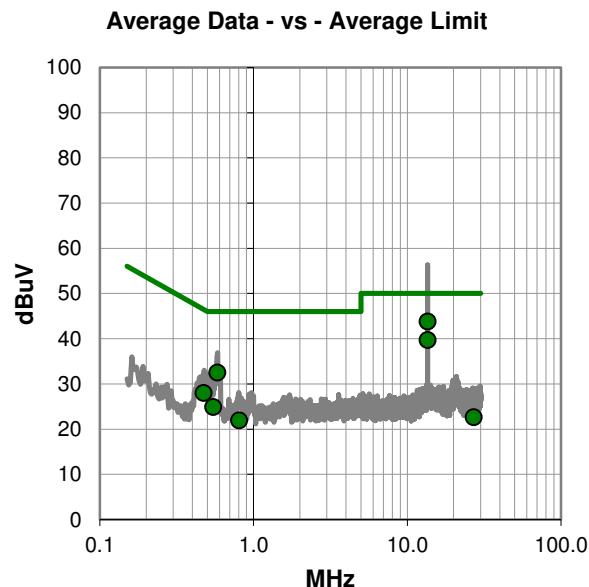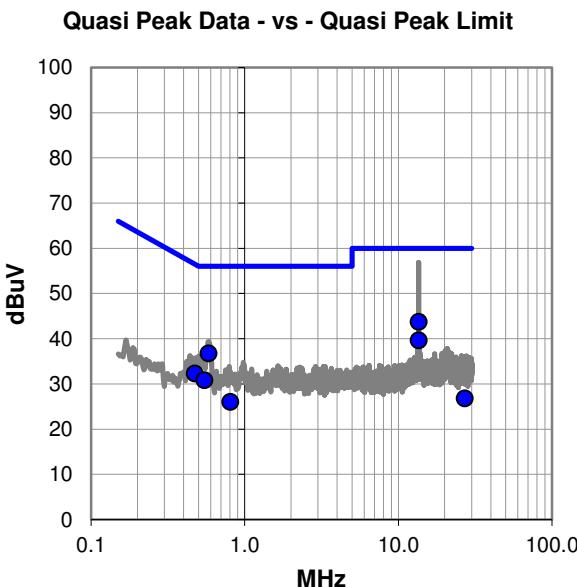

# AC – POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #1

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.567	21.9	21.8	43.7	60.0	-16.3
0.582	16.1	20.6	36.7	56.0	-19.3
13.553	17.8	21.8	39.6	60.0	-20.4
0.475	11.7	20.6	32.3	56.4	-24.1
0.547	10.2	20.6	30.8	56.0	-25.2
0.806	5.3	20.7	26.0	56.0	-30.0
27.122	3.0	23.8	26.8	60.0	-33.2

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.567	22.0	21.8	43.8	50.0	-6.2
13.553	17.9	21.8	39.7	50.0	-10.3
0.582	11.9	20.6	32.5	46.0	-13.5
0.475	7.4	20.6	28.0	46.4	-18.4
0.547	4.3	20.6	24.9	46.0	-21.1
0.806	1.2	20.7	21.9	46.0	-24.1
27.122	-1.2	23.8	22.6	50.0	-27.4

## CONCLUSION

Pass



Tested By

# AC – POWERLINE CONDUCTED EMISSIONS

EUT:	Pico S	Work Order:	PIBR0002
Serial Number:	PS20160818000047	Date:	09/22/2016
Customer:	PicoBrew	Temperature:	22°C
Attendees:	Connor Lang	Relative Humidity:	45%
Customer Project:	None	Bar. Pressure:	1020 mb
Tested By:	Richard Mellroth	Job Site:	NC05
Power:	110VAC/60Hz	Configuration:	PIBR0002-1

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	3	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	---	-------	---------	-----------------------------	---

## COMMENTS



None

## EUT OPERATING MODES

RFID, 13.56 MHz

## DEVIATIONS FROM TEST STANDARD

None

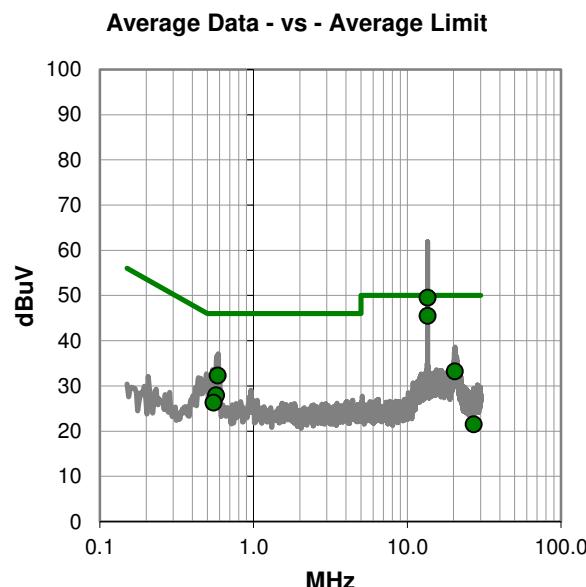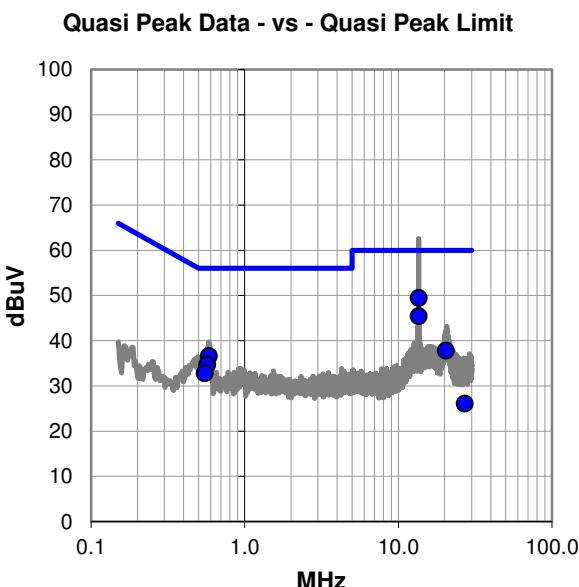

# AC – POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #3

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.567	27.6	21.8	49.4	60.0	-10.6
13.553	23.6	21.8	45.4	60.0	-14.6
0.584	16.0	20.6	36.6	56.0	-19.4
0.571	14.1	20.6	34.7	56.0	-21.3
20.410	15.1	22.7	37.8	60.0	-22.2
0.550	12.2	20.6	32.8	56.0	-23.2
27.118	2.3	23.8	26.1	60.0	-33.9

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.567	27.7	21.8	49.5	50.0	-0.5
13.553	23.7	21.8	45.5	50.0	-4.5
0.584	11.7	20.6	32.3	46.0	-13.7
20.410	10.5	22.7	33.2	50.0	-16.8
0.571	7.3	20.6	27.9	46.0	-18.1
0.550	5.7	20.6	26.3	46.0	-19.7
27.118	-2.3	23.8	21.5	50.0	-28.5

## CONCLUSION

Pass



Tested By

# AC – POWERLINE CONDUCTED EMISSIONS

EUT:	Pico S	Work Order:	PIBR0002
Serial Number:	PS20160818000047	Date:	09/22/2016
Customer:	PicoBrew	Temperature:	22°C
Attendees:	Connor Lang	Relative Humidity:	45%
Customer Project:	None	Bar. Pressure:	1020 mb
Tested By:	Richard Mellroth	Job Site:	NC05
Power:	110VAC/60Hz	Configuration:	PIBR0002-1

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	4	Line:	Neutral	Add. Ext. Attenuation (dB):	0
--------	---	-------	---------	-----------------------------	---

## COMMENTS

None


## EUT OPERATING MODES

RFID, 13.56 MHz, Antenna port terminated with 50ohm load


## DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

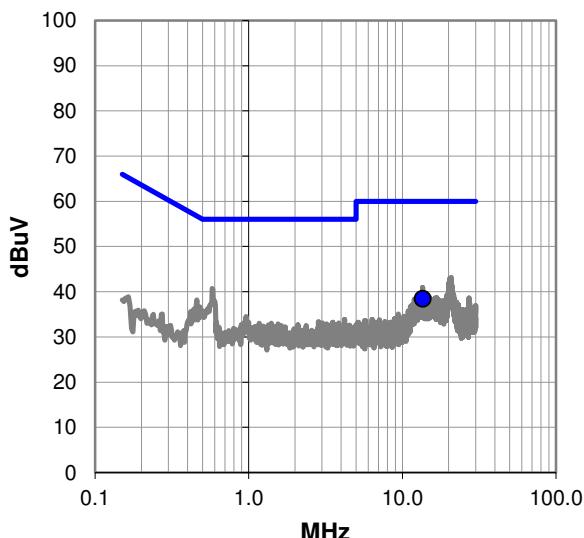

Average Data - vs - Average Limit

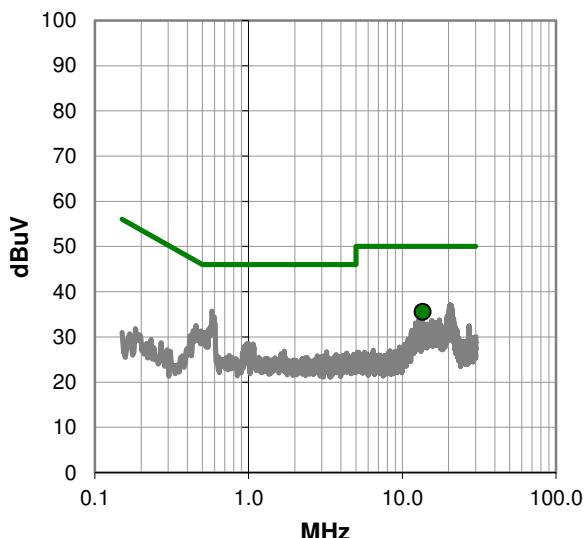

# AC – POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #4

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.561	16.6	21.8	38.4	60.0	-21.6

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.561	13.7	21.8	35.5	50.0	-14.5

## CONCLUSION

Pass



Tested By

# AC – POWERLINE CONDUCTED EMISSIONS

EUT:	Pico S	Work Order:	PIBR0002
Serial Number:	PS20160818000047	Date:	09/22/2016
Customer:	PicoBrew	Temperature:	22°C
Attendees:	Connor Lang	Relative Humidity:	45%
Customer Project:	None	Bar. Pressure:	1020 mb
Tested By:	Richard Mellroth	Job Site:	NC05
Power:	110VAC/60Hz	Configuration:	PIBR0002-1

## TEST SPECIFICATIONS

Specification:	Method:
FCC 15.207:2016	ANSI C63.10:2013

## TEST PARAMETERS

Run #:	5	Line:	High Line	Add. Ext. Attenuation (dB):	0
--------	---	-------	-----------	-----------------------------	---

## COMMENTS

None


## EUT OPERATING MODES

RFID, 13.56 MHz, Antenna port terminated with 50ohm load


## DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

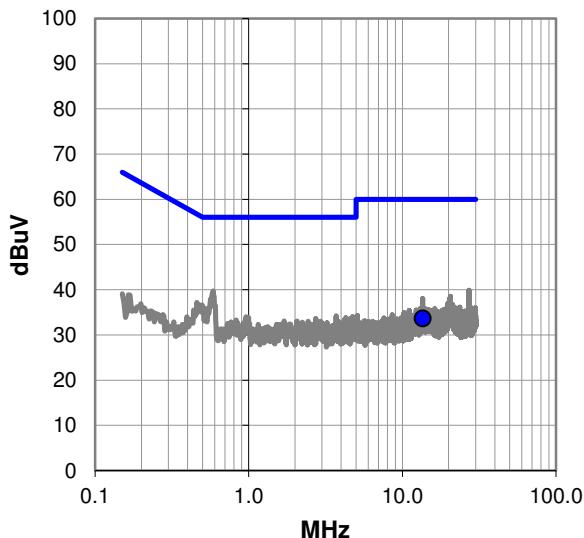

Average Data - vs - Average Limit

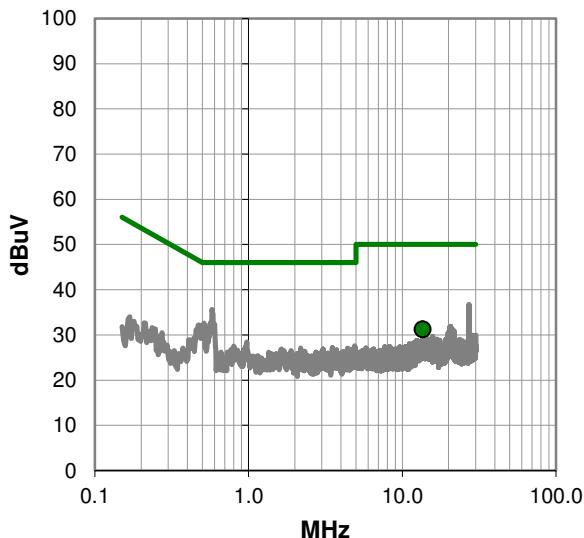

# AC – POWERLINE CONDUCTED EMISSIONS

## RESULTS - Run #5

Quasi Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	11.8	21.8	33.6	60.0	-26.4

Average Data - vs - Average Limit

Freq (MHz)	Amp. (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Margin (dB)
13.560	9.4	21.8	31.2	50.0	-18.8

## CONCLUSION

Pass



Tested By

# FIELD STRENGTH OF FUNDAMENTAL

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

RFID 13.56 MHz.

## POWER SETTINGS INVESTIGATED

110VAC/60Hz

## CONFIGURATIONS INVESTIGATED

PIBR0002 - 1

## FREQUENCY RANGE INVESTIGATED

Start Frequency	9 kHz	Stop Frequency	30 MHz
-----------------	-------	----------------	--------

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	None	10m Test Distance Cable	EVL	5/12/2016	12 mo
Analyzer - Spectrum Analyzer	Agilent	E4443A	AFB	5/17/2016	12 mo
Antenna	EMCO	6502	AOA	7/6/2016	24 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.

The fundamental carrier of the EUT was maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A calibrated active loop antenna was used for this test in order to provide sufficient measurement sensitivity. The center of the loop antenna was maintained at 1m above the ground plane during the testing.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector


AV = RMS Detector

As outlined in 15.209(e), 15.31(f)(2), and RSS-GEN, 6.4, measurements may be performed at a distance closer than what is specified with the limit. The limit at the specified distance is shown on the data sheet. Measurements are made at a closer distance and the data is adjusted using a distance correction factor of 40dB/decade for comparison to the limit.

# FIELD STRENGTH OF FUNDAMENTAL

**NORTHWEST**  
**EMC**  
PSA-ESCI 2016.07.22  
EmiR5 2016.07.22.1

Work Order:	PIBR0002	Date:	09/14/16	
Project:	None	Temperature:	23.4 °C	
Job Site:	EV11	Humidity:	37.6% RH	
Serial Number:	PS20160818000047	Barometric Pres.:	1021 mbar	Tested by: Jared Ison
EUT:	Pico S			
Configuration:	1			
Customer:	PicoBrew			
Attendees:	Connor Lang			
EUT Power:	110VAC/60Hz			
Operating Mode:	RFID 13.56 MHz.			
Deviations:	None			
Comments:	None			
Test Specifications		Test Method		
FCC 15.225:2016		ANSI C63.10:2013		

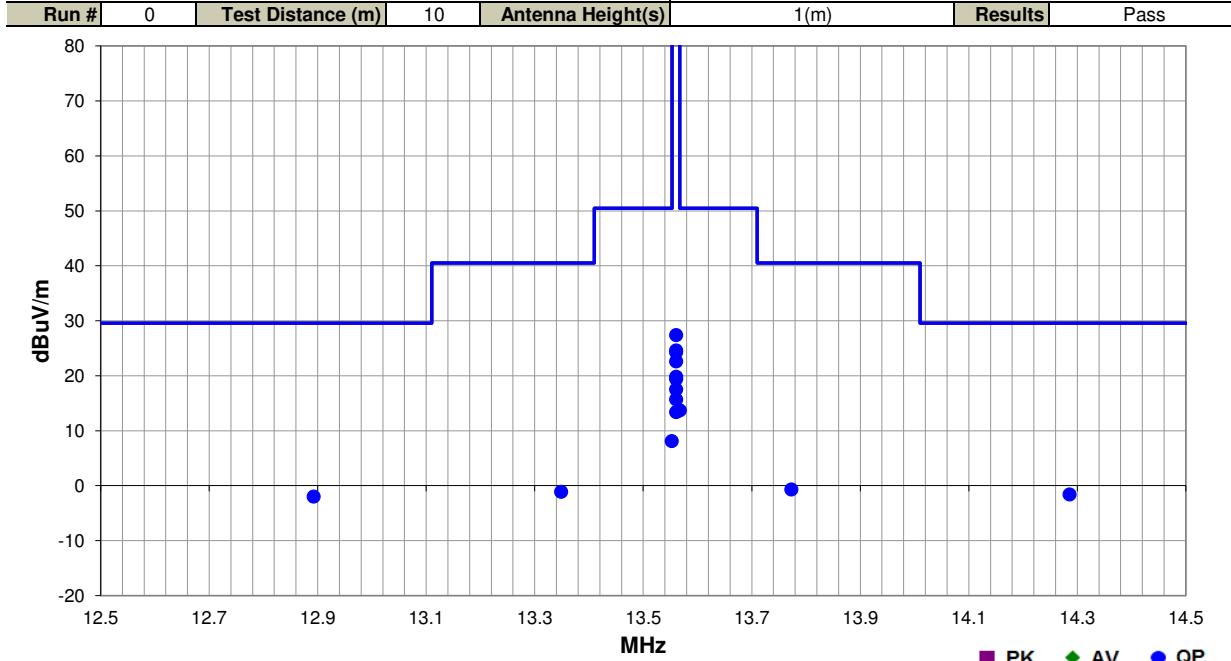

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
14.286	6.4	11.1	1.0	130.0	10.0	0.0	Perp to GND	QP	-19.1	-1.6	29.5	-31.1	EUT On Side
12.893	6.0	11.1	1.0	191.0	10.0	0.0	Perp to GND	QP	-19.1	-2.0	29.5	-31.5	EUT On Side
13.567	21.7	11.1	1.0	158.0	10.0	0.0	Perp to GND	QP	-19.1	13.7	50.5	-36.8	EUT On Side
13.773	7.3	11.1	1.0	325.0	10.0	0.0	Perp to GND	QP	-19.1	-0.7	40.5	-41.2	EUT On Side
13.349	6.9	11.1	1.0	226.0	10.0	0.0	Perp to GND	QP	-19.1	-1.1	40.5	-41.6	EUT On Side
13.553	16.1	11.1	1.0	173.0	10.0	0.0	Perp to GND	QP	-19.1	8.1	50.5	-42.4	EUT On Side
13.561	35.4	11.1	1.0	178.0	10.0	0.0	Perp to GND	QP	-19.1	27.4	84.0	-56.6	EUT On Side
13.561	32.6	11.1	1.0	196.0	10.0	0.0	Perp to GND	QP	-19.1	24.6	84.0	-59.4	EUT Horz
13.561	32.3	11.1	1.0	164.0	10.0	0.0	Perp to GND	QP	-19.1	24.3	84.0	-59.7	EUT Vert
13.561	30.6	11.1	1.0	161.0	10.0	0.0	Para to GND	QP	-19.1	22.6	84.0	-61.4	EUT On Side
13.561	27.8	11.1	1.0	217.0	10.0	0.0	Para to GND	QP	-19.1	19.8	84.0	-64.2	EUT Horz
13.561	27.4	11.1	1.0	184.0	10.0	0.0	Para to GND	QP	-19.1	19.4	84.0	-64.6	EUT Vert
13.561	25.5	11.1	1.0	291.0	10.0	0.0	Para to EUT	QP	-19.1	17.5	84.0	-66.5	EUT On Side
13.561	23.7	11.1	1.0	292.0	10.0	0.0	Para to EUT	QP	-19.1	15.7	84.0	-68.3	EUT Horz
13.561	21.4	11.1	1.0	215.0	10.0	0.0	Para to EUT	QP	-19.1	13.4	84.0	-70.6	EUT Vert

# FIELD STRENGTH OF SPURIOUS EMISSIONS LESS THAN 30 MHZ

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

RFID 13.56 MHz.

## POWER SETTINGS INVESTIGATED

110VAC/60Hz

## CONFIGURATIONS INVESTIGATED

PIBR0002 - 1

## FREQUENCY RANGE INVESTIGATED

Start Frequency | 9 kHz | Stop Frequency | 30 MHz

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	None	10m Test Distance Cable	EVL	5/12/2016	12 mo
Antenna	EMCO	6502	AOA	7/6/2016	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4443A	AFB	5/17/2016	12 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was continuously transmitting while set to the channel specified.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). An active loop antenna was used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.


Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

As outlined in 15.209(e), 15.31(f)(2), and RSS-GEN, 6.4, measurements may be performed at a distance closer than what is specified with the limit. The limit at the specified distance is shown on the data sheet. Measurements are made at a closer distance and the data is adjusted using a distance correction factor of 40dB/decade for comparison to the limit.

# FIELD STRENGTH OF SPURIOUS EMISSIONS LESS THAN 30 MHZ

**NORTHWEST  
EMC**  
PSA-ESCI 2016.07.22  
EmiR5 2016.07.22.1

Work Order:	PIBR0002	Date:	09/14/16	
Project:	None	Temperature:	23 °C	
Job Site:	EV11	Humidity:	40.8% RH	
Serial Number:	PS20160818000047	Barometric Pres.:	1025 mbar	Tested by: Jared Ison
EUT:	Pico S			
Configuration:	1			
Customer:	PicoBrew			
Attendees:	Connor Lang			
EUT Power:	110VAC/60Hz			
Operating Mode:	RFID 13.56 MHz.			
Deviations:	None			
Comments:	None			
Test Specifications		Test Method		
FCC 15.225:2016		ANSI C63.10:2013		

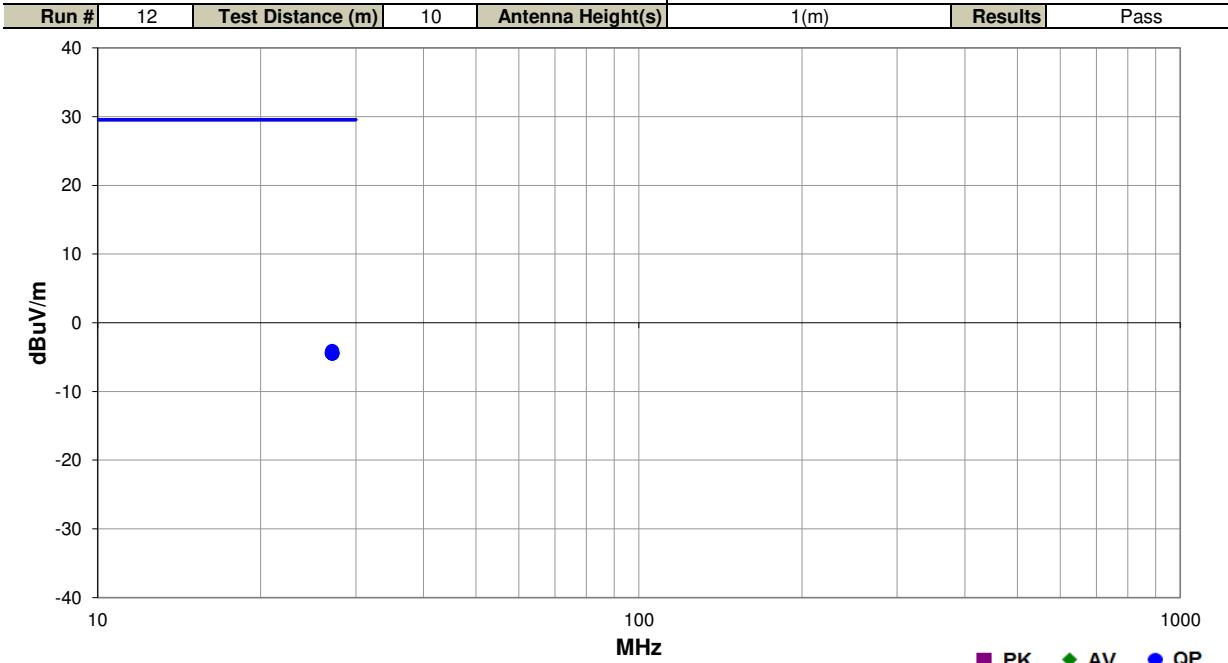

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
27.118	5.8	9.2	2.8	65.0	10.0	0.0	Perp to GND	QP	-19.1	-4.1	29.5	-33.6	EUT On Side
27.121	5.7	9.2	1.0	194.0	10.0	0.0	Perp to GND	QP	-19.1	-4.2	29.5	-33.7	EUT Horz
27.123	5.6	9.2	1.0	317.0	10.0	0.0	Para to GND	QP	-19.1	-4.3	29.5	-33.8	EUT On Side
27.138	5.5	9.2	1.0	27.0	10.0	0.0	Para to EUT	QP	-19.1	-4.4	29.5	-33.9	EUT Vert
27.076	5.5	9.2	1.8	235.0	10.0	0.0	Perp to GND	QP	-19.1	-4.4	29.5	-33.9	EUT Vert
27.063	5.5	9.2	1.0	127.0	10.0	0.0	Para to GND	QP	-19.1	-4.4	29.5	-33.9	EUT Horz
27.144	5.4	9.2	1.0	216.0	10.0	0.0	Para to EUT	QP	-19.1	-4.5	29.5	-34.0	EUT On Side
27.106	5.4	9.2	1.0	74.0	10.0	0.0	Para to GND	QP	-19.1	-4.5	29.5	-34.0	EUT Vert
27.125	5.4	9.2	1.0	307.0	10.0	0.0	Para to EUT	QP	-19.1	-4.5	29.5	-34.0	EUT Horz

# FIELD STRENGTH OF SPURIOUS EMISSIONS GREATER THAN 30MHz

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## **MODES OF OPERATION**

RFID 13.56 MHz

## **POWER SETTINGS INVESTIGATED**

110VAC/60Hz

## **CONFIGURATIONS INVESTIGATED**

PIBR0002 - 1

## **FREQUENCY RANGE INVESTIGATED**

Start Frequency	30 MHz	Stop Frequency	140 MHz
-----------------	--------	----------------	---------

## **SAMPLE CALCULATIONS**

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## **TEST EQUIPMENT**

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFO	6/8/2016	12 mo
Cable	Northwest EMC	Bilog Cables	NC1	8/3/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	PAB	7/15/2016	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYL	7/30/2015	24 mo

## **MEASUREMENT BANDWIDTHS**

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## **TEST DESCRIPTION**

The antennas to be used with the EUT were tested. The EUT was transmitting while set at the operating channel.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.


Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

# FIELD STRENGTH OF SPURIOUS EMISSIONS GREATER THAN 30MHz

**NORTHWEST  
EMC**  
PSA-ESCI 2016.07.22  
EmiR5 2016.07.22.1

Work Order:	PIBR0002	Date:	09/16/16	<i>R. Mellroth</i>
Project:	None	Temperature:	22 °C	
Job Site:	NC01	Humidity:	46% RH	
Serial Number:	PS20160818000047	Barometric Pres.:	1021 mbar	Tested by: Richard Mellroth
EUT:	Pico S			
Configuration:	1			
Customer:	PicoBrew			
Attendees:	Connor Lang			
EUT Power:	110VAC/60Hz			
Operating Mode:	RFID 13.56 MHz			
Deviations:	None			
Comments:	EUT contains water and has only one physical orientation in normal use. Testing performed only in normal operating position.			

Test Specifications	Test Method
FCC 15.225:2016	ANSI C63.10:2013

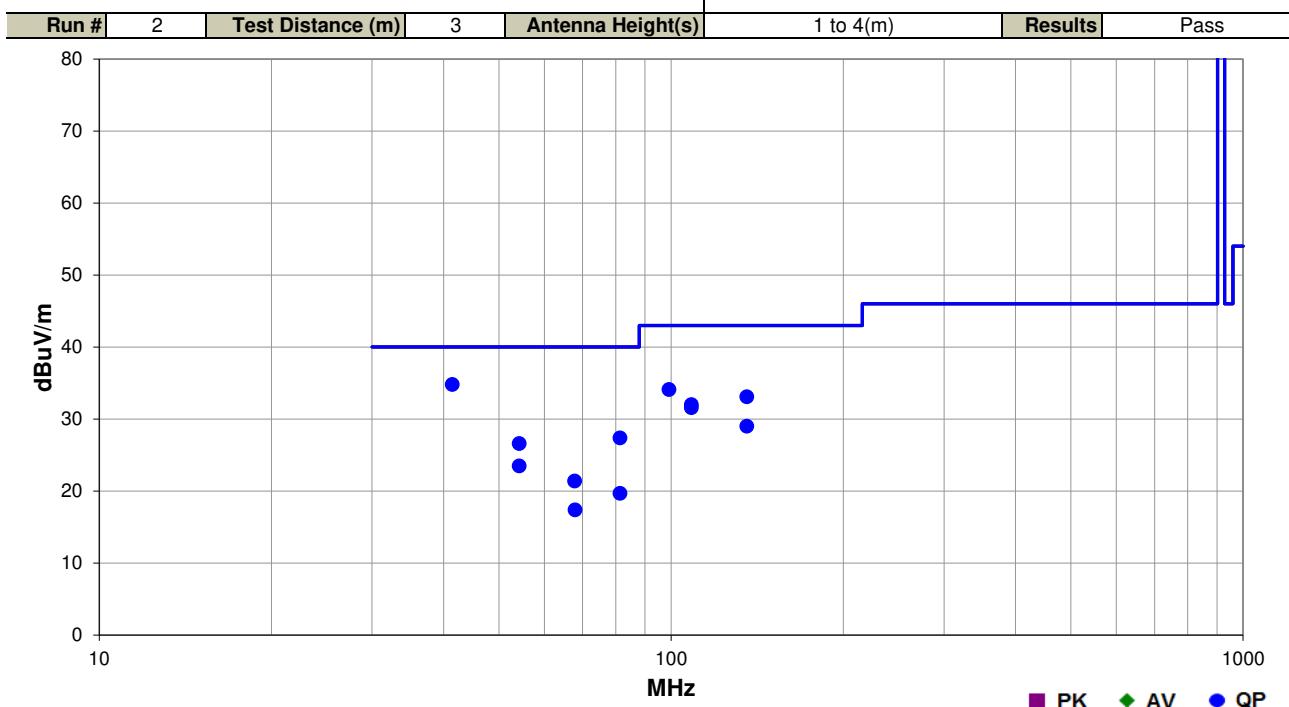

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)
41.422	31.7	3.1	1.0	336.0	3.0	0.0	Vert	QP	0.0	34.8	40.0	-5.2
99.106	38.2	-4.1	4.0	103.0	3.0	0.0	Horz	QP	0.0	34.1	43.0	-8.9
135.617	34.6	-1.5	2.1	207.0	3.0	0.0	Horz	QP	0.0	33.1	43.0	-9.9
108.495	34.8	-2.8	1.8	70.0	3.0	0.0	Horz	QP	0.0	32.0	43.0	-11.0
108.497	34.4	-2.8	1.0	166.0	3.0	0.0	Vert	QP	0.0	31.6	43.0	-11.4
81.375	33.9	-6.5	1.1	170.0	3.0	0.0	Vert	QP	0.0	27.4	40.0	-12.6
54.253	29.2	-2.6	1.0	166.0	3.0	0.0	Vert	QP	0.0	26.6	40.0	-13.4
135.617	30.5	-1.5	1.0	102.0	3.0	0.0	Vert	QP	0.0	29.0	43.0	-14.0
54.253	26.1	-2.6	3.4	112.0	3.0	0.0	Horz	QP	0.0	23.5	40.0	-16.5
67.815	27.6	-6.2	1.0	224.0	3.0	0.0	Vert	QP	0.0	21.4	40.0	-18.6
81.375	26.2	-6.5	2.2	121.0	3.0	0.0	Horz	QP	0.0	19.7	40.0	-20.3
67.925	23.7	-6.3	3.1	288.0	3.0	0.0	Horz	QP	0.0	17.4	40.0	-22.6

# FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Chamber - Temperature/Humidity	Tenney	T6S	TBG	NCR	NCR
Meter - Multimeter	Fluke	111	MMM	2/18/2016	2/18/2019
Thermometer	Omega Engineering, Inc.	HH311	DUH	4/3/2015	4/3/2018
Probe - Near Field Set	Com-Power	PS-400	IPE	NCR	NCR
Attenuator	Fairview Microwave	SA4014-20	TKV	3/4/2016	3/4/2017
Block - DC	Fairview Microwave	SD3379	AMU	5/6/2016	5/6/2017
Cable	Micro-Coax	UFD150A-1-0720-200200	NCS	6/7/2016	6/7/2017
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	6/15/2016	6/15/2017

## TEST DESCRIPTION

A near-field probe was placed near the transmitter. A low-loss coaxial cable was used to connect the near-field probe to the spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT.

Measurements were made on the single transmit frequency as called out on the data sheets. Testing was done while the EUT was continuously polling.

The primary supply voltage was varied from 85 % to 115% of the nominal voltage while at ambient temperature. Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range of -20 ° to +50° C and at 10°C intervals.

The requirement of a frequency tolerance of  $\pm 0.01\%$  is equivalent to 100 ppm  
The formula to check for compliance is:


$$\text{ppm} = (\text{Measured Frequency} / \text{Measured Nominal Frequency} - 1) * 1,000,000$$

# FREQUENCY STABILITY


EUT:	Pico S		Work Order:	PIBR0002	
Serial Number:	PS20160818000047		Date:	09/19/16	
Customer:	PicoBrew		Temperature:	23 °C	
Attendees:	Connor Lang		Humidity:	51% RH	
Project:	None		Barometric Pres.:	1022 mbars	
Tested by:	Richard Mellroth	Power:	110VAC/60Hz	Job Site:	NC02
TEST SPECIFICATIONS			Test Method		
FCC 15.225:2016			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)
RFID, 13.56 MHz					
Measured Value (MHz)      Assigned Value (MHz)      Error (ppm)      Limit (ppm)      Results					
Voltage: 115% Startup      13.560466      13.56      34.4      100      Pass					
Voltage: 100% Startup      13.560488      13.56      36      100      Pass					
Voltage: 85% Startup      13.560466      13.56      34.4      100      Pass					
Temperature: +50° Startup      13.560458      13.56      33.8      100      Pass					
After 2 Minutes      13.560458      13.56      33.8      100      Pass					
After 5 Minutes      13.560449      13.56      33.1      100      Pass					
After 10 Minutes      13.560458      13.56      33.8      100      Pass					
Temperature: +40° Startup      13.560468      13.56      34.5      100      Pass					
After 2 Minutes      13.560456      13.56      33.6      100      Pass					
After 5 Minutes      13.560458      13.56      33.8      100      Pass					
After 10 Minutes      13.560456      13.56      33.6      100      Pass					
Temperature: +30° Startup      13.560478      13.56      35.3      100      Pass					
After 2 Minutes      13.560478      13.56      35.3      100      Pass					
After 5 Minutes      13.560468      13.56      34.5      100      Pass					
After 10 Minutes      13.560476      13.56      35.1      100      Pass					
Temperature: +20° Startup      13.560506      13.56      37.3      100      Pass					
After 2 Minutes      13.560506      13.56      37.3      100      Pass					
After 5 Minutes      13.560506      13.56      37.3      100      Pass					
After 10 Minutes      13.560508      13.56      37.5      100      Pass					
Temperature: +10° Startup      13.560515      13.56      38      100      Pass					
After 2 Minutes      13.560518      13.56      38.2      100      Pass					
After 5 Minutes      13.560518      13.56      38.2      100      Pass					
After 10 Minutes      13.560517      13.56      38.1      100      Pass					
Temperature: 0° Startup      13.560518      13.56      38.2      100      Pass					
After 2 Minutes      13.560517      13.56      38.1      100      Pass					
After 5 Minutes      13.560516      13.56      38.1      100      Pass					
After 10 Minutes      13.560518      13.56      38.2      100      Pass					
Temperature: -10° Startup      13.560498      13.56      36.7      100      Pass					
After 2 Minutes      13.560498      13.56      36.7      100      Pass					
After 5 Minutes      13.560498      13.56      36.7      100      Pass					
After 10 Minutes      13.560498      13.56      36.7      100      Pass					
Temperature: -20° Startup      13.560448      13.56      33      100      Pass					
After 2 Minutes      13.560447      13.56      33      100      Pass					
After 5 Minutes      13.560448      13.56      33      100      Pass					
After 10 Minutes      13.560448      13.56      33      100      Pass					

# FREQUENCY STABILITY

RFID, 13.56 MHz, Voltage: 115%, Startup					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560466	13.56	34.4	100	Pass	

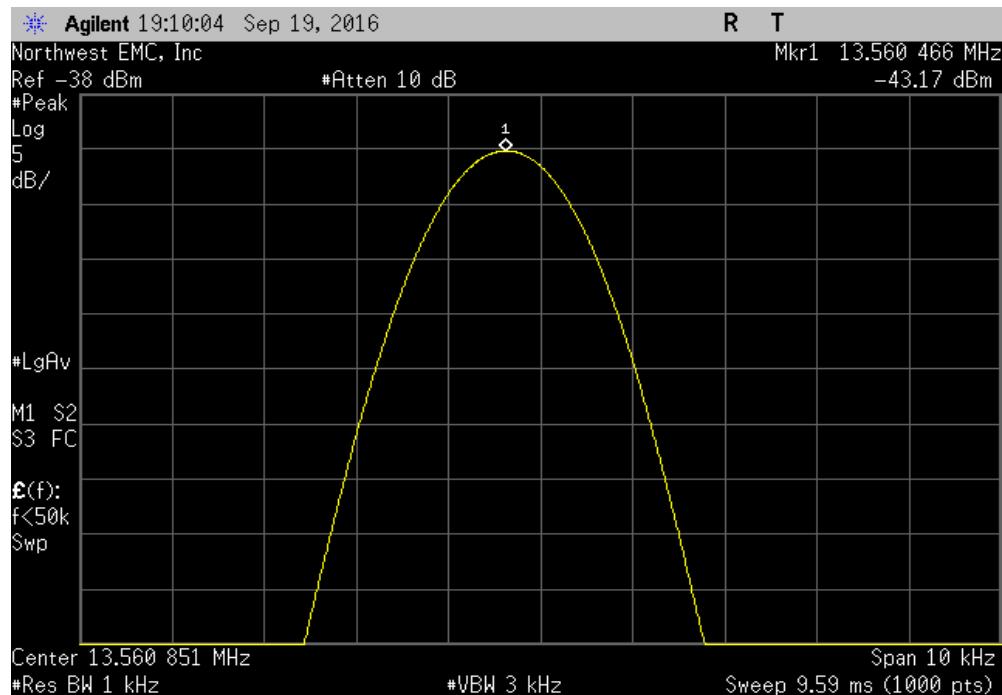


RFID, 13.56 MHz, Voltage: 100%, Startup					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560488	13.56	36	100	Pass	

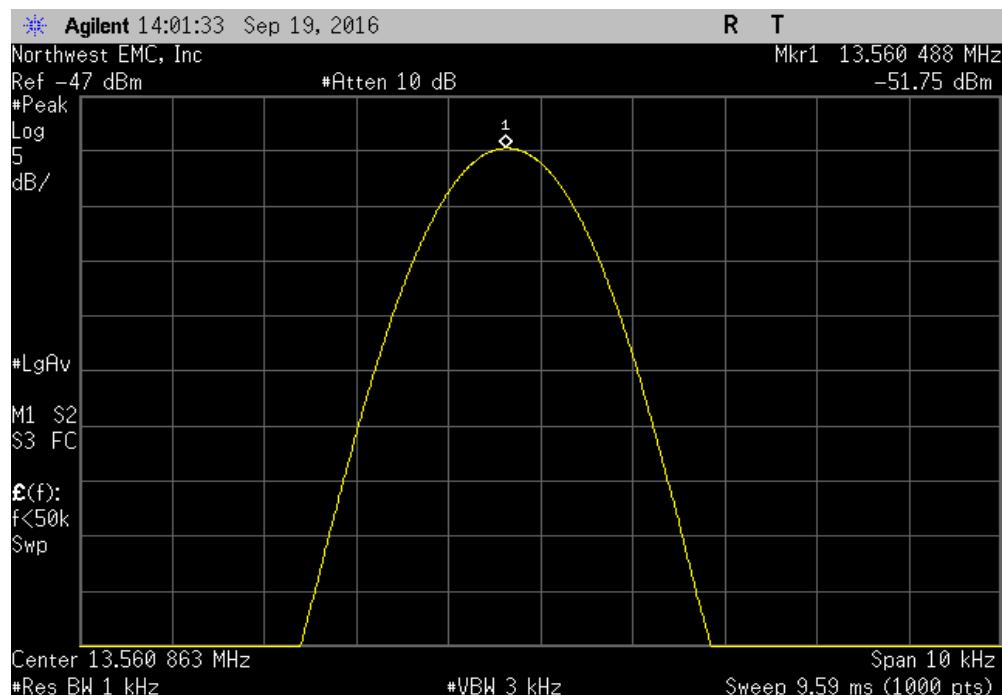


# FREQUENCY STABILITY

RFID, 13.56 MHz, Voltage: 85%, Startup					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560466	13.56	34.4	100	Pass	

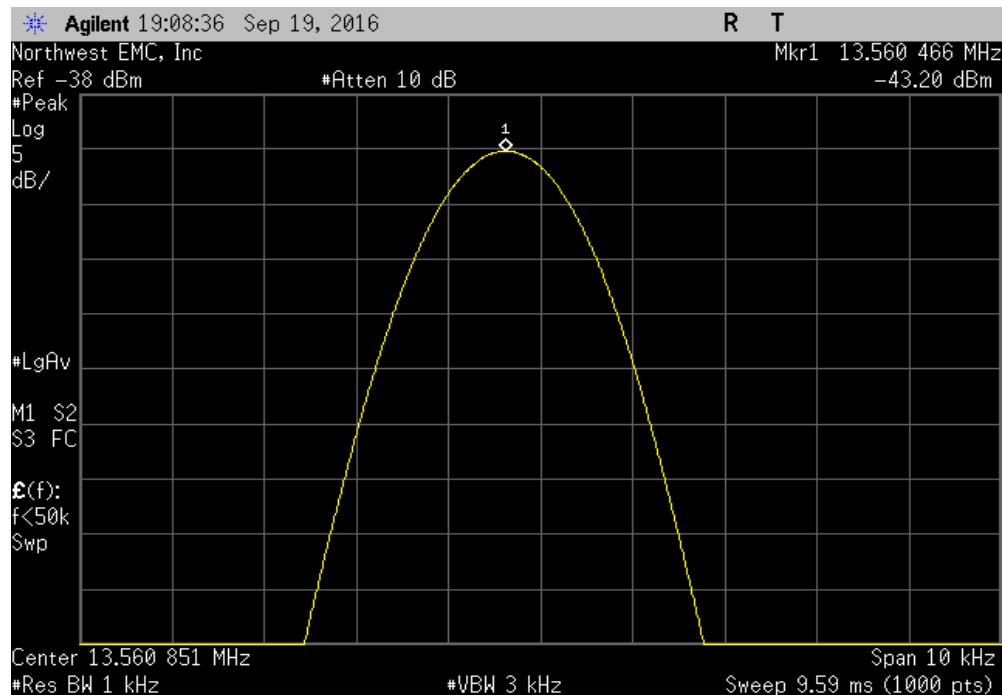


RFID, 13.56 MHz, Temperature: +50°, Startup					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560458	13.56	33.8	100	Pass	

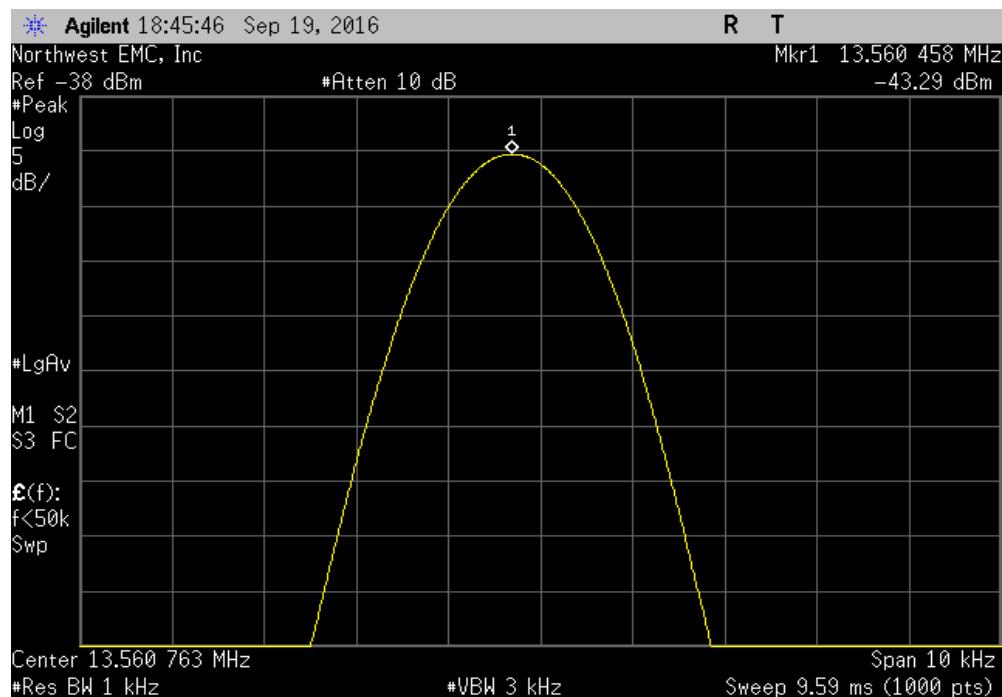

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +50°, After 2 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560458	13.56	33.8	100	Pass

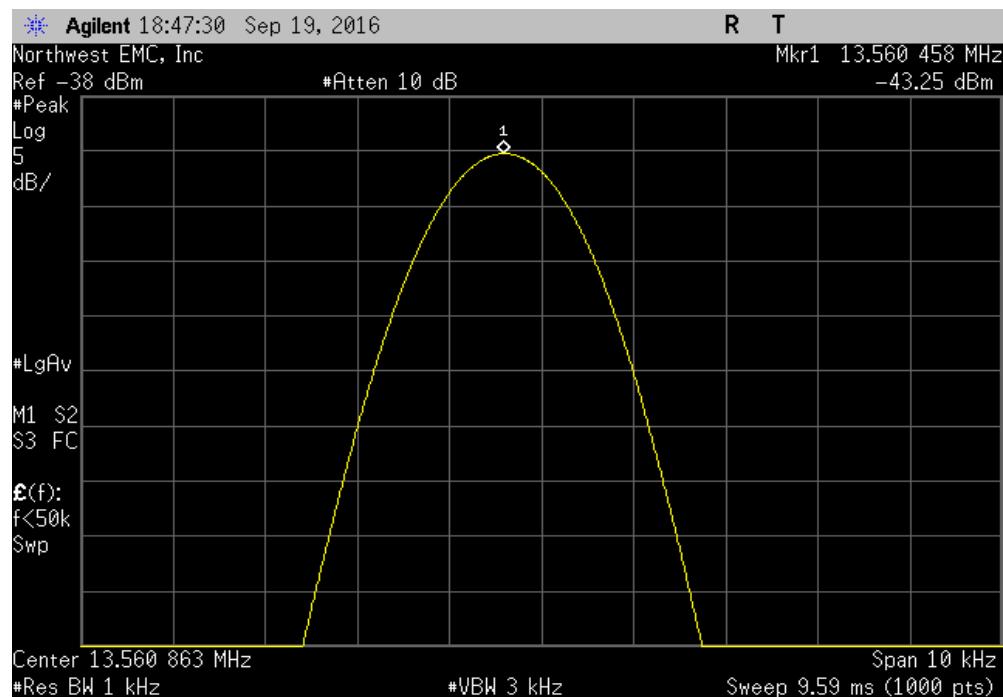

RFID, 13.56 MHz, Temperature: +50°, After 5 Minutes


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560449	13.56	33.1	100	Pass

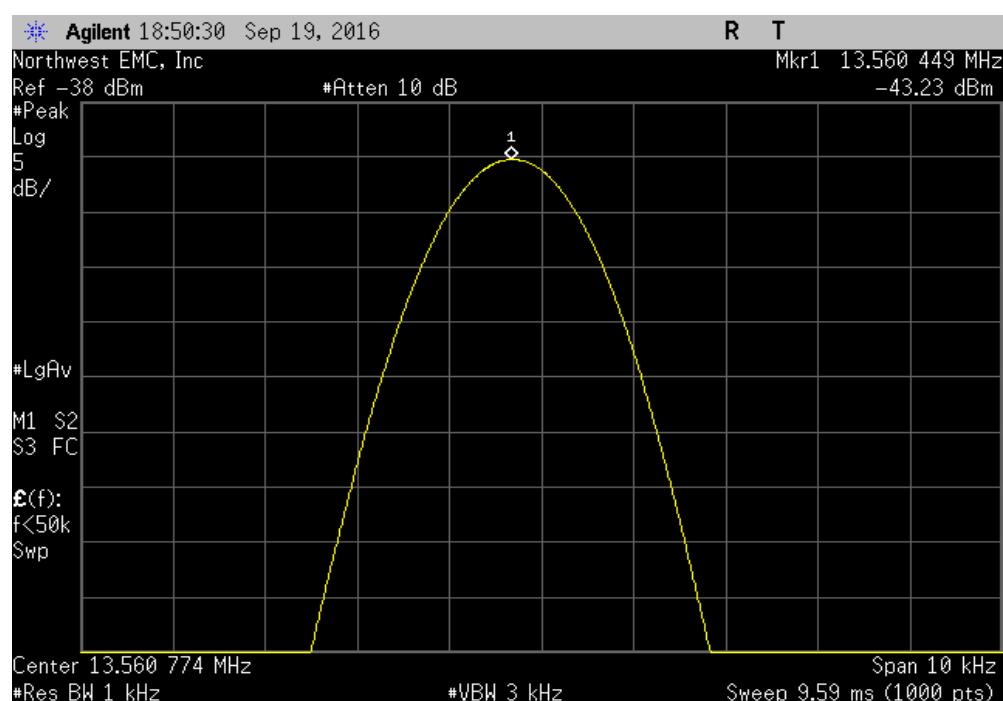

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +50°, After 10 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560458	13.56	33.8	100	Pass

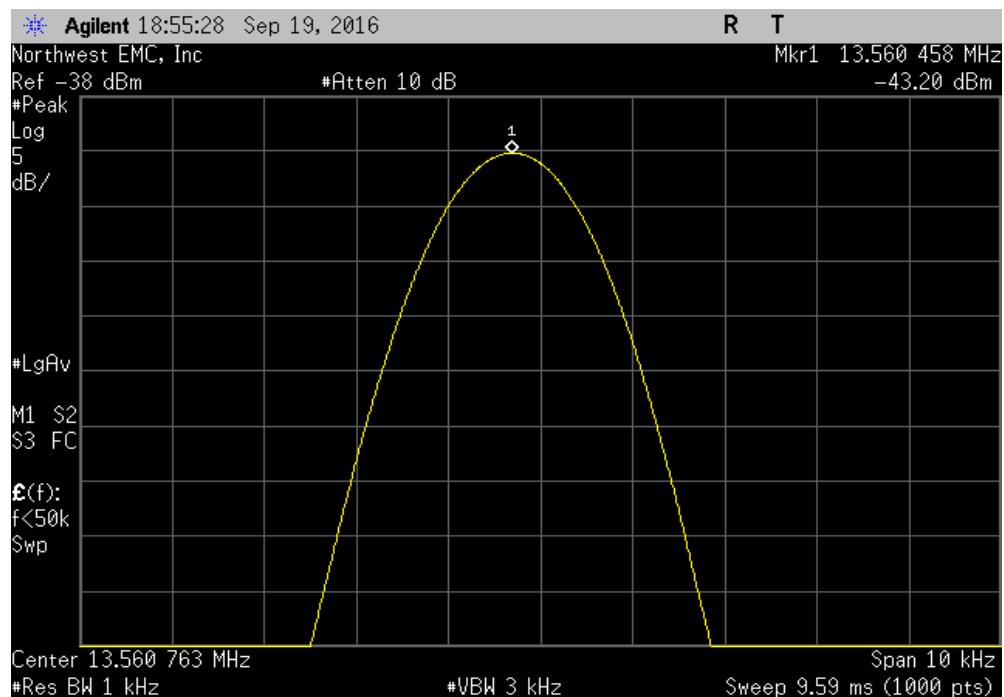

RFID, 13.56 MHz, Temperature: +40°, Startup


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560468	13.56	34.5	100	Pass

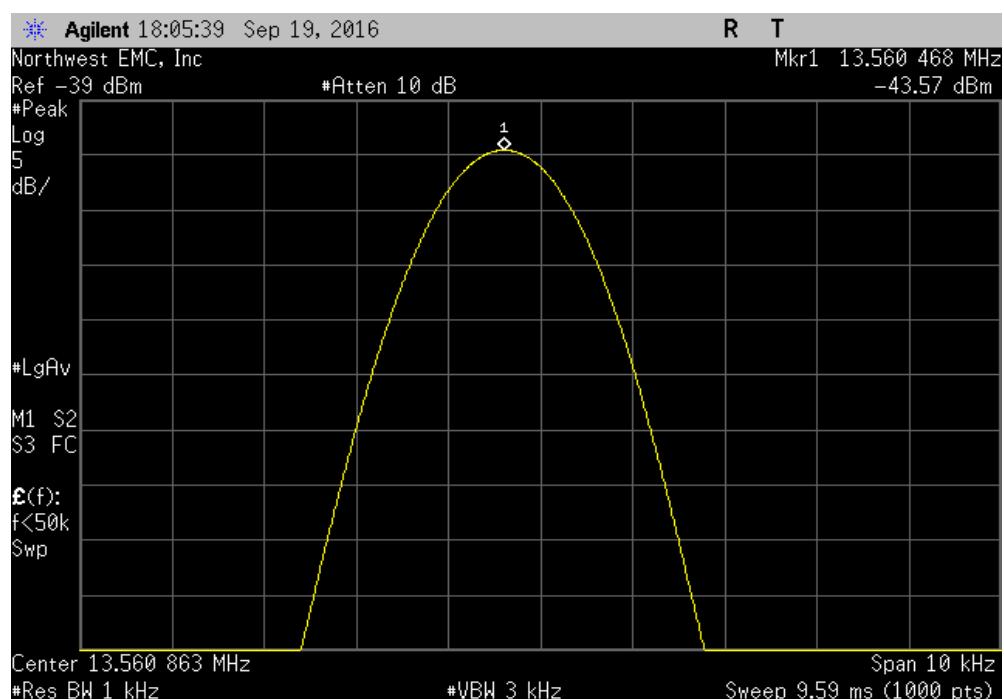

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +40°, After 2 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560456	13.56	33.6	100	Pass

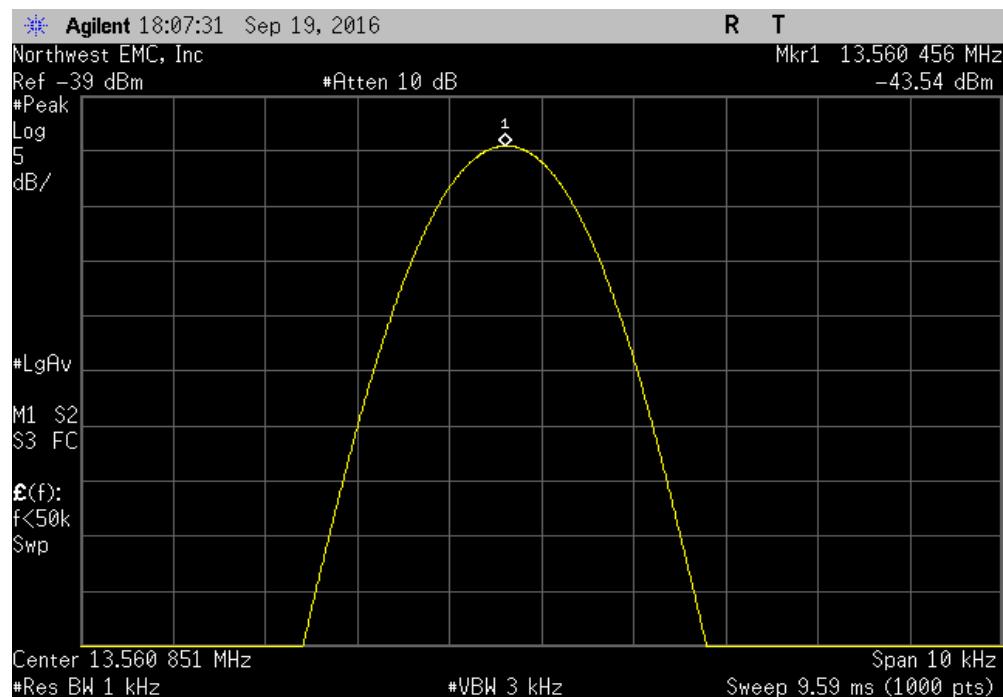

RFID, 13.56 MHz, Temperature: +40°, After 5 Minutes


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560458	13.56	33.8	100	Pass

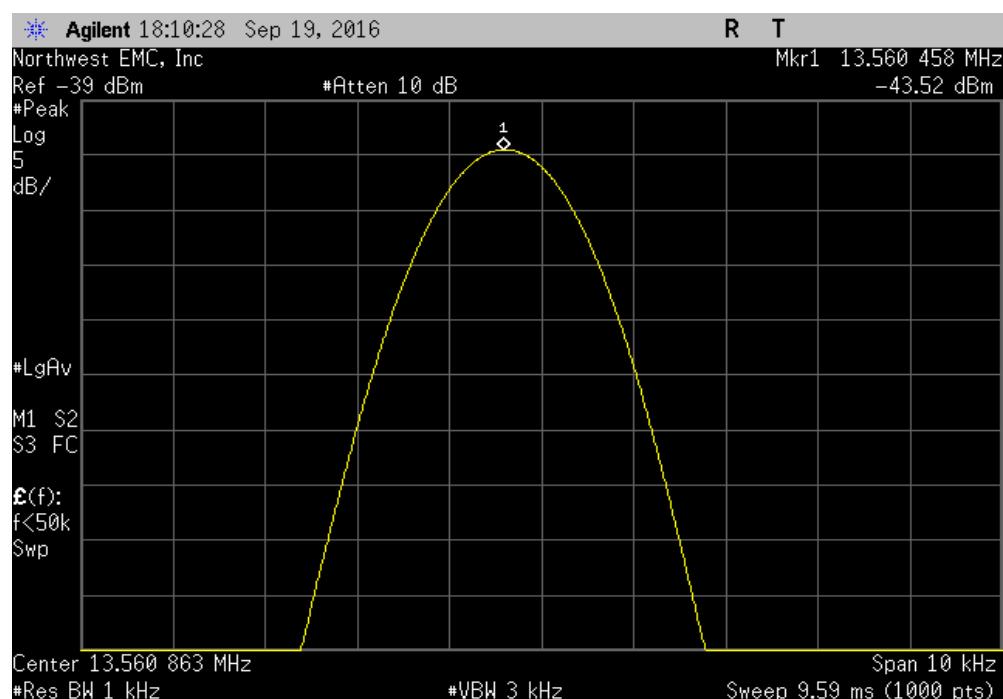

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +40°, After 10 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560456	13.56	33.6	100	Pass

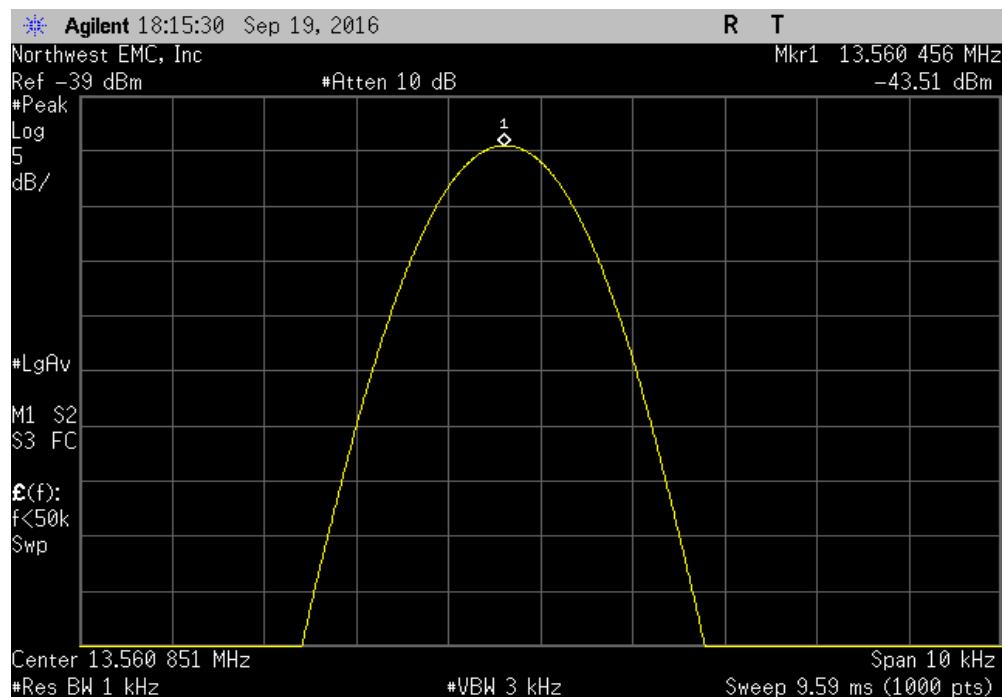

RFID, 13.56 MHz, Temperature: +30°, Startup


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560478	13.56	35.3	100	Pass

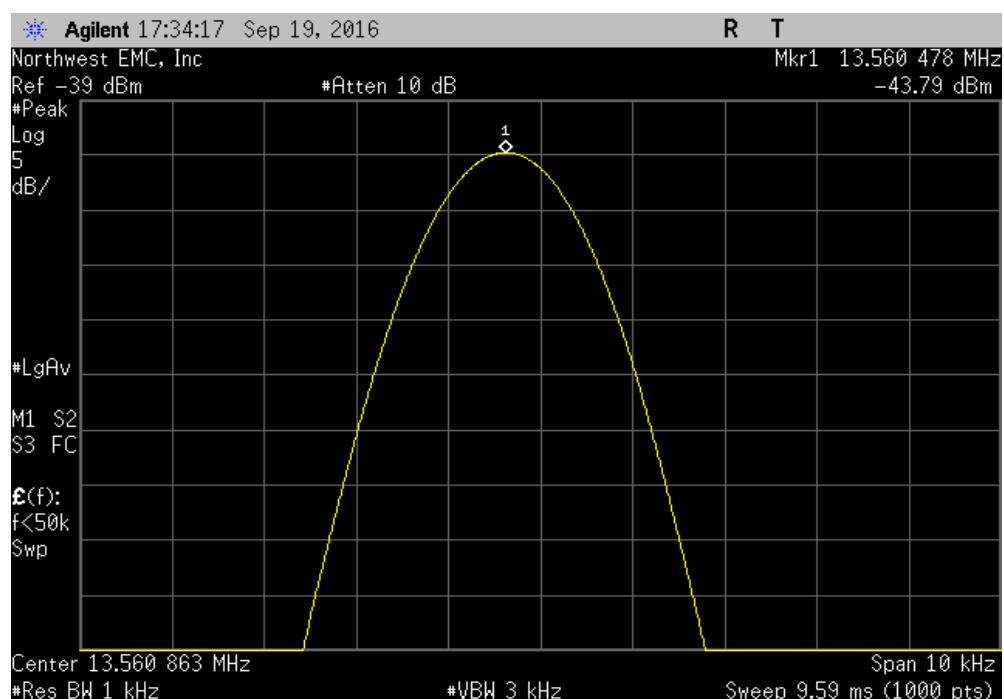

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +30°, After 2 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560478	13.56	35.3	100	Pass

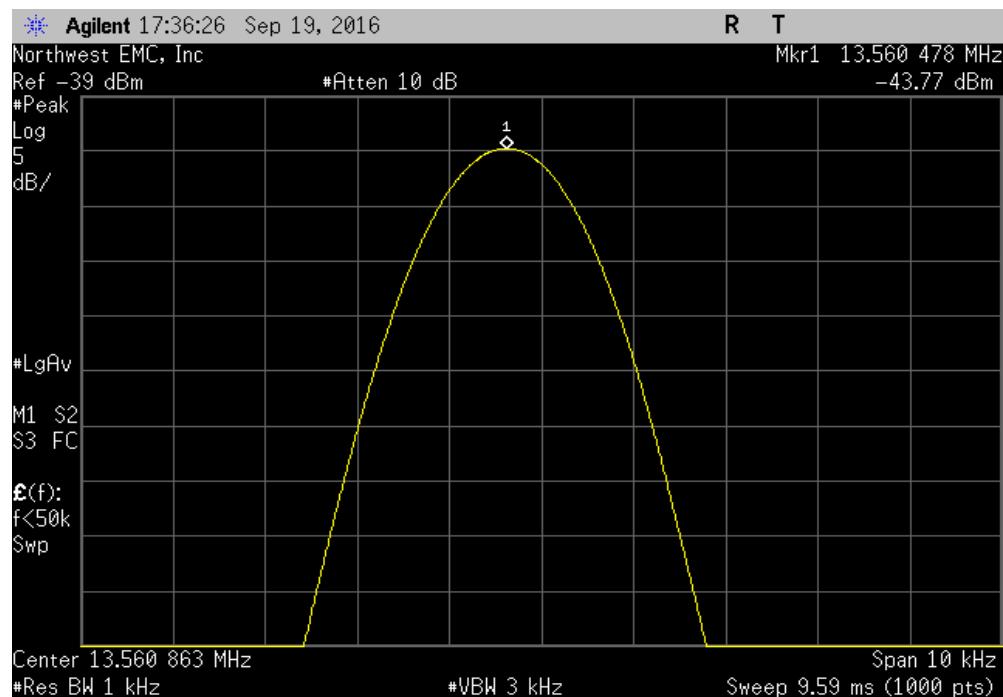


RFID, 13.56 MHz, Temperature: +30°, After 5 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560468	13.56	34.5	100	Pass

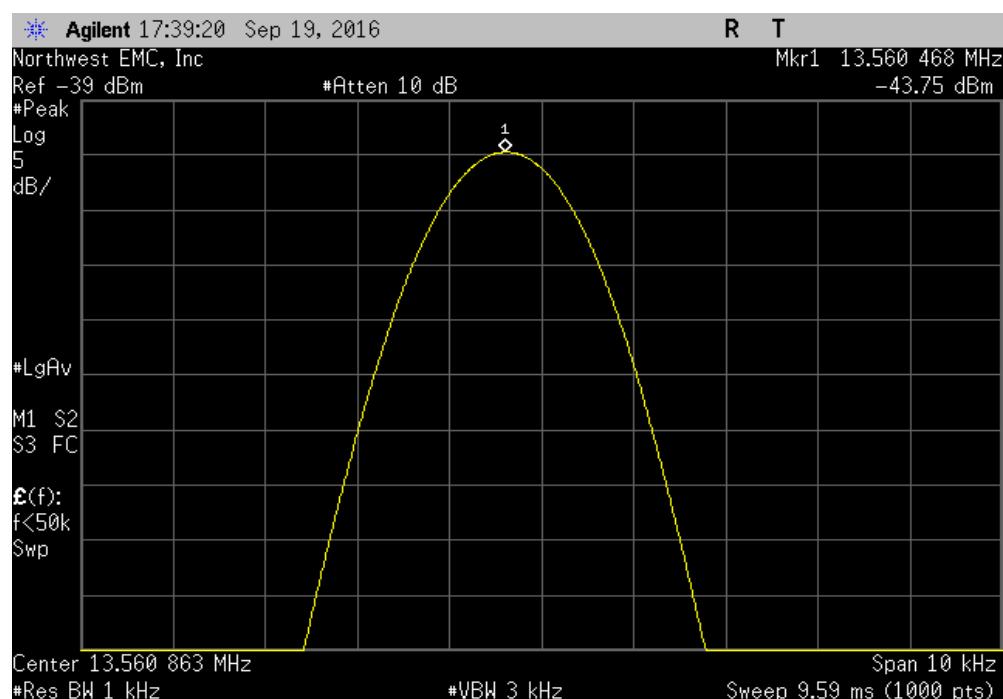


# FREQUENCY STABILITY

RFID, 13.56 MHz, Temperature: +30°, After 10 Minutes					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560476	13.56	35.1	100	Pass	

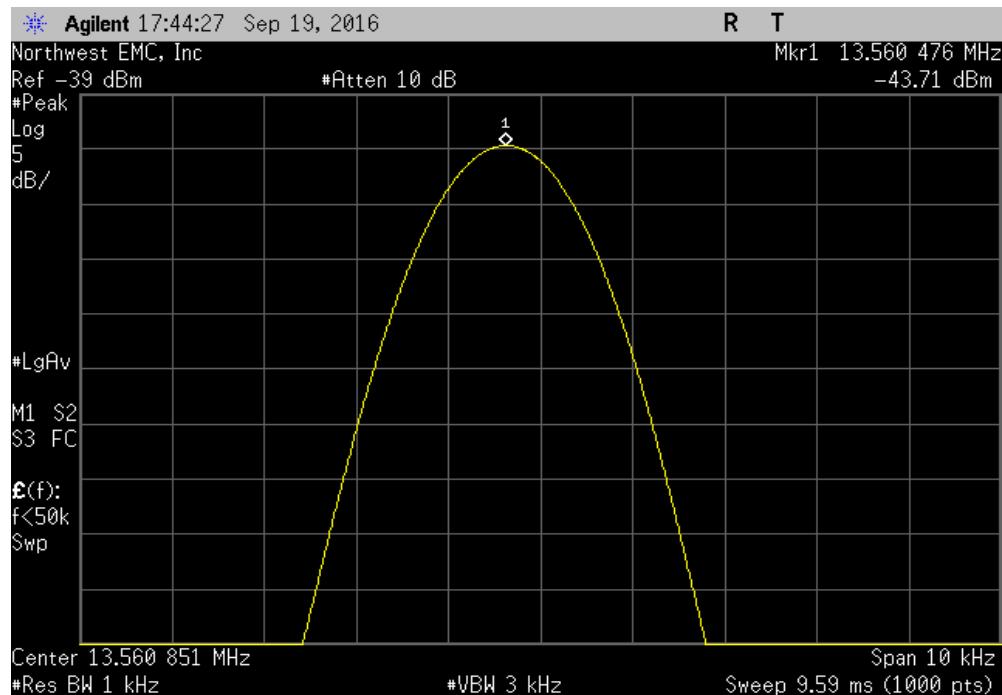


RFID, 13.56 MHz, Temperature: +20°, Startup					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560506	13.56	37.3	100	Pass	

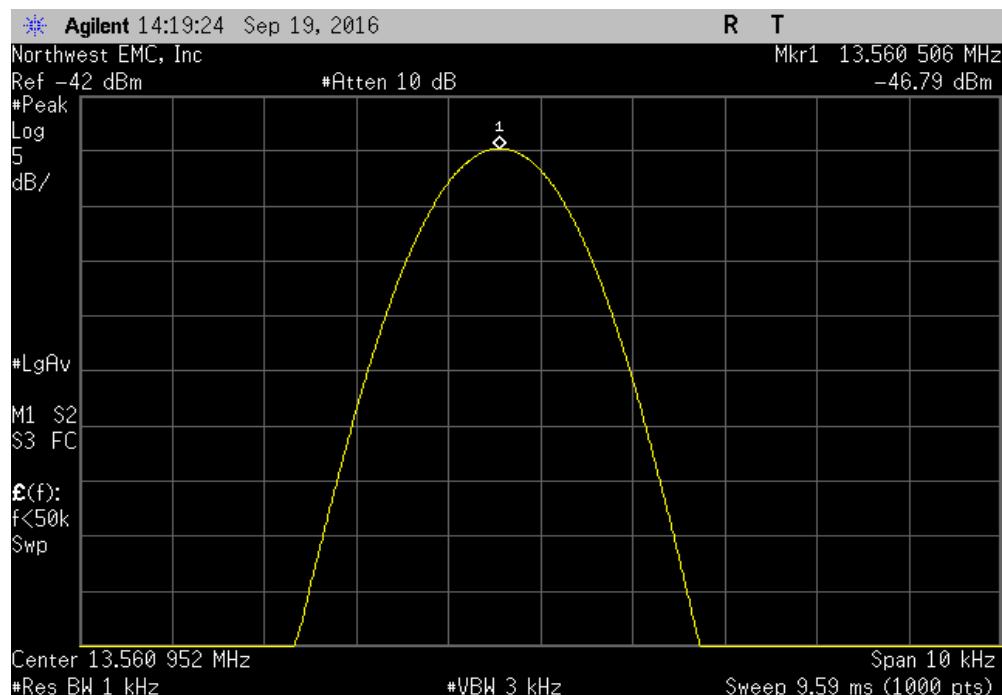

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +20°, After 2 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560506	13.56	37.3	100	Pass

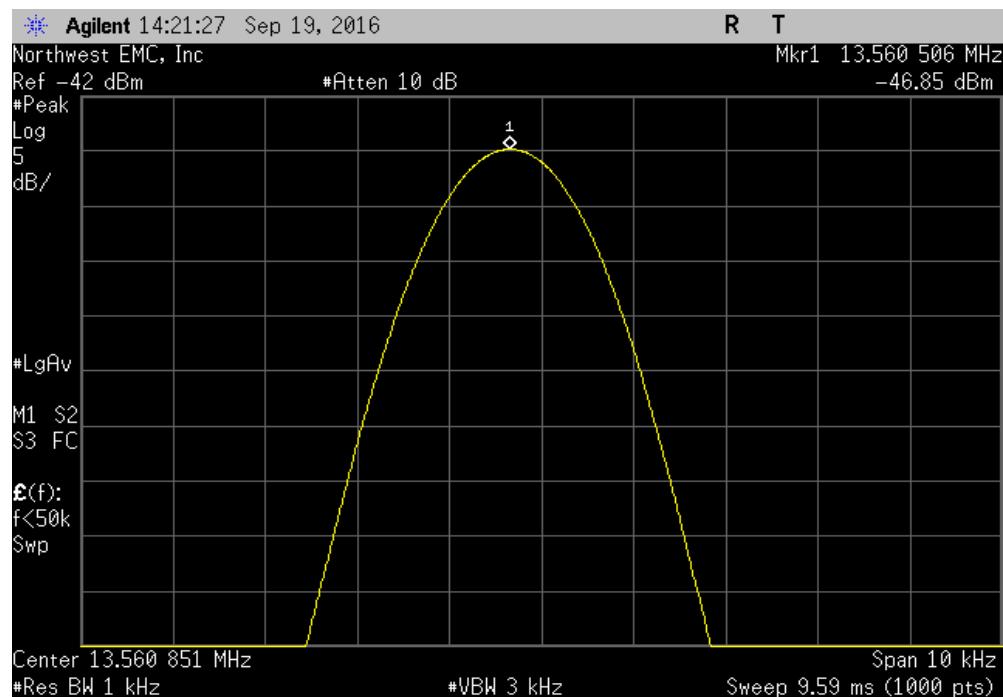

RFID, 13.56 MHz, Temperature: +20°, After 5 Minutes


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560506	13.56	37.3	100	Pass

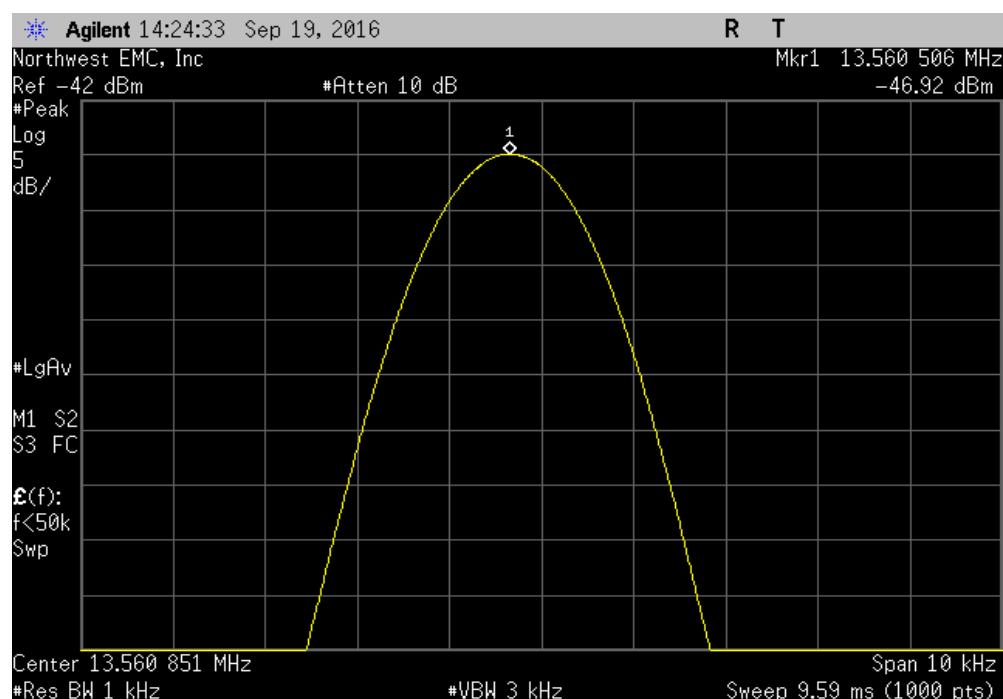

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +20°, After 10 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560508	13.56	37.5	100	Pass

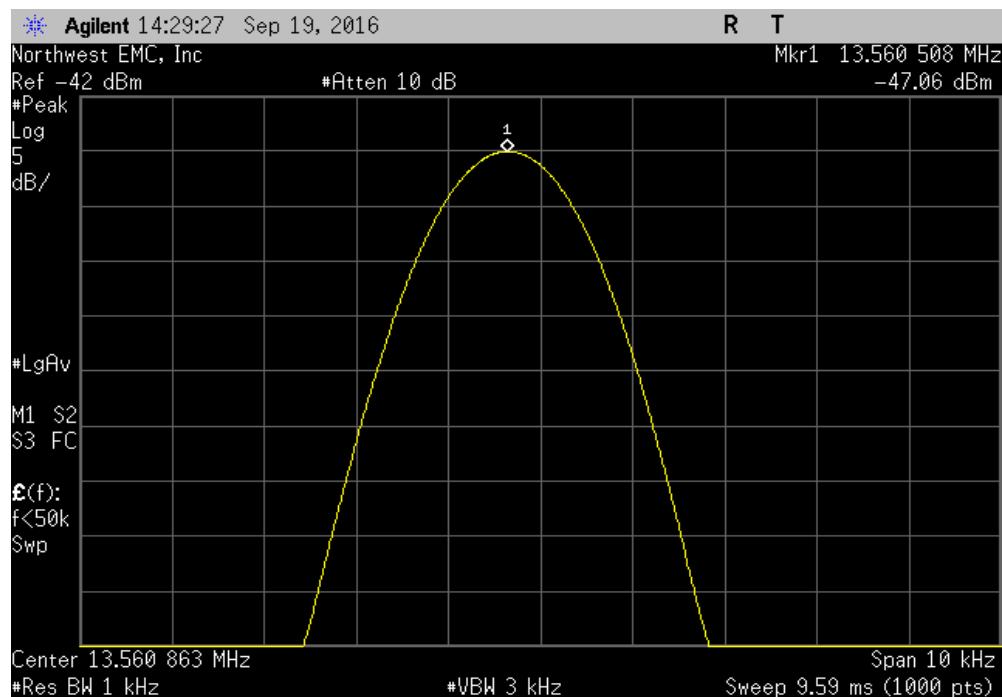

RFID, 13.56 MHz, Temperature: +10°, Startup


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560515	13.56	38	100	Pass

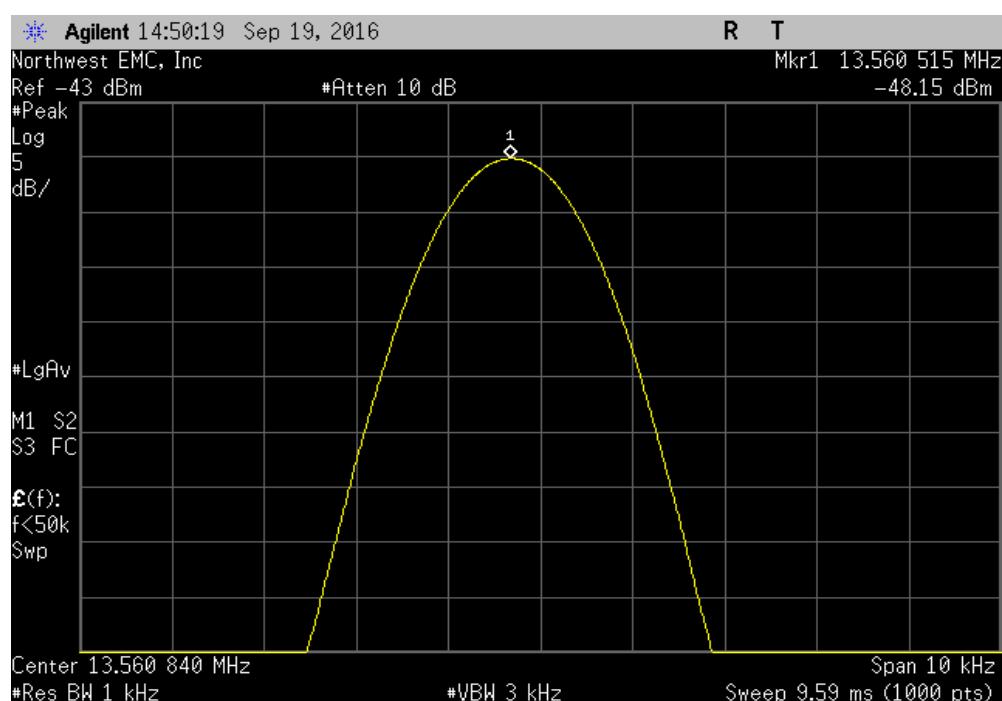

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +10°, After 2 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560518	13.56	38.2	100	Pass

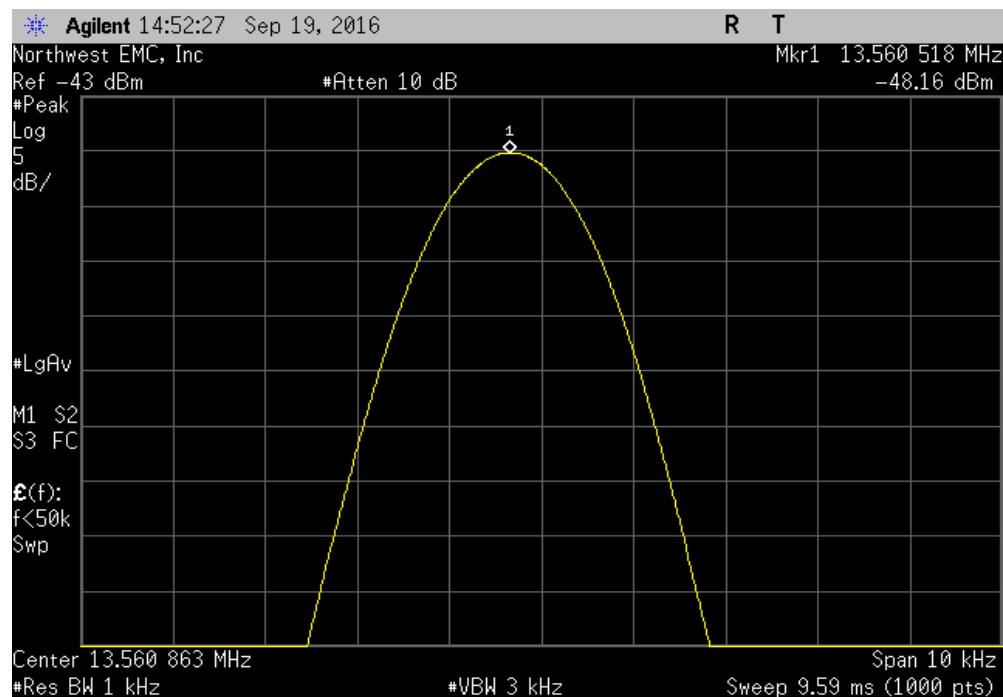

RFID, 13.56 MHz, Temperature: +10°, After 5 Minutes


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560518	13.56	38.2	100	Pass

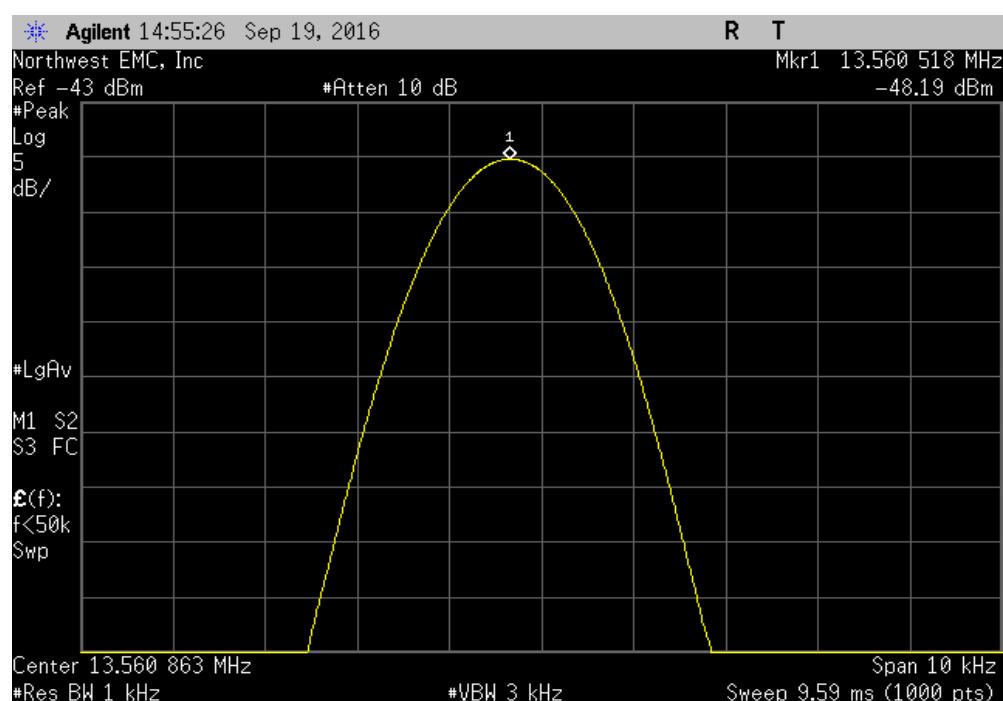

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: +10°, After 10 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560517	13.56	38.1	100	Pass

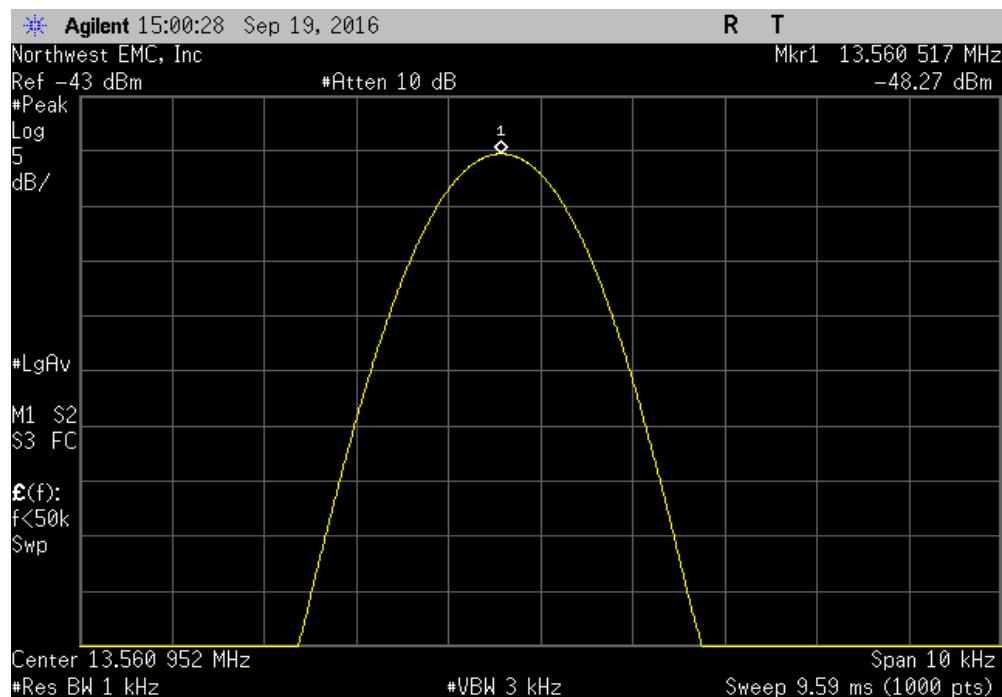

RFID, 13.56 MHz, Temperature: 0°, Startup


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560518	13.56	38.2	100	Pass

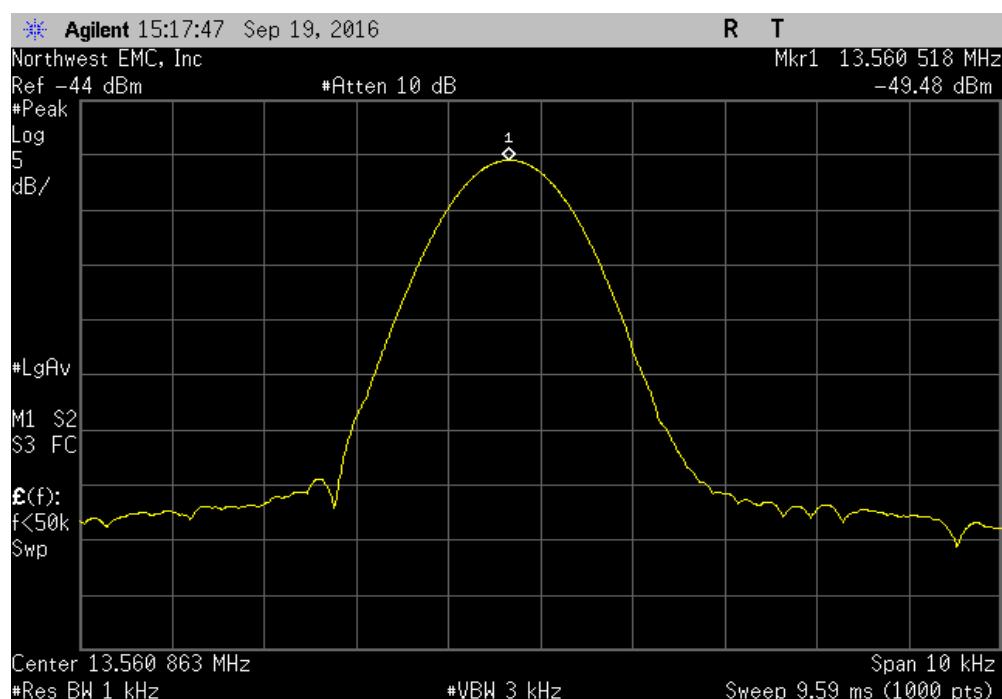

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: 0°, After 2 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560517	13.56	38.1	100	Pass

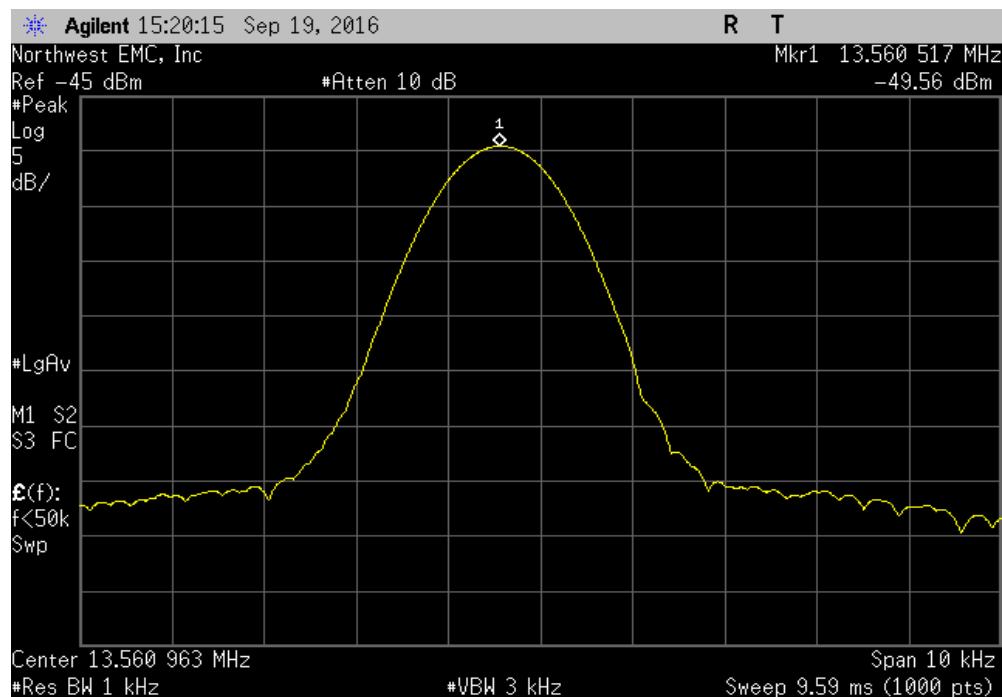

RFID, 13.56 MHz, Temperature: 0°, After 5 Minutes


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560516	13.56	38.1	100	Pass

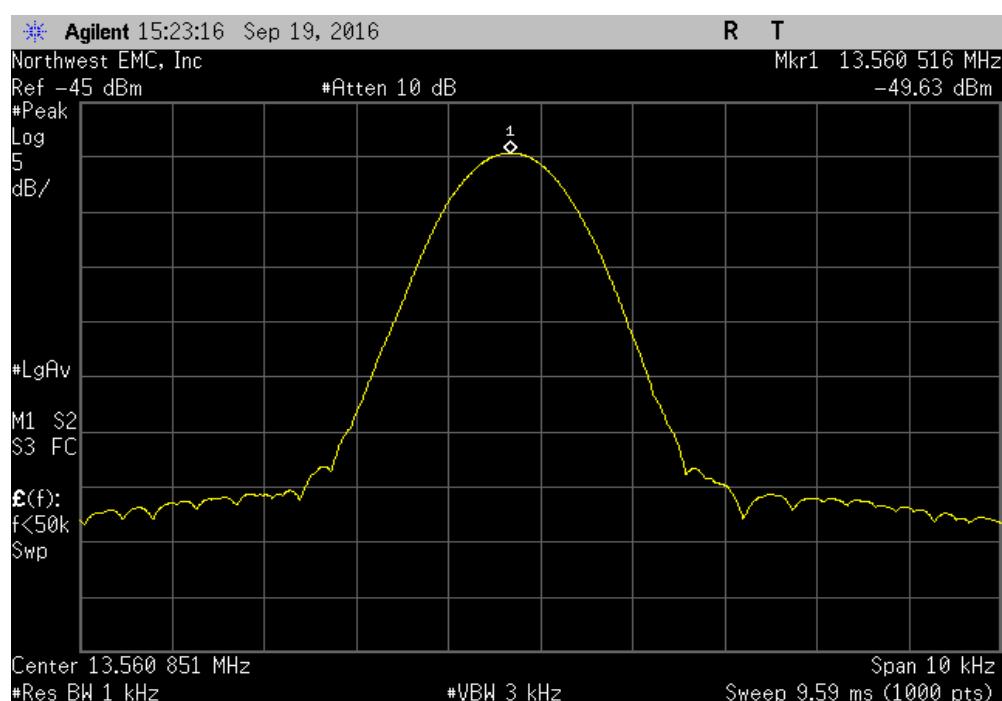

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: 0°, After 10 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560518	13.56	38.2	100	Pass

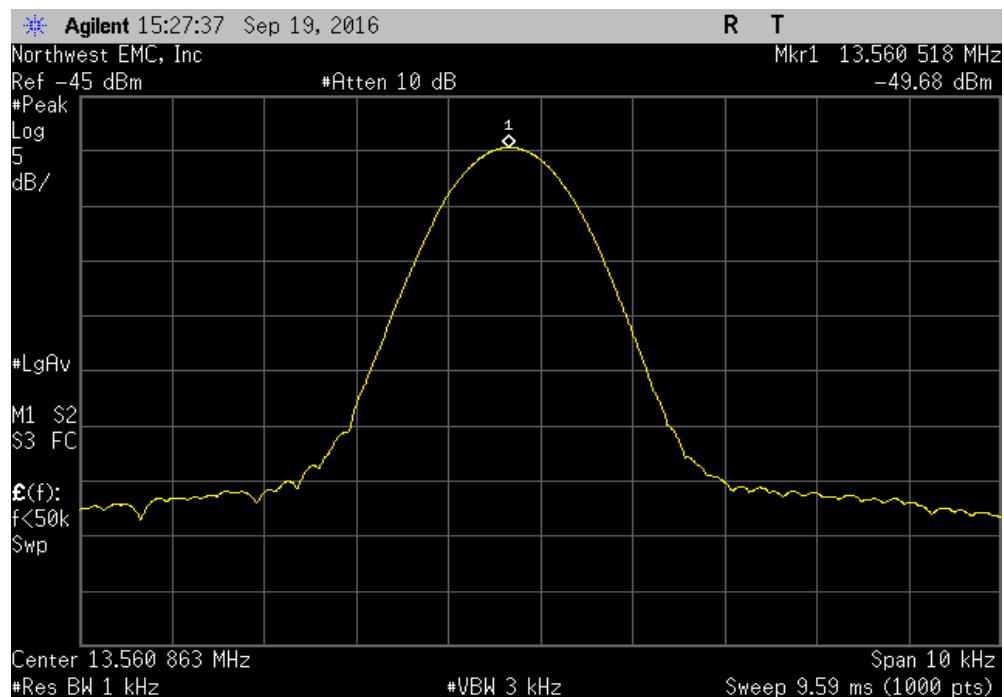

RFID, 13.56 MHz, Temperature: -10°, Startup


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560498	13.56	36.7	100	Pass

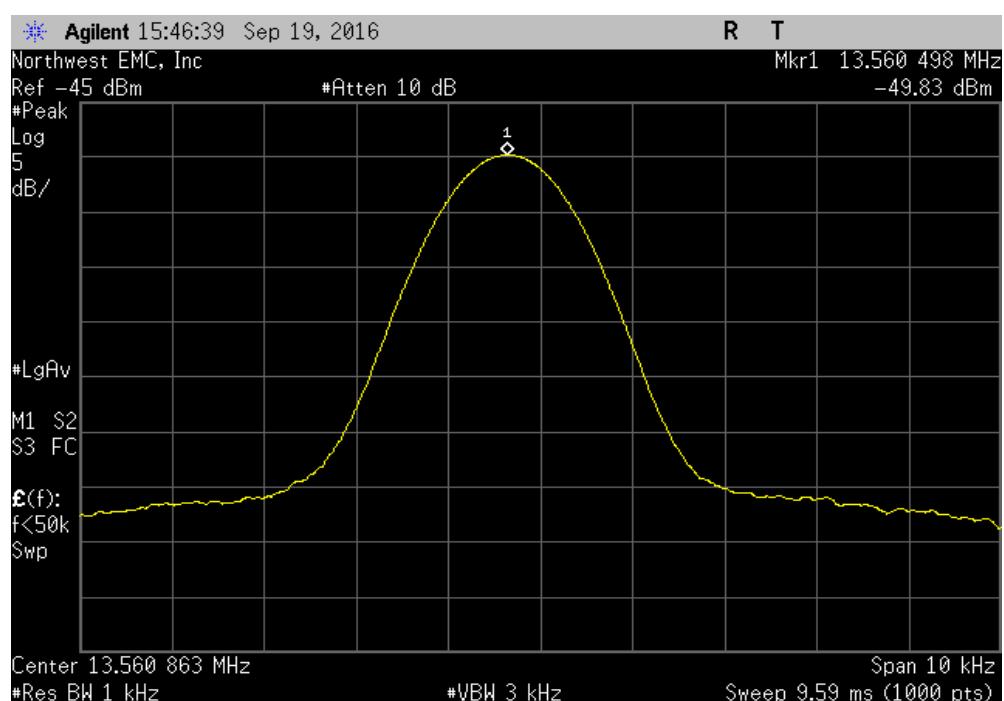

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: -10°, After 2 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560498	13.56	36.7	100	Pass

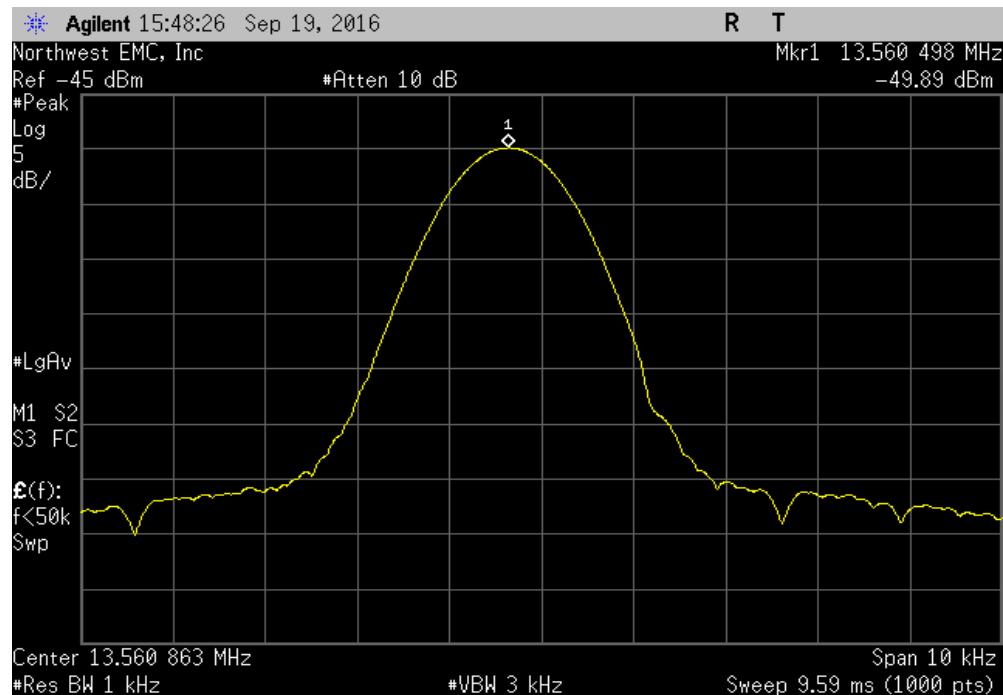

RFID, 13.56 MHz, Temperature: -10°, After 5 Minutes


Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560498	13.56	36.7	100	Pass

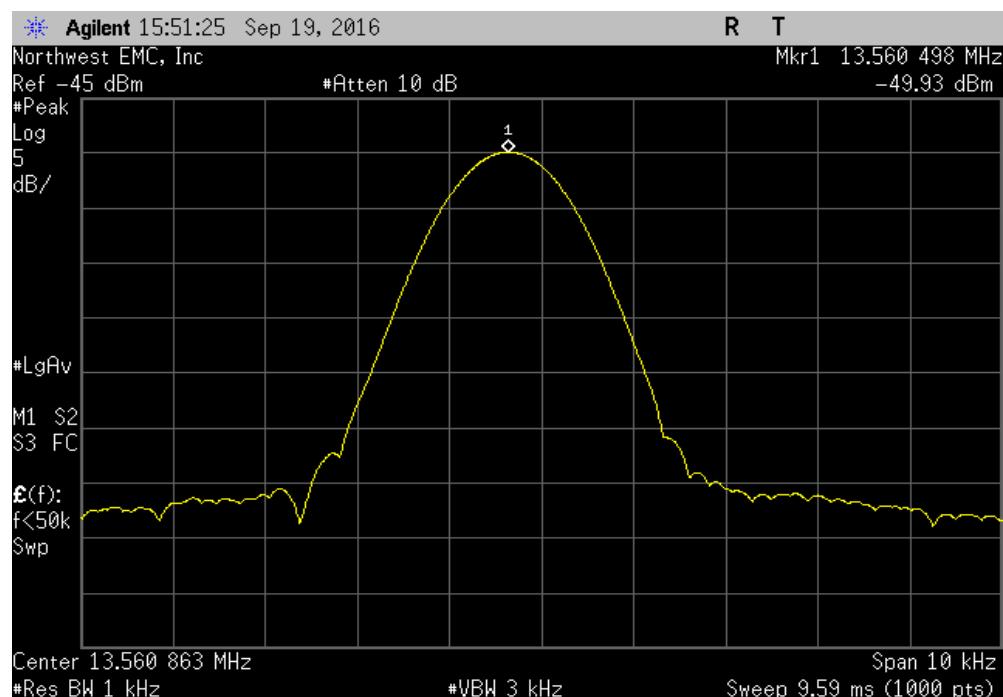

# FREQUENCY STABILITY


RFID, 13.56 MHz, Temperature: -10°, After 10 Minutes

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560498	13.56	36.7	100	Pass

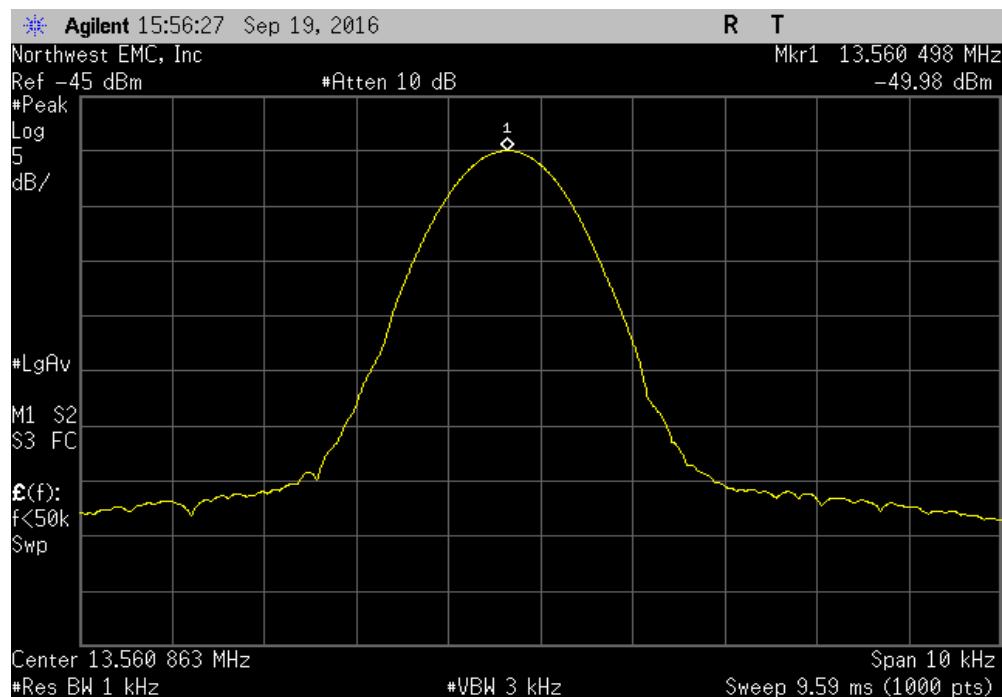


RFID, 13.56 MHz, Temperature: -20°, Startup

Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
13.560448	13.56	33	100	Pass

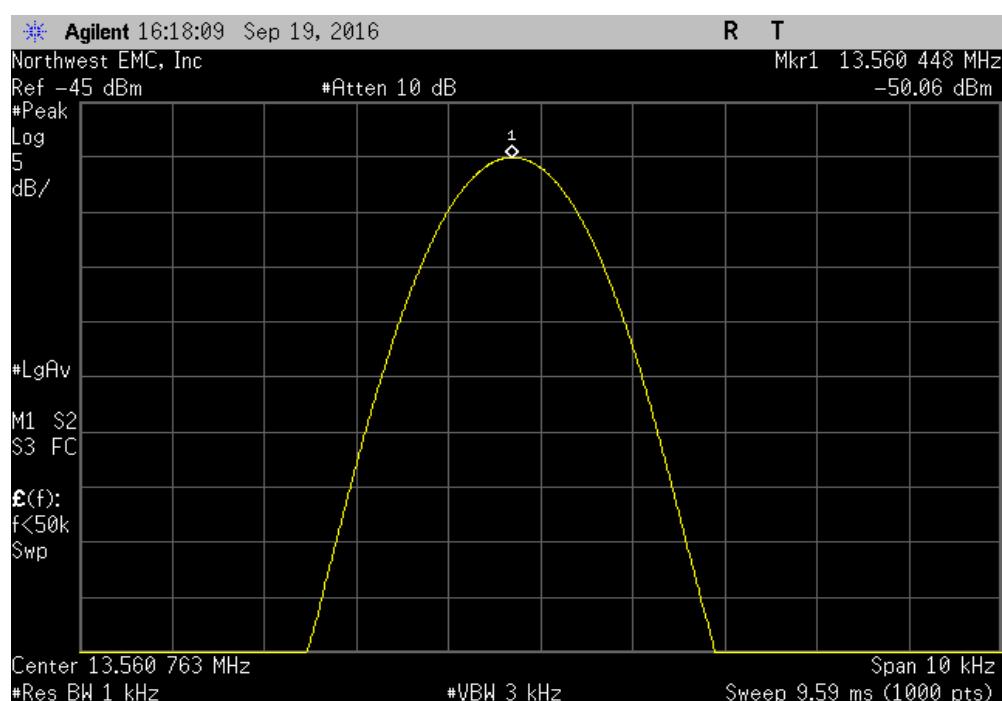


# FREQUENCY STABILITY

RFID, 13.56 MHz, Temperature: -20°, After 2 Minutes					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560447	13.56	33	100	Pass	

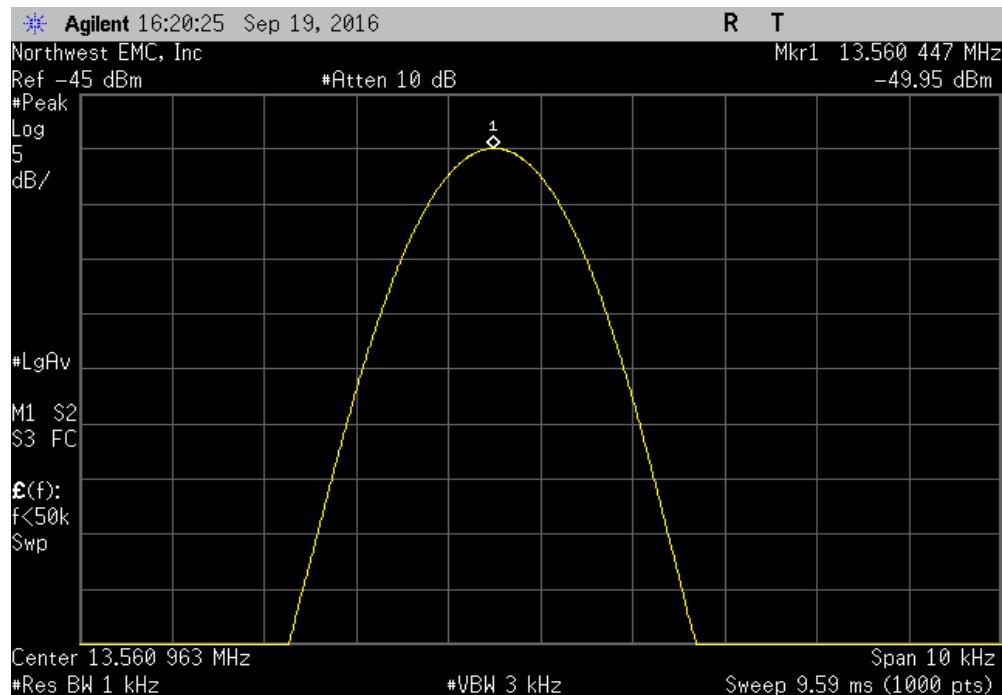

RFID, 13.56 MHz, Temperature: -20°, After 5 Minutes					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
13.560448	13.56	33	100	Pass	

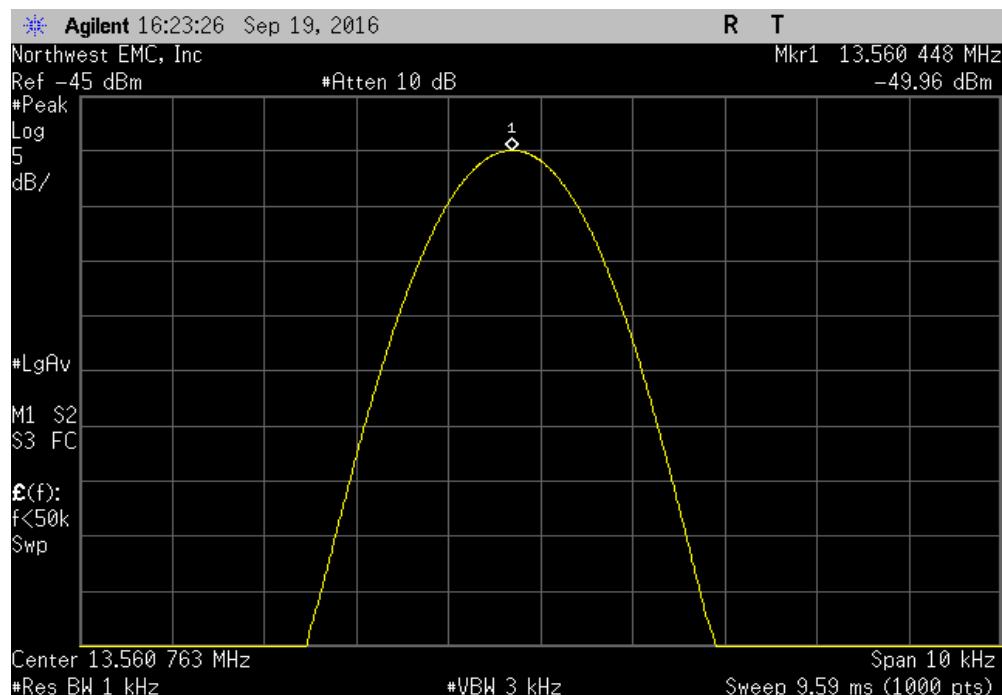

# FREQUENCY STABILITY

RFID, 13.56 MHz, Temperature: -20°, After 10 Minutes					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	13.560448	13.56	33	100	Pass

