

# RF Exposure Report

Report No.: AGC07811220501FH03

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Glass Wireless Charger

**BRAND NAME** : N/A

**MODEL NAME** : SA330, 28828

**APPLICANT** : Ningbo Gecen Promotion & Gift Co., Ltd

**DATE OF ISSUE** : Jun. 13, 2022

STANDARD(S) : KDB680106 D01 RF Exposure Wireless Charging Base

App v03r01

**REPORT VERSION**: V1.0

Attestation of Global Comphance (Shenzhen) Co., Ltd






Page 2 of 12

#### REPORT REVISE RECORD


Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 13, 2022	Valid	Initial Release





# **TABLE OF CONTENTS**

1.	VERIFICATION OF CONFORMITY	4
2.	GENERAL INFORMATION	. 5
	2.1. PRODUCT DESCRIPTION	5
3.	DESCRIPTION OF TEST MODES	6
4.	SYSTEM TEST CONFIGURATION	6
5.	TEST FACILITY	7
6.	RADIO FREQUENCY (RF) EXPOSURE TEST	8
	6.1. LIMITS	8
	6.2. TEST SETUP	. 8
۸	DDENDIY A: DHOTOGDADHS OF TEST SETUD	11





#### 1. VERIFICATION OF CONFORMITY

Applicant	Ningbo Gecen Promotion & Gift Co., Ltd
Address	B106-109,NO.535 QINGSHUIQIAO ROAD, HI-TECH ZONE, Ningbo, China
Manufacturer	Ningbo Gecen Promotion & Gift Co., Ltd
Address	B106-109,NO.535 QINGSHUIQIAO ROAD, HI-TECH ZONE, Ningbo, China
Factory	Ningbo Gecen Promotion & Gift Co., Ltd
Address	B106-109,NO.535 QINGSHUIQIAO ROAD, HI-TECH ZONE, Ningbo, China
Product Designation	Glass Wireless Charger
Brand Name	N/A
Test Model	SA330
Series Model	28828
Difference description	All the series models are the same as the test model except for the model names.
Date of test	May 20, 2022 to Jun. 13, 2022
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

#### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in KDB680106 D01.

The results of testing in this report apply to the product/system which was tested only.

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Max Zhang
(Authorized Officer)

Jun. 13, 2022

Jun. 13, 2022

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 5 of 12

#### 2. GENERAL INFORMATION

# 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

	Attriagor technical description of Eo i is described as following				
Operation Frequency	111-205kHz				
Test Frequency	147.4KHz				
Maximum field strength	72.43dBuV/m(PK)@3m				
Number of channels	1				
Antenna Designation	Coil Antenna (Met 15.203 Antenna requirement)				
Hardware Version	HC-SW5 V1				
Software Version	502FA3				
Power Supply	DC 5V, 2A				
Wireless charger	5W				




Page 6 of 12

# 3. DESCRIPTION OF TEST MODES

MODE	TEST MODE DESCRIPTION				
1	Full Load				
2	Half Load				
3	Null Load				
Note: Wireless output: 5W					

#### 4. SYSTEM TEST CONFIGURATION

Item	Equipment	Model No.	ID or Specification	Remark	
1	Glass Wireless Charger	SA330	2AJZYSA330	EUT	





#### 5. TEST FACILITY

TestSite	Attestation of Global Compliance(Shenzhen) Co., Ltd
Location	1-2/F,Building19,JunfengIndustrialPark,ChongqingRoad,HepingCommunity,FuhaiSt reet,Bao'anDistrict,Shenzhen,Guangdong,China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

#### **TEST EQUIPMENT LIST**

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
Broadband Field	Narda Safety Test	ELT-400	J-0004	Jun. 09, 2021	Jun. 08, 2022	
Meter	Solutions GmbH	EL1-400	J-0004	Juli. 09, 2021		
Broadband Field	Narda Safety Test	ELT-400	J-0004	Jun. 08, 2022	Jun. 07, 2023	
Meter	Solutions GmbH	EL1-400	J-000 <del>4</del>	Juli. 00, 2022		
Drobo FUD	Narda Safety Test	2200/00 40	1.0045	Jun. 09, 2021	Jun. 08, 2022	
Probe FHP	Solutions GmbH	2300/90.10	J-0015	Juli. 09, 2021		
Drobo CUD	Narda Safety Test	2200/00 40	1.0045	Jun. 08, 2022	Jun. 07, 2023	
Probe FHP	Solutions GmbH	2300/90.10	J-0015	Juli. 06, 2022	Juli. 07, 2023	




# 6. RADIO FREQUEN CY(RF) EXPOSURETEST

#### 6.1. LIMITS

For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

#### **6.2. TEST SETUP**

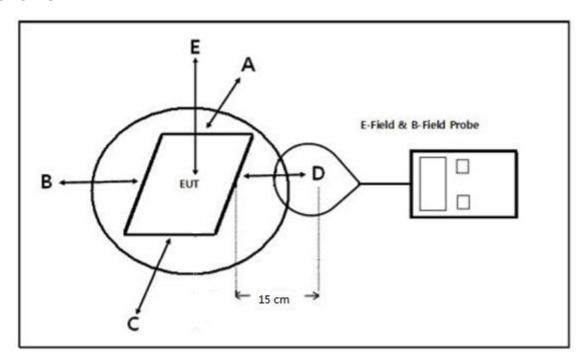

Note: Position A: Front of EUT; Position B: Left of EUT; Position C: back of EUT; Position D: Right of EUT; Position E: Top of EUT(20 cm measure distance);



Report No.: AGC07811220501FH03 Page 9 of 12

#### **6.3. TEST PROCEDURE**

The EUT was placed on a non-conductive table top and the ancillary equipment (e.g.mobile phone) was placed on the EUT for charging.

Maximum E-field and H-field measurements were tested 15cm from each side of the EUT. For top side the measure distance is 20cm.

Along the side of the EUT to center of E-field probe and H-field probe were positioned at the location to search maximum field strength.



Page 10 of 12

# 6.4. TEST RESULT

Test condition: Mode 1
E-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(V/m)
	(V/m)	(V/m)	(V/m)	(V/m)	(V/m)	
147.4kHz	1.18	1.12	1.13	1.17	1.61	614

# H-field strength test result:

Frequency	Field	Probe	Probe	Probe	Probe	Probe	Limit
Range	Strength	Position A	Position B	Position C	Position D	Position E	
147.4kHz	nT	452.26	351.76	439.70	489.95	703.52	
147.4kHz	A/m	0.36	0.28	0.35	0.39	0.56	1.63

Test condition: Mode 2 E-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(V/m)
	(V/m)	(V/m)	(V/m)	(V/m)	(V/m)	
135.7kHz	0.99	0.97	0.85	0.94	1.07	614

# H-field strength test result:

Frequency	Field	Probe	Probe	Probe	Probe	Probe	Limit
Range	Strength	Position A	Position B	Position C	Position D	Position E	
135.7kHz	nT	414.57	402.01	427.14	452.26	665.83	
135.7kHz	A/m	0.33	0.32	0.34	0.36	0.53	1.63



Page 11 of 12

# Test condition: Mode 3 E-field strength test result:

Frequency	Probe	Probe	Probe	Probe	Probe	Limit
Range	Position A	Position B	Position C	Position D	Position E	(V/m)
	(V/m)	(V/m)	(V/m)	(V/m)	(V/m)	
131.9kHz	0.68	0.63	0.65	0.66	0.82	614

# H-field strength test result:

Frequency	Field	Probe	Probe	Probe	Probe	Probe	Limit
Range	Strength	Position A	Position B	Position C	Position D	Position E	
131.9kHz	nT	175.88	226.13	201.01	175.88	314.07	
131.9kHz	A/m	0.14	0.18	0.16	0.14	0.25	1.63

#### Conclusion:

- 1. The test value is less than 50% MPE limit, which meets the requirements
- 2. All test modes had been tested. The worst case recorded in the report.
- 3. Unit conversion formula: 1ut=1.25A/m.



Page 12 of 12

# **APPENDIX A: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC07811220501AP02

----END OF REPORT----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.