



中国认可
国际互认
检测
TESTING
CNAS L5313



DEKRA

Test Report

FCC Part15 Subpart C

Product Name : Rylo
Model No. : A0101
FCC ID : 2AK270101B

Applicant : Rylo Inc.
Address : PO BOX 77234, San Francisco, CA 94107, USA

Date of Receipt : Aug. 13, 2018
Test Date : Aug. 14, 2018~ Aug. 31, 2018
Issued Date : Oct. 11, 2018
Report No. : 1882072R-RF-US-P06V01
Report Version : V1.1

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNAS, A2LA or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

Test Report Certification

Issued Date : Oct. 11, 2018

Report No. : 1882072R-RF-US-P06V01



Product Name : Rylo
Applicant : Rylo Inc.
Address : PO BOX 77234, San Francisco, CA 94107, USA
Manufacturer : Rylo Inc.
Address : PO BOX 77234, San Francisco, CA 94107, USA
Model No. : A0101
FCC ID : 2AK270101B
EUT Voltage : DC 3.7V
Test Voltage : AC 120V/60Hz
Brand Name : Rylo
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C
ANSI C63.10:2013;
KDB 558074 D01v05


Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Designation Number: CN1199

Documented By :



(Adm. Specialist: Kitty Li)

Reviewed By :



(Senior Project Manager: Frank He)

Approved By :



(Engineering Supervisor: Jack Zhang)

TABLE OF CONTENTS

Description	Page
1. General Information.....	6
1.1. EUT Description.....	6
1.2. Working Frequency of Each Channel:.....	7
1.3. Antenna information.....	7
1.4. Mode of Operation.....	8
1.5. Tested System Details.....	8
1.6. Configuration of Tested System.....	9
1.7. EUT Exercise Software.....	10
2. Technical Test.....	11
2.1. Summary of Test Result.....	11
2.2. Test Frequency configuration:.....	12
2.3. Test Environment.....	13
2.4. Measurement Uncertainty.....	13
3. AC Power Line Conducted Emission.....	14
3.1. Test Equipment.....	14
3.2. Test Setup.....	14
3.3. Limit.....	15
3.4. Test Procedure.....	15
3.5. Test Result.....	16
4. Emissions in restricted frequency bands.....	18
4.1. Test Equipment.....	18
4.2. Test Setup.....	19
4.3. Limit.....	20
4.4. Test Procedure.....	22
4.5. EUT test Axis definition.....	23
4.6. Test Result.....	24
5. Emissions in non-restricted frequency bands.....	32
5.1. Test Equipment.....	32
5.2. Test Setup.....	32
5.3. Limit.....	33
5.4. Test Procedure.....	34
5.5. EUT test Axis definition.....	35
5.6. Test Result.....	36
6. Radiated Emission Band Edge.....	37
6.1. Test Equipment.....	37
6.2. Test Setup.....	38
6.3. Limit.....	38

6.4.	Test Procedure.....	39
6.5.	EUT test definition.....	40
6.6.	Duty Cycle.....	41
6.7	Test Result.....	42
7.	Occupied Bandwidth.....	50
7.1.	Test Equipment.....	50
7.2.	Test Setup.....	50
7.3.	Limit.....	51
7.4.	Test Procedure.....	51
7.5.	EUT test definition.....	52
7.6.	Test Result.....	53
8.	Fundamental emission output power.....	54
8.1.	Test Equipment.....	54
8.2.	Test Setup.....	54
8.3.	Limit.....	55
8.4.	Test Procedure.....	56
8.5.	EUT test definition.....	57
8.6.	Test Result.....	58
9.	Power Spectral Density.....	59
9.1.	Test Equipment.....	59
9.2.	Test Setup.....	59
9.3.	Limit.....	59
9.4.	Test Procedure.....	60
9.5.	EUT test definition.....	61
9.6.	Test Result.....	62

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1882072R-RF-US-P06V01	V1.0	Initial Issued Report	Sep. 05, 2018
1882072R-RF-US-P06V01	V1.1	P8, add a description regarding of radiated emission measurements.	Oct. 11, 2018

1. General Information

1.1. EUT Description

Product Name	Rylo
Model No.	A0101
EUT Voltage	DC 3.7V
Test Voltage	AC 120V/60Hz
Bluetooth Specification	V4.2
Frequency Range	2402- 2480 MHz
Channel Number	V4.2: 40
Channel Separation	V4.2: 2MHz
Type of Modulation	V4.2: GFSK
Data Rate	V4.2: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

1.2. Working Frequency of Each Channel:

Bluetooth Working Frequency of Each Channel: (For V4.2)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.3. Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Sectorized		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Dipole		
			☐	Sectorized		
	☒	Internal	☐	PIFA		
			☒	PCB		
			☐	Ceramic Chip Antenna		
			☐	Stamping Antenna		
			☐	Metal housing Antenna		
Antenna Technology	Ant Gain (dBi)					
☒ SISO	-1.59					

1.4. Mode of Operation

Test Mode
Mode 1: Transmit-1Mbps(GFSK_BLE)

Note: For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case in this report.


1.5. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


Product		Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Think Pad	2526	LV-A3285	Power by adapter

1.6. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

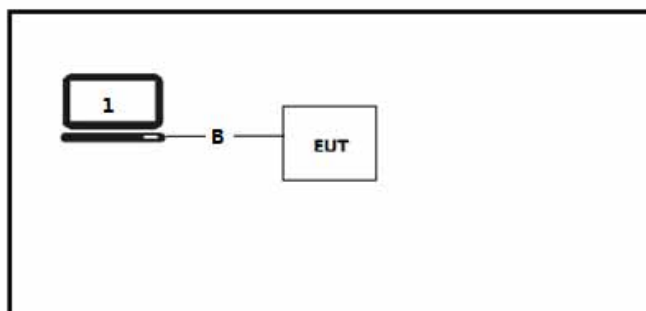

Test setup Diagram- Radiated Emission

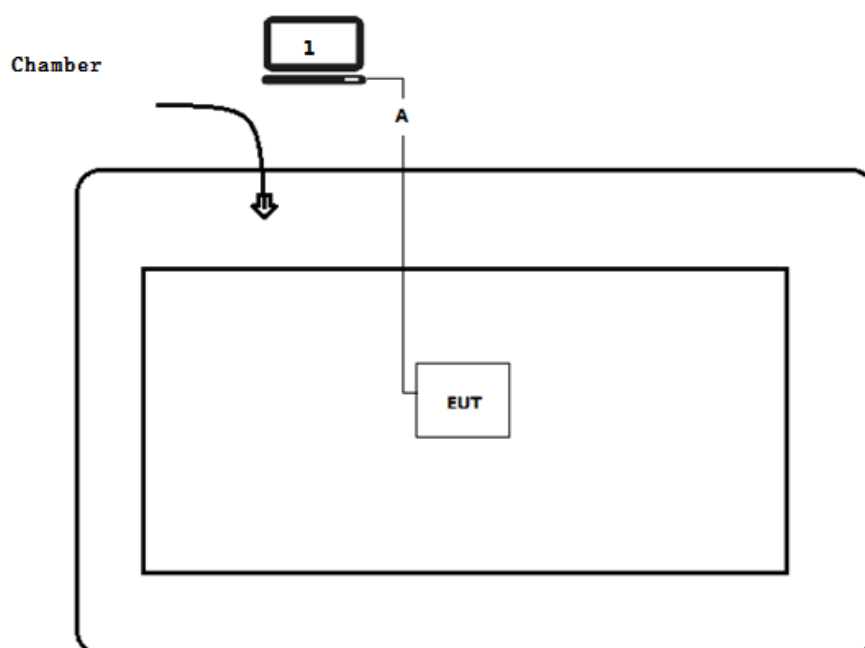

Signal Cable Type		Signal Cable Description
A	USB Control Cable	Non-shielded >10m
B	USB Control Cable	Non-shielded 1m

1.7. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	Run the RF test software.
4	Select the transmission mode and test channel, then start test.

2. Technical Test

2.1. Summary of Test Result

Performed Test Item	Normative References	Worst case mode	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	Mode 1	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Mode 1	FCC 15.209	PASS
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	Mode 1	$\geq 20\text{dBc}$	PASS
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	Mode 1	FCC 15.209	PASS
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(2)	Mode 1	$\geq 500\text{kHz}$	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	Mode 1	$\leq 30\text{dBm}$	PASS
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(e)	Mode 1	$\leq 8\text{dBm}/3\text{kHz}$	PASS
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	N/A	FCC 15.203	PASS

2.2. Test Frequency configuration:

Modulation Mode	Channel	Frequency	Channel	Frequency	Channel	Frequency
BLE	00	2402 MHz	19	2440 MHz	39	2480MHz

2.3. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.4. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


3. AC Power Line Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2018.03.05	2019.03.04
Two-Line V-Network	R&S	ENV 216	101189	2018.07.16	2019.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.16	2018.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.16	2018.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2018.01.04	2019.01.03

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

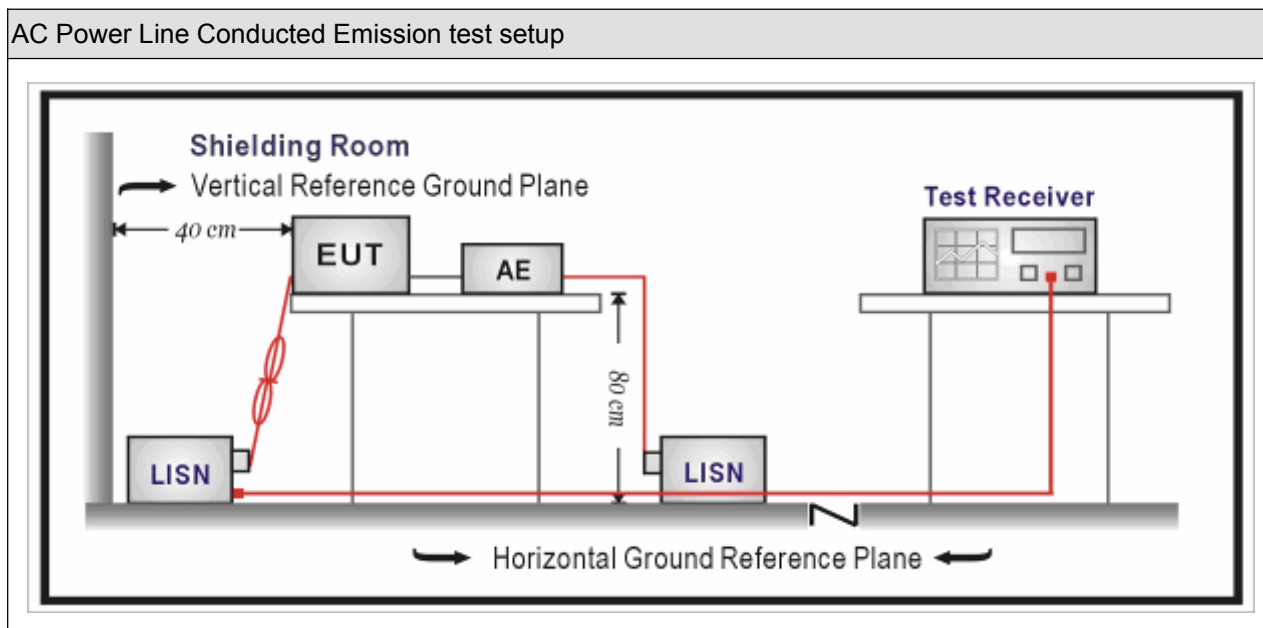

3.3. Limit


Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
☒	ANSI C63.4-2014	7	AC power-line conducted emission measurements

3.5. Test Result

Engineer: CptJack	
Site: TR1	Time: 2018/08/23
Limit: FCC_Part15.207_CE	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

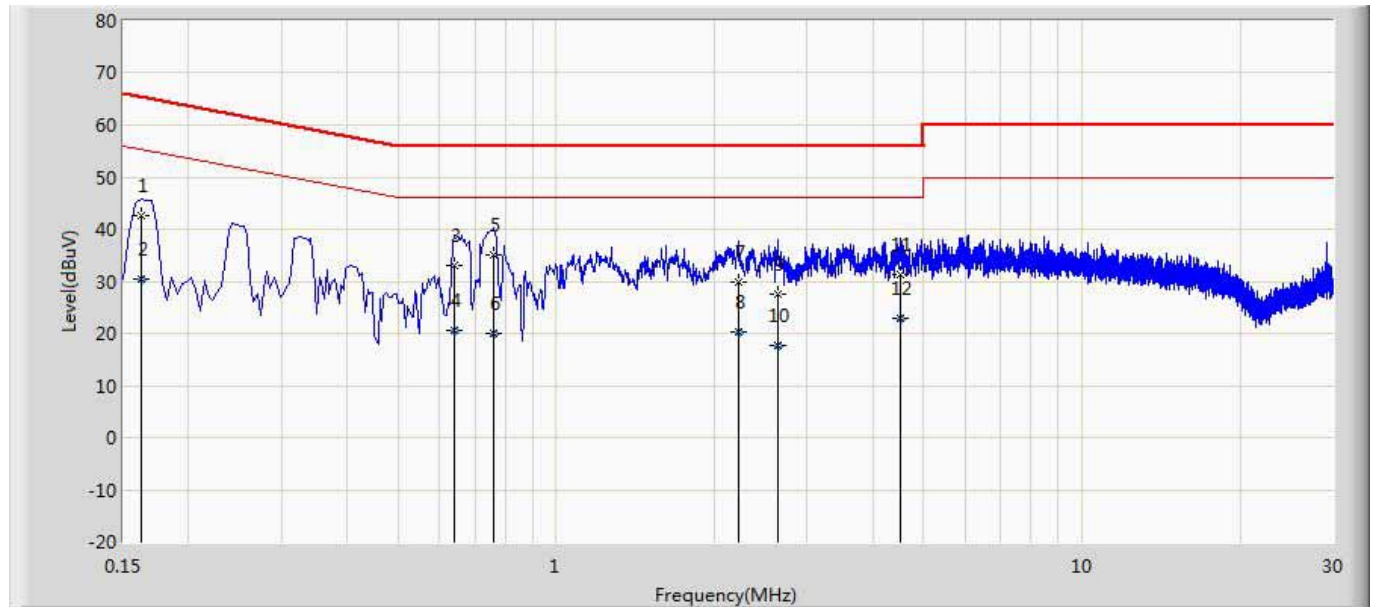


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.162	42.692	33.058	-22.965	65.657	9.607	0.026	0.000	QP
2		0.162	30.331	20.697	-25.326	55.657	9.607	0.026	0.000	AV
3		0.638	33.011	23.363	-22.989	56.000	9.600	0.048	0.000	QP
4		0.638	20.644	10.996	-25.356	46.000	9.600	0.048	0.000	AV
5	*	0.762	35.060	25.406	-20.940	56.000	9.602	0.052	0.000	QP
6		0.762	19.873	10.219	-26.127	46.000	9.602	0.052	0.000	AV
7		2.222	29.945	20.239	-26.055	56.000	9.614	0.093	0.000	QP
8		2.222	20.386	10.680	-25.614	46.000	9.614	0.093	0.000	AV
9		2.642	27.569	17.847	-28.431	56.000	9.621	0.101	0.000	QP
10		2.642	17.793	8.071	-28.207	46.000	9.621	0.101	0.000	AV
11		4.510	31.160	21.372	-24.840	56.000	9.652	0.136	0.000	QP
12		4.510	22.898	13.110	-23.102	46.000	9.652	0.136	0.000	AV

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: CptJack	
Site: TR1	Time: 2018/08/23
Limit: FCC_Part15.207_CE	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

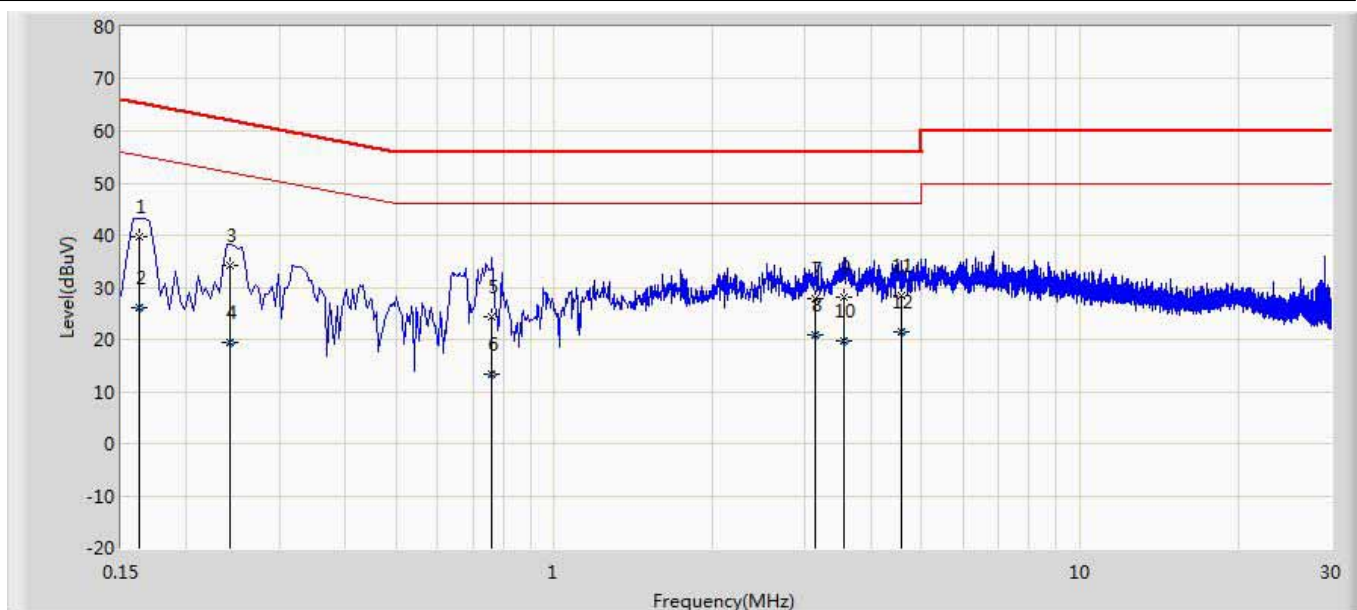

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.162	39.657	30.038	-26.000	65.657	9.593	0.026	0.000	QP
2		0.162	26.108	16.489	-29.549	55.657	9.593	0.026	0.000	AV
3		0.242	34.105	24.477	-29.266	63.371	9.598	0.030	0.000	QP
4		0.242	19.561	9.933	-33.810	53.371	9.598	0.030	0.000	AV
5		0.762	24.336	14.694	-31.664	56.000	9.590	0.052	0.000	QP
6		0.762	13.472	3.830	-32.528	46.000	9.590	0.052	0.000	AV
7		3.134	27.719	17.982	-28.281	56.000	9.625	0.112	0.000	QP
8		3.134	20.753	11.016	-25.247	46.000	9.625	0.112	0.000	AV
9		3.558	28.058	18.308	-27.942	56.000	9.631	0.119	0.000	QP
10		3.558	19.643	9.892	-26.357	46.000	9.631	0.119	0.000	AV
11		4.570	28.296	18.516	-27.704	56.000	9.644	0.136	0.000	QP
12	*	4.570	21.373	11.592	-24.627	46.000	9.644	0.136	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2018.03.29	2019.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2017.11.16	2018.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2017.10.16	2018.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2018.03.02	2019.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2018.01.03	2019.01.02
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2018.05.06	2019.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2018.05.06	2019.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2018.01.22	2019.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.11.25	2018.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.03.02	2019.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2018.03.02	2019.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2018.06.10	2019.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.04	2019.01.03
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

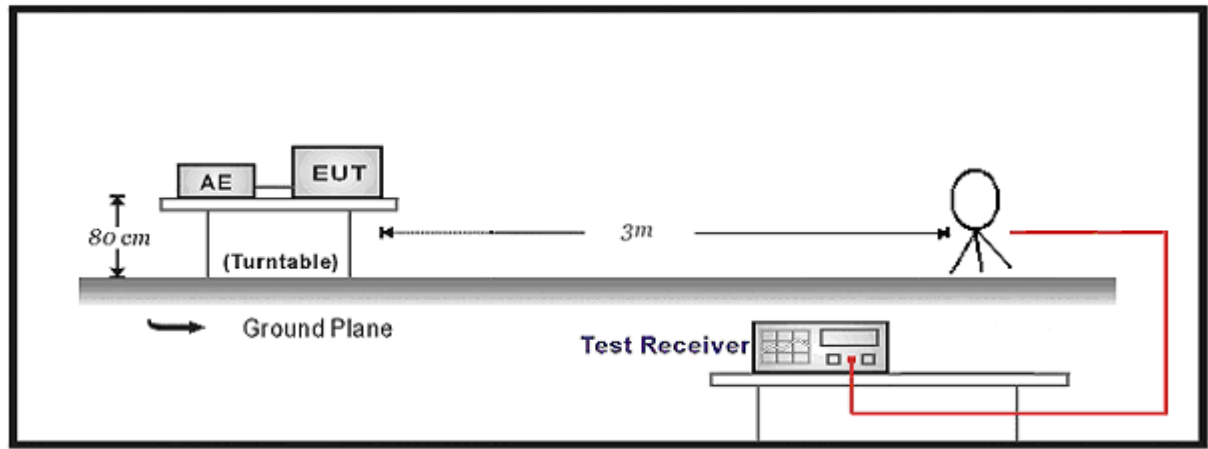

30MHz-1GHz Test Setup:

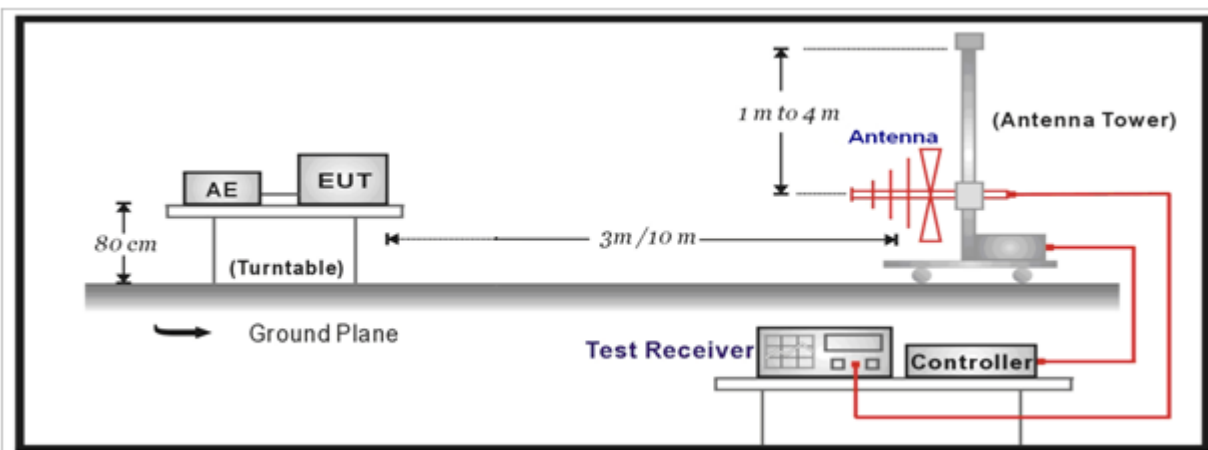

Above 1GHz Test Setup:

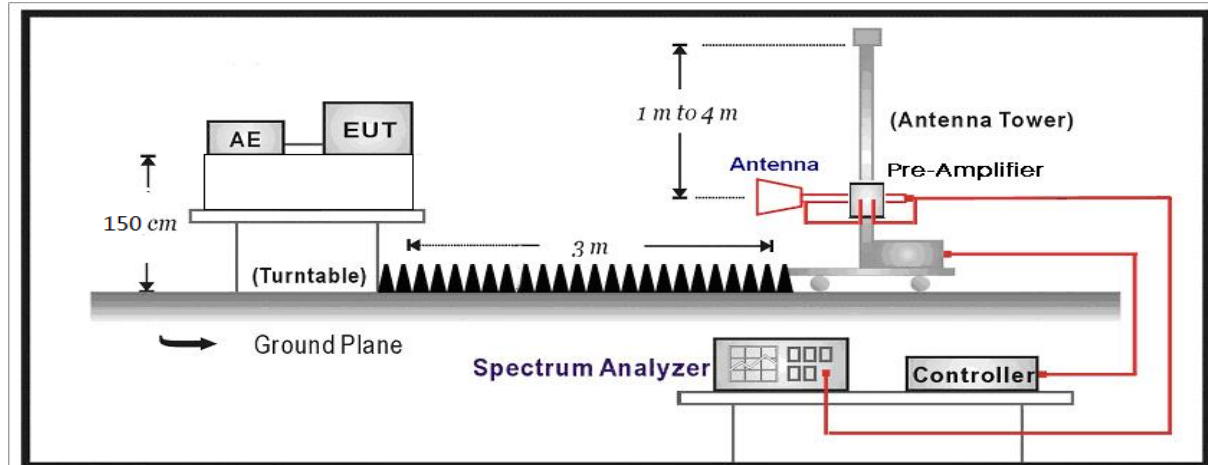

4.3. Limit

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)







Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method				
	References Rule		Chapter	Description
☐	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☐	ANSI C63.10	11.11.2	Reference level measurement
	☐	ANSI C63.10	11.11.3	Emission level measurement
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		ANSI C63.10	11.12.2.4	Peak power measurement procedure
		ANSI C63.10	11.12.2.5	Average power measurement procedures
	☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☒	ANSI C63.10	11.12.2.5.3 Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.5. EUT test Axis definition

Item	Emissions in restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


4.6. Test Result

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

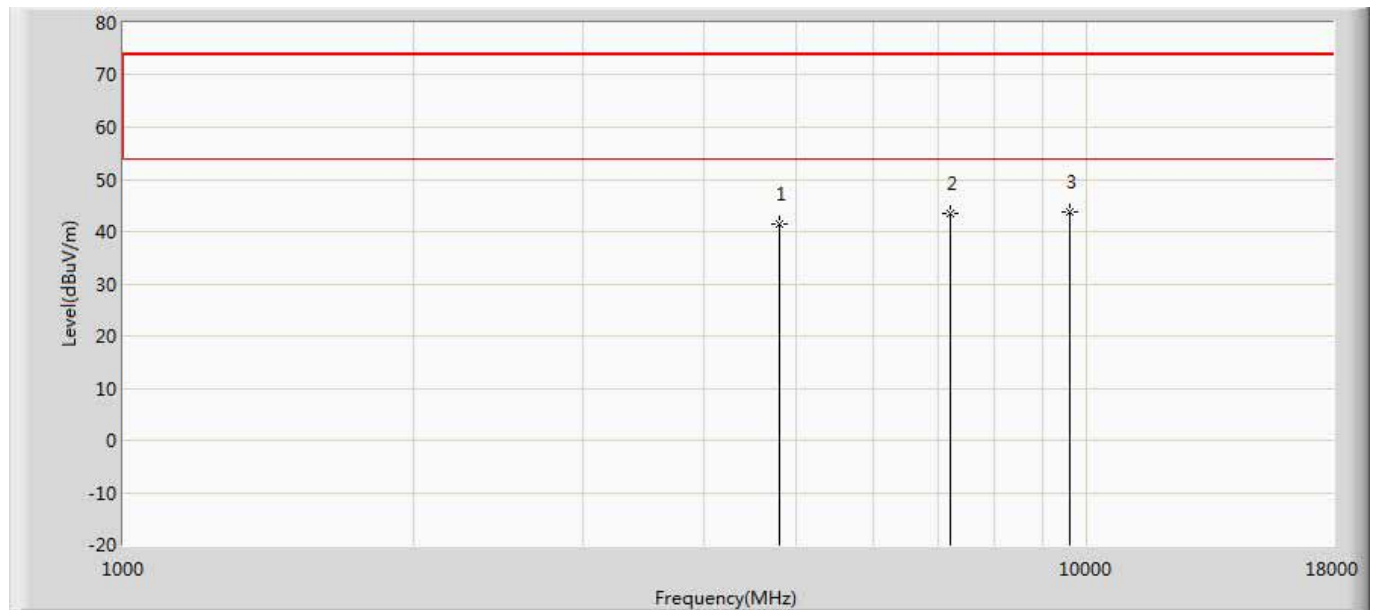


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.424	43.147	-32.576	74.000	-1.723	PK
2		7206.000	43.373	41.454	-30.627	74.000	1.919	PK
3	*	9608.000	43.644	38.745	-30.356	74.000	4.899	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

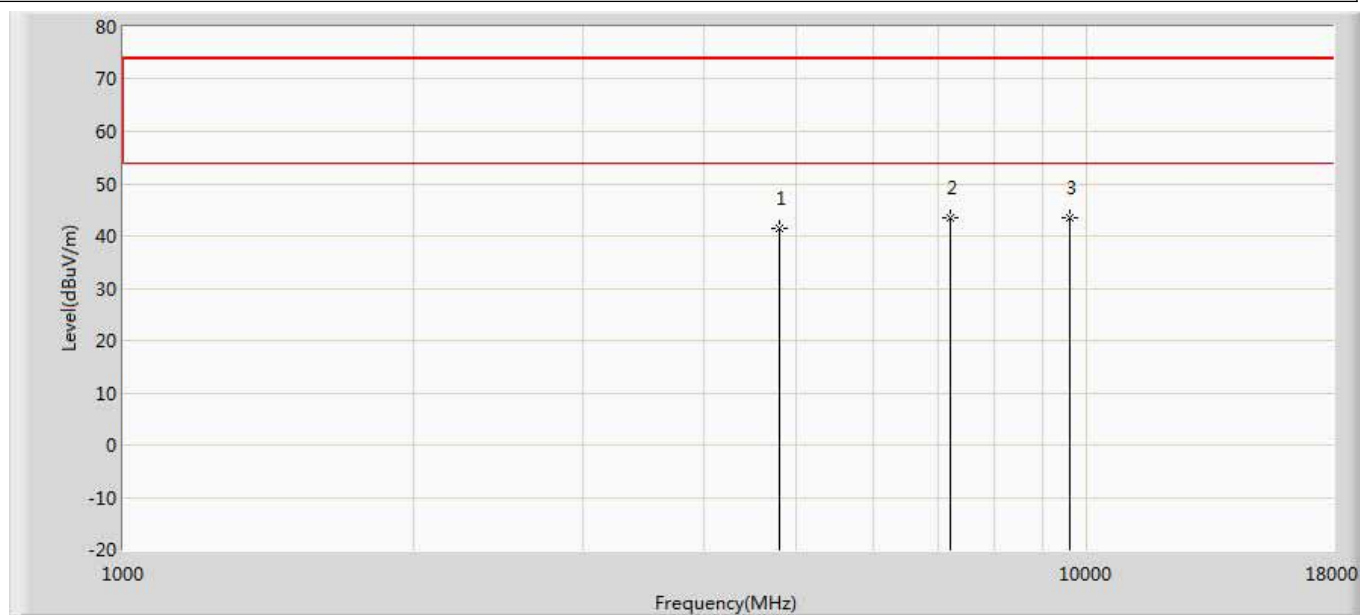


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.552	43.275	-32.448	74.000	-1.723	PK
2		7206.000	43.334	41.415	-30.666	74.000	1.919	PK
3	*	9608.000	43.548	38.649	-30.452	74.000	4.899	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by BLE	

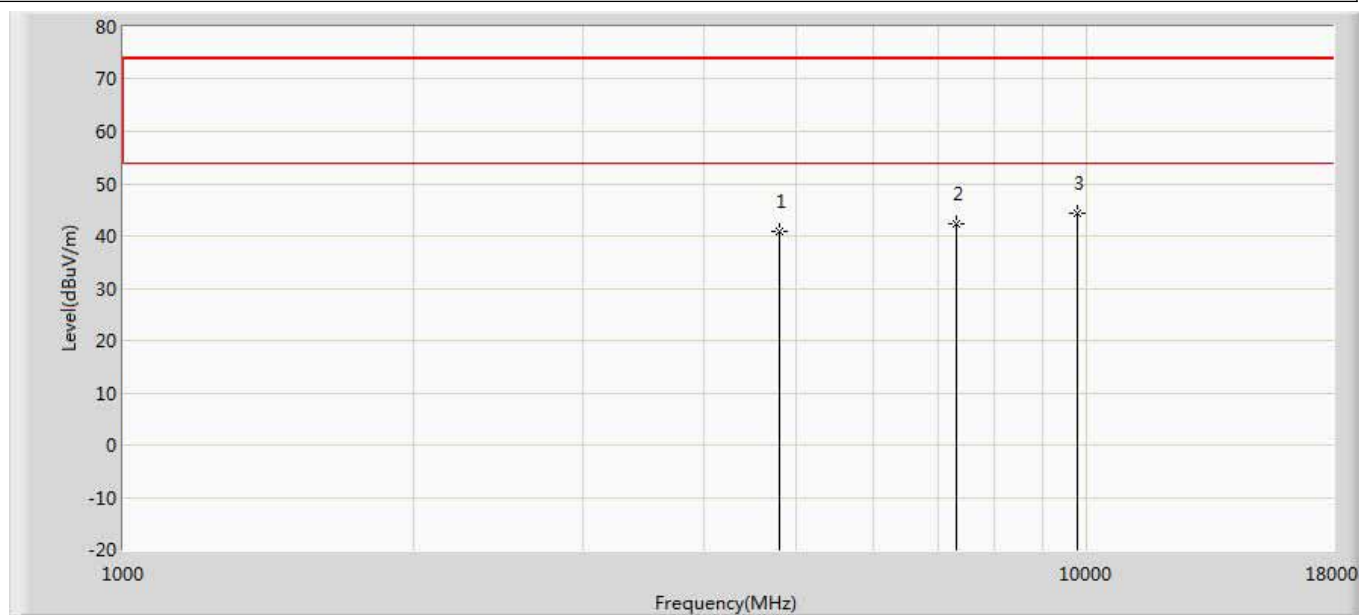


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4800.000	40.775	42.421	-33.225	74.000	-1.646	PK
2		7320.000	42.349	40.466	-31.651	74.000	1.884	PK
3	*	9760.000	44.217	38.405	-29.783	74.000	5.812	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2440MHz by BLE	

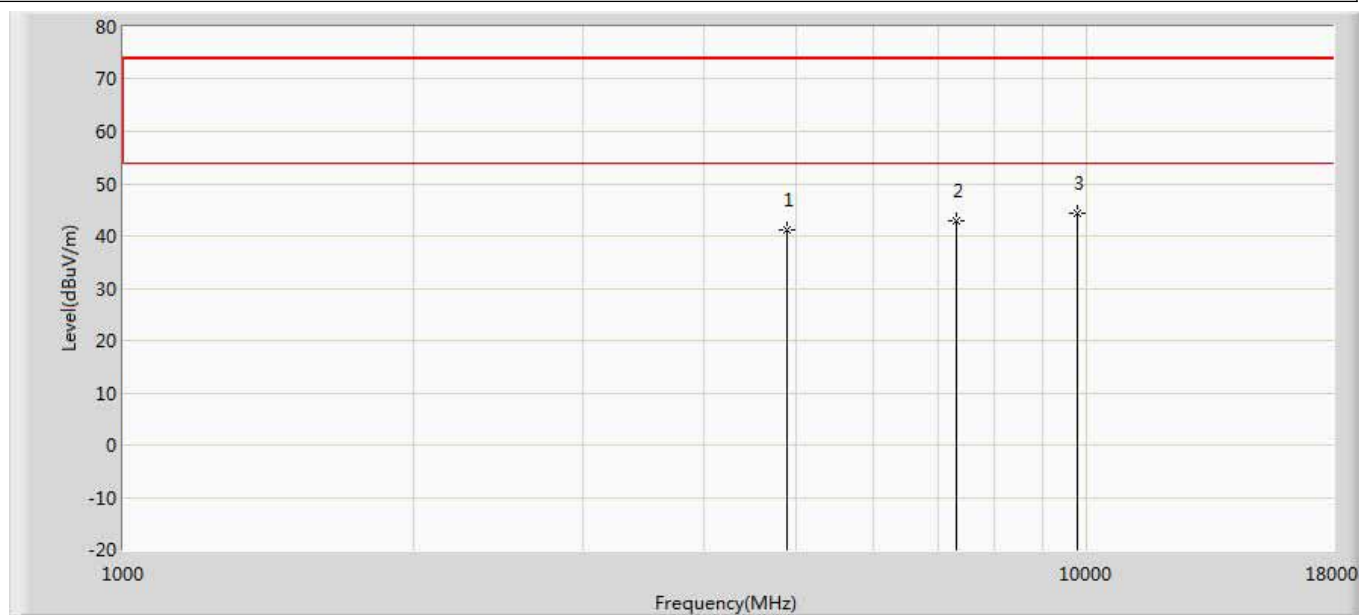


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.185	42.469	-32.815	74.000	-1.284	PK
2		7320.000	42.868	40.985	-31.132	74.000	1.884	PK
3	*	9760.000	44.218	38.406	-29.782	74.000	5.812	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:38
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

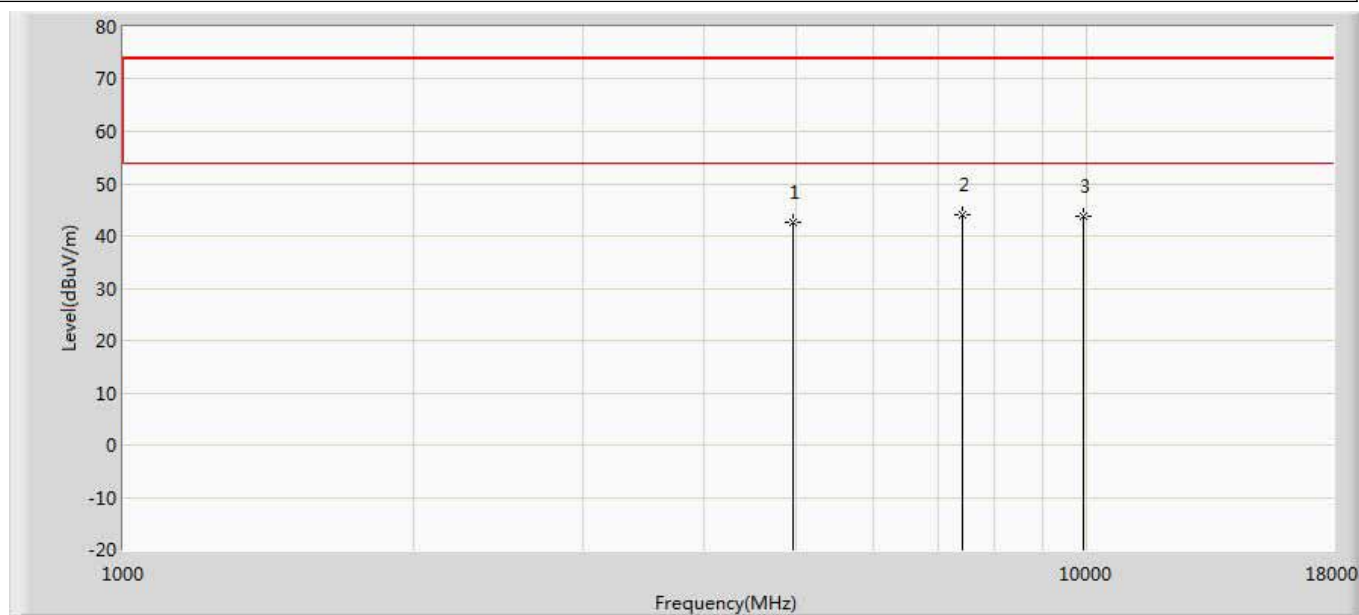

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	42.629	43.777	-31.371	74.000	-1.148	PK
2	*	7440.000	43.998	41.572	-30.002	74.000	2.426	PK
3		9920.000	43.829	38.575	-30.171	74.000	5.253	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:39
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

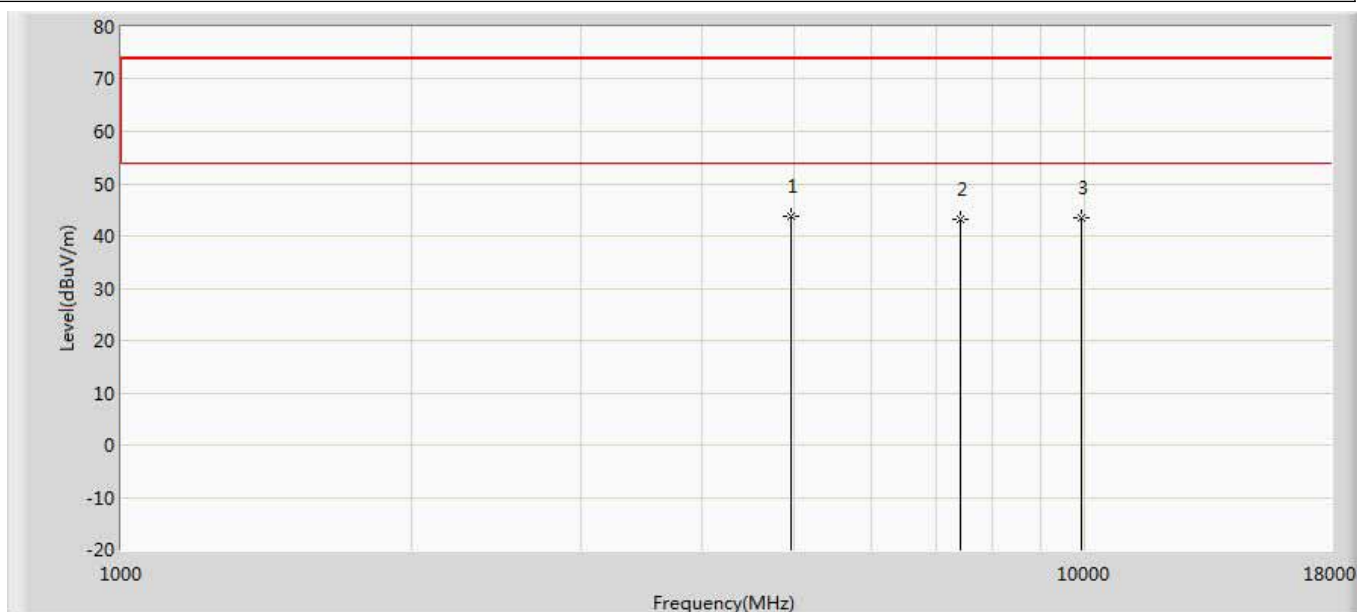

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4960.000	43.800	44.948	-30.200	74.000	-1.148	PK
2		7440.000	43.130	40.704	-30.870	74.000	2.426	PK
3		9920.000	43.441	38.187	-30.559	74.000	5.253	PK

Note: 1. Measure Level = Reading Level + Factor.


Note: 2. The test frequency range, 9kHz~30MHz, 18GHz~25GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.

Note: 3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Note: 4. The RBW set up, see Clause 6.6.

The worst case of Radiated Emission below 1GHz:

Engineer: LEon	
Site: AC2	Time: 2018/08/22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

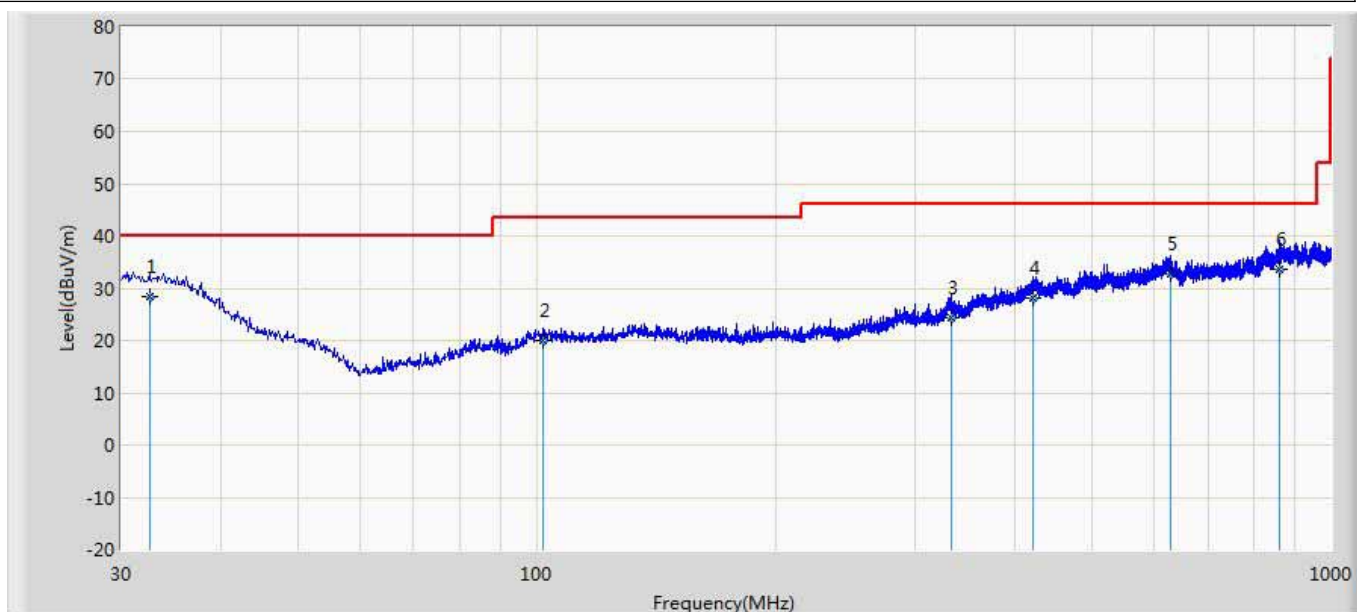


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1	*	32.546	28.275	0.900	-11.725	40.000	20.729	6.646	0.000	100	163	QP
2		101.901	19.934	2.800	-23.566	43.500	10.247	6.887	0.000	200	158	QP
3		332.276	24.230	1.300	-21.770	46.000	15.203	7.727	0.000	200	17	QP
4		421.516	28.092	0.900	-17.908	46.000	19.223	7.969	0.000	100	359	QP
5		628.369	32.864	2.400	-13.136	46.000	21.886	8.578	0.000	100	304	QP
6		860.562	33.479	0.900	-12.521	46.000	23.424	9.155	0.000	100	349	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: LEon	
Site: AC2	Time: 2018/08/22
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

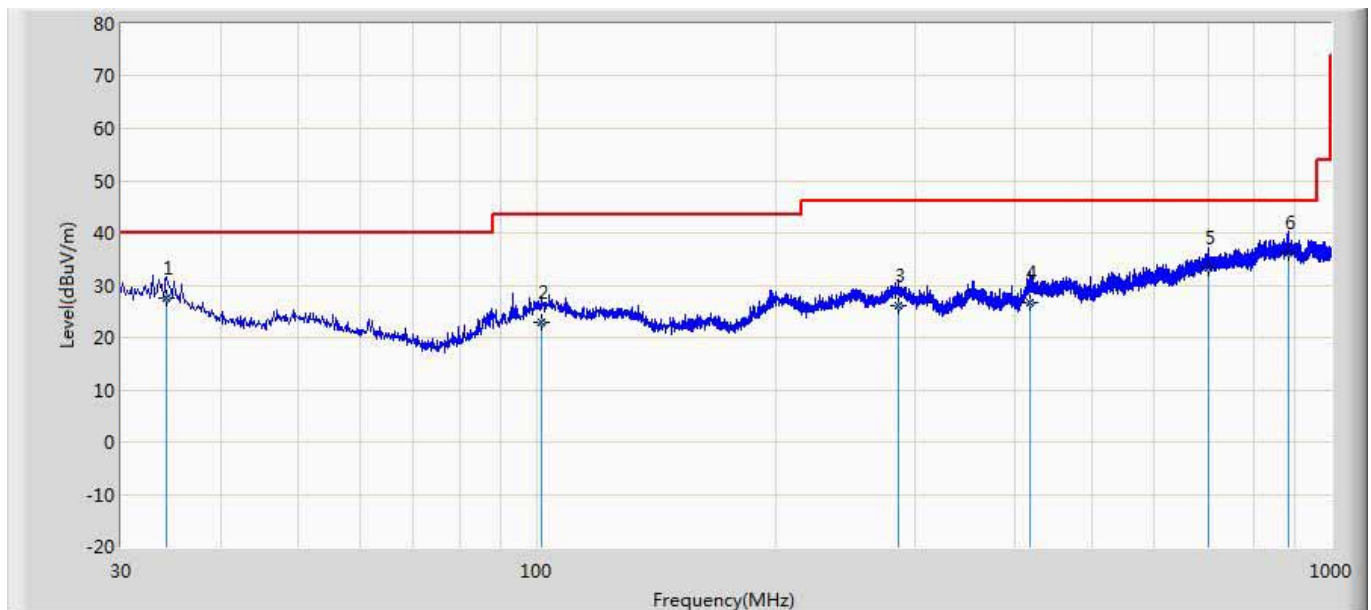

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		34.244	27.405	4.300	-12.595	40.000	16.441	6.664	0.000	106	360	QP
2		101.295	23.038	0.900	-20.462	43.500	15.255	6.883	0.000	200	207	QP
3		285.353	26.031	0.800	-19.969	46.000	17.626	7.605	0.000	200	0	QP
4		417.151	26.631	0.200	-19.369	46.000	18.465	7.965	0.000	100	262	QP
5		700.876	33.406	2.600	-12.594	46.000	22.054	8.752	0.000	100	28	QP
6	*	884.085	36.135	2.300	-9.865	46.000	24.624	9.211	0.000	200	251	QP

Note:

1. " * ", means this data is the worst emission level.

2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).


5. Emissions in non-restricted frequency bands

5.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

5.2. Test Setup

Emissions in non-restricted frequency bands test setup:

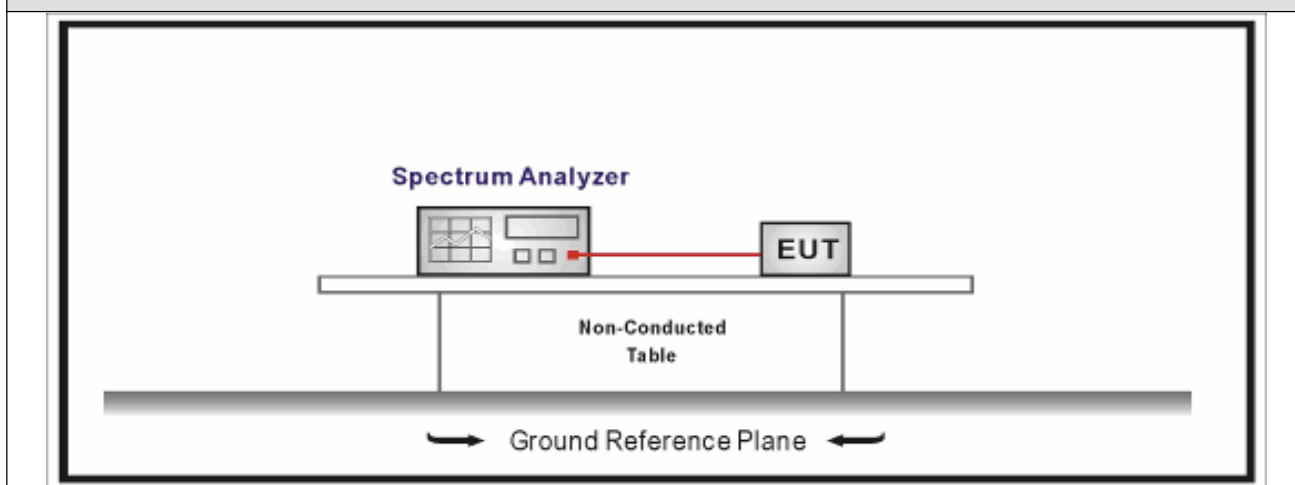




5.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).	

5.4. Test Procedure

Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☒	ANSI C63.10	11.11.2	Reference level measurement
	☒	ANSI C63.10	11.11.3	Emission level measurement
☐	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☐	ANSI C63.10	11.12.1	Radiated emission measurements
	☐	ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☐	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☒	ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		☒	ANSI C63.10	Peak power measurement procedure
		☐	ANSI C63.10	Average power measurement procedures
		☐	ANSI C63.10	11.12.2.5.1 Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2 Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☐	ANSI C63.10	11.12.2.5.3 Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

5.5. EUT test Axis definition

Item	Emissions in non-restricted frequency bands			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


5.6. Test Result

Product Name	: Rylo	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2018.08.16	Test Engineer	: Simon

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	0.182	2400.00	-43.734	43.916	>20	Pass
1	39	2480	0.449	2500.00	-43.181	43.630	>20	Pass

Note: The worst case of Emissions in non-restricted frequency bands as below:

Mode 1 CH39 (2480MHz)

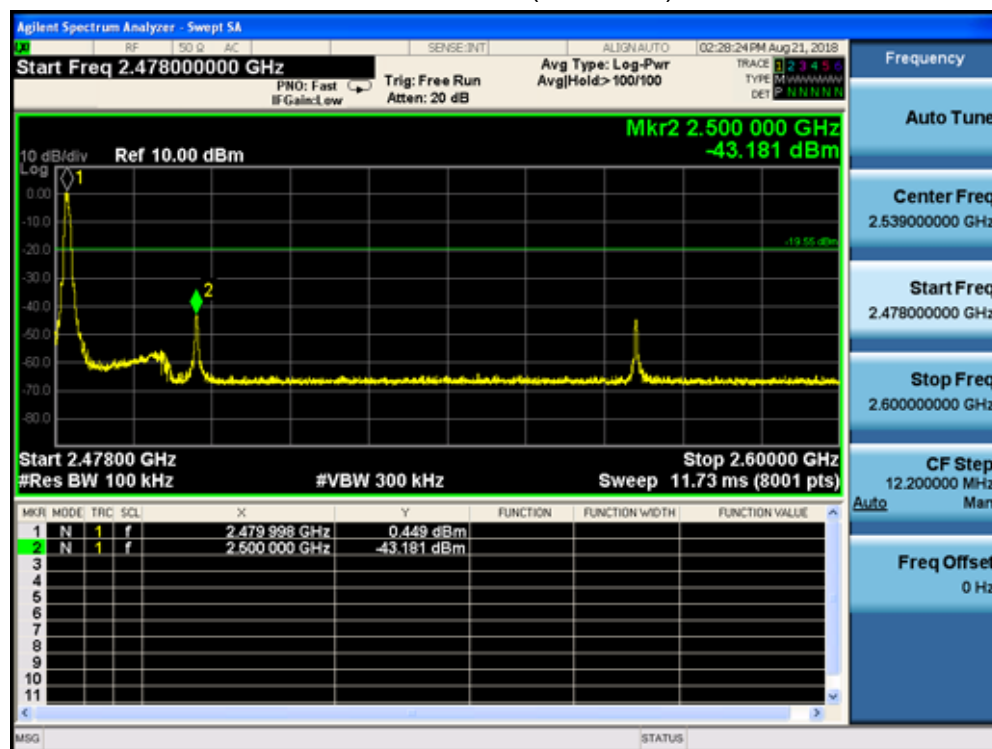


6. Radiated Emission Band Edge

6.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2018.07.16	2019.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2018.05.03	2019.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2018.07.12	2019.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.09.18	2018.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.02.28	2019.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.02.28	2019.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.05	2019.01.04

6.2. Test Setup

Above 1GHz Test Setup:

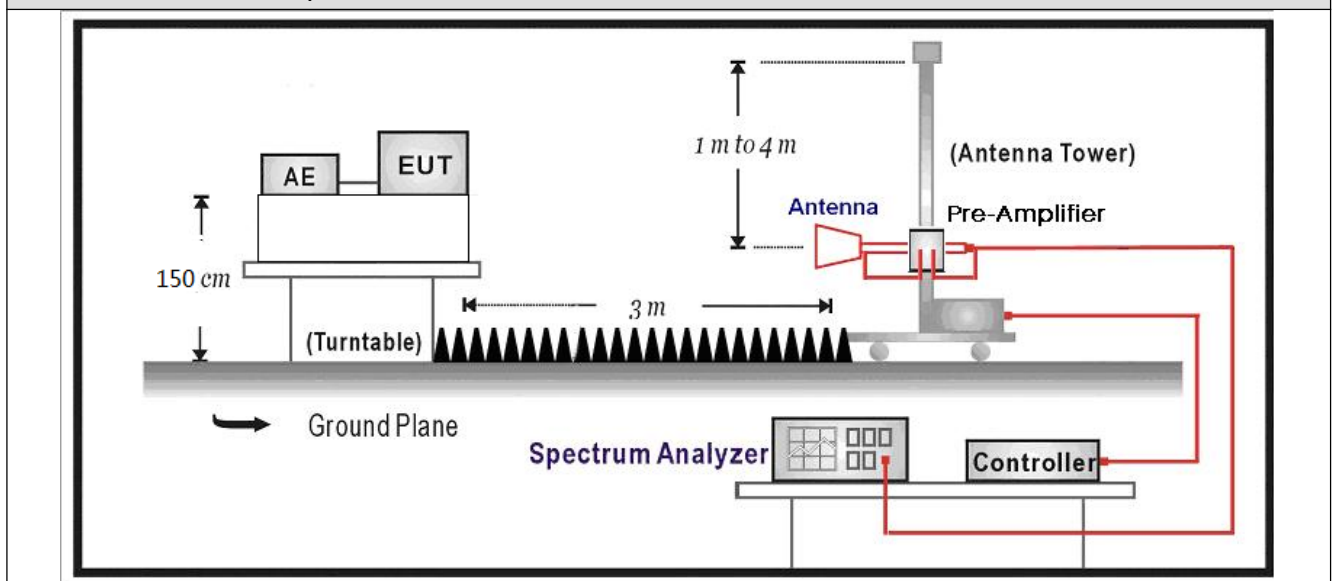

6.3. Limit

Band edge Limit




Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

6.4. Test Procedure

Test Method					
	References Rule			Chapter	Description
☒	ANSI C63.10			6.10	Band-edge testing
	☒	ANSI C63.10		6.10.5	Restricted-band band-edge measurements
	☐	ANSI C63.10		6.10.6	Marker-delta method
☒	ANSI C63.10			11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10		11.12.1	Radiated emission measurements
	☒	ANSI C63.10		11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10			6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10			6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10			6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
		☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure
		☒	ANSI C63.10	11.12.2.5	Average power measurement procedures
		☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		☒	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


6.5. EUT test definition

Item	Radiated Emission Band Edge			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

6.6. Duty Cycle


Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (Hz)	Tx On + Tx Off (ms)	Duty Cycle
BLE	0.13	0.494	8.2KHz	0.624	20.83%

BLE

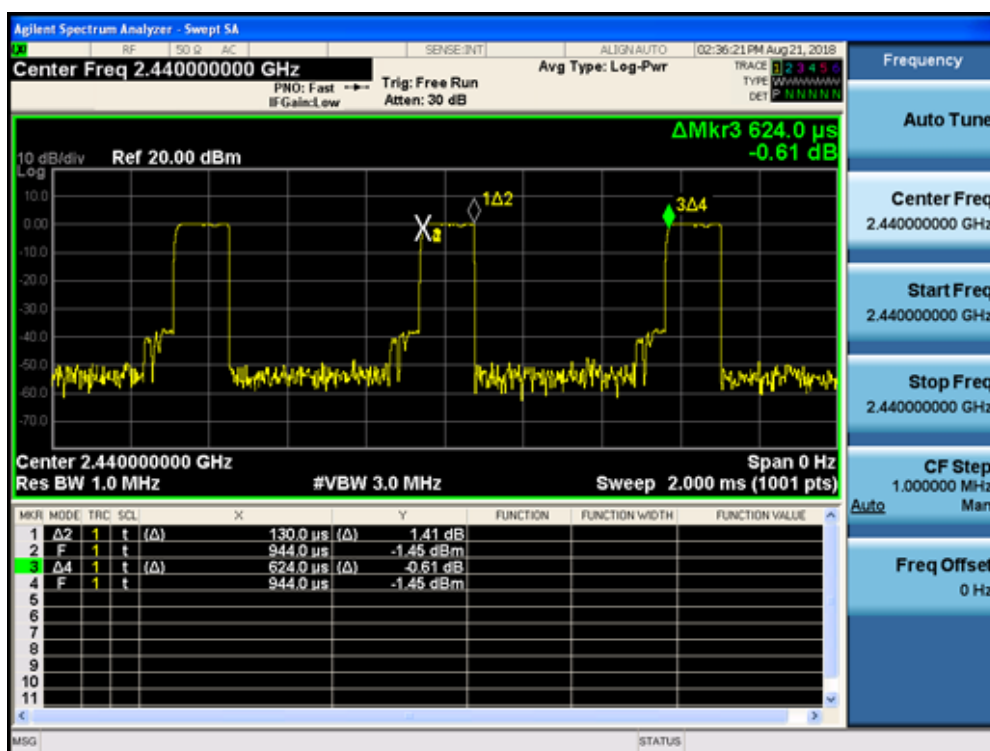


6.7 Test Result

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 07:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

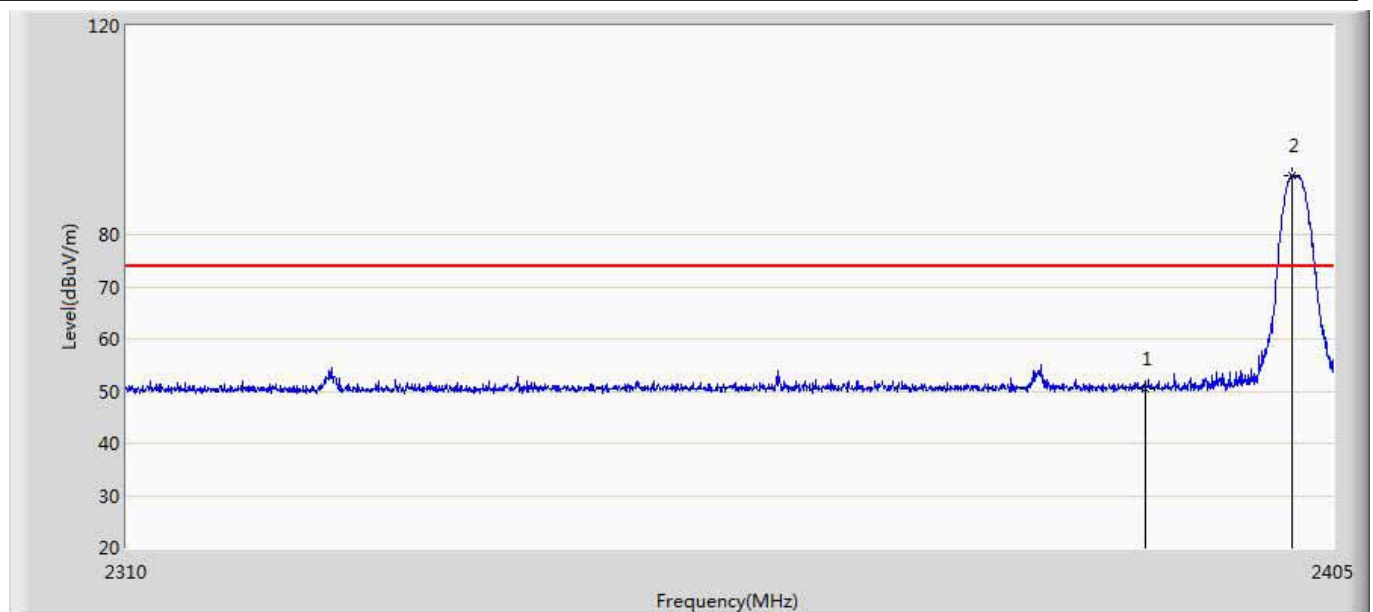


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.489	14.807	-23.511	74.000	35.682	PK
2	*	2401.770	91.307	55.595	N/A	N/A	35.712	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 07:40
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

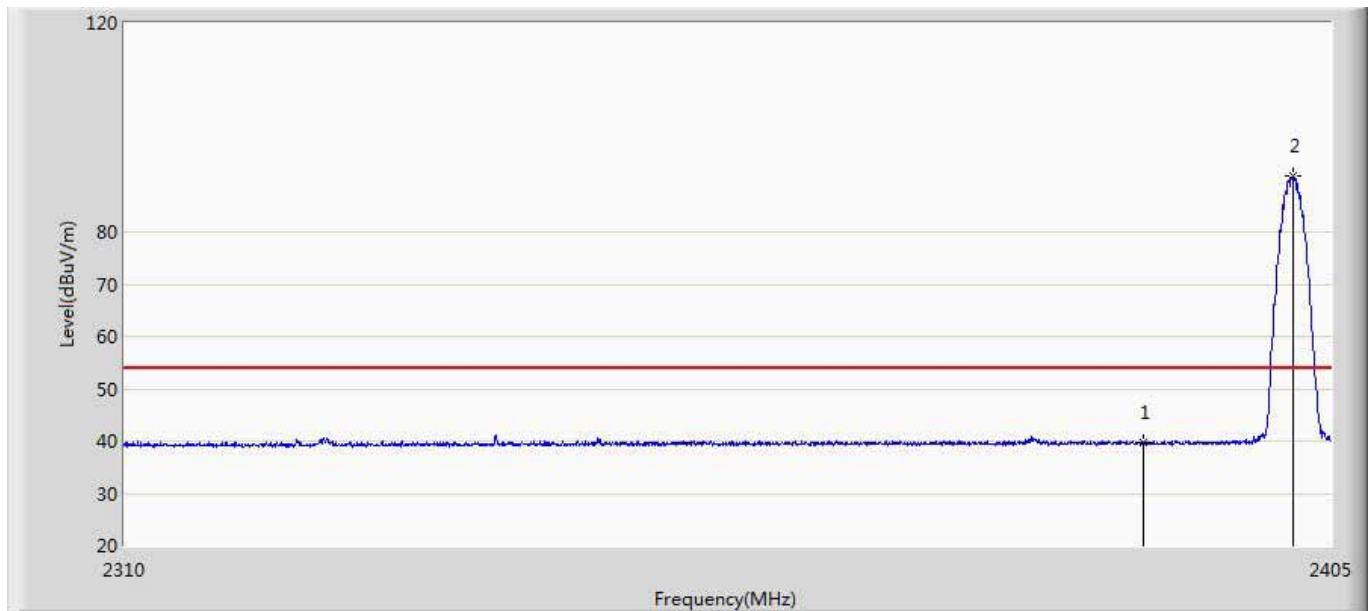


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	39.657	3.975	-14.343	54.000	35.682	AV
2	*	2401.913	90.658	54.946	N/A	N/A	35.712	AV

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 07:44
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

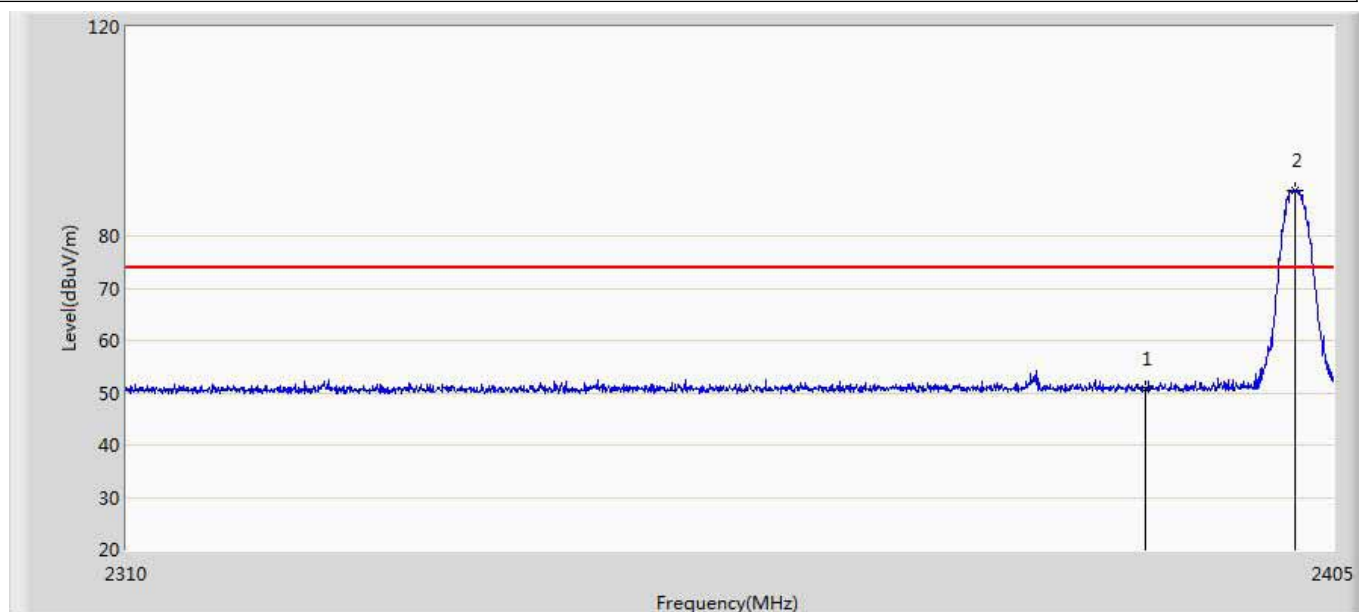


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.804	15.122	-23.196	74.000	35.682	PK
2	*	2401.913	88.797	53.085	N/A	N/A	35.712	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 07:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by BLE	

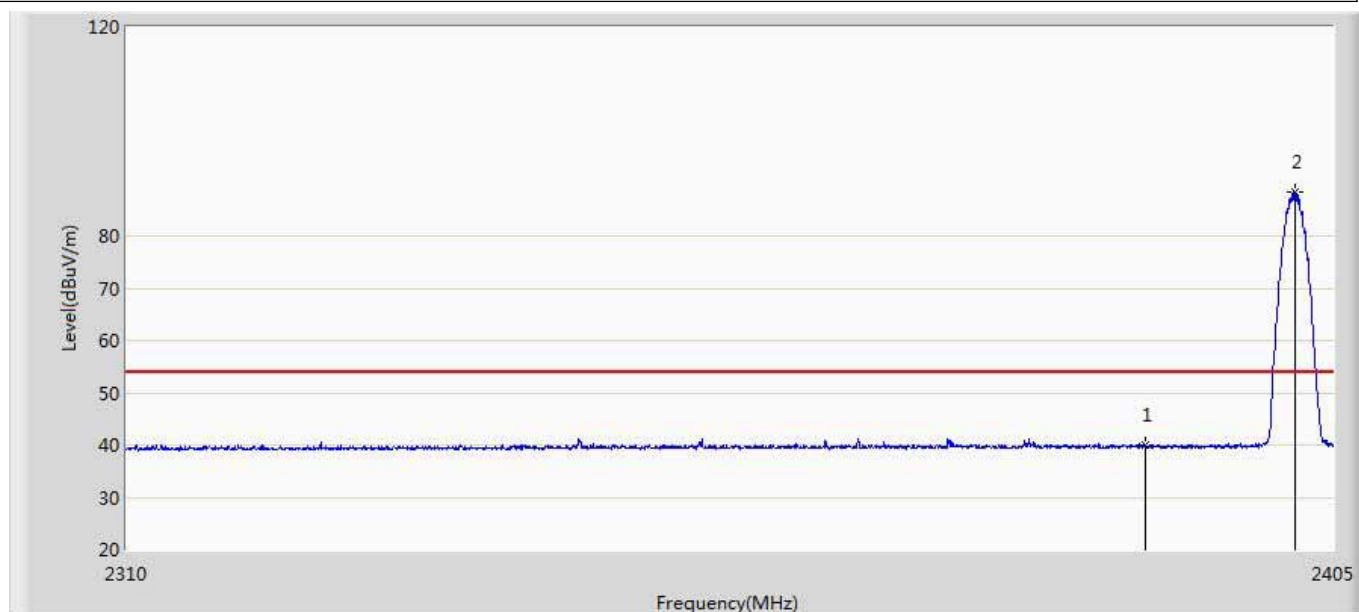


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	39.975	4.293	-14.025	54.000	35.682	AV
2	*	2401.913	88.292	52.580	N/A	N/A	35.712	AV

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 07:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

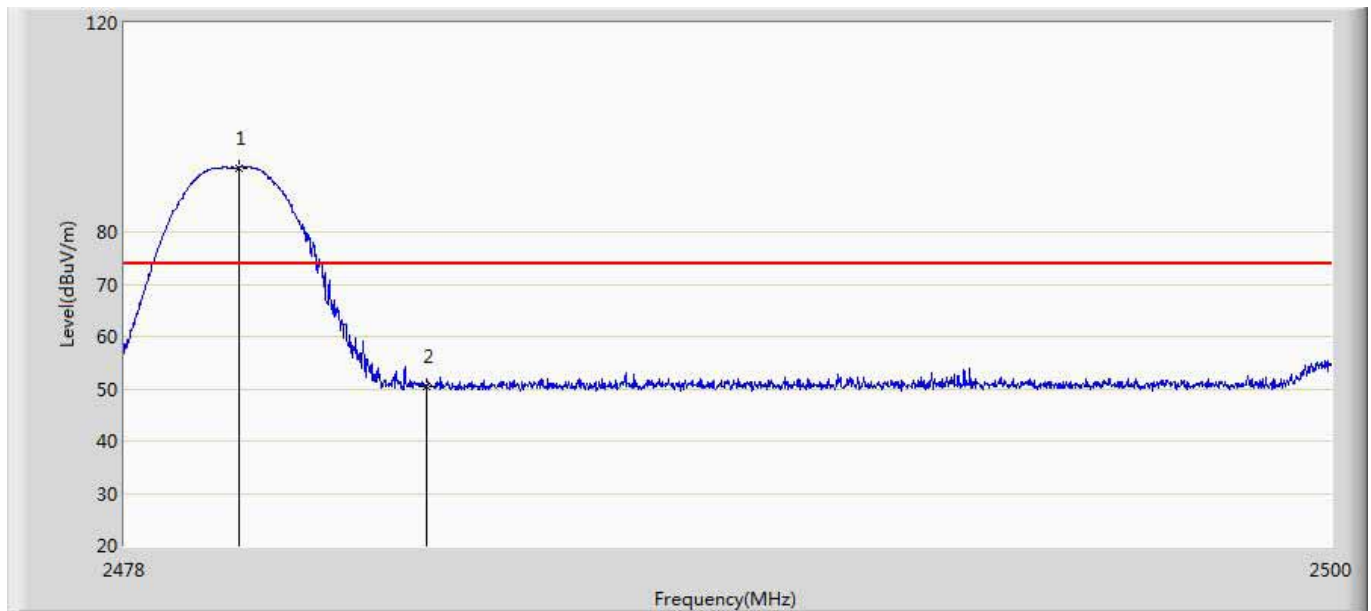


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.079	92.280	56.413	N/A	N/A	35.867	PK
2		2483.500	50.552	14.660	-23.448	74.000	35.891	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 07:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

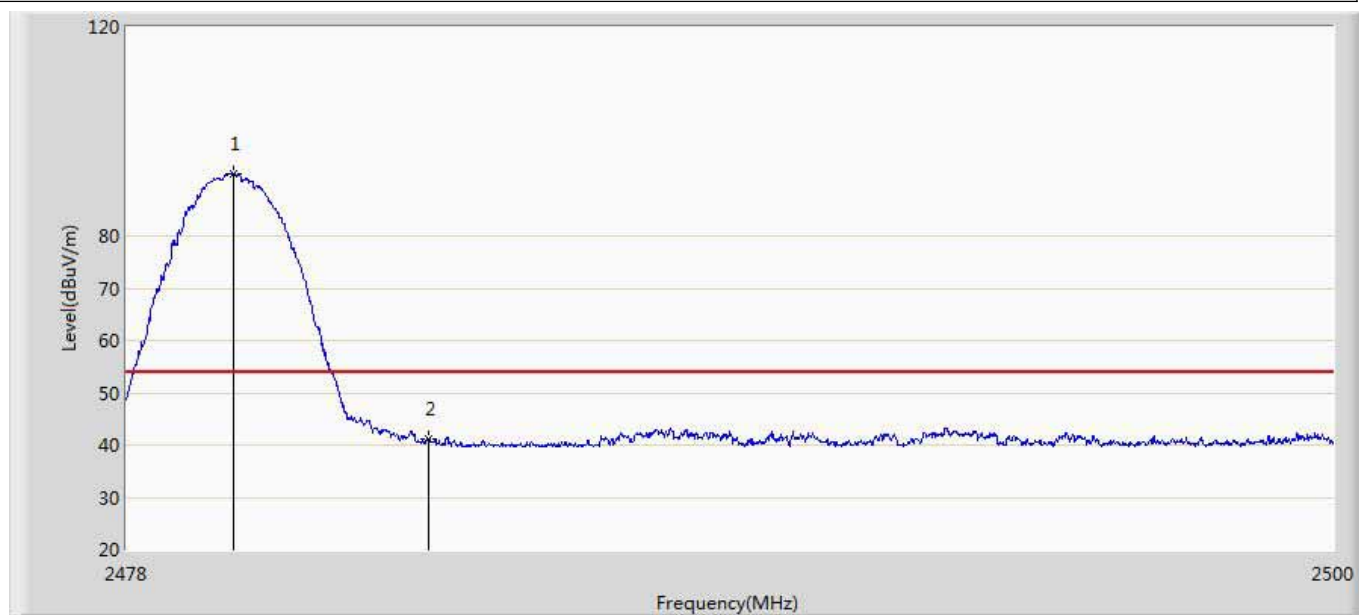


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.947	91.847	55.981	N/A	N/A	35.866	AV
2		2483.500	41.109	5.217	-12.891	54.000	35.891	AV

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:07
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

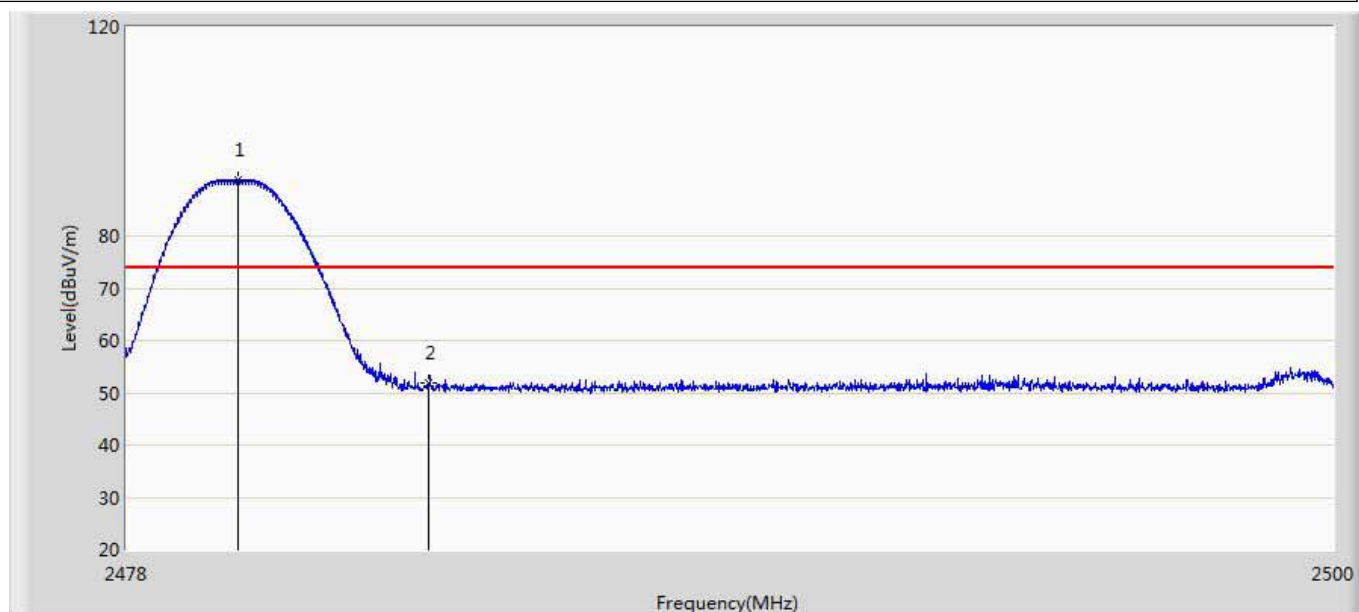

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.024	90.719	54.852	N/A	N/A	35.866	PK
2		2483.500	51.923	16.031	-22.077	74.000	35.891	PK

Engineer: Simon	
Site: AC5	Time: 2018/08/21 - 08:09
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: Rylo	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by BLE	

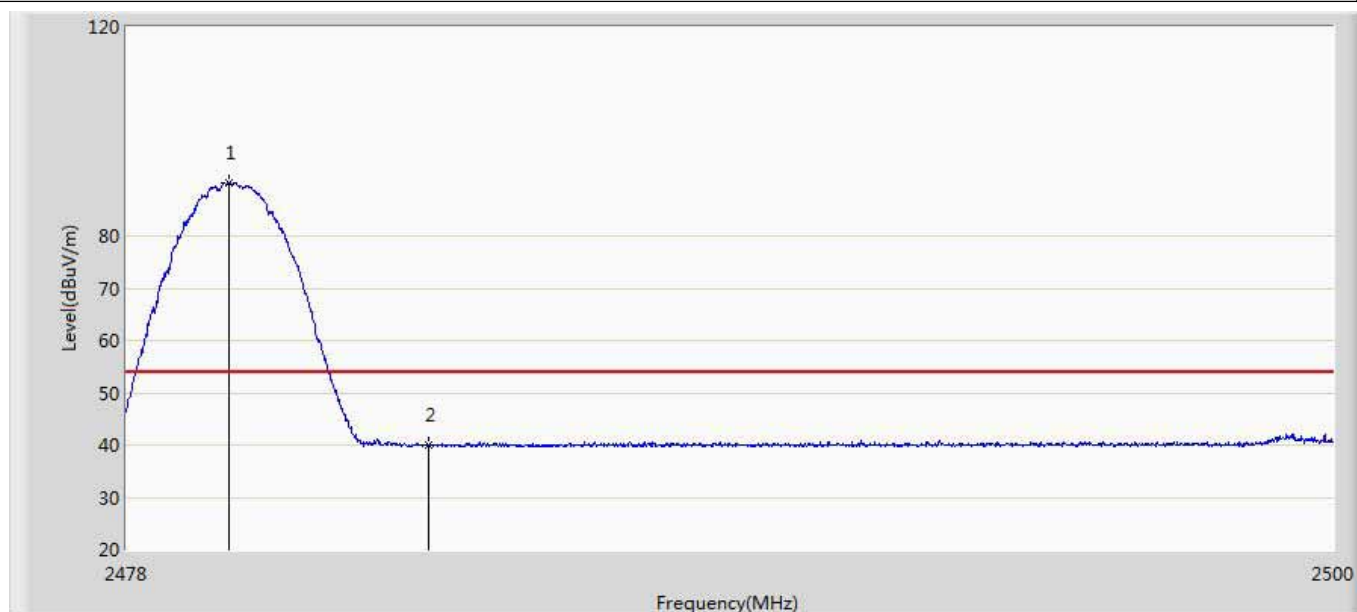

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.870	90.241	54.376	N/A	N/A	35.865	AV
2		2483.500	40.014	4.122	-13.986	54.000	35.891	AV


7. Occupied Bandwidth

7.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

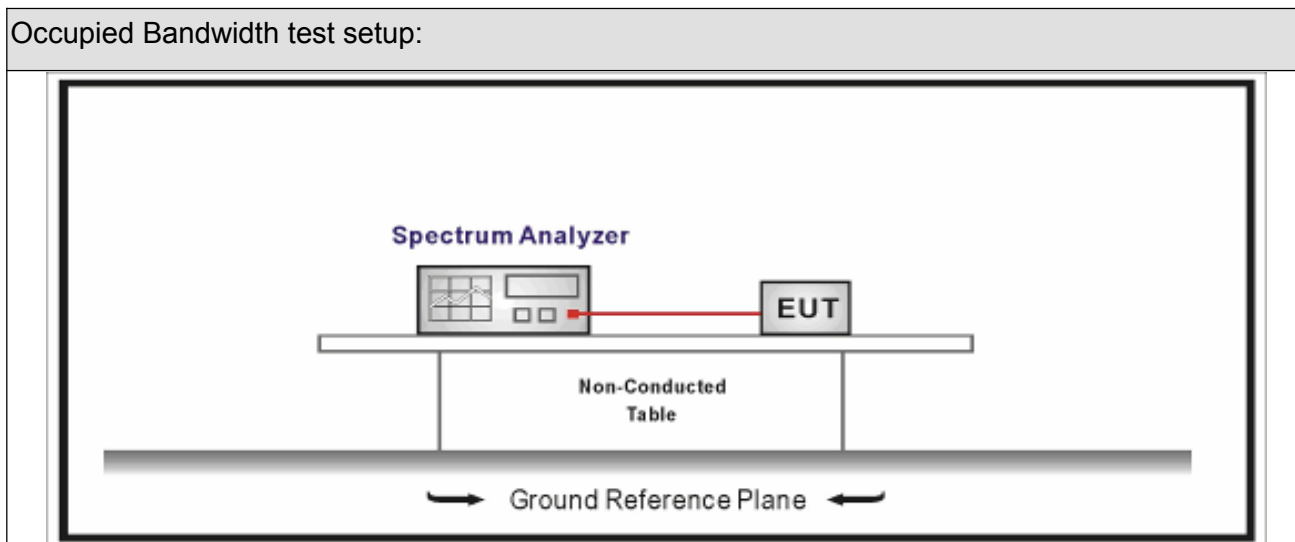

7.3. Limit





Occupied Bandwidth

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

7.4. Test Procedure

Test Method				
	Reference Rule		Chapter	Description
☒	ANSI C63.10		11.8	DTS bandwidth
	☐	ANSI C63.10	11.8.1	Option 1
	☒	ANSI C63.10	11.8.2	Option 2

7.5. EUT test definition

Item	Occupied Bandwidth			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


7.6. Test Result

Product Name	: Rylo	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2018.08.21	Test Engineer	: Simon

Mode	CH.	Test Freq. (MHz)	6dB Occupied Bandwidth (kHz)	Limit (kHz)	Result
1	00	2402	625.9	>500	Pass
1	19	2440	618.5	>500	Pass
1	39	2480	599.2	>500	Pass

Note : The worst case of Occupied Bandwidth as below:

Mode 1 CH39 (2480MHz)

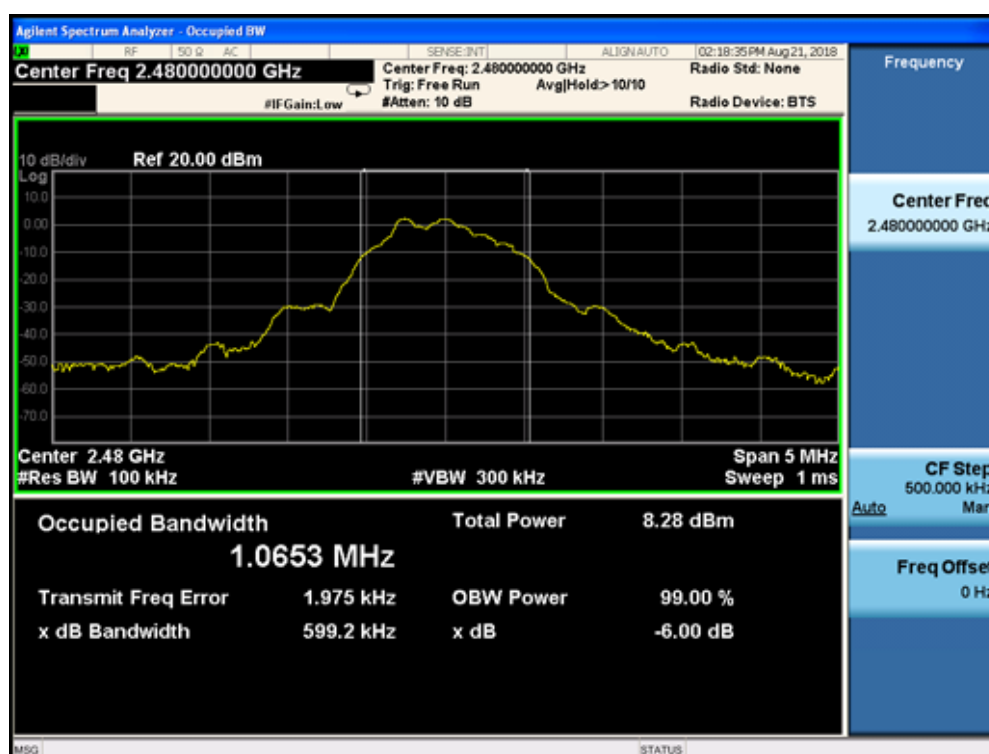


8. Fundamental emission output power

8.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2018.01.04	2019.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.01.04	2019.01.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2017.10.14	2018.10.13
Power Sensor	Anritsu	MA2411B	0846014	2017.10.14	2018.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2017.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

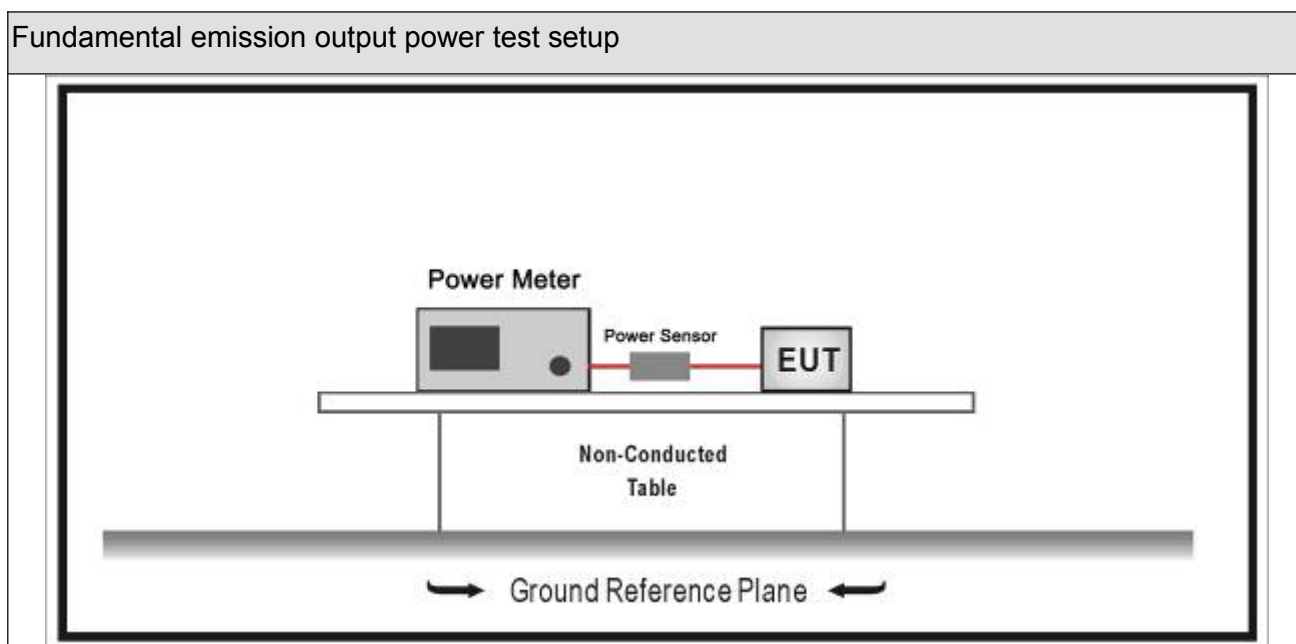




8.3. Limit

Fundamental emission output power Limit			
☒	$G_{TX} < 6\text{dBi}$		$P_{out} \leq 30\text{dBm}$
☐	$G_{TX} > 6\text{dBi}$		
	☐	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
	☐	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
	☐	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
	☐	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : G_{TX} directional gain of transmitting antennas.			
Note 2 : P_{out} is maximum peak conducted output power .			

8.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☒	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10	11.9.1.2	Integrated band power method	
		☒	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle ≥ 98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle ≥ 98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle ≤ 98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle ≤ 98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			☐	ANSI C63.10	11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

8.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

8.6. Test Result

Product Name	:	Rylo	Power	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2018.08.16	Test Engineer	:	Simon


Mode	Channel	Test Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
1	00	2402	2.68	30	Pass
1	19	2440	2.54	30	Pass
1	39	2480	2.39	30	Pass

9. Power Spectral Density

9.1. Test Equipment

Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09
Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

9.2. Test Setup

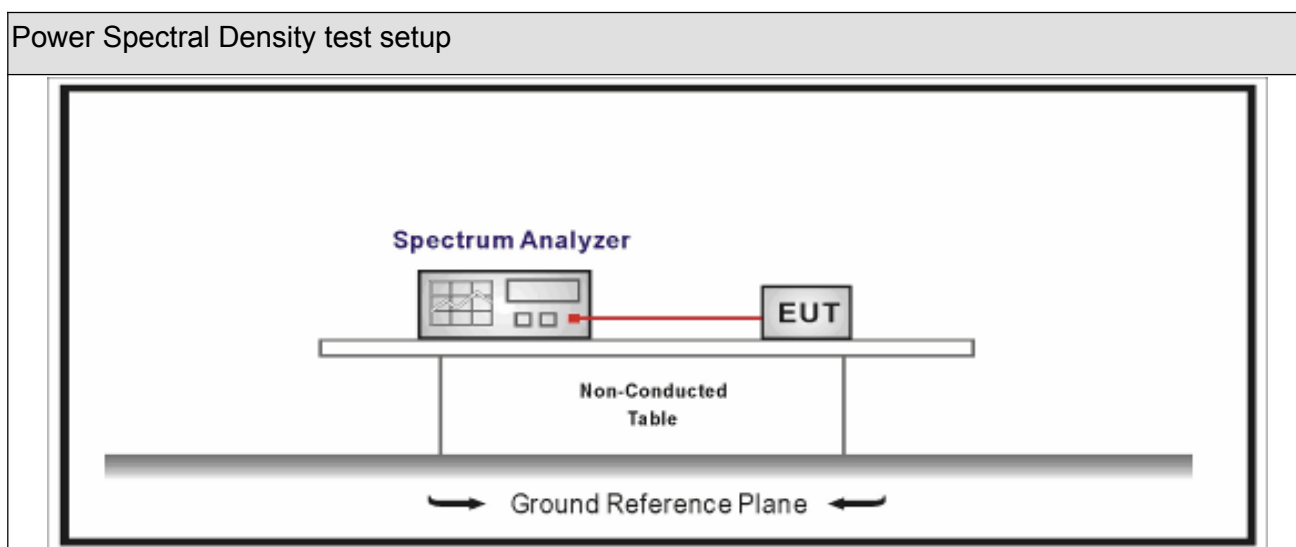




9.3. Limit

Power Spectral Density Limit
Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

9.4. Test Procedure

Power Spectral Density Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

9.5. EUT test definition

Item	Power Spectral Density Test Method			
Device Category	☐	Fixed point-to-point		
	☐	Emit multiple directional beams, simultaneously or sequentially		
	☒	Other cases		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

9.6. Test Result

Product Name	: Rylo	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2018.08.21	Test Engineer	: Simon

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
1	00	2402	-12.010	-12.010	8	Pass
1	19	2440	-11.744	-11.744	8	Pass
1	39	2480	-10.685	-10.685	8	Pass

Note : The worst case of Power Spectral Density as below:

Mode 1 CH39(2480MHz)



10. Antenna Requirement

10.1. Limit

Antenna Requirement Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

10.2. Antenna Connector Construction

Antenna Connector Construction

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

_____ The End _____