



RF TEST REPORT



Report No.: FCC IC_SL16110301-SFE-061-BLE-Dimmer
Supersede Report No.: None

Applicant	:	Deako Inc.
Product Name	:	Smart Dimmer
Model No.	:	DS0002
Test Standard	:	47 CFR 15.247 RSS 247 Iss 1: May 2015
Test Method	:	ANSI C63.10: 2013 RSS Gen Iss 4: Nov 2014 558074 D01 DTS Meas Guidance v03r05
FCC ID	:	2AK29-DS0002
IC ID	:	22393-DS0002
Dates of test	:	01/26/2017 – 01/31/2017
Issue Date	:	02/06/2017
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification [X] Equipment did not comply with the specification []		

This Test Report is Issued Under the Authority of:

	
Rachana Khanduri	Chen Ge
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Spec for BT Radio	6
6.3	EUT test modes/configuration Description.....	6
6.4	EUT Photos - External	7
6.5	EUT Photos - Internal	9
6.6	EUT Test Setup Photos	10
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	11
7.1	Supporting Equipment	11
7.2	Cabling Description	11
7.3	Test Software Description	11
8	TEST SUMMARY	12
9	MEASUREMENT UNCERTAINTY	13
9.1	Conducted Emissions	13
9.2	Radiated Emissions (30MHz to 1GHz).....	13
9.3	Radiated Emissions (1GHz to 40GHz).....	14
9.4	RF conducted measurement.....	14
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	15
10.1	Conducted Emissions.....	15
10.2	6dB & 99% Bandwidth	18
10.3	Output Power (Bluetooth LE).....	21
10.4	Band Edge	24
10.5	Peak Spectral Density	26
10.6	Radiated Spurious Emissions in restricted band.....	29
10.7	Radiated Spurious Emissions below 1GHz	31
10.8	Radiated Spurious Emissions between 1GHz – 25GHz	33
ANNEX A. TEST INSTRUMENT		35
ANNEX B. SIEMIC ACCREDITATION		36

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC IC_SL16110301-SFE-061-BLE-Dimmer	None	Original	02/06/2017

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Deako Inc.
Product: Smart Dimmer
Model: DS0002

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Deako Inc.
Applicant Address	:	4201 Roosevelt Way NE, Suite 100, Seattle, WA 98105
Manufacturer Name	:	Deako Inc.
Manufacturer Address	:	4201 Roosevelt Way NE, Suite 100, Seattle, WA 98105

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	:	Smart Dimmer
Model No.	:	DS0002
Trade Name	:	Smart Dimmer
Serial No.	:	N/A
Host Model No.	:	N/A
Input Power	:	120VAC/60Hz
Power Adapter Manu/Model	:	N/A
Power Adapter SN	:	N/A
Product Hardware version	:	1.0
Product Software version	:	1.0
Radio Hardware version	:	N/A
Radio Software version	:	N/A
Date of EUT received	:	01/09/2017
Equipment Class/ Category	:	DTS
Port/Connectors	:	None

6.2 Spec for BT Radio


Radio Type	Bluetooth
Operating Frequency	2402MHz-2480MHz
Modulation	GFSK (LE)
Channel Spacing	2MHz (LE)
Antenna Type	PCB (Inverted F)
Antenna Gain	5.8 dBi
Antenna Connector Type	U.FL connector


Type	Channel No.	Frequency (MHz)	Power Setting
Bluetooth(BLE) 2402-2480MHz	0	2402	7
	19	2440	7
	39	2480	7

6.3 EUT test modes/configuration Description


Mode	Note
Bluetooth	BLE (GFSK)

6.4 EUT Photos - External

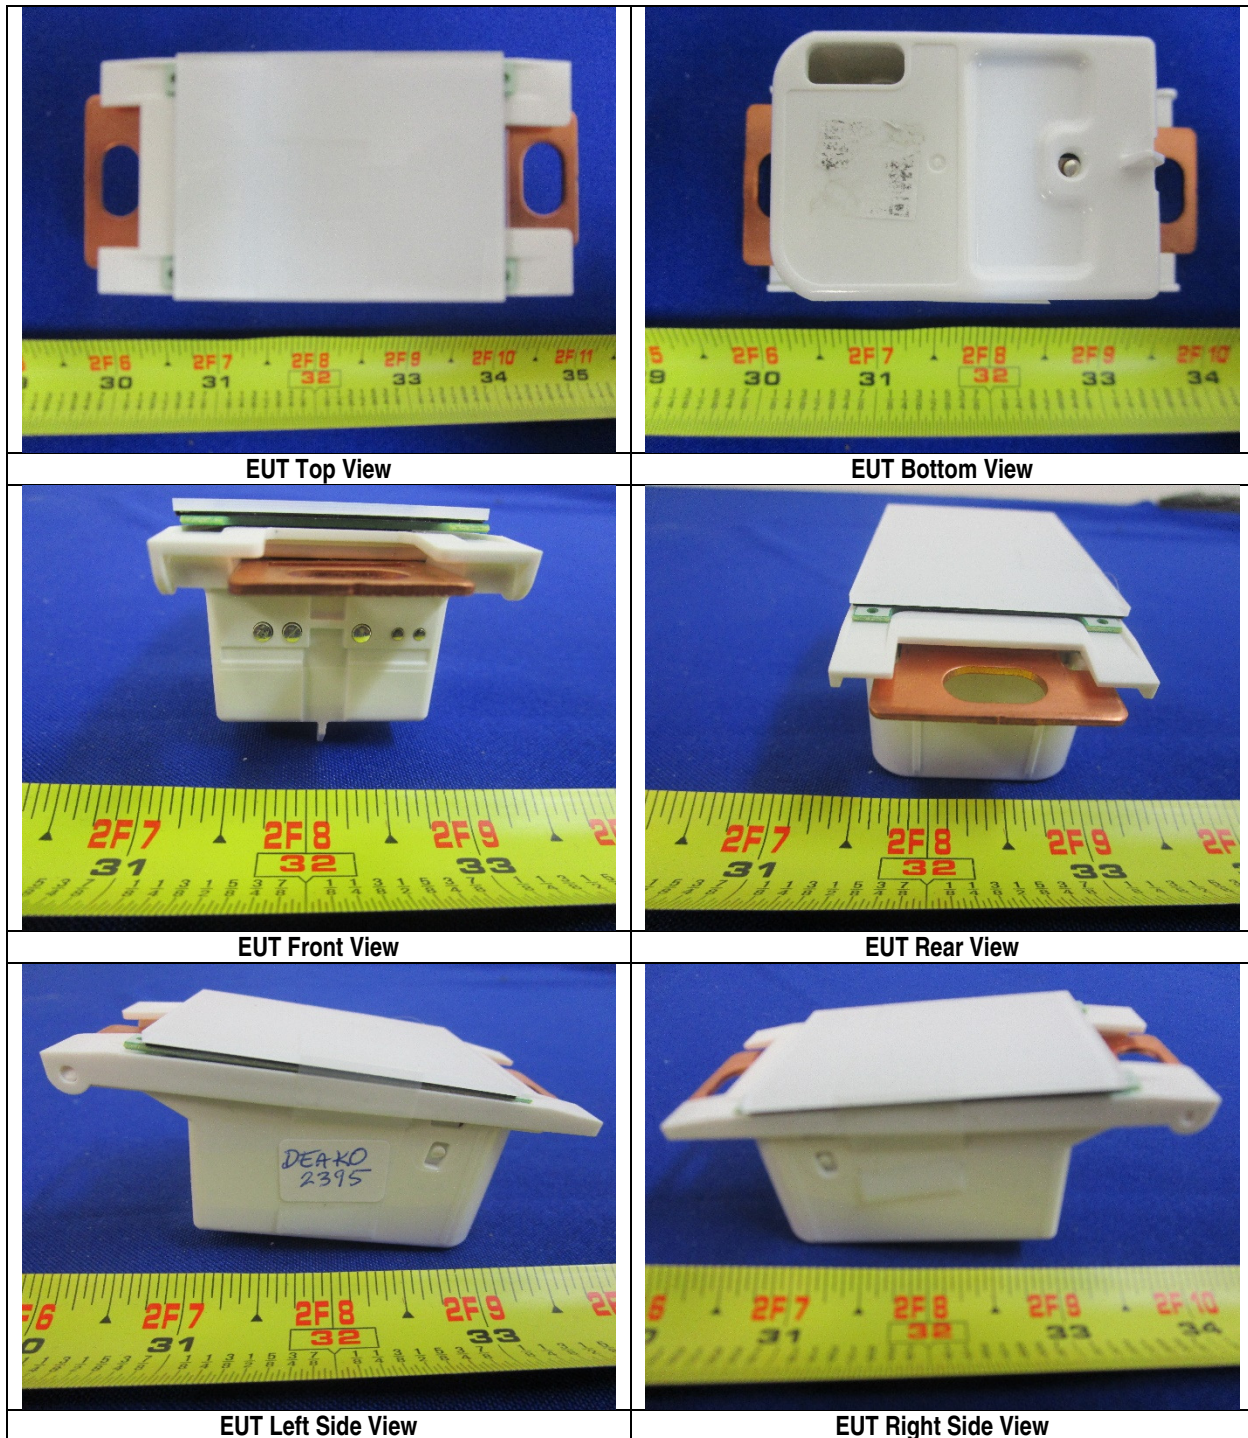


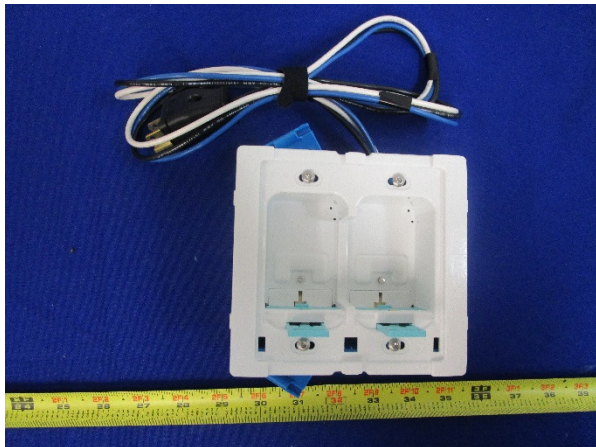


PS - Top View

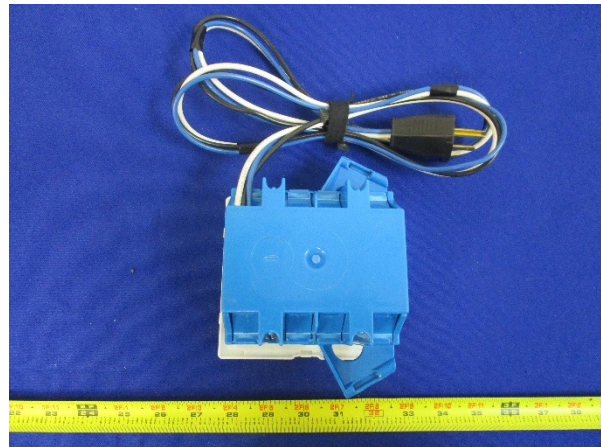

PS - Rear View

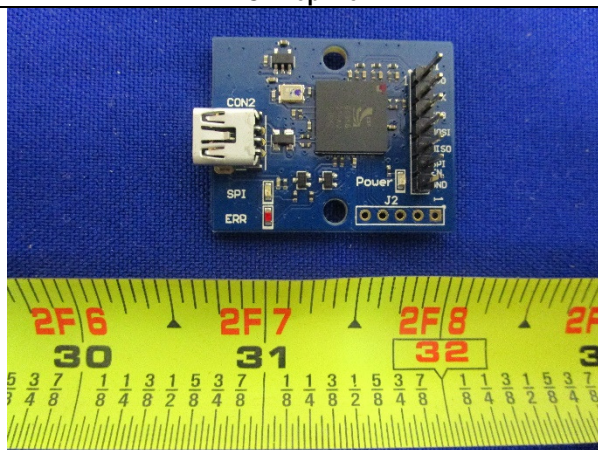


Supporting Equipment – Top View

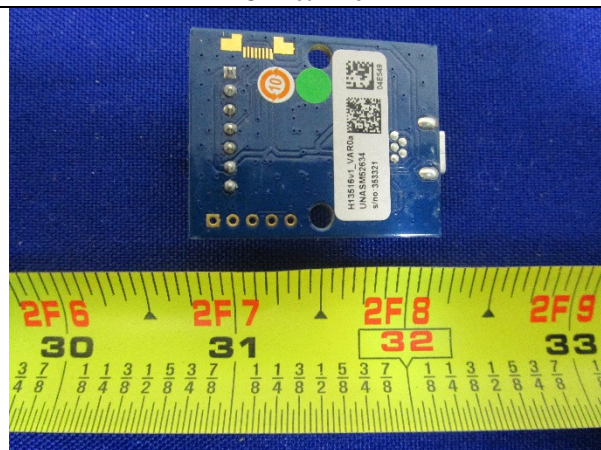


Supporting Equipment – Bottom View


6.5 EUT Photos - Internal

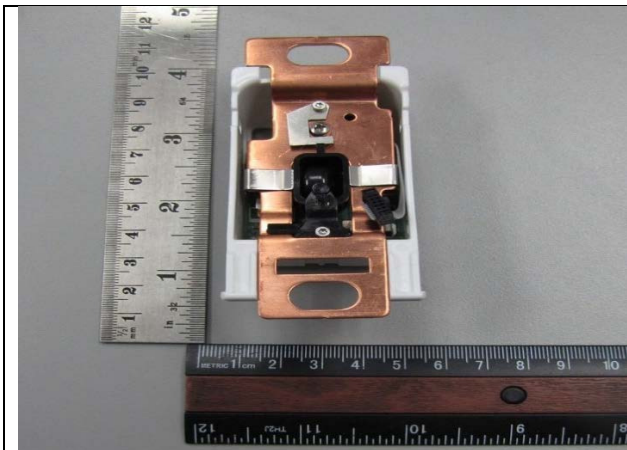


EUT Cover-off View 1

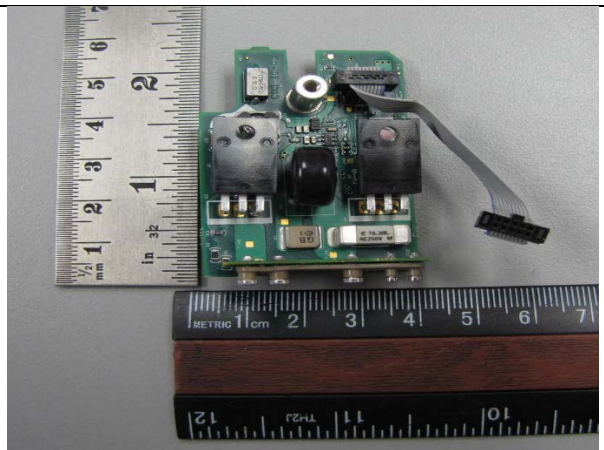

EUT Cover-off View 2

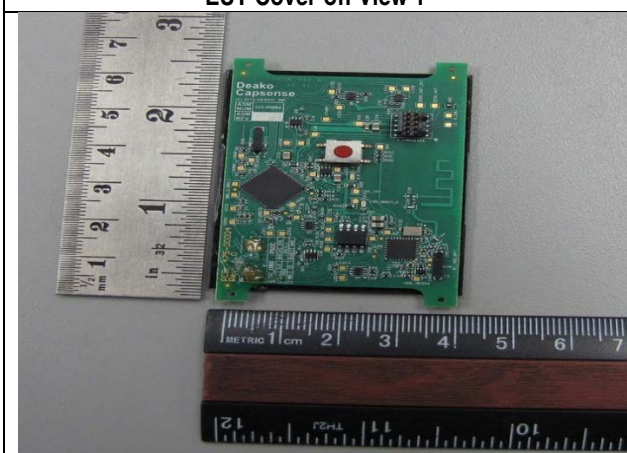


Main PCBA - Top View

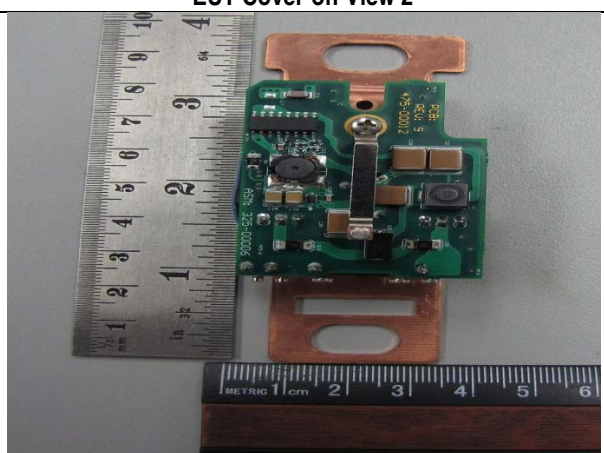


Main PCBA - Bottom View


6.6 EUT Test Setup Photos

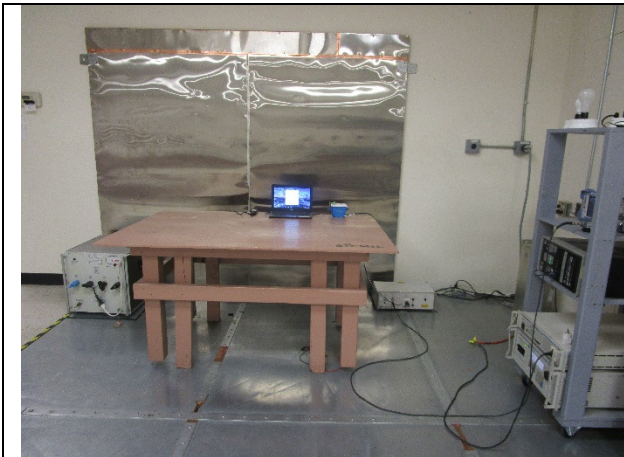

AC Line Conducted Emissions – POE – Front View

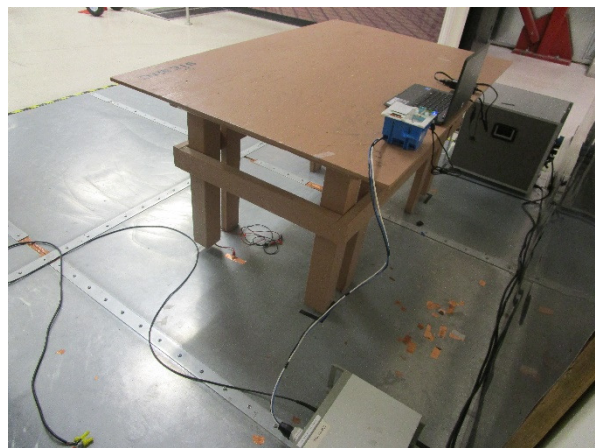


AC Line Conducted Emissions – POE – Rear View

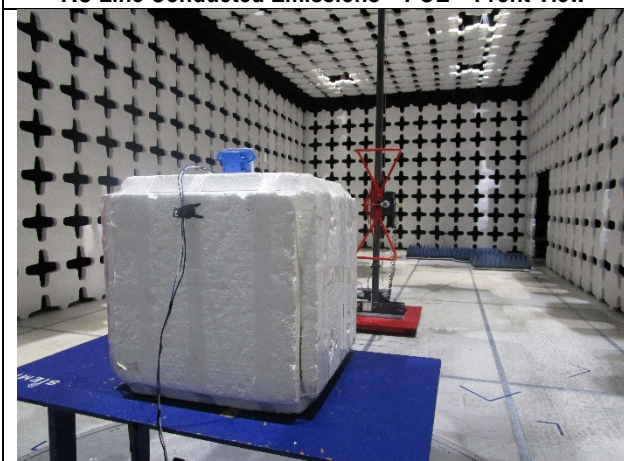


Radiated Emissions (<1GHz) – Front View



Radiated Emissions (<1GHz) – Rear View

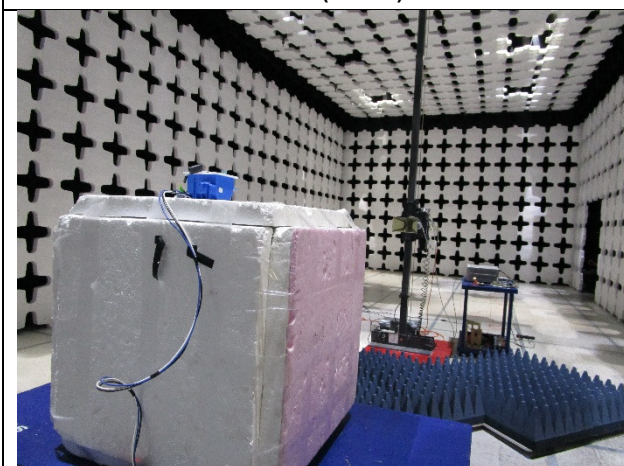

Radiated Emissions (>1GHz) – Front View

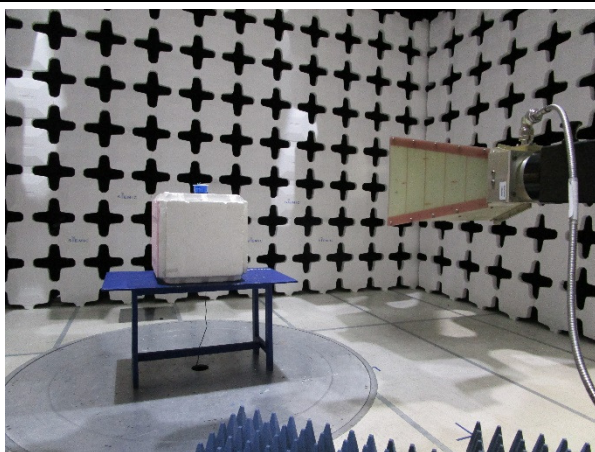

Radiated Emissions (>1GHz) – Rear View

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	N15V1	53504653823	Acer	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	USB	EUT	USB	Laptop	USB	1	Unshielded

7.3 Test Software Description

Test Item	Software	Description
RF Testing	uEnergy Test	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 8.10	IC	558074 D01 DTS Meas Guidance v03r05	<input type="checkbox"/> N/A
AC Conducted Emissions	FCC	15.207(a)	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 8.8	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> N/A

DTS Band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
99% Occupied Bandwidth	-	-	-	-	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 6.6	IC	RSS Gen Issue 4: 2014 -	<input type="checkbox"/> N/A
6dB Bandwidth	FCC	15.247(a)(2)	FCC	558074 D01 DTS Meas Guidance v03r05	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.1)	IC		<input type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	ANSI C63.10:2013	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.5)	IC	558074 D01 DTS Meas Guidance v03r05	<input type="checkbox"/> N/A
Output Power	FCC	15.247(b)	FCC	558074 D01 DTS Meas Guidance v03r05	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.4.4)	IC		<input type="checkbox"/> N/A
Receiver Spurious Emissions	IC	RSS Gen (4.8)	IC	RSS Gen Issue 4: 2014	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Antenna Gain > 6 dBi	FCC	15.247(e)	FCC	-	<input type="checkbox"/> Pass
	IC	-	IC	-	<input checked="" type="checkbox"/> N/A
Power Spectral Density	FCC	15.247(e)	FCC	558074 D01 DTS Meas Guidance v03r05	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.2)	IC		<input type="checkbox"/> N/A
RF Exposure requirement	FCC	15.247(i)	FCC	-	<input type="checkbox"/> Pass
	IC	RSS Gen(5.5)	IC	RSS Gen Issue 4: 2014	<input checked="" type="checkbox"/> N/A
Remark	1. All measurement uncertainties do not take into consideration for all presented test results. 2. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.				

9 Measurement Uncertainty

9.1 Conducted Emissions

The test is to measure the conducted emissions to the mains port of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the LISN
- Uncertainty of cables
- Uncertainty due to the mismatches
- Etc, see the below table for details

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
LISN Insertion Loss	0.40	Normal	2	1	0.20
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch LISN - Receiver	0.25	U-Shape	1.414	1	0.1768033
LISN Impedance	2.5	Triangular	2.449	1	1.0208248
Combined Standard Uncertainty					1.928133
Expanded Uncertainty (K=2)					3.856266

The total derived measurement uncertainty is +/- 3.86 dB.

9.2 Radiated Emissions (30MHz to 1GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- NSA Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Filter Insertion Loss	0.25	Normal	2	1	0.125
Antenna Factor	0.65	Normal	2	1	0.325
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.86605081
PRF Response	1.5	Rectangular	1.732	1	0.86605081
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
NSA Calibration	4.0	U-Shape	1.414	1	2.8288543
Combined Standard Uncertainty					3.0059131
Expanded Uncertainty (K=2)					6.0118262

The total derived measurement uncertainty is +/- 6.00 dB.

9.3 Radiated Emissions (1GHz to 40GHz)

The test is to measure the radiated emissions of the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the receiver
- Uncertainty of the antenna
- Uncertainty of cables
- Uncertainty due to the mismatches
- VSWR Calibration
- Etc., details see the below table

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Receiver Reading	0.12	Rectangular	1.732	1	0.0692840
Cable Insertion Loss	0.21	Normal	2	1	0.1050000
Filter Insertion Loss	0.25	Normal	2	1	0.1250000
Antenna Factor	0.65	Normal	2	1	0.3250000
Receiver CW accuracy	0.5	Rectangular	1.732	1	0.2886836
Pulse Amplitude Response	1.5	Rectangular	1.732	1	0.8660508
PRF Response	1.5	Rectangular	1.732	1	0.8660508
Mismatch Filter - Receiver	0.25	U-Shape	1.414	1	0.1768033
VSWR Calibration	2.0	U-Shape	1.414	1	1.4144272
Combined Standard Uncertainty					4.2363
Expanded Uncertainty (K=2)					8.4726

The total derived measurement uncertainty is +/- 8.47 dB.

9.4 RF conducted measurement

The test is to measure the RF output power from the EUT.

Some error sources that can contribute to the total uncertainty:

- Uncertainty of the Reference Level Uncertainty
- Uncertainty of variable attenuators
- Uncertainty of cables
- Uncertainty due to the mismatches

Source of Uncertainty	Value (dB)	Probability Distribution	Division	Sensitivity Coefficient	Expanded Uncertainty
Reference Level	0.12	Rectangular	1.732	1	0.069284
Cable Insertion Loss	0.21	Normal	2	1	0.105
Attenuator	0.25	Normal	2	1	0.125
Mismatch	0.25	U-Shape	1.414	1	0.1768033
Combined Standard Uncertainty					0.476087
Expanded Uncertainty (K=2)					0.952174


The total derived measurement uncertainty is +/- 0.95 dB.

10 Measurements, Examination and Derived Results

10.1 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

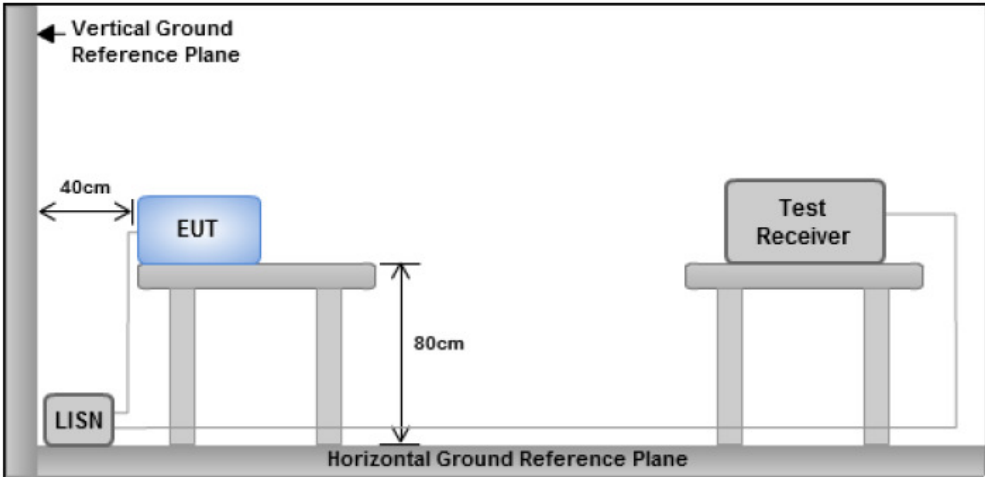Spec	Item	Requirement	Applicable
RSS247(A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	<input checked="" type="checkbox"/>
Test Setup		 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>	
Procedure		<ul style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. All other supporting equipment was powered separately from another main supply. 	
Remark		EUT was tested at 120VAC, 60Hz	
Result		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Rachana Khanduri at Conducted Emission test site.

Conducted Emission Test Results

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	45		
	Atmospheric(mbar):	1021		
Mains Power:	120VAC, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	01/27/2017			
Remarks	conducted @ Line			

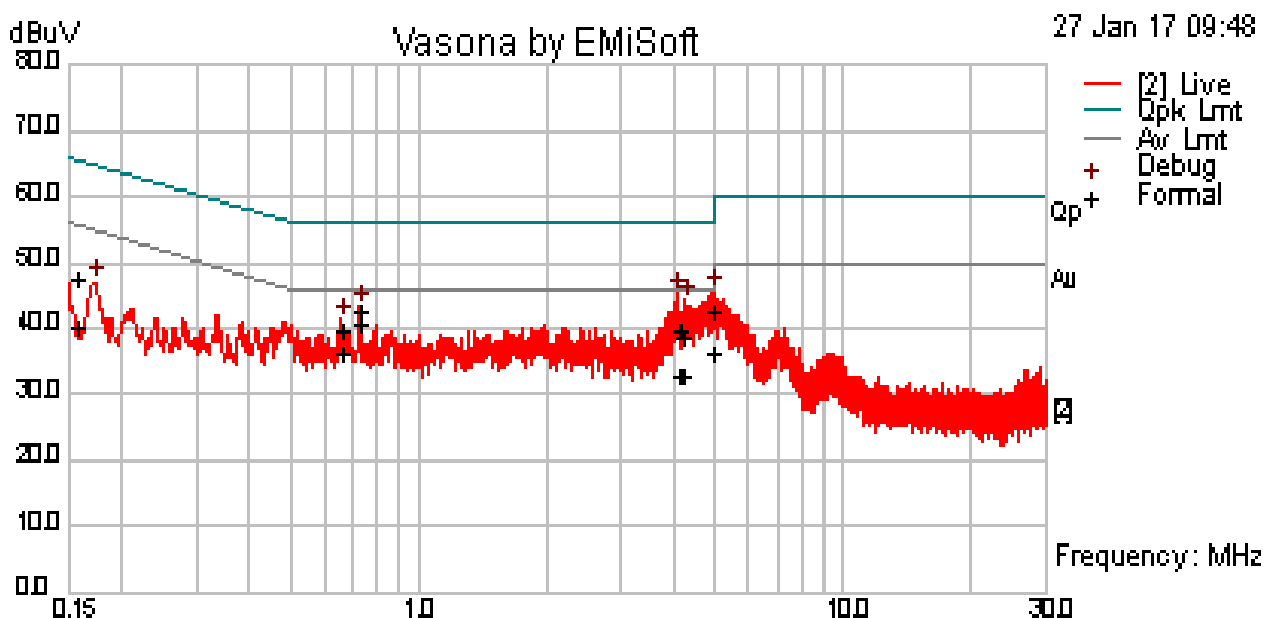


Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
4.95	32.10	10.04	0.51	42.64	Quasi Peak	Live	56.00	-13.36	Pass
4.10	29.11	10.03	0.50	39.65	Quasi Peak	Live	56.00	-16.35	Pass
4.23	28.36	10.03	0.50	38.89	Quasi Peak	Live	56.00	-17.11	Pass
0.73	32.29	10.01	0.56	42.86	Quasi Peak	Live	56.00	-13.14	Pass
0.66	29.15	10.01	0.57	39.74	Quasi Peak	Live	56.00	-16.26	Pass
0.16	35.76	10.00	1.64	47.40	Quasi Peak	Live	65.58	-18.18	Pass
4.95	25.96	10.04	0.51	36.51	Average	Live	46.00	-9.49	Pass
4.10	22.30	10.03	0.50	32.83	Average	Live	46.00	-13.17	Pass
4.23	22.24	10.03	0.50	32.77	Average	Live	46.00	-13.23	Pass
0.73	30.34	10.01	0.56	40.91	Average	Live	46.00	-5.09	Pass
0.66	25.51	10.01	0.57	36.09	Average	Live	46.00	-9.91	Pass
0.16	28.61	10.00	1.64	40.26	Average	Live	55.58	-15.32	Pass

Conducted Emission Test Results

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	22	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	45		
	Atmospheric(mbar):	1021		
Mains Power:	120Vac, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	01/27/2017			
Remarks	conducted @ Neutral			

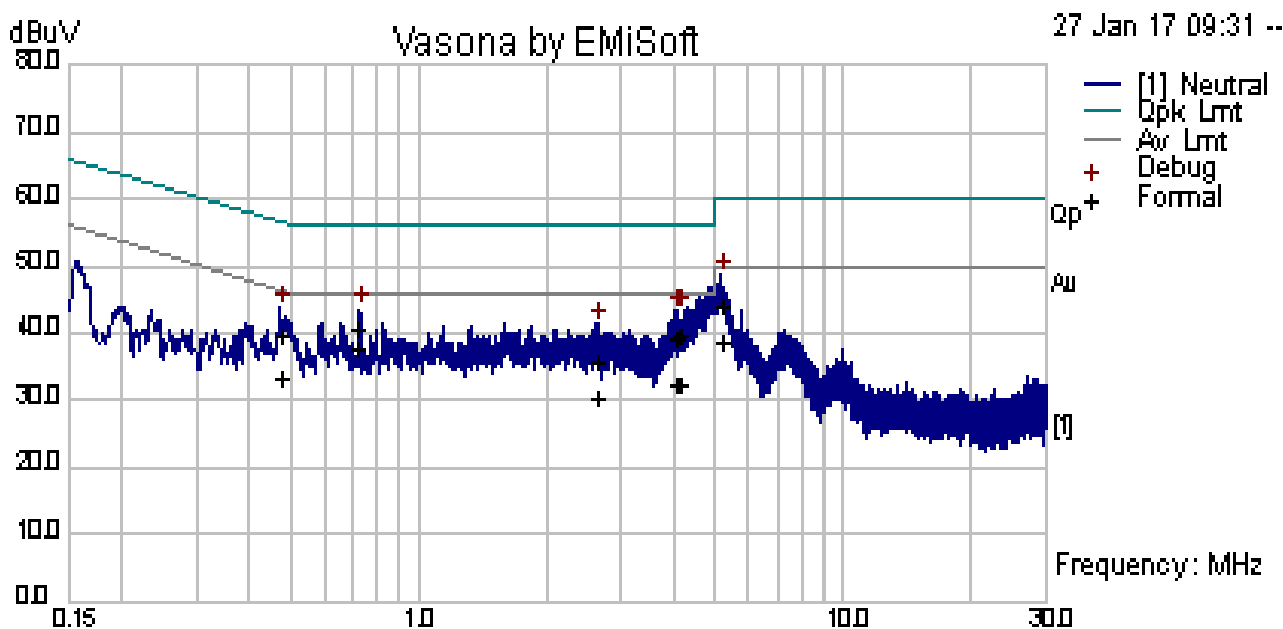


Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line / Neutral	Limit (dBuV)	Margin (dB)	Pass /Fail
5.17	33.37	10.04	0.51	43.91	Quasi Peak	Neutral	60.00	-16.09	Pass
0.72	29.97	10.01	0.56	40.54	Quasi Peak	Neutral	56.00	-15.46	Pass
4.06	28.57	10.03	0.50	39.11	Quasi Peak	Neutral	56.00	-16.89	Pass
0.48	28.95	10.01	0.65	39.60	Quasi Peak	Neutral	56.41	-16.80	Pass
4.10	28.98	10.03	0.50	39.52	Quasi Peak	Neutral	56.00	-16.48	Pass
2.66	25.52	10.03	0.50	36.05	Quasi Peak	Neutral	56.00	-19.95	Pass
5.17	27.97	10.04	0.51	38.52	Average	Neutral	50.00	-11.48	Pass
0.72	27.22	10.01	0.56	37.79	Average	Neutral	46.00	-8.21	Pass
4.06	21.76	10.03	0.50	32.29	Average	Neutral	46.00	-13.71	Pass
0.48	22.93	10.01	0.65	33.59	Average	Neutral	46.41	-12.82	Pass
4.10	22.07	10.03	0.50	32.60	Average	Neutral	46.00	-13.40	Pass
2.66	19.73	10.03	0.50	30.25	Average	Neutral	46.00	-15.75	Pass

10.2 6dB & 99% Bandwidth

Requirement(s):

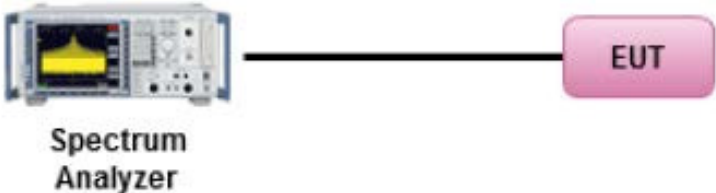Spec	Requirement	Applicable									
§ 15.247 RSS247 (5.2.1)	6dB BW≥500KHz;	<input checked="" type="checkbox"/>									
RSS Gen 4.6.1	The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth	<input checked="" type="checkbox"/>									
Test Setup											
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r05, 8.1 DTS bandwidth</p> <p><u>6dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> - Set RBW = 100 kHz. - Set the video bandwidth (VBW) ≥ 3 x RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. 										
Test Date	01/27/2017	<table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>23°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>42%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1021mbar</td> </tr> </table>	Environmental condition	Temperature	23°C		Relative Humidity	42%		Atmospheric Pressure	1021mbar
Environmental condition	Temperature	23°C									
	Relative Humidity	42%									
	Atmospheric Pressure	1021mbar									
Remark	N/A										
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail										

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes ☐ N/A

Test was done by Rachana Khanduri at RF test site.


6dB Bandwidth measurement result

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
6dB BW	BT-LE	2402	Low	0.668	≥ 0.5	Pass
6dB BW	BT-LE	2440	Mid	0.667	≥ 0.5	Pass
6dB BW	BT-LE	2480	High	0.674	≥ 0.5	Pass

99% OBW measurement result for 2.4GHz


Type	Test mode	Freq (MHz)	CH	Result (MHz)
99% OBW	BT-LE	2402	Low	1.04
99% OBW	BT-LE	2440	Mid	1.04
99% OBW	BT-LE	2480	High	1.04

6dB & 99% Bandwidth Test Plots

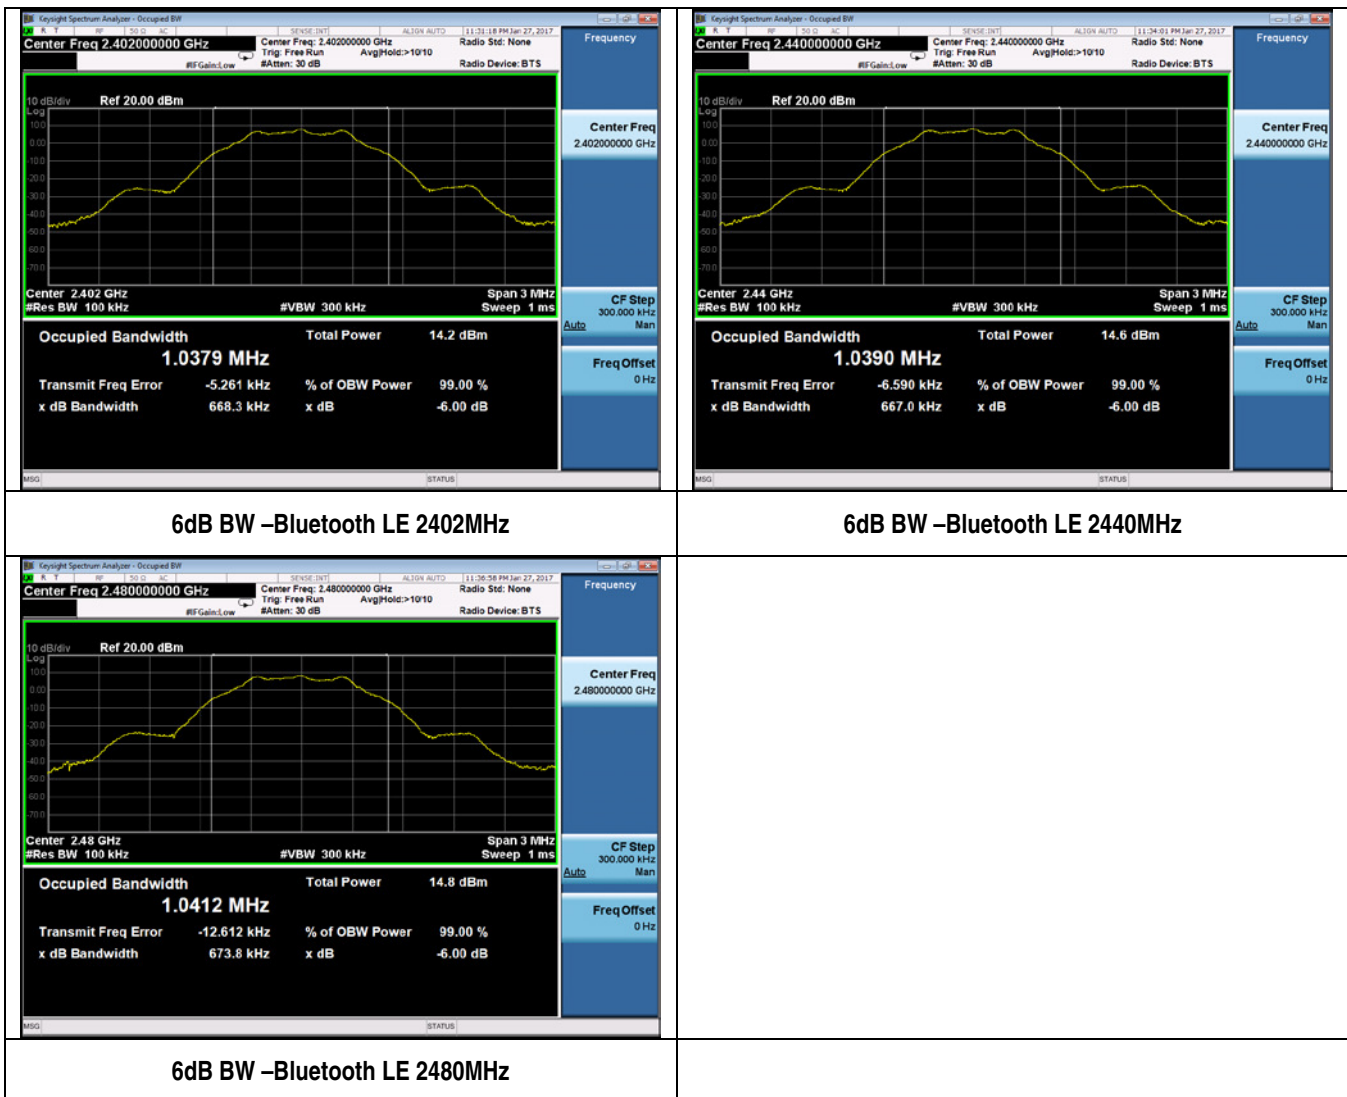

10.3 Output Power (Bluetooth LE)

Requirement(s):

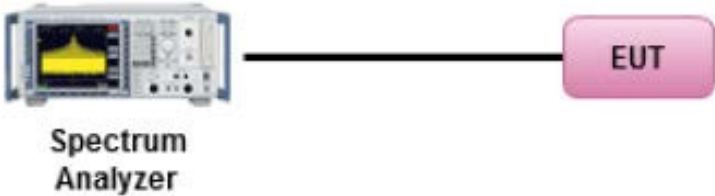Spec	Item	Requirement	Applicable
§ 15.247 RSS247 (5.4.4)	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤1 Watt	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer</p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r05, 9.2.2.2</p> <p><u>Measurement using a Spectrum Analyzer (SA)</u></p> <ul style="list-style-type: none"> (a) Set span to at least 1.5 times the OBW (b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. (c) Set VBW ≥ 3 x RBW. (d) Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.) (e) Sweep time = auto. (f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. (g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run". (h) Trace average at least 100 traces in power averaging (i.e., RMS) mode (i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum. 		
Test Date	01/26/2017	Environmental condition	Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☐ Yes (See below) ☒ N/A

Test was done by **Rachana Khanduri** at RF test site.


Output Power measurement result

Type	Test mode	Freq (MHz)	CH	Conducted Power (dBm)	Limit (dBm)	Result
Output power	Bluetooth LE	2402	Low	7.83	30	Pass
Output power	Bluetooth LE	2440	Mid	8.23	30	Pass
Output power	Bluetooth LE	2480	High	8.44	30	Pass


Test Plots

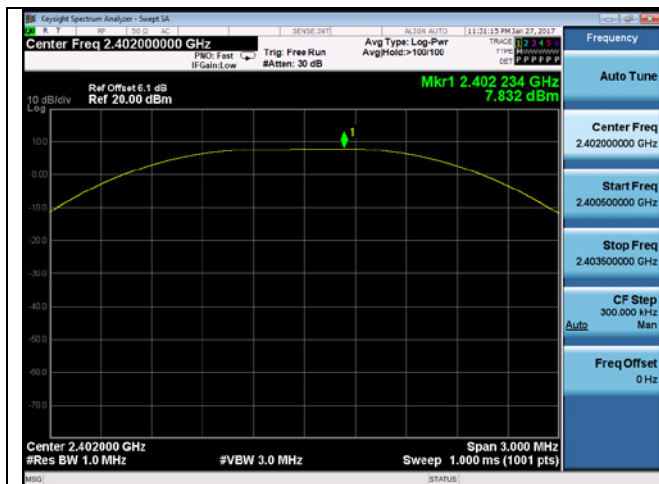

Output Power –Bluetooth LE 2402MHz

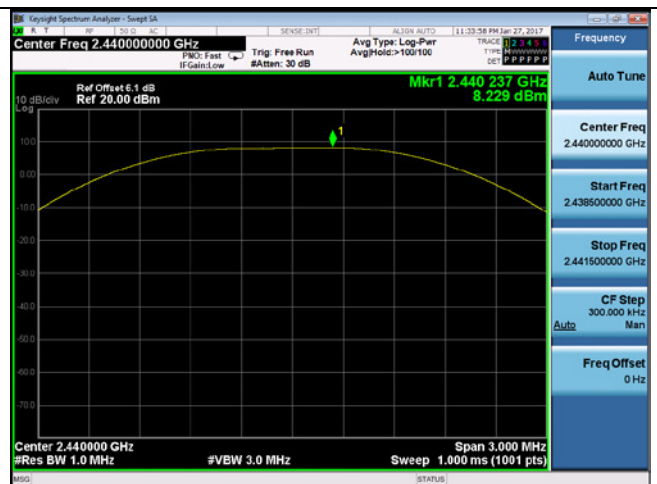


Output Power –Bluetooth LE 2440MHz

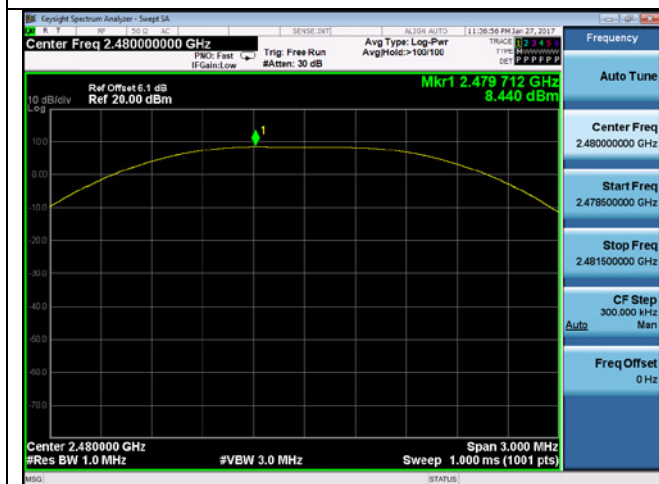

Output Power –Bluetooth LE 2480MHz

10.4 Band Edge

Requirement(s):

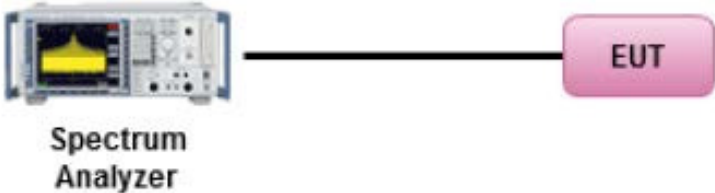
Spec	Item	Requirement	Applicable
§ 15.247 RSS247(5.5)	d)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r05</p> <p><u>Band Edge measurement procedure</u></p> <ol style="list-style-type: none"> 1. Set the EUT to maximum power setting and enable the EUT transmit continuously. 2. Band edge emissions must be at least 30 dB down from the highest emission level within the authorized band as a measured. The attenuation shall be 30 dB instead of 20 dB when Peak conducted output power procedure is used. 3. Change modulation and channel bandwidth then repeat step 1 to 2. 4. Measured and record the results in the test report. 		
Test Date	01/26/2017	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☐ Yes ☒ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Rachana Khanduri at RF test site.

Band Edge Test Plots (Bluetooth LE)

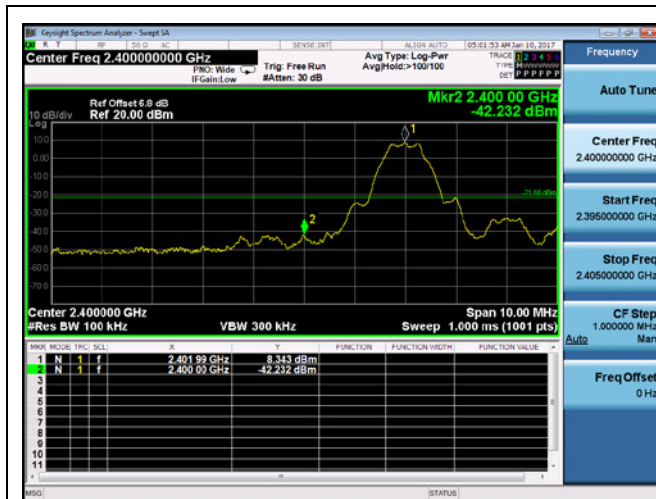


Band Edge-LE Low

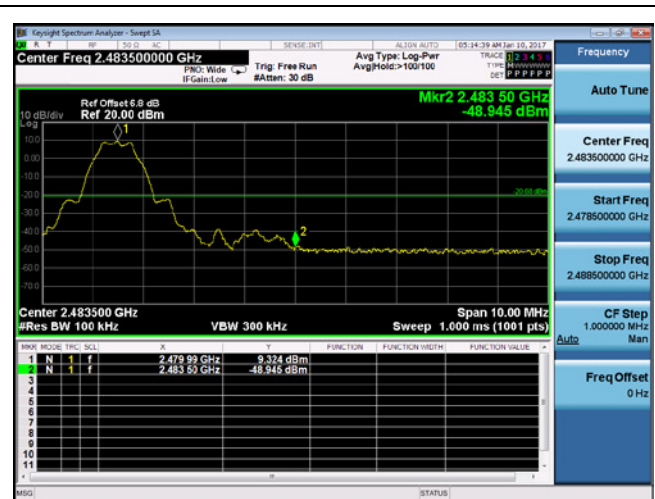

Band Edge-LE High

10.5 Peak Spectral Density

Requirement(s):

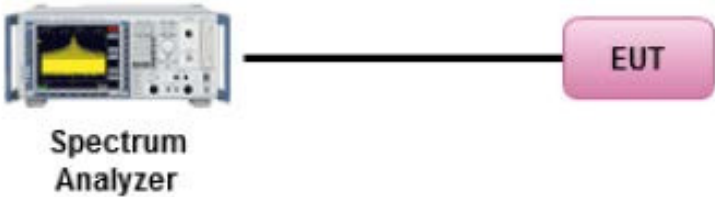Spec	Item	Requirement	Applicable
§ 15.247(e) RSS247 (5.2.2)	e)	DSSS: $\leq 8\text{dBm}/3\text{KHz}$	<input checked="" type="checkbox"/>
	f)	DSSS in hybrid sys with FH turned off: $\leq 8\text{dBm}/3\text{KHz}$	<input type="checkbox"/>
Test Setup			
Test Procedure	<p>558074 D01 DTS Meas Guidance v03r05, 10.2 Method PKPSD (peak PSD)</p> <p><u>Peak spectral density measurement procedure</u></p> <ul style="list-style-type: none"> - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. - Set the VBW $\geq 3 \times \text{RBW}$. - Detector = Peak - Sweep time = auto couple. - Trace mode = Max Hold - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Test Date	01/26/2017	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes ☐ N/A


Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Rachana Khanduri at RF test site.


PSD measurement result (Bluetooth LE)

Type	Test mode	Freq (MHz)	CH	Conducted PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
PSD	Bluetooth LE	2402	Low	-7.34	≤8	Pass
PSD	Bluetooth LE	2440	Mid	-7.13	≤8	Pass
PSD	Bluetooth LE	2480	High	-6.73	≤8	Pass


Test Plots (Bluetooth LE)

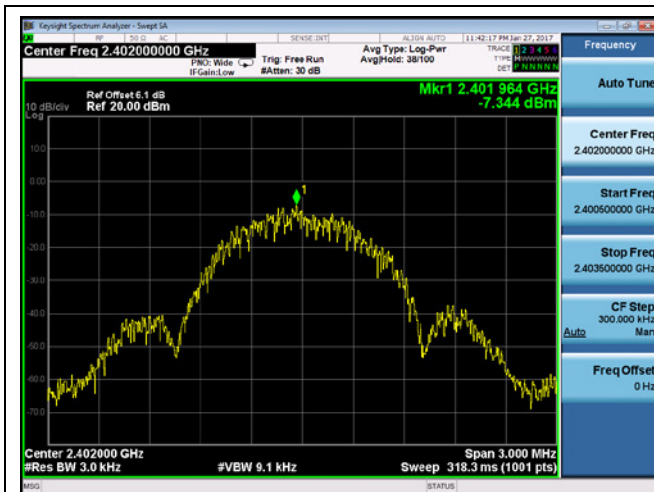

PSD -Bluetooth LE Low

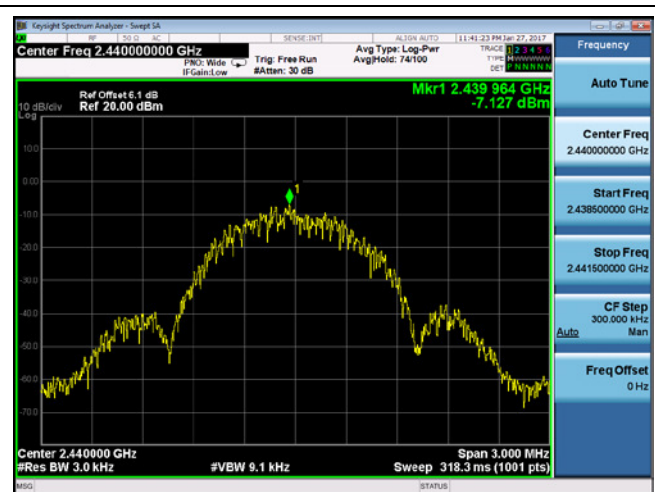


PSD -Bluetooth LE Mid

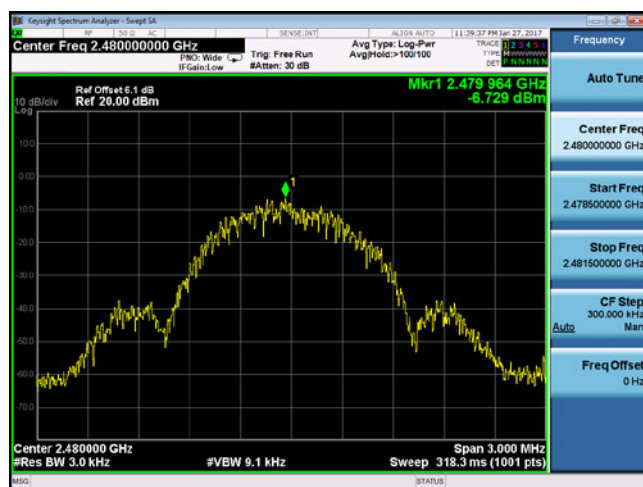

PSD -Bluetooth LE High

10.6 Radiated Spurious Emissions in restricted band

Requirement(s):

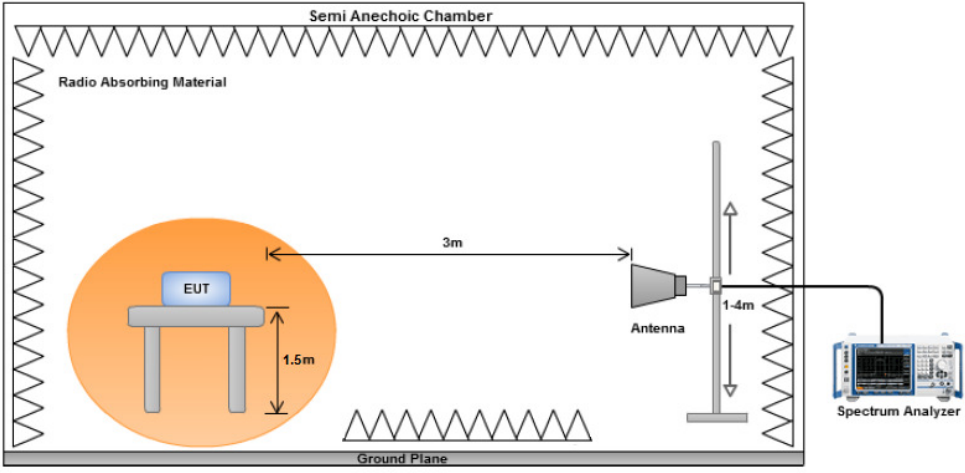
Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS247(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☐ Yes (See below) ☒ N/A

Test Plot ☒ Yes (See below) ☐ N/A


Test was done by Rachana Khanduri at 10m chamber.

Restricted Band Measurement Plots:

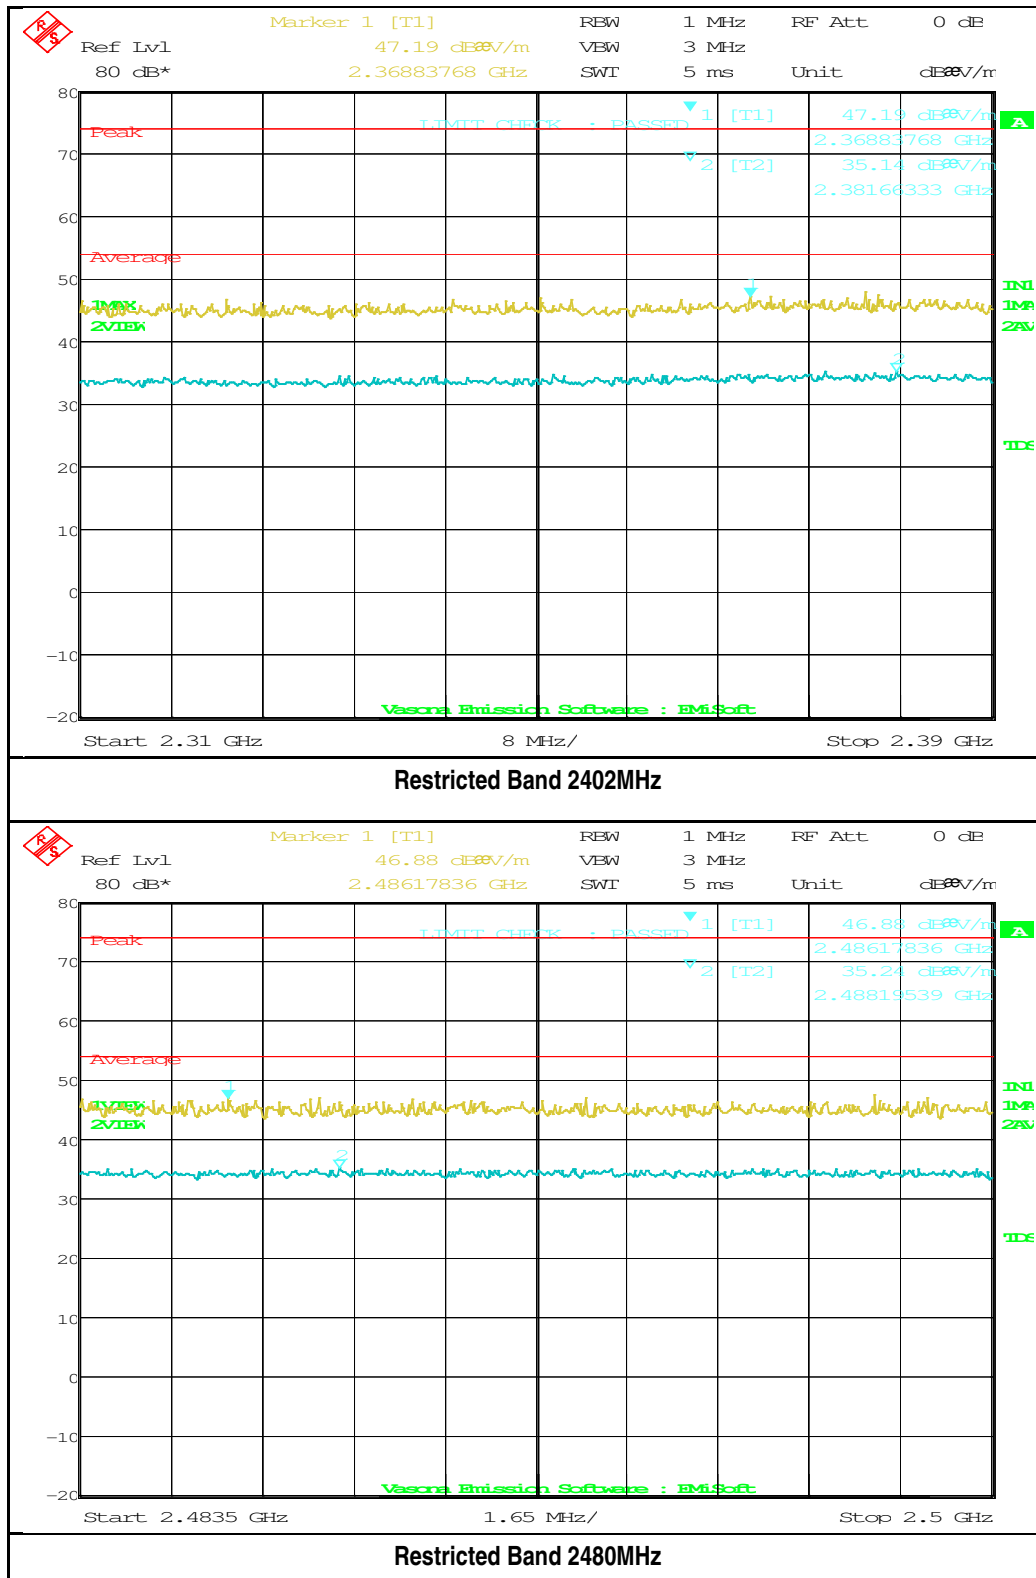

10.7 Radiated Spurious Emissions below 1GHz

Requirement(s):

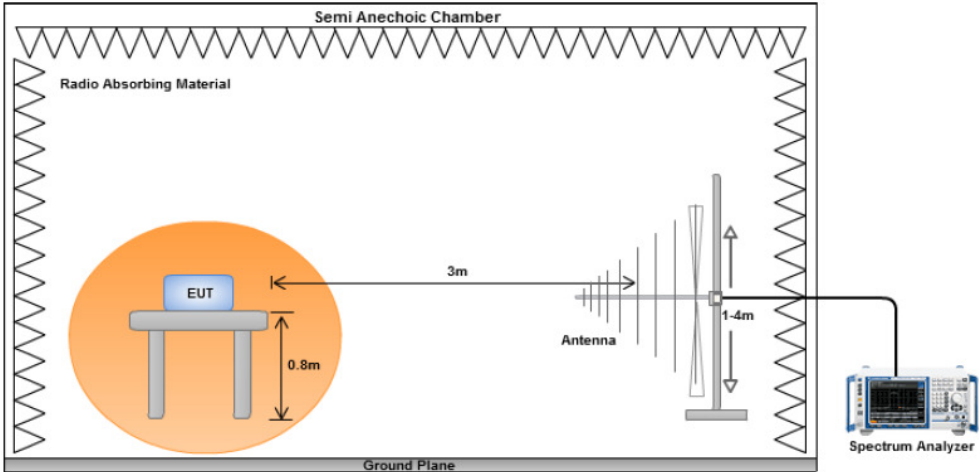Spec	Item	Requirement	Applicable							
47CFR§15.247(d) RSS247 (5.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>							
		<table><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>		Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960
Frequency range (MHz)	Field Strength (uV/m)									
30 – 88	100									
88 – 216	150									
216 960	200									
Above 960	500									
Test Setup										
Procedure		<div><div>1.</div><div>The EUT was switched on and allowed to warm up to its normal operating condition.</div></div> <div><div>2.</div><div>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:<div><div>a.</div><div>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</div></div><div><div>b.</div><div>The EUT was then rotated to the direction that gave the maximum emission.</div></div><div><div>c.</div><div>Finally, the antenna height was adjusted to the height that gave the maximum emission.</div></div></div></div> <div><div>3.</div><div>A Quasi-peak measurement was then made for that frequency point.</div></div> <div><div>4.</div><div>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</div></div>								
Remark		The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.								
Result		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail								


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Rachana Khanduri at 10m chamber.

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			
Environmental Conditions:	Temp (°C):	22	Result	Pass
	Humidity (%)	47.5		
	Atmospheric (mbar):	1020		
Mains Power:	120VAC, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	01/30/2017			
Remarks:	Bluetooth LE 2440 MHz			

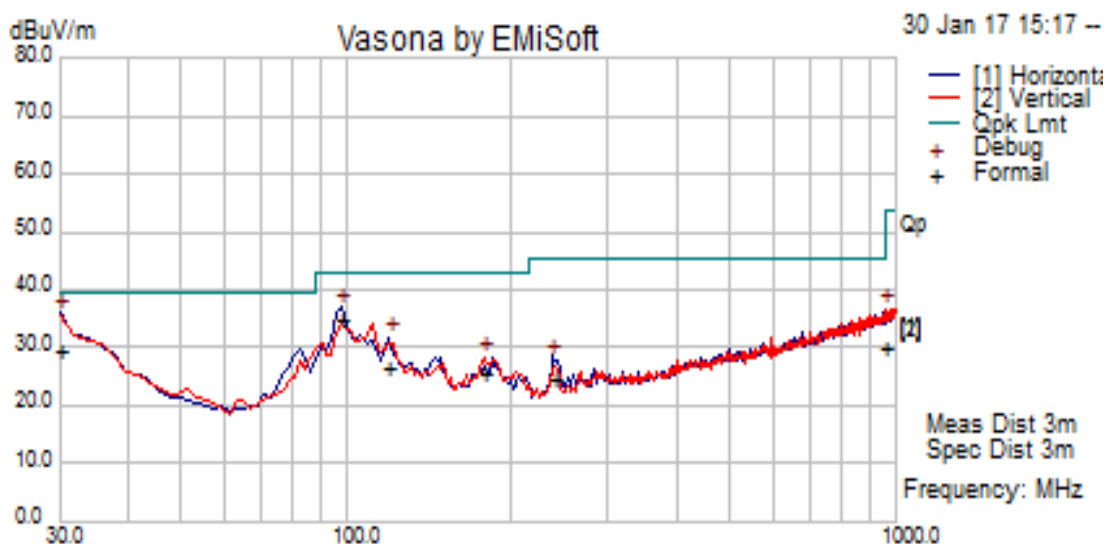


Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
30.02	28.33	0.99	0.05	29.37	Quasi Max	H	290.00	58.00	39.50	-10.13	Pass
97.95	45.84	1.63	-12.51	34.96	Quasi Max	H	300.00	7.00	43.00	-8.04	Pass
957.47	23.11	5.01	1.77	29.88	Quasi Max	V	257.00	350.00	45.50	-15.62	Pass
119.22	33.50	1.80	-8.82	26.48	Quasi Max	H	381.00	223.00	43.00	-16.52	Pass
177.56	34.30	2.16	-10.99	25.48	Quasi Max	V	100.00	71.00	43.00	-17.52	Pass
237.53	32.68	2.76	-10.72	24.72	Quasi Max	H	340.00	221.00	45.50	-20.78	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.8 Radiated Spurious Emissions between 1GHz – 25GHz

Requirement(s):

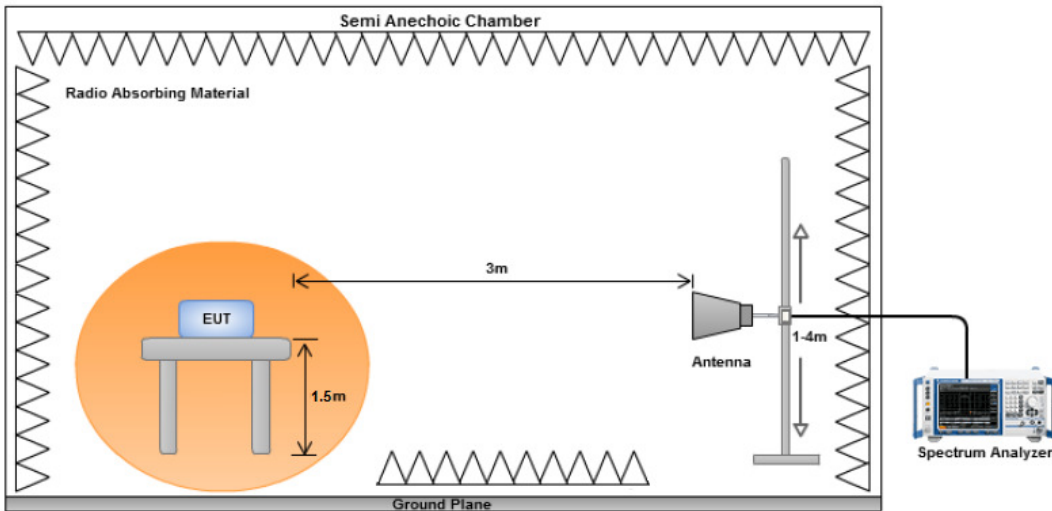Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 26GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Test was done by Rachana Khanduri at 10m chamber.

Radiated Emission Test Results (Above 1GHz)

BLE – 2402MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4804.48	57.68	4.71	-4.97	57.41	Peak Max	H	228.00	120.00	74.00	-16.59	Pass
7206.70	50.17	5.87	-0.02	56.02	Peak Max	H	175.00	150.00	74.00	-17.98	Pass
17038.14	38.81	8.97	5.40	53.18	Peak Max	V	137.00	20.00	74.00	-20.82	Pass
4804.48	46.62	4.71	-4.97	46.36	Average Max	H	228.00	120.00	54.00	-7.64	Pass
7206.70	37.88	5.87	-0.02	43.73	Average Max	H	175.00	150.00	54.00	-10.27	Pass
17038.14	26.46	8.97	5.40	40.83	Average Max	V	137.00	20.00	54.00	-13.17	Pass

BLE – 2440MHz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4880.57	57.27	4.62	-5.10	56.79	Peak Max	H	177.00	133.00	74.00	-17.21	Pass
17112.29	39.13	8.97	5.87	53.98	Peak Max	V	204.00	131.00	74.00	-20.02	Pass
7897.99	40.38	5.87	-0.60	45.65	Peak Max	V	189.00	157.00	74.00	-28.35	Pass
4880.57	45.55	4.62	-5.10	45.07	Average Max	H	177.00	133.00	54.00	-8.93	Pass
17112.29	27.13	8.97	5.87	41.97	Average Max	V	204.00	131.00	54.00	-12.03	Pass
7897.99	28.13	5.87	-0.60	33.40	Average Max	V	189.00	157.00	54.00	-20.60	Pass

















BLE – 2480MHz








Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
4959.50	54.24	4.53	-5.13	53.63	Peak Max	H	193.00	147.00	74.00	-20.37	Pass
7439.08	50.53	5.97	-0.14	56.37	Peak Max	H	157.00	161.00	74.00	-17.63	Pass
16889.71	38.78	8.91	5.84	53.54	Peak Max	V	350.00	356.00	74.00	-20.46	Pass
4959.50	44.25	4.53	-5.13	43.65	Average Max	H	193.00	147.00	54.00	-10.35	Pass
7439.08	38.80	5.97	-0.14	44.64	Average Max	H	157.00	161.00	54.00	-9.36	Pass
16889.71	26.19	8.91	5.84	40.95	Average Max	V	350.00	356.00	54.00	-13.06	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	06/08/2016	1 Year	06/08/2017	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	08/07/2016	1 Year	08/07/2017	<input checked="" type="checkbox"/>
Radiated Emissions						
R & S Receiver	ESIB 40	1018	08/07/2016	1 Year	08/07/2017	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2016	1 Year	08/12/2017	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	08/25/2016	1 Year	08/25/2017	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	08/08/2016	1 Year	08/08/2017	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2016	1 Year	09/05/2017	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	10SL0219	08/20/2016	1 Year	08/20/2017	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2