




# TEST REPORT

**Report No.**.....: **CHTEW19050128** Report Verification: 

**Project No.**.....: **SHT1904069805EW**

**FCC ID**.....: **2AK4CPP20US**

**Applicant's name**.....: **Petcube, Inc.**

**Address**.....: 2711 Centerville Road,Suite 400,Wilmington Delaware United States 19808

**Manufacturer**.....: Petcube, Inc.

**Address**.....: 2711 Centerville Road,Suite 400,Wilmington Delaware United States 19808

**Test item description** .....: **Petcube Play 2**

**Trade Mark** .....: Petcube

**Model/Type reference**.....: PP20US

**Listed Model(s)** .....: -


**Standard** .....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**


**Date of receipt of test sample**.....: May 13, 2019


**Date of testing**.....: May 13, 2019- May 29, 2019

**Date of issue**.....: May 30, 2019

**Result**.....: **PASS**

Compiled by  
 ( Position+Printed name+Signature): File administrators Echo Wei 

Supervised by  
 (Position+Printed name+Signature): Project Engineer Jerry Zhao 

Approved by  
 (Position+Printed name+Signature): RF Manager Hans Hu 

**Testing Laboratory Name** .....: **Shenzhen Huatongwei International Inspection Co., Ltd.**

**Address**.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

*The test report merely correspond to the test sample.*

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>3</b>
1.1.	Test Standards	3
1.2.	Report version	3
<b>2.</b>	<b><u>TEST DESCRIPTION</u></b>	<b>4</b>
<b>3.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<b>4.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>11</b>
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	20 dB Bandwidth	19
5.5.	Carrier Frequencies Separation	23
5.6.	Hopping Channel Number	25
5.7.	Dwell Time	27
5.8.	Pseudorandom Frequency Hopping Sequence	34
5.9.	Restricted band (radiated)	35
5.10.	Band edge and Spurious Emissions (conducted)	37
5.11.	Spurious Emissions (radiated)	53
<b>6.</b>	<b><u>TEST SETUP PHOTOS</u></b>	<b>57</b>
<b>7.</b>	<b><u>EXTERANAL AND INTERNAL PHOTOS</u></b>	<b>59</b>

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 1.2. Report version

Revision No.	Date of issue	Description
N/A	2019-05-30	Original

## **2. TEST DESCRIPTION**

<b>Test Item</b>	<b>Section in CFR 47</b>	<b>Result</b>	<b>Test Engineer</b>
Antenna Requirement	15.203/15.247 (c)	PASS	JiongSheng.Feng
AC Power Line Conducted Emissions	15.207	PASS	Zhiwei Liu
Conducted Peak Output Power	15.247 (b)(1)	PASS	JiongSheng.Feng
20 dB Bandwidth	15.247 (a)(1)	PASS	JiongSheng.Feng
Carrier Frequencies Separation	15.247 (a)(1)	PASS	JiongSheng.Feng
Hopping Channel Number	15.247 (a)(1)	PASS	JiongSheng.Feng
Dwell Time	15.247 (a)(1)	PASS	JiongSheng.Feng
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS	JiongSheng.Feng
Restricted band	15.247(d)/15.205	PASS	JiongSheng.Feng
Radiated Emissions	15.247(d)/15.209	PASS	Tony Duan

Note: The measurement uncertainty is not included in the test result.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Petcube, Inc.
Address:	2711 Centerville Road,Suite 400,Wilmington Delaware United States 19808
Manufacturer:	Petcube, Inc.
Address:	2711 Centerville Road,Suite 400,Wilmington Delaware United States 19808

#### 3.2. Product Description

Name of EUT:	Petcube Play 2
Trade Mark:	Petcube
Model No.:	PP20US
Listed Model(s):	-
Power supply:	DC 5V, 2A
Adapter information:	-
Hardware version:	v2.1.x.1.5
Software version:	v2.8.0.3560
<b>Bluetooth</b>	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	0.5dB

### 3.3. Operation state

➤ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

➤ **TEST MODE**

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

### 3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

### 3.5. Modifications

No modifications were implemented to meet testing criteria.

## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

#### **IC-Registration No.:5377B-1**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

### 4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Conducted spurious emissions 9kHz~40GHz	0.63 dB	(1)
Conducted Disturbance 150kHz~30MHz	3.02 dB	(1)
Radiated Emissions below 1GHz	4.90 dB	(1)
Radiated Emissions above 1GHz	4.96 dB	(1)
Occupied Bandwidth	70 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$



#### 4.5. Equipments Used during the Test

● Conducted Emission						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	ESCI	101247	2018/10/27	2019/10/26
●	Artificial Mains	SCHWARZBECK	NNLK 8121	573	2018/10/27	2019/10/26
●	Pulse Limiter	R&S	ESH3-Z2	100499	2018/10/27	2019/10/26
●	RF Connection Cable	HUBER+SUHNER	EF400	N/A	2018/11/15	2019/11/14
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
○	Single Balanced Telecom Pair ISN	FCC	FCC-TLISN-T2-02	20371	2018/10/28	2019/10/27
○	Two Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T4-02	20373	2018/10/28	2019/10/27
○	Four Balanced Telecom Pairs ISN	FCC	FCC-TLISN-T8-02	20375	2018/10/28	2019/10/27
○	V-Network	R&S	ESH3-Z6	100211	2018/10/27	2019/10/26
○	V-Network	R&S	ESH3-Z6	100210	2018/10/27	2019/10/26
○	2-Line V-Network	R&S	ESH3-Z5	100049	2018/10/27	2019/10/26
● Radiated Emission-6th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-02	N/A	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	ESCI	100900	2018/10/28	2019/10/27
●	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
●	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	546	2017/04/05	2020/04/04
●	Pre-Amplifier	SCHWARZBECK	BBV 9742	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	N/A	N/A	2018/09/28	2019/09/27
●	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	2018/09/28	2019/09/27
●	Test Software	R&S	ES-K1	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A
● Radiated emission-7th test site						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
●	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
●	Horn Antenna	SCHWARZBECK	9120D	1011	2017/03/27	2020/03/26
●	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
●	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/28	2020/04/27
●	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
●	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
●	Test Software	Audix	E3	N/A	N/A	N/A
●	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
●	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28
○	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28
○	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A
○	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### Test Result:

**Passed**       **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

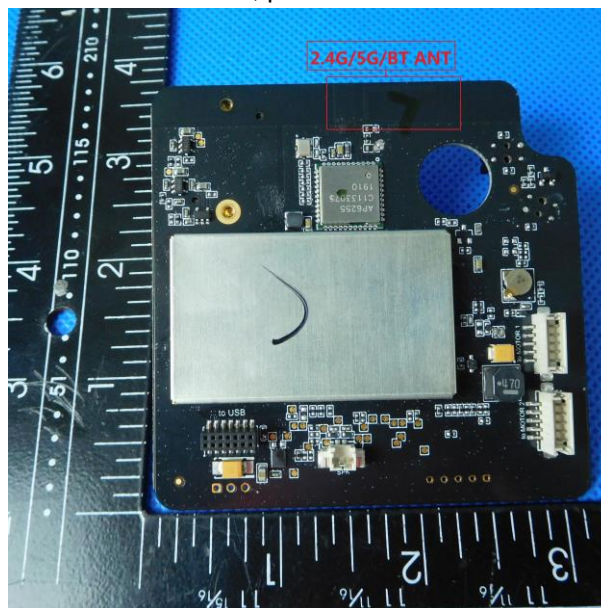

## 5.2. Conducted Emissions (AC Main)


### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

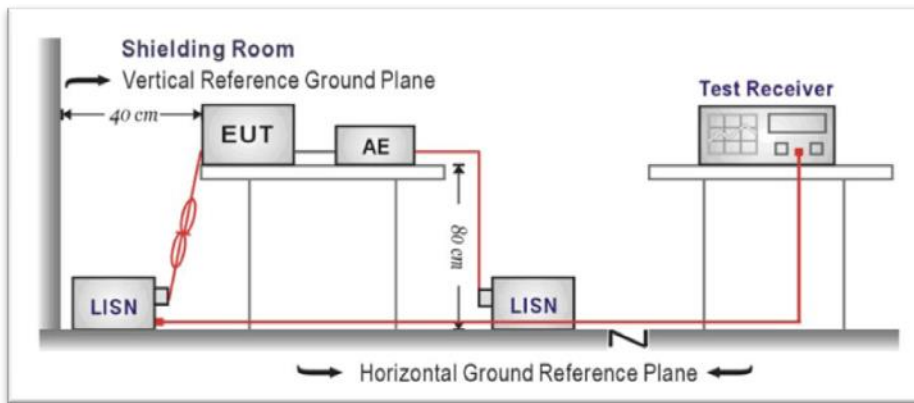

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

### TEST RESULTS


Passed       Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

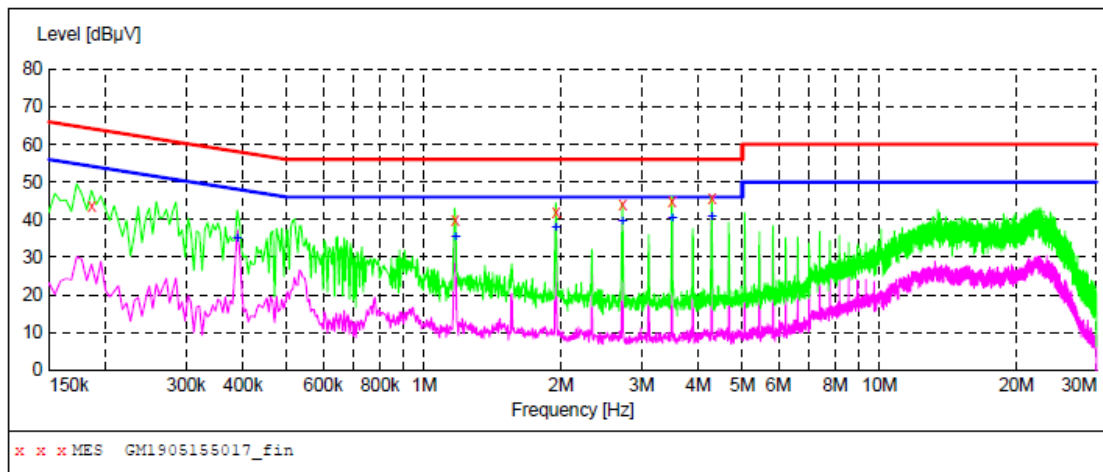

**MEASUREMENT RESULT: "GM1905155017\_fin"**

5/15/2019 1:34PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	43.60	9.9	64	20.6	QP	L1	GND
1.171500	39.80	9.9	56	16.2	QP	L1	GND
1.950000	42.10	9.9	56	13.9	QP	L1	GND
2.728500	44.00	9.9	56	12.0	QP	L1	GND
3.507000	45.00	9.9	56	11.0	QP	L1	GND
4.290000	45.60	9.9	56	10.4	QP	L1	GND


**MEASUREMENT RESULT: "GM1905155017\_fin2"**

5/15/2019 1:34PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.388500	34.80	9.9	48	13.3	AV	L1	GND
1.171500	35.30	9.9	46	10.7	AV	L1	GND
1.950000	37.70	9.9	46	8.3	AV	L1	GND
2.728500	39.40	9.9	46	6.6	AV	L1	GND
3.507000	40.40	9.9	46	5.6	AV	L1	GND
4.290000	40.60	9.9	46	5.4	AV	L1	GND

Test Line:

N

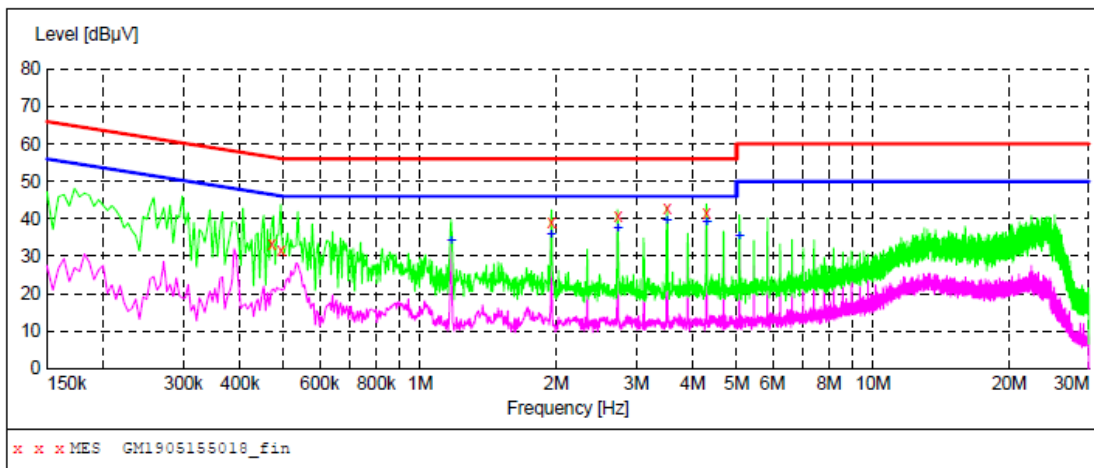

**MEASUREMENT RESULT: "GM1905155018\_fin"**

5/15/2019 1:37PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.469500	33.20	9.9	57	23.3	QP	N	GND
0.492000	31.80	9.9	56	24.3	QP	N	GND
1.950000	39.20	9.9	56	16.8	QP	N	GND
2.733000	40.80	9.9	56	15.2	QP	N	GND
3.511500	42.80	9.9	56	13.2	QP	N	GND
4.290000	41.40	9.9	56	14.6	QP	N	GND

**MEASUREMENT RESULT: "GM1905155018\_fin2"**

5/15/2019 1:37PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.171500	34.30	9.9	46	11.7	AV	N	GND
1.950000	35.60	9.9	46	10.4	AV	N	GND
2.733000	37.30	9.9	46	8.7	AV	N	GND
3.511500	39.50	9.9	46	6.5	AV	N	GND
4.294500	39.10	9.9	46	6.9	AV	N	GND
5.073000	35.20	10.0	50	14.8	AV	N	GND


### 5.3. Conducted Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.  
 For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### TEST CONFIGURATION

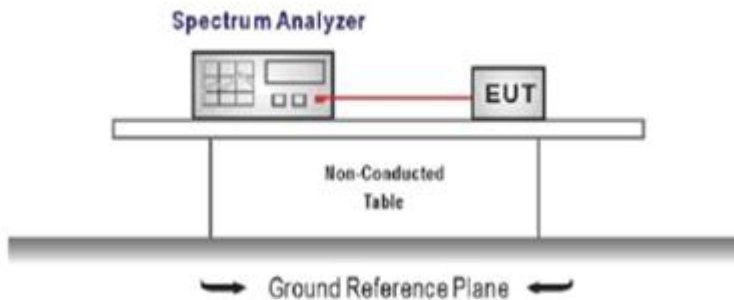

#### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
 RBW ≥ the 20 dB bandwidth of the emission being measured, VBW ≥ RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS




Passed       Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	4.49	≤ 30.00	Pass
	39	6.00		
	78	6.97		
π/4DQPSK	00	0.84	≤ 21.00	Pass
	39	2.28		
	78	2.75		
8DPSK	00	1.29	≤ 21.00	Pass
	39	2.74		
	78	3.19		

Modulation Type: GFSK	
CH00	<p>The spectrum plot for CH00 shows a GFSK signal centered at 2.402 GHz. The peak level is -4.49 dBm. The plot includes a grid with a 1001 pts span and a 500.0 kHz resolution. The y-axis ranges from -80 dBm to 10 dBm. The x-axis ranges from 2.402 GHz to 2.407 GHz. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Offset 30 dB, Att 30 dB, SWF 4.21 us (~31 ms), VBW 3 MHz, Mode Auto FFT, Count 496/500. The date is 23 MAY 2019 20:36:50.</p>
CH39	<p>The spectrum plot for CH39 shows a GFSK signal centered at 2.441 GHz. The peak level is 6.00 dBm. The plot includes a grid with a 1001 pts span and a 500.0 kHz resolution. The y-axis ranges from -80 dBm to 10 dBm. The x-axis ranges from 2.441 GHz to 2.446 GHz. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Offset 30 dB, Att 30 dB, SWF 4.21 us (~31 ms), VBW 3 MHz, Mode Auto FFT, Count 490/500. The date is 23 MAY 2019 20:39:10.</p>
CH78	<p>The spectrum plot for CH78 shows a GFSK signal centered at 2.48 GHz. The peak level is 6.97 dBm. The plot includes a grid with a 1001 pts span and a 500.0 kHz resolution. The y-axis ranges from -80 dBm to 10 dBm. The x-axis ranges from 2.48 GHz to 2.485 GHz. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Offset 30 dB, Att 30 dB, SWF 4.21 us (~31 ms), VBW 3 MHz, Mode Auto FFT, Count 471/500. The date is 23 MAY 2019 20:40:52.</p>



Modulation Type:		$\pi/4$ DQPSK
CH00	<p>                     MultiView Spectrum                      Ref Level 20.00 dBm Offset 1.00 dB RBW 2 MHz Count 500/500                      Att 30 dB SWT 1.01 ms VBW 5 MHz Mode Auto Sweep                      Frequency Sweep M1[1] 0.84 dBm 2.40207490 GHz                      CF 2.402 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz                      Date: 23 MAY 2019 20:44:26                 </p>	
CH39	<p>                     MultiView Spectrum                      Ref Level 20.00 dBm Offset 1.00 dB RBW 2 MHz Count 500/500                      Att 30 dB SWT 1.01 ms VBW 5 MHz Mode Auto Sweep                      Frequency Sweep M1[1] 2.28 dBm 2.44083020 GHz                      CF 2.441 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz                      Date: 23 MAY 2019 20:46:16                 </p>	
CH78	<p>                     MultiView Spectrum                      Ref Level 20.00 dBm Offset 1.00 dB RBW 2 MHz Count 500/500                      Att 30 dB SWT 1.01 ms VBW 5 MHz Mode Auto Sweep                      Frequency Sweep M1[1] 2.75 dBm 2.47985510 GHz                      CF 2.48 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz                      Date: 23 MAY 2019 20:47:43                 </p>	

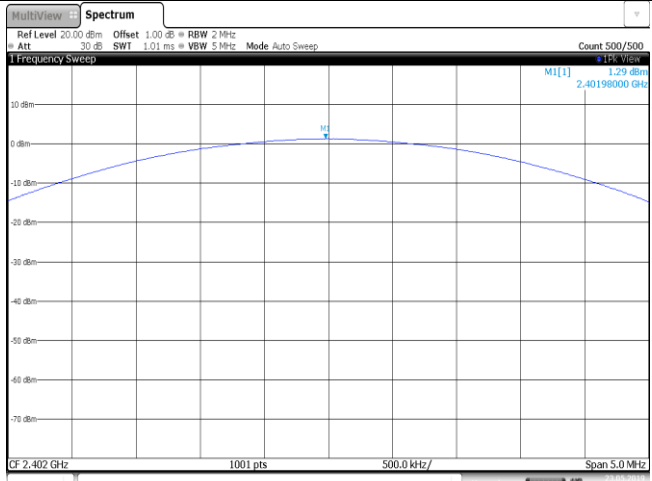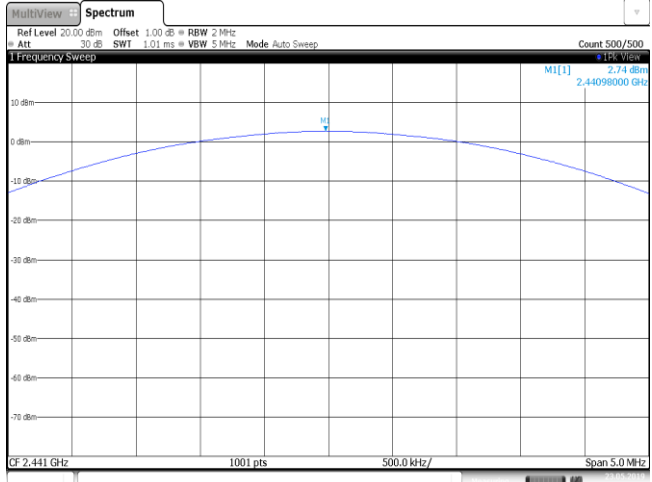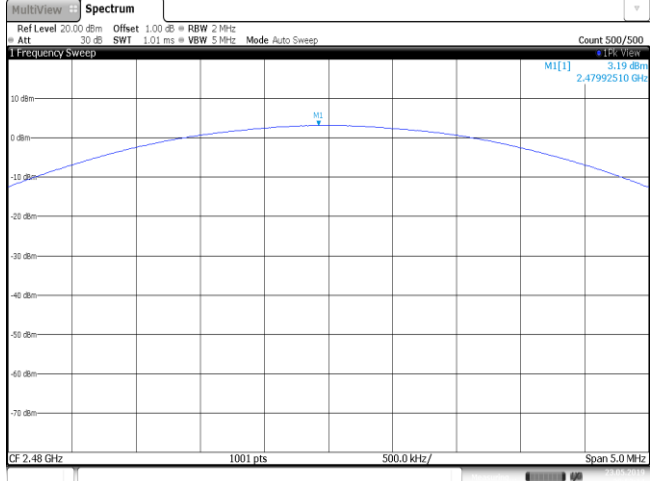
Modulation Type: 8DPSK	
CH00	 <p>MultiView Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 2 MHz Att 30 dB SWT 1.01 ms VBW 5 MHz Mode Auto Sweep Count 500/500 1 Frequency Sweep M1[1] 1.29 dBm 2.40198000 GHz CF 2.402 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz Date: 23 MAY 2019 20:49:24</p>
CH39	 <p>MultiView Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 2 MHz Att 30 dB SWT 1.01 ms VBW 5 MHz Mode Auto Sweep Count 500/500 1 Frequency Sweep M1[1] 2.74 dBm 2.44098000 GHz CF 2.441 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz Date: 23 MAY 2019 20:51:27</p>
CH78	 <p>MultiView Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 2 MHz Att 30 dB SWT 1.01 ms VBW 5 MHz Mode Auto Sweep Count 500/500 1 Frequency Sweep M1[1] 3.19 dBm 2.47992510 GHz CF 2.48 GHz 1001 pts 500.0 kHz/ Span 5.0 MHz Date: 23 MAY 2019 20:53:13</p>

## 5.4. 20 dB Bandwidth

### LIMIT

N/A

### TEST CONFIGURATION

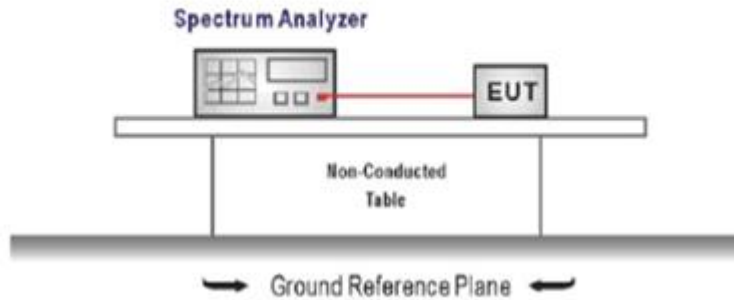

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  1% of the 20 dB bandwidth, VBW  $\geq$  RBW  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


### TEST MODE:

Please refer to the clause 3.3


### TEST RESULTS

 Passed       Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.93	-	Pass
	39	0.93		
	78	0.93		
$\pi/4$ DQPSK	00	1.40	-	Pass
	39	1.40		
	78	1.40		
8DPSK	00	1.38	-	Pass
	39	1.39		
	78	1.40		

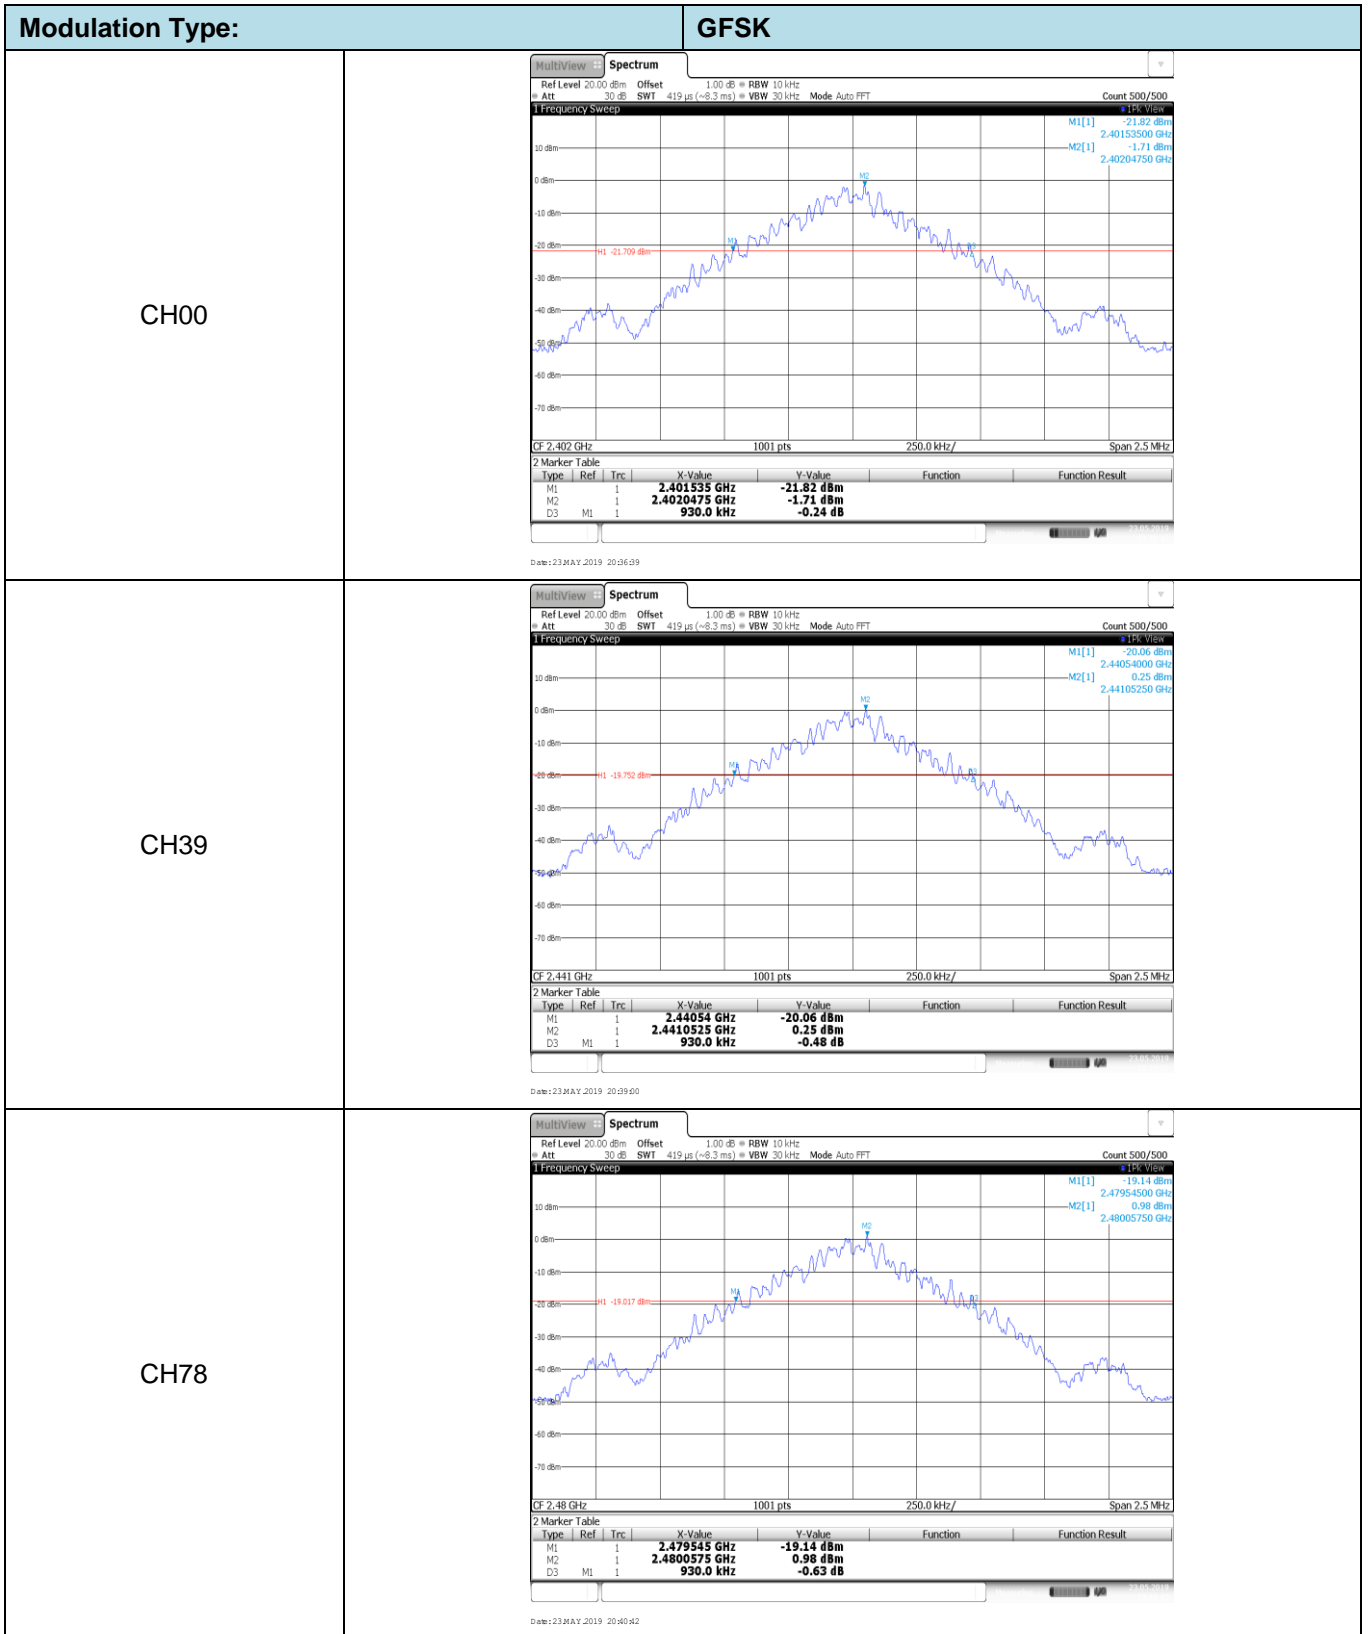

Modulation Type:		$\pi/4$ DQPSK																												
CH00	<p>CF 2.402 GHz 1001 pts 250.0 kHz/ Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.4012875 GHz</td> <td>-27.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.40181 GHz</td> <td>-7.61 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.4 MHz</td> <td>-0.20 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:44:15</p>		Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4012875 GHz	-27.91 dBm			M2	1		2.40181 GHz	-7.61 dBm			D3	M1	1	1.4 MHz	-0.20 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																								
M1	1		2.4012875 GHz	-27.91 dBm																										
M2	1		2.40181 GHz	-7.61 dBm																										
D3	M1	1	1.4 MHz	-0.20 dB																										
CH39	<p>CF 2.441 GHz 1001 pts 250.0 kHz/ Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.4402925 GHz</td> <td>-26.38 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4408125 GHz</td> <td>-6.10 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.4 MHz</td> <td>-0.20 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:46:06</p>		Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4402925 GHz	-26.38 dBm			M2	1		2.4408125 GHz	-6.10 dBm			D3	M1	1	1.4 MHz	-0.20 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																								
M1	1		2.4402925 GHz	-26.38 dBm																										
M2	1		2.4408125 GHz	-6.10 dBm																										
D3	M1	1	1.4 MHz	-0.20 dB																										
CH78	<p>CF 2.48 GHz 1001 pts 250.0 kHz/ Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.4792975 GHz</td> <td>-25.84 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4798175 GHz</td> <td>-5.64 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.3975 MHz</td> <td>0.20 dB</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:47:33</p>		Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.4792975 GHz	-25.84 dBm			M2	1		2.4798175 GHz	-5.64 dBm			D3	M1	1	1.3975 MHz	0.20 dB		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																								
M1	1		2.4792975 GHz	-25.84 dBm																										
M2	1		2.4798175 GHz	-5.64 dBm																										
D3	M1	1	1.3975 MHz	0.20 dB																										

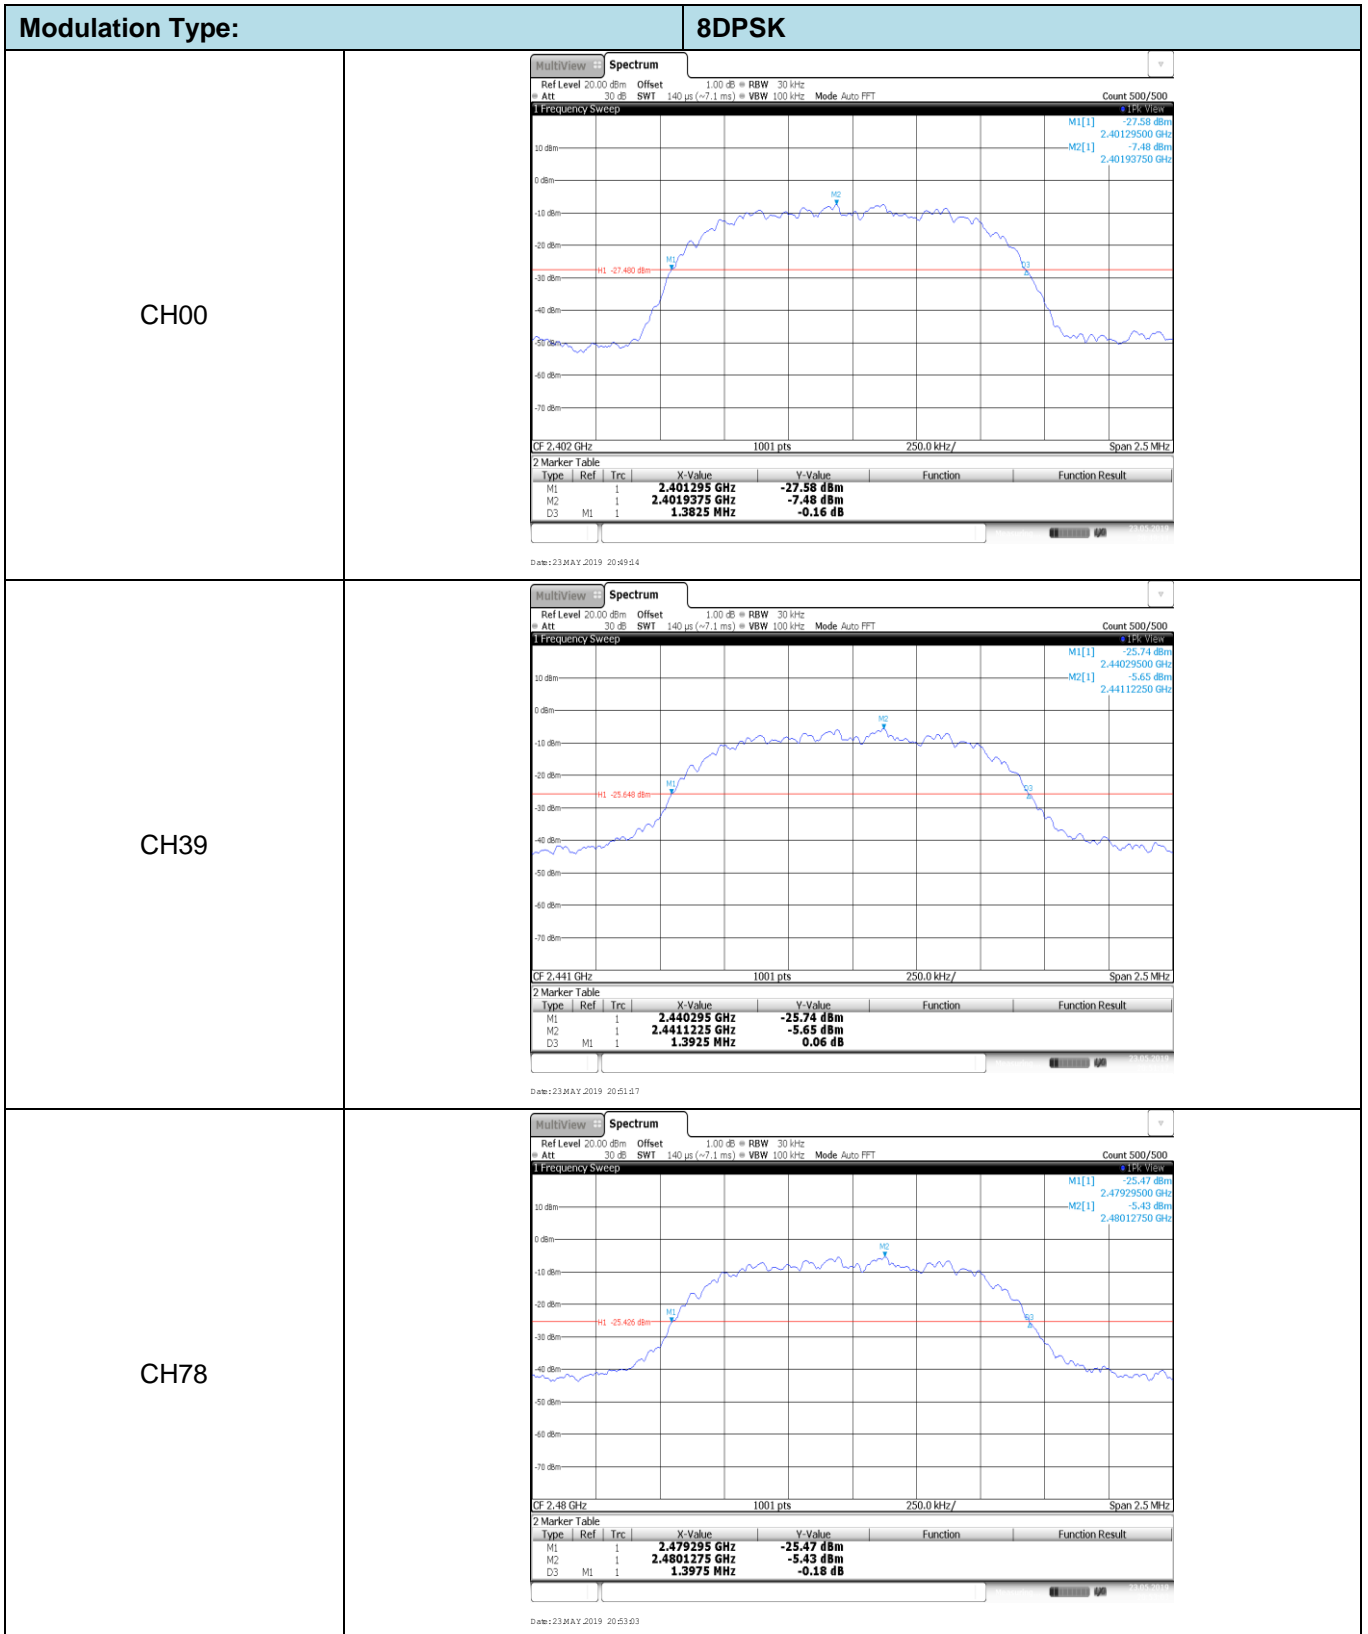


### 5.5. Carrier Frequencies Separation

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST CONFIGURATION

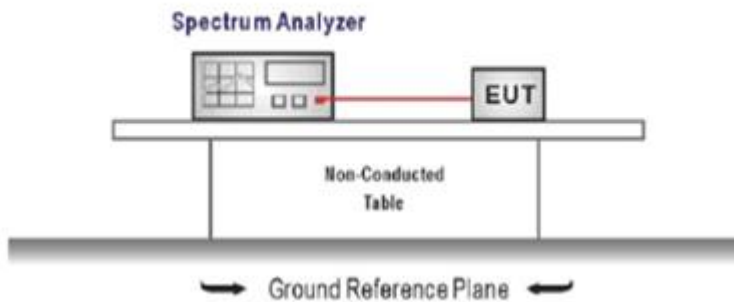

#### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peaks of two adjacent channels
  - RBW  $\geq$  1% of the span, VBW  $\geq$  RBW
  - Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable




Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	$\geq 0.93$	Pass
$\pi/4$ DQPSK	39	1.00	$\geq 0.93$	Pass
8DPSK	39	1.00	$\geq 0.93$	Pass

Note:

\*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit =  $2/3$  \* The maximum 20 dB Bandwidth for  $\pi/4$ DQPSK modulation on the section 5.4.

8DPSK limit =  $2/3$  \* The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4
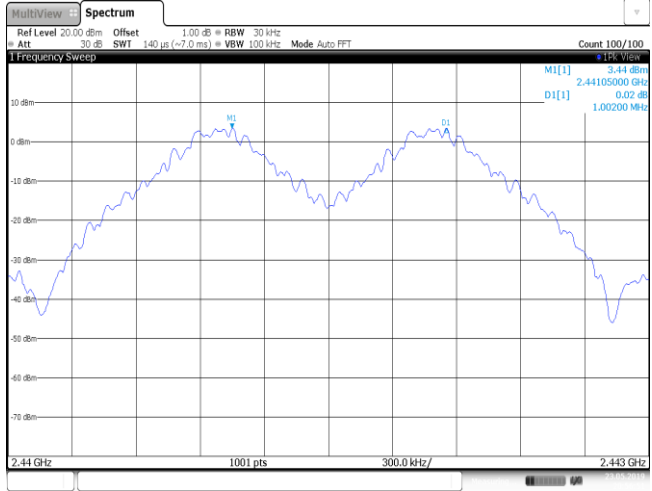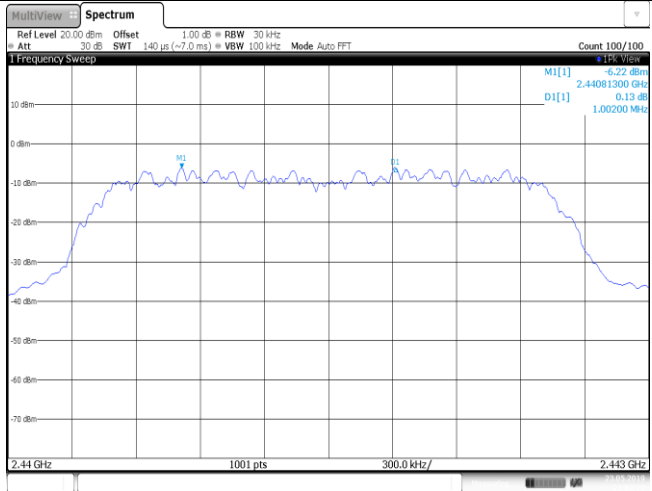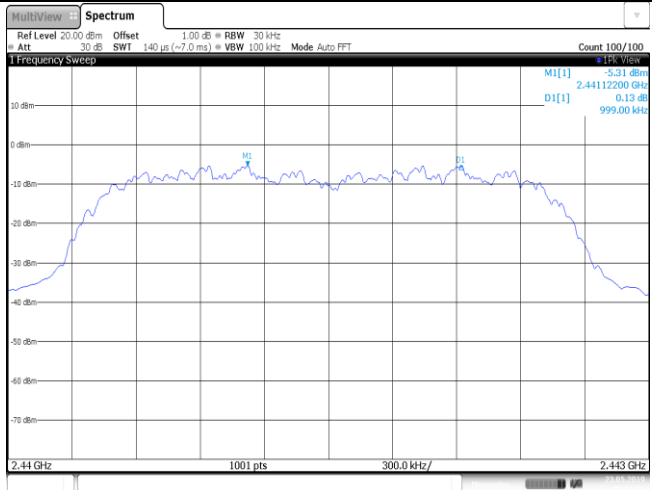
<p>GFSK</p>	 <p>Date: 23 MAY 2019 20:56:50</p>
<p><math>\pi/4</math>DQPSK</p>	 <p>Date: 23 MAY 2019 21:03:29</p>
<p>8DPSK</p>	 <p>Date: 23 MAY 2019 21:11:43</p>




## 5.6. Hopping Channel Number

### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

### TEST CONFIGURATION

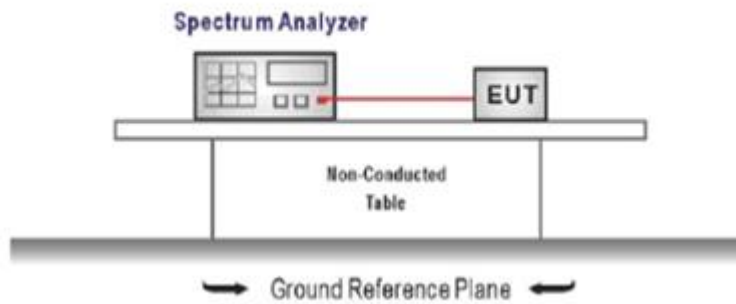

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = the frequency band of operation  
 RBW  $\geq$  1% of the span, VBW  $\geq$  RBW  
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	$\geq 15.00$	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

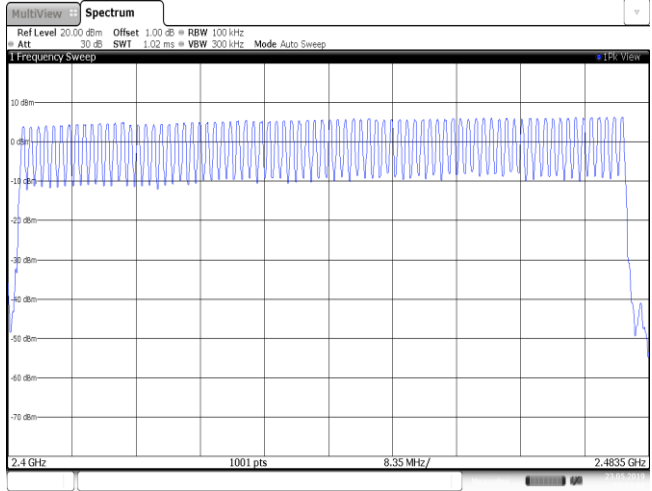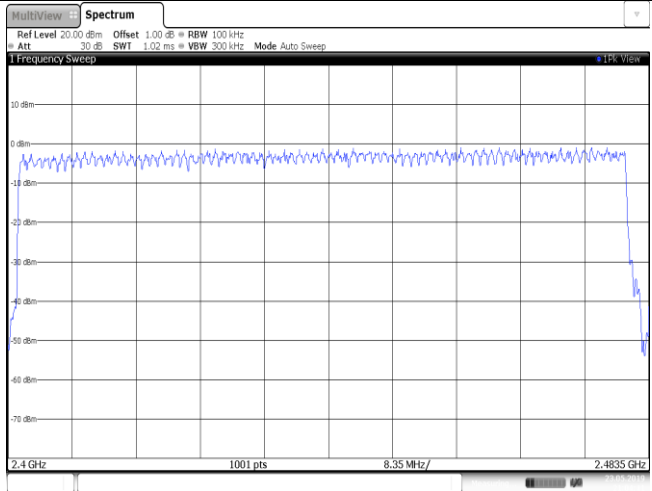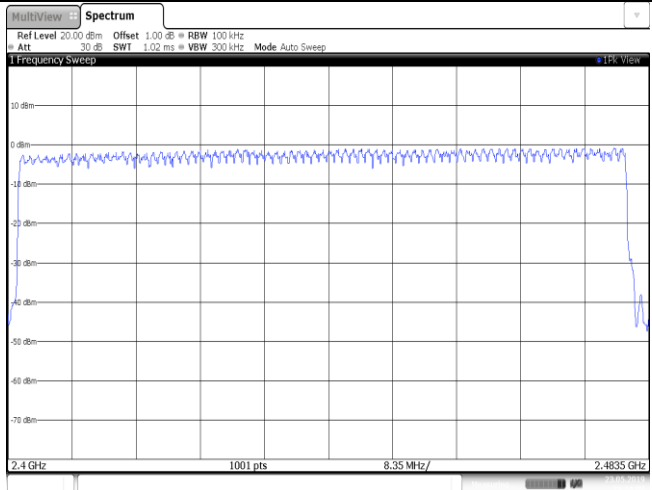
<p>GFSK</p>	 <p>MultiView Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att -30 dB SWI 1.02 ms VEW 300 kHz Mode Auto Sweep Frequency Sweep 10 dBm 0 dBm -14 dBm -28 dBm -42 dBm -56 dBm -70 dBm 2.4 GHz 1001 pts 8.35 MHz/ 2.4835 GHz Date: 23 MAY 2019 20:58:03</p>
<p><math>\pi/4</math>DQPSK</p>	 <p>MultiView Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att -30 dB SWI 1.02 ms VEW 300 kHz Mode Auto Sweep Frequency Sweep 10 dBm 0 dBm -14 dBm -28 dBm -42 dBm -56 dBm -70 dBm 2.4 GHz 1001 pts 8.35 MHz/ 2.4835 GHz Date: 23 MAY 2019 21:04:42</p>
<p>8DPSK</p>	 <p>MultiView Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att -30 dB SWI 1.02 ms VEW 300 kHz Mode Auto Sweep Frequency Sweep 10 dBm 0 dBm -14 dBm -28 dBm -42 dBm -56 dBm -70 dBm 2.4 GHz 1001 pts 8.35 MHz/ 2.4835 GHz Date: 23 MAY 2019 21:14:28</p>

### 5.7. Dwell Time

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST CONFIGURATION

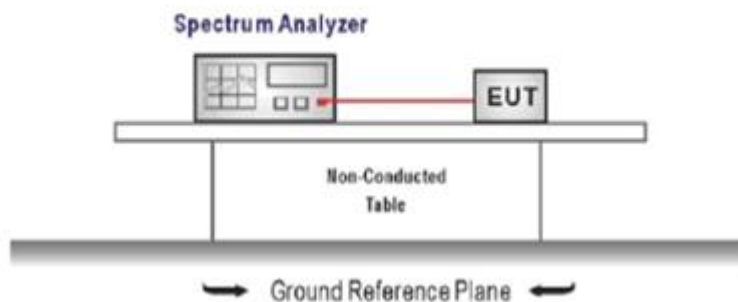

#### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
 Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW  
 Sweep = as necessary to capture the entire dwell time per hopping channel,  
 Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




#### TEST MODE:

Please refer to the clause 3.3


#### TEST RESULTS

Passed       Not Applicable


Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.42	321.00	0.13	≤ 0.40	Pass
	DH3	1.67	168.00	0.28		
	DH5	2.92	103.00	0.30		
π/4DQPSK	2DH1	0.39	319.00	0.12	≤ 0.40	Pass
	2DH3	1.68	175.00	0.29		
	2DH5	2.92	116.00	0.34		
8DPSK	3DH1	0.39	318.00	0.12	≤ 0.40	Pass
	3DH3	1.67	160.00	0.27		
	3DH5	2.93	119.00	0.35		

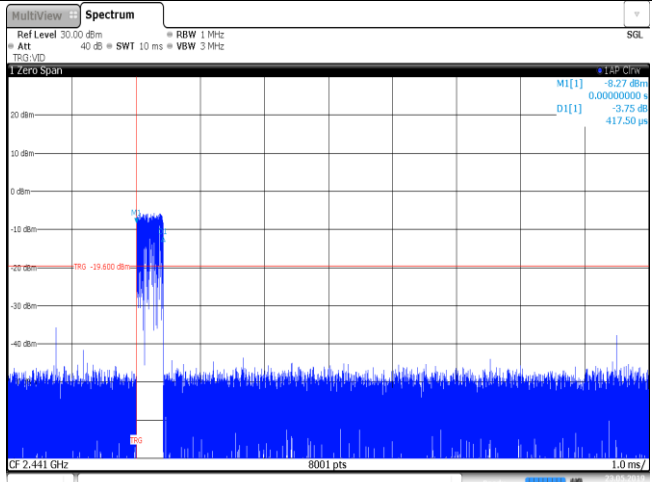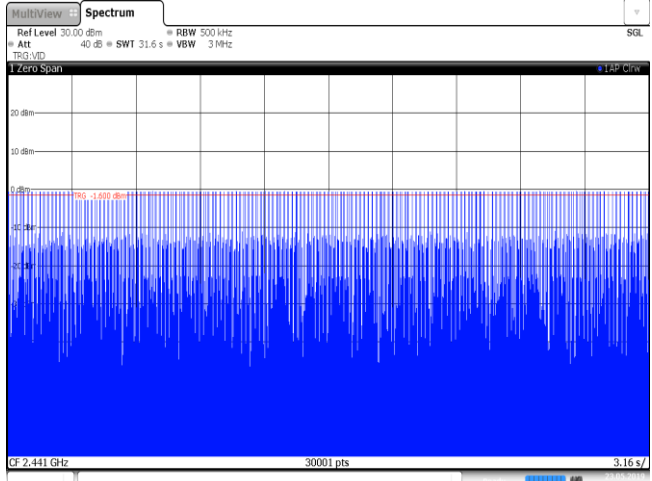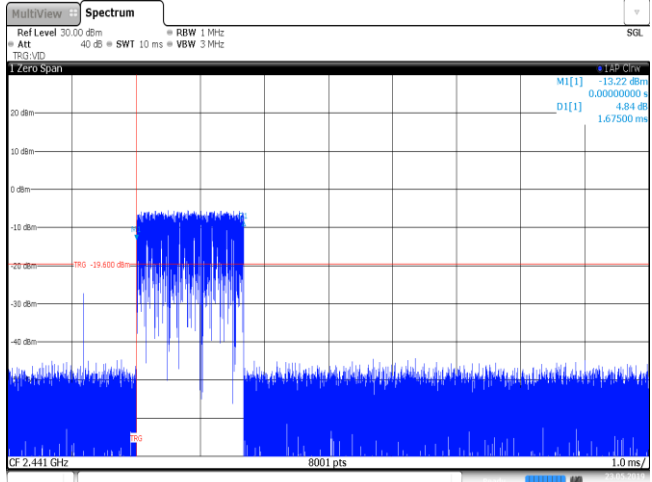Modulation Type: GFSK	
DH1 Burst width	 <p>Ref Level 30.00 dBm = RBW 1 MHz Att 40 dB = SWT 10 ms = VBW 3 MHz TRG.V/D 1 Zero Span CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>M[1] -8.27 dBm D1[1] -3.75 dB 417.50 ps</p> <p>Date: 23 MAY 2019 21:17:05</p>
DH1 Burst number	 <p>Ref Level 30.00 dBm = RBW 500 kHz Att 40 dB = SWT 31.6 s = VBW 3 MHz TRG.V/D 1 Zero Span CF 2.441 GHz 30001 pts 3.16 s/</p> <p>Date: 23 MAY 2019 21:17:40</p>
DH3 Burst width	 <p>Ref Level 30.00 dBm = RBW 1 MHz Att 40 dB = SWT 10 ms = VBW 3 MHz TRG.V/D 1 Zero Span CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>M[1] -13.22 dBm D1[1] 4.84 dB 1.67500 ms</p> <p>Date: 23 MAY 2019 21:20:56</p>


DH3  
Burst number

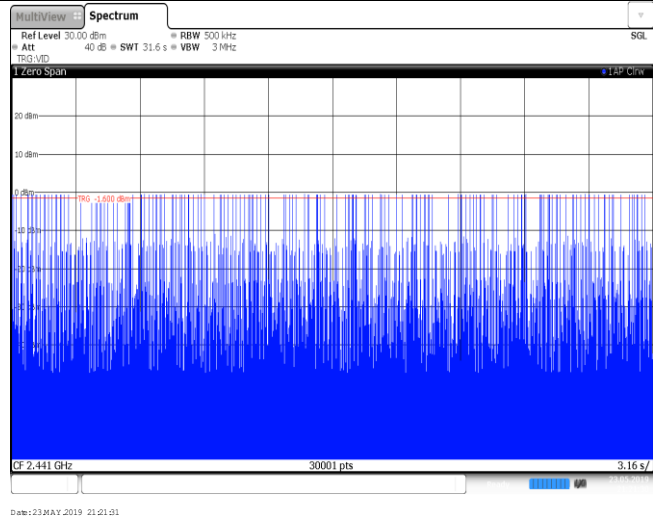

DH5  
Burst width

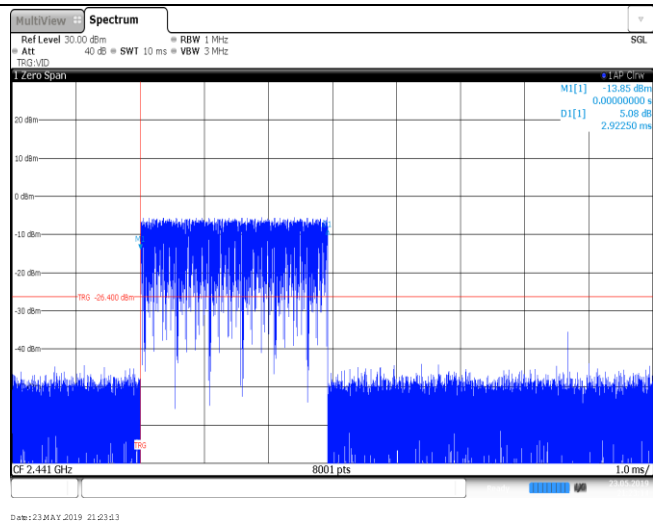


DH5  
Burst number

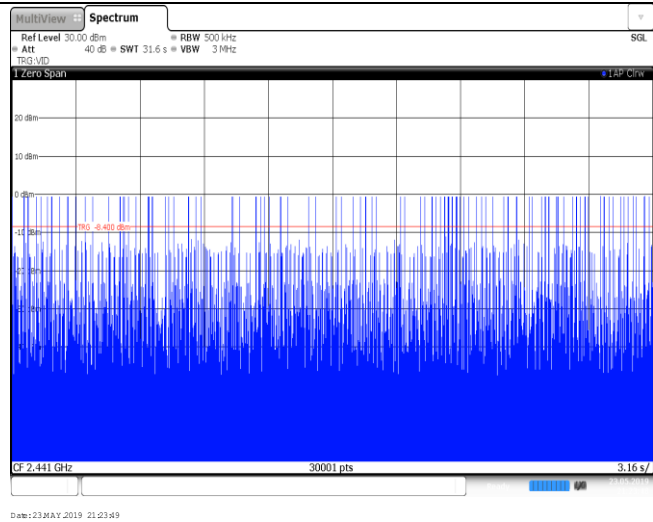


Modulation Type:		$\pi/4$ DQPSK
2DH1 Burst width	<p>Ref Level 30.00 dBm = RBW 1 MHz Att -40 dB = SWT 10 ms = VBW 3 MHz TRIG V/D</p> <p>M1[1] -10.2 dBm D1[1] 0.00000000 s 2.89 dB 387.50 ps</p> <p>CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>Date: 24 MAY 2019 15:03:56</p>	
2DH1 Burst number	<p>Ref Level 30.00 dBm = RBW 500 kHz Att -40 dB = SWT 31.6 s = VBW 3 MHz TRIG V/D</p> <p>M1[1] -10.2 dBm D1[1] 0.00000000 s 2.89 dB 387.50 ps</p> <p>CF 2.441 GHz 30001 pts 3.16 s/</p> <p>Date: 24 MAY 2019 15:04:02</p>	
2DH3 Burst width	<p>Ref Level 30.00 dBm = RBW 1 MHz Att -40 dB = SWT 10 ms = VBW 3 MHz TRIG V/D</p> <p>M1[1] -9.65 dBm D1[1] 0.00000000 s 3.30 dB 1.67625 ms</p> <p>CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>Date: 23 MAY 2019 21:26:26</p>	


2DH3  
Burst number

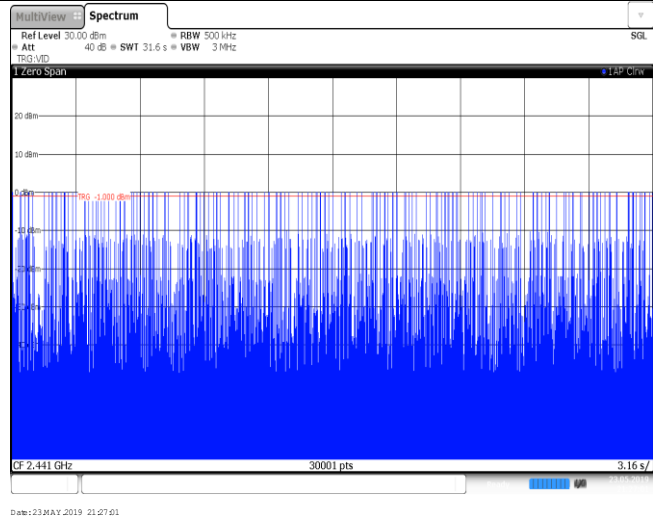

2DH5  
Burst width

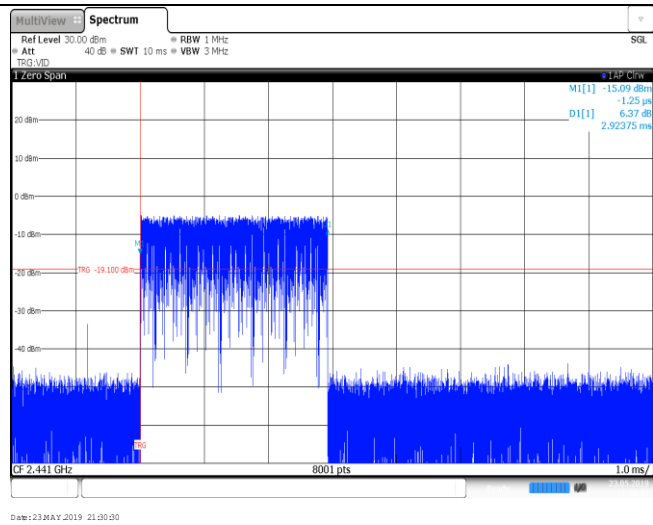


2DH5  
Burst number

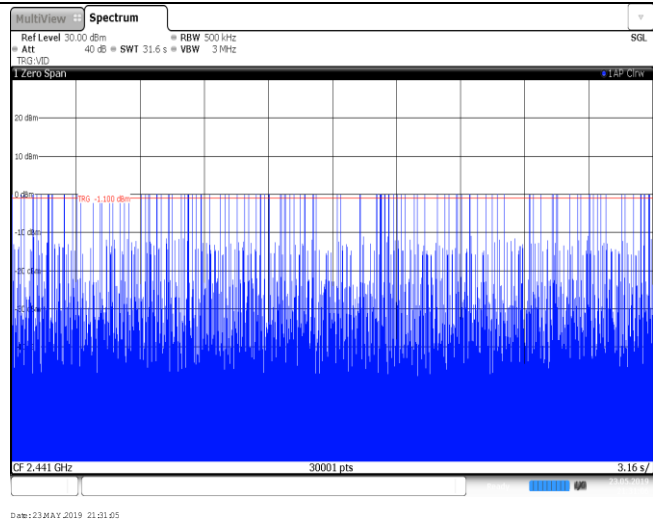


Modulation Type: $\pi/4$ DQPSK	
3DH1 Burst width	<p>MultiView Spectrum Ref Level 30.00 dBm = RBW 1 MHz Att -40 dB = SWT 10 ms = VBW 3 MHz TRIG V/D 1 Zero Span M1[1] -11.77 dBm D1[1] 0.00000000 s 2.12 dB 387.50 ps CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>Date: 24 MAY 2019 15:06:07</p>
3DH1 Burst number	<p>MultiView Spectrum Ref Level 30.00 dBm = RBW 500 kHz Att -40 dB = SWT 31.6 s = VBW 3 kHz TRIG V/D 1 Zero Span M1[1] -11.77 dBm D1[1] 0.00000000 s 2.12 dB 387.50 ps CF 2.441 GHz 30001 pts 3.16 s/</p> <p>Date: 24 MAY 2019 15:06:43</p>
3DH3 Burst width	<p>MultiView Spectrum Ref Level 30.00 dBm = RBW 1 MHz Att -40 dB = SWT 10 ms = VBW 3 MHz TRIG V/D 1 Zero Span M1[1] -1.00 dBm D1[1] 0.00000000 s 0.09 dB 1.67500 ms CF 2.441 GHz 8001 pts 1.0 ms/</p> <p>Date: 23 MAY 2019 21:26:21</p>




3DH3  
Burst number

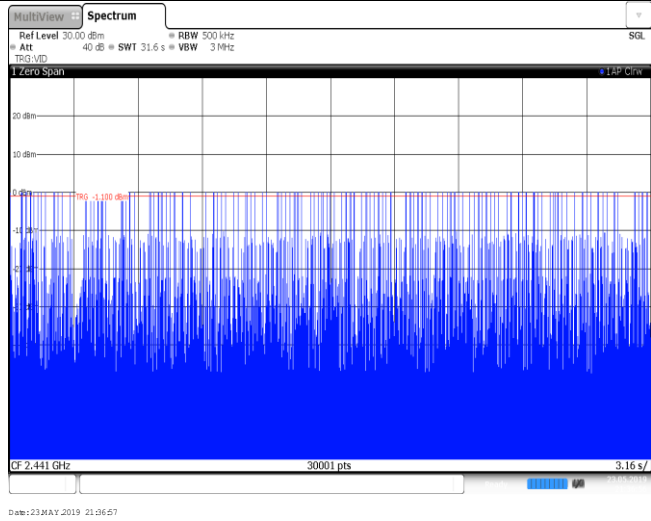

3DH5  
Burst width

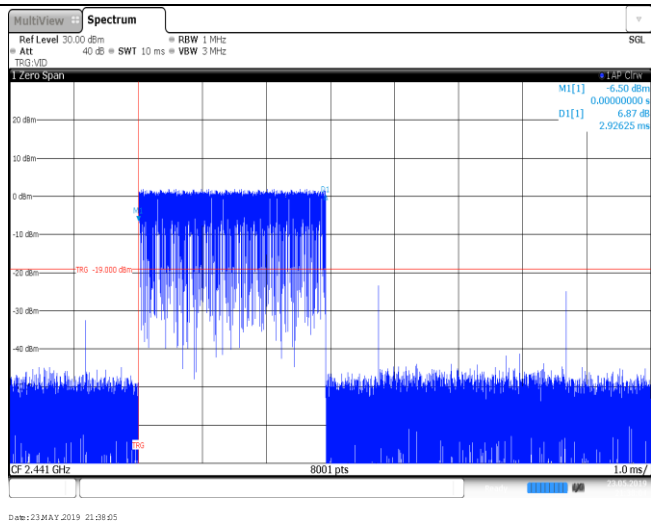

3DH5  
Burst number

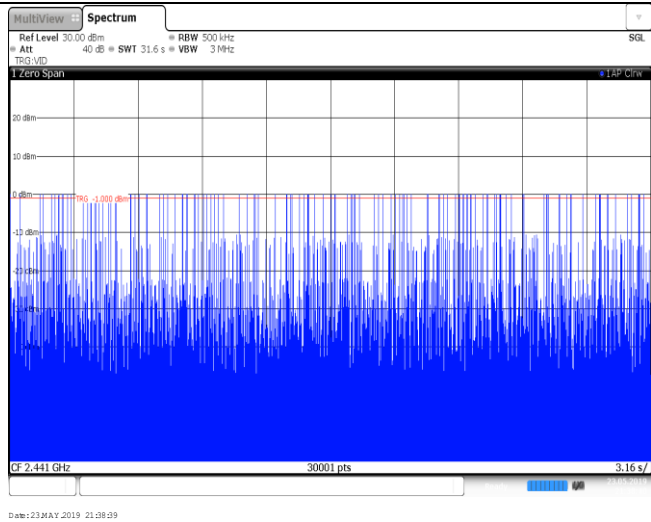

### 5.8. Pseudorandom Frequency Hopping Sequence


#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

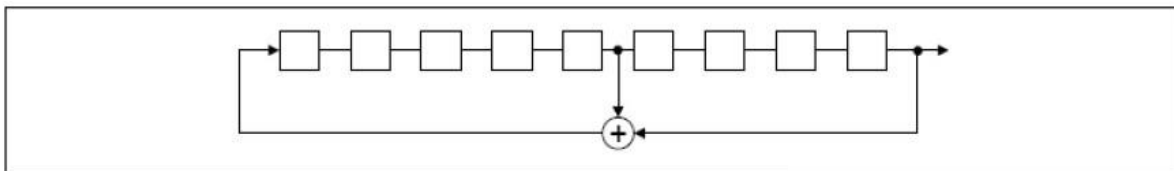

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

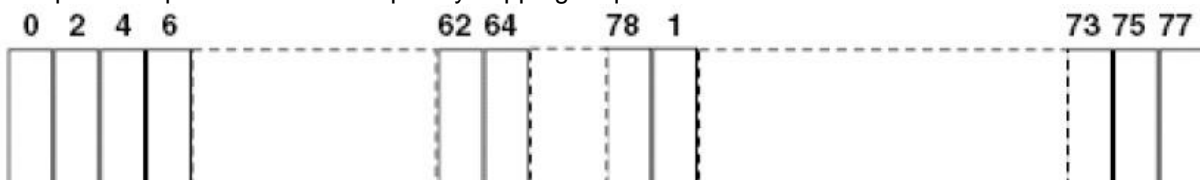

Each frequency used equally on the average by each transmitter. The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


### 5.9. Restricted band (radiated)

#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

#### TEST CONFIGURATION

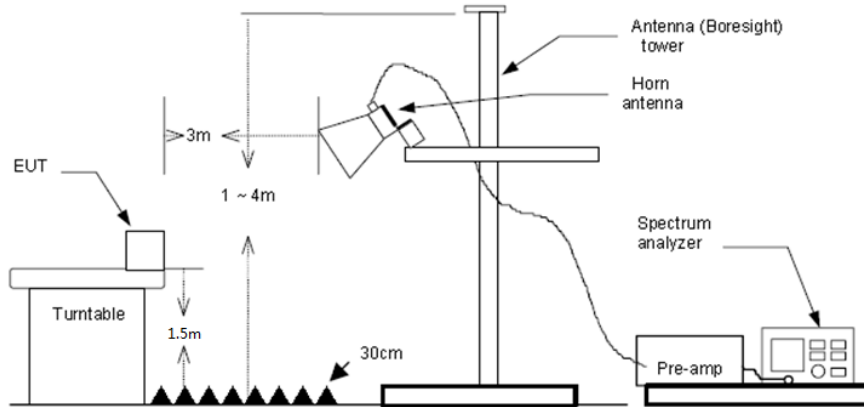

#### TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
 RBW=1 MHz, VBW=3 MHz Peak detector for Peak value  
 RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

Passed       Not Applicable

#### Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Test channel:					CH00				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	43.80	28.05	7.73	37.59	41.99	74.00	-32.01	Horizontal	Peak
2390.03	44.53	27.65	7.84	37.59	42.43	74.00	-31.57	Horizontal	Peak
2310.00	44.31	28.05	7.73	37.59	42.50	74.00	-31.50	Vertical	Peak
2390.03	44.11	27.65	7.84	37.59	42.01	74.00	-31.99	Vertical	Peak
2310.00	32.20	28.05	7.73	37.59	30.39	54.00	-23.61	Horizontal	Average
2390.03	32.00	27.65	7.84	37.59	29.90	54.00	-24.10	Horizontal	Average
2310.00	32.17	28.05	7.73	37.59	30.36	54.00	-23.64	Vertical	Average
2390.03	31.96	27.65	7.84	37.59	29.86	54.00	-24.14	Vertical	Average


Test channel:					CH78				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	65.42	27.26	8.04	37.59	63.13	74.00	-10.87	Horizontal	Peak
2500.00	44.54	27.20	8.08	37.59	42.23	74.00	-31.77	Horizontal	Peak
2483.50	60.31	27.26	8.04	37.59	58.02	74.00	-15.98	Vertical	Peak
2500.00	43.84	27.20	8.08	37.59	41.53	74.00	-32.47	Vertical	Peak
2483.50	54.31	27.26	8.04	37.59	52.02	54.00	-1.98	Horizontal	Average
2500.00	31.87	27.20	8.08	37.59	29.56	54.00	-24.44	Horizontal	Average
2483.50	53.83	27.26	8.04	37.59	51.54	54.00	-2.46	Vertical	Average
2500.00	31.75	27.20	8.08	37.59	29.44	54.00	-24.56	Vertical	Average

## 5.10. Band edge and Spurious Emissions (conducted)

### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

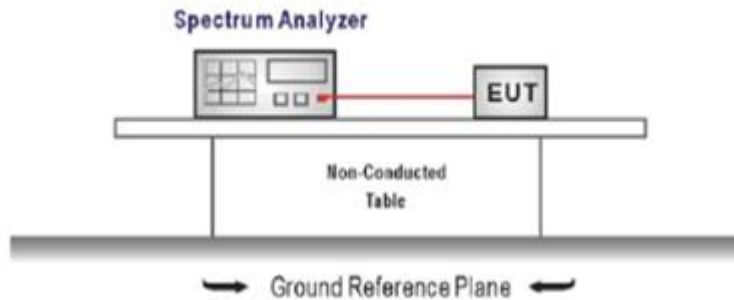

### TEST PROCEDURE




1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW  $\geq$  RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

### TEST MODE:


Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

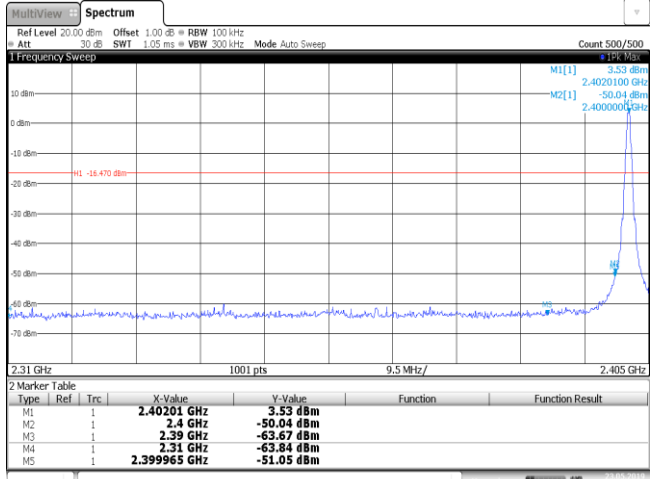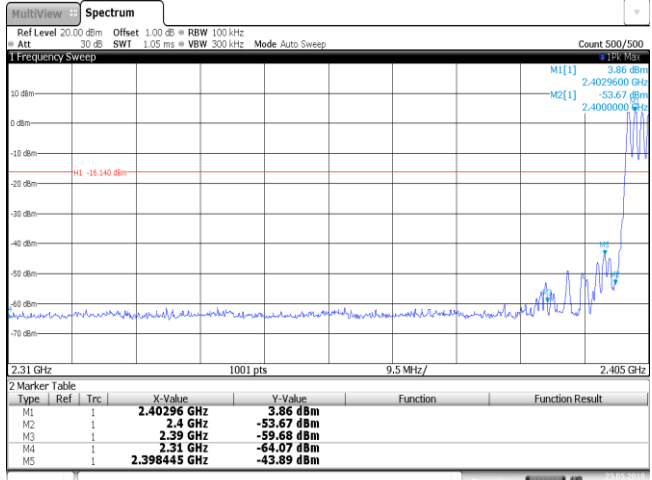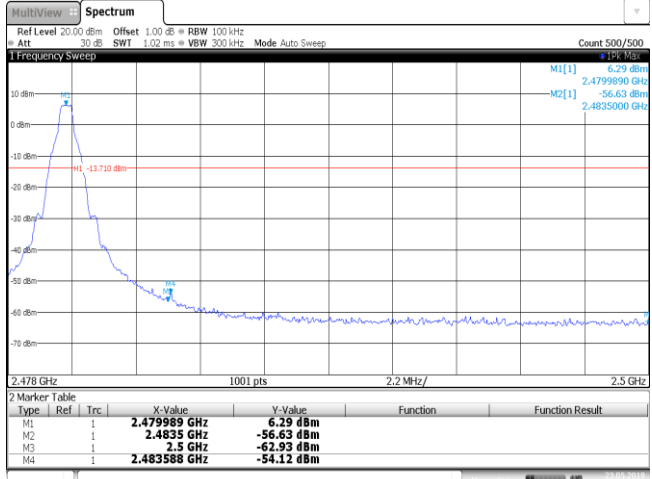Test Item:	Band edge	Modulation type:	GFSK																																										
<p>CH00 No hopping mode</p>	 <p>2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz</p> <table border="1" data-bbox="683 604 1337 705"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40201 GHz</td> <td>3.53 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-50.04 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-63.67 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-63.84 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399965 GHz</td> <td>-51.05 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:37:04</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.40201 GHz	3.53 dBm			M2	1		2.4 GHz	-50.04 dBm			M3	1		2.39 GHz	-63.67 dBm			M4	1		2.31 GHz	-63.84 dBm			M5	1		2.399965 GHz	-51.05 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.40201 GHz	3.53 dBm																																									
M2	1		2.4 GHz	-50.04 dBm																																									
M3	1		2.39 GHz	-63.67 dBm																																									
M4	1		2.31 GHz	-63.84 dBm																																									
M5	1		2.399965 GHz	-51.05 dBm																																									
<p>CH00 Hopping mode</p>	 <p>2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz</p> <table border="1" data-bbox="683 1133 1337 1234"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40296 GHz</td> <td>3.86 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-53.67 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.68 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-64.07 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.398445 GHz</td> <td>-43.89 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:58:18</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.40296 GHz	3.86 dBm			M2	1		2.4 GHz	-53.67 dBm			M3	1		2.39 GHz	-59.68 dBm			M4	1		2.31 GHz	-64.07 dBm			M5	1		2.398445 GHz	-43.89 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.40296 GHz	3.86 dBm																																									
M2	1		2.4 GHz	-53.67 dBm																																									
M3	1		2.39 GHz	-59.68 dBm																																									
M4	1		2.31 GHz	-64.07 dBm																																									
M5	1		2.398445 GHz	-43.89 dBm																																									
<p>CH78 No hopping mode</p>	 <p>2.478 GHz 1001 pts 2.2 MHz/ 2.5 GHz</p> <table border="1" data-bbox="683 1662 1337 1762"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.479989 GHz</td> <td>6.29 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-56.63 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-62.93 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.483588 GHz</td> <td>-54.12 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:41:07</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.479989 GHz	6.29 dBm			M2	1		2.4835 GHz	-56.63 dBm			M3	1		2.5 GHz	-62.93 dBm			M4	1		2.483588 GHz	-54.12 dBm									
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.479989 GHz	6.29 dBm																																									
M2	1		2.4835 GHz	-56.63 dBm																																									
M3	1		2.5 GHz	-62.93 dBm																																									
M4	1		2.483588 GHz	-54.12 dBm																																									


CH78  
Hopping mode

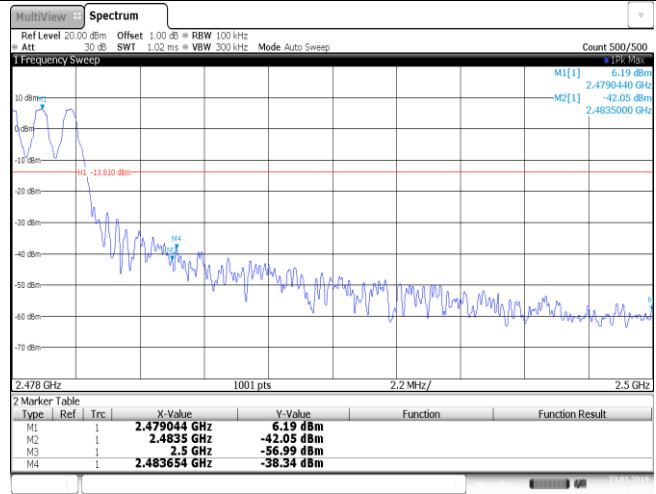




Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK																																										
<p>CH00 No hopping mode</p>	<p>2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40201 GHz</td> <td>-3.12 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-48.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-63.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-63.52 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399965 GHz</td> <td>-49.12 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:44:41</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.40201 GHz	-3.12 dBm			M2	1		2.4 GHz	-48.69 dBm			M3	1		2.39 GHz	-63.69 dBm			M4	1		2.31 GHz	-63.52 dBm			M5	1		2.399965 GHz	-49.12 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.40201 GHz	-3.12 dBm																																									
M2	1		2.4 GHz	-48.69 dBm																																									
M3	1		2.39 GHz	-63.69 dBm																																									
M4	1		2.31 GHz	-63.52 dBm																																									
M5	1		2.399965 GHz	-49.12 dBm																																									
<p>CH00 Hopping mode</p>	<p>2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.404953 GHz</td> <td>-3.61 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-50.93 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-63.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-62.67 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.396545 GHz</td> <td>-49.46 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 21:04:56</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.404953 GHz	-3.61 dBm			M2	1		2.4 GHz	-50.93 dBm			M3	1		2.39 GHz	-63.20 dBm			M4	1		2.31 GHz	-62.67 dBm			M5	1		2.396545 GHz	-49.46 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.404953 GHz	-3.61 dBm																																									
M2	1		2.4 GHz	-50.93 dBm																																									
M3	1		2.39 GHz	-63.20 dBm																																									
M4	1		2.31 GHz	-62.67 dBm																																									
M5	1		2.396545 GHz	-49.46 dBm																																									
<p>CH78 No hopping mode</p>	<p>2.478 GHz 1001 pts 2.2 MHz/ 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.480011 GHz</td> <td>-1.14 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-57.43 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-63.54 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.483766 GHz</td> <td>-57.23 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:47:57</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.480011 GHz	-1.14 dBm			M2	1		2.4835 GHz	-57.43 dBm			M3	1		2.5 GHz	-63.54 dBm			M4	1		2.483766 GHz	-57.23 dBm									
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.480011 GHz	-1.14 dBm																																									
M2	1		2.4835 GHz	-57.43 dBm																																									
M3	1		2.5 GHz	-63.54 dBm																																									
M4	1		2.483766 GHz	-57.23 dBm																																									




CH78  
Hopping mode



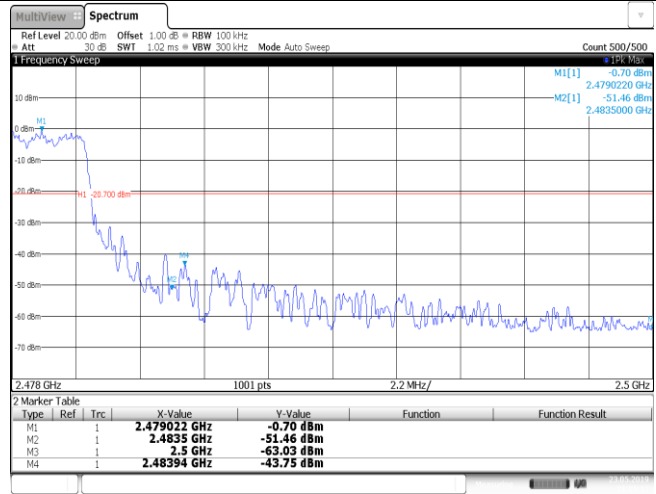


Date: 23 MAY 2019 21:05:11

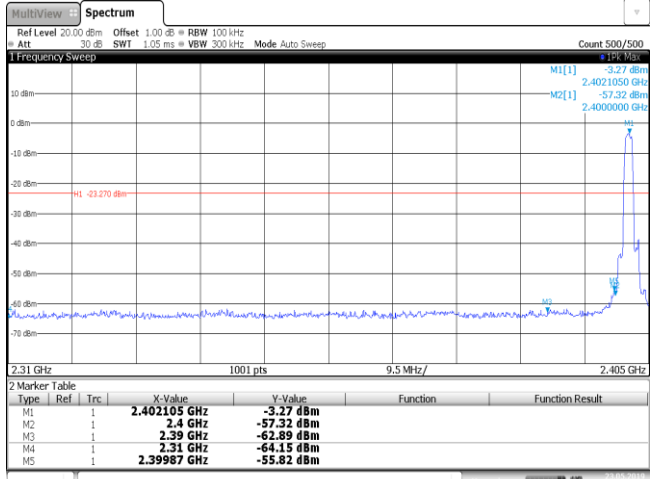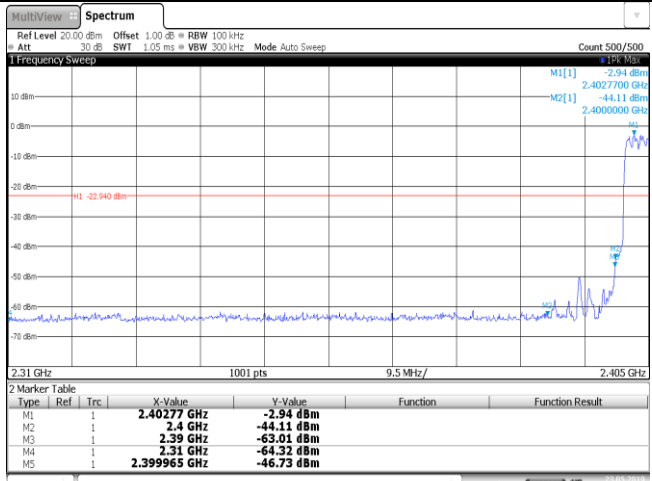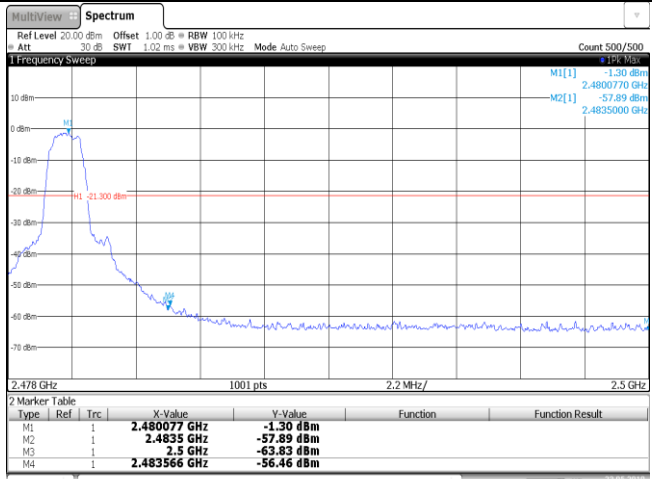
Test Item:	Band edge	Modulation type:	8DPSK																																										
<p>CH00 No hopping mode</p>	 <p>2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.402105 GHz</td> <td>-3.27 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-57.32 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-62.89 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-64.15 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.39987 GHz</td> <td>-55.82 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:49:39</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.402105 GHz	-3.27 dBm			M2	1		2.4 GHz	-57.32 dBm			M3	1		2.39 GHz	-62.89 dBm			M4	1		2.31 GHz	-64.15 dBm			M5	1		2.39987 GHz	-55.82 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.402105 GHz	-3.27 dBm																																									
M2	1		2.4 GHz	-57.32 dBm																																									
M3	1		2.39 GHz	-62.89 dBm																																									
M4	1		2.31 GHz	-64.15 dBm																																									
M5	1		2.39987 GHz	-55.82 dBm																																									
<p>CH00 Hopping mode</p>	 <p>2.31 GHz 1001 pts 9.5 MHz/ 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40277 GHz</td> <td>-2.94 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-44.11 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-63.01 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-64.32 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.39965 GHz</td> <td>-46.73 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 21:44:22</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.40277 GHz	-2.94 dBm			M2	1		2.4 GHz	-44.11 dBm			M3	1		2.39 GHz	-63.01 dBm			M4	1		2.31 GHz	-64.32 dBm			M5	1		2.39965 GHz	-46.73 dBm		
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.40277 GHz	-2.94 dBm																																									
M2	1		2.4 GHz	-44.11 dBm																																									
M3	1		2.39 GHz	-63.01 dBm																																									
M4	1		2.31 GHz	-64.32 dBm																																									
M5	1		2.39965 GHz	-46.73 dBm																																									
<p>CH78 No hopping mode</p>	 <p>2.478 GHz 1001 pts 2.2 MHz/ 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-Value</th> <th>Y-Value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.480077 GHz</td> <td>-1.30 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-57.89 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-63.83 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.483566 GHz</td> <td>-56.46 dBm</td> <td></td> <td></td> </tr> </tbody> </table> <p>Date: 23 MAY 2019 20:53:28</p>			Type	Ref	Trc	X-Value	Y-Value	Function	Function Result	M1	1		2.480077 GHz	-1.30 dBm			M2	1		2.4835 GHz	-57.89 dBm			M3	1		2.5 GHz	-63.83 dBm			M4	1		2.483566 GHz	-56.46 dBm									
Type	Ref	Trc	X-Value	Y-Value	Function	Function Result																																							
M1	1		2.480077 GHz	-1.30 dBm																																									
M2	1		2.4835 GHz	-57.89 dBm																																									
M3	1		2.5 GHz	-63.83 dBm																																									
M4	1		2.483566 GHz	-56.46 dBm																																									

CH78  
Hoppig mode

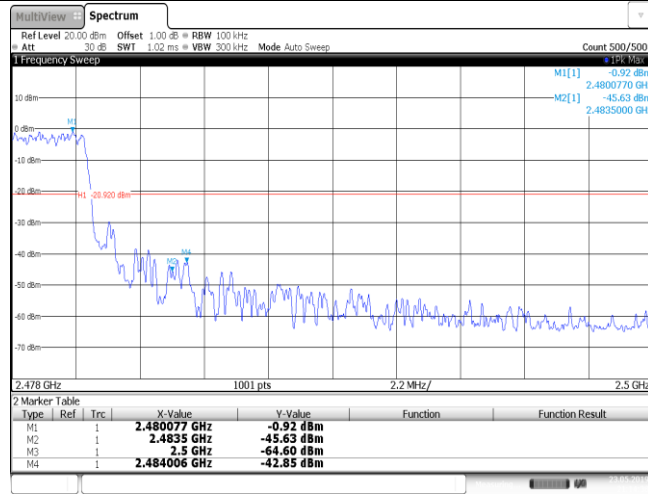


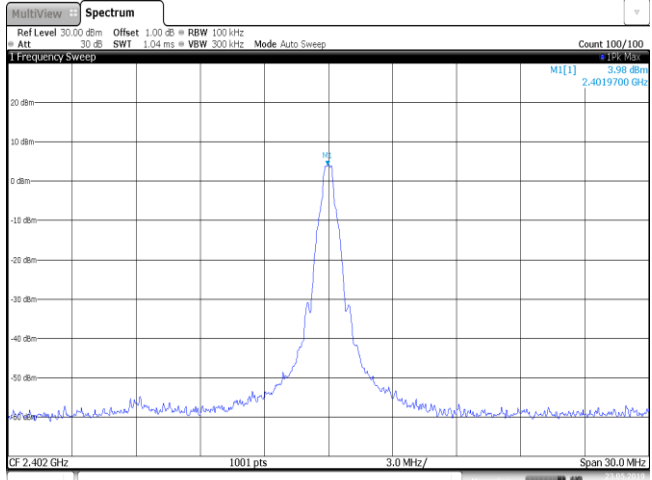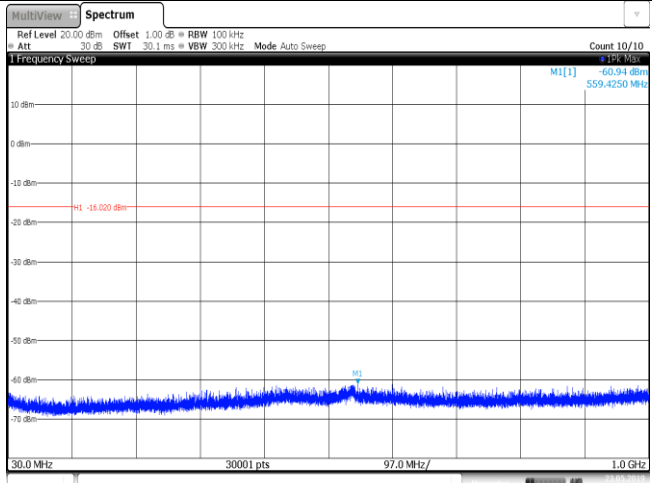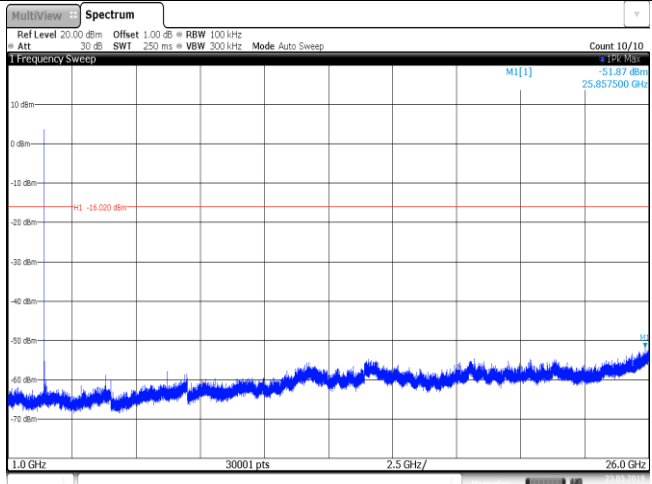Test Item:	SE	Modulation type:	GFSK
<p>CH00 Reference level</p>	 <p>Ref Level 30.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWF 1.04 ms VBW 300 kHz Mode Auto Sweep Count 100/100 M1[1] 3.98 dBm 2.4019700 GHz CF 2.402 GHz 1001 pts 3.0 MHz/ Span 30.0 MHz Date: 23 MAY 2019 20:07:13</p>		
<p>CH00 30MHz~1000MHz</p>	 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWF 30.1 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -60.94 dBm 559.4250 MHz H1 -16.000 dBm 30.0 MHz 30001 pts 97.0 MHz/ 1.0 GHz Date: 23 MAY 2019 20:07:20</p>		
<p>CH00 1GHz~26GHz</p>	 <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWF 250 ms VBW 300 kHz Mode Auto Sweep Count 10/10 M1[1] -51.87 dBm 25.857500 GHz H1 -16.000 dBm 1.0 GHz 30001 pts 2.5 GHz/ 26.0 GHz Date: 23 MAY 2019 20:08:20</p>		


CH39  
Reference level

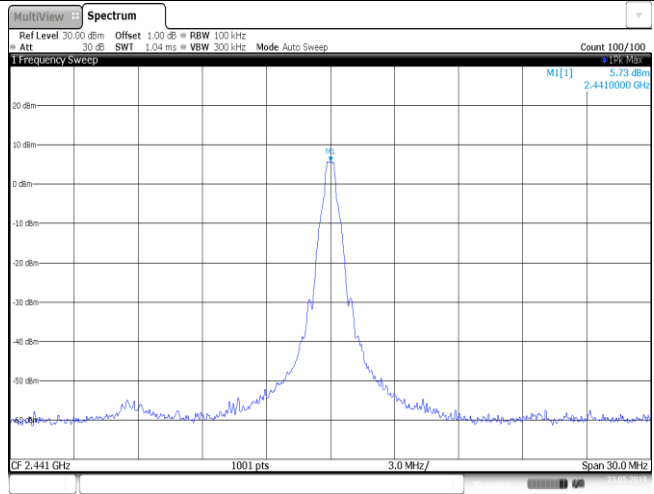


CH39  
30MHz~1000MHz

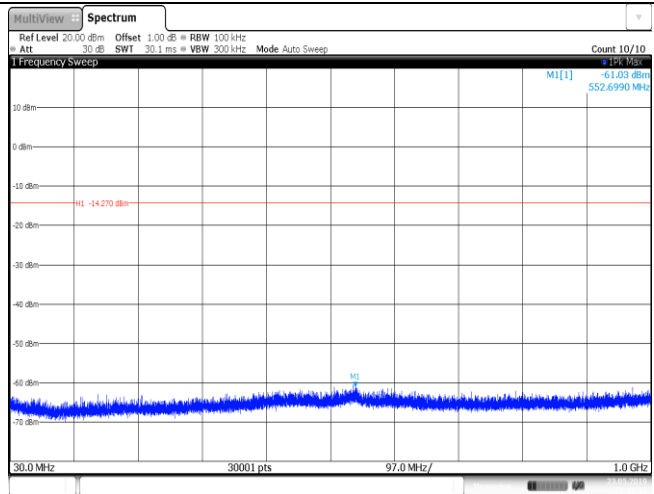


CH39  
1GHz~26GHz

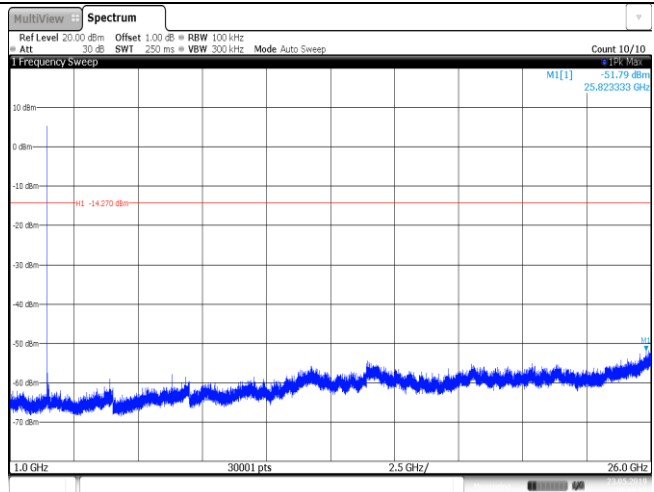


CH78  
Reference level



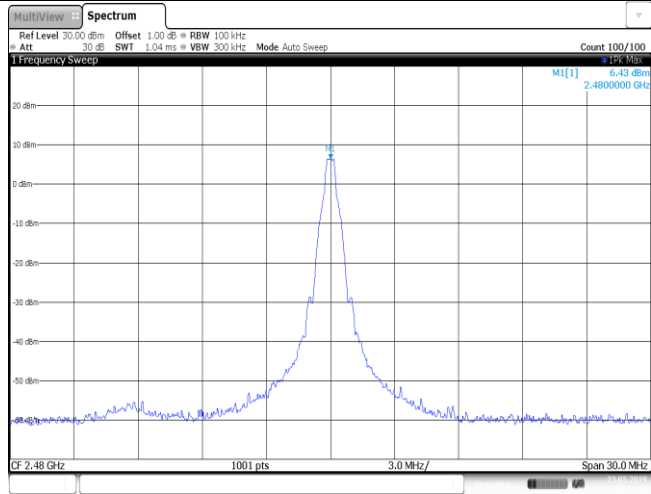


CH78  
30MHz~1000MHz

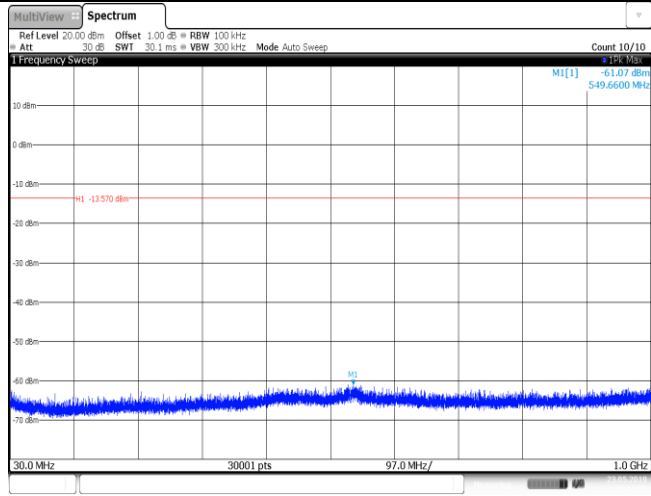


CH78  
1GHz~26GHz

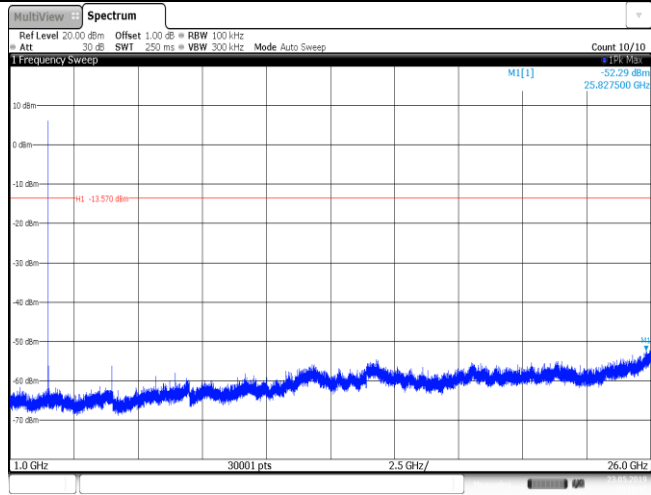

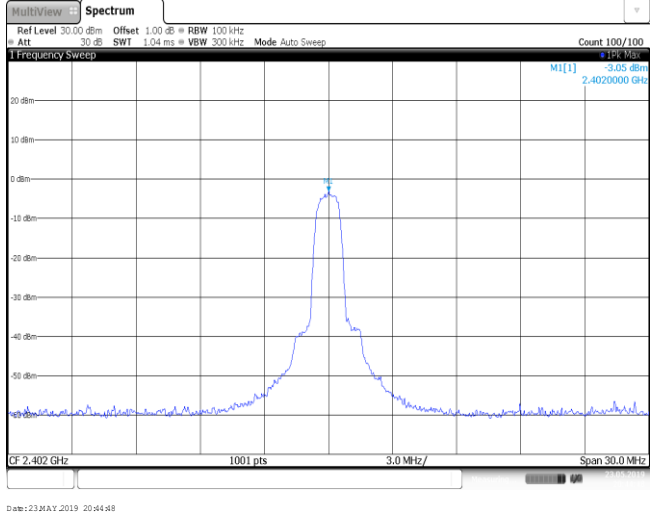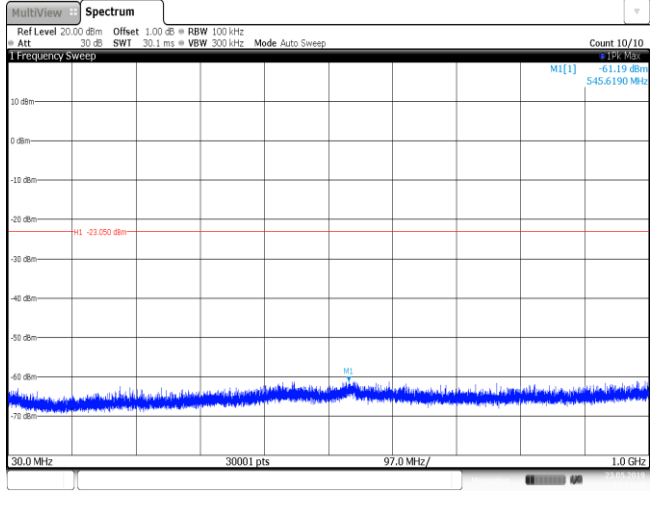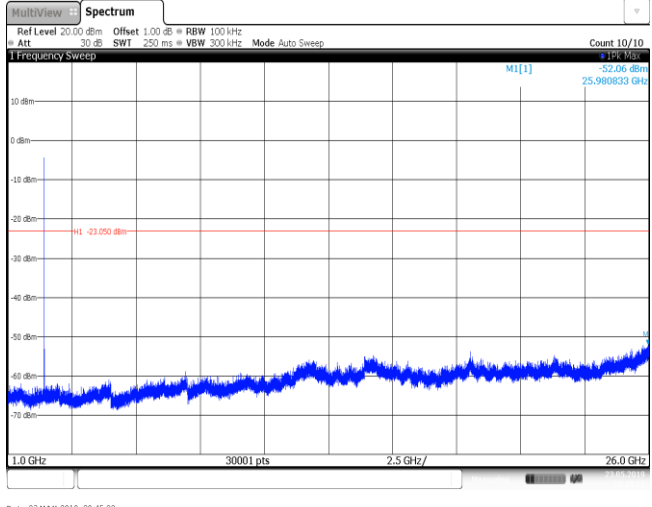
Test Item:	SE	Modulation type:	$\pi/4$ DQPSK
CH00 Reference level			
CH00 30MHz~1000MHz			
CH00 1GHz~26GHz			

CH39  
Reference level

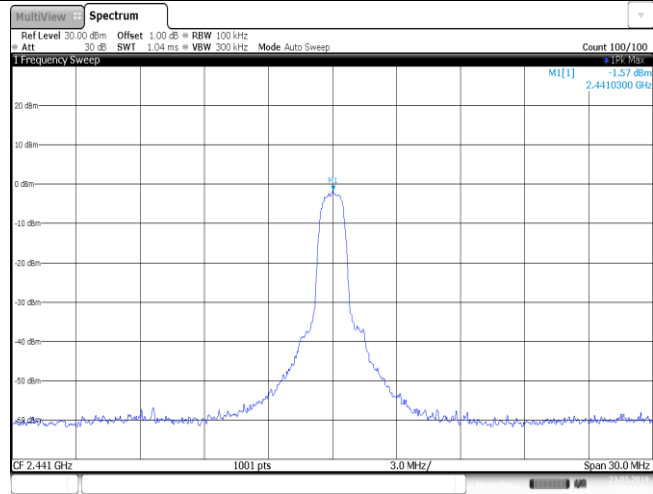


Date: 23 MAY 2019 20:46:24

CH39  
30MHz~1000MHz

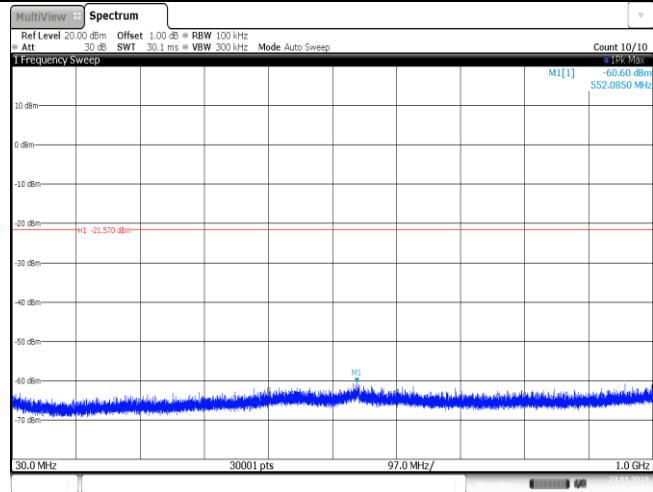

Date: 23 MAY 2019 20:46:40


CH39  
1GHz~26GHz

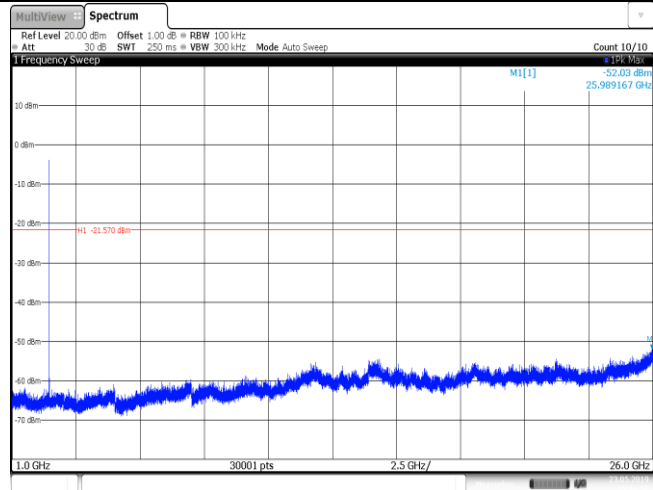


Date: 23 MAY 2019 20:46:58




CH78  
Reference level



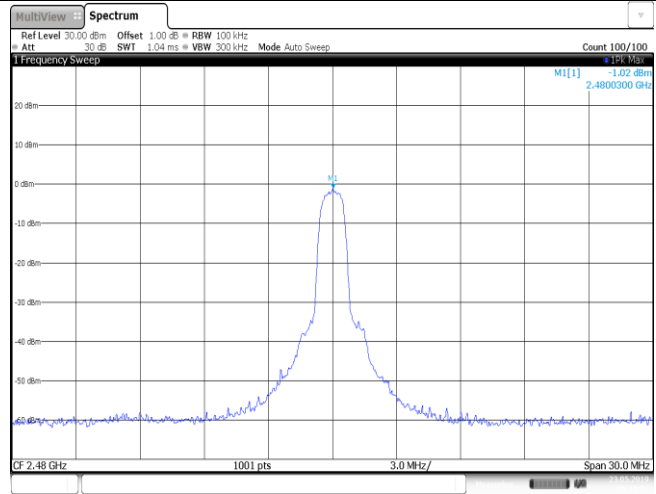


CH78  
30MHz~1000MHz

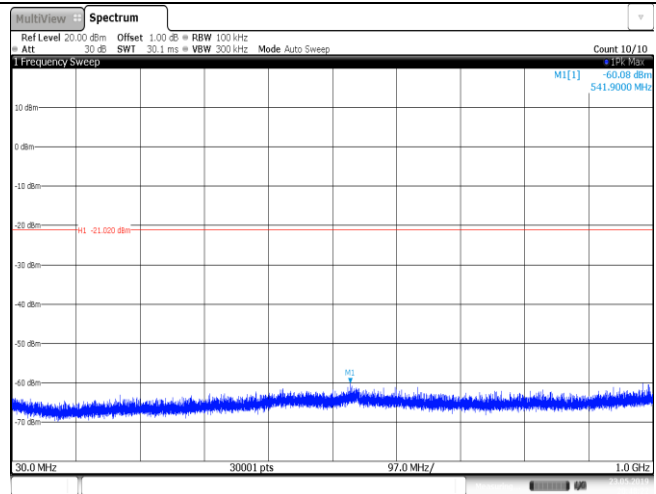


CH78  
1GHz~26GHz

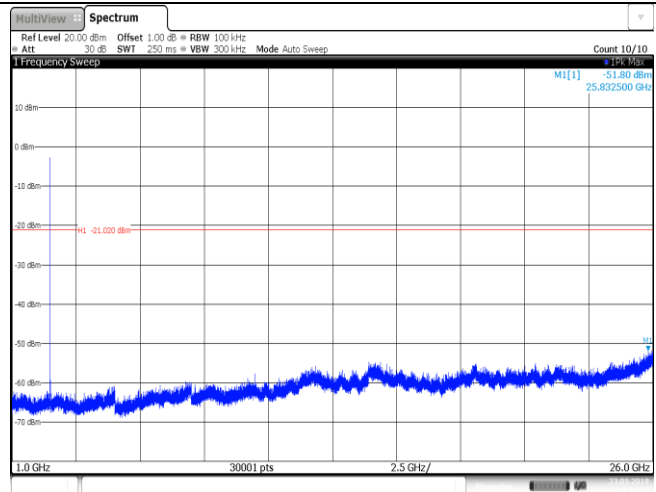

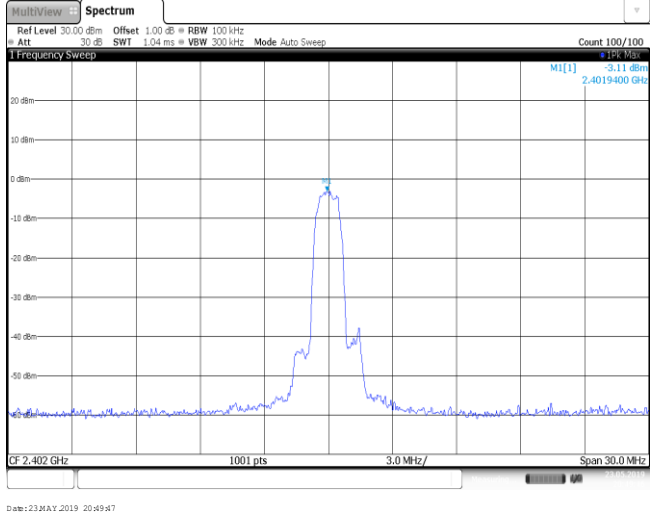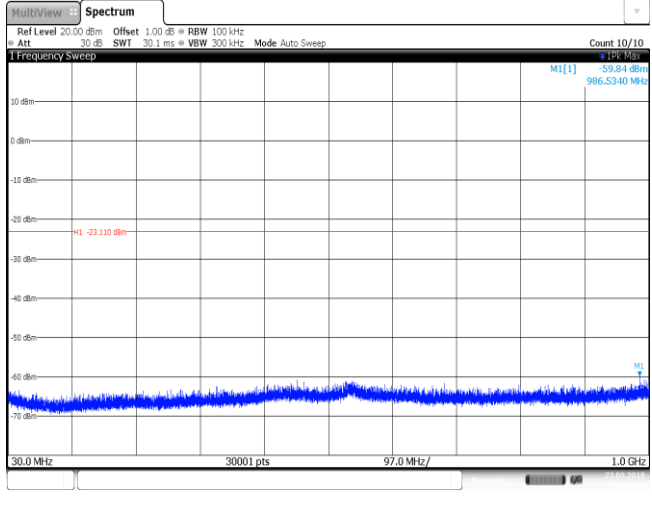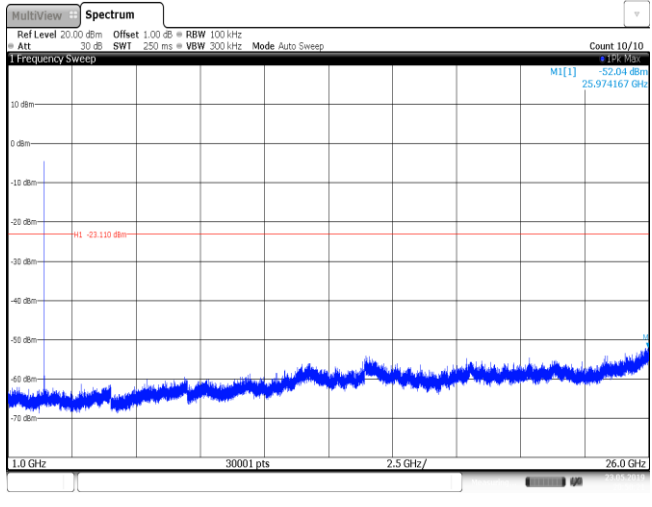
Test Item:	SE	Modulation type:	8DPSK
<p>CH00 Reference level</p>			
<p>CH00 30MHz~1000MHz</p>			
<p>CH00 1GHz~26GHz</p>			

CH39  
Reference level

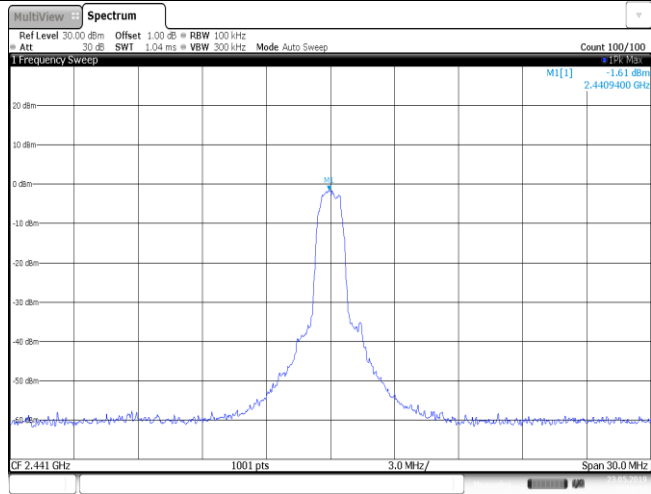


Date: 23 MAY 2019 20:51:34

CH39  
30MHz~1000MHz

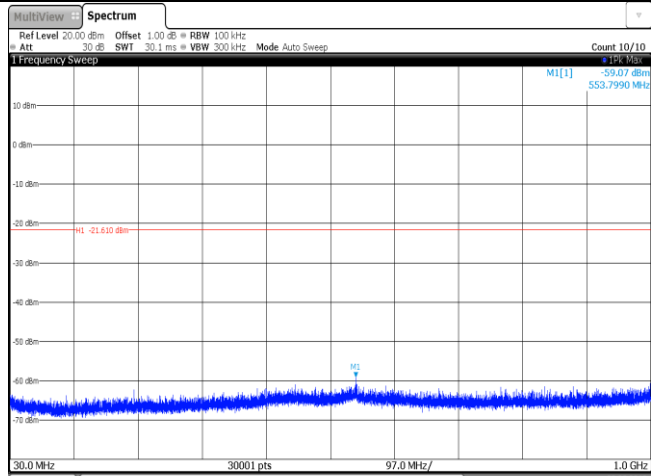


Date: 23 MAY 2019 20:51:51

CH39  
1GHz~26GHz

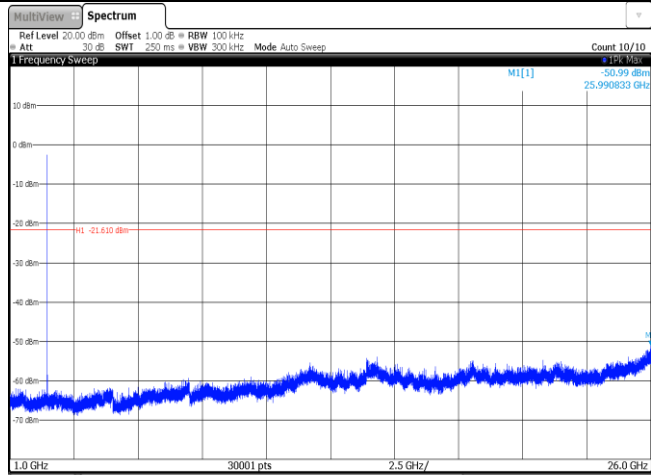


Date: 23 MAY 2019 20:52:28


CH78  
Reference level

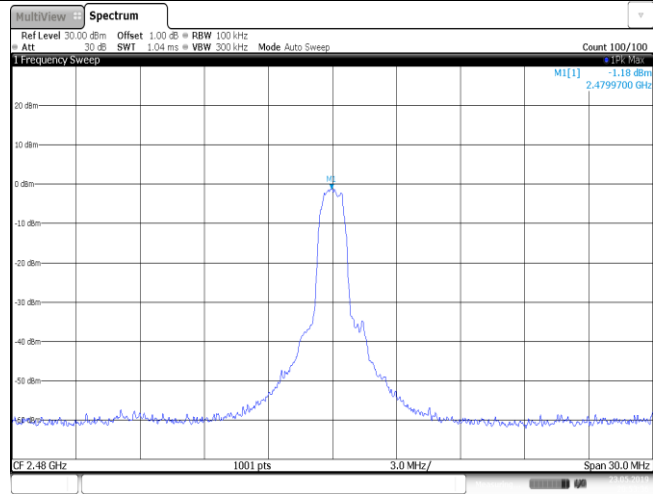

CH78  
30MHz~1000MHz

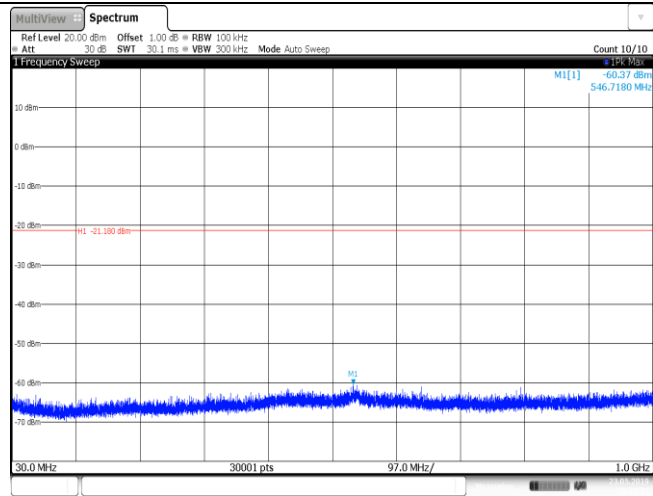

CH78  
1GHz~26GHz

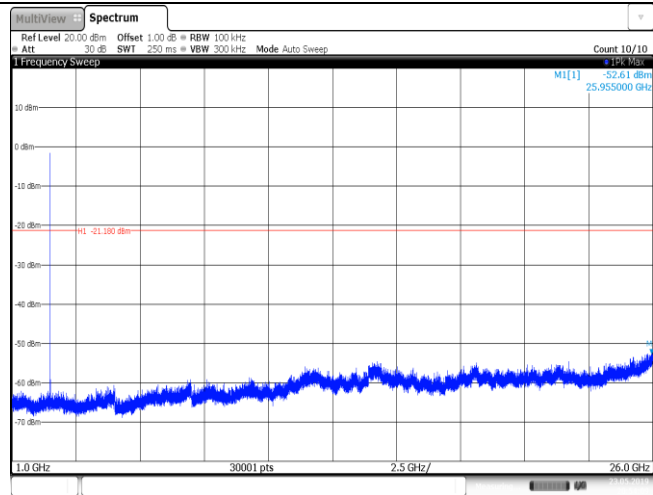

### 5.11. Spurious Emissions (radiated)


#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

#### TEST CONFIGURATION


- Below 30 MHz

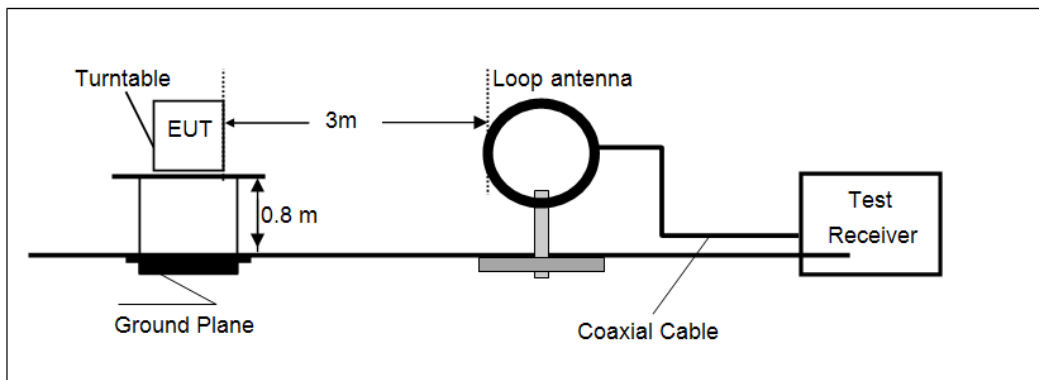

- 30 MHz ~1000 MHz

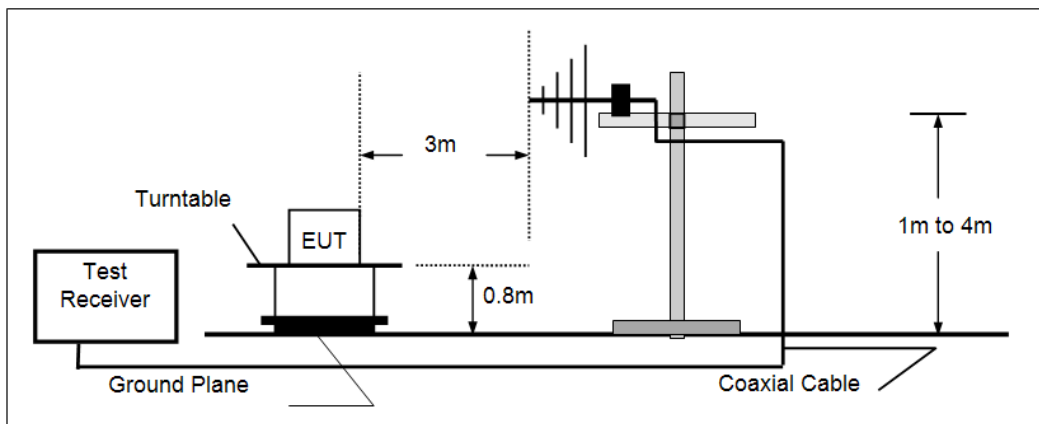

- Above 1 GHz

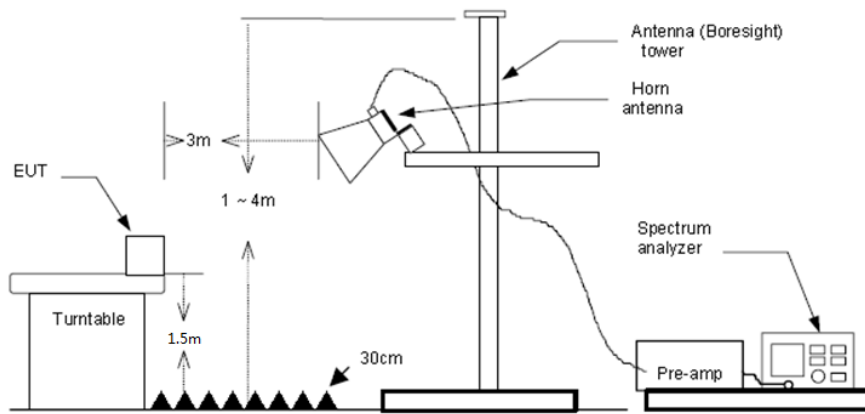

## TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table with 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 1 GHz:
    - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
    - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) From 1 GHz to 10<sup>th</sup> harmonic:
    - RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
    - RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

## TEST MODE:

Please refer to the clause 3.3

## TEST RESULTS

Passed       Not Applicable

Note:


- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

### ➤ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

➤ 30 MHz ~ 1 GHz

Polarization: Vertical

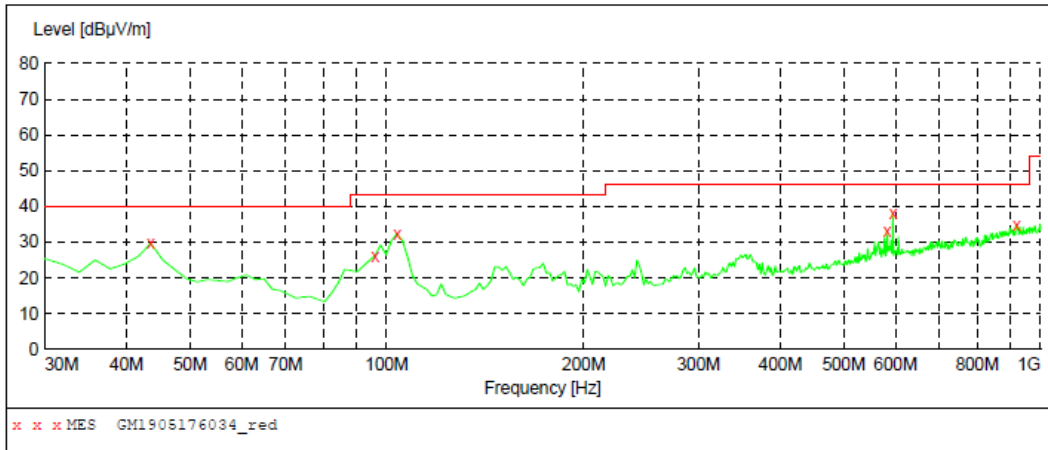


**MEASUREMENT RESULT: "GM1905176034\_red"**

5/17/2019 1:23PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
43.580000	29.70	-9.2	40.0	10.3	QP	100.0	0.00	VERTICAL
95.960000	26.20	-11.3	43.5	17.3	QP	100.0	22.00	VERTICAL
103.720000	32.40	-10.6	43.5	11.1	QP	100.0	113.00	VERTICAL
582.900000	33.20	0.1	46.0	12.8	QP	100.0	88.00	VERTICAL
594.540000	38.20	0.7	46.0	7.8	QP	100.0	77.00	VERTICAL
918.520000	34.70	6.7	46.0	11.3	QP	100.0	88.00	VERTICAL

Polarization: Horizontal

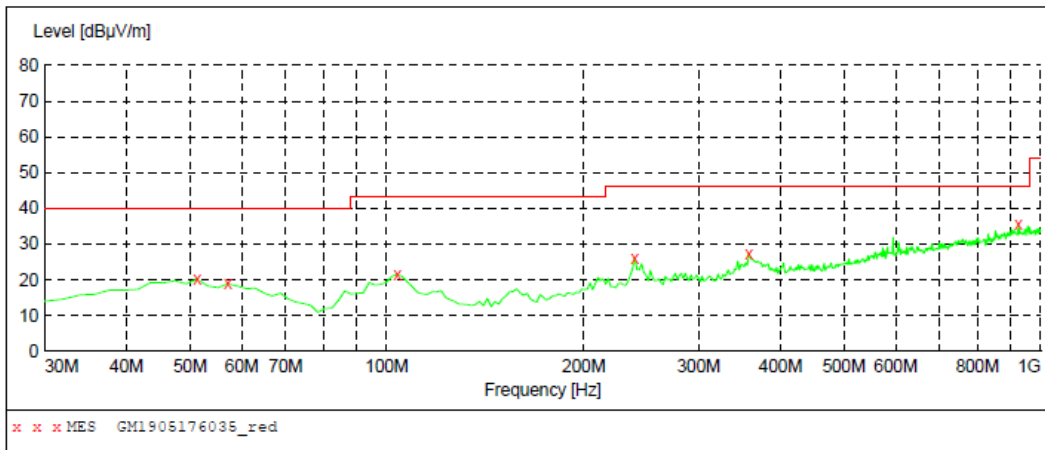

**MEASUREMENT RESULT: "GM1905176035\_red"**

5/17/2019 1:27PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
51.340000	20.20	-8.9	40.0	19.8	QP	100.0	286.00	HORIZONTAL
57.160000	18.90	-9.5	40.0	21.1	QP	100.0	39.00	HORIZONTAL
103.720000	21.60	-10.6	43.5	21.9	QP	100.0	0.00	HORIZONTAL
239.520000	26.10	-9.0	46.0	19.9	QP	100.0	261.00	HORIZONTAL
357.860000	27.30	-5.8	46.0	18.7	QP	100.0	169.00	HORIZONTAL
924.340000	35.50	6.7	46.0	10.5	QP	300.0	251.00	HORIZONTAL

## ➤ 1 GHz ~ 25 GHz

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2995.54	43.91	28.60	8.94	37.58	43.87	74.00	-30.13	Vertical	Peak
3983.75	37.66	29.70	10.50	36.77	41.09	74.00	-32.91	Vertical	Peak
5406.96	33.70	31.53	12.49	34.59	43.13	74.00	-30.87	Vertical	Peak
7394.88	31.88	36.30	14.73	33.20	49.71	74.00	-24.29	Vertical	Peak
2995.54	44.86	28.60	8.94	37.58	44.82	74.00	-29.18	Horizontal	Peak
3534.54	36.58	29.10	9.96	37.11	38.53	74.00	-35.47	Horizontal	Peak
5138.58	33.97	31.74	12.04	35.10	42.65	74.00	-31.35	Horizontal	Peak
7470.56	31.63	36.16	14.85	33.07	49.57	74.00	-24.43	Horizontal	Peak

CH39									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2995.54	39.85	28.60	8.94	37.58	39.81	74.00	-34.19	Vertical	Peak
3983.75	35.83	29.70	10.50	36.77	39.26	74.00	-34.74	Vertical	Peak
5125.52	32.79	31.80	12.04	35.13	41.50	74.00	-32.50	Vertical	Peak
8125.22	31.35	36.92	15.66	33.03	50.90	74.00	-23.10	Vertical	Peak
2972.75	37.99	28.57	8.89	37.58	37.87	74.00	-36.13	Horizontal	Peak
3168.08	38.65	28.80	9.35	37.42	39.38	74.00	-34.62	Horizontal	Peak
5311.47	35.68	31.32	12.36	34.77	44.59	74.00	-29.41	Horizontal	Peak
8042.90	31.37	37.06	15.67	33.06	51.04	74.00	-22.96	Horizontal	Peak

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2987.92	37.96	28.59	8.92	37.58	37.89	74.00	-36.11	Vertical	Peak
3983.75	36.61	29.70	10.50	36.77	40.04	74.00	-33.96	Vertical	Peak
6594.52	31.71	34.19	14.06	33.67	46.29	74.00	-27.71	Vertical	Peak
7527.83	32.11	36.13	14.89	33.02	50.11	74.00	-23.89	Vertical	Peak
2987.92	47.59	28.59	8.92	37.58	47.52	74.00	-26.48	Horizontal	Peak
3983.75	37.34	29.70	10.50	36.77	40.77	74.00	-33.23	Horizontal	Peak
5956.11	32.57	32.41	13.07	34.17	43.88	74.00	-30.12	Horizontal	Peak
7357.33	32.01	36.30	14.66	33.26	49.71	74.00	-24.29	Horizontal	Peak

## Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.




## 6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)





Radiated Emissions





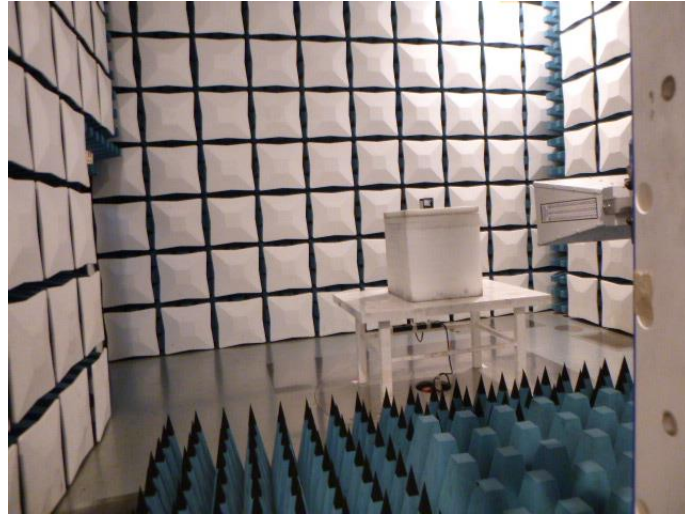


## 7. EXTERANAL AND INTERNAL PHOTOS




Exteranal Photos


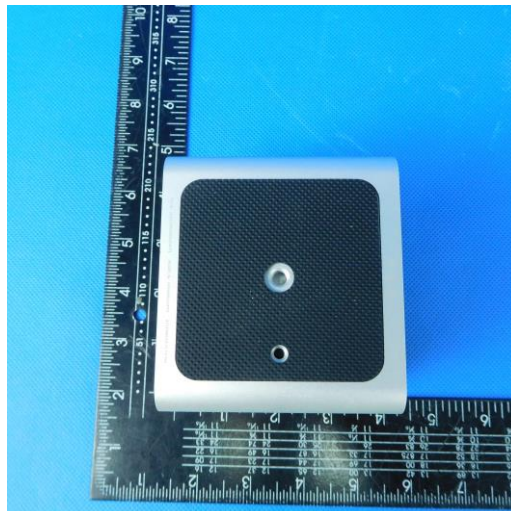
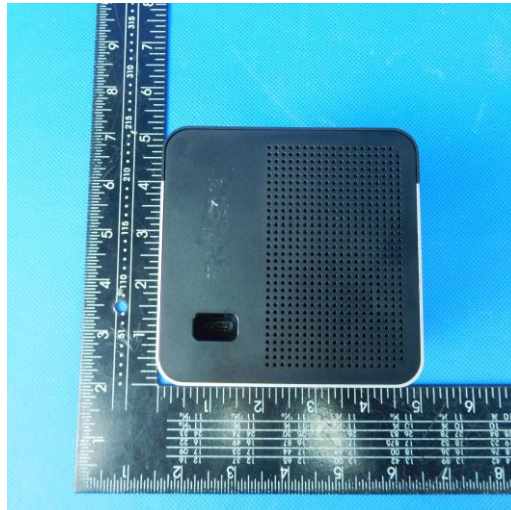




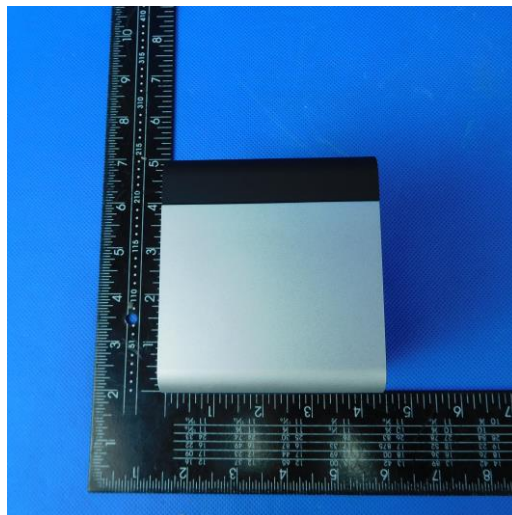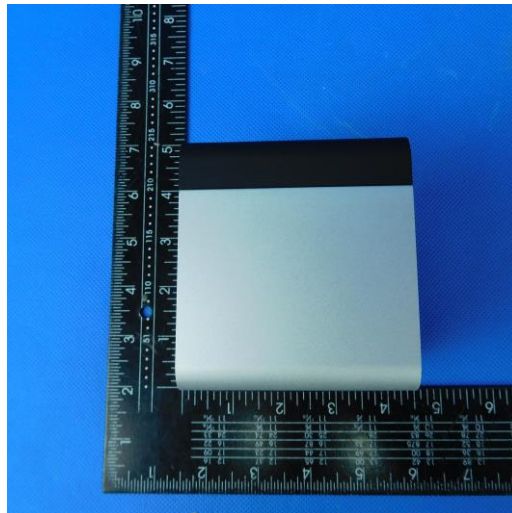
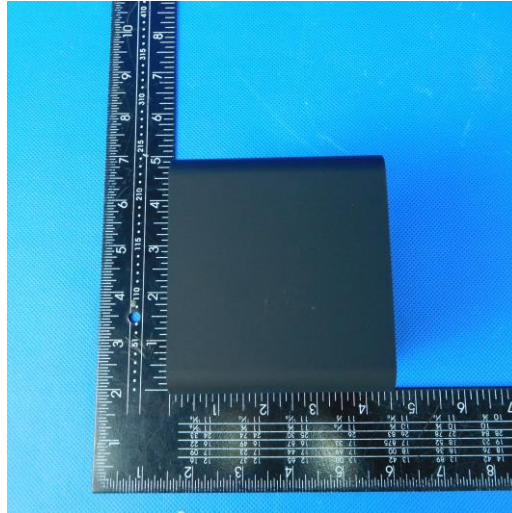


Internal Photos

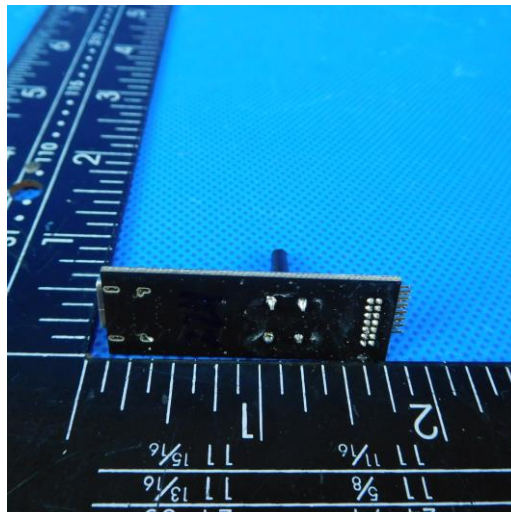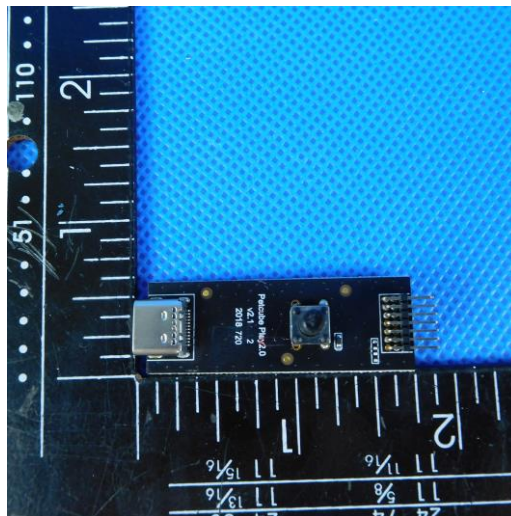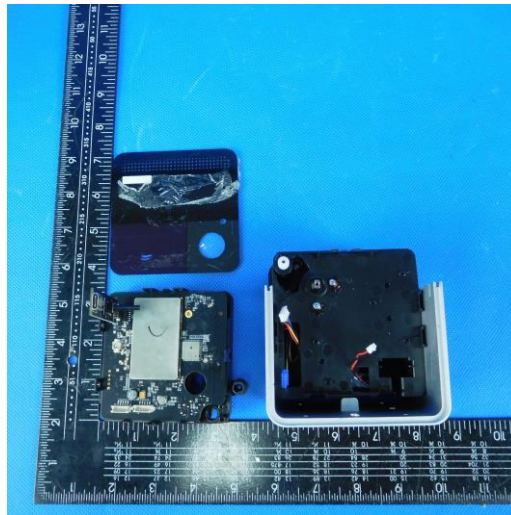

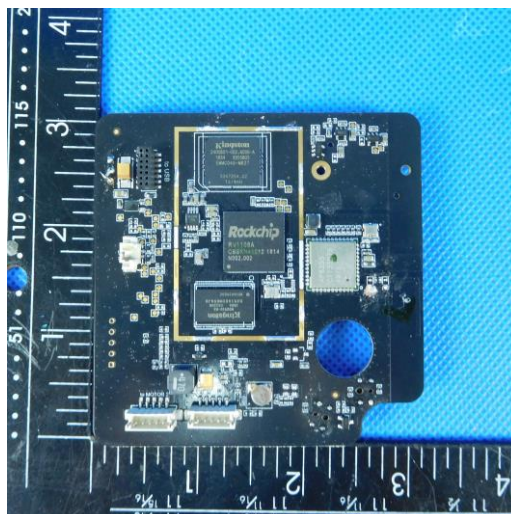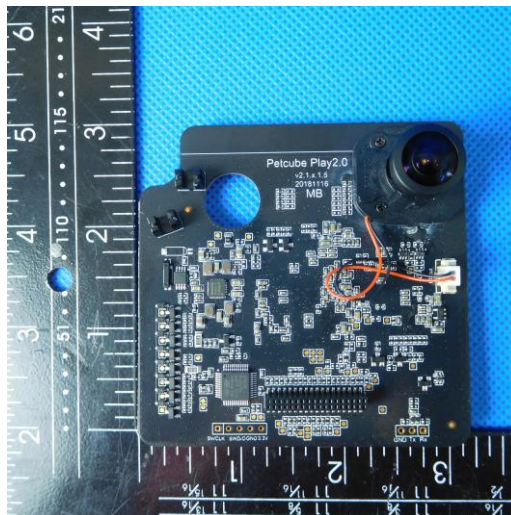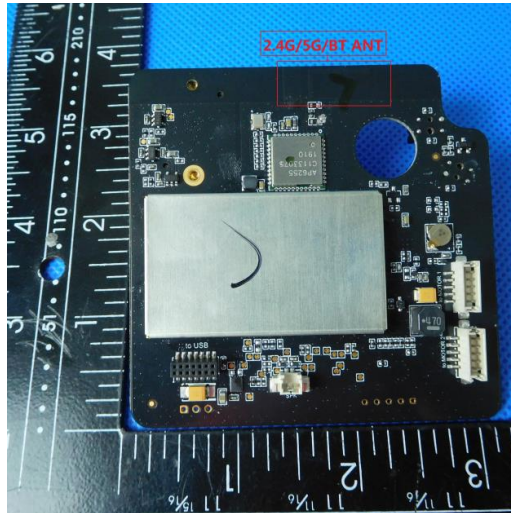



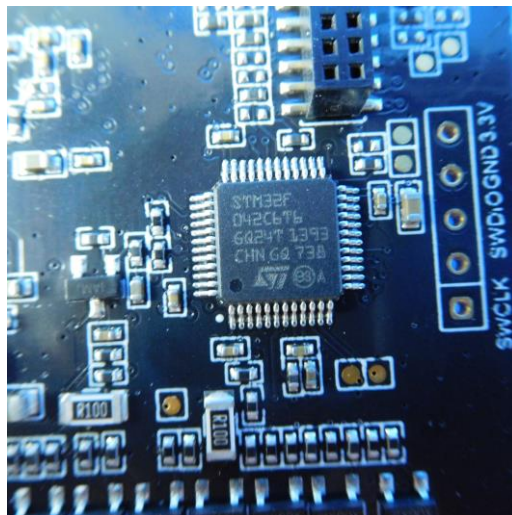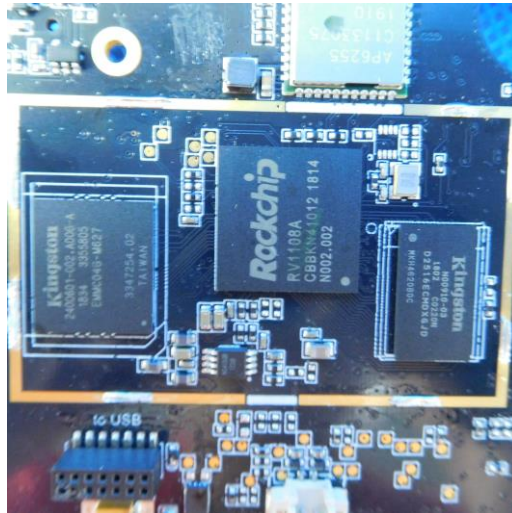

-----End of Report-----