

FCC Test Report

Report No.: AGC11189180105FE03

FCC ID : 2AK4R-ROCKET807

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Speaker

BRAND NAME : Ridgeway

MODEL NAME : See page 4

CLIENT: RIDER BEST.INC

DATE OF ISSUE : Feb. 02, 2018

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spower this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true and the authenticity of the authenticity of

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 59

Report Revise Record

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0 | June 1 S | Feb. 02, 2018 | Valid | Initial release |



TABLE OF CONTENTS

| 1. VERIFICATION OF CONFORMITY | 4 |
|--|----------------------|
| 2. GENERAL INFORMATION | 5 |
| 2.2. TABLE OF CARRIER FREQUENCYS | 5 |
| 3. MEASUREMENT UNCERTAINTY | |
| 4. DESCRIPTION OF TEST MODES | |
| 5. SYSTEM TEST CONFIGURATION | 8 |
| 5.1. CONFIGURATION OF EUT SYSTEM 5.2. EQUIPMENT USED IN EUT SYSTEM 5.3. SUMMARY OF TEST RESULTS | 8 |
| 6. TEST FACILITY | 10 |
| 7.TEST METHOD | 11 |
| 8. TEST EQUIPMENT LIST | |
| 9. RADIATED EMISSION | 12 |
| 9.1TEST LIMIT 9.2. MEASUREMENT PROCEDURE 9.3. TEST SETUP 9.4. TEST RESULT | 12 13 15 17 |
| 10. BAND EDGE EMISSION | 32 |
| 10.1. MEASUREMENT PROCEDURE | 32 33 |
| 11. 20DB BANDWIDTH | 37 |
| 11.1. MEASUREMENT PROCEDURE | 37 |
| 12. FCC LINE CONDUCTED EMISSION TEST | 44 |
| 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST | 44 45 45 46 |
| APPENDIX A: PHOTOGRAPHS OF TEST SETUP | 48 |
| ADDENIDIY BY DUOTOGDADUS OF FUT | 51 |



Page 4 of 59

1. VERIFICATION OF CONFORMITY

| Applicant | RIDER BEST.INC | | | | |
|--------------------------|--|--|--|--|--|
| Address | 428 SOUTH 9TH AVE, CITY OF INDUSTRY CA 91746 USA | | | | |
| Manufacturer | Guangzhou Ledangjia Electronics Co.,Ltd | | | | |
| Address | C5 Building, Guangyong Industrial Zone, Huangbian,Baiyun District, GZ | | | | |
| Product Designation | Speaker | | | | |
| Brand Name | Ridgeway | | | | |
| Test Model | Rocket807 | | | | |
| Series Model | Rocker808, Rocker809, Rocker810, Rocker811, Rocker812, Rocker813, Rocker814, Rocker815, Rocker816, Rocker817 | | | | |
| Difference description | All the same except for the appearance structure | | | | |
| Date of test | Jan. 24, 2018 to Jan. 31, 2018 | | | | |
| Deviation | None None | | | | |
| Condition of Test Sample | Normal Normal | | | | |
| Report Template | AGCRT-US-BR/RF | | | | |

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

| Tested By _ | pong lu | |
|----------------------------|---------------------------|---------------|
| in in | Berg Lu(Lu Bing) | Jan. 31, 2018 |
| S The state of Contraction | Forety ce | |
| Reviewed By | Forrest Lei(Lei Yonggang) | Feb. 02, 2018 |

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 5 of 59

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

| 7111ajor teeriniear desemp | TO LOT IS described as following |
|------------------------------|---|
| Operation Frequency | 2.402 GHz to 2.480GHz |
| RF Output Power | -1.67dBm(Max EIRP Power=Max radiation field-95.2) |
| Bluetooth Version | V3.0 |
| Modulation | BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK |
| Number of channels | 79 for BR/EDR |
| Hardware Version | V1.9 |
| Software Version | V059 |
| Antenna Designation | PCB Antenna |
| Antenna Gain | OdBi A A A A A A A A A A A A A A A A A A A |
| Power Supply | DC 7.4V by battery |
| Charging Voltage(By adapter) | INPUT: AC 100-240V 50/60Hz OUTPUT:9V===2.0A |

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

| Frequency Band | Channel Number | Frequency |
|-----------------------|--|---------------------------------------|
| 70 | 0 15 15 15 15 15 15 15 15 15 15 15 15 15 | 2402MHz |
| | The state of the s | 2403MHz |
| | | 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 |
| | 38 | 2440 MHz |
| 2400~2483.5MHz | 39 | 2441 MHz |
| | 40 0 | 2442 MHz |
| | | · · · · · · · · · · · · · · · · · · · |
| | 77 | 2479 MHz |
| The Communication (6) | 78 | 2480 MHz |



Page 6 of 59

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

4. DESCRIPTION OF TEST MODES

| 1 | NO. | TEST MODE DESCRIPTION |
|-----------------|----------------------|---------------------------|
| ® % | asti Ton of Ginose ® | Low channel GFSK |
| CO | 2 | Middle channel GFSK |
| | 3 | High channel GFSK |
| 将 河川 | 4 Karmalana | Low channel π /4-DQPSK |
| © \$ | 5 on of Clobs | Middle channel π /4-DQPSK |
| CO | 6 | High channel π /4-DQPSK |
| 1/2 | 7 | Low channel 8DPSK |
| F of Global Com | 8 @ # 1000 | Middle channel 8DPSK |
| Allestan | 9 | High channel 8DPSK |
| | 10 | BT Link with charging |
| 5 | 11th Acomplians | BT Link |

Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.



Report No.: AGC11189180105FE03 Page 7 of 59

Software Setting 🚣 AppoTech RF Control Kit V4.2.17 Specification CW6611x IC Model FIXPXmode (1)check FIX_PX_24xx (2)check Frequency to set Frequency number COM Port Info <u>S</u>end FIXTXmode (1)uncheck FIX_RX_24xx COM3 921600 ▼ Rate: (2)check Frequency to set Frequency number (3)check power to set TX signal amplitude (4)Modulation Enable OFF DUT MODE | FCC Mode ОК (1)uncheck FIX_RX_24xx TX Modulation (2)check Frequency to set Frequency number mode RF Trim (3)check power to set TX signal amplitude (4)Modulation Enable ON ☐ Fix_RX_24xx OFF SingleTone Hopping: (5)select Packet Type ▼ Frequency ▼ (2-80)Tx Modulation: Hopping mode (1)uncheck FIX_PX_24xx (2)uncheck Frequency to enable Hopping ON and TX (0-7)Packet Type: Modulation OFF (3)check power Test scenario 语言 (4)select Packet Type 3 Transmitter testI1010 pattern

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.




Page 8 of 59

5. SYSTEM TEST CONFIGURATION


5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, testing may be performed while adapter removed.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

| Item | Equipment | Mfr/Brand | Model/Type No. | Remark |
|------|--------------|-----------|----------------|-----------|
| 1 , | Speaker | Ridgeway | Rocket807 | EUT |
| 2 | Battery | HS HS | 18650 | Accessory |
| 3 | Adapter | N/A | SX-9200 | Accessory |
| 4 | PC | APPLE | A1465 | A.E |
| 5 | Mobile phone | Vivo | - X5 | A.E |
| 6 | SD Card | Kingston | SDA10/16GB | A.E |
| 7 | U-Disk | Kingston | DT 101G2/16GB | A.E |
| 8 | Load | HPX | RX24 | A.E |
| 9 | Microphone | N/A | N/A | A.E |
| 10 | Control box | DOFLY | N/A | A.E |
| 11 | AUX IN Cable | N/A | 2m unshielded | A.E |



Page 9 of 59

5.3. SUMMARY OF TEST RESULTS

| FCC RULES | DESCRIPTION OF TEST | RESULT | |
|-----------------------|---------------------|-----------|--|
| §15.249(a) §15.209 | Radiated Emission | Compliant | |
| §15.249(d) | Band Edges | Compliant | |
| §15.207 | Conduction Emission | Compliant | |
| §15.215 | Bandwidth | Compliant | |



Page 10 of 59

6. TEST FACILITY

| part and the second sec | | | | |
|--|--|--|--|--|
| Test Site | Attestation of Global Compliance (Shenzhen) Co., Ltd | | | |
| Location | 1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012 | | | |
| NVLAP Lab Code | 600153-0 | | | |
| Designation Number | CN5028 | | | |
| Test Firm Registration Number | 682566 | | | |
| Description | Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0 | | | |



Page 11 of 59

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Due |
|---------------|--------------|---------|--------|--------------|--------------|
| TEST RECEIVER | R&S | ESPI | 101206 | Jun.20, 2017 | Jun.19, 2018 |
| LISN | R&S | ESH2-Z5 | 100086 | Aug.21, 2017 | Aug.20, 2018 |

TEST EQUIPMENT OF RADIATED EMISSION TEST

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Due |
|---------------------------------|-----------------|-------------|------------|---------------|---------------|
| TEST RECEIVER | R&S | ESCI | 10096 | Jun.20, 2017 | Jun.19, 2018 |
| EXA Signal Analyzer | Aglient | N9010A | MY53470504 | Dec.08, 2017 | Dec.07, 2018 |
| Horn antenna | SCHWARZBECK | BBHA 9170 | #768 | Sep.20, 2017 | Sep.19, 2018 |
| preamplifier | ChengYi | EMC184045SE | 980508 | Sep.15, 2017 | Sep.14, 2018 |
| Double-Ridged Waveguide Horn | ETS LINDGREN | 3117 | 00034609 | May 18, 2017 | May 17, 2019 |
| Broadband Preamplifier | SCHWARZBECK | BBV 9718 | 9718-205 | Jun.20, 2017 | Jun.19, 2018 |
| ANTENNA | SCHWARZBECK | VULB9168 | D69250 | Sep.28, 2017 | Sep.27, 2018 |
| Loop Antenna | A.H.Systems,Inc | SAS-562B | C | Mar. 01, 2016 | Feb. 28, 2018 |



Page 12 of 59

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

| Fundamental | Field Strength of Fundamental | Field Strength of Harmonics |
|----------------|-------------------------------|-----------------------------|
| Frequency | (millivolts/meter) | (microvolts/meter) |
| 900-928MHz | 50 | 500 |
| 2400-2483.5MHz | 50 | 500 |
| 5725-5875MHz | 50 | 500 |
| 24.0-24.25GHz | 250 | 2500 |

Standard FCC 15.209

| Frequency | Distance | Field Str | engths Limit |
|---------------|----------------------------|-------------------------------|----------------------|
| (MHz) | Meters | μ V/m | dB(μV)/m |
| 0.009 ~ 0.490 | 300 | 2400/F(kHz) | 2 |
| 0.490 ~ 1.705 | 30 | 24000/F(kHz) | 吃那 |
| 1.705 ~ 30 | 30 | 30 (1) | E Sobolico Coloro |
| 30 ~ 88 | 3 | 100 | 40.0 |
| 88 ~ 216 | 3 - 6 | 150 | 43.5 |
| 216 ~ 960 | 3 | 200 | 46.0 |
| 960 ~ 1000 | 3 | 500 | 54.0 |
| Above 1000 | 3 The factor of the second | Other:74.0 dB(μV)/m (Average) | (Peak) 54.0 dB(μV)/m |

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Page 13 of 59

9.2. MEASUREMENT PROCEDURE


- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)



Page 14 of 59

The following table is the setting of spectrum analyzer and receiver.


| | Spectrum Parameter | Setting |
|----------------------|-----------------------|--|
| Joal Comp. | Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| CC MILES | Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| | Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |
| Manager of Global Co | Start ~Stop Frequency | 1GHz~26.5GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 1.5MHz/ VBW 10Hz for Average |
| | Receiver Parameter | Setting |
| (8) #M- | Start ~Stop Frequency | 9KHz~150KHz/RB 200Hz for QP |
| 4 C A M | Start ~Stop Frequency | 150KHz~30MHz/RB 9KHz for QP |
| | Start ~Stop Frequency | 30MHz~1000MHz/RB 120KHz for QP |






9.3. TEST SETUP

RADIATED EMISSION TEST-SETUP FREQUENCY BELOW 30MHz

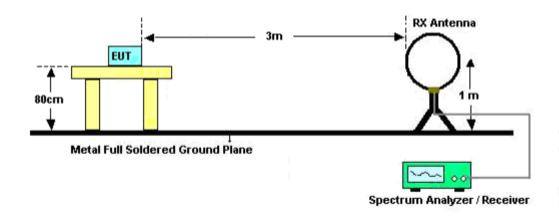


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

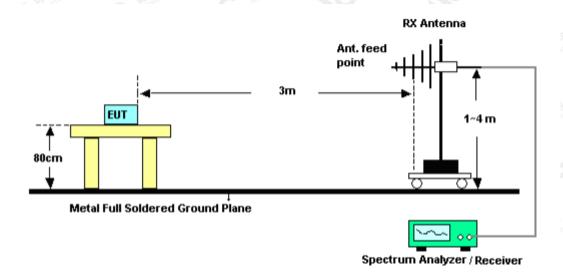



Page 16 of 59

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

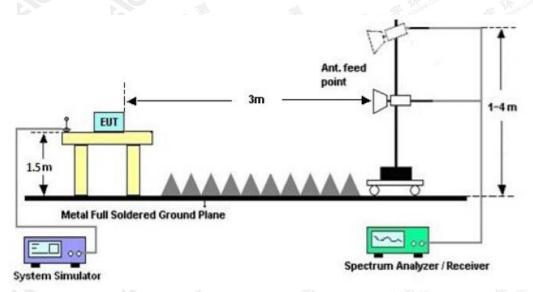

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at although the confirmed at all the confirme



Page 17 of 59

9.4. TEST RESULT

(Worst modulation: GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

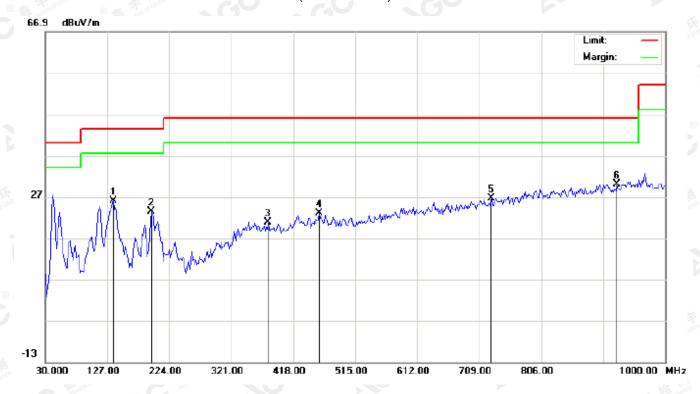


| No | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| _ 1 | | 136.6999 | 12.28 | 13.66 | 25.94 | 43.50 | -17.56 | peak | | | |
| 2 | | 196.5166 | 11.52 | 11.84 | 23.36 | 43.50 | -20.14 | peak | | | |
| 3 | | 379.1999 | 1.94 | 18.93 | 20.87 | 46.00 | -25.13 | peak | | | |
| 4 | | 458.4166 | 2.23 | 20.68 | 22.91 | 46.00 | -23.09 | peak | | | |
| 5 | | 728.3999 | 0.64 | 26.01 | 26.65 | 46.00 | -19.35 | peak | | | |
| 6 | * | 924.0167 | 0.63 | 29.28 | 29.91 | 46.00 | -16.09 | peak | | · | |

RESULT: PASS



Page 18 of 59

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

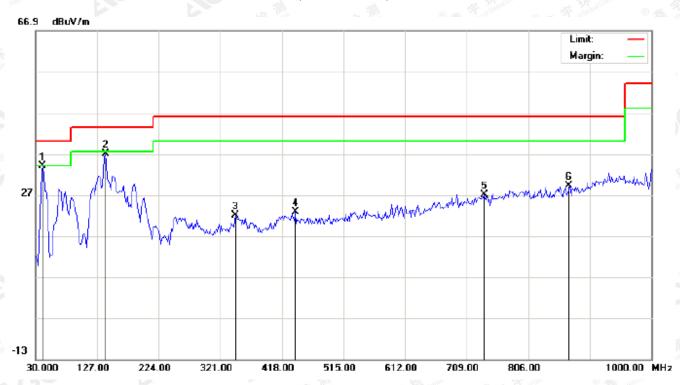

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBuV/m | dBu∀/m | dB | | cm | degree | |
| 1 | * | 41.3166 | 25.26 | 8.81 | 34.07 | 40.00 | -5.93 | peak | | | |
| 2 | | 139.9333 | 21.89 | 15.17 | 37.06 | 43.50 | -6.44 | peak | | | |
| 3 | | 345.2500 | 3.62 | 18.42 | 22.04 | 46.00 | -23.96 | peak | | | |
| 4 | | 439.0167 | 2.52 | 20.26 | 22.78 | 46.00 | -23.22 | peak | | | |
| 5 | | 736.4832 | 0.75 | 26.24 | 26.99 | 46.00 | -19.01 | peak | | | |
| 6 | | 870.6666 | 1.38 | 27.85 | 29.23 | 46.00 | -16.77 | peak | | | |

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 19 of 59

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

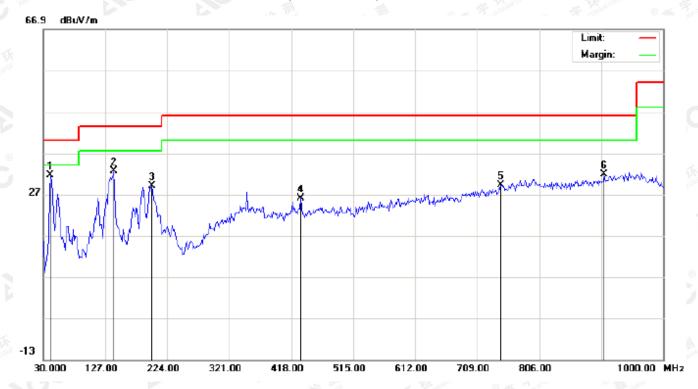


| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | * | 41.3166 | 19.82 | 11.81 | 31.63 | 40.00 | -8.37 | peak | | | |
| 2 | | 139.9333 | 17.51 | 15.17 | 32.68 | 43.50 | -10.82 | peak | | | |
| 3 | | 199.7500 | 17.10 | 11.99 | 29.09 | 43.50 | -14.41 | peak | | | |
| 4 | | 432.5500 | 5.92 | 20.06 | 25.98 | 46.00 | -20.02 | peak | | | |
| 5 | | 746.1833 | 2.72 | 26.52 | 29.24 | 46.00 | -16.76 | peak | | · | |
| 6 | | 907.8500 | 2.95 | 28.83 | 31.78 | 46.00 | -14.22 | peak | | | |

RESULT: PASS



Page 20 of 59

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL -VERTICAL

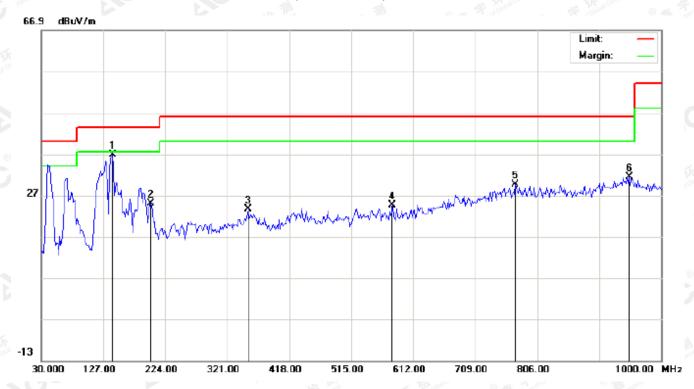

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| u l | | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | * | 141.5500 | 21.61 | 15.21 | 36.82 | 43.50 | -6.68 | peak | | | |
| 2 | | 201.3667 | 15.80 | 9.13 | 24.93 | 43.50 | -18.57 | peak | | | |
| 3 | | 353.3333 | 4.79 | 18.76 | 23.55 | 46.00 | -22.45 | peak | | | |
| 4 | | 579.6666 | 2.06 | 22.63 | 24.69 | 46.00 | -21.31 | peak | | | |
| 5 | | 772.0498 | 2.68 | 26.93 | 29.61 | 46.00 | -16.39 | peak | | | |
| 6 | | 949.8831 | 1.42 | 30.00 | 31.42 | 46.00 | -14.58 | peak | | | |

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



Page 21 of 59

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

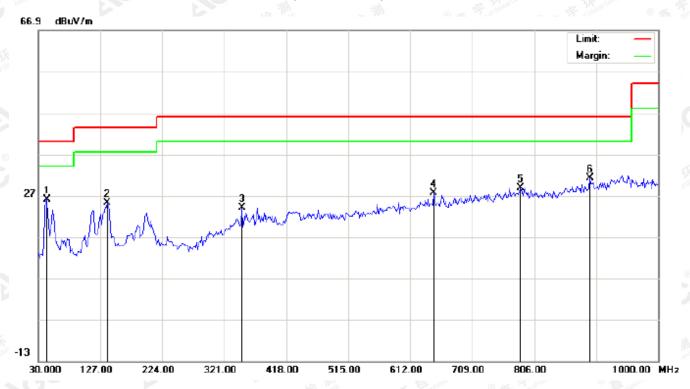


| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | * | 42.9333 | 14.35 | 11.71 | 26.06 | 40.00 | -13.94 | peak | | | |
| 2 | | 138.3164 | 10.85 | 14.41 | 25.26 | 43.50 | -18.24 | peak | | | |
| 3 | | 348.4832 | 5.31 | 18.64 | 23.95 | 46.00 | -22.05 | peak | | | |
| 4 | | 649.1833 | 3.81 | 23.85 | 27.66 | 46.00 | -18.34 | peak | | | |
| 5 | | 784.9832 | 1.74 | 27.11 | 28.85 | 46.00 | -17.15 | peak | | | |
| 6 | | 893.2998 | 2.80 | 28.44 | 31.24 | 46.00 | -14.76 | peak | | | |

RESULT: PASS



Page 22 of 59

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

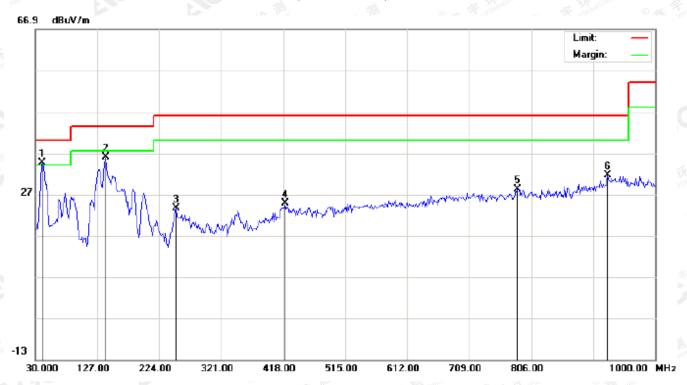

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | * | 41.3166 | 25.79 | 8.81 | 34.60 | 40.00 | -5.40 | peak | | | |
| 2 | | 139.9333 | 20.77 | 15.17 | 35.94 | 43.50 | -7.56 | peak | | | |
| 3 | | 249.8667 | 9.75 | 13.89 | 23.64 | 46.00 | -22.36 | peak | | | |
| 4 | | 421.2332 | 5.15 | 19.72 | 24.87 | 46.00 | -21.13 | peak | | | |
| 5 | | 784.9832 | 1.10 | 27.11 | 28.21 | 46.00 | -17.79 | peak | | | |
| 6 | | 925.6331 | 2.19 | 29.32 | 31.51 | 46.00 | -14.49 | peak | | | |

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.




age 23 of 59

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

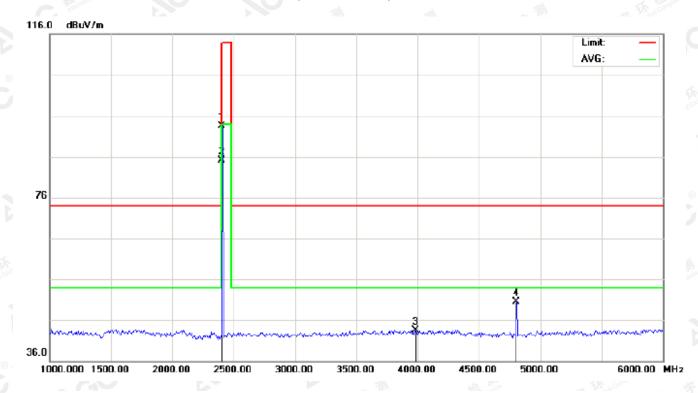


| No | M | 1k | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | | Comment |
|----|---|-----|----------|---------|--------|-------------|--------|--------|----------|-------------------|--------|---------|
| | - | - [| MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | | | 2402.000 | 83.21 | 10.32 | 93.53 | 114.00 | -20.47 | peak | | | |
| 2 | 1 | * | 2402.000 | 74.86 | 10.32 | 85.18 | 94.00 | -8.82 | AVG | 100 | 152 | |
| 3 | | | 3983.333 | 28.39 | 15.09 | 43.48 | 74.00 | -30.52 | peak | | | |
| 4 | | | 4804.000 | 42.74 | 7.69 | 50.43 | 74.00 | -23.57 | peak | | | |

RESULT. PASS



Page 24 of 59

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

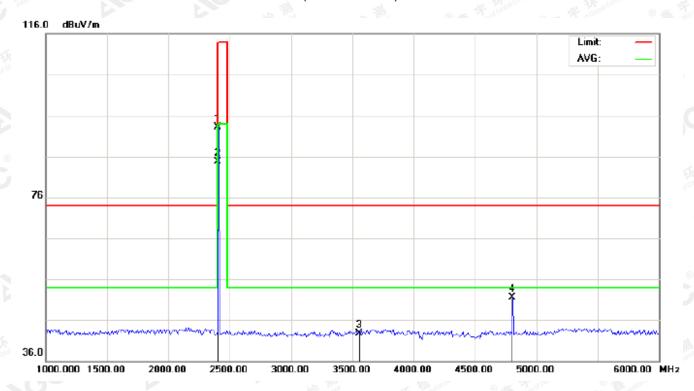

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | | 2402.000 | 82.82 | 10.32 | 93.14 | 114.00 | -20.86 | peak | | | |
| 2 | * | 2402.000 | 74.47 | 10.32 | 84.79 | 94.00 | -9.21 | AVG | 100 | 329 | |
| 3 | | 3558.333 | 30.18 | 12.47 | 42.65 | 74.00 | -31.35 | peak | | | |
| 4 | | 4804.000 | 43.88 | 7.69 | 51.57 | 74.00 | -22.43 | peak | | | |


RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 25 of 59

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

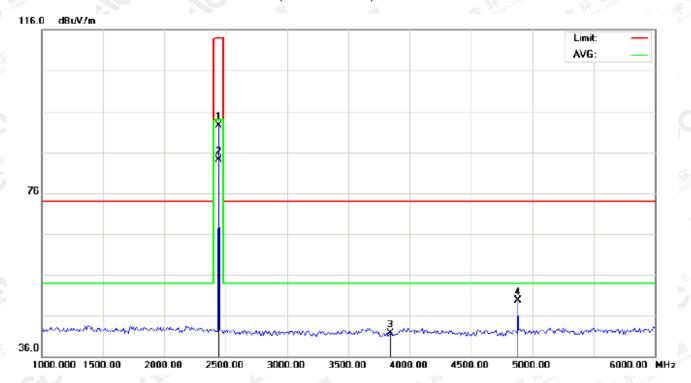

| No | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | | 2441.000 | 82.24 | 10.36 | 92.60 | 114.00 | -21.40 | peak | | | |
| 2 | * | 2441.000 | 73.73 | 10.36 | 84.09 | 94.00 | -9.91 | AVG | 100 | 151 | |
| 3 | | 3841.667 | 27.45 | 14.21 | 41.66 | 74.00 | -32.34 | peak | | | |
| 4 | | 4882.000 | 41.88 | 7.89 | 49.77 | 74.00 | -24.23 | peak | | | |
| | | | | | | | | | | | |


RESULT. PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at all the confirmed at al



Page 26 of 59

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

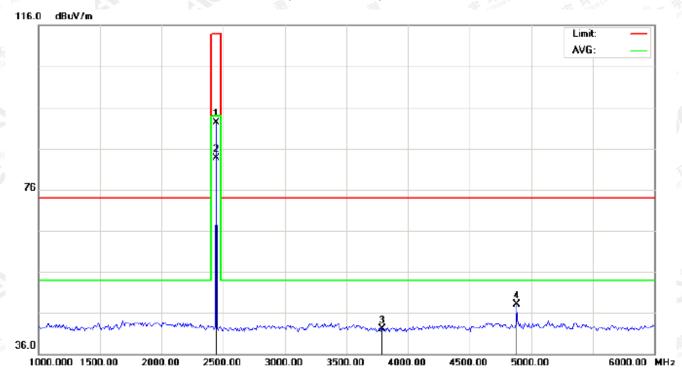

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBuV/m | dBu∀/m | dB | | cm | degree | |
| 1 | | 2441.000 | 81.99 | 10.36 | 92.35 | 114.00 | -21.65 | peak | | | |
| 2 | * | 2441.000 | 73.36 | 10.36 | 83.72 | 94.00 | -10.28 | AVG | 100 | 319 | |
| 3 | | 3791.667 | 28.10 | 13.91 | 42.01 | 74.00 | -31.99 | peak | | | |
| 4 | | 4882.000 | 40.31 | 7.89 | 48.20 | 74.00 | -25.80 | peak | | | |


RESULT: PASS

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gett.com.



Page 27 of 59

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

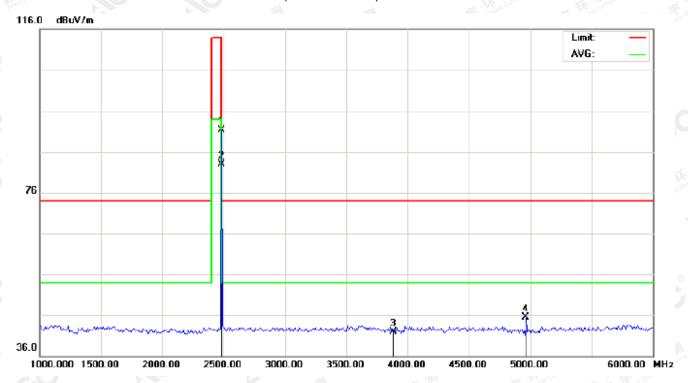


| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | | 2480.000 | 80.97 | 10.41 | 91.38 | 114.00 | -22.62 | peak | | | |
| 2 | * | 2480.000 | 72.44 | 10.41 | 82.85 | 94.00 | -11.15 | AVG | 100 | 162 | |
| 3 | | 3883.333 | 27.51 | 14.47 | 41.98 | 74.00 | -32.02 | peak | | | |
| 4 | | 4960.000 | 37.51 | 8.09 | 45.60 | 74.00 | -28.40 | peak | | | |

DECILIT: DACC



Page 28 of 59

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

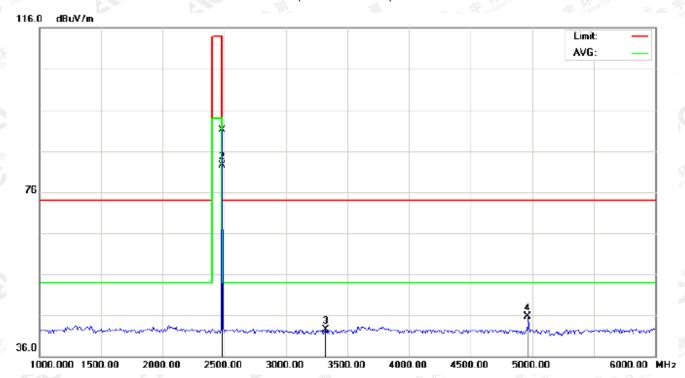

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | | 2480.000 | 80.69 | 10.41 | 91.10 | 114.00 | -22.90 | peak | | | |
| 2 | * | 2480.000 | 72.10 | 10.41 | 82.51 | 94.00 | -11.49 | AVG | 100 | 314 | |
| 3 | | 3325.000 | 30.54 | 11.95 | 42.49 | 74.00 | -31.51 | peak | | | |
| 4 | | 4960.000 | 37.66 | 8.09 | 45.75 | 74.00 | -28.25 | peak | | | |

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 29 of 59

Field strength of the fundamental signal

1Mbps Result:

Peak value

| Frequency | Reading Level | Factor | Measurement | Limit | Over | Antenna | |
|-----------|------------------|--------|-------------|----------|--------|--------------|--|
| (MHz) | (dBuv) | (dB/m) | (dBuv/m) | (dBuv/m) | (dB) | Polarization | |
| 2402 | 83.21 | 10.32 | 93.53 | 114 | -20.47 | Horizontal | |
| 2402 | 82.82 | 10.32 | 93.14 | 114 | -20.86 | Vertical | |
| 2441 | 82.24 | 10.36 | 92.60 | 114 | -21.40 | Horizontal | |
| 2441 | 81.99 | 10.36 | 92.35 | 114 | -21.65 | Vertical | |
| 2480 | 80.97 | 10.41 | 91.38 | 114 | -22.62 | Horizontal | |
| 2480 | 80.69 | 10.41 | 91.10 | 114 | -22.90 | Vertical | |

Average value

| Frequency | Reading Level | Factor | Measurement | Limit | Over | Antenna Polarization | |
|-----------|------------------|--------|-------------|----------|--------|-------------------------|--|
| (MHz) | (dBuv) | (dB/m) | (dBuv/m) | (dBuv/m) | (dB) | | |
| 2402 | 74.86 | 10.32 | 85.18 | 94 | -8.82 | Horizontal | |
| 2402 | 74.47 | 10.32 | 84.79 | 94 | -9.21 | Vertical | |
| 2441 | 73.73 | 10.36 | 84.09 | 94 | -9.91 | Horizontal | |
| 2441 | 73.36 | 10.36 | 83.72 | 94 | -10.28 | Vertical | |
| 2480 | 72.44 | 10.41 | 82.85 | 94 | -11.15 | Horizontal | |
| 2480 | 72.10 | 10.41 | 82.51 | 94 | -11.49 | Vertical | |



Page 30 of 59

2Mbps Result:

Peak value

| Frequency | Reading Level | Factor | Measurement | Limit | Over | Antenna | |
|-----------|------------------|--------|-------------|----------|--------|--------------|--|
| (MHz) | (dBuv) | (dB/m) | (dBuv/m) | (dBuv/m) | (dB) | Polarization | |
| 2402 | 82.46 | 10.32 | 92.78 | 114 | -21.22 | Horizontal | |
| 2402 | 82.07 | 10.32 | 92.39 | 114 | -21.61 | Vertical | |
| 2441 | 81.44 | 10.36 | 91.80 | 114 | -22.20 | Horizontal | |
| 2441 | 81.19 | 10.36 | 91.55 | 114 | -22.45 | Vertical | |
| 2480 | 80.21 | 10.41 | 90.62 | 114 | -23.38 | Horizontal | |
| 2480 | 79.93 | 10.41 | 90.34 | 114 | -23.66 | Vertical | |

Average value

| Frequency | Reading Level | Factor | Measurement | Limit | Over | Antenna | |
|-----------|------------------|--------|-------------|----------|--------|--------------|--|
| (MHz) | (dBuv) | (dB/m) | (dBuv/m) | (dBuv/m) | (dB) | Polarization | |
| 2402 | 74.06 | 10.32 | 84.38 | 94 | -9.62 | Horizontal | |
| 2402 | 73.67 | 10.32 | 83.99 | 94 | -10.01 | Vertical | |
| 2441 | 72.97 | 10.36 | 83.33 | 94 | -10.67 | Horizontal | |
| 2441 | 72.60 | 10.36 | 82.96 | 94 | -11.04 | Vertical | |
| 2480 | 71.66 | 10.41 | 82.07 | 94 | -11.93 | Horizontal | |
| 2480 | 71.32 | 10.41 | 81.73 | 94 | -12.27 | Vertical | |



Page 31 of 59

3Mbps Result:

Peak value

| Frequency | Reading Level | Factor | Measurement | Limit | Over | Antenna | |
|-----------|------------------|--------|-------------|---------------|--------|--------------|--|
| (MHz) | (dBuv) | (dB/m) | (dBuv/m) | (dBuv/m) (dB) | | Polarization | |
| 2402 | 82.11 | 10.32 | 92.43 | 114 | -21.57 | Horizontal | |
| 2402 | 81.79 | 10.32 | 92.11 | 114 | -21.89 | Vertical | |
| 2441 | 81.12 | 10.36 | 91.48 | 114 | -22.52 | Horizontal | |
| 2441 | 80.79 | 10.36 | 91.15 | 114 | -22.85 | Vertical | |
| 2480 | 79.88 | 10.41 | 90.29 | 114 | -23.71 | Horizontal | |
| 2480 | 79.54 | 10.41 | 89.95 | 114 | -24.05 | Vertical | |

Average value

| Frequency | Reading Level | Factor | Measurement | Limit | Over | Antenna | |
|-----------|------------------|--------|-------------|----------|--------|--------------|--|
| (MHz) | (dBuv) | (dB/m) | (dBuv/m) | (dBuv/m) | (dB) | Polarization | |
| 2402 | 73.72 | 10.32 | 84.04 | 94 | -9.96 | Horizontal | |
| 2402 | 73.35 | 10.32 | 83.67 | 94 | -10.33 | Vertical | |
| 2441 | 72.60 | 10.36 | 82.96 | 94 | -11.04 | Horizontal | |
| 2441 | 72.28 | 10.36 | 82.64 | 94 | -11.36 | Vertical | |
| 2480 | 71.34 | 10.41 | 81.75 | 94 | -12.25 | Horizontal | |
| 2480 | 71.00 | 10.41 | 81.41 | 94 | -12.59 | Vertical | |



Page 32 of 59

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

- The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

| | Start frequenc | y(MHz) | | Stop frequency(MHz) | | | | |
|------|----------------|-----------|---------------------|---------------------|------|--|--|--|
| | 2200 | | | | 2405 | | | |
| 8 F. | 2478 | Global Co | attestation of Glob | -,0 " | 2500 | | | |

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

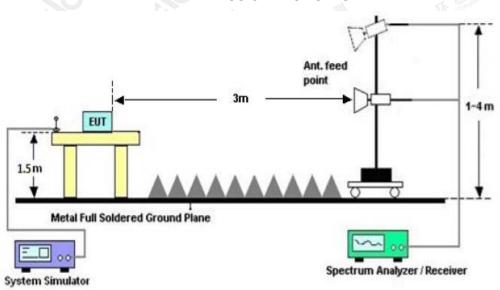



age 33 of 59

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal




| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | | 2376.642 | 32.04 | 10.29 | 42.33 | 74.00 | -31.67 | peak | | | |
| 2 | | 2390.000 | 33.00 | 10.31 | 43.31 | 74.00 | -30.69 | peak | | | |
| 3 | | 2400.000 | 42.47 | 10.32 | 52.79 | 74.00 | -21.21 | peak | | | |
| 4 | * | 2402.000 | 83.22 | 10.32 | 93.54 | 74.00 | 19.54 | peak | | | |
| 5 | Х | 2402.000 | 74.96 | 10.32 | 85.28 | 74.00 | 11.28 | AVG | 100 | 159 | |



Page 34 of 59

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

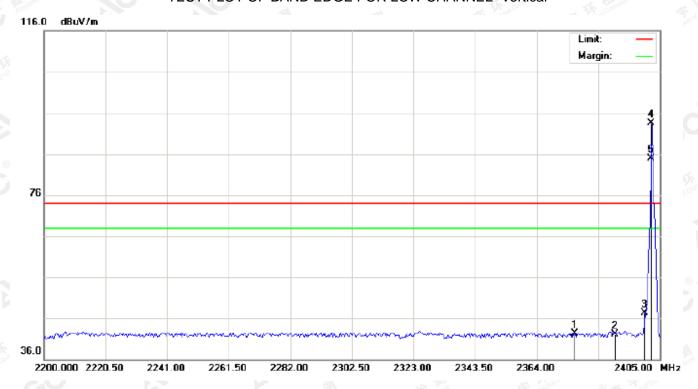


| | No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | | Comment |
|---|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|--------|---------|
| | | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 4 | 1 | | 2376.642 | 32.09 | 10.29 | 42.38 | 74.00 | -31.62 | peak | | | |
| | 2 | | 2390.000 | 31.71 | 10.31 | 42.02 | 74.00 | -31.98 | peak | | | |
| | 3 | | 2400.000 | 37.06 | 10.32 | 47.38 | 74.00 | -26.62 | peak | | | |
| 5 | 4 | * | 2402.000 | 83.09 | 10.32 | 93.41 | 74.00 | 19.41 | peak | | | |
| | 5 | Х | 2402.000 | 74.65 | 10.32 | 84.97 | 74.00 | 10.97 | AVG | 100 | 326 | |

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 1000, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trip://www.agc-gett.com.



Page 35 of 59

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

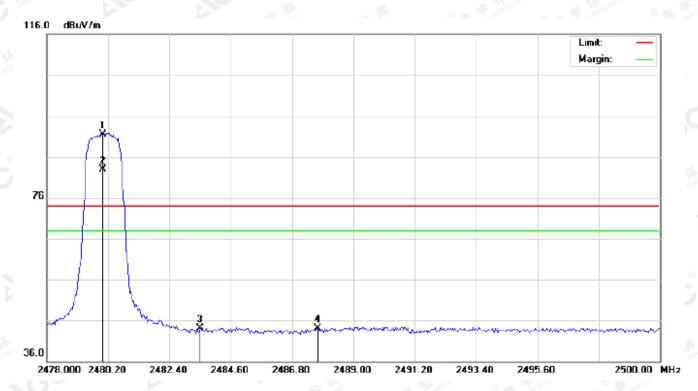


| | No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|---|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | | | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| | 1 | * | 2480.000 | 81.05 | 10.41 | 91.46 | 74.00 | 17.46 | peak | | | |
| | 2 | Х | 2480.000 | 72.46 | 10.41 | 82.87 | 74.00 | 8.87 | AVG | 100 | 155 | |
| | 3 | | 2483.500 | 33.69 | 10.41 | 44.10 | 74.00 | -29.90 | peak | | | |
| , | 4 | | 2487.716 | 33.68 | 10.42 | 44.10 | 74.00 | -29.90 | peak | | | |

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.



Page 36 of 59

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

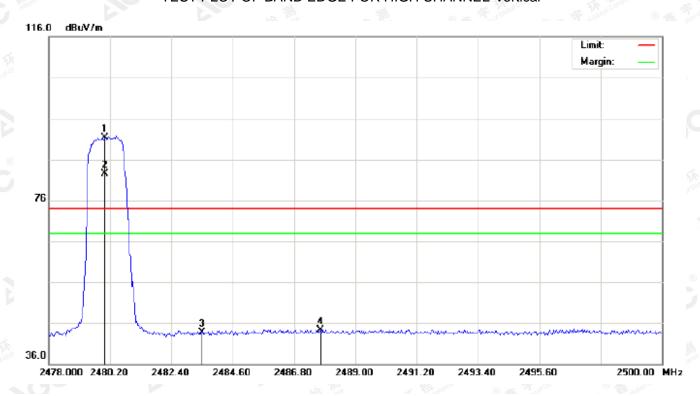

| No. | Mk | Freq. | Reading | Factor | Measurement | Limit | Over | Detector | Antenna Height | Table Degree | Comment |
|-----|----|----------|---------|--------|-------------|--------|--------|----------|-------------------|-----------------|---------|
| | - | MHz | dBu∀ | dB/m | dBu∀/m | dBu∀/m | dB | | cm | degree | |
| 1 | * | 2480.000 | 80.82 | 10.41 | 91.23 | 74.00 | 17.23 | peak | | | |
| 2 | Х | 2480.000 | 72.10 | 10.41 | 82.51 | 74.00 | 8.51 | AVG | 100 | 321 | |
| 3 | | 2483.500 | 33.26 | 10.41 | 43.67 | 74.00 | -30.33 | peak | | | |
| 4 | | 2487.753 | 33.95 | 10.42 | 44.37 | 74.00 | -29.63 | peak | | | |

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Page 37 of 59

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ 3RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

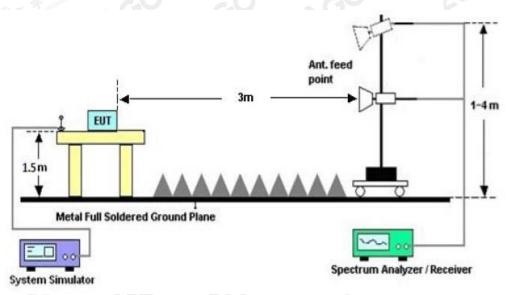

11.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR

| BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT | | | | | | | | | | |
|--|----------------|--------------|---------------|--------|--|--|--|--|--|--|
| | | Measure | ement Result | | | | | | | |
| Applicable Limits | | Doorle | | | | | | | | |
| | | 99%OBW (MHz) | -20dB BW(MHz) | Result | | | | | | |
| Country Committee Committe | Low Channel | 0.947 | 1.118 | PASS | | | | | | |
| N/A | Middle Channel | 0.937 | 1.092 | PASS | | | | | | |
| | High Channel | 0.939 | 1.098 | PASS | | | | | | |


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

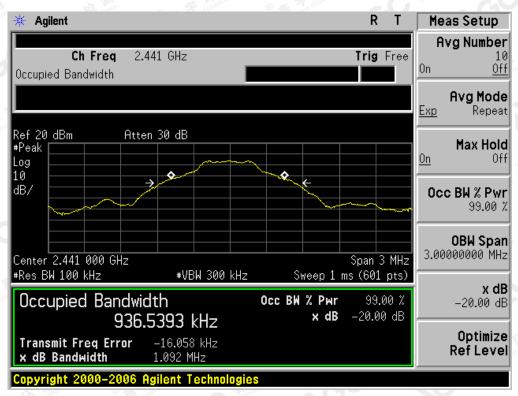


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 39 of 59

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

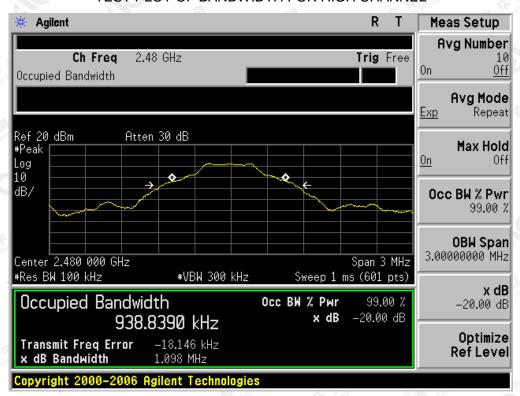

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.


Attestation of Global Compliance



Page 40 of 59

| BLUETO | OOTH 2MBPS LIN | MITS AND MEASU | REMENT RESULT | | | | | | |
|-------------------|--------------------|----------------|---------------|------|--|--|--|--|--|
| | Measurement Result | | | | | | | | |
| Applicable Limits | | Dogult | | | | | | | |
| | | Result | | | | | | | |
| TO THE WORLD | Low Channel | 1.204 | 1.369 | PASS | | | | | |
| N/A | Middle Channel | 1.234 | 1.391 | PASS | | | | | |
| CC " | High Channel | 1.255 | 1.394 | PASS | | | | | |

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

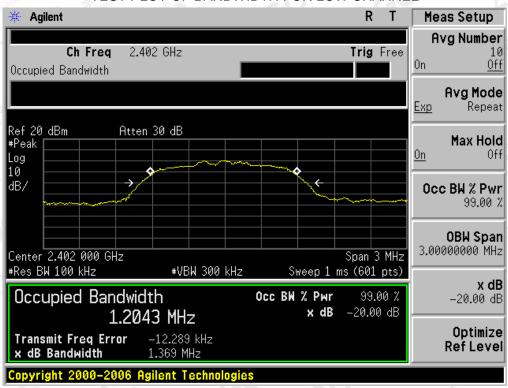


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.


Attestation of Global Compliance



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

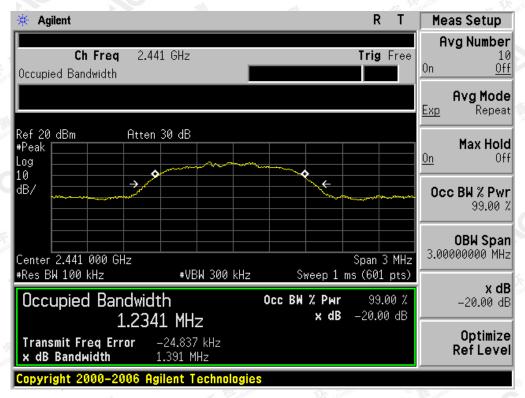

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

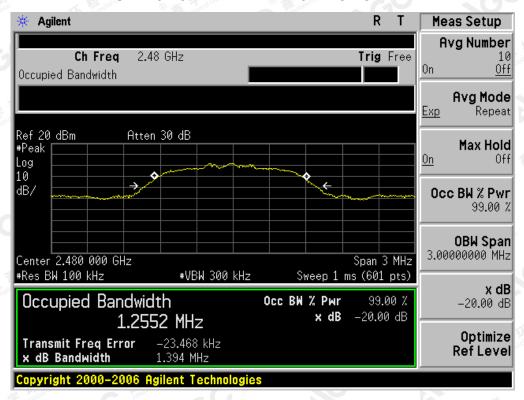


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



Page 42 of 59

| BLUET | OOTH 3MBPS LIN | MITS AND MEASU | REMENT RESULT | | | | | | |
|-------------------|--------------------|----------------|---------------|--------|--|--|--|--|--|
| | Measurement Result | | | | | | | | |
| Applicable Limits | | Danill | | | | | | | |
| | | 99%OBW (MHz) | -20dB BW(MHz) | Result | | | | | |
| 不是 | Low Channel | 1.216 | 1.376 | PASS | | | | | |
| N/A | Middle Channel | 1.231 | 1.392 | PASS | | | | | |
| CO " | High Channel | 1.255 | 1.403 | PASS | | | | | |

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

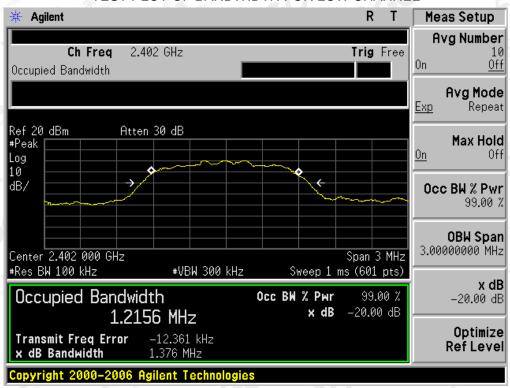


The results showing this jest eport refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 💢 €, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc-cert.com.


IGC 8 Attestation of Global Compliance



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

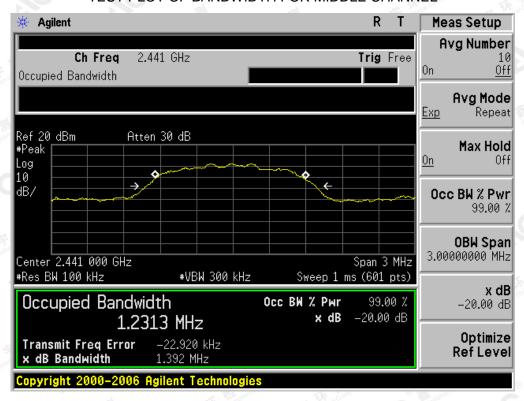

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

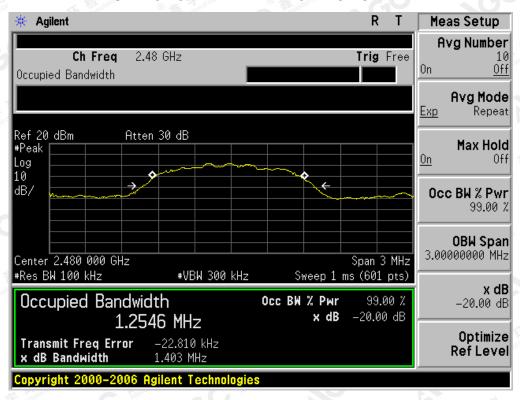

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 44 of 59

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| F | Maximum RF Line Voltage | | | | | | | | |
|---------------|---|----------------|--|--|--|--|--|--|--|
| Frequency | Q.P.(dBuV) | Average(dBuV) | | | | | | | |
| 150kHz~500kHz | 66-56 | 56-46 | | | | | | | |
| 500kHz~5MHz | 8 Age 12 | 46/ | | | | | | | |
| 5MHz~30MHz | 60 | 50 | | | | | | | |

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

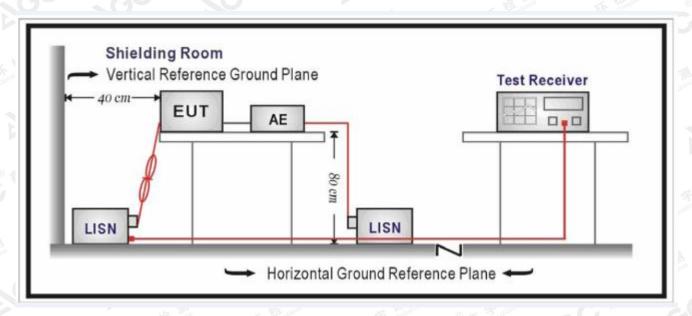

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Page 45 of 59

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trp://www.ago.go.tt.com.




Page 46 of 59

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

FOR BR/EDR

Line Conducted Emission Test Line 1-L

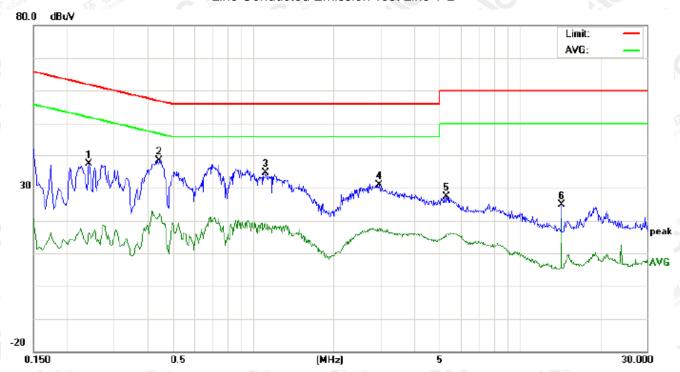

| No. | Freq. (MHz) | | 1- (dBuV) | | Reading_Level (dBuV) | | | | | | Correct Factor | Me | asuren (dBuV) | | ı | nit uV) | | rgin IB) | P/F | Comment |
|-----|----------------|-------|-----------|-------|-------------------------|-------|----|-------|-------|-------|-------------------|--------|------------------|--|---|------------|--|-------------|-----|---------|
| | | Peak | QP | AVG | dB | Peak | QP | AVG | QP | AVG | QP | AVG | | | | | | | | |
| 1 | 0.2420 | 27.18 | | 6.19 | 10.26 | 37.44 | | 16.45 | 62.02 | 52.02 | -24.58 | -35.57 | Р | | | | | | | |
| 2 | 0.4460 | 28.00 | | 11.71 | 10.36 | 38.36 | | 22.07 | 56.95 | 46.95 | -18.59 | -24.88 | Р | | | | | | | |
| 3 | 1.1140 | 24.33 | | 7.91 | 10.37 | 34.70 | | 18.28 | 56.00 | 46.00 | -21.30 | -27.72 | Р | | | | | | | |
| 4 | 2.9700 | 20.39 | | 6.97 | 10.54 | 30.93 | | 17.51 | 56.00 | 46.00 | -25.07 | -28.49 | Р | | | | | | | |
| 5 | 5.3139 | 17.10 | | 5.11 | 10.25 | 27.35 | | 15.36 | 60.00 | 50.00 | -32.65 | -34.64 | Р | | | | | | | |
| 6 | 14.3179 | 14.69 | | 10.72 | 10.12 | 24.81 | | 20.84 | 60.00 | 50.00 | -35.19 | -29.16 | Р | | | | | | | |


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance



Page 47 of 59


Line Conducted Emission Test Line 2-N

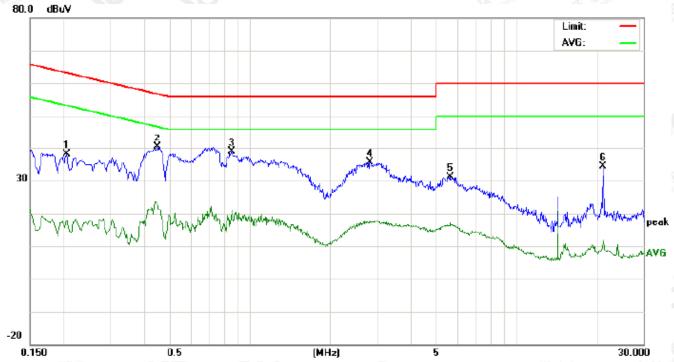

| | | Fred | Freq. | Fred | Rea | ding_L | | Correct | | asuren | | 1 | nit | | rgin | LLS - | |
|-----|---|---------|--------|------|-------|--------|--------|---------|--------|--------|----------------|--------|--------|---------|------|-------|--|
| No. | | (MHz) | (4241) | AVG | 1 | | (dBuV) | AVG | (dBuV) | | (dB) QP AVG | | P/F | Comment | | | |
| - | | 0.0050 | | | | | | | | | | | | | | | |
| L | 1 | 0.2059 | 28.02 | | 7.69 | 10.22 | 38.24 | | 17.91 | 63.37 | 53.37 | -25.13 | -35.46 | Р | | | |
| 4 | 2 | 0.4500 | 29.92 | | 12.38 | 10.37 | 40.29 | | 22.75 | 56.87 | 46.87 | -16.58 | -24.12 | Р | | | |
| | 3 | 0.8539 | 28.60 | | 10.47 | 10.35 | 38.95 | | 20.82 | 56.00 | 46.00 | -17.05 | -25.18 | Р | | | |
| | 4 | 2.8260 | 25.12 | | 7.23 | 10.51 | 35.63 | | 17.74 | 56.00 | 46.00 | -20.37 | -28.26 | Р | | | |
| | 5 | 5.6299 | 20.81 | | 6.23 | 10.26 | 31.07 | | 16.49 | 60.00 | 50.00 | -28.93 | -33.51 | Р | | | |
| ſ | 6 | 21.2179 | 24.12 | | 0.99 | 10.13 | 34.25 | | 11.12 | 60.00 | 50.00 | -25.75 | -38.88 | Р | | | |

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.

Attestation of Global Compliance






APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

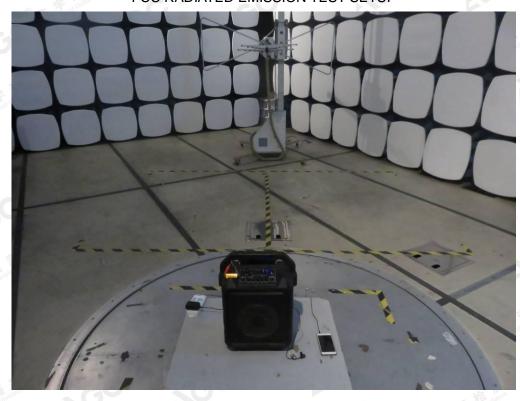



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

Attestation of Global Compliance





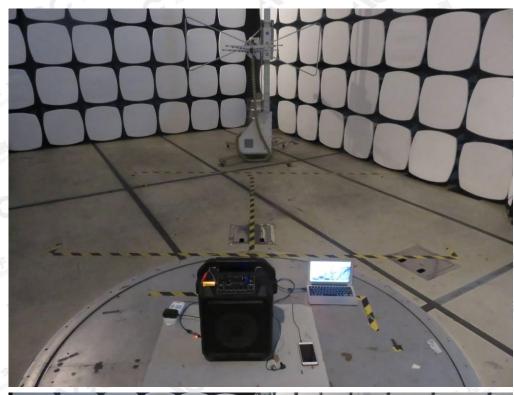


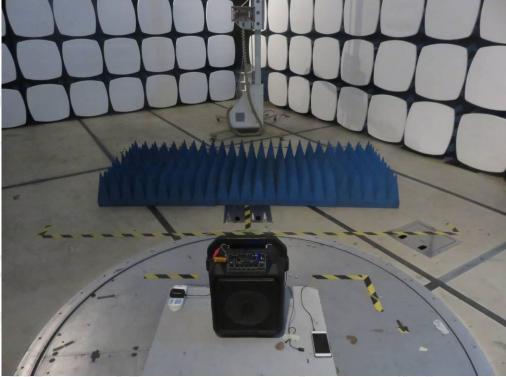


The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gent.com.



Page 50 of 59

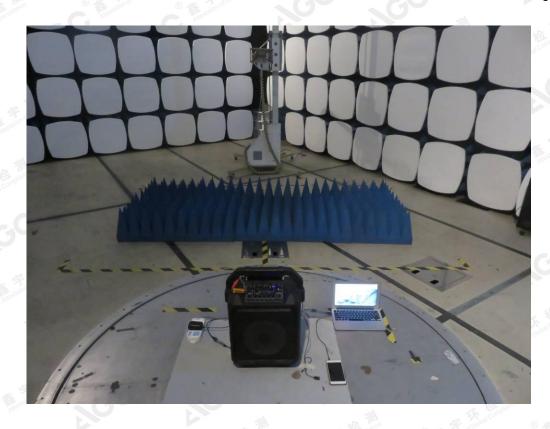

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (60°, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.





APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT




TOP VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.

Attestation of Global Compliance





FRONT VIEW OF EUT




BACK VIEW OF EUT



The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

Attestation of Global Compliance





LEFT VIEW OF EUT



RIGHT VIEW OF EUT



The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.


Attestation of Global Compliance



VIEW OF EUT (PORT)-1




VIEW OF EUT (PORT)-2

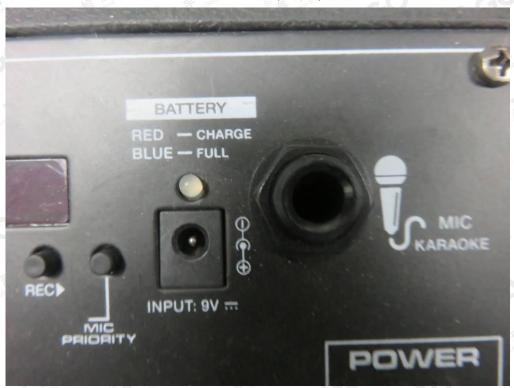

The results spowd this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attr://www.agc-gent.com.

Attestation of Global Compliance





OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2




The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.com.

Attestation of Global Compliance





OPEN VIEW OF EUT-3

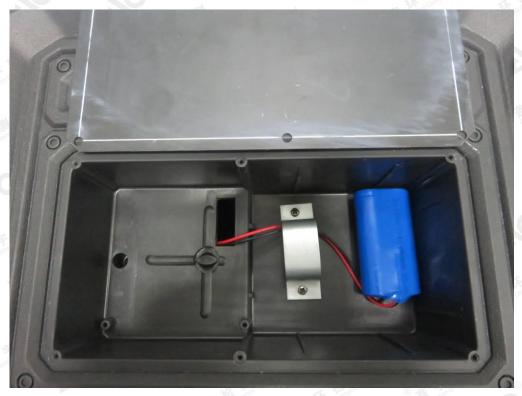


VIEW OF BATTERY




The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true of the confirmed at a true of true of the confirmed at a true of the confirmed at a

Attestation of Global Compliance





INTERNAL VIEW OF EUT-1

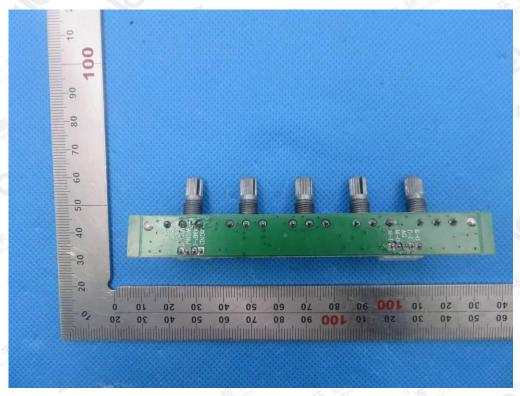

INTERNAL VIEW OF EUT-2




The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago-gent.com.


Attestation of Global Compliance



INTERNAL VIEW OF EUT-3

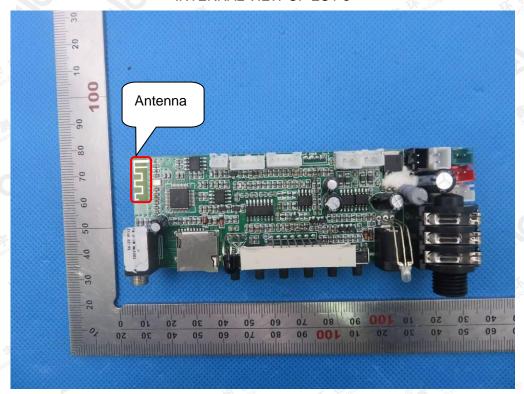


INTERNAL VIEW OF EUT-4

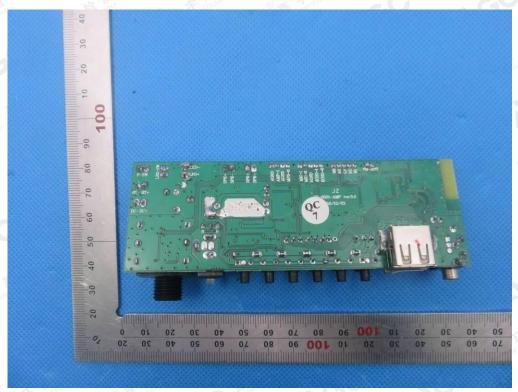


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true www.ago.gent.com.

Attestation of Global Compliance





INTERNAL VIEW OF EUT-5

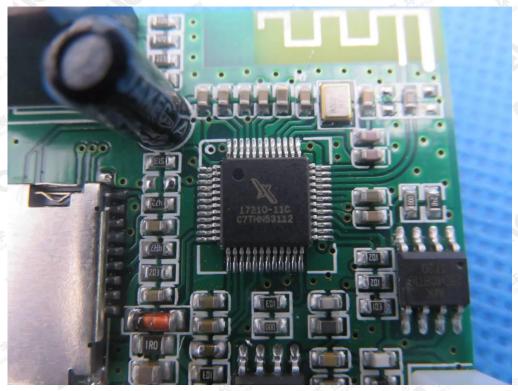

VIEW OF ADAPTER



----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.go.tt.com.

Attestation of Global Compliance