


**Plot 46:**

Test Date	2023-05-13
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a U-NII
Signal	IEEE 802.11
Frequency	5180
SAR 10g (W/Kg)	0.065
SAR 1g (W/Kg)	0.123


Maximum location: X=8.00, Y=-17.00 ; SAR Peak: 0.58 W/kg

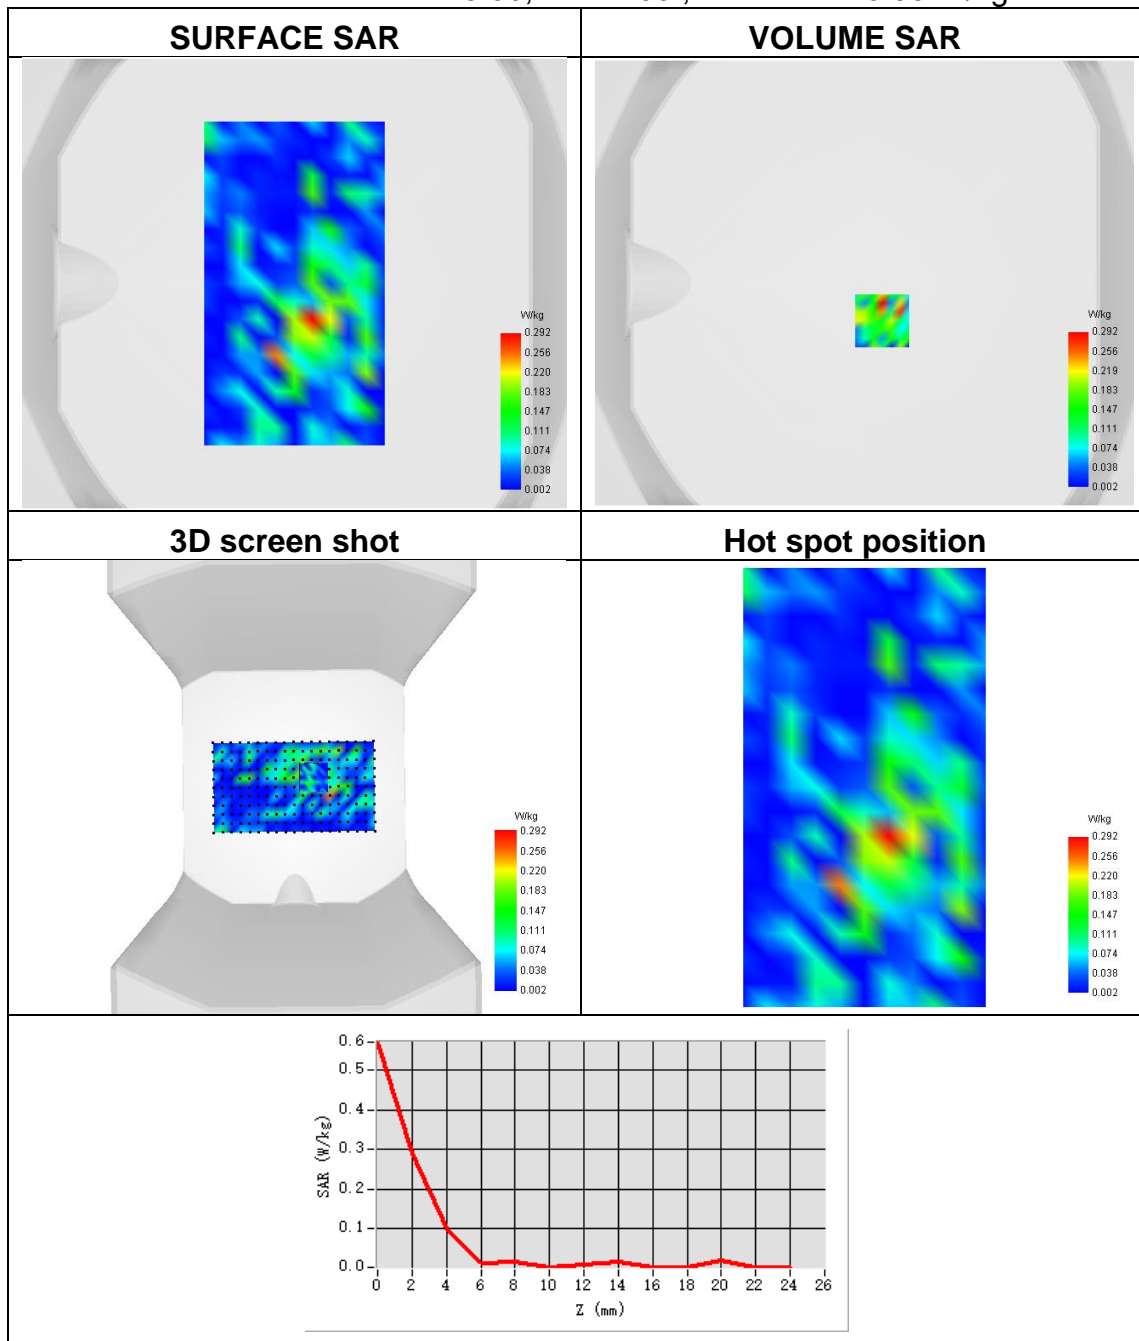

**Plot 47:**

Test Date	2023-05-15
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5270
SAR 10g (W/Kg)	0.052
SAR 1g (W/Kg)	0.098

Maximum location: X=-9.00, Y=-15.00 ; SAR Peak: 0.70 W/kg

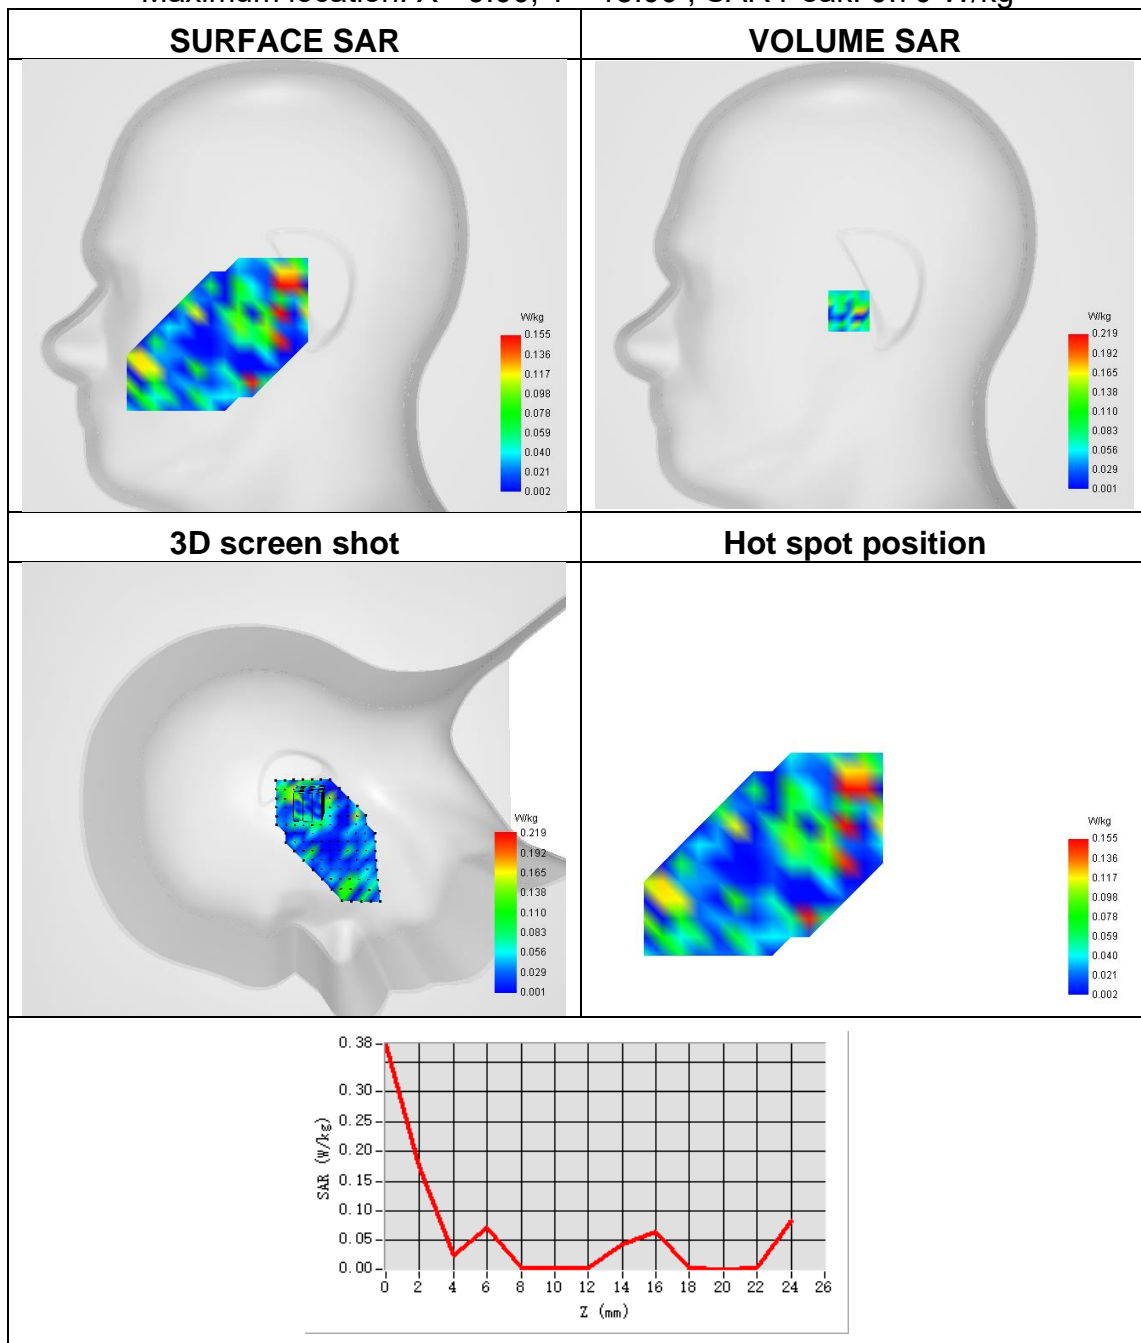




**Plot 48:**

Test Date	2023-05-15
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5270
SAR 10g (W/Kg)	0.139
SAR 1g (W/Kg)	0.336

Maximum location: X=0.00, Y=-32.00 ; SAR Peak: 1.14 W/kg

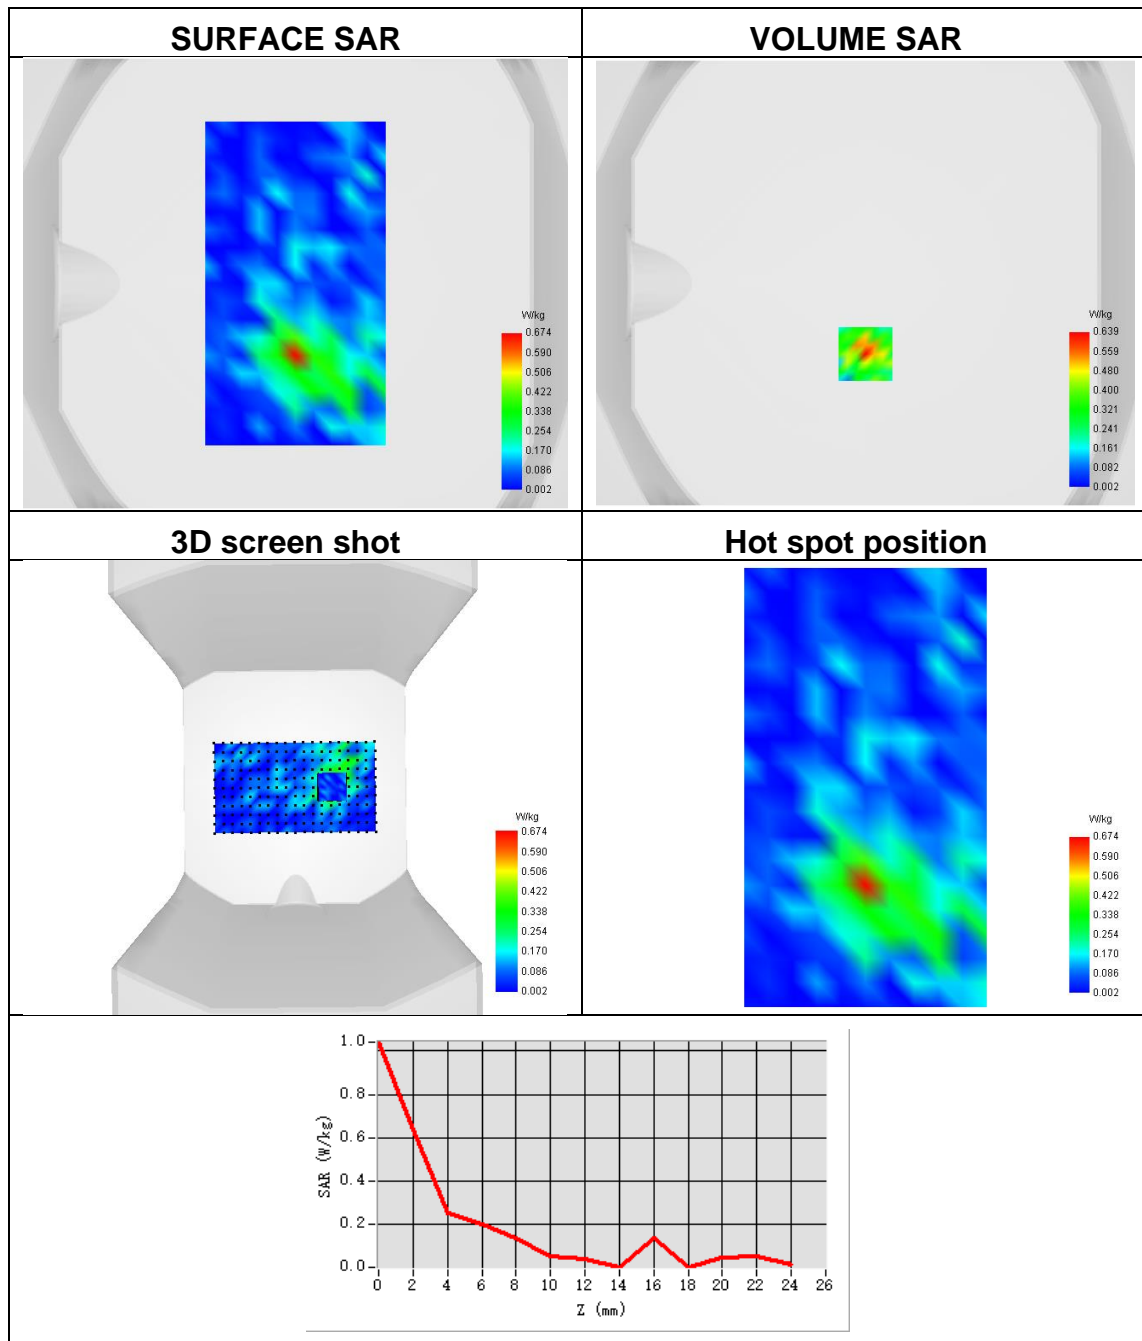




**Plot 49:**

Test Date	2023-06-04
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Tilt
Band	IEEE 802.11a U-NII
Signal	IEEE 802.11
Frequency	5500
SAR 10g (W/Kg)	0.057
SAR 1g (W/Kg)	0.156

Maximum location: X=-47.00, Y=-14.00 ; SAR Peak: 0.77 W/kg

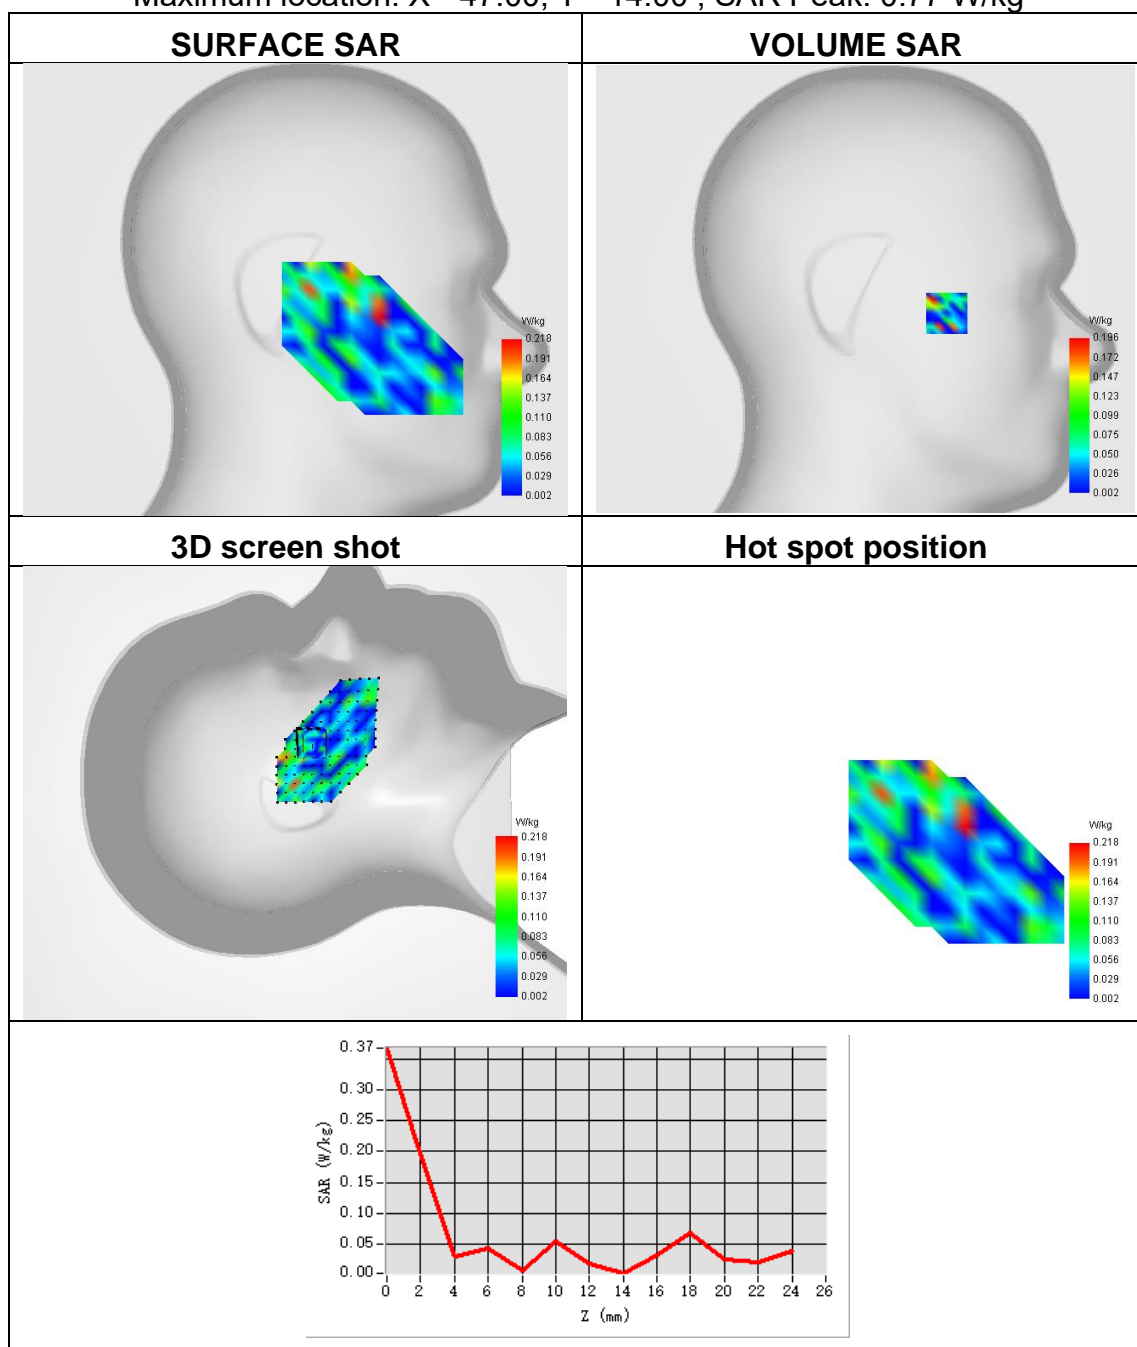




**Plot 50:**

Test Date	2023-06-04
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a U-NII
Signal	IEEE 802.11
Frequency	5500
SAR 10g (W/Kg)	0.158
SAR 1g (W/Kg)	0.329

Maximum location: X=-8.00, Y=-24.00 ; SAR Peak: 1.21 W/kg

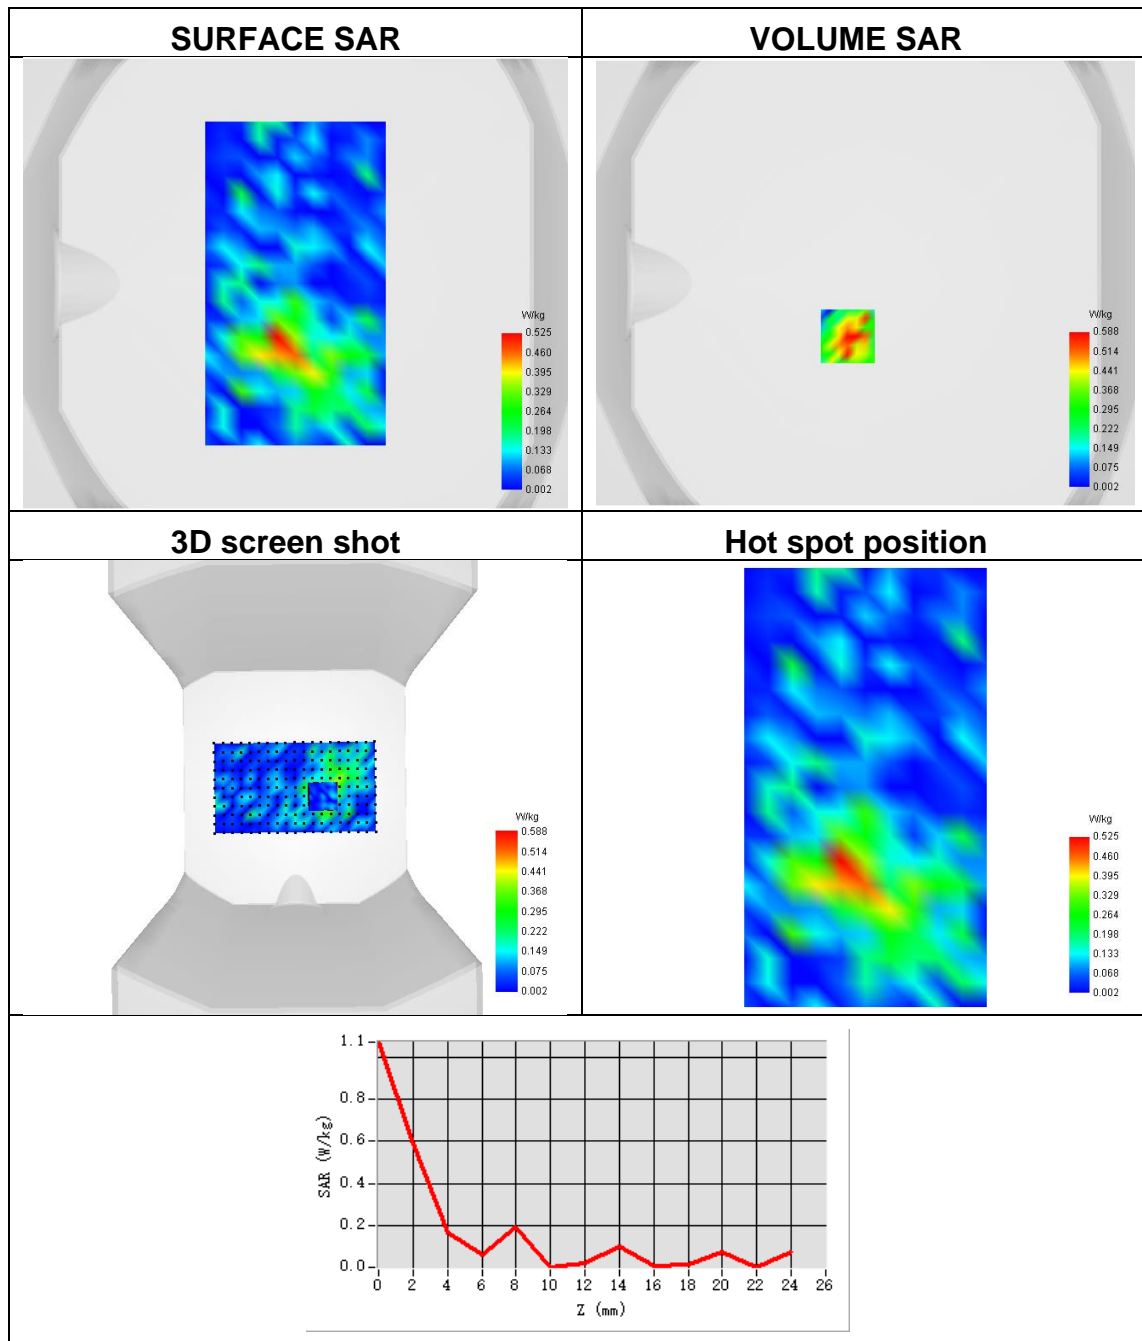




**Plot 51:**

Test Date	2023-06-09
Area Scan	sam_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Tilt
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5785
SAR 10g (W/Kg)	0.050
SAR 1g (W/Kg)	0.089

Maximum location: X=-73.00, Y=-51.00 ; SAR Peak: 0.68 W/kg

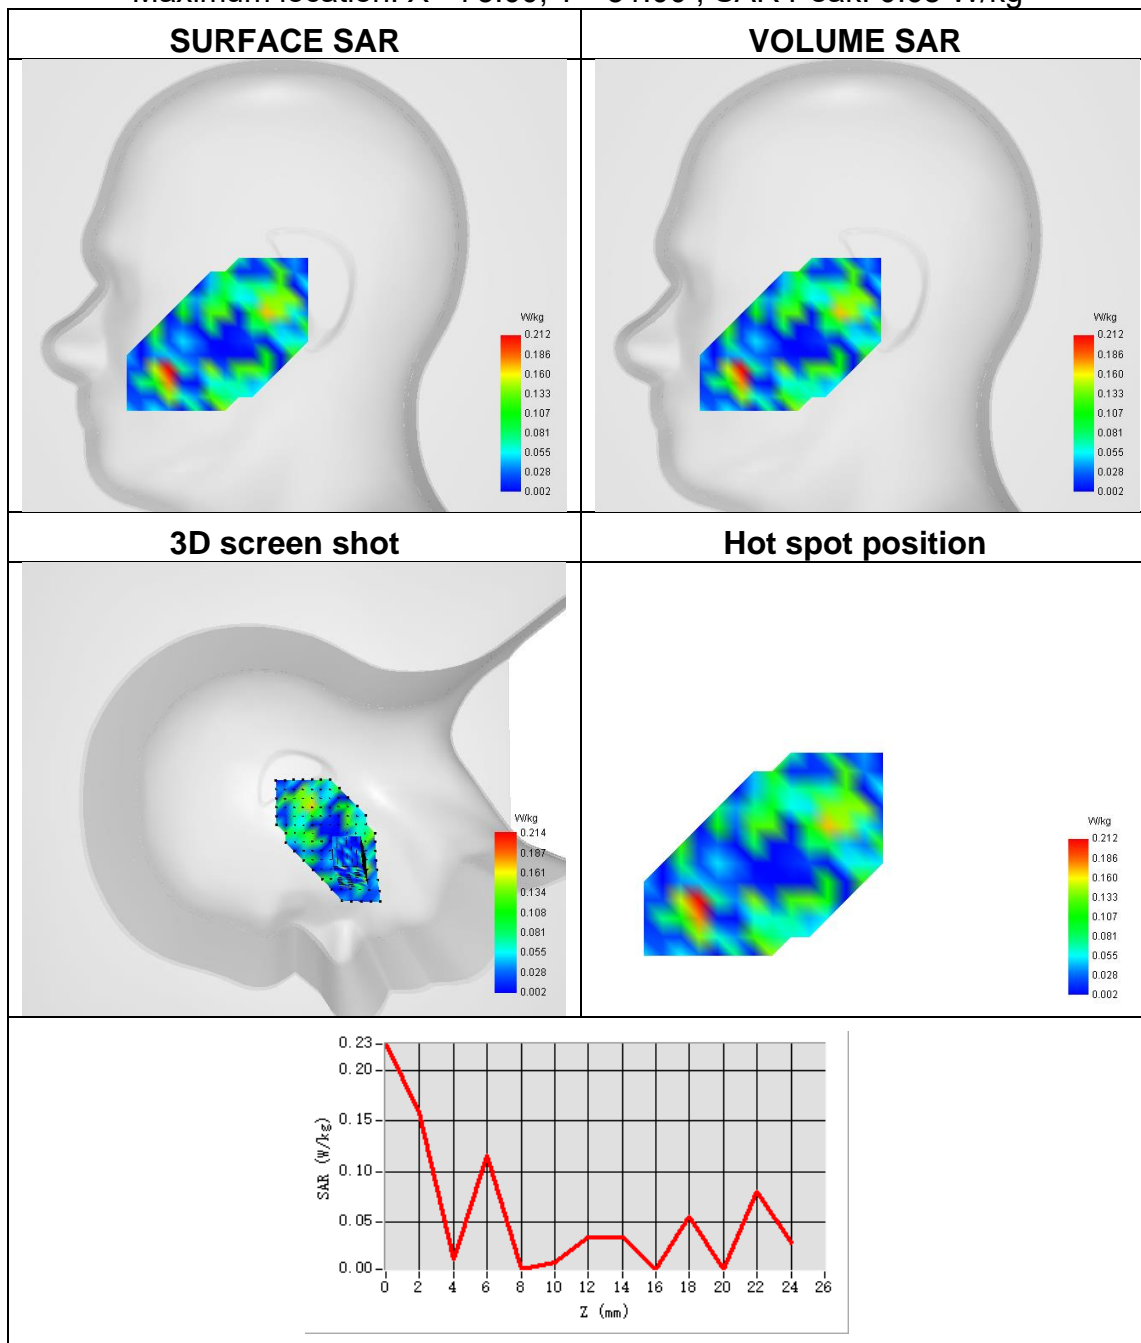




Plot 52:

Test Date	2023-06-09
Area Scan	surf_sam_plan.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	IEEE 802.11n U-NII
Signal	IEEE 802.11
Frequency	5785
SAR 10g (W/Kg)	0.059
SAR 1g (W/Kg)	0.104

Maximum location: X=-31.00, Y=-25.00 ; SAR Peak: 0.49 W/kg

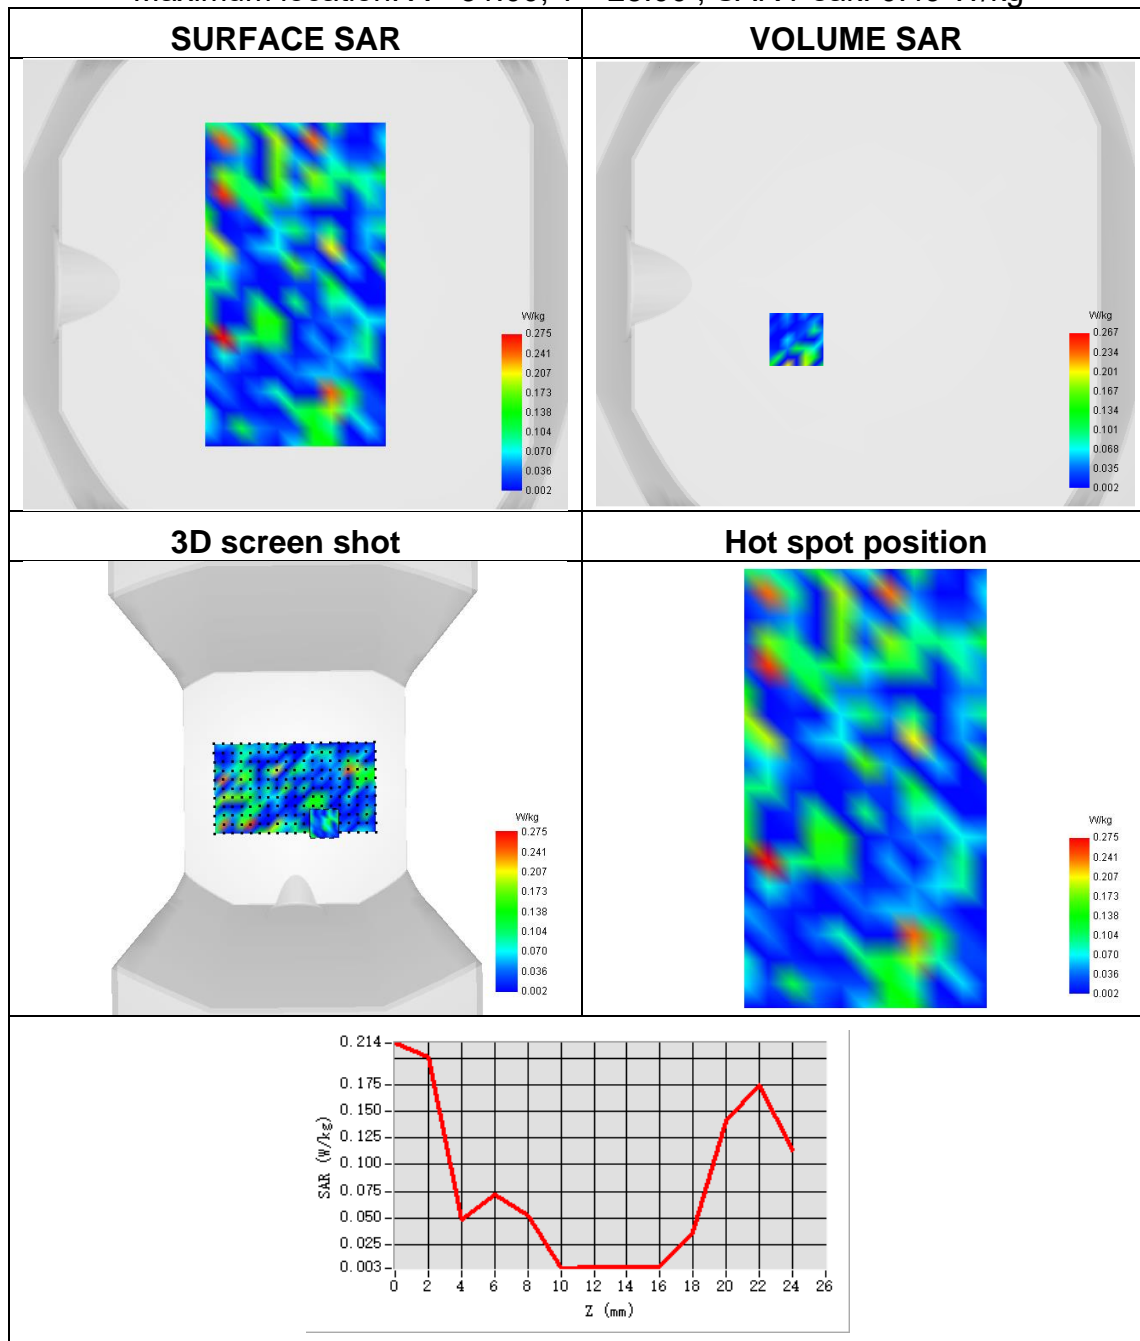



## **Appendix C. Probe Calibration and Dipole Calibration Report**

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※