





Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.4°C
M/N: Luna	Humidity: 44%RH
Test Voltage: Battery	Test Data: 2023-02-16
Test Mode: TX BT	
Note:	



No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	141.429MHz	3.14	19.18	22.32	43.50	-21.18	PK	Ver
2*	430.004MHz	3.83	23.33	27.16	46.00	-18.84	PK	Ver
3*	964.353MHz	4.81	34.24	39.05	54.00	-14.95	PK	Ver

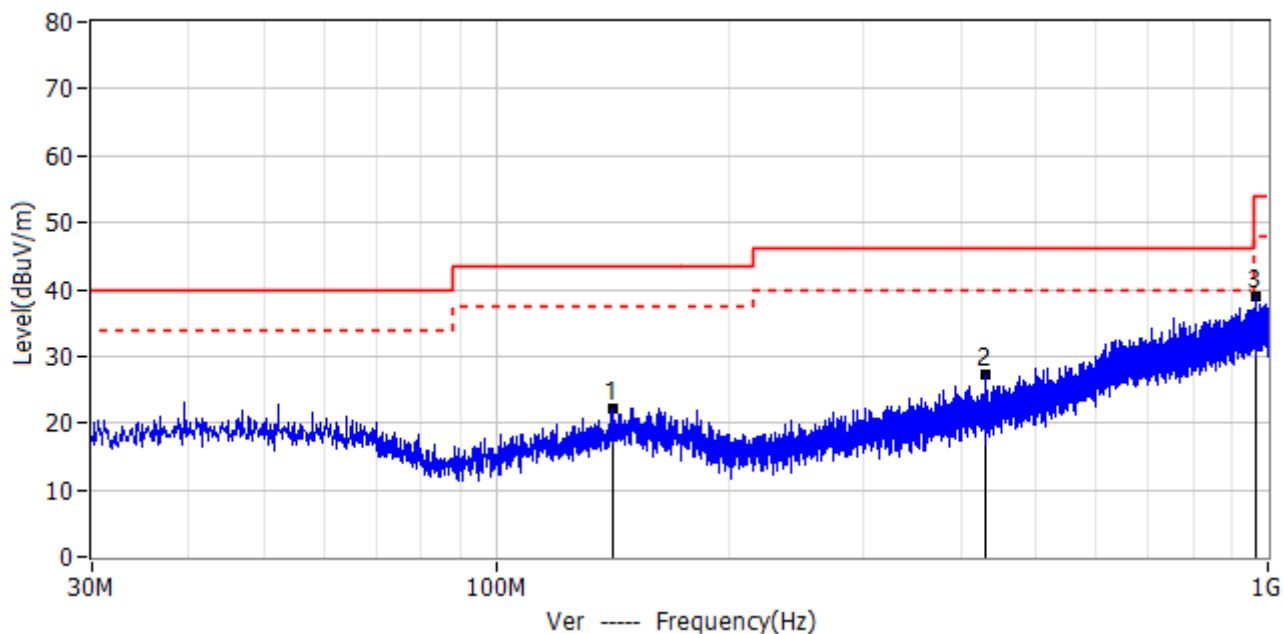


Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.6°C
M/N: Luna	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-02-17
Test Mode: DH5 2402	
Note:	

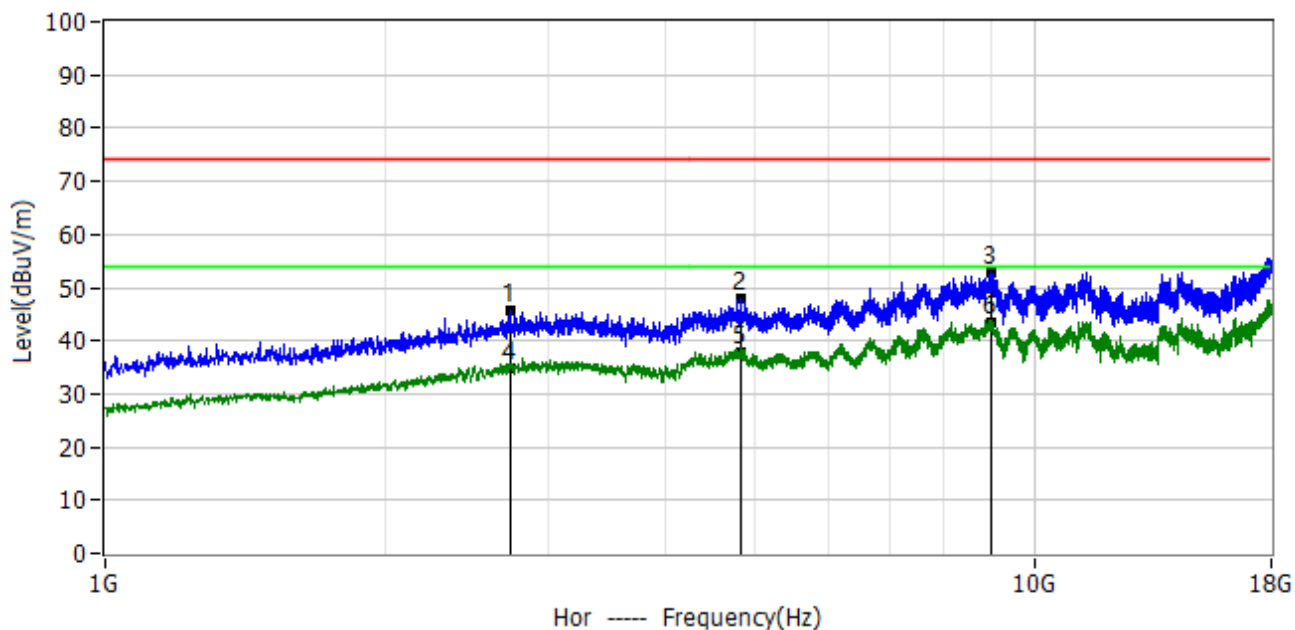

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.734GHz	55.26	-9.75	45.51	74.00	-28.49	PK	Hor
2*	4.840GHz	54.01	-6.02	47.99	74.00	-26.01	PK	Hor
3*	8.999GHz	54.16	-1.17	52.99	74.00	-21.01	PK	Hor
4*	2.734GHz	44.55	-9.75	34.80	54.00	-19.20	AV	Hor
5*	4.840GHz	43.72	-6.02	37.70	54.00	-16.30	AV	Hor
6*	8.999GHz	44.47	-1.17	43.30	54.00	-10.70	AV	Hor




Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.6°C
M/N: Luna	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-02-17
Test Mode: DH5 2402	
Note:	

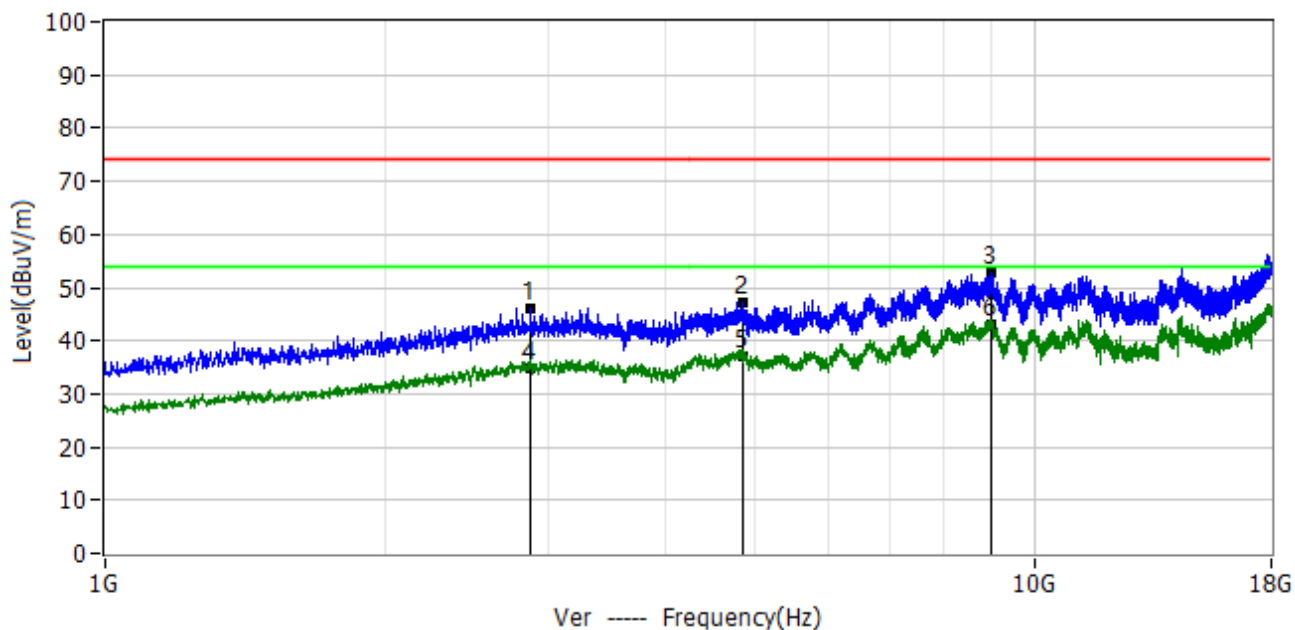

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.874GHz	55.06	-9.01	46.05	74.00	-27.95	PK	Ver
2*	4.851GHz	53.32	-6.02	47.30	74.00	-26.70	PK	Ver
3*	8.996GHz	53.97	-1.18	52.79	74.00	-21.21	PK	Ver
4*	2.874GHz	43.81	-9.01	34.80	54.00	-19.20	AV	Ver
5*	4.851GHz	43.22	-6.02	37.20	54.00	-16.80	AV	Ver
6*	8.996GHz	44.08	-1.18	42.90	54.00	-11.10	AV	Ver




Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.6°C
M/N: Luna	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-02-17
Test Mode: DH5 2441	
Note:	

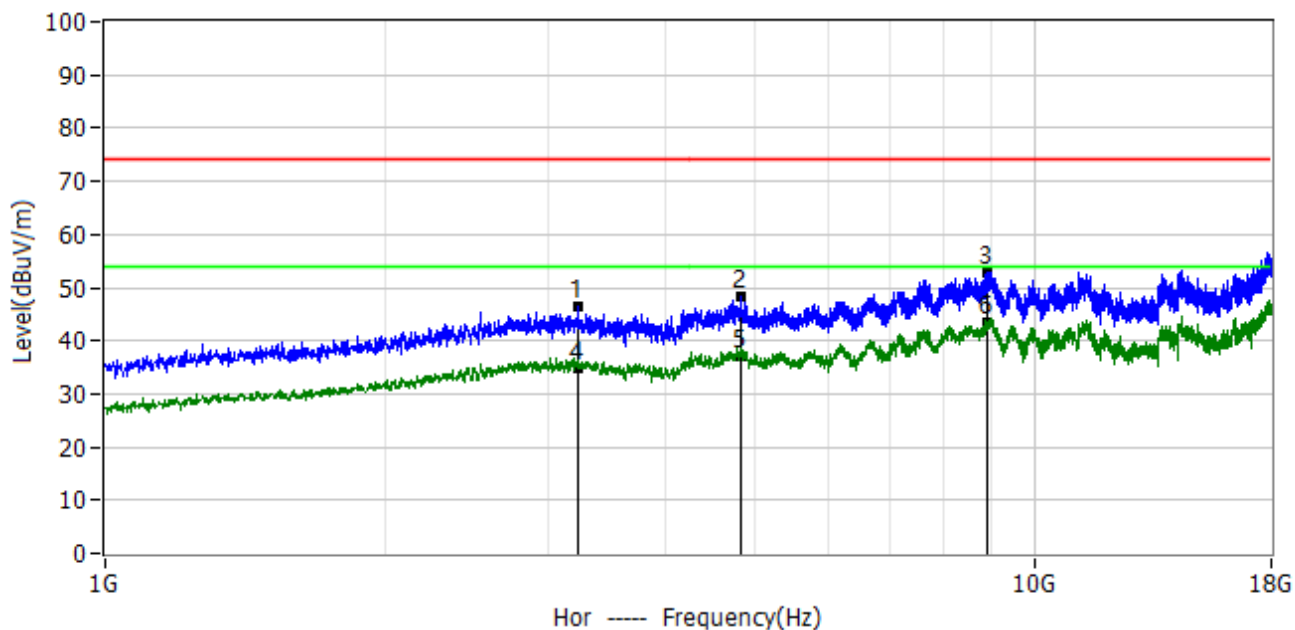

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	3.231GHz	54.74	-8.42	46.32	74.00	-27.68	PK	Hor
2*	4.823GHz	54.20	-6.00	48.20	74.00	-25.80	PK	Hor
3*	8.916GHz	54.35	-1.41	52.94	74.00	-21.06	PK	Hor
4*	3.231GHz	43.42	-8.42	35.00	54.00	-19.00	AV	Hor
5*	4.823GHz	43.00	-6.00	37.00	54.00	-17.00	AV	Hor
6*	8.916GHz	44.91	-1.41	43.50	54.00	-10.50	AV	Hor




Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.6°C
M/N: Luna	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-02-17
Test Mode: DH5 2441	
Note:	

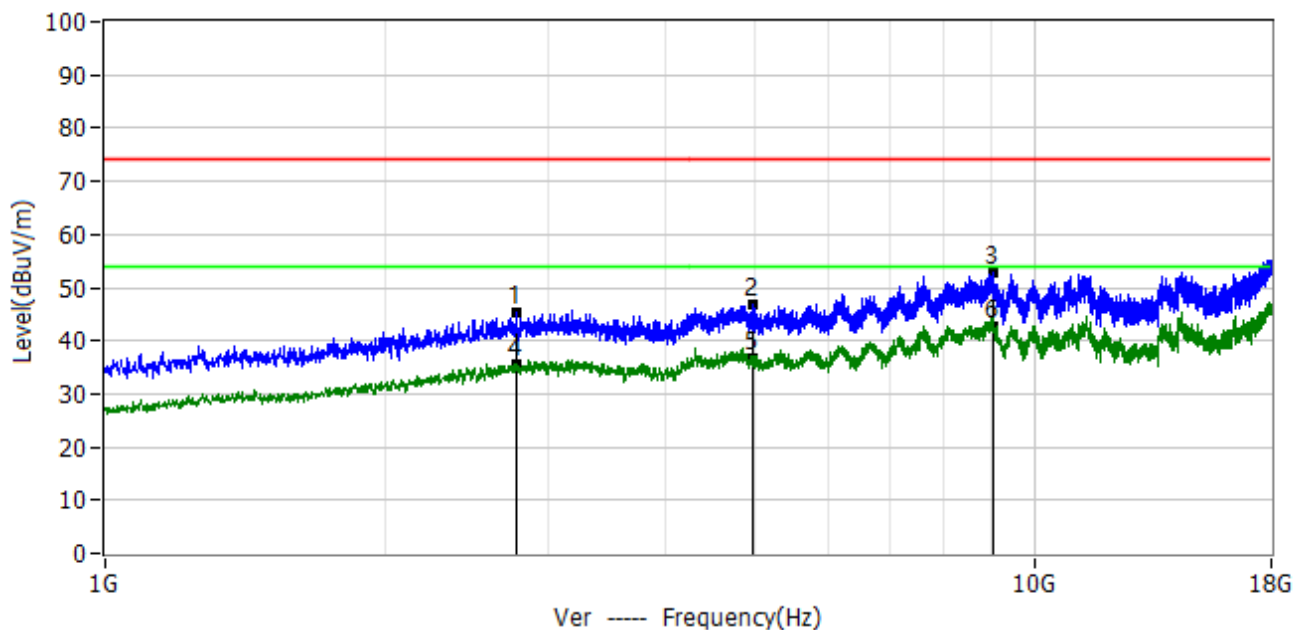

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.768GHz	54.89	-9.57	45.32	74.00	-28.68	PK	Ver
2*	4.967GHz	52.93	-6.11	46.82	74.00	-27.18	PK	Ver
3*	9.022GHz	53.85	-1.17	52.68	74.00	-21.32	PK	Ver
4*	2.768GHz	45.07	-9.57	35.50	54.00	-18.50	AV	Ver
5*	4.967GHz	42.81	-6.11	36.70	54.00	-17.30	AV	Ver
6*	9.022GHz	43.87	-1.17	42.70	54.00	-11.30	AV	Ver




Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.6°C
M/N: Luna	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-02-17
Test Mode: DH5 2480	
Note:	

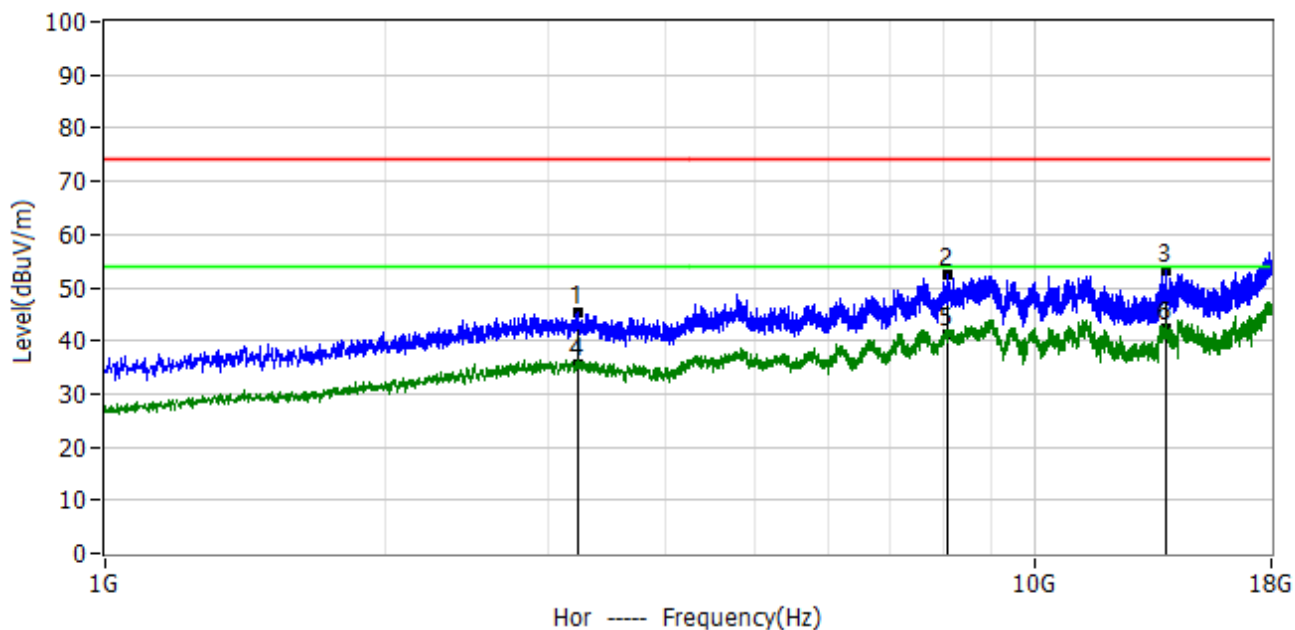

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	3.229GHz	53.65	-8.42	45.23	74.00	-28.77	PK	Hor
2*	8.074GHz	56.25	-3.79	52.46	74.00	-21.54	PK	Hor
3*	13.878GHz	47.65	5.45	53.10	74.00	-20.90	PK	Hor
4*	3.229GHz	44.12	-8.42	35.70	54.00	-18.30	AV	Hor
5*	8.074GHz	44.89	-3.79	41.10	54.00	-12.90	AV	Hor
6*	13.878GHz	37.05	5.45	42.50	54.00	-11.50	AV	Hor



Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.6°C
M/N: Luna	Humidity: 47%RH
Test Voltage: Battery	Test Data: 2023-02-17
Test Mode: DH5 2480	
Note:	

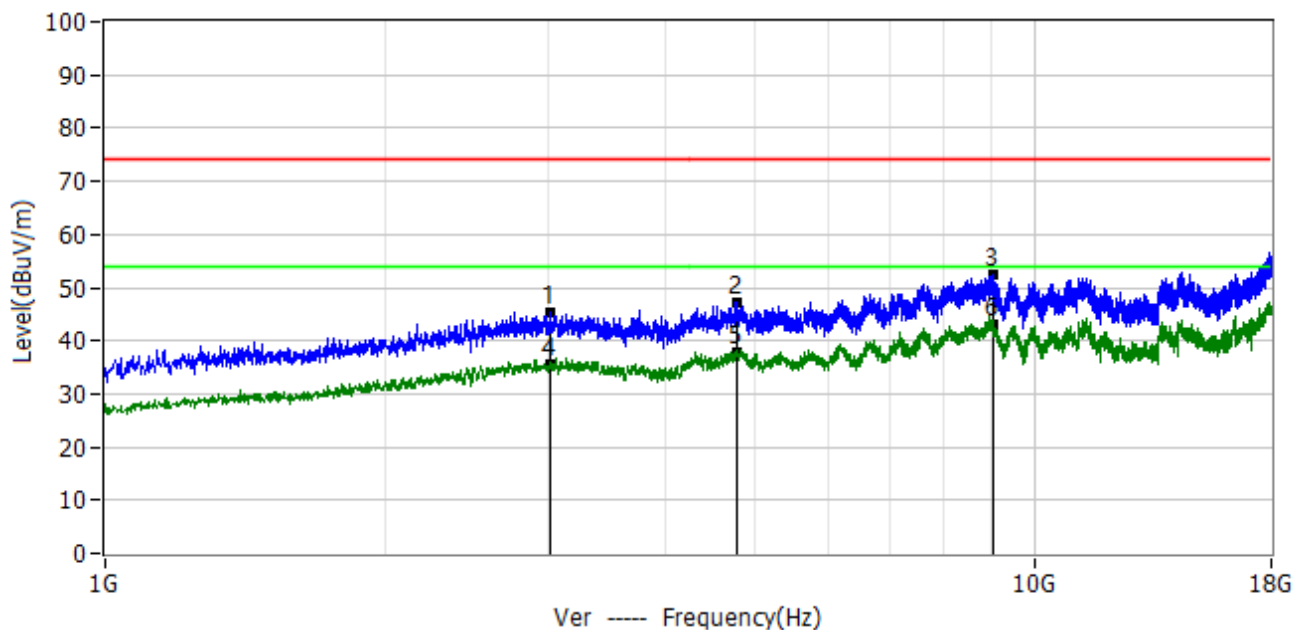


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	3.012GHz	53.49	-8.34	45.15	74.00	-28.85	PK	Ver
2*	4.783GHz	53.05	-5.97	47.08	74.00	-26.92	PK	Ver
3*	9.018GHz	53.44	-1.17	52.27	74.00	-21.73	PK	Ver
4*	3.012GHz	43.84	-8.34	35.50	54.00	-18.50	AV	Ver
5*	4.783GHz	43.87	-5.97	37.90	54.00	-16.10	AV	Ver
6*	9.018GHz	44.17	-1.17	43.00	54.00	-11.00	AV	Ver



3.2.8 TEST RESULTS (BAND EDGE REQUIREMENTS)


Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.8°C
M/N: Luna	Humidity: 45%RH
Test Voltage: Battery	Test Data: 2023-03-11
Test Mode: DH5 2402	
Note:	

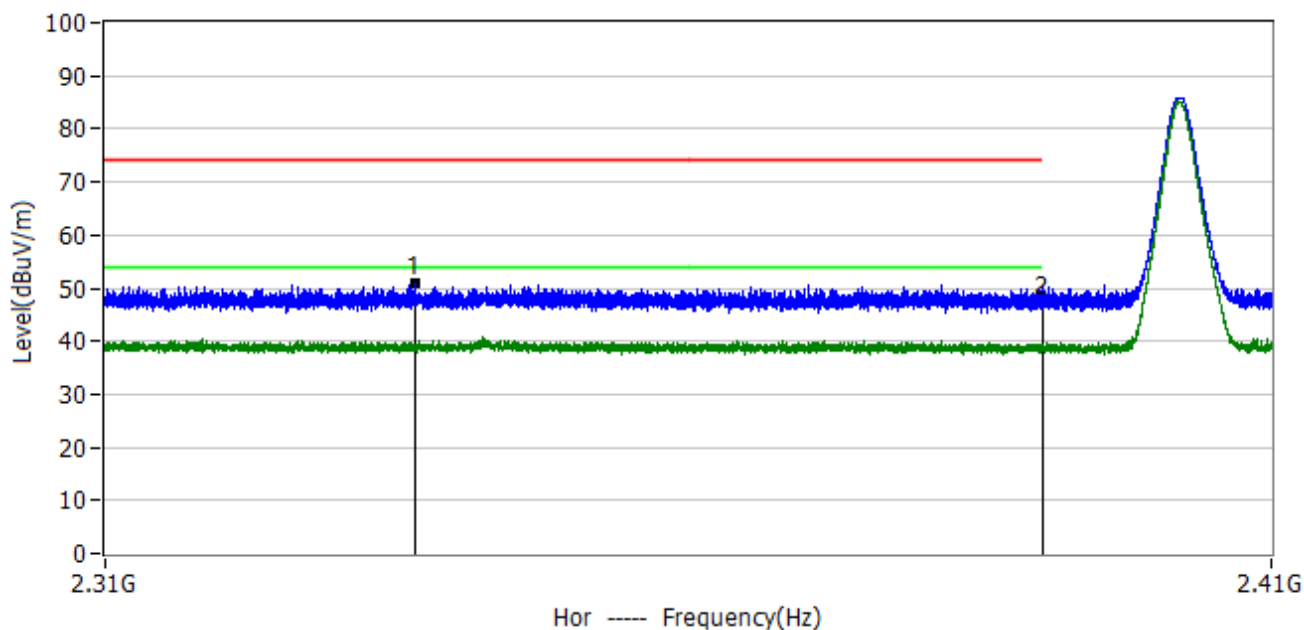

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3361GHz	16.81	34.08	50.89	74.00	-23.11	PK	Hor
2*	2.3900GHz	13.15	33.95	47.10	74.00	-26.90	PK	Hor




Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.8°C
M/N: Luna	Humidity: 45%RH
Test Voltage: Battery	Test Data: 2023-03-11
Test Mode: DH5 2402	
Note:	

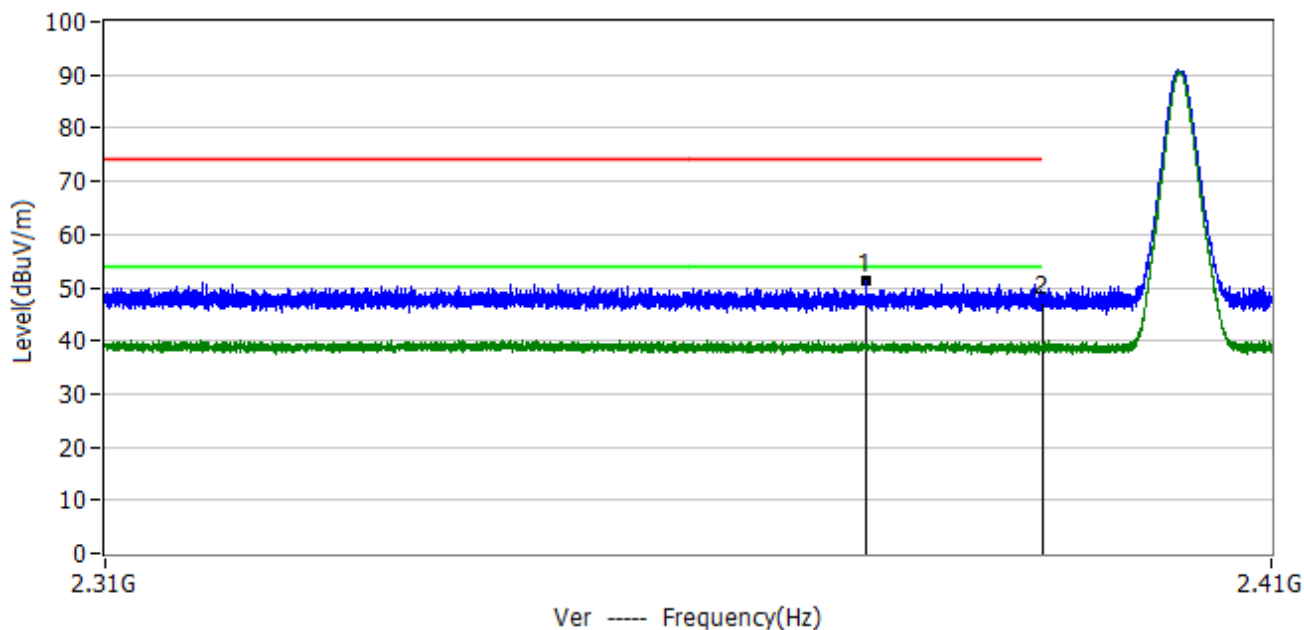

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.3748GHz	17.44	33.99	51.43	74.00	-22.57	PK	Ver
2*	2.3900GHz	13.35	33.95	47.30	74.00	-26.70	PK	Ver




Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.8°C
M/N: Luna	Humidity: 45%RH
Test Voltage: Battery	Test Data: 2023-03-11
Test Mode: DH5 2480	
Note:	

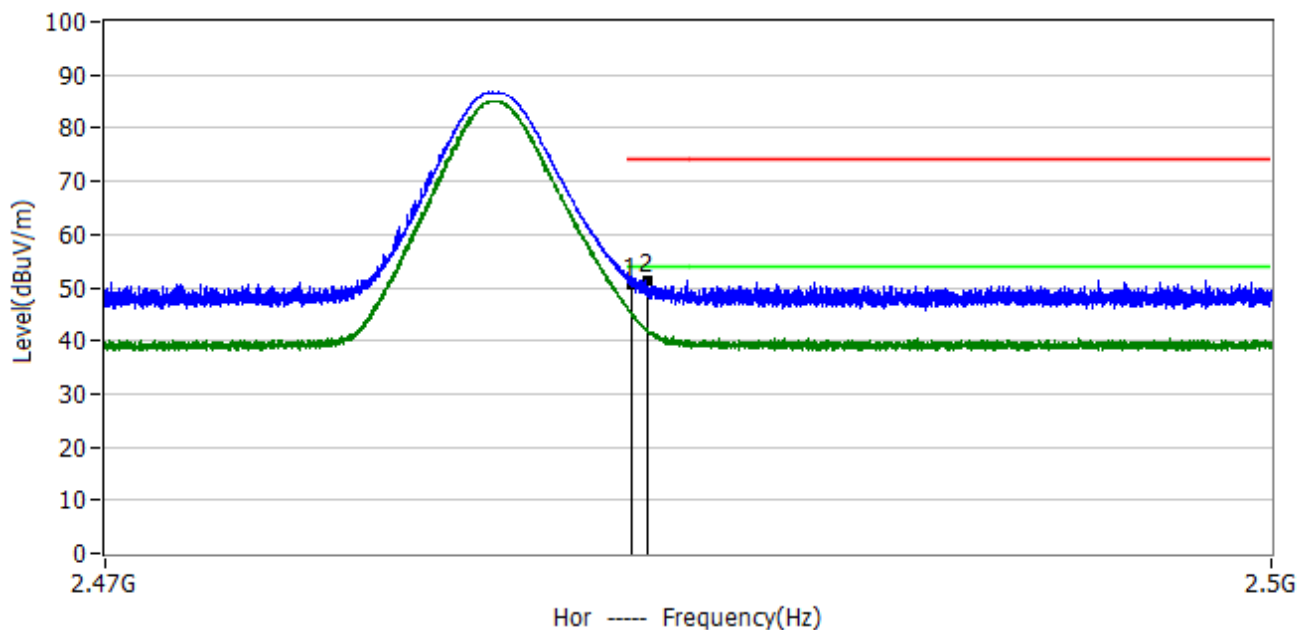

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	16.47	34.13	50.60	74.00	-23.40	PK	Hor
2*	2.4839GHz	17.35	34.13	51.48	74.00	-22.52	PK	Hor



Project: LGT23B010	Test Engineer: Dylan.shi
EUT: Smart phone	Temperature: 24.8°C
M/N: Luna	Humidity: 45%RH
Test Voltage: Battery	Test Data: 2023-03-11
Test Mode: DH5 2480	
Note:	

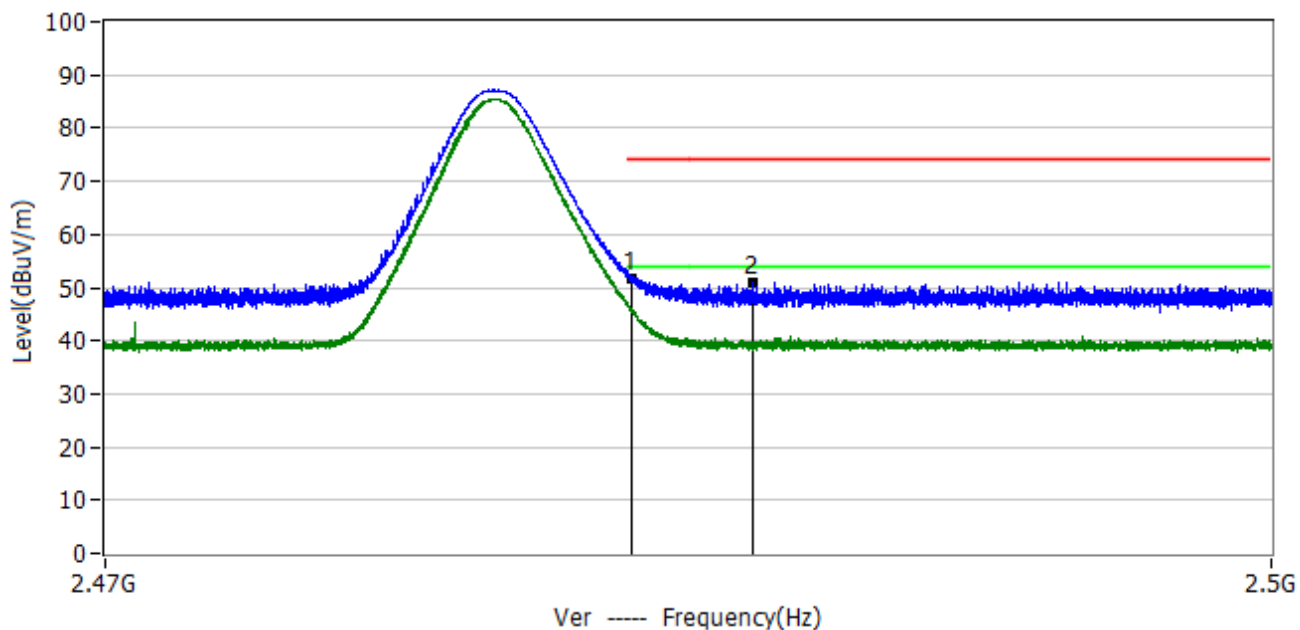

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	2.4835GHz	17.67	34.13	51.80	74.00	-22.20	PK	Ver
2*	2.4866GHz	16.91	34.13	51.04	74.00	-22.96	PK	Ver



4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Hopping Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300– 2403 MHz Upper Band Edge: 2479 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold



4.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Tune the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, the span is set to be greater than RBW.

4.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5. NUMBER OF HOPPING CHANNEL

5.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating FrequencyRange
RB	300KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 300KHz, VBW=300KHz, Sweep time = Auto.

5.3 TEST SETUP



5.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

5.5 TEST RESULTS

For the measurement records , refer to the appendix I.



6. AVERAGE TIME OF OCCUPANCY

6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer.
- b. Set RBW =1MHz/VBW =3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $3.37 \times 31.6 = 106.6$.
- j. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $5.06 \times 31.6 = 160$.
- k. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So the number of pulses in the observation period of 31.6 seconds is $10.12 \times 31.6 = 320$.

6.3 TEST SETUP



6.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.5 TEST RESULTS

For the measurement records refer to the appendix I.



7. HOPPING CHANNEL SEPARATION MEASUREMENT

7.1 LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

7.3 TEST SETUP



7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.5 TEST RESULTS

For the measurement records refer to the appendix I.



8. BANDWIDTH TEST

8.1 LIMIT

FCC Part15 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)	Bandwidth	N/A	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

8.5 TEST RESULTS

For the measurement records, refer to the appendix I.



9. OUTPUT POWER TEST

9.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)&(b)(1)	Output Power	1 W or 0.125W	2400-2483.5	PASS
		if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW (20.97dBm)		

9.2 TEST PROCEDURE

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

a) Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW ≥ RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.


e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DSS bandwidth and shall use a fast-responding diode detector.

9.3 TEST SETUP

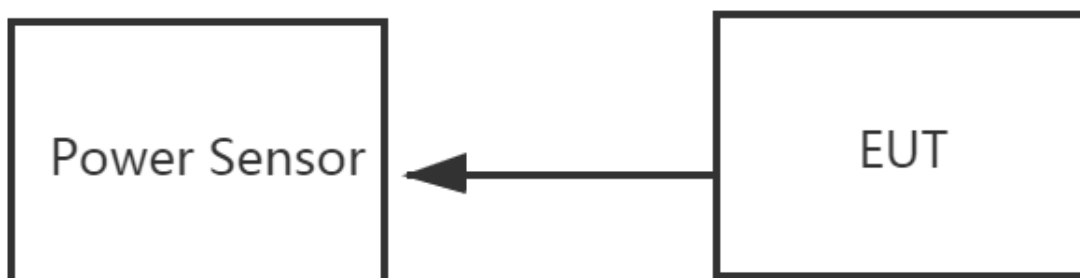

9.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.



9.5 TEST RESULTS

For the measurement records refer to the appendix I.



10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is PIFA antenna. It comply with the standard requirement.



APPENDIX I: TEST RESULTS

Dwell Time

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.375	115.125	307	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.629	249.237	153	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.877	322.224	112	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.383	114.517	299	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.631	265.853	163	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.88	311.04	108	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.381	114.3	300	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.634	264.708	162	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.884	297.052	103	31600	400	Pass

