



FCC SAR TEST REPORT

Report No.: STS1908166H02

Issued for

Shanghai Unihertz E-Commerce Co., Ltd
Room 302, No. 5, Lane 59, Shennan Rd, Minhang district,
Shanghai, China 201108

Product Name:	Smart phone
Brand Name:	Unihertz
Model Name:	Titan
Series Model:	N/A
FCC ID:	2AK6CTITAN
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Head: 0.852 W/kg
	Body: 1.040 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





Test Report Certification

Applicant's name : Shanghai Unihertz E-Commerce Co., Ltd
Address : Room 302, No. 5, Lane 59, Shennan Rd, Minhang district, Shanghai, China 201108
Manufacture's Name : OBLUE Communication Technology Co.,Ltd.
Address : Room 406, Hivac Building, No. 2 North keji Rd, North Hi-Tech Industry Park, Nanshan district, shenzhen, China 201108

Product description

Product name : Smart phone
Brand name : Unihertz
Model name : Titan
Series Model..... : N/A

Standards : ANSI/IEEE Std. C95.1-1992
 FCC 47 CFR Part 2 (2.1093)
 IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test :
Date (s) of performance of tests..... : 26 Aug. 2019~03 Sep. 2019
Date of Issue..... : 04 Sep. 2019
Test Result..... : **Pass**

Testing Engineer : Aaron Bu
 (Aaron Bu)

Technical Manager : Jason Lu
 (Jason Lu)

Authorized Signatory : Vita Li
 (Vita Li)





Table of Contents

1.General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2.Test Standards And Limits	8
3. SAR Measurement System	9
3.1 Definition Of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	14
5.1 Validation System	14
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Antenna Location Sketch	17
7.1 SAR test exclusion consider table	18
8. EUT Test Position	21
8.1 Define Two Imaginary Lines On The Handset	21
8.2 Hotspot mode exposure position condition	22
9. Uncertainty	23
9.1 Measurement Uncertainty	23
9.2 System validation Uncertainty	24
10. Conducted Power Measurement	25
10.1 Test Result	25
10.2 Tune-up Power	56
10.3 SAR Test Exclusions Applied	62
11. EUT And Test Setup Photo	64
11.1 EUT Photo	64
11.2 Setup Photo	67
12. SAR Result Summary	73
12.1 Head SAR	73
12.2 Body-worn and Hotspot SAR	77
12.3 repeated SAR measurement	82
13. Equipment List	86
Appendix A. System Validation Plots	87
Appendix B. SAR Test Plots	119
Appendix C. Probe Calibration And Dipole Calibration Report	157



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	04 Sep. 2019	STS1908166H02	ALL	Initial Issue

Note: **Format version** of the report -V01





1.General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	Smart phone	
Brand Name	Unihertz	
Model Name	Titan	
Series Model	N/A	
FCC ID	2AK6CTITAN	
Model Difference	N/A	
Battery	Rated Voltage: 3.85V; Charge Limit: 4.4V; Capacity: 6000mAh	
Device Category	Portable	
Product stage	Production unit	
RF Exposure Environment	General Population / Uncontrolled	
IMEI	111111111111111 222222222222222	
Hardware Version	G61_V2.0	
Software Version	Titan_20190629	
Frequency Range	GSM 850:824.2~848.8MHz PCS1900:1850.2~1909.8MHz WCDMA Band II:1852.4~1907.6MHz WCDMA band IV:1712.4~1752.6 MHz WCDMA Band V:826.4~846.6MHz LTE Band 2:1850.7~1909.3MHz LTE Band 4:1710.7~1754.3MHz LTE Band 5:824.7~848.3MHz LTE Band 7:2502.5~2567.5MHz LTE Band 12:699.7~715.3MHz LTE Band 13:779.5~784.5MHz LTE Band 17:706.5~713.5MHz LTE Band 25:1850.7~1914.3MHz LTE Band 26:814.7~848.3MHz	LTE Band 41:2555~2655MHz LTE Band 66:1710~1780MHz WLAN 802.11b/g/n(HT20):2412~2462MHz WLAN 802.11n(HT40):2422~2452MHz 5GHz IEEE 802.11a/n/ac(20MHz): 5180~5825MHz 5GHz IEEE 802.11n/ac(40MHz): 5190~5795MHz 5GHz IEEE 802.11ac(80MHz): 5210~5775MHz GPS: 1575.42MHz FM: 87.5 MHz~108 MHz Wireless charger: 110~205KHz NFC:13.56MHz



	Band	Mode	Head (W/kg)	Body Worn and Hotspot(W/kg)
Max. Reported SAR(1g): (Limit:1.6W/kg)	PCE	GSM 850	0.089	0.073
	PCE	GSM 1900	0.182	0.343
	PCE	WCDMA Band II	0.852	0.390
	PCE	WCDMA Band IV	0.273	0.702
	PCE	WCDMA Band V	0.063	0.070
	PCE	LTE Band 2	0.205	0.283
	PCE	LTE Band 4	0.299	0.462
	PCE	LTE Band 5	0.089	0.093
	PCE	LTE Band 7	0.151	1.040
	PCE	LTE Band 12	0.070	0.092
	PCE	LTE Band 13	0.041	0.111
	PCE	LTE Band 17	0.079	0.124
	PCE	LTE Band 25	0.222	0.309
	PCE	LTE Band 26	0.061	0.045
	PCE	LTE Band 41	0.018	0.674
	PCE	LTE Band 66	0.300	0.419
	DTS	2.4G WLAN	0.331	0.182
	NII	5.2G WLAN	0.398	0.219
	NII	5.3G WLAN	0.184	0.094
	NII	5.6G WLAN ^{Note}	0.372	0.186
NII	5.8G WLAN ^{Note}	0.213	0.106	
DTS	Bluetooth ^{Note}	0.265	0.132	
1-g Sum SAR			1.250	1.259
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS) Unlicensed National Information Infrastructure TX(NII)			
Operating Mode:	GSM: GSM Voice; GPRS; EGPRS Class 12; WCDMA:RMC,HSDPA,HSUPA Release 6; LTE:QPSK,16QAM; WLAN: 802.11 b/g/n(HT20); n/a/ac(HT20/40); ac/(HT80) Bluetooth: 4.2+EDR (GFSK +π/4DQPSK+8DPSK) ; BLE NFC:ASK			
Antenna Specification:	GSM,WCDMA,LTE: PIFA Antenna BT,WLAN: PIFA Antenna			
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time			
Hotspot Mode:	Support			
DTM Mode:	Not Support			
<p>Note:</p> <ol style="list-style-type: none"> 1. Bluetooth, 5.6G WLAN and 5.8G WLAN SAR was estimated 2. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active) 3. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests. 4. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power 				



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

SHENZHEN STS TEST SERVICES CO.,LTD.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards And Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition Of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

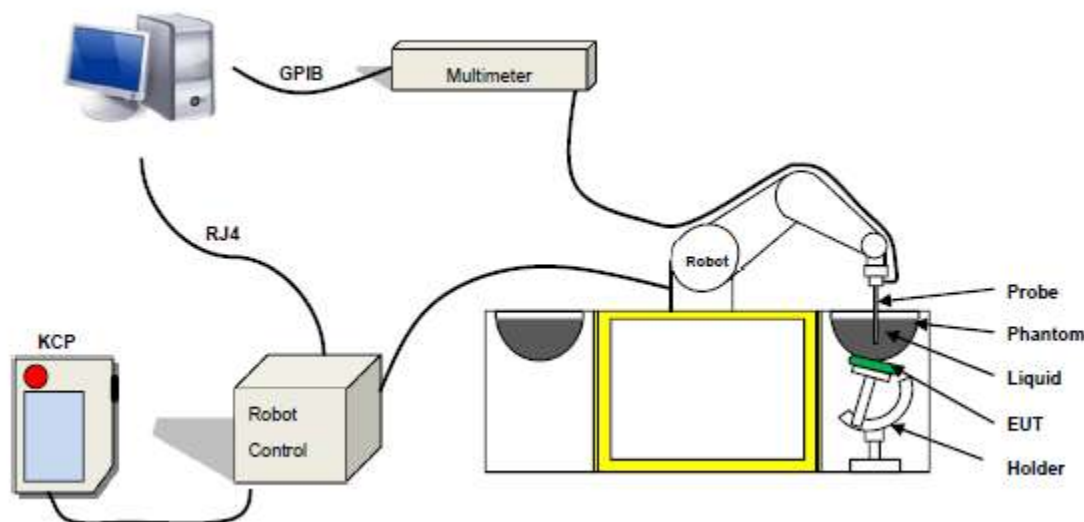

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 45/15 EPGO281 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 2.5 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Distance between dipole/probe extremity: 8 mm (repeatability better than +/- 1mm)
- Probe linearity: $0 \pm 2.60\%$ (0.11dB)
- Axial Isotropy: < 0.25 dB
- Spherical Isotropy: < 0.25 dB
- Calibration range: 450 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

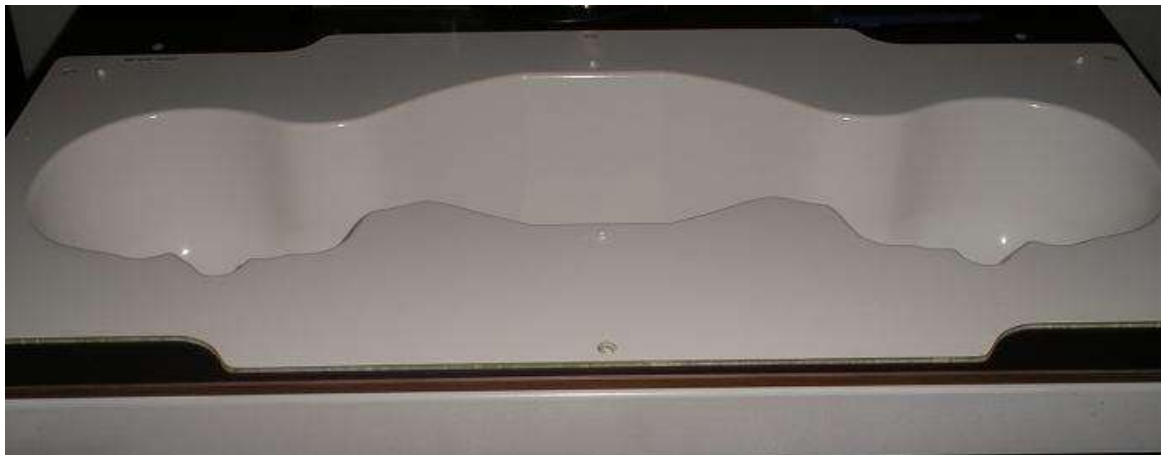


Figure-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Frequency (MHz)	Bactericide	DGBE	HEC	NaCl	Sucrose	1,2-Propanediol	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
835	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
900	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
1800	/	13.84	/	0.35	/	/	30.45	55.36	1.38	41.0
1900	/	13.84	/	0.35	/	/	30.45	55.36	1.38	41.0
2000	/	7.99	/	0.16	/	/	19.97	71.88	1.55	41.1
2450	/	7.99	/	0.16	/	/	19.97	71.88	1.88	40.3
2600	/	7.99	/	0.16	/	/	19.97	71.88	1.88	40.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
2600	38.5	52.0	1.95	2.23
5200	36.8	51.2	4.84	5.16
5800	35.3	49.0	5.47	6.28



LIQUID MEASUREMENT RESULTS

Date	Ambient condition		Head Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2019-08-26	23.4	52	750 MHz	23.2	Permittivity:	41.9	42.41	1.22	±5
					Conductivity:	0.89	0.86	-2.27	±5
2019-08-27	23.1	50	835 MHz	22.8	Permittivity:	41.5	42.08	1.40	±5
					Conductivity:	0.9	0.87	-3.33	±5
2019-08-28	23.3	47	1800 MHz	23.0	Permittivity:	40	40.34	0.85	±5
					Conductivity:	1.40	1.42	1.43	±5
2019-08-29	23.1	49	1900 MHz	22.8	Permittivity:	40	39.49	-1.28	±5
					Conductivity:	1.4	1.37	-2.14	±5
2019-08-30	23.4	50	2450 MHz	23.1	Permittivity:	39.2	40.71	3.85	±5
					Conductivity:	1.8	1.77	-1.67	±5
2019-09-02	23.7	55	2600 MHz	23.5	Permittivity:	39.0	38.35	-1.67	±5
					Conductivity:	1.96	2.00	2.04	±5
2019-09-03	23.9	42	5200 MHz	23.7	Permittivity:	36.0	36.43	1.19	±5
					Conductivity:	4.66	4.71	1.07	±5
2019-09-03	23.9	42	5300 MHz	23.7	Permittivity:	35.9	36.11	0.58	±5
					Conductivity:	4.76	4.83	1.47	±5


Date	Ambient condition		Body Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2019-08-26	23.4	52	750 MHz	23.2	Permittivity:	55.5	55.43	-0.13	±5
					Conductivity:	0.96	0.97	1.04	±5
2019-08-27	23.1	50	835 MHz	22.8	Permittivity:	55.2	54.58	-1.12	±5
					Conductivity:	0.97	0.96	-1.03	±5
2019-08-28	23.3	47	1800 MHz	23.0	Permittivity:	53.3	54.00	1.31	±5
					Conductivity:	1.52	1.54	1.32	±5
2019-08-29	23.1	49	1900 MHz	22.8	Permittivity:	53.3	51.93	-2.57	±5
					Conductivity:	1.52	1.51	-0.66	±5
2019-08-30	23.4	50	2450 MHz	23.1	Permittivity:	52.7	52.67	-0.06	±5
					Conductivity:	1.95	1.99	2.05	±5
2019-09-02	23.7	55	2600 MHz	23.5	Permittivity:	52.5	53.77	2.42	±5
					Conductivity:	2.16	2.23	3.24	±5
2019-09-03	23.9	42	5200 MHz	23.7	Permittivity:	49.0	49.86	1.76	±5
					Conductivity:	5.30	5.37	1.32	±5
2019-09-03	23.9	42	5300 MHz	23.7	Permittivity:	48.70	48.92	0.45	±5
					Conductivity:	5.53	5.51	-0.36	±5

5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

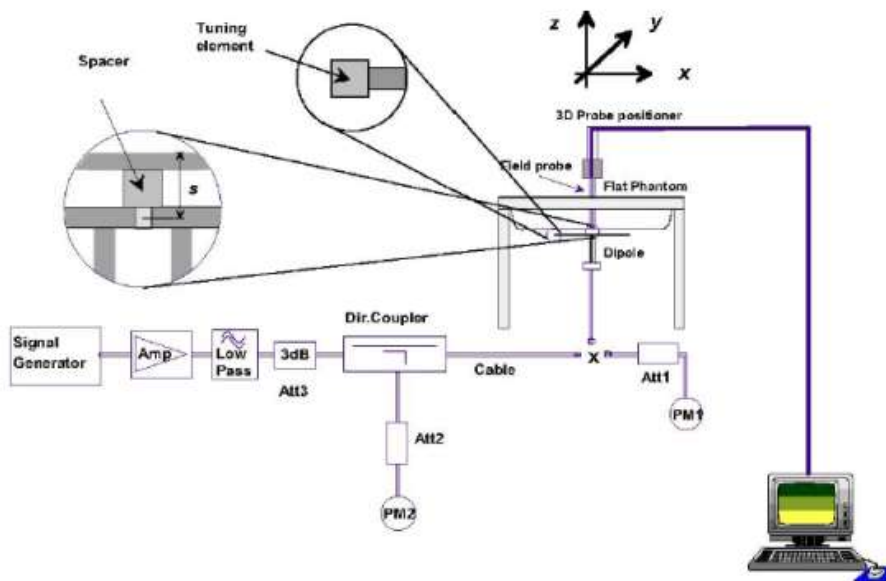



5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg/W)	Target (W/Kg/W)	Tolerance(%)	Date
750 Head	100	0.871	8.71	8.49	2.59	2019-08-26
750 Body	100	0.842	8.42	8.49	-0.82	2019-08-26
835 Head	100	0.987	9.87	9.56	3.24	2019-08-27
835 Body	100	1.028	10.28	9.56	7.53	2019-08-27
1800 Head	100	3.854	38.54	38.4	0.36	2019-08-28
1800 Body	100	3.831	38.31	38.4	-0.23	2019-08-28
1900 Head	100	3.863	38.63	39.7	-2.70	2019-08-29
1900 Body	100	3.927	39.27	39.7	-1.08	2019-08-29
2450 Head	100	5.279	52.79	52.4	0.74	2019-08-30
2450 Body	100	5.123	51.23	52.4	-2.23	2019-08-30
2600 Head	100	5.404	54.04	55.3	-2.28	2019-09-02
2600 Body	100	5.740	57.40	55.3	3.80	2019-09-02
5200 Head	100	15.897	158.97	159	-0.02	2019-09-03
5200 Body	100	15.689	156.89	159	-1.33	2019-09-03
5300 Head	100	16.505	165.05	166.4	-0.81	2019-09-03
5300 Body	100	16.759	167.59	166.4	0.72	2019-09-03

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan & Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a Smart phone, support Bluetooth/WIFI/GSM/WCDMA/LTE modes.



Band	Test position configurations					
	Front	Back	Left edge	Right edge	Top edge	Bottom edge
WWAN	<5mm	<5mm	<5mm	48mm	140mm	<5mm
WLAN/BT	<5mm	<5mm	72	<5mm	<5mm	144mm



7.1 SAR test exclusion consider table

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz ~6GHz and ≤50mm> table, this device SAR test configurations consider as following:

Band	Mode	Max. Peak Power		Test Position Configurations					
		dBm	mW	Front Side	Back Side	Left Edge	Right Edge	Top Edge	Bottom Edge
GSM 850	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			16	16	16	164	659	16
	GPRS Data-4 Slot	29	794.328	Yes	Yes	Yes	Yes	Yes	Yes
GSM 1900	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			11	11	11	109	1090	11
	GPRS Data-4 Slot	25	316.228	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band II	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			11	11	11	109	1090	11
	RMC	24	251.189	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band IV	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			11	11	11	109	1090	11
	RMC	22	158.489	Yes	Yes	Yes	Yes	No	Yes
WCDMA Band V	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			16	16	16	164	660	16
	HSDPA Subtest-1	22	158.489	Yes	Yes	Yes	No	No	Yes
LTE Band 2	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			11	11	11	109	1090	11
	QPSK	24	251.189	Yes	Yes	Yes	Yes	No	Yes
LTE Band 4	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			11	11	11	109	1090	11
	QPSK	22	158.489	Yes	Yes	Yes	Yes	No	Yes
LTE Band 5	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			16	16	16	164	661	16
	QPSK	24	251.189	Yes	Yes	Yes	Yes	No	Yes
LTE Band 7	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			10	10	10	96	996	10
	QPSK	21	125.893	Yes	Yes	Yes	Yes	No	Yes



LTE Band 12	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			16	16	16	164	586	16
	QPSK	24	251.189	Yes	Yes	Yes	Yes	No	Yes
LTE Band 13	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			16	16	16	164	633	16
	QPSK	23	199.526	Yes	Yes	Yes	Yes	No	Yes
LTE Band 17	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			16	16	16	164	590	16
	QPSK	23	199.526	Yes	Yes	Yes	Yes	No	Yes
LTE Band 25	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			11	11	11	109	1090	11
	QPSK	24	251.189	Yes	Yes	Yes	Yes	No	Yes
LTE Band 26	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			16	16	16	164	670	16
	QPSK	24	251.189	Yes	Yes	Yes	Yes	No	Yes
LTE Band 41	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			10	10	10	96	996	10
	QPSK	21	125.893	Yes	Yes	Yes	Yes	No	Yes
LTE Band 66	Distance to User			<5mm	<5mm	<5mm	48mm	140mm	<5mm
	exclusion threshold			11	11	11	109	1090	11
	QPSK	22	158.489	Yes	Yes	Yes	Yes	No	Yes
2.4G WLAN	Distance to User			<5mm	<5mm	72	<5mm	<5mm	144
	exclusion threshold			10	10	316	10	10	1036
	802.11b	15	31.623	Yes	Yes	No	Yes	Yes	No
5.2G WLAN	Distance to User			<5mm	<5mm	72	<5mm	<5mm	144
	exclusion threshold			7	7	286	7	7	1006
	802.11a	12	15.849	Yes	Yes	No	Yes	Yes	No
5.3G WLAN	Distance to User			<5mm	<5mm	72	<5mm	<5mm	144
	exclusion threshold			7	7	285	7	7	1005
	802.11a	12	15.849	Yes	Yes	No	Yes	Yes	No
5.6G WLAN	Distance to User			<5mm	<5mm	72	<5mm	<5mm	144
	exclusion threshold			6	6	285	6	6	1005
	802.11 ac-HT20	7.7	5.888	No	No	No	No	No	No
5.8G WLAN	Distance to User			<5mm	<5mm	72	<5mm	<5mm	144
	exclusion threshold			6	6	282	6	6	1002
	802.11a	5.2	3.311	No	No	No	No	No	No



Bluetooth	Distance to User			<5mm	<5mm	<5mm	<5mm	<5mm	72
	exclusion threshold			10	10	10	10	10	316
	GFSK	8	6.310	No	No	No	No	No	No

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, Mw}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR ,f(GHz) is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison
 For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a) [threshold at 50mm in step 1] + (test separation distance - 50mm) * (f (MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step 1] + (test separation distance - 50mm) * 10] mW at > 1500MHz and $\leq 6\text{GHz}$
6. Per KDB 447498 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/ HSUPA/DC-HSDPA output power is <0.25db higher than RMC 12.2Kbps, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/Kg}$, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.

8. EUT Test Position


This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

8.1 Define Two Imaginary Lines On The Handset

(1) The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.

(2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.

(3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

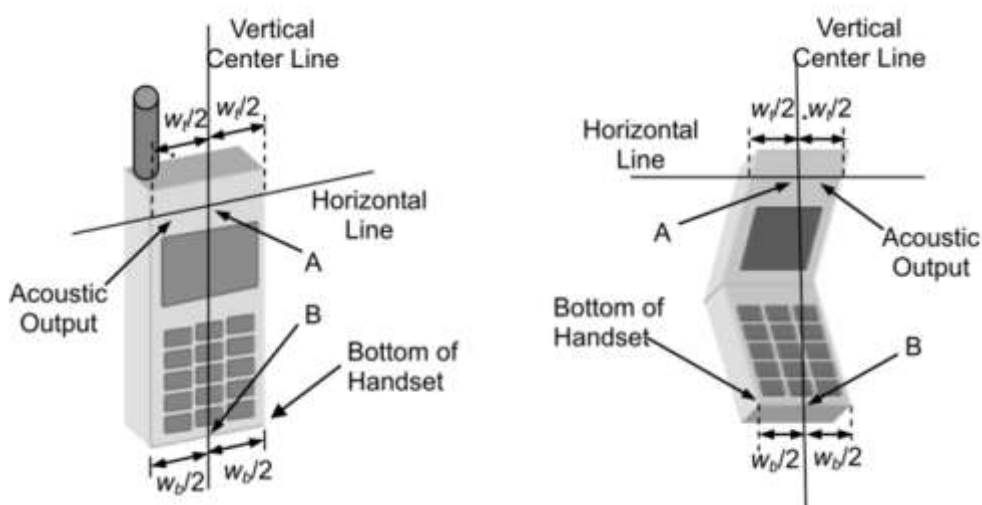

Cheek Position

1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost



Title Position

(1) To position the device in the "cheek" position described above.

(2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.




Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.



8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration(surface).

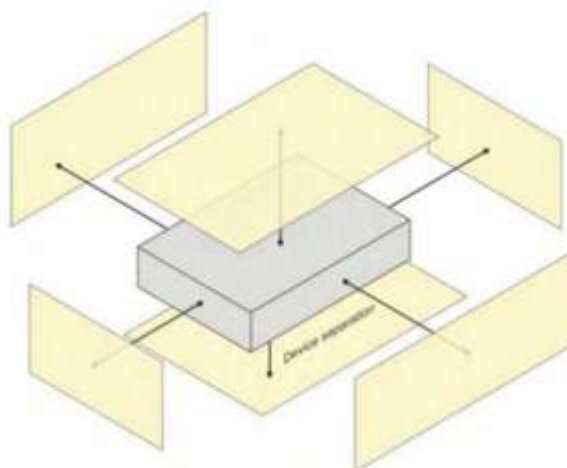



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	3	N	1	1	1	3	3	∞
SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)		K=2				19.58	19.18	



9.2 System validation Uncertainty

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source								
Deviation of experimental dipole from numerical dipole	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up								
Phantom uncertainty (shape and thickness uncertainty)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)		K=2				19.44	19.04	



10. Conducted Power Measurement

10.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	32.86	32.64	32.51	29.68	29.57	29.38
GPRS (GMSK, 1-Slot)	29.40	29.22	28.92	25.75	25.79	25.68
GPRS (GMSK, 2-Slot)	28.95	28.76	28.46	25.31	25.29	25.21
GPRS (GMSK, 3-Slot)	28.52	28.27	27.99	24.88	24.82	24.75
GPRS (GMSK, 4-Slot)	28.07	27.85	27.49	24.39	24.32	24.33
EGPRS(8PSK, 1-Slot)	28.75	28.69	28.53	26.14	26.09	26.27
EGPRS(8PSK, 2-Slot)	28.00	27.89	27.78	25.34	25.32	25.55
EGPRS(8PSK, 3-Slot)	27.25	27.18	27.00	24.56	24.55	24.75
EGPRS(8PSK, 4-Slot)	26.48	26.44	26.23	23.78	23.78	24.03

Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme.
 Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link
 Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link
 Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

Fram- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	23.83	23.61	23.48	20.65	20.54	20.35
GPRS (GMSK, 1-Slot)	20.37	20.19	19.89	16.72	16.76	16.65
GPRS (GMSK, 2-Slot)	22.93	22.74	22.44	19.29	19.27	19.19
GPRS (GMSK, 3-Slot)	24.26	24.01	23.73	20.62	20.56	20.49
GPRS (GMSK, 4-Slot)	25.06	24.84	24.48	21.38	21.31	21.32
EGPRS(8PSK, 1-Slot)	19.72	19.66	19.50	17.11	17.06	17.24
EGPRS(8PSK, 2-Slot)	21.98	21.87	21.76	19.32	19.30	19.53
EGPRS(8PSK, 3-Slot)	22.99	22.92	22.74	20.30	20.29	20.49
EGPRS(8PSK, 4-Slot)	23.47	23.43	23.22	20.77	20.77	21.02

Remark :

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
 Frame-averaged power = Burst averaged power (1 Tx Slot) – 9.03 dB
 Frame-averaged power = Burst averaged power (2 Tx Slots) – 6.02 dB
 Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Burst averaged power (4 Tx Slots) – 3.01 dB



WCDMA

Band	WCDMA Band V			WCDMA Band IV			WCDMA Band II		
Channel	4132	4183	4233	1312	1413	1513	9262	9400	9538
Frequency (MHz)	826.4	836.6	846.6	1712.6	1740	1752.4	1852.4	1880.0	1907.6
AMR 12.2Kbps	21.46	21.47	21.37	21.65	21.40	21.21	23.71	23.50	23.91
RMC 12.2Kbps	21.50	21.52	21.45	21.66	21.43	21.28	23.80	23.54	23.94
HSDPA Subtest-1	21.61	21.46	21.39	21.63	21.55	21.47	21.30	21.25	21.34
HSDPA Subtest-2	21.12	21.02	20.94	21.18	21.10	21.06	20.83	20.84	20.84
HSDPA Subtest-3	20.81	20.60	20.58	20.88	20.65	20.64	20.33	20.38	20.53
HSDPA Subtest-4	20.34	20.14	20.20	20.50	20.33	20.17	19.99	19.90	20.08
HSUPA Subtest-1	21.54	21.58	21.25	21.63	21.46	21.50	21.27	21.28	21.32
HSUPA Subtest-2	20.57	20.63	20.34	20.79	20.51	20.59	20.32	20.29	20.42
HSUPA Subtest-3	20.38	20.16	19.87	20.71	20.06	20.15	20.23	19.83	19.94
HSUPA Subtest-4	19.97	19.81	19.55	20.36	19.74	19.84	19.92	19.33	19.46
HSUPA Subtest-5	18.51	18.31	18.09	18.91	18.30	18.38	18.43	17.91	17.99

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**WLAN**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11b	1	2412	14.06
	6	2437	14.45
	11	2462	14.65
802.11g	1	2412	10.37
	6	2437	10.54
	11	2462	10.78
802.11n(HT 20)	1	2412	9.89
	6	2437	10.33
	11	2462	10.45
802.11n(HT 40)	3	2422	10.06
	6	2437	9.96
	9	2452	9.95

WLAN (5.2Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	36	5180	11.87
	40	5200	11.52
	48	5240	11.72
802.11 n-HT20	36	5180	11.87
	40	5200	11.90
	48	5240	11.64
802.11 n-HT40	38	5190	9.78
	46	5230	9.61
802.11 ac-HT20	36	5180	10.51
	40	5200	10.84
	48	5240	10.66
802.11 ac-HT40	38	5190	9.69
	46	5230	9.68
802.11 ac-HT80	42	5210	9.18

**WLAN (5.3Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	52	5260	11.92
	60	5300	11.80
	64	5320	11.72
802.11 n-HT20	52	5260	11.80
	60	5300	11.83
	64	5320	11.73
802.11 n-HT40	54	5270	9.46
	62	5310	9.54
802.11 ac-HT20	52	5260	11.79
	60	5300	11.83
	64	5320	11.72
802.11 ac-HT40	54	5270	9.50
	62	5310	9.53
802.11 ac-HT80	58	5290	8.71

WLAN (5.6Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	100	5500	6.72
	116	5580	6.44
	140	5700	6.76
802.11 n-HT20	100	5500	6.64
	116	5580	6.09
	140	5700	7.09
802.11 n-HT40	102	5510	5.26
	110	5550	4.92
	134	5670	4.28
802.11 ac-HT20	100	5500	7.60
	116	5580	6.96
	140	5700	6.54
802.11 ac-HT40	102	5510	4.33
	110	5550	4.91
	134	5670	4.89
802.11 ac-HT80	106	5530	4.15
	122	5610	4.16

**WLAN (5.8Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	149	5745	5.14
	157	5785	5.01
	165	5825	3.73
802.11 n-HT20	149	5745	4.33
	157	5785	4.85
	165	5825	4.09
802.11 n-HT40	151	5755	4.07
	159	5795	3.98
802.11 ac-HT20	149	5745	4.94
	157	5785	4.24
	165	5825	3.55
802.11 ac-HT40	151	5755	4.78
	159	5795	4.46
802.11 ac-HT80	155	5775	3.73

Bluetooth

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	6.89
	39	2441	6.84
	78	2480	7.64
$\pi/4$ -DQPSK(2Mbps)	0	2402	4.49
	39	2441	5.21
	78	2480	5.71
8DPSK(3Mbps)	0	2402	4.44
	39	2441	5.62
	78	2480	5.62

BLE

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	1.60
	19	2440	2.01
	39	2480	2.67



LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.25	23.08	23.20
1.4	1	2		22.97	22.86	22.97
1.4	1	5		22.67	22.61	22.77
1.4	3	0		22.38	22.32	22.50
1.4	3	1		22.10	22.05	22.27
1.4	3	2		21.85	21.80	22.04
1.4	6	0		21.57	21.55	21.84
1.4	1	0	16-QAM	23.04	22.86	22.98
1.4	1	2		22.79	22.57	22.78
1.4	1	5		22.49	22.31	22.57
1.4	3	0		22.23	22.10	22.31
1.4	3	1		21.94	21.88	22.10
1.4	3	2		21.73	21.61	21.86
1.4	6	0		21.47	21.35	21.56
3	1	0	QPSK	22.77	22.75	22.58
3	1	7		22.49	22.54	22.28
3	1	14		22.22	22.27	22.07
3	8	0		21.96	21.98	21.84
3	8	4		21.73	21.75	21.54
3	8	7		21.52	21.52	21.25
3	15	0		21.28	21.30	20.96
3	1	0	16-QAM	22.56	22.53	22.32
3	1	7		22.28	22.24	22.04
3	1	14		22.07	22.03	21.82
3	8	0		21.85	21.79	21.61
3	8	4		21.56	21.59	21.36
3	8	7		21.30	21.35	21.06
3	15	0		21.08	21.14	20.77



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.28	22.43	22.19
5	1	12		22.04	22.20	21.91
5	1	24		21.82	21.97	21.66
5	12	0		21.61	21.68	21.37
5	12	6		21.35	21.42	21.14
5	12	11		21.08	21.20	20.89
5	25	0		20.86	20.95	20.63
5	1	0		16-QAM	22.08	22.18
5	1	12	21.88		21.93	21.70
5	1	24	21.62		21.66	21.43
5	12	0	21.34		21.37	21.14
5	12	6	21.13		21.12	20.86
5	12	11	20.88		20.82	20.61
5	25	0	20.58		20.60	20.39
10	1	0	QPSK		22.61	22.37
10	1	24		22.32	22.15	22.25
10	1	49		22.10	21.86	22.05
10	25	0		21.86	21.57	21.79
10	25	12		21.62	21.34	21.59
10	25	24		21.37	21.11	21.31
10	50	0		21.09	20.82	21.08
10	1	0		16-QAM	22.37	22.15
10	1	24	22.13		21.93	22.04
10	1	49	21.88		21.73	21.81
10	25	0	21.58		21.52	21.57
10	25	12	21.35		21.24	21.28
10	25	24	21.13		20.98	21.06
10	50	0	20.85		20.75	20.81



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.27	21.98	22.05
15	1	37		21.99	21.74	21.85
15	1	74		21.74	21.48	21.60
15	36	0		21.46	21.26	21.31
15	36	18		21.17	21.03	21.03
15	36	39		20.92	20.75	20.79
15	75	0		20.68	20.45	20.57
15	1	0	16-QAM	22.03	21.69	21.82
15	1	38		21.77	21.44	21.54
15	1	75		21.50	21.23	21.31
15	36	0		21.25	20.94	21.03
15	36	18		20.98	20.64	20.83
15	36	39		20.77	20.42	20.63
15	75	0		20.53	20.19	20.37
20	1	0	QPSK	23.30	23.19	23.41
20	1	49		23.00	22.99	23.20
20	1	99		22.77	22.70	22.99
20	50	0		22.53	22.45	22.78
20	50	24		22.23	22.18	22.57
20	50	49		22.01	21.90	22.34
20	100	0		21.75	21.67	22.07
20	1	0	16-QAM	23.05	22.98	23.20
20	1	49		22.75	22.75	22.96
20	1	99		22.48	22.48	22.72
20	50	0		22.27	22.21	22.43
20	50	24		21.99	22.00	22.20
20	50	49		21.77	21.71	21.99
20	100	0		21.54	21.47	21.78



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	20.77	20.95	20.93
1.4	1	2		20.53	20.73	20.69
1.4	1	5		20.32	20.44	20.46
1.4	3	0		20.12	20.19	20.19
1.4	3	1		19.92	19.96	19.90
1.4	3	2		19.62	19.69	19.63
1.4	6	0		19.36	19.41	19.39
1.4	1	0	16-QAM	20.47	20.74	20.64
1.4	1	2		20.18	20.53	20.39
1.4	1	5		19.95	20.32	20.16
1.4	3	0		19.68	20.07	19.91
1.4	3	1		19.41	19.82	19.67
1.4	3	2		19.13	19.56	19.42
1.4	6	0		18.90	19.30	19.14
3	1	0	QPSK	20.19	20.25	20.16
3	1	7		19.90	19.99	19.88
3	1	14		19.66	19.69	19.63
3	8	0		19.41	19.47	19.39
3	8	4		19.19	19.22	19.14
3	8	7		18.96	18.93	18.93
3	15	0		18.68	18.68	18.66
3	1	0	16-QAM	19.96	20.00	19.86
3	1	7		19.75	19.76	19.59
3	1	14		19.53	19.52	19.38
3	8	0		19.23	19.30	19.14
3	8	4		18.99	19.07	18.90
3	8	7		18.77	18.80	18.67
3	15	0		18.56	18.57	18.41



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	20.65	20.59	20.72
5	1	12		20.41	20.33	20.47
5	1	24		20.15	20.06	20.17
5	12	0		19.95	19.81	19.90
5	12	6		19.71	19.55	19.61
5	12	11		19.50	19.30	19.38
5	25	0		19.22	19.08	19.14
5	1	0		16-QAM	20.36	20.32
5	1	12	20.14		20.04	20.20
5	1	24	19.91		19.84	19.92
5	12	0	19.68		19.54	19.69
5	12	6	19.43		19.31	19.47
5	12	11	19.13		19.08	19.18
5	25	0	18.87		18.83	18.92
10	1	0	QPSK		20.40	20.22
10	1	24		20.17	19.96	19.88
10	1	49		19.92	19.72	19.58
10	25	0		19.72	19.49	19.30
10	25	12		19.45	19.21	19.03
10	25	24		19.24	18.94	18.80
10	50	0		18.98	18.64	18.51
10	1	0		16-QAM	20.19	19.99
10	1	24	19.99		19.78	19.60
10	1	49	19.70		19.50	19.30
10	25	0	19.42		19.27	19.04
10	25	12	19.18		19.00	18.82
10	25	24	18.96		18.75	18.58
10	50	0	18.76		18.46	18.34



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	20.70	20.62	20.87
15	1	37		20.49	20.38	20.65
15	1	74		20.29	20.13	20.44
15	36	0		20.04	19.86	20.24
15	36	18		19.75	19.57	20.02
15	36	39		19.45	19.33	19.72
15	75	0		19.25	19.04	19.49
15	1	0		16-QAM	20.50	20.40
15	1	38	20.22		20.18	20.38
15	1	75	19.95		19.97	20.09
15	36	0	19.69		19.73	19.88
15	36	18	19.47		19.46	19.62
15	36	39	19.19		19.19	19.42
15	75	0	18.95		18.93	19.15
20	1	0	QPSK		21.03	21.22
20	1	49		20.81	20.95	20.74
20	1	99		20.54	20.68	20.44
20	50	0		20.29	20.43	20.15
20	50	24		20.09	20.22	19.88
20	50	49		19.87	19.94	19.61
20	100	0		19.66	19.69	19.34
20	1	0		16-QAM	20.81	20.95
20	1	49	20.57		20.69	20.48
20	1	99	20.32		20.44	20.25
20	50	0	20.10		20.18	20.00
20	50	24	19.83		19.91	19.72
20	50	49	19.57		19.65	19.48
20	100	0	19.35		19.44	19.19



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.62	23.19	22.16
1.4	1	2		23.35	22.90	21.93
1.4	1	5		23.11	22.67	21.69
1.4	3	0		22.89	22.44	21.46
1.4	3	1		22.59	22.22	21.21
1.4	3	2		22.38	21.95	20.93
1.4	6	0		22.16	21.69	20.68
1.4	1	0	16-QAM	23.33	22.96	21.91
1.4	1	2		23.06	22.71	21.65
1.4	1	5		22.81	22.46	21.42
1.4	3	0		22.55	22.19	21.21
1.4	3	1		22.31	21.91	20.95
1.4	3	2		22.08	21.63	20.74
1.4	6	0		21.82	21.40	20.46
3	1	0	QPSK	22.83	22.97	22.25
3	1	7		22.56	22.75	22.01
3	1	14		22.34	22.54	21.75
3	8	0		22.08	22.27	21.46
3	8	4		21.80	22.03	21.25
3	8	7		21.55	21.79	21.04
3	15	0		21.27	21.54	20.77
3	1	0	16-QAM	22.59	22.68	21.99
3	1	7		22.31	22.39	21.70
3	1	14		22.06	22.17	21.45
3	8	0		21.84	21.92	21.23
3	8	4		21.64	21.64	21.02
3	8	7		21.40	21.35	20.78
3	15	0		21.17	21.13	20.53



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.74	22.62	22.29
5	1	12		22.54	22.38	22.09
5	1	24		22.28	22.11	21.79
5	12	0		22.01	21.89	21.54
5	12	6		21.79	21.63	21.25
5	12	11		21.53	21.34	21.01
5	25	0		21.32	21.13	20.77
5	1	0	16-QAM	22.46	22.35	22.07
5	1	12		22.20	22.13	21.84
5	1	24		21.91	21.83	21.62
5	12	0		21.66	21.60	21.41
5	12	6		21.41	21.32	21.13
5	12	11		21.18	21.08	20.88
5	25	0		20.90	20.85	20.66
10	1	0	QPSK	23.98	23.57	23.25
10	1	24		23.71	23.35	22.99
10	1	49		23.48	23.07	22.70
10	25	0		23.26	22.83	22.47
10	25	12		23.04	22.59	22.20
10	25	24		22.84	22.36	21.92
10	50	0		22.60	22.11	21.69
10	1	0	16-QAM	23.74	23.27	22.98
10	1	24		23.46	23.03	22.72
10	1	49		23.20	22.76	22.49
10	25	0		22.91	22.51	22.29
10	25	12		22.67	22.26	22.08
10	25	24		22.43	22.00	21.81
10	50	0		22.17	21.79	21.56



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	20.16	20.22	20.34
5	1	12		19.89	19.96	20.07
5	1	24		19.64	19.66	19.79
5	12	0		19.43	19.42	19.51
5	12	6		19.21	19.21	19.31
5	12	11		18.95	18.96	19.03
5	25	0		18.71	18.71	18.78
5	1	0	16-QAM	19.89	19.96	20.06
5	1	12		19.66	19.76	19.79
5	1	24		19.45	19.55	19.52
5	12	0		19.24	19.34	19.28
5	12	6		18.99	19.11	19.07
5	12	11		18.75	18.85	18.82
5	25	0		18.54	18.63	18.58
10	1	0	QPSK	19.95	20.08	20.17
10	1	24		19.70	19.79	19.95
10	1	49		19.45	19.58	19.67
10	25	0		19.25	19.29	19.45
10	25	12		18.98	19.02	19.23
10	25	24		18.76	18.74	19.01
10	50	0		18.52	18.53	18.73
10	1	0	16-QAM	19.67	19.87	19.97
10	1	24		19.41	19.64	19.74
10	1	49		19.17	19.42	19.44
10	25	0		18.95	19.16	19.15
10	25	12		18.72	18.89	18.94
10	25	24		18.44	18.68	18.66
10	50	0		18.23	18.44	18.36



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	19.88	20.03	19.76
15	1	37		19.65	19.81	19.49
15	1	74		19.42	19.59	19.24
15	36	0		19.18	19.30	19.03
15	36	18		18.92	19.09	18.76
15	36	39		18.70	18.88	18.51
15	75	0		18.46	18.68	18.25
15	1	0	16-QAM	19.61	19.83	19.48
15	1	38		19.40	19.62	19.24
15	1	75		19.17	19.33	18.94
15	36	0		18.91	19.03	18.72
15	36	18		18.63	18.82	18.45
15	36	39		18.36	18.58	18.24
15	75	0		18.14	18.35	18.01
20	1	0	QPSK	20.28	20.50	20.43
20	1	49		20.02	20.30	20.15
20	1	99		19.81	20.07	19.90
20	50	0		19.54	19.83	19.62
20	50	24		19.30	19.57	19.36
20	50	49		19.03	19.36	19.12
20	100	0		18.74	19.12	18.83
20	1	0	16-QAM	20.05	20.20	20.21
20	1	49		19.77	19.92	19.96
20	1	99		19.54	19.63	19.69
20	50	0		19.28	19.35	19.46
20	50	24		19.05	19.07	19.26
20	50	49		18.80	18.81	18.96
20	100	0		18.54	18.61	18.70



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.25	23.16	22.47
1.4	1	2		22.96	22.91	22.19
1.4	1	5		22.68	22.62	21.97
1.4	3	0		22.42	22.33	21.72
1.4	3	1		22.21	22.05	21.46
1.4	3	2		22.00	21.78	21.18
1.4	6	0		21.73	21.51	20.90
1.4	1	0	16-QAM	23.01	22.96	22.26
1.4	1	2		22.76	22.69	21.98
1.4	1	5		22.52	22.44	21.68
1.4	3	0		22.30	22.22	21.48
1.4	3	1		22.01	21.96	21.18
1.4	3	2		21.72	21.71	20.97
1.4	6	0		21.46	21.51	20.77
3	1	0	QPSK	21.95	21.68	21.62
3	1	7		21.68	21.43	21.41
3	1	14		21.46	21.16	21.17
3	8	0		21.25	20.90	20.93
3	8	4		21.03	20.65	20.72
3	8	7		20.81	20.40	20.50
3	15	0		20.53	20.18	20.22
3	1	0	16-QAM	21.75	21.44	21.33
3	1	7		21.52	21.18	21.06
3	1	14		21.25	20.97	20.86
3	8	0		21.02	20.76	20.61
3	8	4		20.80	20.51	20.32
3	8	7		20.59	20.26	20.10
3	15	0		20.37	20.03	19.86



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.73	22.80	22.97
5	1	12		22.44	22.59	22.68
5	1	24		22.24	22.34	22.42
5	12	0		22.02	22.07	22.12
5	12	6		21.74	21.82	21.90
5	12	11		21.47	21.54	21.62
5	25	0		21.20	21.27	21.36
5	1	0		16-QAM	22.45	22.57
5	1	12	22.22		22.35	22.48
5	1	24	22.01		22.05	22.23
5	12	0	21.75		21.79	21.94
5	12	6	21.47		21.49	21.65
5	12	11	21.24		21.21	21.39
5	25	0	20.98		20.95	21.18
10	1	0	QPSK		23.61	23.52
10	1	24		23.37	23.31	23.08
10	1	49		23.09	23.07	22.81
10	25	0		22.88	22.87	22.54
10	25	12		22.61	22.66	22.28
10	25	24		22.39	22.40	22.08
10	50	0		22.17	22.10	21.81
10	1	0		16-QAM	23.34	23.30
10	1	24	23.10		23.09	22.87
10	1	49	22.80		22.86	22.66
10	25	0	22.53		22.58	22.42
10	25	12	22.26		22.38	22.18
10	25	24	22.01		22.09	21.93
10	50	0	21.77		21.87	21.68



LTE BAND 13

LTE Band 13 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.43	22.28	22.31
5	1	12		22.19	22.00	22.02
5	1	24		21.96	21.71	21.81
5	12	0		21.69	21.48	21.52
5	12	6		21.42	21.22	21.31
5	12	11		21.20	20.98	21.05
5	25	0		20.92	20.74	20.81
5	1	0	16-QAM	22.21	22.00	22.10
5	1	12		21.99	21.73	21.84
5	1	24		21.70	21.49	21.58
5	12	0		21.49	21.21	21.33
5	12	6		21.24	20.95	21.08
5	12	11		21.01	20.66	20.81
5	25	0		20.79	20.45	20.54
10	1	0	QPSK	-	22.62	-
10	1	24		-	22.41	-
10	1	49		-	22.18	-
10	25	0		-	21.91	-
10	25	12		-	21.66	-
10	25	24		-	21.37	-
10	50	0		-	21.08	-
10	1	0	16-QAM	-	22.36	-
10	1	24		-	22.11	-
10	1	49		-	21.87	-
10	25	0		-	21.62	-
10	25	12		-	21.35	-
10	25	24		-	21.12	-
10	50	0		-	20.84	-



LTE BAND 17

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.43	22.63	22.25
5	1	12		22.22	22.34	22.00
5	1	24		21.94	22.09	21.73
5	12	0		21.72	21.81	21.46
5	12	6		21.50	21.55	21.26
5	12	11		21.26	21.25	21.01
5	25	0		21.01	21.00	20.81
5	1	0	16-QAM	22.21	22.36	22.01
5	1	12		21.95	22.11	21.77
5	1	24		21.70	21.85	21.54
5	12	0		21.49	21.64	21.26
5	12	6		21.27	21.34	21.06
5	12	11		21.06	21.06	20.84
5	25	0		20.79	20.85	20.61
10	1	0	QPSK	22.65	22.79	22.73
10	1	24		22.41	22.58	22.52
10	1	49		22.18	22.31	22.23
10	25	0		21.98	22.03	21.94
10	25	12		21.71	21.76	21.70
10	25	24		21.47	21.50	21.41
10	50	0		21.23	21.26	21.20
10	1	0	16-QAM	22.38	22.51	22.51
10	1	24		22.18	22.27	22.31
10	1	49		21.92	22.04	22.04
10	25	0		21.70	21.78	21.82
10	25	12		21.49	21.51	21.60
10	25	24		21.27	21.25	21.37
10	50	0		21.03	20.98	21.12



LTE BAND 25

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.28	23.01	23.16
1.4	1	2		23.06	22.78	22.92
1.4	1	5		22.76	22.49	22.65
1.4	3	0		22.50	22.23	22.38
1.4	3	1		22.30	22.03	22.14
1.4	3	2		22.04	21.73	21.86
1.4	6	0		21.82	21.45	21.62
1.4	1	0	16-QAM	23.02	22.80	22.87
1.4	1	2		22.77	22.57	22.60
1.4	1	5		22.56	22.28	22.30
1.4	3	0		22.31	22.02	22.10
1.4	3	1		22.02	21.77	21.86
1.4	3	2		21.72	21.49	21.65
1.4	6	0		21.44	21.19	21.36
3	1	0	QPSK	22.76	22.93	22.82
3	1	7		22.49	22.67	22.54
3	1	14		22.24	22.42	22.30
3	8	0		22.02	22.22	22.08
3	8	4		21.74	21.93	21.87
3	8	7		21.49	21.67	21.64
3	15	0		21.22	21.46	21.39
3	1	0	16-QAM	22.49	22.67	22.54
3	1	7		22.23	22.39	22.24
3	1	14		21.95	22.16	22.00
3	8	0		21.68	21.95	21.80
3	8	4		21.43	21.66	21.59
3	8	7		21.19	21.46	21.39
3	15	0		20.92	21.21	21.13



LTE BAND 25

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.64	22.37	22.59
5	1	12		22.43	22.12	22.33
5	1	24		22.21	21.85	22.05
5	12	0		21.97	21.61	21.82
5	12	6		21.69	21.32	21.53
5	12	11		21.42	21.11	21.25
5	25	0		21.22	20.85	21.04
5	1	0	16-QAM	22.43	22.08	22.34
5	1	12		22.22	21.87	22.06
5	1	24		22.01	21.60	21.81
5	12	0		21.73	21.31	21.57
5	12	6		21.52	21.06	21.30
5	12	11		21.22	20.81	21.02
5	25	0		20.97	20.57	20.76
10	1	0	QPSK	22.58	22.67	22.81
10	1	24		22.31	22.37	22.56
10	1	49		22.02	22.17	22.35
10	25	0		21.72	21.89	22.06
10	25	12		21.45	21.60	21.80
10	25	24		21.23	21.34	21.59
10	50	0		20.93	21.11	21.30
10	1	0	16-QAM	22.31	22.42	22.54
10	1	24		22.10	22.18	22.27
10	1	49		21.88	21.97	22.01
10	25	0		21.60	21.67	21.81
10	25	12		21.34	21.37	21.57
10	25	24		21.07	21.07	21.31
10	50	0		20.83	20.79	21.02



LTE BAND 25

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.55	22.62	22.43
15	1	37		22.26	22.34	22.13
15	1	74		22.06	22.07	21.92
15	36	0		21.78	21.85	21.66
15	36	18		21.58	21.63	21.41
15	36	39		21.33	21.35	21.13
15	75	0		21.09	21.07	20.92
15	1	0	16-QAM	22.28	22.39	22.15
15	1	38		22.02	22.17	21.90
15	1	75		21.76	21.90	21.63
15	36	0		21.53	21.68	21.35
15	36	18		21.25	21.45	21.12
15	36	39		20.98	21.18	20.85
15	75	0		20.73	20.92	20.59
20	1	0	QPSK	23.39	23.42	23.30
20	1	49		23.12	23.18	23.01
20	1	99		22.92	22.92	22.76
20	50	0		22.71	22.64	22.48
20	50	24		22.43	22.43	22.19
20	50	49		22.16	22.14	21.94
20	100	0		21.91	21.87	21.68
20	1	0	16-QAM	23.16	23.19	23.03
20	1	49		22.92	22.90	22.76
20	1	99		22.69	22.64	22.47
20	50	0		22.41	22.37	22.19
20	50	24		22.15	22.13	21.98
20	50	49		21.89	21.86	21.74
20	100	0		21.61	21.63	21.53



LTE BAND 26

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.47	22.18	22.30
1.4	1	2		22.19	21.92	22.04
1.4	1	5		21.95	21.72	21.75
1.4	3	0		21.66	21.51	21.49
1.4	3	1		21.46	21.28	21.25
1.4	3	2		21.25	21.06	20.99
1.4	6	0		20.99	20.85	20.78
1.4	1	0	16-QAM	22.22	21.95	22.03
1.4	1	2		21.99	21.66	21.82
1.4	1	5		21.74	21.37	21.56
1.4	3	0		21.46	21.16	21.31
1.4	3	1		21.19	20.94	21.01
1.4	3	2		20.94	20.67	20.76
1.4	6	0		20.66	20.47	20.55
3	1	0	QPSK	22.89	22.94	23.05
3	1	7		22.64	22.68	22.76
3	1	14		22.35	22.41	22.48
3	8	0		22.10	22.20	22.25
3	8	4		21.82	21.99	22.00
3	8	7		21.59	21.78	21.80
3	15	0		21.35	21.55	21.52
3	1	0	16-QAM	22.64	22.69	22.77
3	1	7		22.40	22.49	22.48
3	1	14		22.16	22.27	22.24
3	8	0		21.86	22.06	22.03
3	8	4		21.58	21.76	21.81
3	8	7		21.28	21.53	21.59
3	15	0		21.00	21.29	21.36



LTE BAND 26

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.86	22.95	22.71
5	1	12		22.62	22.71	22.47
5	1	24		22.40	22.46	22.26
5	12	0		22.16	22.25	22.02
5	12	6		21.88	22.04	21.79
5	12	11		21.66	21.78	21.50
5	25	0		21.37	21.53	21.20
5	1	0	16-QAM	22.62	22.69	22.49
5	1	12		22.39	22.47	22.22
5	1	24		22.11	22.25	22.00
5	12	0		21.85	21.95	21.74
5	12	6		21.61	21.68	21.47
5	12	11		21.37	21.45	21.18
5	25	0		21.14	21.19	20.89
10	1	0	QPSK	23.13	22.94	23.16
10	1	24		22.89	22.73	22.87
10	1	49		22.61	22.49	22.60
10	25	0		22.37	22.25	22.38
10	25	12		22.08	22.03	22.16
10	25	24		21.78	21.77	21.87
10	50	0		21.51	21.50	21.61
10	1	0	16-QAM	22.90	22.65	22.87
10	1	24		22.64	22.39	22.63
10	1	49		22.36	22.14	22.38
10	25	0		22.06	21.89	22.15
10	25	12		21.79	21.61	21.89
10	25	24		21.56	21.40	21.63
10	50	0		21.29	21.13	21.37



LTE BAND 26

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.15	23.28	23.30
15	1	37		22.86	23.02	23.01
15	1	74		22.65	22.78	22.81
15	36	0		22.44	22.54	22.60
15	36	18		22.17	22.24	22.33
15	36	39		21.95	21.94	22.13
15	75	0		21.74	21.66	21.86
15	1	0	16-QAM	22.90	23.04	23.08
15	1	38		22.65	22.81	22.82
15	1	75		22.41	22.60	22.57
15	36	0		22.18	22.37	22.30
15	36	18		21.90	22.12	22.01
15	36	39		21.61	21.89	21.72
15	75	0		21.34	21.68	21.45



LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	20.21	20.37	20.43
5	1	12		19.99	20.11	20.14
5	1	24		19.75	19.90	19.94
5	12	0		19.51	19.62	19.66
5	12	6		19.24	19.41	19.41
5	12	11		18.95	19.15	19.19
5	25	0		18.65	18.86	18.92
5	1	0		16-QAM	19.94	20.09
5	1	12	19.72		19.88	19.96
5	1	24	19.43		19.67	19.70
5	12	0	19.16		19.47	19.48
5	12	6	18.90		19.21	19.27
5	12	11	18.61		18.91	19.02
5	25	0	18.41		18.65	18.81
10	1	0	QPSK		20.19	20.07
10	1	24		19.96	19.83	20.04
10	1	49		19.75	19.58	19.81
10	25	0		19.54	19.37	19.56
10	25	12		19.28	19.11	19.30
10	25	24		18.99	18.88	19.02
10	50	0		18.77	18.59	18.81
10	1	0		16-QAM	19.95	19.83
10	1	24	19.73		19.61	19.77
10	1	49	19.49		19.35	19.56
10	25	0	19.26		19.11	19.35
10	25	12	19.03		18.88	19.14
10	25	24	18.73		18.58	18.87
10	50	0	18.49		18.37	18.58



LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	20.49	20.55	20.49
15	1	37		20.26	20.29	20.26
15	1	74		20.00	20.04	20.03
15	36	0		19.74	19.84	19.82
15	36	18		19.50	19.56	19.53
15	36	39		19.25	19.33	19.25
15	75	0		19.00	19.03	19.04
15	1	0		16-QAM	20.26	20.34
15	1	38	20.01		20.10	19.94
15	1	75	19.76		19.88	19.67
15	36	0	19.54		19.61	19.45
15	36	18	19.29		19.38	19.21
15	36	39	19.02		19.16	18.97
15	75	0	18.74		18.90	18.74
20	1	0	QPSK		20.85	20.92
20	1	49		20.55	20.71	20.41
20	1	99		20.28	20.47	20.20
20	50	0		19.98	20.23	19.92
20	50	24		19.75	20.02	19.68
20	50	49		19.50	19.73	19.41
20	100	0		19.21	19.48	19.20
20	1	0		16-QAM	20.62	20.67
20	1	49	20.32		20.45	20.12
20	1	99	20.07		20.16	19.88
20	50	0	19.83		19.86	19.60
20	50	24	19.56		19.66	19.39
20	50	49	19.30		19.44	19.11
20	100	0	19.08		19.21	18.83



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	20.79	20.90	20.83
1.4	1	2		20.56	20.66	20.61
1.4	1	5		20.33	20.36	20.39
1.4	3	0		20.03	20.09	20.16
1.4	3	1		19.74	19.81	19.87
1.4	3	2		19.53	19.54	19.59
1.4	6	0		19.31	19.27	19.31
1.4	1	0	16-QAM	20.57	20.61	20.59
1.4	1	2		20.32	20.35	20.31
1.4	1	5		20.05	20.14	20.04
1.4	3	0		19.77	19.90	19.76
1.4	3	1		19.52	19.60	19.54
1.4	3	2		19.30	19.33	19.32
1.4	6	0		19.05	19.07	19.09
3	1	0	QPSK	21.73	21.75	21.52
3	1	7		21.53	21.52	21.32
3	1	14		21.32	21.26	21.03
3	8	0		21.07	20.96	20.79
3	8	4		20.85	20.71	20.50
3	8	7		20.62	20.45	20.23
3	15	0		20.34	20.24	20.02
3	1	0	16-QAM	21.44	21.49	21.23
3	1	7		21.18	21.21	21.00
3	1	14		20.90	20.99	20.73
3	8	0		20.63	20.76	20.48
3	8	4		20.35	20.49	20.21
3	8	7		20.09	20.22	19.94
3	15	0		19.85	19.93	19.70



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	21.51	21.39	21.25
5	1	12		21.27	21.16	20.97
5	1	24		21.03	20.91	20.75
5	12	0		20.82	20.64	20.50
5	12	6		20.61	20.35	20.26
5	12	11		20.35	20.06	20.02
5	25	0		20.13	19.83	19.73
5	1	0	16-QAM	21.24	21.12	20.95
5	1	12		21.02	20.85	20.70
5	1	24		20.79	20.65	20.49
5	12	0		20.50	20.44	20.23
5	12	6		20.23	20.19	19.98
5	12	11		20.01	19.91	19.69
5	25	0		19.79	19.61	19.42
10	1	0	QPSK	21.19	21.22	21.08
10	1	24		20.94	20.93	20.88
10	1	49		20.68	20.63	20.67
10	25	0		20.40	20.36	20.43
10	25	12		20.13	20.08	20.15
10	25	24		19.84	19.85	19.94
10	50	0		19.62	19.64	19.71
10	1	0	16-QAM	20.96	20.94	20.84
10	1	24		20.76	20.66	20.60
10	1	49		20.53	20.38	20.33
10	25	0		20.32	20.09	20.07
10	25	12		20.11	19.87	19.85
10	25	24		19.87	19.59	19.62
10	50	0		19.63	19.30	19.33



LTE BAND 66

LTE Band 66 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	20.88	20.92	20.67
15	1	37		20.67	20.69	20.41
15	1	74		20.43	20.44	20.17
15	36	0		20.18	20.20	19.88
15	36	18		19.92	19.97	19.62
15	36	39		19.63	19.72	19.37
15	75	0		19.40	19.52	19.15
15	1	0	16-QAM	20.64	20.70	20.38
15	1	38		20.36	20.44	20.12
15	1	75		20.08	20.19	19.83
15	36	0		19.82	19.95	19.63
15	36	18		19.57	19.70	19.33
15	36	39		19.31	19.48	19.06
15	75	0		19.03	19.27	18.83
20	1	0	QPSK	21.91	21.83	21.79
20	1	49		21.71	21.61	21.58
20	1	99		21.48	21.32	21.29
20	50	0		21.27	21.11	21.01
20	50	24		21.01	20.89	20.79
20	50	49		20.71	20.65	20.52
20	100	0		20.42	20.40	20.31
20	1	0	16-QAM	21.66	21.54	21.58
20	1	49		21.42	21.28	21.29
20	1	99		21.19	21.05	21.06
20	50	0		20.94	20.82	20.83
20	50	24		20.68	20.56	20.62
20	50	49		20.46	20.30	20.40
20	100	0		20.19	20.04	20.19

**10.2 Tune-up Power**

Mode	GSM850(AVG)	GSM1900(AVG)
GSM/PCS	32±1dBm	29±1dBm
GPRS (1 Slot)	29±1dBm	25±1dBm
GPRS (2 Slot)	28±1dBm	25±1dBm
GPRS (3 Slot)	28±1dBm	24±1dBm
GPRS (4 Slot)	28±1dBm	24±1dBm
EDGE (1 Slot)	28±1dBm	26±1dBm
EDGE (2 Slot)	28±1dBm	25±1dBm
EDGE (3 Slot)	27±1dBm	24±1dBm
EDGE (4 Slot)	26±1dBm	24±1dBm

Mode	WCDMA Band V(AVG)	WCDMA Band IV(AVG)	WCDMA Band II(AVG)
AMR	21±1dBm	21±1dBm	23±1dBm
RMC	21±1dBm	21±1dBm	23±1dBm
HSDPA Subtest-1	21±1dBm	21±1dBm	21±1dBm
HSDPA Subtest-2	21±1dBm	21±1dBm	20±1dBm
HSDPA Subtest-3	20±1dBm	20±1dBm	20±1dBm
HSDPA Subtest-4	20±1dBm	20±1dBm	20±1dBm
HSUPA Subtest-1	21±1dBm	21±1dBm	21±1dBm
HSUPA Subtest-2	20±1dBm	20±1dBm	20±1dBm
HSUPA Subtest-3	20±1dBm	20±1dBm	20±1dBm
HSUPA Subtest-4	19±1dBm	20±1dBm	19±1dBm
HSUPA Subtest-5	18±1dBm	18±1dBm	18±1dBm

WLAN (2.4Gband)

Mode	WLAN(AVG)
IEEE 802.11b	14±1dBm
IEEE 802.11g	10±1dBm
IEEE 802.11n(HT 20)	10±1dBm
IEEE 802.11n(HT 40)	10±1dBm



WLAN (5.2Gband)

Mode	5.2G WLAN(AVG)
IEEE 802.11a	11±1dBm
IEEE 802.11n-HT20	11±1dBm
IEEE 802.11n-HT40	9±1dBm
IEEE 802.11ac-HT20	10±1dBm
IEEE 802.11ac-HT40	9±1dBm
IEEE 802.11ac-HT80	9±1dBm

WLAN (5.3Gband)

Mode	5.3G WLAN(AVG)
IEEE 802.11a	11±1dBm
IEEE 802.11n-HT20	11±1dBm
IEEE 802.11n-HT40	9±1dBm
IEEE 802.11ac-HT20	11±1dBm
IEEE 802.11ac-HT40	9±1dBm
IEEE 802.11ac-HT80	8±1dBm

WLAN (5.6Gband)

Mode	5.6G WLAN(AVG)
IEEE 802.11a	6±1dBm
IEEE 802.11n-HT20	6.1±1dBm
IEEE 802.11n-HT40	5±1dBm
IEEE 802.11ac-HT20	6.7±1dBm
IEEE 802.11ac-HT40	4±1dBm
IEEE 802.11ac-HT80	4±1dBm

WLAN (5.8Gband)

Mode	WLAN(AVG)
IEEE 802.11a	4.2±1dBm
IEEE 802.11n HT20	4±1dBm
IEEE 802.11n HT40	4±1dBm
IEEE 802.11ac-HT20	4±1dBm
IEEE 802.11ac-HT40	4±1dBm
IEEE 802.11ac-HT80	3±1dBm



BT

Mode	BT(AVG)
GFSK	7±1dBm
$\pi/4$ -DQPSK	5±1dBm
8DPSK	5±1dBm

BLE

Mode	BLE(AVG)
GFSK	2±1dBm





LTE

BW[MHz]	RB Size	Mode	Band 2	Band 4	Band 5	Band 7
1.4	1	QPSK	23±1dBm	20±1dBm	23±1dBm	N/A
1.4	3		22±1dBm	20±1dBm	21.9±1dBm	N/A
1.4	6		21±1dBm	19±1dBm	21.2±1dBm	N/A
1.4	1	16- QAM	23±1dBm	20±1dBm	22.4±1dBm	N/A
1.4	3		22±1dBm	20±1dBm	21.7±1dBm	N/A
1.4	6		21±1dBm	19±1dBm	21±1dBm	N/A
3	1	QPSK	22±1dBm	20±1dBm	22±1dBm	N/A
3	8		21±1dBm	19±1dBm	22±1dBm	N/A
3	15		21±1dBm	18±1dBm	21±1dBm	N/A
3	1	16- QAM	22±1dBm	20±1dBm	22±1dBm	N/A
3	8		21±1dBm	19±1dBm	21±1dBm	N/A
3	15		21±1dBm	18±1dBm	21±1dBm	N/A
5	1	QPSK	22±1dBm	20±1dBm	22±1dBm	20±1dBm
5	12		21±1dBm	19±1dBm	22±1dBm	19±1dBm
5	25		20±1dBm	19±1dBm	21±1dBm	18±1dBm
5	1	16- QAM	22±1dBm	20±1dBm	22±1dBm	19±1dBm
5	12		21±1dBm	19±1dBm	21±1dBm	19±1dBm
5	25		20±1dBm	18±1dBm	21±1dBm	18±1dBm
10	1	QPSK	22±1dBm	20±1dBm	23±1dBm	20±1dBm
10	25		21±1dBm	19±1dBm	22.3±1dBm	19±1dBm
10	50		21±1dBm	18±1dBm	22±1dBm	18±1dBm
10	1	16- QAM	22±1dBm	20±1dBm	23±1dBm	19±1dBm
10	25		21±1dBm	19±1dBm	22±1dBm	19±1dBm
10	50		20±1dBm	18±1dBm	22±1dBm	18±1dBm
15	1	QPSK	22±1dBm	20±1dBm	N/A	19±1dBm
15	36		21±1dBm	20±1dBm	N/A	19±1dBm
15	75		20±1dBm	19±1dBm	N/A	18±1dBm
15	1	16- QAM	22±1dBm	20±1dBm	N/A	19±1dBm
15	36		21±1dBm	19±1dBm	N/A	19±1dBm
15	75		20±1dBm	19±1dBm	N/A	18±1dBm
20	1	QPSK	23±1dBm	21±1dBm	N/A	20±1dBm
20	50		22±1dBm	20±1dBm	N/A	19±1dBm
20	100		22±1dBm	19±1dBm	N/A	19±1dBm
20	1	16- QAM	23±1dBm	20±1dBm	N/A	20±1dBm
20	50		22±1dBm	20±1dBm	N/A	19±1dBm
20	100		21±1dBm	19±1dBm	N/A	18±1dBm



BW[MHz]	RB Size	Mode	Band 12	Band 13	Band 17	Band 25
1.4	1	QPSK	22.3±1dBm	N/A	N/A	23±1dBm
1.4	3		22±1dBm	N/A	N/A	22±1dBm
1.4	6		21±1dBm	N/A	N/A	21±1dBm
1.4	1	16- QAM	22.1±1dBm	N/A	N/A	23±1dBm
1.4	3		21.4±1dBm	N/A	N/A	22±1dBm
1.4	6		21±1dBm	N/A	N/A	21±1dBm
3	1	QPSK	21±1dBm	N/A	N/A	22±1dBm
3	8		21±1dBm	N/A	N/A	22±1dBm
3	15		20±1dBm	N/A	N/A	21±1dBm
3	1	16- QAM	21±1dBm	N/A	N/A	22±1dBm
3	8		21±1dBm	N/A	N/A	21±1dBm
3	15		20±1dBm	N/A	N/A	21±1dBm
5	1	QPSK	22±1dBm	22±1dBm	22±1dBm	22±1dBm
5	12		22±1dBm	21±1dBm	21±1dBm	21±1dBm
5	25		21±1dBm	20±1dBm	21±1dBm	21±1dBm
5	1	16- QAM	22±1dBm	22±1dBm	22±1dBm	22±1dBm
5	12		21±1dBm	21±1dBm	21±1dBm	21±1dBm
5	25		21±1dBm	20±1dBm	20±1dBm	20±1dBm
10	1	QPSK	23±1dBm	22±1dBm	22±1dBm	22±1dBm
10	25		22±1dBm	21±1dBm	21±1dBm	21±1dBm
10	50		22±1dBm	21±1dBm	21±1dBm	21±1dBm
10	1	16- QAM	23±1dBm	22±1dBm	22±1dBm	22±1dBm
10	25		22±1dBm	21±1dBm	21±1dBm	21±1dBm
10	50		21±1dBm	20±1dBm	21±1dBm	21±1dBm
15	1	QPSK	N/A	N/A	N/A	22±1dBm
15	36		N/A	N/A	N/A	21±1dBm
15	75		N/A	N/A	N/A	21±1dBm
15	1	16- QAM	N/A	N/A	N/A	22±1dBm
15	36		N/A	N/A	N/A	21±1dBm
15	75		N/A	N/A	N/A	20±1dBm
20	1	QPSK	N/A	N/A	N/A	23±1dBm
20	50		N/A	N/A	N/A	22±1dBm
20	100		N/A	N/A	N/A	21±1dBm
20	1	16- QAM	N/A	N/A	N/A	23±1dBm
20	50		N/A	N/A	N/A	22±1dBm
20	100		N/A	N/A	N/A	21±1dBm



BW[MHz]	RB Size	Mode	Band 26	Band 41	Band 66
1.4	1	QPSK	22±1dBm	N/A	20±1dBm
1.4	3		21±1dBm	N/A	20±1dBm
1.4	6		20±1dBm	N/A	19±1dBm
1.4	1	16- QAM	22±1dBm	N/A	20±1dBm
1.4	3		21±1dBm	N/A	19±1dBm
1.4	6		20±1dBm	N/A	19±1dBm
3	1	QPSK	23±1dBm	N/A	21±1dBm
3	8		22±1dBm	N/A	21±1dBm
3	15		21±1dBm	N/A	20±1dBm
3	1	16- QAM	22±1dBm	N/A	21±1dBm
3	8		22±1dBm	N/A	20±1dBm
3	15		21±1dBm	N/A	19±1dBm
5	1	QPSK	22±1dBm	20±1dBm	21±1dBm
5	12		22±1dBm	19±1dBm	20±1dBm
5	25		21±1dBm	18±1dBm	20±1dBm
5	1	16- QAM	22±1dBm	20±1dBm	21±1dBm
5	12		21±1dBm	19±1dBm	20±1dBm
5	25		21±1dBm	18±1dBm	19±1dBm
10	1	QPSK	23±1dBm	20±1dBm	21±1dBm
10	25		22±1dBm	19±1dBm	20±1dBm
10	50		21±1dBm	18±1dBm	19±1dBm
10	1	16- QAM	22±1dBm	19±1dBm	20±1dBm
10	25		22±1dBm	19±1dBm	20±1dBm
10	50		21±1dBm	18±1dBm	19±1dBm
15	1	QPSK	23±1dBm	20±1dBm	20±1dBm
15	36		22±1dBm	19±1dBm	20±1dBm
15	75		21±1dBm	19±1dBm	19±1dBm
15	1	16- QAM	23±1dBm	20±1dBm	20±1dBm
15	36		22±1dBm	19±1dBm	19±1dBm
15	75		21±1dBm	18±1dBm	19±1dBm
20	1	QPSK	N/A	20±1dBm	21±1dBm
20	50		N/A	20±1dBm	21±1dBm
20	100		N/A	19±1dBm	20±1dBm
20	1	16- QAM	N/A	20±1dBm	21±1dBm
20	50		N/A	19±1dBm	20±1dBm
20	100		N/A	19±1dBm	20±1dBm



10.3 SAR Test Exclusions Applied

Per FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot \sqrt{f(\text{GHz})} \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of **Bluetooth Head** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Head SAR was not required; $[(6.310/5) * \sqrt{2.480}] = 1.99 < 3.0$.

Based on the maximum conducted power of **Bluetooth Body** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Body SAR was not required; $[(6.310/10) * \sqrt{2.480}] = 0.99 < 3.0$.

Based on the maximum conducted power of **2.4 GHz WLAN Head** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WLAN SAR was required; $[(31.623/5) * \sqrt{2.462}] = 9.92 > 3.0$.

Based on the maximum conducted power of **2.4 GHz WLAN Body** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WLAN SAR was required; $[(31.623/10) * \sqrt{2.462}] = 4.96 > 3.0$.

Based on the maximum conducted power of **5.2 GHz WLAN Head** (rounded to the nearest mW) and the antenna to user separation distance,

5.2 GHz WLAN SAR was required; $[(15.849/5) * \sqrt{5.200}] = 7.23 > 3.0$.

Based on the maximum conducted power of **5.2 GHz WLAN Body** (rounded to the nearest mW) and the antenna to user separation distance,

5.2 GHz WLAN SAR was required; $[(15.849/10) * \sqrt{5.200}] = 3.61 > 3.0$.

Based on the maximum conducted power of **5.3 GHz WLAN Head** (rounded to the nearest mW) and the antenna to user separation distance,

5.3 GHz WLAN SAR was required; $[(15.849/5) * \sqrt{5.300}] = 7.30 > 3.0$.

Based on the maximum conducted power of **5.3 GHz WLAN Body** (rounded to the nearest mW) and the antenna to user separation distance,

5.3 GHz WLAN SAR was required; $[(15.849/10) * \sqrt{5.300}] = 3.65 > 3.0$.



Based on the maximum conducted power of **5.6 GHz WLAN Head** (rounded to the nearest mW) and the antenna to user separation distance,

5.6 GHz WLAN SAR was not required; $[(5.888/5)^* \sqrt{5.600}] = 2.79 < 3.0$.

Based on the maximum conducted power of **5.6 GHz WLAN Body** (rounded to the nearest mW) and the antenna to user separation distance,

5.6 GHz WLAN SAR was not required; $[(5.888/10)^* \sqrt{5.600}] = 1.39 < 3.0$.

Based on the maximum conducted power of **5.8 GHz WLAN Head** (rounded to the nearest mW) and the antenna to user separation distance,

5.8 GHz WLAN SAR was not required; $[(3.311/5)^* \sqrt{5.800}] = 1.59 < 3.0$.

Based on the maximum conducted power of **5.8 GHz WLAN Body** (rounded to the nearest mW) and the antenna to user separation distance,

5.8 GHz WLAN SAR was not required; $[(3.311/10)^* \sqrt{5.800}] = 0.80 < 3.0$.



11. EUT And Test Setup Photo

11.1 EUT Photo


Front side



Back side




Top Edge

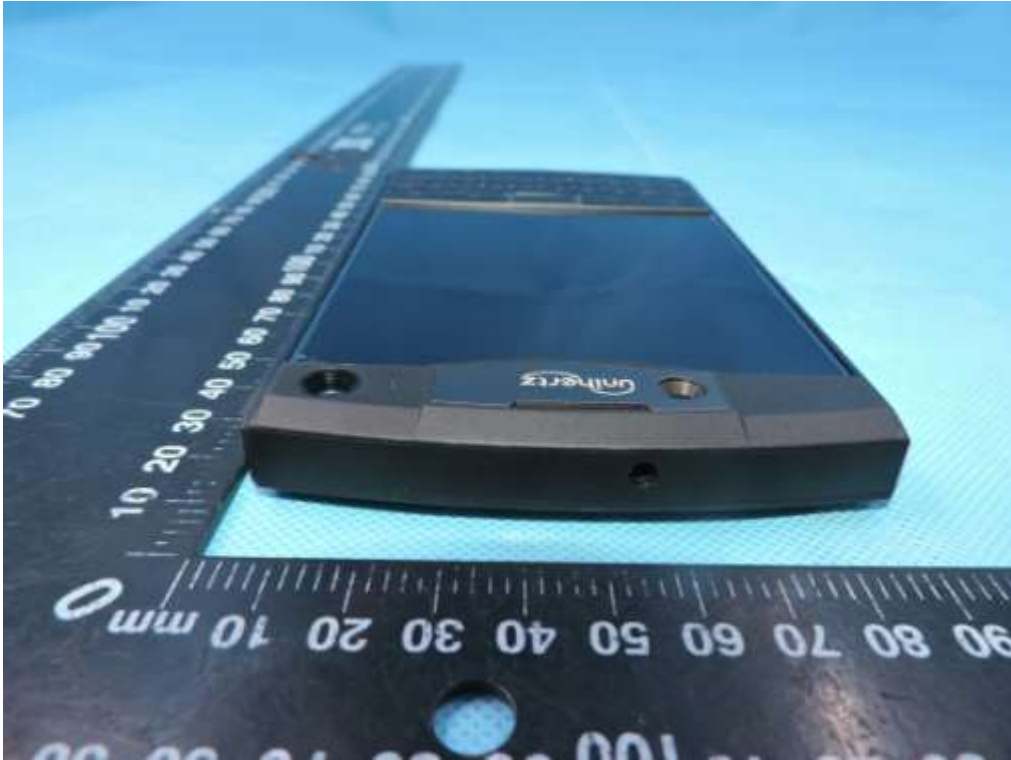


Bottom Edge



Left Edge

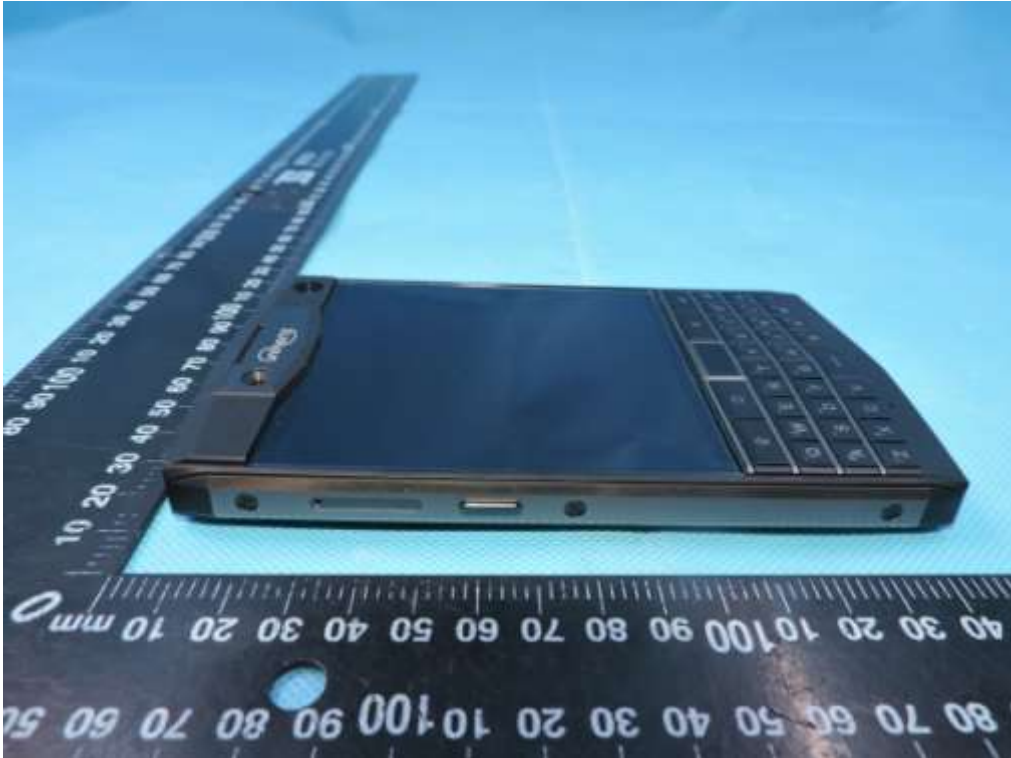


Right Edge

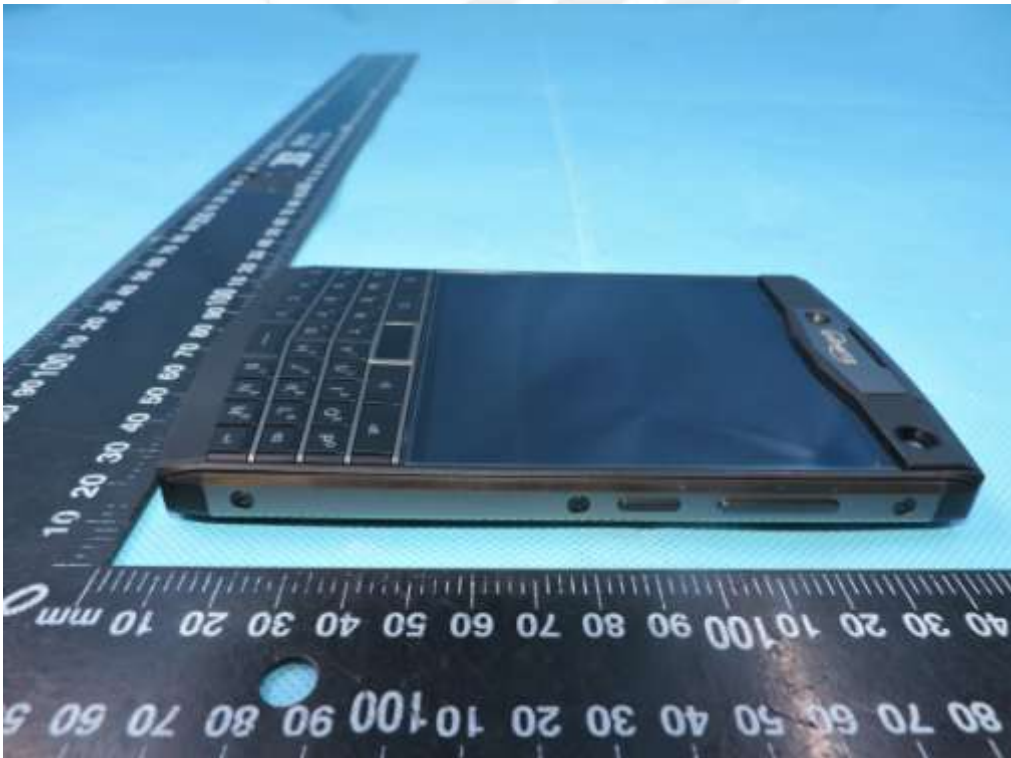


11.2 Setup Photo


Right Touch

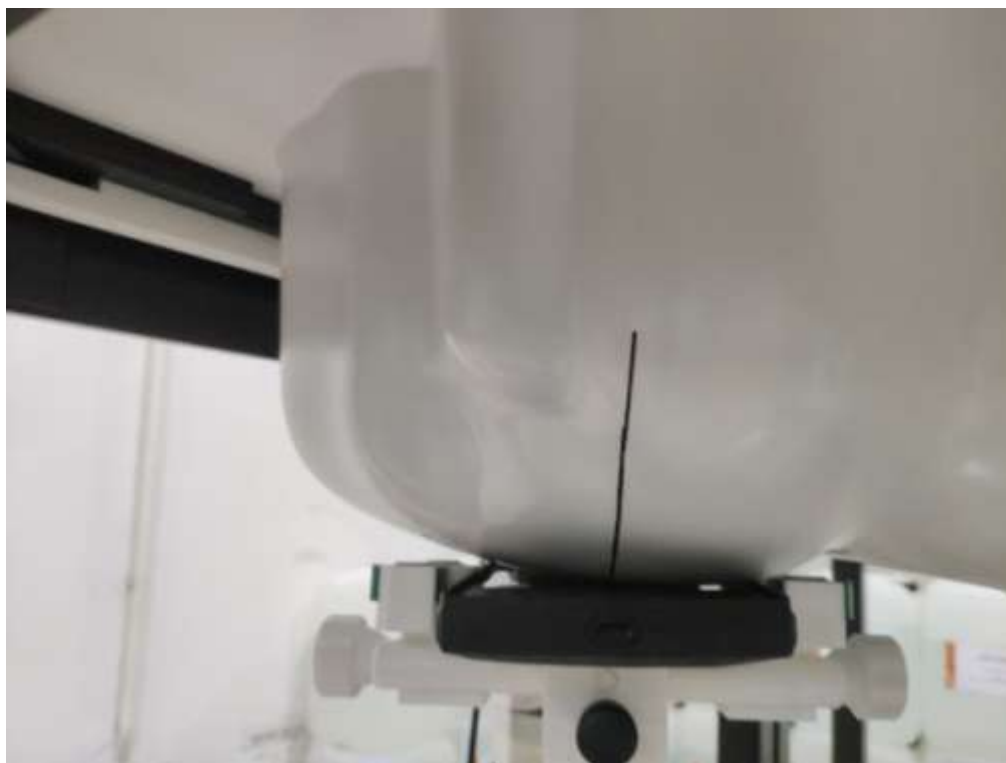


Right Tilt

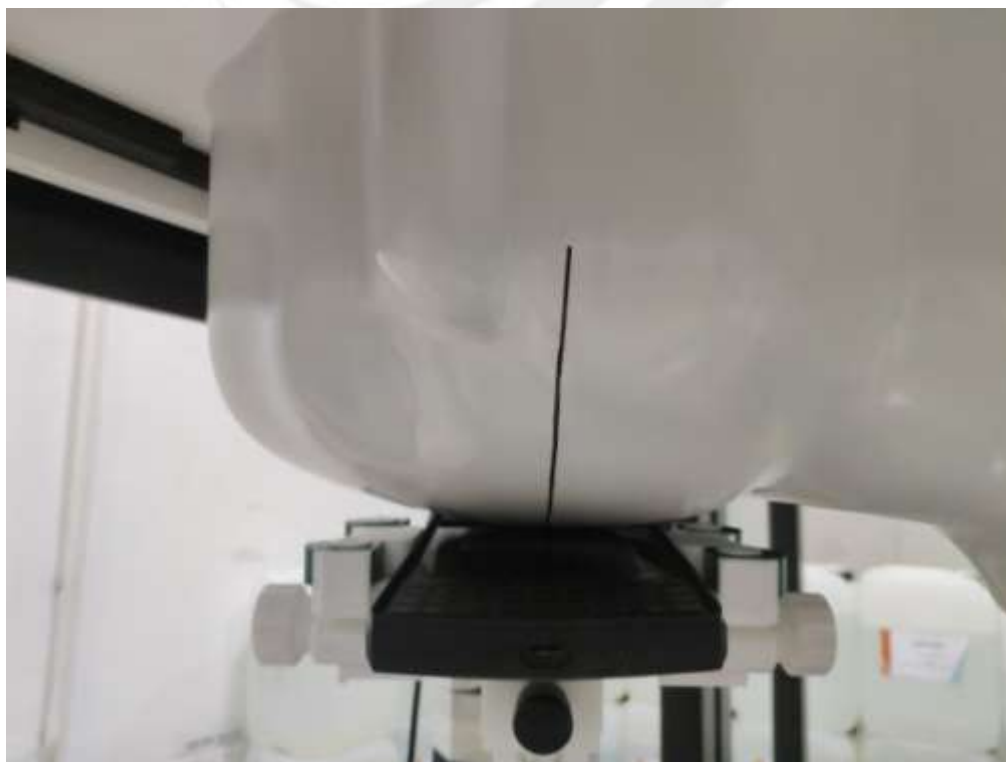


Left Touch

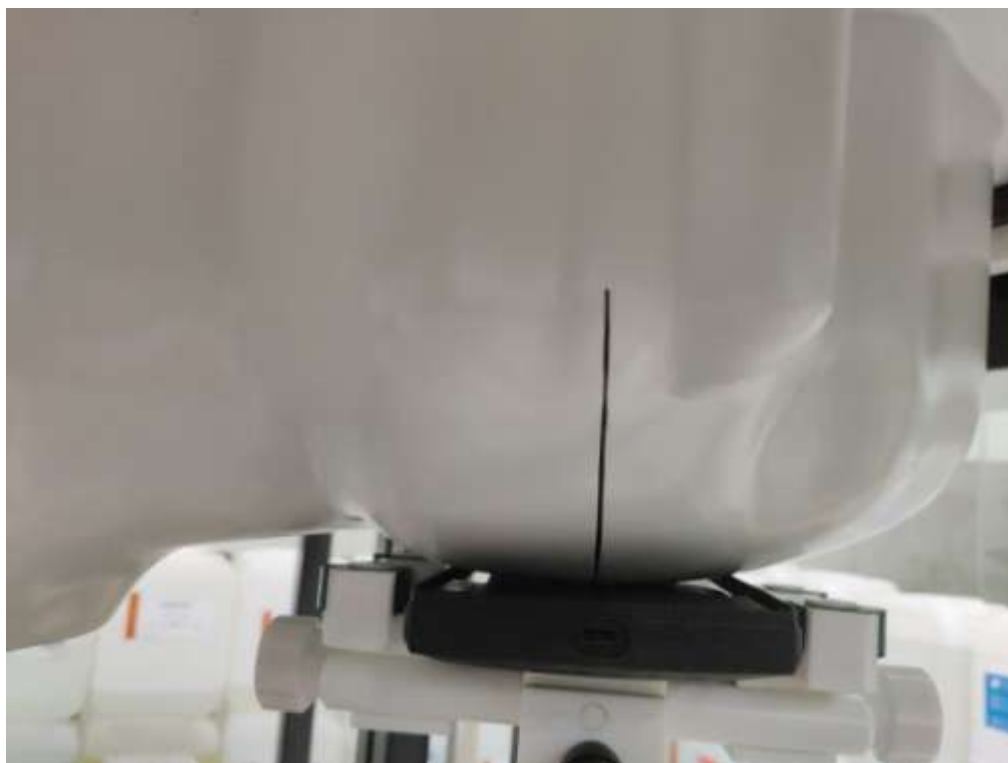


Left Tilt

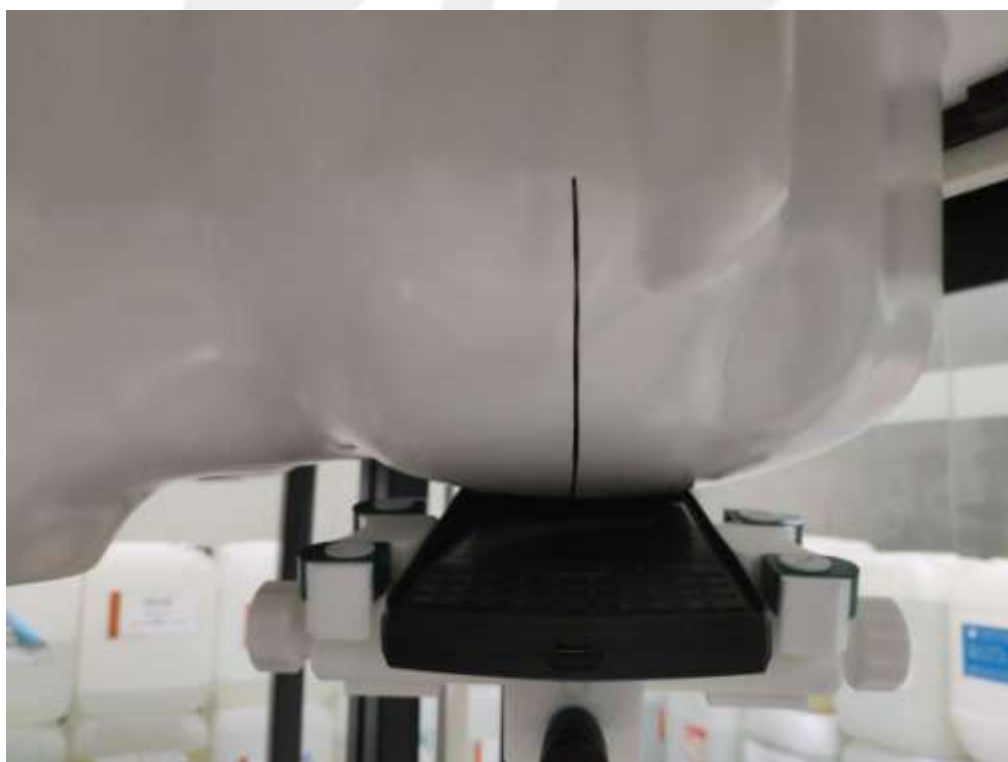

Body Front side(separation distance is 10mm)

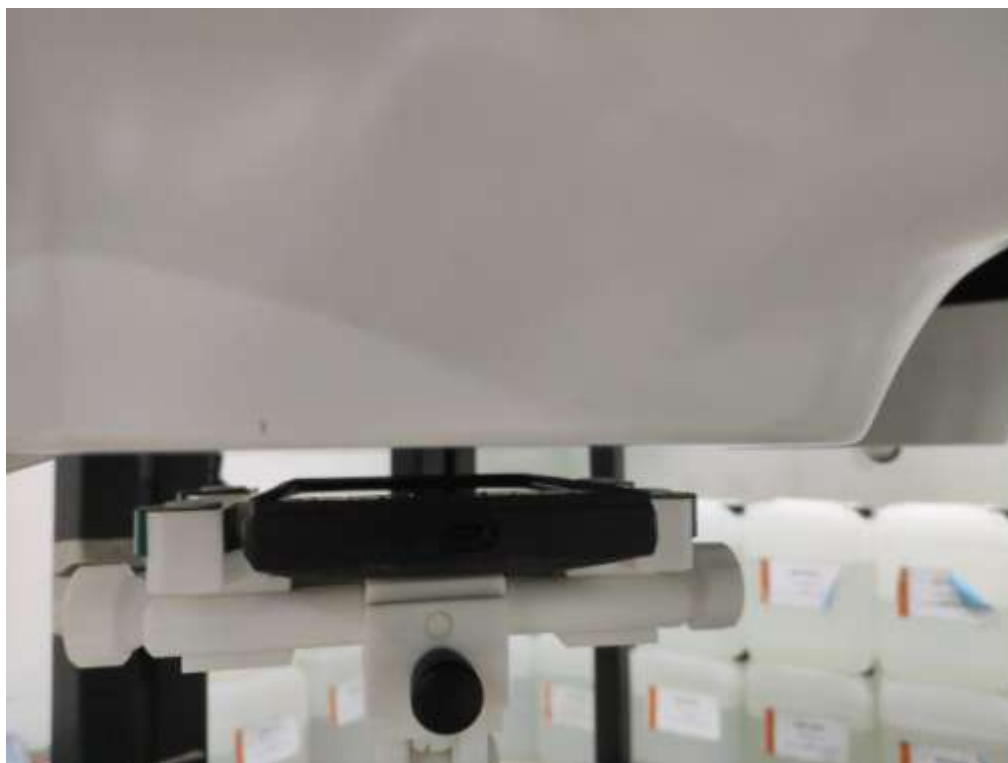

Body Back side(separation distance is 10mm)

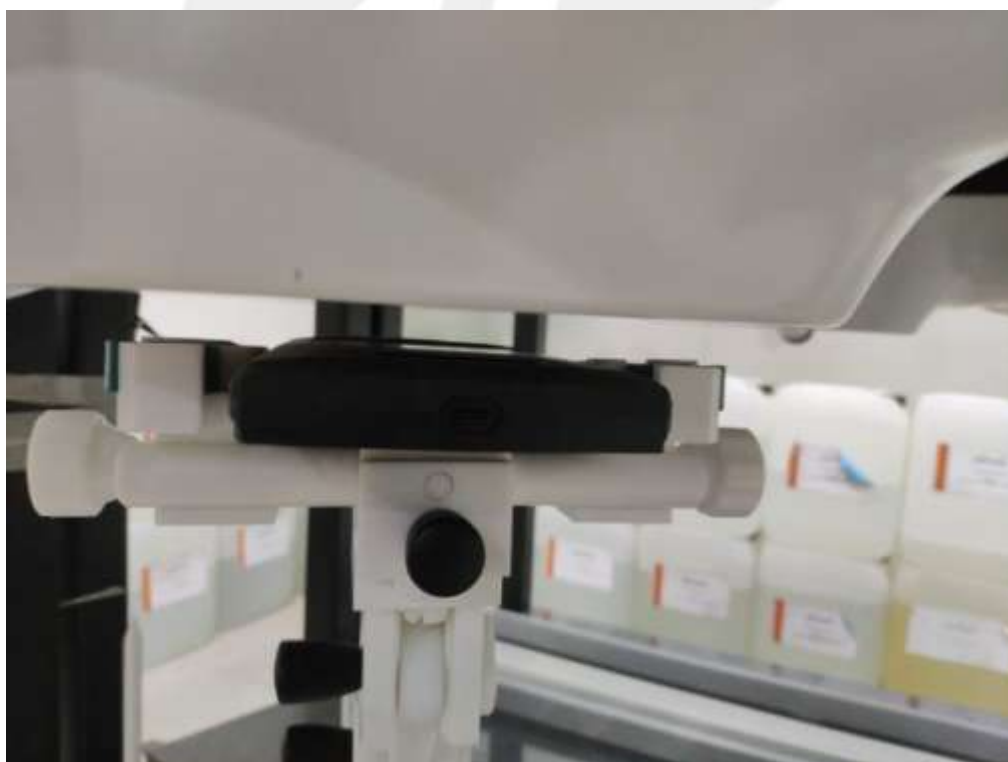

Left Edge(separation distance is 10mm)




Right Edge(separation distance is 10mm)



Top Edge(separation distance is 10mm)



Bottom Edge(separation distance is 10mm)

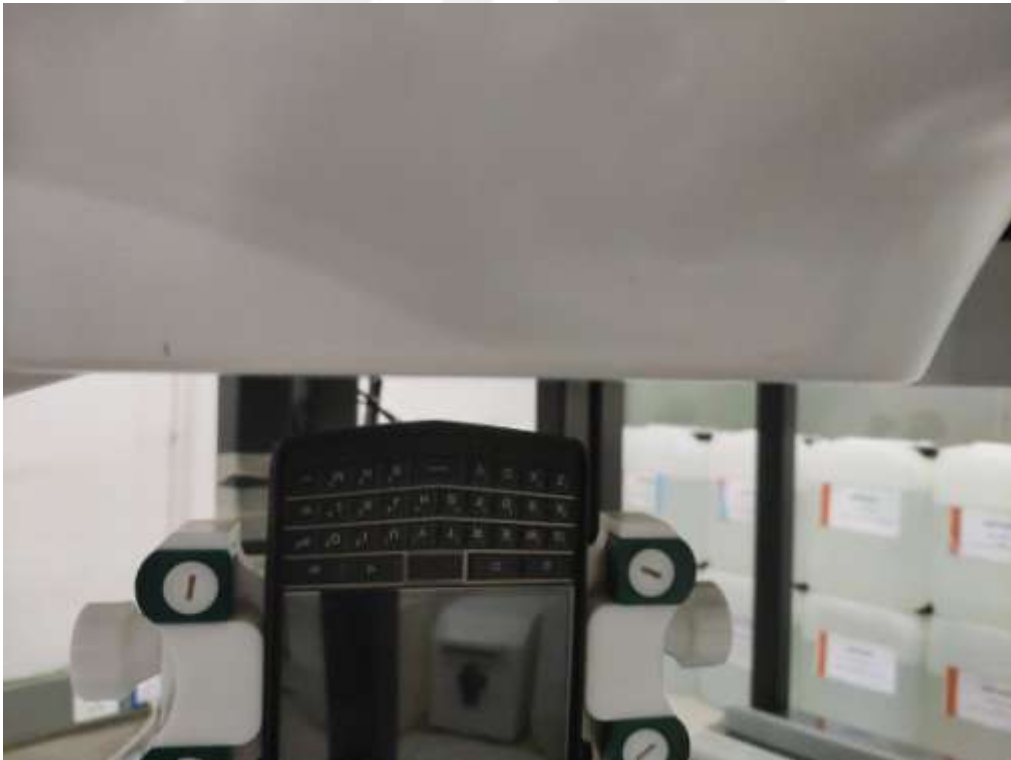

Body Back side With earphone(separation distance is 10mm)



Liquid depth (15 cm)





12. SAR Result Summary

12.1 Head SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Right Cheek	128	0.057	-1.25	29	28.07	0.071	/
		Right Tilt	128	0.024	-3.66	29	28.07	0.030	/
		Left Cheek	128	0.072	-2.71	29	28.07	0.089	1
		Left Tilt	128	0.040	-3.73	29	28.07	0.050	/
GSM1900	GPRS Data-4 Slot	Right Cheek	512	0.117	3.55	25	24.39	0.135	/
		Right Tilt	512	0.054	3.21	25	24.39	0.062	/
		Left Cheek	512	0.158	-3.85	25	24.39	0.182	3
		Left Tilt	512	0.073	1.92	25	24.39	0.084	/
WCDMA II	RMC	Right Cheek	9538	0.637	1.32	24	23.94	0.646	/
		Right Tilt	9538	0.312	-2.57	24	23.94	0.316	/
		Left Cheek	9262	0.762	-3.91	24	23.80	0.798	/
		Left Cheek	9400	0.715	-1.78	24	23.54	0.795	/
		Left Cheek	9538	0.840	2.82	24	23.94	0.852	5
		Left Tilt	9538	0.346	1.37	24	23.94	0.351	/
WCDMA IV	RMC	Right Cheek	1312	0.252	-0.56	22	21.66	0.273	7
		Right Tilt	1312	0.115	-0.29	22	21.66	0.124	/
		Left Cheek	1312	0.192	-3.37	22	21.66	0.208	/
		Left Tilt	1312	0.076	-3.27	22	21.66	0.082	/
WCDMA V	HSDPA Subtest -1	Right Cheek	4132	0.043	-3.46	22	21.61	0.047	/
		Right Tilt	4132	0.014	-0.42	22	21.61	0.015	/
		Left Cheek	4132	0.058	-0.72	22	21.61	0.063	9
		Left Tilt	4132	0.017	1.28	22	21.61	0.019	/



Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WLAN 2.4 G	802.11b	Right Cheek	11	0.243	-3.05	15	14.65	100	0.263	/
		Right Tilt	11	0.211	3.64	15	14.65	100	0.229	/
		Left Cheek	11	0.305	-2.11	15	14.65	100	0.331	11
		Left Tilt	11	0.272	3.48	15	14.65	100	0.295	/
WLAN 5.2 G	802.11a	Right Cheek	40	0.314	3.54	12	11.90	100	0.321	/
		Right Tilt	40	0.276	2.36	12	11.90	100	0.282	/
		Left Cheek	40	0.389	3.71	12	11.90	100	0.398	13
		Left Tilt	40	0.352	-2.99	12	11.90	100	0.360	/
WLAN 5.3 G	802.11a	Right Cheek	52	0.157	-2.02	12	11.92	100	0.160	/
		Right Tilt	52	0.134	3.44	12	11.92	100	0.136	/
		Left Cheek	52	0.181	-3.37	12	11.92	100	0.184	15
		Left Tilt	52	0.156	2.97	12	11.92	100	0.159	/

Note:

- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.136** W/Kg for Head)
- Per KDB865664 D01, Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Right Cheek	19100	0.179	-2.32	24	23.41	0.205	17
			50	0	Right Cheek	19100	0.126	-3.75	23	22.78	0.133	/
			1	0	Right Tilt	19100	0.088	2.70	24	23.41	0.101	/
			50	0	Right Tilt	19100	0.052	0.78	23	22.78	0.055	/
			1	0	Left Cheek	19100	0.132	3.90	24	23.41	0.151	/
			50	0	Left Cheek	19100	0.105	-2.87	23	22.78	0.110	/
			1	0	Left Tilt	19100	0.067	3.14	24	23.41	0.077	/
			50	0	Left Tilt	19100	0.041	3.65	23	22.78	0.043	/
LTE Band 4	20M	QPSK	1	0	Right Cheek	20175	0.250	3.99	22	21.22	0.299	19
			50	0	Right Cheek	20175	0.212	-1.10	21	20.43	0.242	/
			1	0	Right Tilt	20175	0.134	2.58	22	21.22	0.160	/
			50	0	Right Tilt	20175	0.096	2.80	21	20.43	0.109	/
			1	0	Left Cheek	20175	0.187	-3.67	22	21.22	0.224	/
			50	0	Left Cheek	20175	0.154	2.24	21	20.43	0.176	/
			1	0	Left Tilt	20175	0.076	-1.28	22	21.22	0.091	/
			50	0	Left Tilt	20175	0.059	-3.09	21	20.43	0.067	/
LTE Band 5	10M	QPSK	1	0	Right Cheek	20450	0.070	-2.42	24	23.98	0.070	/
			25	0	Right Cheek	20450	0.045	-0.33	24	23.26	0.053	/
			1	0	Right Tilt	20450	0.028	-2.89	24	23.98	0.028	/
			25	0	Right Tilt	20450	0.021	-0.44	24	23.26	0.025	/
			1	0	Left Cheek	20450	0.089	-2.68	24	23.98	0.089	21
			25	0	Left Cheek	20450	0.063	-1.18	24	23.26	0.075	/
			1	0	Left Tilt	20450	0.041	-3.09	24	23.98	0.041	/
			25	0	Left Tilt	20450	0.027	-2.68	24	23.26	0.032	/
LTE Band 7	20M	QPSK	1	0	Right Cheek	21100	0.135	1.21	21	20.5	0.151	23
			50	0	Right Cheek	21100	0.112	2.53	20	19.83	0.116	/
			1	0	Right Tilt	21100	0.078	1.35	21	20.5	0.088	/
			50	0	Right Tilt	21100	0.045	-1.34	20	19.83	0.047	/
			1	0	Left Cheek	21100	0.103	2.26	21	20.5	0.116	/
			50	0	Left Cheek	21100	0.086	-3.02	20	19.83	0.089	/
			1	0	Left Tilt	21100	0.051	-2.43	21	20.5	0.057	/
			50	0	Left Tilt	21100	0.039	-2.73	20	19.83	0.041	/
LTE Band 12	10M	QPSK	1	0	Right Cheek	23060	0.047	-2.91	24	23.61	0.051	/
			25	0	Right Cheek	23060	0.033	-2.21	23	22.88	0.034	/
			1	0	Right Tilt	23060	0.021	3.67	24	23.61	0.023	/
			25	0	Right Tilt	23060	0.015	-0.27	23	22.88	0.015	/
			1	0	Left Cheek	23060	0.064	3.28	24	23.61	0.070	25
			25	0	Left Cheek	23060	0.048	1.86	23	22.88	0.049	/
			1	0	Left Tilt	23060	0.035	1.14	24	23.61	0.038	/
			25	0	Left Tilt	23060	0.020	-2.53	23	22.88	0.021	/



LTE Band 13	10M	QPSK	1	0	Right Cheek	23230	0.027	-1.86	23	22.62	0.029	/
			25	0	Right Cheek	23230	0.022	2.22	22	21.91	0.022	/
			1	0	Right Tilt	23230	0.013	3.84	23	22.62	0.014	/
			25	0	Right Tilt	23230	0.009	3.79	22	21.91	0.009	/
			1	0	Left Cheek	23230	0.038	-2.60	23	22.62	0.041	27
			25	0	Left Cheek	23230	0.030	-3.99	22	21.91	0.031	/
			1	0	Left Tilt	23230	0.015	-0.43	23	22.62	0.016	/
			25	0	Left Tilt	23230	0.012	-1.62	22	21.91	0.012	/
LTE Band 17	10M	QPSK	1	24	Right Cheek	23790	0.054	-0.31	23	22.79	0.057	/
			25	0	Right Cheek	23790	0.038	0.74	23	22.03	0.048	/
			1	24	Right Tilt	23790	0.023	-1.80	23	22.79	0.024	/
			25	0	Right Tilt	23790	0.011	-3.62	23	22.03	0.014	/
			1	24	Left Cheek	23790	0.075	-0.54	23	22.79	0.079	29
			25	0	Left Cheek	23790	0.058	-3.17	23	22.03	0.073	/
			1	24	Left Tilt	23790	0.033	-1.02	23	22.79	0.035	/
			25	0	Left Tilt	23790	0.021	1.61	23	22.03	0.026	/
LTE Band 25	20M	QPSK	1	0	Right Cheek	26365	0.194	-3.14	24	23.42	0.222	31
			50	0	Right Cheek	26140	0.151	2.56	23	22.71	0.161	/
			1	0	Right Tilt	26365	0.087	-2.71	24	23.42	0.099	/
			50	0	Right Tilt	26140	0.065	-3.39	23	22.71	0.069	/
			1	0	Left Cheek	26365	0.124	3.00	24	23.42	0.142	/
			50	0	Left Cheek	26140	0.089	-1.18	23	22.71	0.095	/
			1	0	Left Tilt	26365	0.053	-0.55	24	23.42	0.061	/
			50	0	Left Tilt	26140	0.040	-2.74	23	22.71	0.043	/
LTE Band 26	15M	QPSK	1	0	Right Cheek	26990	0.052	3.33	24	23.30	0.061	33
			36	0	Right Cheek	26990	0.037	0.74	23	22.60	0.041	/
			1	0	Right Tilt	26990	0.020	-0.84	24	23.30	0.023	/
			36	0	Right Tilt	26990	0.012	3.98	23	22.60	0.013	/
			1	0	Left Cheek	26990	0.035	1.11	24	23.30	0.041	/
			36	0	Left Cheek	26990	0.021	3.95	23	22.60	0.023	/
			1	0	Left Tilt	26990	0.016	3.33	24	23.30	0.019	/
			36	0	Left Tilt	26990	0.009	-2.93	23	22.60	0.010	/
LTE Band 41	20M	QPSK	1	0	Right Cheek	40620	0.018	0.45	21	20.92	0.018	35
			50	0	Right Cheek	40620	0.013	2.24	21	20.23	0.016	/
			1	0	Right Tilt	40620	0.007	3.71	21	20.92	0.007	/
			50	0	Right Tilt	40620	0.004	-3.15	21	20.23	0.005	/
			1	0	Left Cheek	40620	0.012	-0.24	21	20.92	0.012	/
			50	0	Left Cheek	40620	0.007	-0.38	21	20.23	0.008	/
			1	0	Left Tilt	40620	0.005	-0.15	21	20.92	0.005	/
			50	0	Left Tilt	40620	0.003	3.10	21	20.23	0.004	/
LTE Band 66	20M	QPSK	1	0	Right Cheek	132072	0.294	-3.42	22	21.91	0.300	37
			50	0	Right Cheek	132072	0.218	0.37	22	21.27	0.258	/
			1	0	Right Tilt	132072	0.136	-2.72	22	21.91	0.139	/
			50	0	Right Tilt	132072	0.112	2.13	22	21.27	0.133	/
			1	0	Left Cheek	132072	0.223	-3.90	22	21.91	0.228	/
			50	0	Left Cheek	132072	0.187	-2.94	22	21.27	0.221	/
			1	0	Left Tilt	132072	0.105	3.88	22	21.91	0.107	/
			50	0	Left Tilt	132072	0.083	-3.49	22	21.27	0.098	/



12.2 Body-worn and Hotspot SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Front side	128	0.027	2.06	29	28.07	0.033	/
		Back side	128	0.059	-1.96	29	28.07	0.073	2
		Left Edge	128	0.030	2.08	29	28.07	0.037	/
		Right Edge	128	0.012	1.36	29	28.07	0.015	/
		Top Edge	128	0.004	-0.29	29	28.07	0.005	/
		Bottom Edge	128	0.016	-1.88	29	28.07	0.020	/
	Voice	Back side+Ear	128	0.045	0.97	29	28.07	0.056	/
GSM1900	GPRS Data-4 Slot	Front side	512	0.153	2.34	25	24.39	0.176	/
		Back side	512	0.298	3.13	25	24.39	0.343	4
		Left Edge	512	0.228	-2.82	25	24.39	0.262	/
		Right Edge	512	0.086	-1.37	25	24.39	0.099	/
		Bottom Edge	512	0.052	3.38	25	24.39	0.060	/
	Voice	Back side+Ear	128	0.269	2.76	25	24.39	0.310	/
WCDMA II	RMC	Front side	9538	0.311	2.85	24	23.94	0.315	/
		Back side	9538	0.385	-2.15	24	23.94	0.390	6
		Left Edge	9538	0.273	1.60	24	23.94	0.277	/
		Right Edge	9538	0.139	1.31	24	23.94	0.141	/
		Bottom Edge	9538	0.069	3.83	24	23.94	0.070	/
WCDMA IV	RMC	Front side	1312	0.426	0.55	22	21.66	0.461	/
		Back side	1312	0.649	-0.50	22	21.66	0.702	8
		Left Edge	1312	0.357	1.79	22	21.66	0.386	/
		Right Edge	1312	0.184	2.33	22	21.66	0.199	/
		Bottom Edge	1312	0.296	-0.71	22	21.66	0.320	/
WCDMA V	HSDPA Subtest-1	Front side	4132	0.031	0.80	22	21.61	0.034	/
		Back side	4132	0.064	3.70	22	21.61	0.070	10
		Left Edge	4132	0.043	-2.43	22	21.61	0.047	/
		Bottom Edge	4132	0.019	3.22	22	21.61	0.021	/



Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WLAN	802.11b	Front side	11	0.097	-3.26	15	14.65	100	0.105	/
		Back side	11	0.168	2.28	15	14.65	100	0.182	12
		Right Edge	11	0.075	-1.23	15	14.65	100	0.081	/
		Top Edge	11	0.052	-3.49	15	14.65	100	0.056	/
WLAN 5.2 G	802.11a	Front side	40	0.131	0.32	12	11.90	100	0.134	/
		Back side	40	0.214	0.47	12	11.90	100	0.219	14
		Right side	40	0.112	2.01	12	11.90	100	0.115	/
		Top side	40	0.078	-0.13	12	11.90	100	0.080	/
WLAN 5.3 G	802.11a	Front side	52	0.065	-1.28	12	11.92	100	0.066	/
		Back side	52	0.092	2.25	12	11.92	100	0.094	16
		Right side	52	0.048	-1.96	12	11.92	100	0.049	/
		Top side	52	0.041	2.93	12	11.92	100	0.042	/

Note:

- The test separation of all above table is 10mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.075** W/Kg for Body)
- When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Front side	19100	0.153	0.17	24	23.41	0.175	/
			50	0	Front side	19100	0.129	1.98	23	22.78	0.136	/
			1	0	Back Side	19100	0.247	2.91	24	23.41	0.283	18
			50	0	Back Side	19100	0.212	3.93	23	22.78	0.223	/
			1	0	Left Edge	19100	0.110	-0.27	24	23.41	0.126	/
			50	0	Left Edge	19100	0.086	-2.49	23	22.78	0.090	/
			1	0	Right Edge	19100	0.033	1.32	24	23.41	0.038	/
			50	0	Right Edge	19100	0.025	0.57	23	22.78	0.026	/
			1	0	Bottom Edge	19100	0.057	-0.86	24	23.41	0.065	/
			50	0	Bottom Edge	19100	0.044	-2.82	23	22.78	0.046	/
LTE Band 4	20M	QPSK	1	0	Front side	20175	0.217	-0.70	22	21.22	0.260	/
			50	0	Front side	20175	0.183	-0.73	21	20.43	0.209	/
			1	0	Back Side	20175	0.386	0.03	22	21.22	0.462	20
			50	0	Back Side	20175	0.341	3.97	21	20.43	0.389	/
			1	0	Left Edge	20175	0.266	2.73	22	21.22	0.318	/
			50	0	Left Edge	20175	0.213	-1.97	21	20.43	0.243	/
			1	0	Right Edge	20175	0.074	-2.33	22	21.22	0.089	/
			50	0	Right Edge	20175	0.061	1.58	21	20.43	0.070	/
			1	0	Bottom Edge	20175	0.110	2.55	22	21.22	0.132	/
			50	0	Bottom Edge	20175	0.097	-3.01	21	20.43	0.111	/
LTE Band 5	10M	QPSK	1	0	Front side	20450	0.055	1.68	24	23.98	0.055	/
			25	0	Front side	20450	0.042	-2.26	24	23.26	0.050	/
			1	0	Back Side	20450	0.093	0.31	24	23.98	0.093	22
			25	0	Back Side	20450	0.075	1.10	24	23.26	0.089	/
			1	0	Left Edge	20450	0.068	-1.81	24	23.98	0.068	/
			25	0	Left Edge	20450	0.046	0.93	24	23.26	0.055	/
			1	0	Right Edge	20450	0.017	-1.32	24	23.98	0.017	/
			25	0	Right Edge	20450	0.012	-0.47	24	23.26	0.014	/
			1	0	Bottom Edge	20450	0.033	-3.28	24	23.98	0.033	/
			25	0	Bottom Edge	20450	0.028	2.41	24	23.26	0.033	/
LTE Band 7	20M	QPSK	1	0	Front side	21100	0.643	2.49	21	20.5	0.721	/
			50	0	Front side	21100	0.571	2.54	20	19.83	0.594	/
			1	0	Back Side	20850	0.876	0.05	21	20.28	1.034	/
			1	0	Back Side	21100	0.927	3.79	21	20.5	1.040	24
			1	0	Back Side	21350	0.895	-1.44	21	20.43	1.021	/
			50	0	Back Side	20850	0.710	3.11	20	19.54	0.789	/
			50	0	Back Side	21100	0.818	-2.60	20	19.83	0.851	/
			50	0	Back Side	21350	0.749	1.50	20	19.62	0.817	/
			100	0	Back Side	21100	0.638	2.99	20	19.12	0.781	/
			1	0	Left Edge	21100	0.635	3.74	21	20.5	0.712	/
			50	0	Left Edge	21100	0.552	1.31	20	19.83	0.574	/
			1	0	Right Edge	21100	0.313	2.36	21	20.5	0.351	/
			50	0	Right Edge	21100	0.267	3.37	20	19.83	0.278	/
			1	0	Bottom Edge	21100	0.387	0.35	21	20.5	0.434	/
50	0	Bottom Edge	21100	0.351	-3.21	20	19.83	0.365	/			



LTE Band 12	10M	QPSK	1	0	Front side	23060	0.047	-0.96	24	23.61	0.051	/
			25	0	Front side	23060	0.032	-1.32	23	22.88	0.033	/
			1	0	Back Side	23060	0.084	3.51	24	23.61	0.092	26
			25	0	Back Side	23060	0.067	-3.59	23	22.88	0.069	/
			1	0	Left Edge	23060	0.059	0.83	24	23.61	0.065	/
			25	0	Left Edge	23060	0.050	1.73	23	22.88	0.051	/
			1	0	Right Edge	23060	0.009	0.35	24	23.61	0.010	/
			25	0	Right Edge	23060	0.006	1.01	23	22.88	0.006	/
			1	0	Bottom Edge	23060	0.036	0.10	24	23.61	0.039	/
			25	0	Bottom Edge	23060	0.031	-0.65	23	22.88	0.032	/
LTE Band 13	10M	QPSK	1	0	Front side	23230	0.075	-1.40	23	22.62	0.082	/
			25	0	Front side	23230	0.063	-3.32	22	21.91	0.064	/
			1	0	Back Side	23230	0.102	-2.29	23	22.62	0.111	28
			25	0	Back Side	23230	0.086	-1.99	22	21.91	0.088	/
			1	0	Left Edge	23230	0.072	2.90	23	22.62	0.079	/
			25	0	Left Edge	23230	0.065	-2.57	22	21.91	0.066	/
			1	0	Right Edge	23230	0.013	0.42	23	22.62	0.014	/
			25	0	Right Edge	23230	0.008	0.75	22	21.91	0.008	/
			1	0	Bottom Edge	23230	0.033	0.96	23	22.62	0.036	/
			25	0	Bottom Edge	23230	0.025	-3.98	22	21.91	0.026	/
LTE Band 17	10M	QPSK	1	24	Front side	23790	0.067	1.08	23	22.79	0.070	/
			25	0	Front side	23790	0.054	3.45	23	22.03	0.068	/
			1	24	Back Side	23790	0.118	1.05	23	22.79	0.124	30
			25	0	Back Side	23790	0.095	2.42	23	22.03	0.119	/
			1	24	Left Edge	23790	0.063	-1.70	23	22.79	0.066	/
			25	0	Left Edge	23790	0.051	3.34	23	22.03	0.064	/
			1	24	Right Edge	23790	0.023	1.68	23	22.79	0.024	/
			25	0	Right Edge	23790	0.018	0.93	23	22.03	0.023	/
			1	24	Bottom Edge	23790	0.027	3.60	23	22.79	0.028	/
			25	0	Bottom Edge	23790	0.020	1.62	23	22.03	0.025	/
LTE Band 25	20M	QPSK	1	0	Front side	26365	0.183	-2.13	24	23.42	0.209	/
			50	0	Front side	26140	0.156	1.03	23	22.71	0.167	/
			1	0	Back Side	26365	0.270	1.17	24	23.42	0.309	32
			50	0	Back Side	26140	0.215	2.18	23	22.71	0.230	/
			1	0	Left Edge	26365	0.128	-1.10	24	23.42	0.146	/
			50	0	Left Edge	26140	0.117	2.02	23	22.71	0.125	/
			1	0	Right Edge	26365	0.035	1.36	24	23.42	0.040	/
			50	0	Right Edge	26140	0.027	2.59	23	22.71	0.029	/
			1	0	Bottom Edge	26365	0.084	-2.82	24	23.42	0.096	/
			50	0	Bottom Edge	26140	0.071	-0.80	23	22.71	0.076	/



LTE Band 26	15M	QPSK	1	0	Front side	26990	0.017	-1.47	24	23.30	0.020	/
			36	0	Front side	26990	0.010	-2.85	23	22.60	0.011	/
			1	0	Back Side	26990	0.038	1.45	24	23.30	0.045	34
			36	0	Back Side	26990	0.025	3.69	23	22.60	0.027	/
			1	0	Left Edge	26990	0.011	-2.94	24	23.30	0.013	/
			36	0	Left Edge	26990	0.009	-2.16	23	22.60	0.010	/
			1	0	Right Edge	26990	0.004	1.13	24	23.30	0.005	/
			36	0	Right Edge	26990	0.003	0.25	23	22.60	0.003	/
			1	0	Bottom Edge	26990	0.006	3.21	24	23.30	0.007	/
			36	0	Bottom Edge	26990	0.004	1.40	23	22.60	0.004	/
LTE Band 41	20M	QPSK	1	0	Front side	40620	0.439	0.34	21	20.92	0.447	/
			50	0	Front side	40620	0.386	2.96	21	20.23	0.461	/
			1	0	Back Side	40620	0.662	2.27	21	20.92	0.674	36
			50	0	Back Side	40620	0.534	-0.55	21	20.23	0.638	/
			1	0	Left Edge	40620	0.397	-1.61	21	20.92	0.404	/
			50	0	Left Edge	40620	0.352	1.78	21	20.23	0.420	/
			1	0	Right Edge	40620	0.186	3.16	21	20.92	0.189	/
			50	0	Right Edge	40620	0.157	1.42	21	20.23	0.187	/
			1	0	Bottom Edge	40620	0.176	1.99	21	20.92	0.179	/
			50	0	Bottom Edge	40620	0.143	-0.22	21	20.23	0.171	/
LTE Band 66	20M	QPSK	1	0	Front side	132072	0.275	1.65	22	21.91	0.281	/
			50	0	Front side	132072	0.223	1.54	22	21.27	0.264	/
			1	0	Back Side	132072	0.410	-2.03	22	21.91	0.419	38
			50	0	Back Side	132072	0.350	-1.78	22	21.27	0.414	/
			1	0	Left Edge	132072	0.217	-0.14	22	21.91	0.222	/
			50	0	Left Edge	132072	0.182	0.66	22	21.27	0.215	/
			1	0	Right Edge	132072	0.095	2.31	22	21.91	0.097	/
			50	0	Right Edge	132072	0.073	1.77	22	21.27	0.086	/
			1	0	Bottom Edge	132072	0.115	1.58	22	21.91	0.117	/
			50	0	Bottom Edge	132072	0.092	-0.83	22	21.27	0.109	/

**Repeated SAR**

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR(W/Kg)	Meas. No.
WCDMA II	RMC	Left Cheek	9538	0.792	1.15	24	23.94	0.803	/
LTE Band 7	QPSK	Back Side	21100	0.883	2.94	21	20.5	0.991	/

12.3 repeated SAR measurement

Band	Mode	Test Position	Ch.	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
WCDMA II	RMC	Left Cheek	9538	0.840	0.792	1.06	-	-	-
LTE Band 7	QPSK	Back Side	21100	0.927	0.883	1.05	-	-	-

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/Kg$.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/Kg$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45W/Kg$
4. The ratio is the difference in percentage between original and repeated measured SAR.



Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous state
Head	1. GSM + WLAN
	2. GSM + Bluetooth
	3. WCDMA + WLAN
	4. WCDMA + Bluetooth
	5. LTE + WLAN
	6. LTE + Bluetooth
Body	1. GSM + WLAN
	2. GSM + Bluetooth
	3. WCDMA + WLAN
	4. WCDMA + Bluetooth
	5. LTE + WLAN
	6. LTE + Bluetooth

NOTE:

- Bluetooth and WLAN can't simultaneous transmission at the same time.
- For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- Based upon KDB 447498 D01, BT SAR is excluded as below table.
- If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
- The reported SAR summation is calculated based on the same configuration and test position.
- KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.

Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	8	6.310	5	2.480	0.265
	Body			10	2.480	0.132
5.6G WLAN	Head	7.7	5.888	5	5.600	0.372
	Body			10	5.600	0.186
5.8G WLAN	Head	5.2	3.311	5	5.800	0.213
	Body			10	5.800	0.106



Simultaneous Mode	Position	Mode	Max. 10-g SAR (W/kg)	10-g Sum SAR (W/kg)
GSM + 2.4GHz WLAN	Head	GSM Voice	0.182	0.513
		2.4GHz WLAN	0.331	
	Body	GSM DATA	0.343	0.525
		2.4GHz WLAN	0.182	
WCDMA RMC+ 2.4GHz WLAN	Head	WCDMA RMC	0.852	1.183
		2.4GHz WLAN	0.331	
	Body	WCDMA RMC	0.702	0.884
		2.4GHz WLAN	0.182	
LTE + 2.4GHz WLAN	Head	LTE	0.300	0.631
		2.4GHz WLAN	0.331	
	Body	LTE	1.040	1.222
		2.4GHz WLAN	0.182	
GSM + Bluetooth	Head	GSM Voice	0.182	0.447
		Bluetooth	0.265	
	Body	GSM Data	0.343	0.475
		Bluetooth	0.132	
WCDMA + Bluetooth	Head	WCDMA RMC	0.852	1.117
		Bluetooth	0.265	
	Body	WCDMA RMC	0.702	0.834
		Bluetooth	0.132	
LTE + Bluetooth	Head	LTE	0.300	0.565
		Bluetooth	0.265	
	Body	LTE	1.040	1.172
		Bluetooth	0.132	
GSM + 5.2GHz WLAN	Head	GSM Voice	0.182	0.580
		5.2GHz WLAN	0.398	
	Body	GSM DATA	0.343	0.562
		5.2GHz WLAN	0.219	
WCDMA RMC+ 5.2GHz WLAN	Head	WCDMA RMC	0.852	1.250
		5.2GHz WLAN	0.398	
	Body	WCDMA RMC	0.702	0.921
		5.2GHz WLAN	0.219	
LTE + 5.2GHz WLAN	Head	LTE	0.300	0.698
		5.2GHz WLAN	0.398	
	Body	LTE	1.040	1.259
		5.2GHz WLAN	0.219	
GSM + 5.3GHz WLAN	Head	GSM Voice	0.182	0.366
		5.3GHz WLAN	0.184	
	Body	GSM DATA	0.343	0.437
		5.3GHz WLAN	0.094	
WCDMA RMC+ 5.3GHz WLAN	Head	WCDMA RMC	0.852	1.036
		5.3GHz WLAN	0.184	
	Body	WCDMA RMC	0.702	0.796
		5.3GHz WLAN	0.094	
LTE + 5.3GHz WLAN	Head	LTE	0.300	0.484
		5.3GHz WLAN	0.184	
	Body	LTE	1.040	1.134
		5.3GHz WLAN	0.094	



Simultaneous Mode	Position	Mode	Max. 10-g SAR (W/kg)	10-g Sum SAR (W/kg)
GSM + 5.6GHz WLAN	Head	GSM Voice	0.182	0.554
		5.6GHz WLAN	0.372	
	Body	GSM DATA	0.343	0.529
		5.6GHz WLAN	0.186	
WCDMA RMC+ 5.6GHz WLAN	Head	WCDMA RMC	0.852	1.224
		5.6GHz WLAN	0.372	
	Body	WCDMA RMC	0.702	0.888
		5.6GHz WLAN	0.186	
LTE + 5.6GHz WLAN	Head	LTE	0.300	0.672
		5.6GHz WLAN	0.372	
	Body	LTE	1.040	1.226
		5.6GHz WLAN	0.186	
GSM + 5.8GHz WLAN	Head	GSM Voice	0.182	0.395
		5.8GHz WLAN	0.213	
	Body	GSM DATA	0.343	0.449
		5.8GHz WLAN	0.106	
WCDMA RMC+ 5.8GHz WLAN	Head	WCDMA RMC	0.852	1.065
		5.8GHz WLAN	0.213	
	Body	WCDMA RMC	0.702	0.808
		5.8GHz WLAN	0.106	
LTE + 5.8GHz WLAN	Head	LTE	0.300	0.513
		5.8GHz WLAN	0.213	
	Body	LTE	1.040	1.146
		5.8GHz WLAN	0.106	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2017.08.15	2020.08.14
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2017.08.15	2020.08.14
1800MHz Dipole	MVG	SID1800	SN 30/14 DIP1G800-329	2017.08.15	2020.08.14
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2017.08.15	2020.08.14
2450MHz Dipole	MVG	SID2450	SN 30/14 DIP2G450-335	2017.08.15	2020.08.14
2600MHz Dipole	MVG	SID2600	SN 30/14 DIP2G600-336	2017.08.15	2020.08.14
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2017.08.15	2020.08.14
E-Field Probe	MVG	SSE2	SN 45/15 EPOG281	2019.03.25	2020.03.24
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2018.12.01	2019.11.30
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2019.03.02	2020.03.01
Multi Meter	Keithley	Multi Meter 2000	4050073	2018.10.13	2019.10.12
Signal Generator	Agilent	N5182A	MY50140530	2018.10.16	2019.10.15
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2018.10.16	2019.10.15
Wireless Communication Test Set	R&S	CMW500	117239	2018.10.13	2019.10.12
Power Amplifier	DESAY	ZHL-42W	9638	2018.10.13	2019.10.12
Power Meter	R&S	NRP	100510	2018.10.26	2019.10.25
Power Meter	Agilent	E4418B	GB43312526	2018.10.26	2019.10.25
Power Sensor	R&S	NRP-Z11	101919	2018.10.13	2019.10.12
Power Sensor	Agilent	E9301A	MY41497725	2018.10.13	2019.10.12
hygrothermograph	MiEO	HH660	N/A	2018.10.11	2019.10.10
Thermograph	Elitech	RC-4	S/N EF7176501537	2018.10.15	2019.10.14

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
 2. System validation with specific dipole is within 10% of calibrated value
- Return-loss in within 20% of calibrated measurement

Appendix A. System Validation Plots

System Performance Check Data (750MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-26

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	42.41
Conductivity (S/m)	0.86
Power drift (%)	-1.31
Probe	SN 45/15 EPGO281
ConvF:	1.53
Crest factor:	1:1

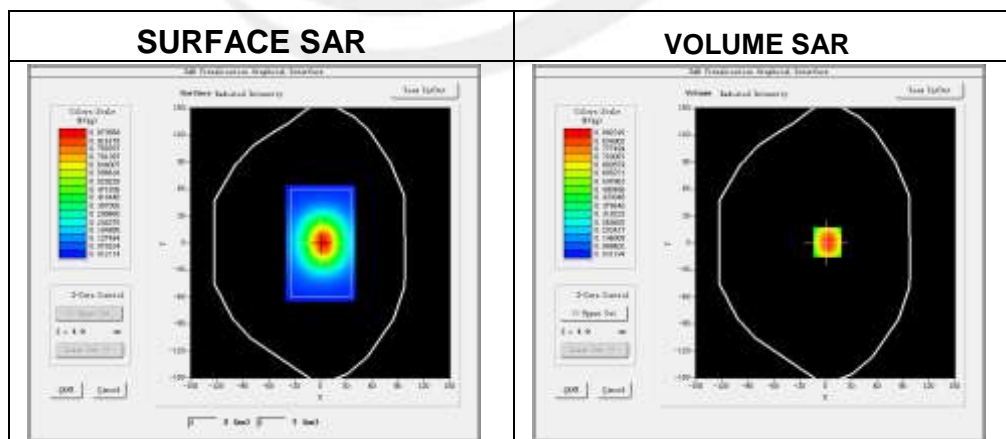

Maximum location: X=2.00, Y=1.00

SAR 10g (W/Kg)	0.547867
SAR 1g (W/Kg)	0.870533

Z Axis Scan

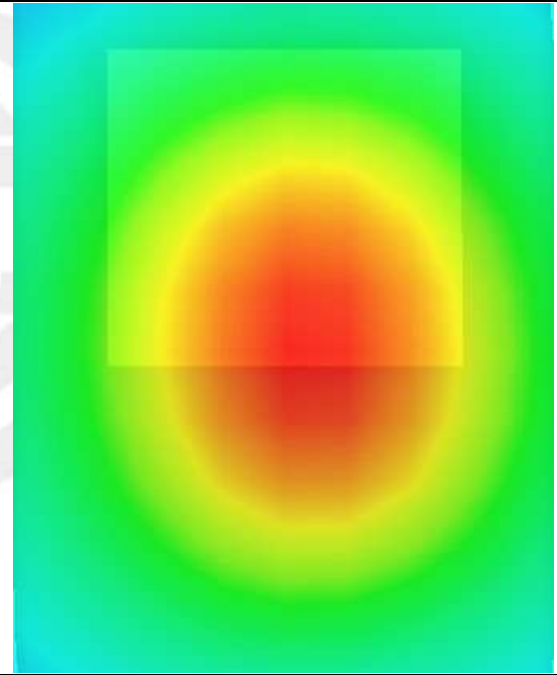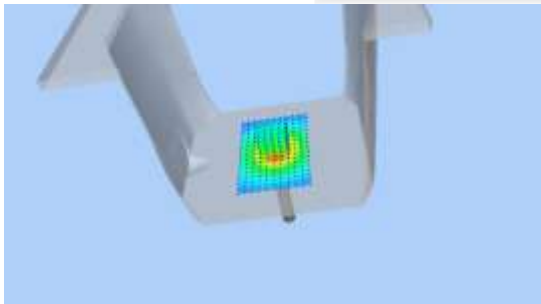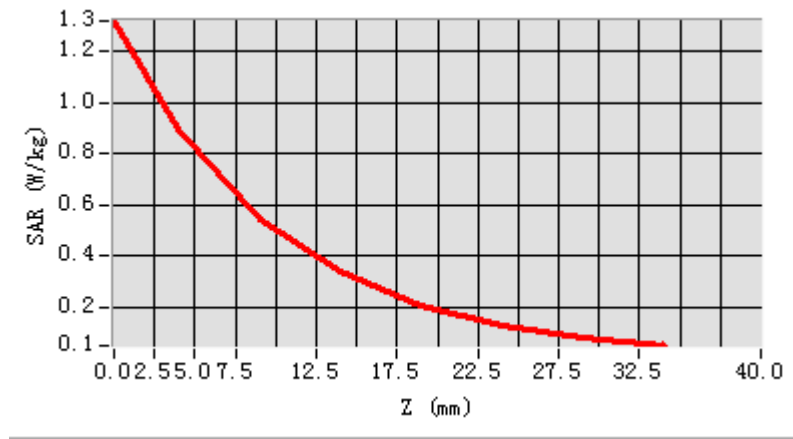


System Performance Check Data (750MHz Body)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2019-08-26

Experimental conditions.




Probe	
Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	55.43
Conductivity (S/m)	0.97
Power drift (%)	1.41
Probe	SN 45/15 EPGO281
ConvF:	1.59
Crest factor:	1:1

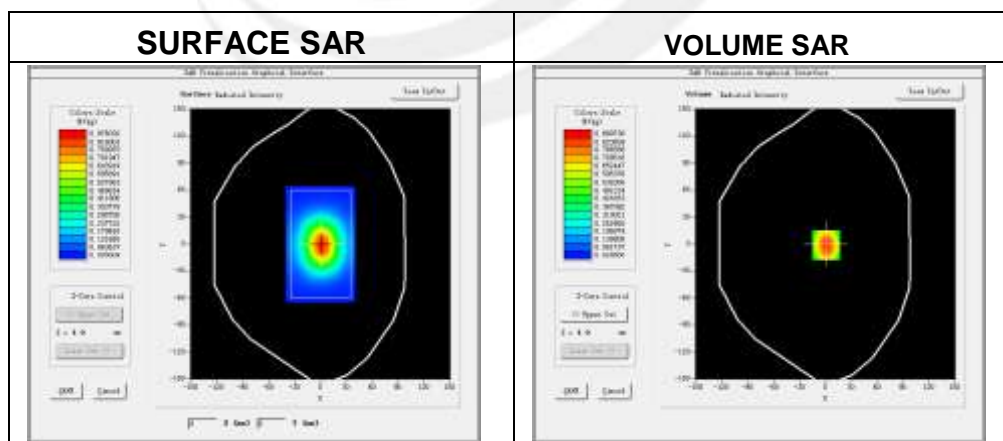

Maximum location: X=1.00, Y=-1.00

SAR 10g (W/Kg)	0.566149
SAR 1g (W/Kg)	0.842273

Z Axis Scan

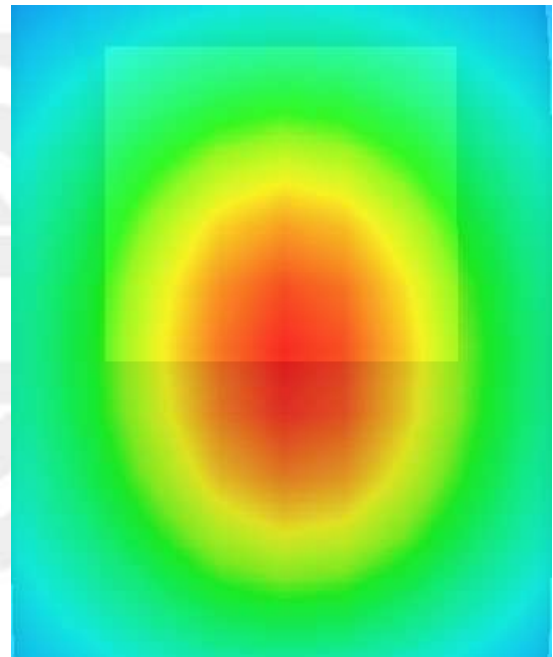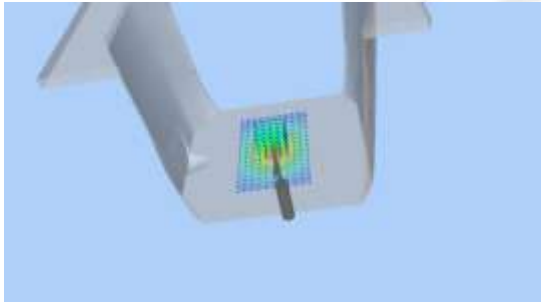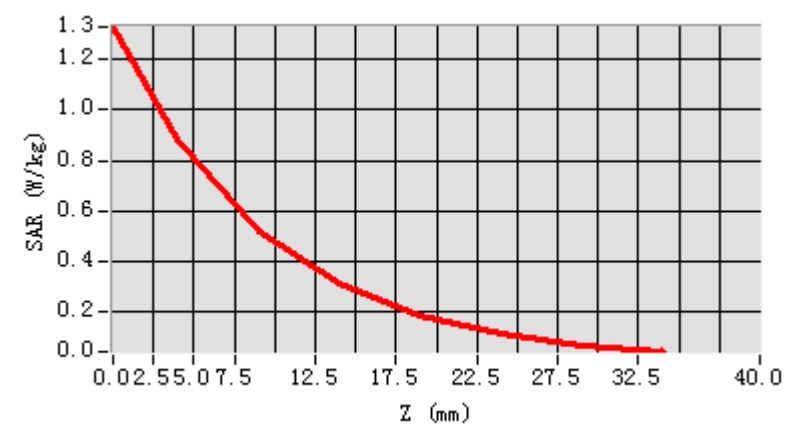

System Performance Check Data (835MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-27

Experimental conditions


Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	42.08
Conductivity (S/m)	0.87
Power drift (%)	1.54
Probe	SN 45/15 EPGO281
ConvF:	1.78
Crest factor:	1:1

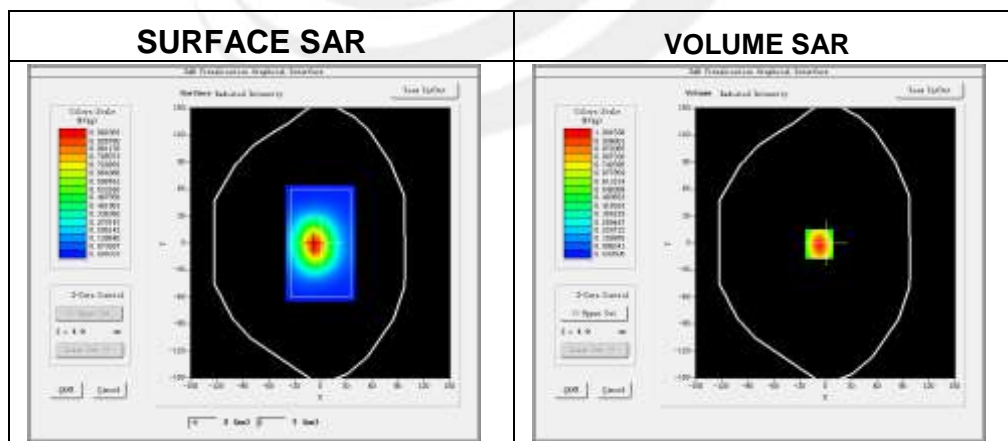

Maximum location: X=-7.00, Y=-1.00

SAR 10g (W/Kg)	0.622990
SAR 1g (W/Kg)	0.987352

Z Axis Scan

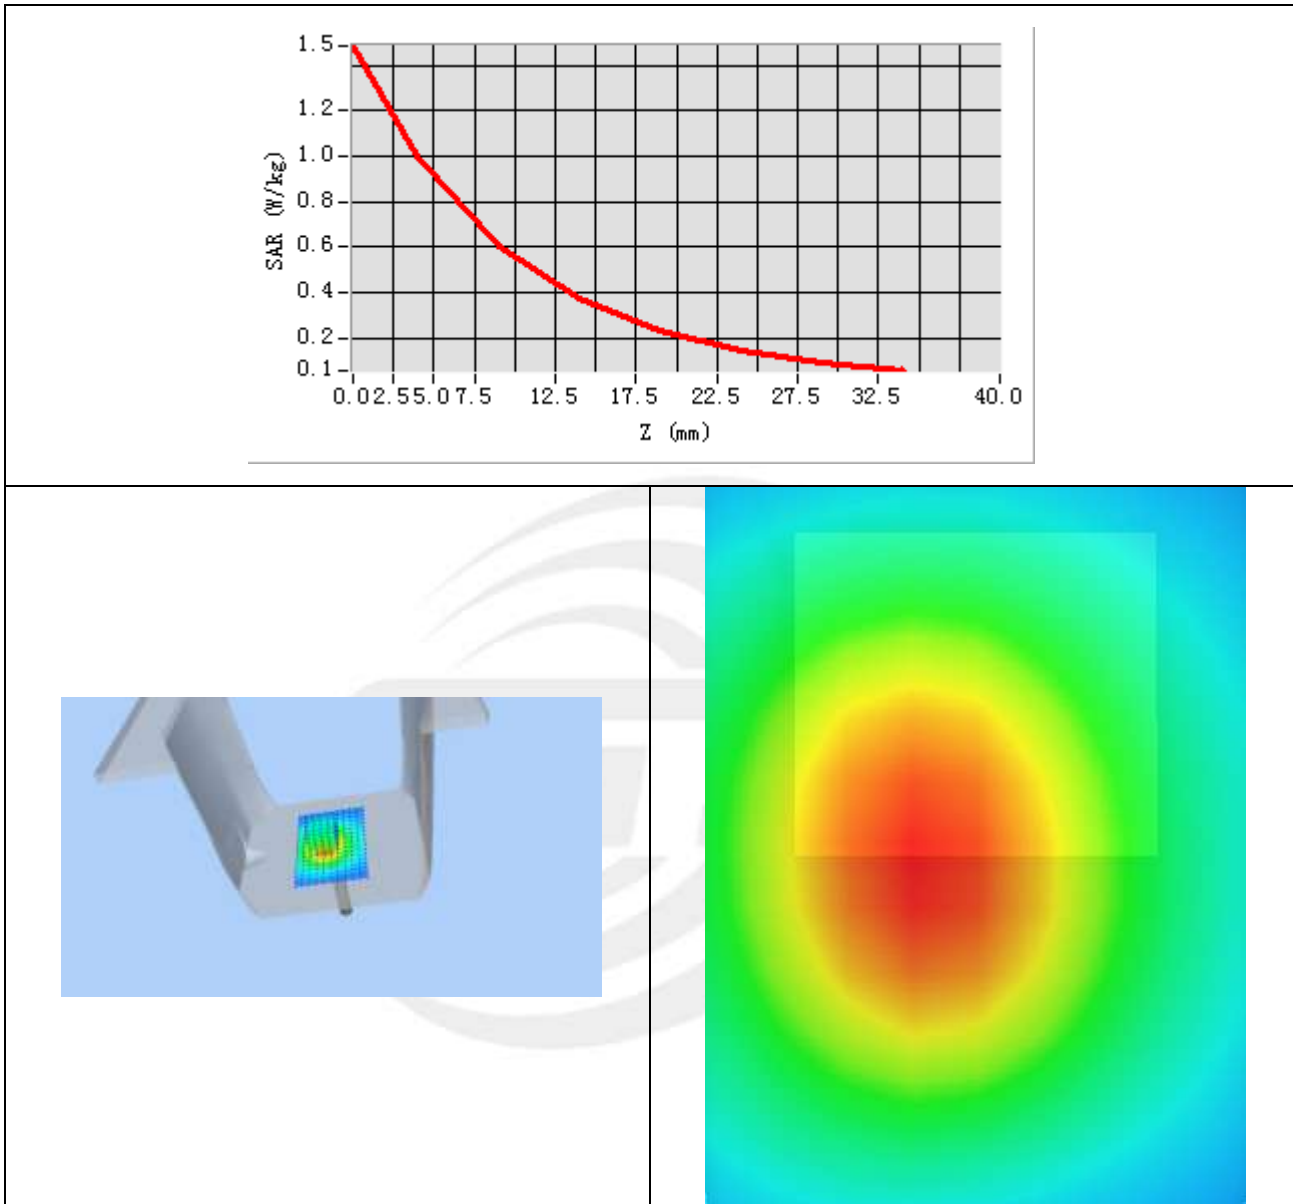

System Performance Check Data (835MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-27

Experimental conditions.




Probe	
Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	54.58
Conductivity (S/m)	0.96
Power drift (%)	-2.43
Probe	SN 45/15 EPGO281
ConvF:	1.85
Crest factor:	1:1

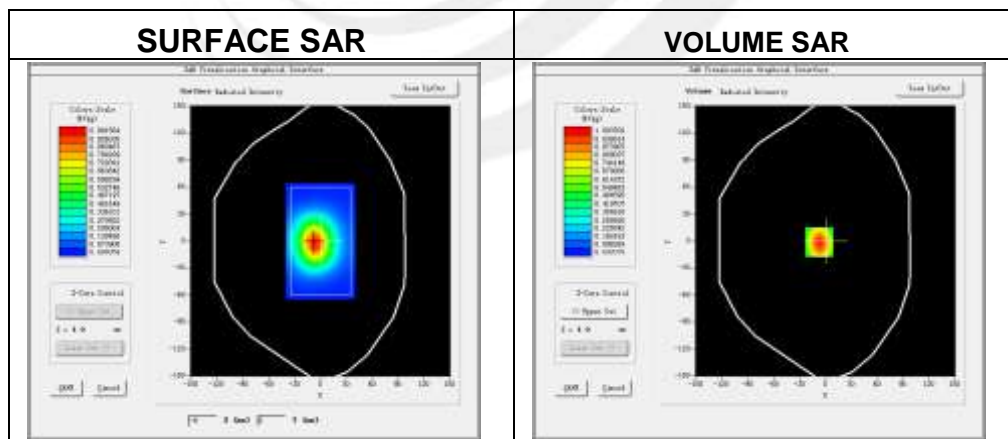

Maximum location: X=-7.00, Y=-1.00

SAR 10g (W/Kg)	0.633470
SAR 1g (W/Kg)	1.027786

Z Axis Scan

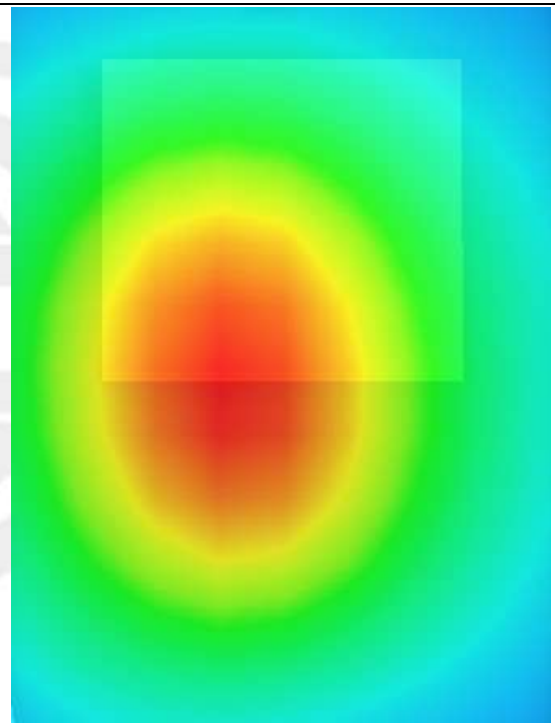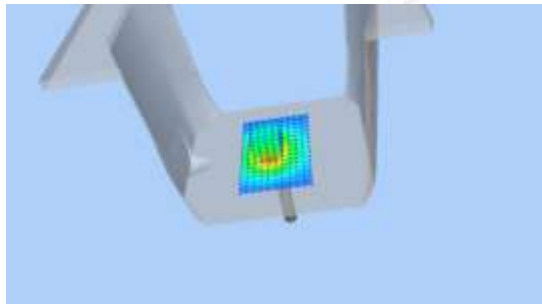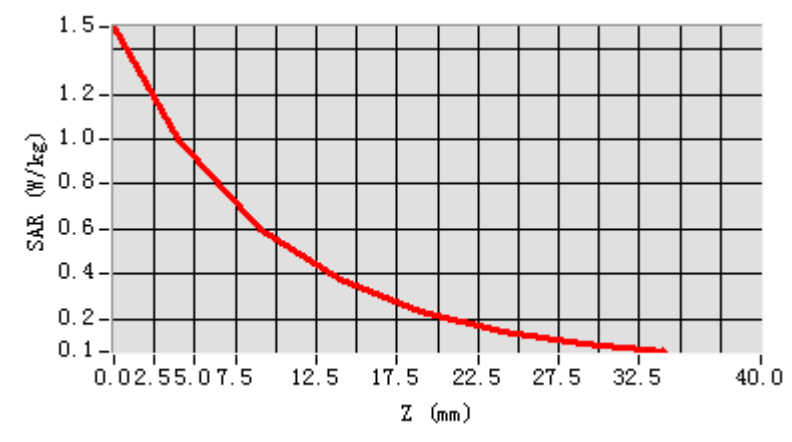

System Performance Check Data(1800MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-28

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	40.34
Conductivity (S/m)	1.42
Power drift (%)	0.75
Probe	SN 45/15 EPGO281
ConvF	1.83
Crest factor:	1:1

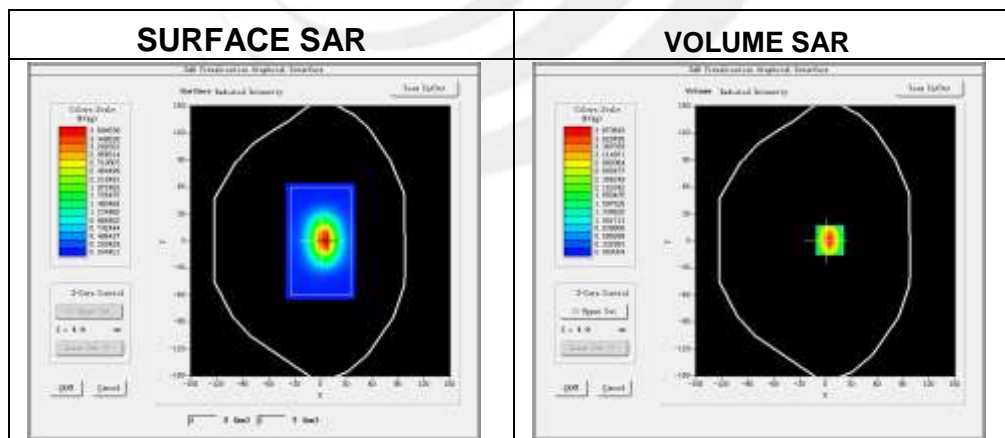

Maximum location: X=5.00, Y=1.00

SAR 10g (W/Kg)	1.949230
SAR 1g (W/Kg)	3.854342

Z Axis Scan

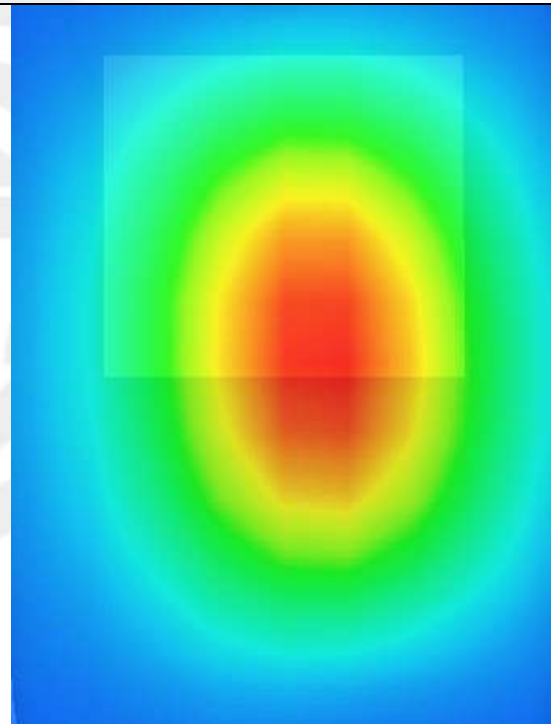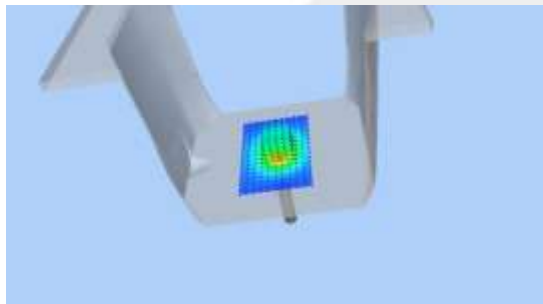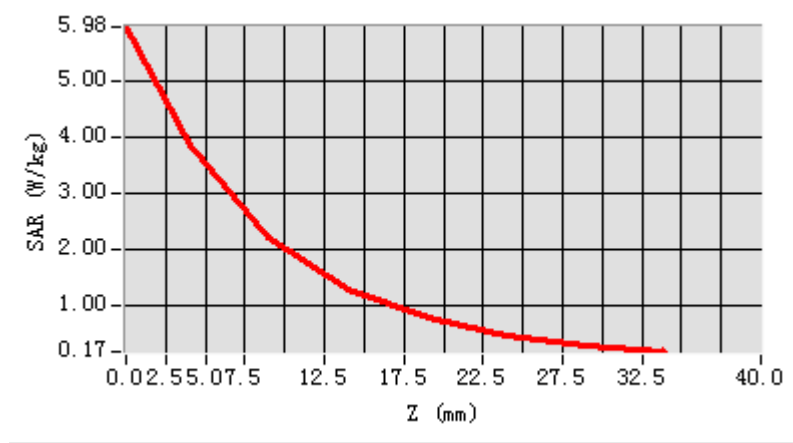

System Performance Check Data(1800MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-28

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	54.00
Conductivity (S/m)	1.54
Power drift (%)	-2.38
Probe	SN 45/15 EPGO281
ConvF	1.87
Crest factor:	1:1

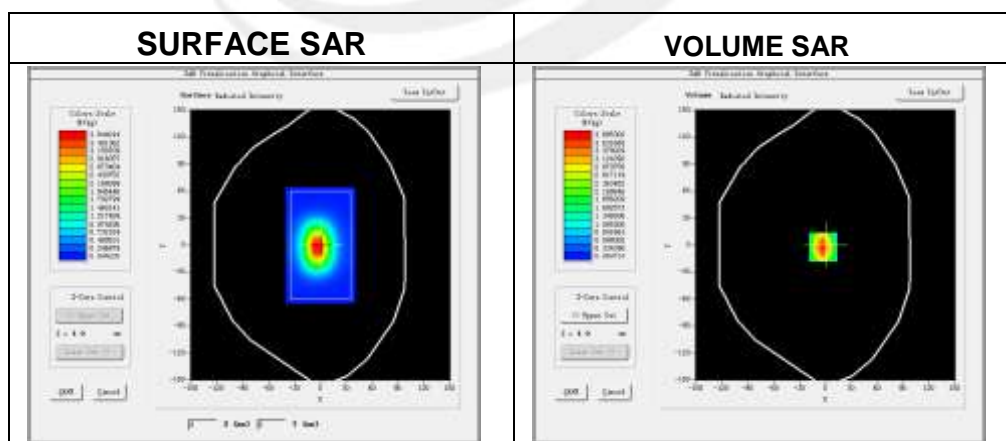

Maximum location: X=-3.00, Y=-2.00

SAR 10g (W/Kg)	1.938374
SAR 1g (W/Kg)	3.830865

Z Axis Scan

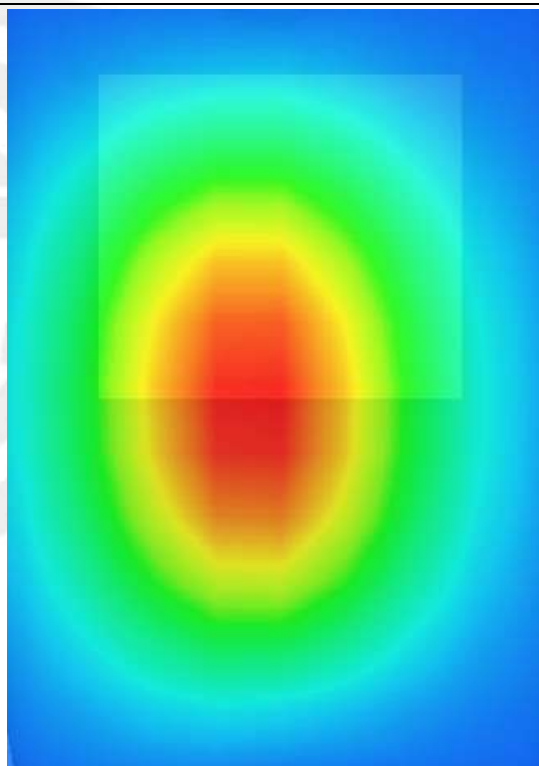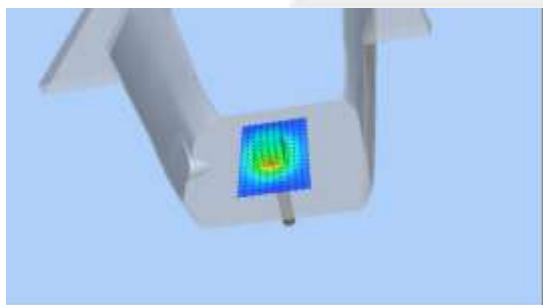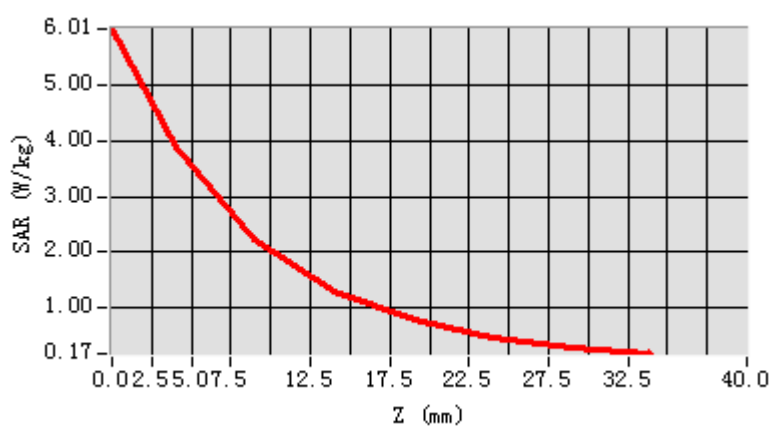

System Performance Check Data (1900MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-29

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	39.49
Conductivity (S/m)	1.37
Power drift (%)	1.59
Probe	SN 45/15 EPGO281
ConvF:	2.10
Crest factor:	1:1

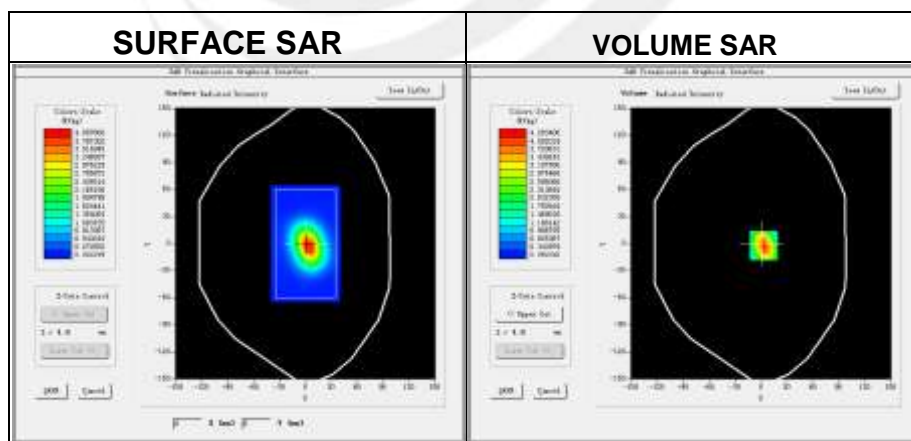

Maximum location: X=3.00, Y=-2.00

SAR 10g (W/Kg)	1.950689
SAR 1g (W/Kg)	3.863131

Z Axis Scan

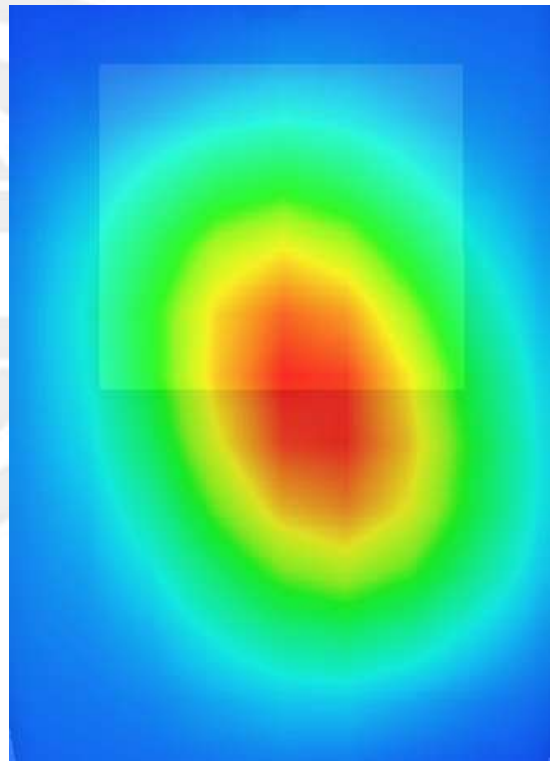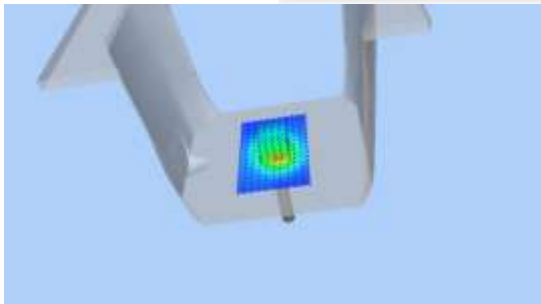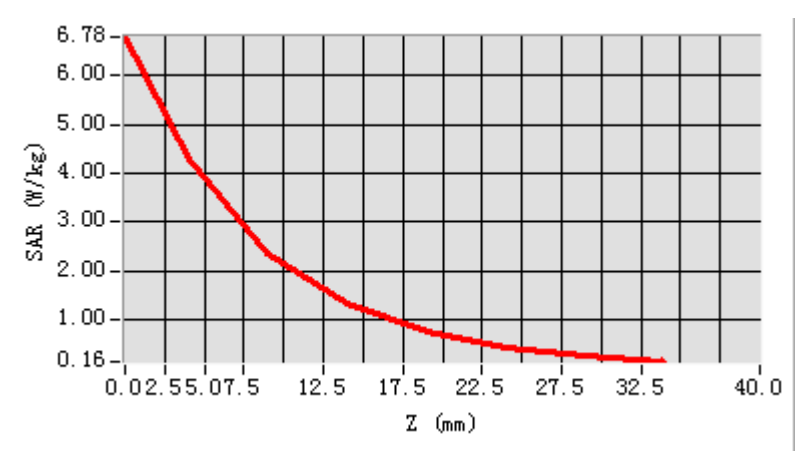

System Performance Check Data (1900MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-29

Experimental conditions.

Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900
Relative permittivity	51.93
Conductivity (S/m)	1.51
Power drift (%)	-0.36
Probe	SN 45/15 EPGO281
ConvF:	2.16
Crest factor:	1:1



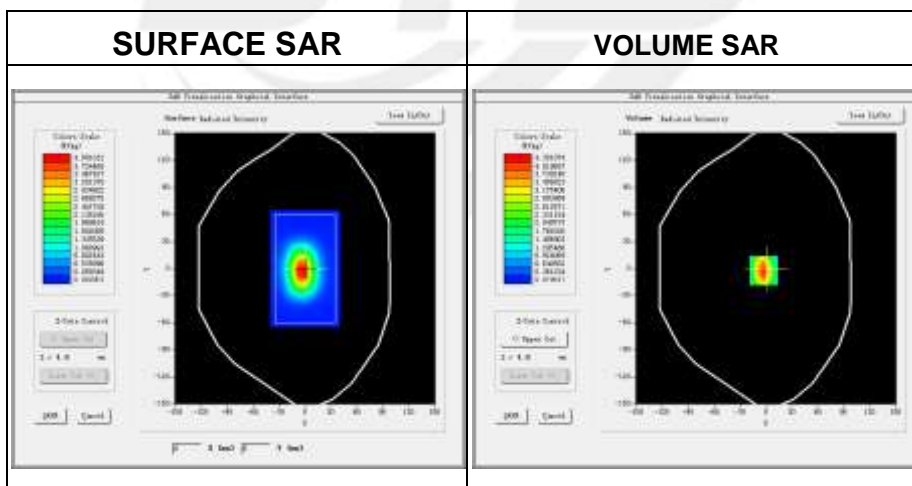


Maximum location: X=-3.00, Y=-2.00

SAR Peak: 5.27 W/kg

SAR 10g (W/Kg)	1.989284
SAR 1g (W/Kg)	3.927162

Z Axis Scan

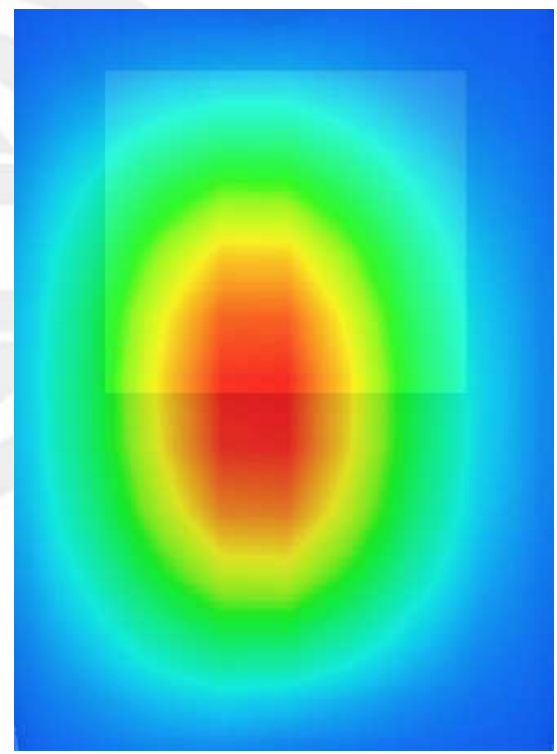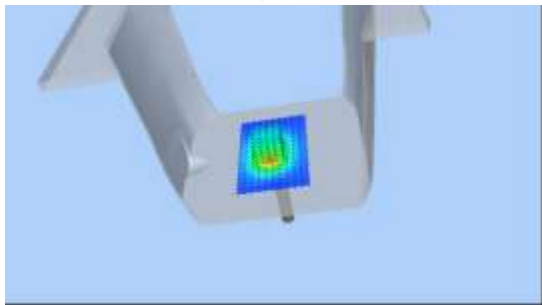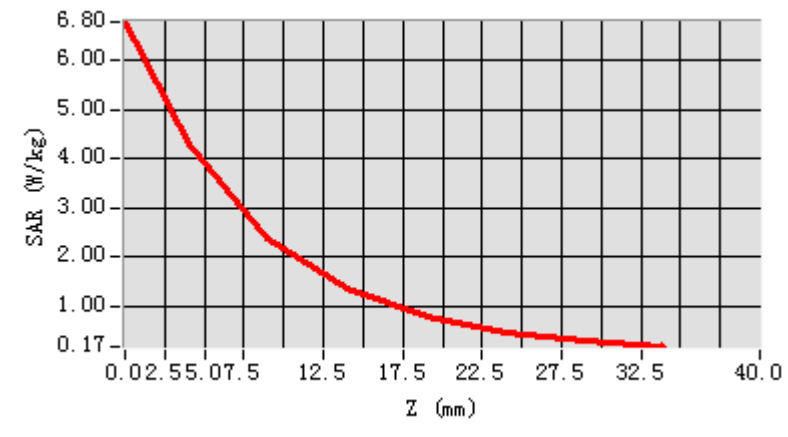

System Performance Check Data (2450MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-30

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	40.71
Conductivity (S/m)	1.77
Power drift (%)	-2.42
Probe	SN 45/15 EPGO281
ConvF	2.21
Crest factor:	1:1

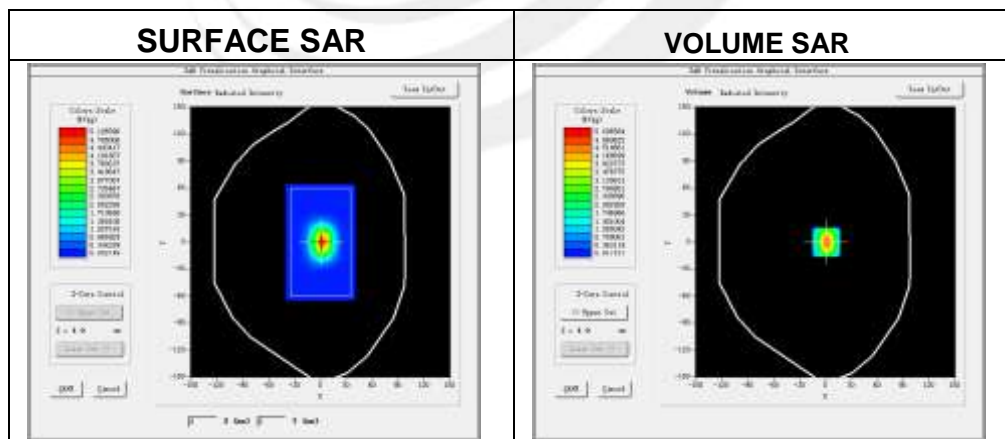

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.470802
SAR 1g (W/Kg)	5.278826

Z Axis Scan

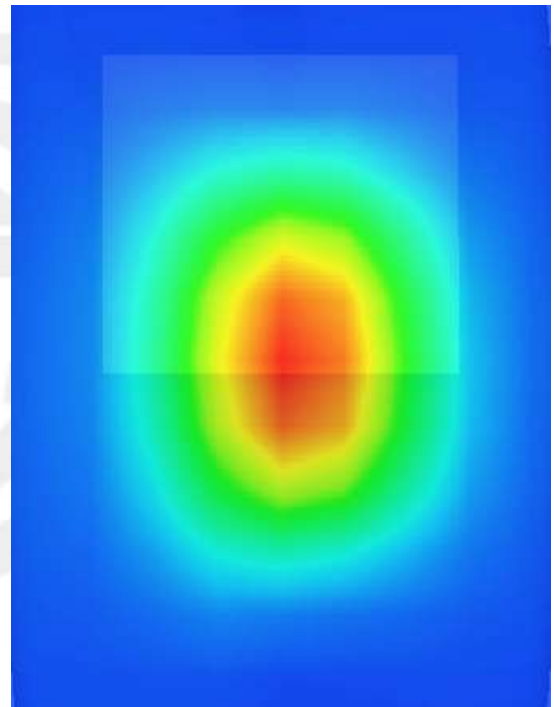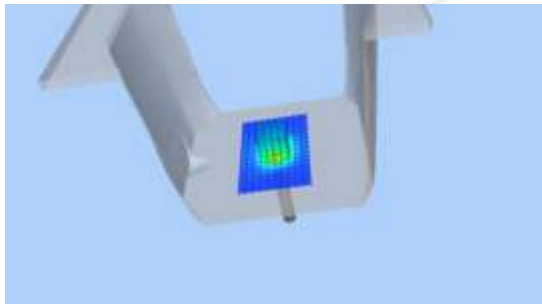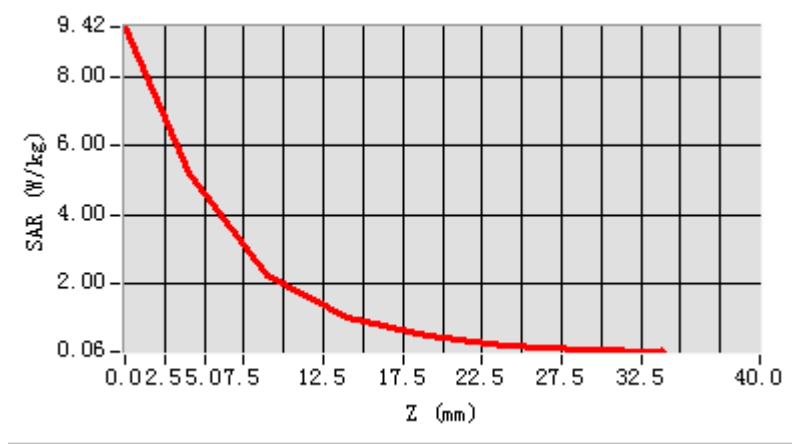

System Performance Check Data (2450MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-08-30

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	52.67
Conductivity (S/m)	1.99
Power drift (%)	-3.26
Probe	SN 45/15 EPGO281
ConvF	2.28
Crest factor:	1:1

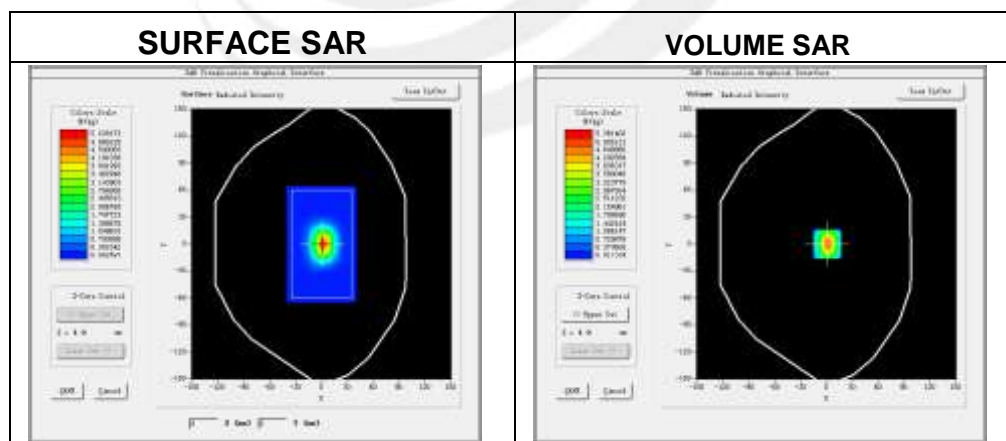

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.211034
SAR 1g (W/Kg)	5.122535

Z Axis Scan

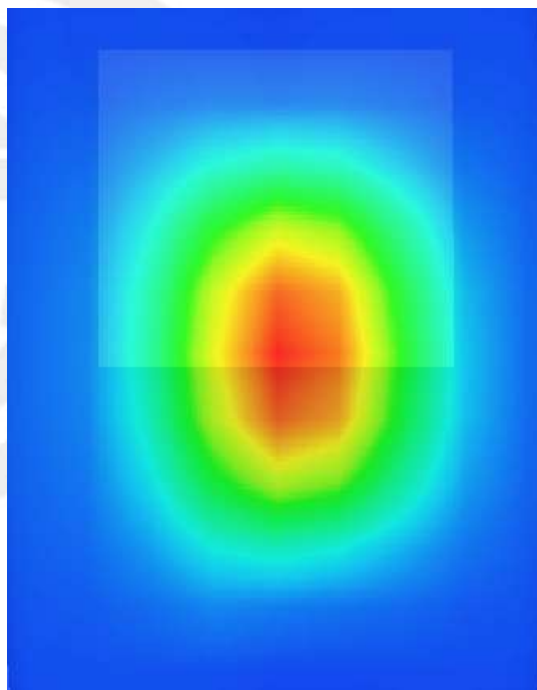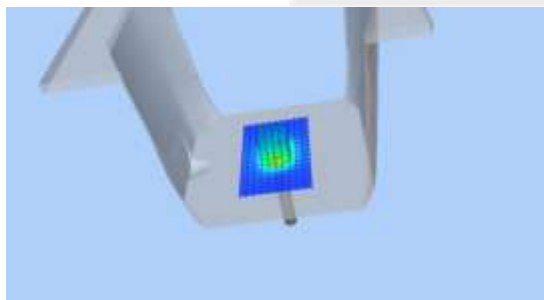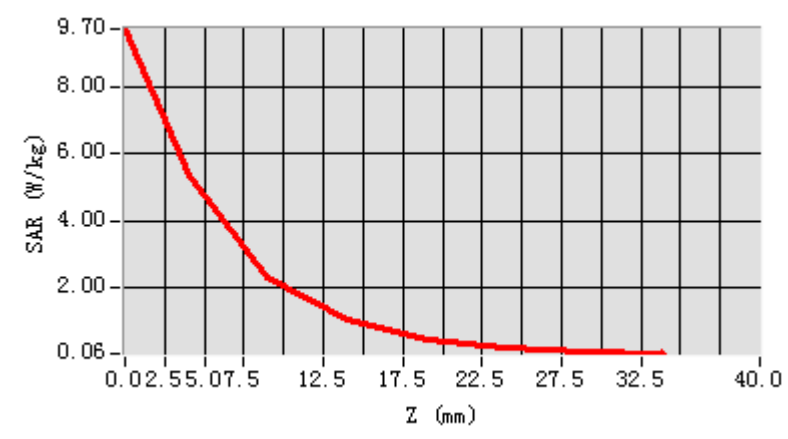

System Performance Check Data(2600MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-09-02

Experimental conditions.


Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity	38.35
Conductivity (S/m)	2.00
Power drift (%)	0.67
Probe	SN 45/15 EPGO281
ConvF	2.32
Crest factor:	1:1

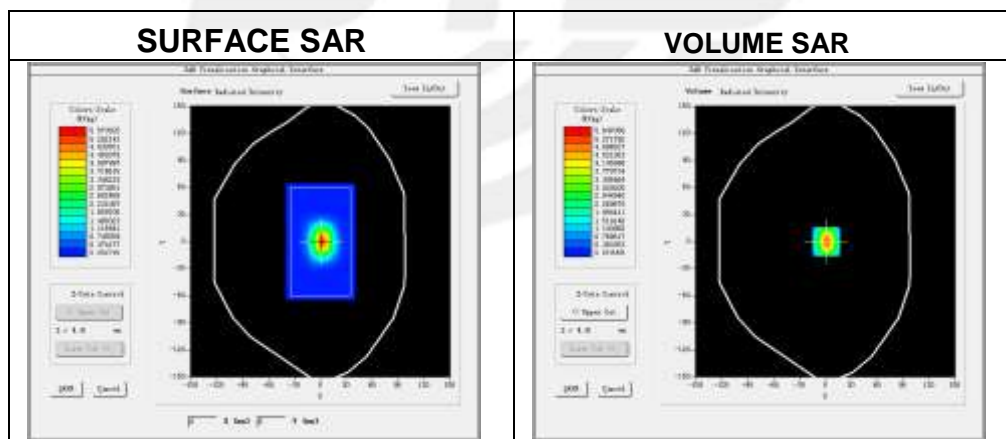

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.554282
SAR 1g (W/Kg)	5.403644

Z Axis Scan

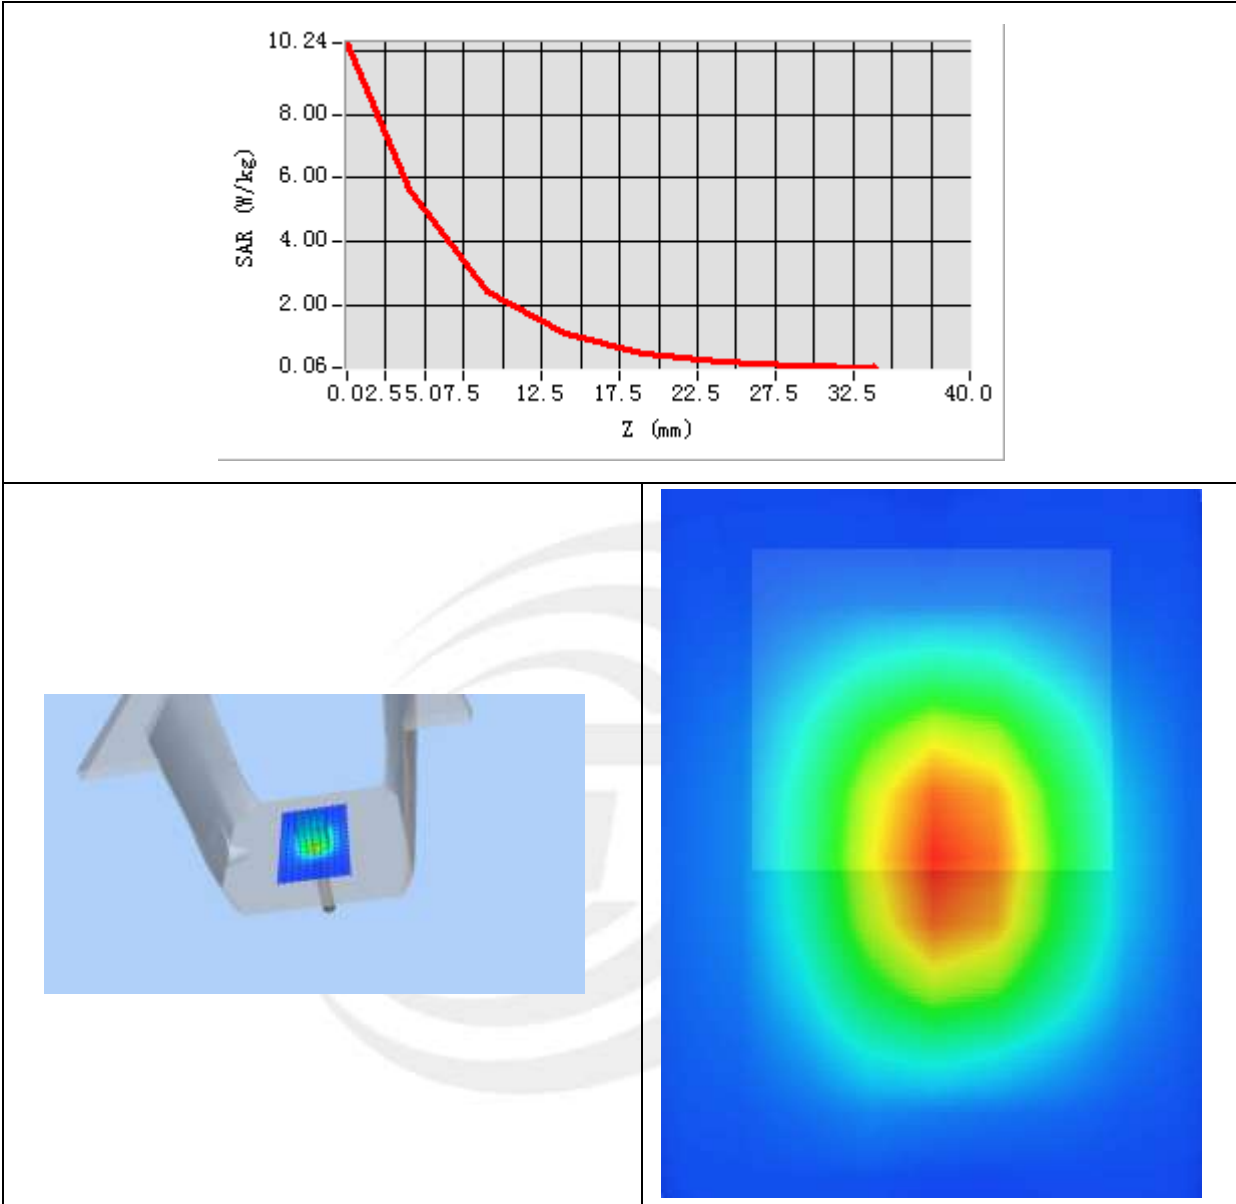

System Performance Check Data(2600MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2019-09-02

Experimental conditions.


Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity	53.77
Conductivity (S/m)	2.23
Power drift (%)	-1.69
Probe	SN 45/15 EPGO281
ConvF	2.38
Crest factor:	1:1

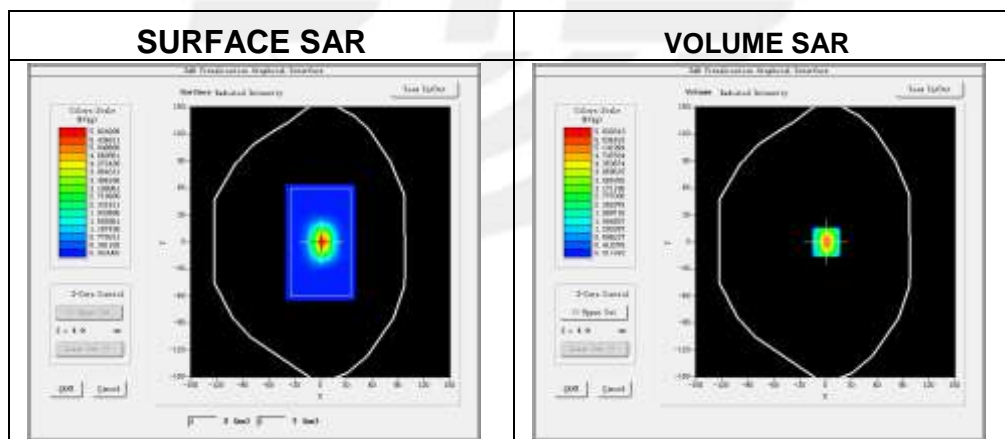

Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.564602
SAR 1g (W/Kg)	5.740163

Z Axis Scan

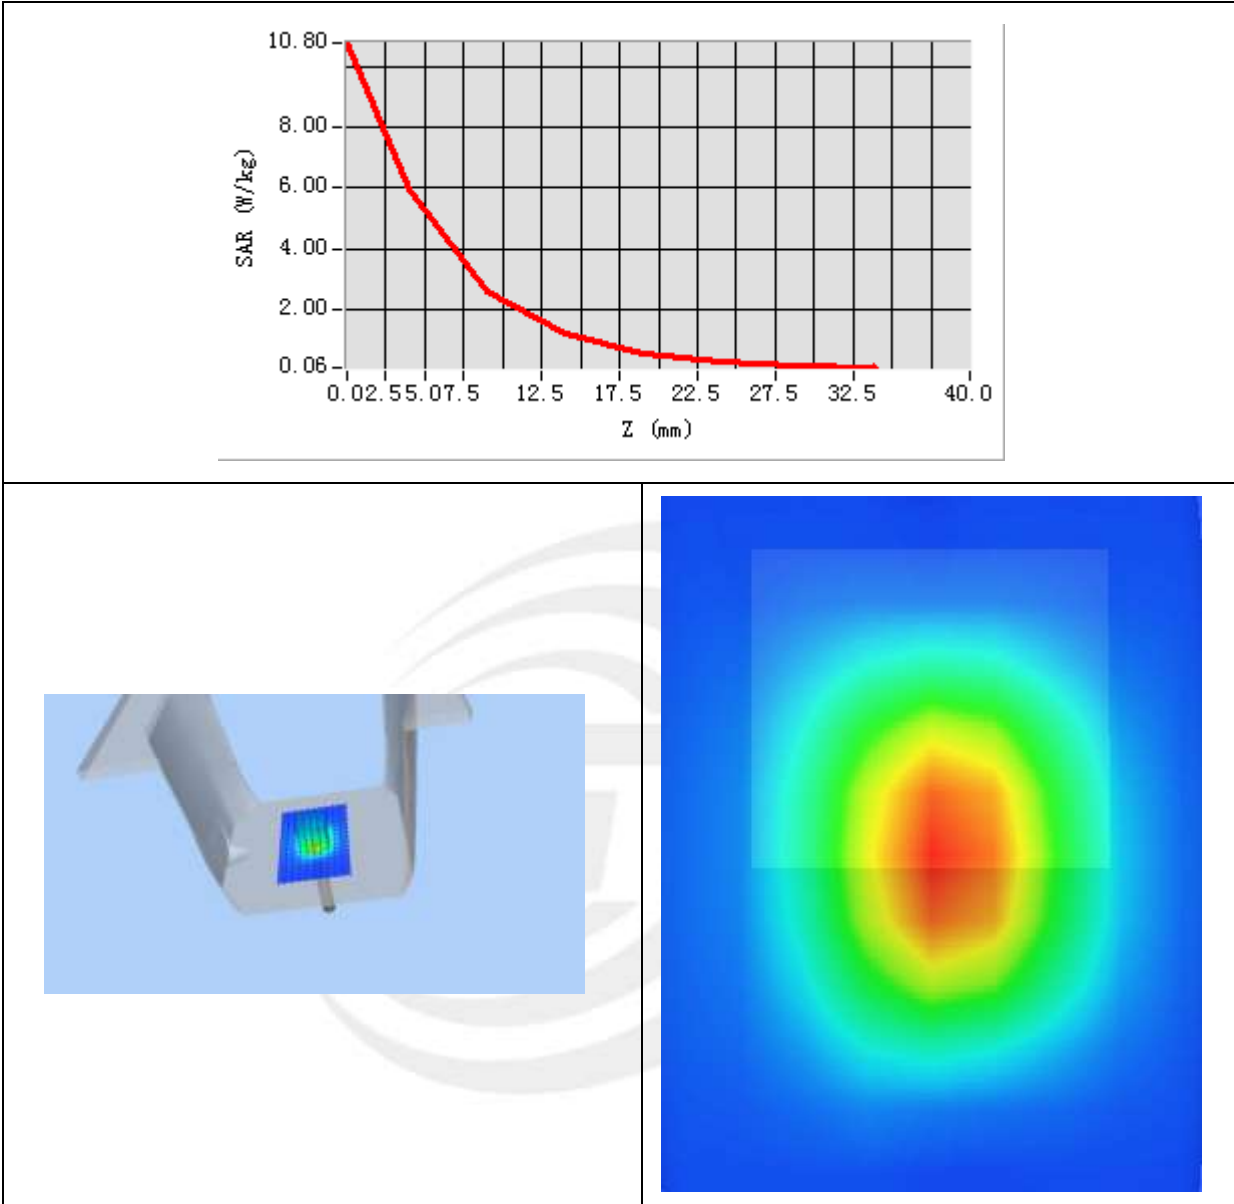

System Performance Check Data(5200MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2019-09-03

Experimental conditions.


Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	36.43
Conductivity (S/m)	4.71
Power drift (%)	2.26
Probe	SN 45/15 EPGO281
ConvF	2.46
Crest factor:	1:1

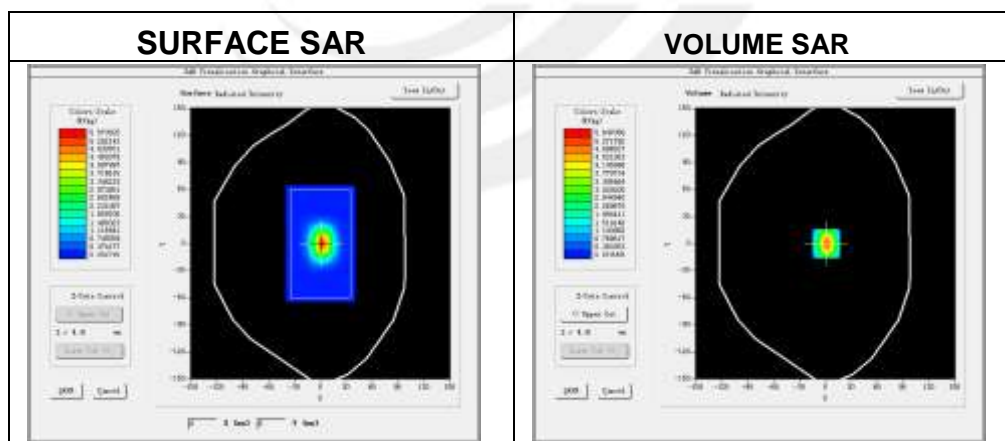

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.836117
SAR 1g (W/Kg)	15.897365

Z Axis Scan

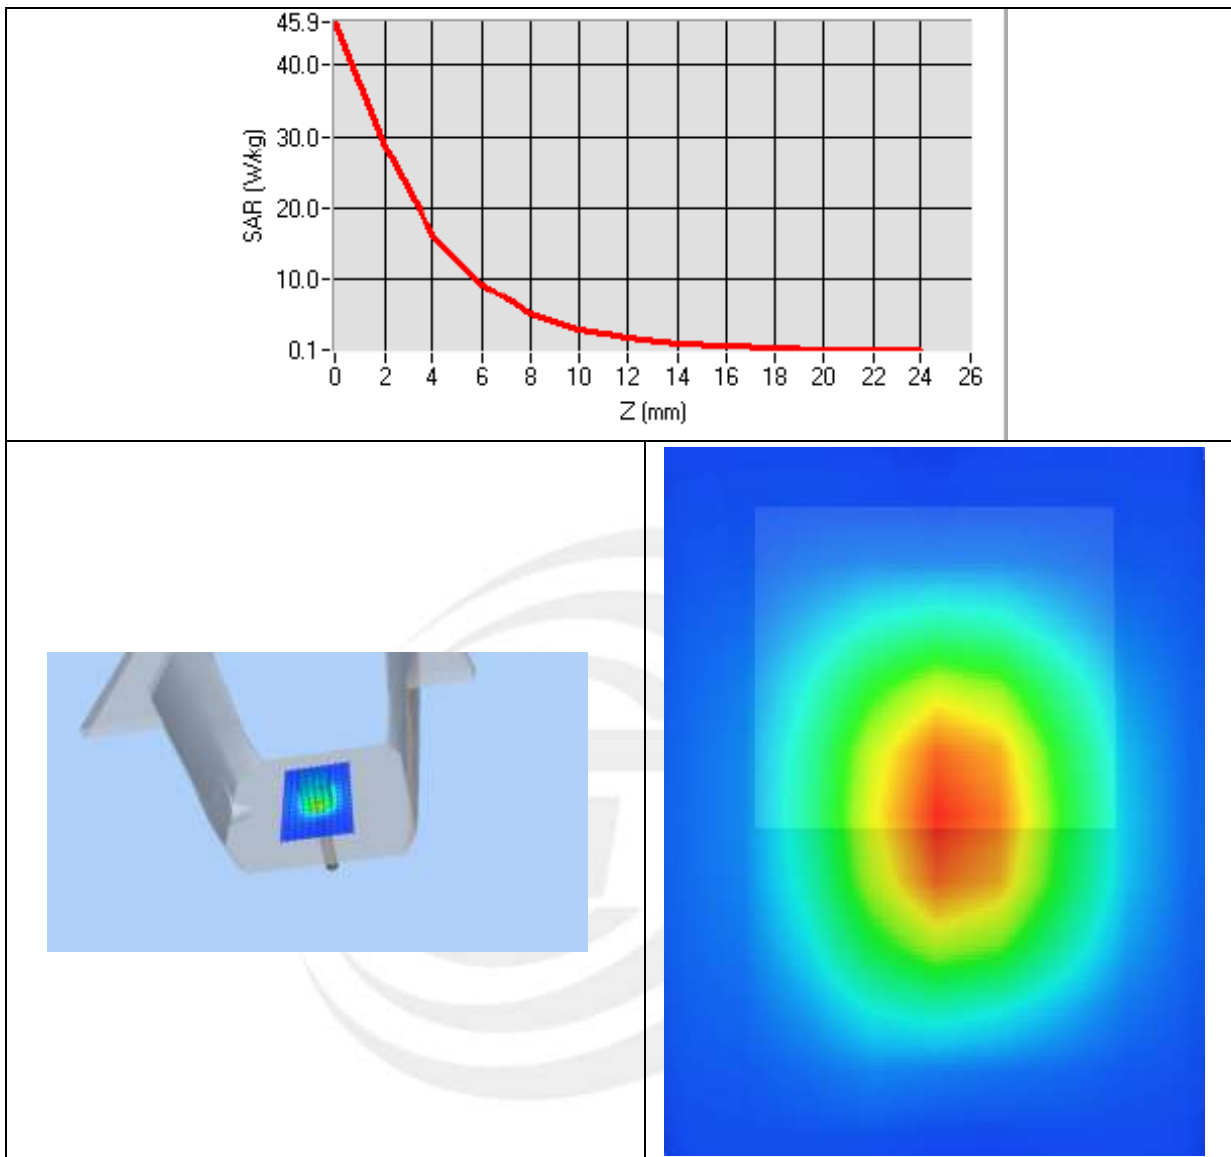

System Performance Check Data(5200MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2019-09-03

Experimental conditions.


Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	49.86
Conductivity (S/m)	5.37
Power drift (%)	3.54
Probe	SN 45/15 EPGO281
ConvF	2.52
Crest factor:	1:1

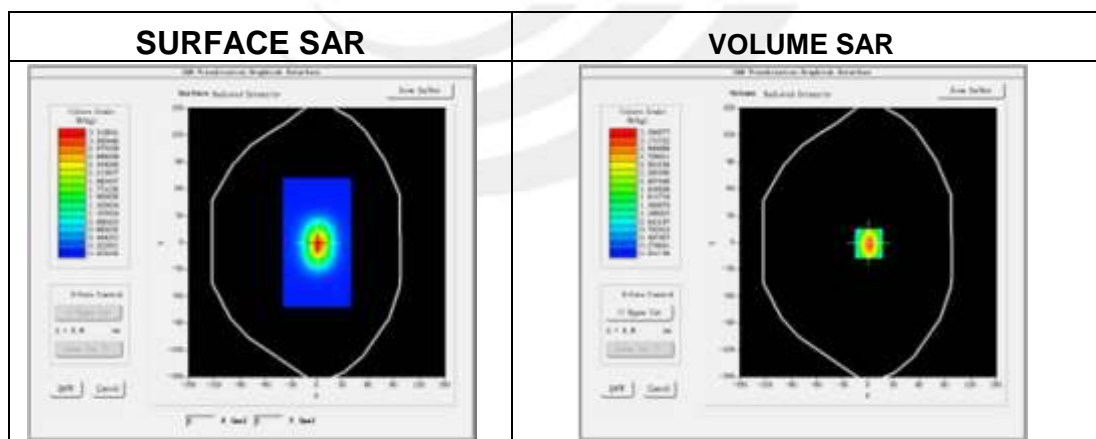

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.910743
SAR 1g (W/Kg)	15.689122

Z Axis Scan

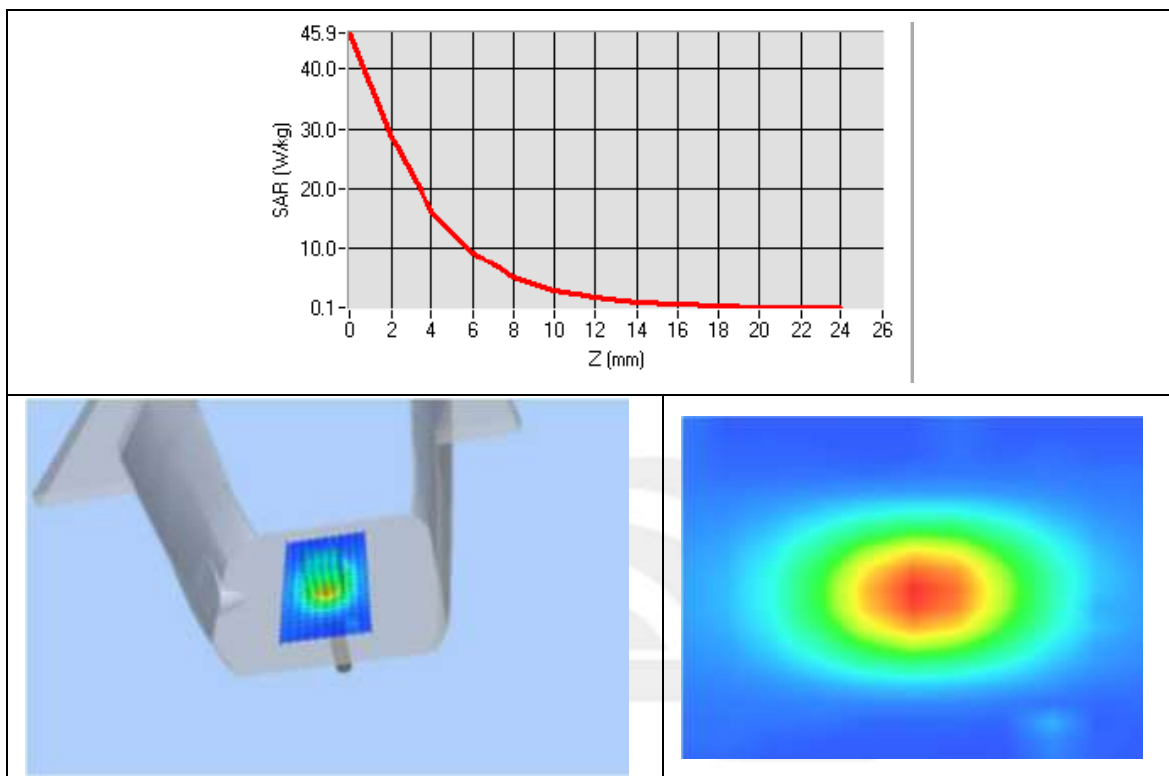

System Performance Check Data(5300MHz Head)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2019-09-03

Experimental conditions.


Device Position	Validation plane
Band	5300 MHz
Channels	-
Signal	CW
Frequency (MHz)	5300
Relative permittivity	36.11
Conductivity (S/m)	4.83
Power drift (%)	-1.75
Probe	SN 45/15 EPGO281
ConvF	2.70
Crest factor:	1:1

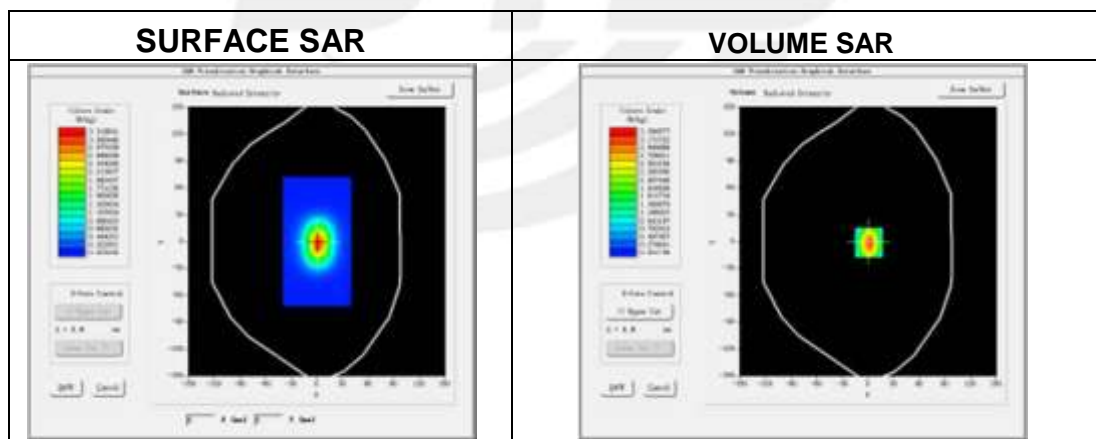

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.968411
SAR 1g (W/Kg)	16.504627

Z Axis Scan

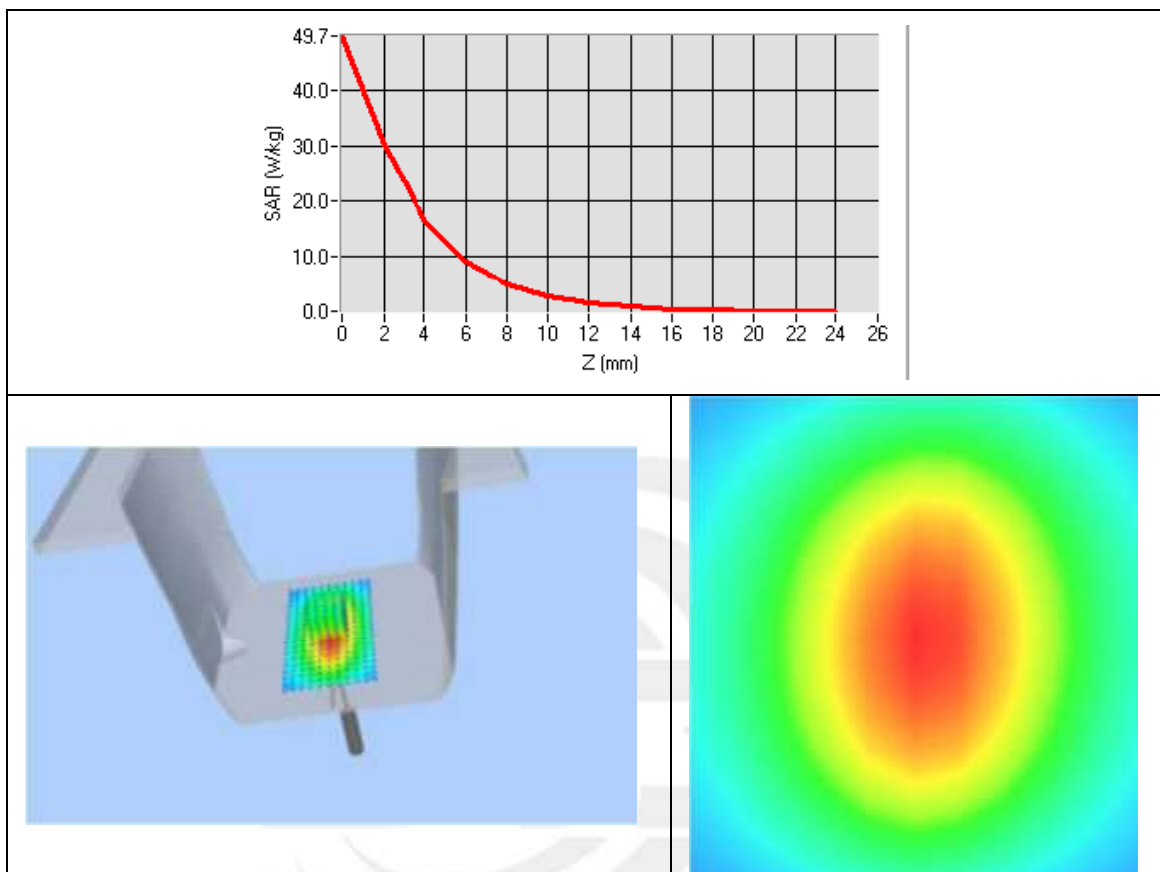

System Performance Check Data(5300MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2019-09-03

Experimental conditions.


Device Position	Validation plane
Band	5300 MHz
Channels	-
Signal	CW
Frequency (MHz)	5300
Relative permittivity	48.92
Conductivity (S/m)	5.51
Power drift (%)	-2.83
Probe	SN 45/15 EPGO281
ConvF	2.79
Crest factor:	1:1

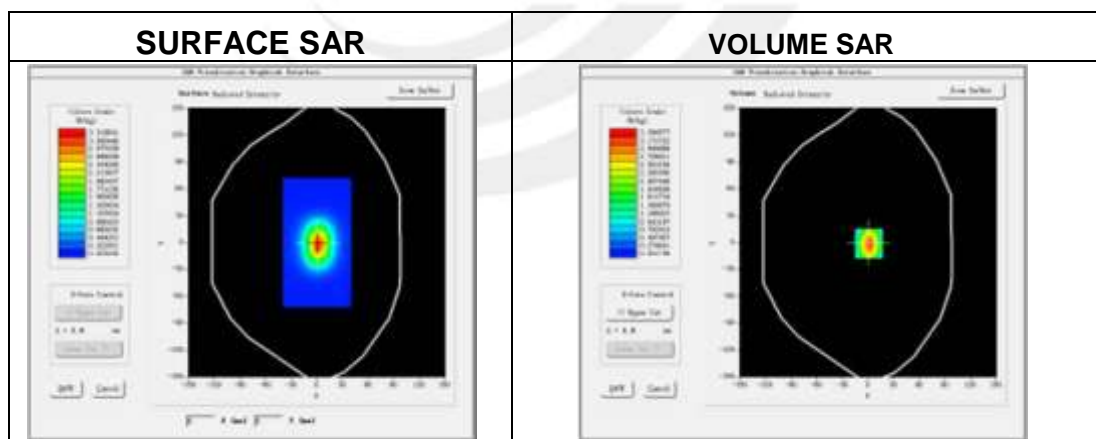

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.985221
SAR 1g (W/Kg)	16.758653

Z Axis Scan

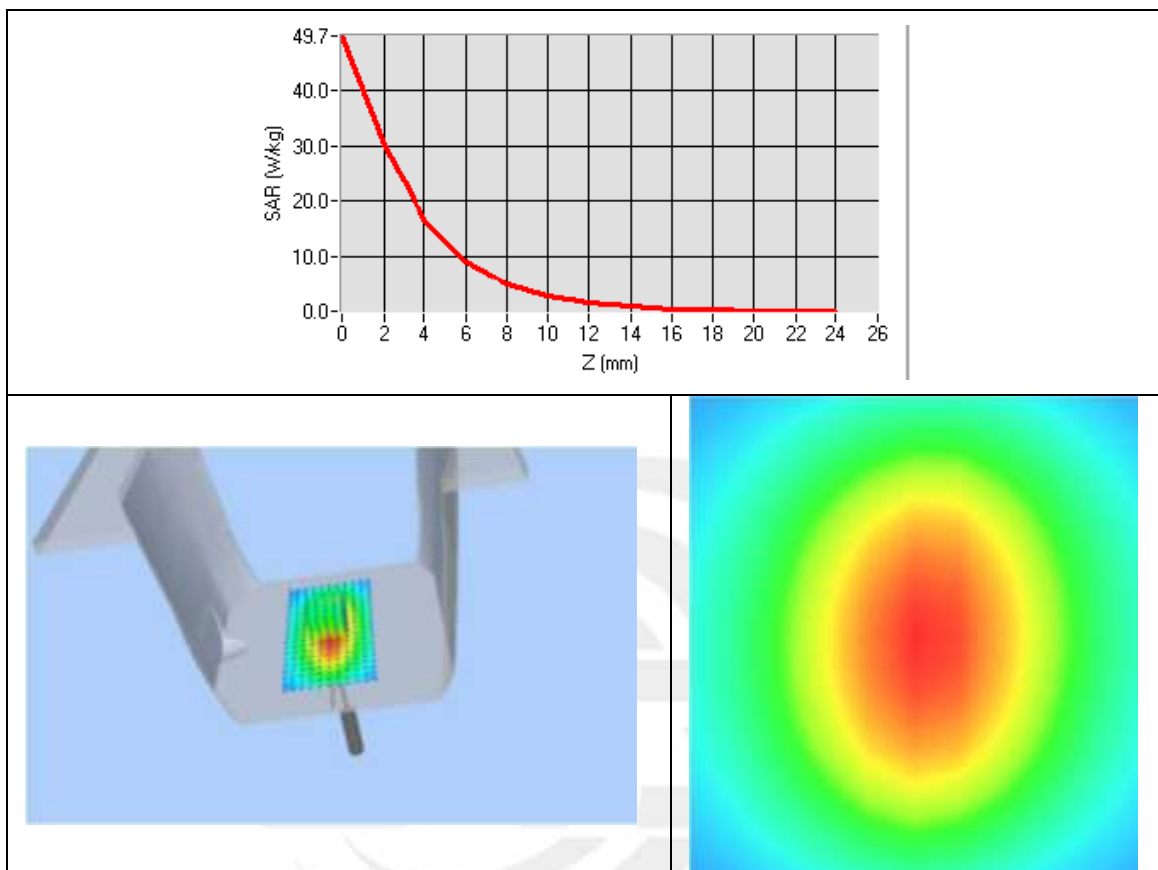

Appendix B. SAR Test Plots


Plot 1: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	41.50
Conductivity (S/m)	0.90
Variation (%)	-2.71

Maximum location: X=-55.00, Y=-55.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.045038
SAR 1g (W/Kg)	0.072088

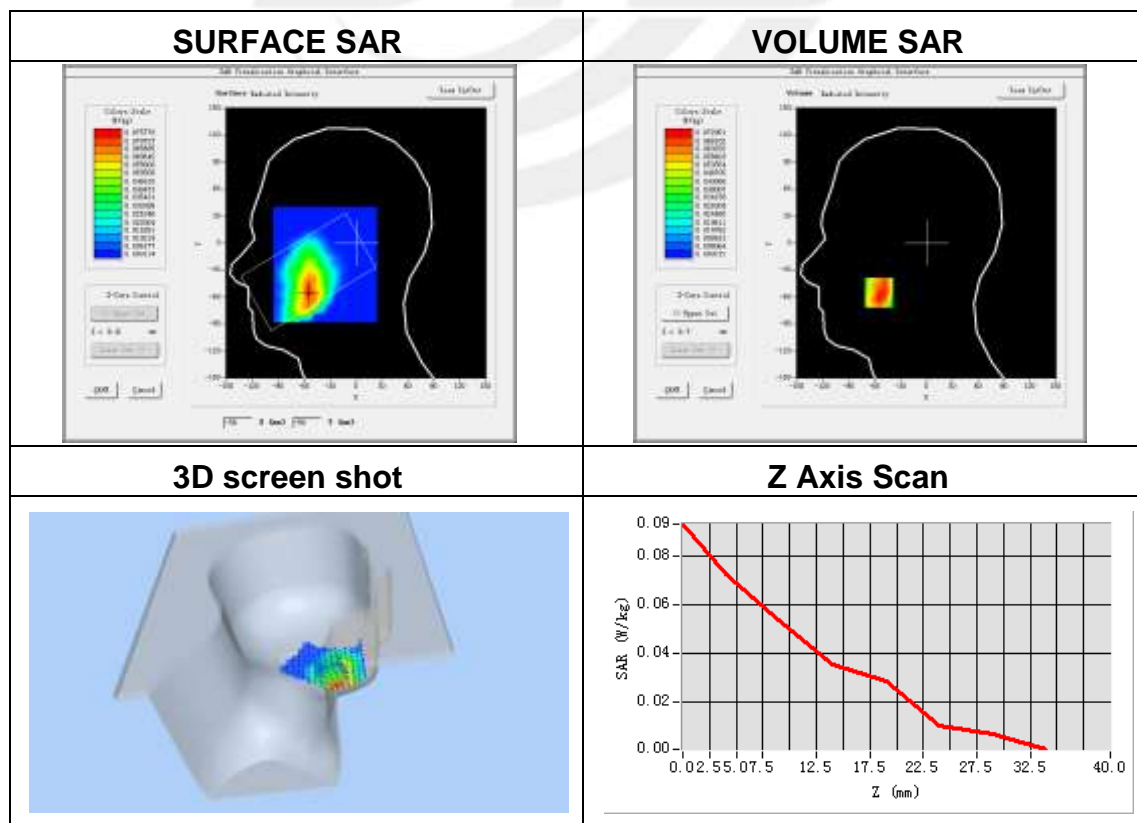


Plot 2: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom can	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back side
Band	GPRS 850
Channels	Low
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	-1.96

Maximum location: X=24.00, Y=-15.00

SAR Peak: 0.19 W/kg

SAR 10g (W/Kg)	0.013309
SAR 1g (W/Kg)	0.058722

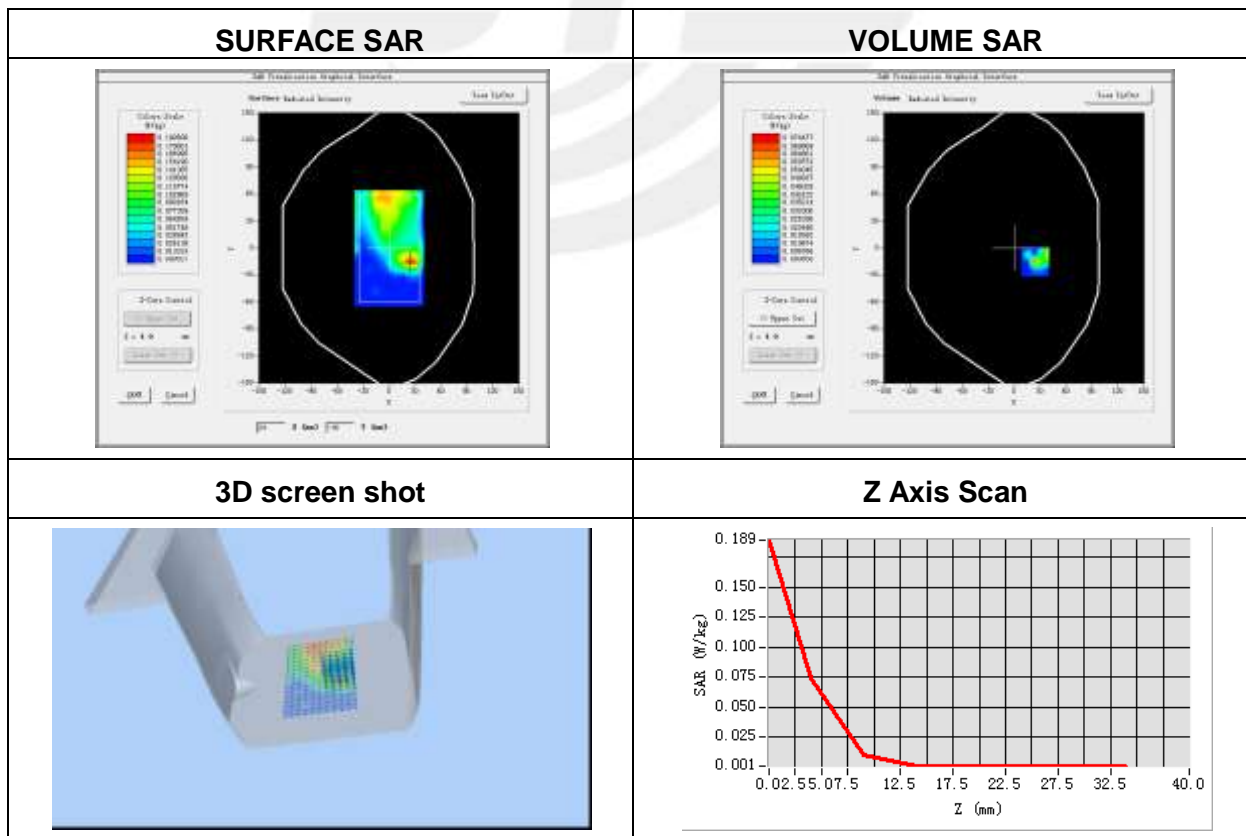


Plot 3: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1850.2
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-3.58

Maximum location: X=-50.00, Y=-64.00
SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.086848
SAR 1g (W/Kg)	0.158152

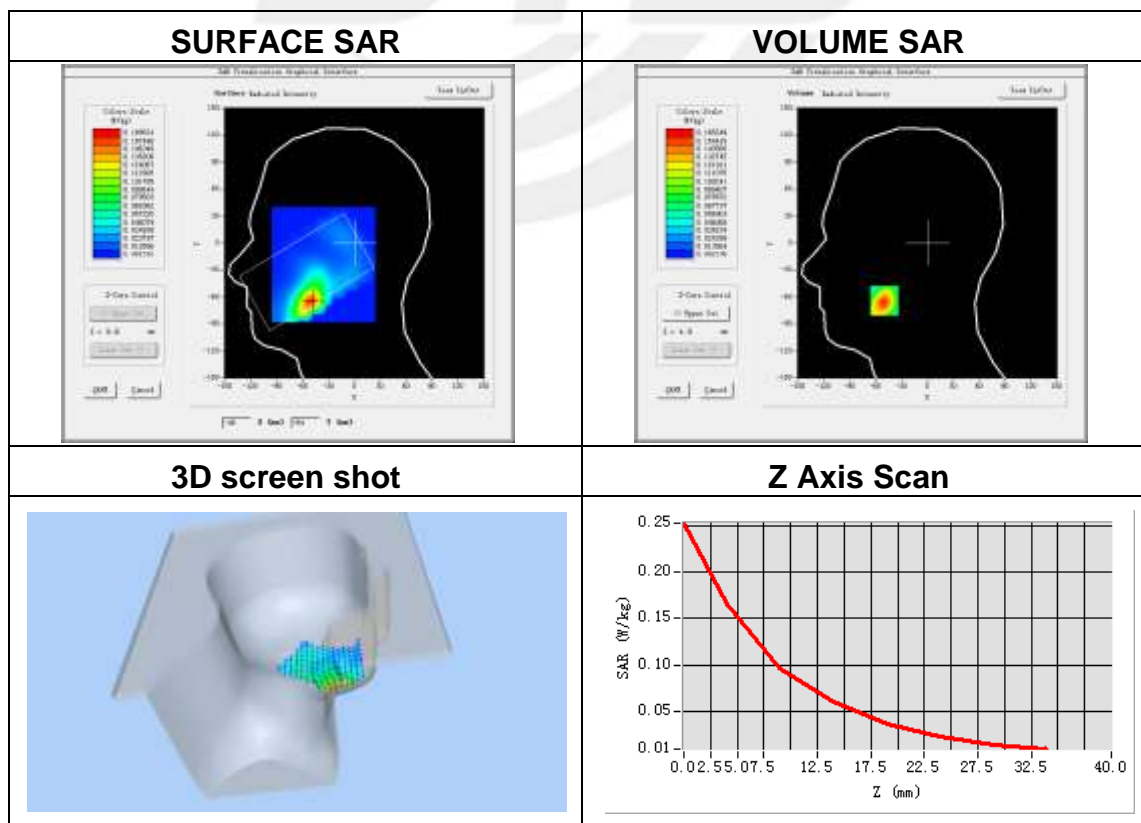


Plot 4: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back side
Band	GPRS 1900
Channels	Low
Signal	Duty Cycle: 1:2.00 (Crest factor: 2.0)
Frequency (MHz)	1850.2
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	3.13

Maximum location: X=0.00, Y=-16.00

SAR Peak: 0.63 W/kg

SAR 10g (W/Kg)	0.120231
SAR 1g (W/Kg)	0.297503

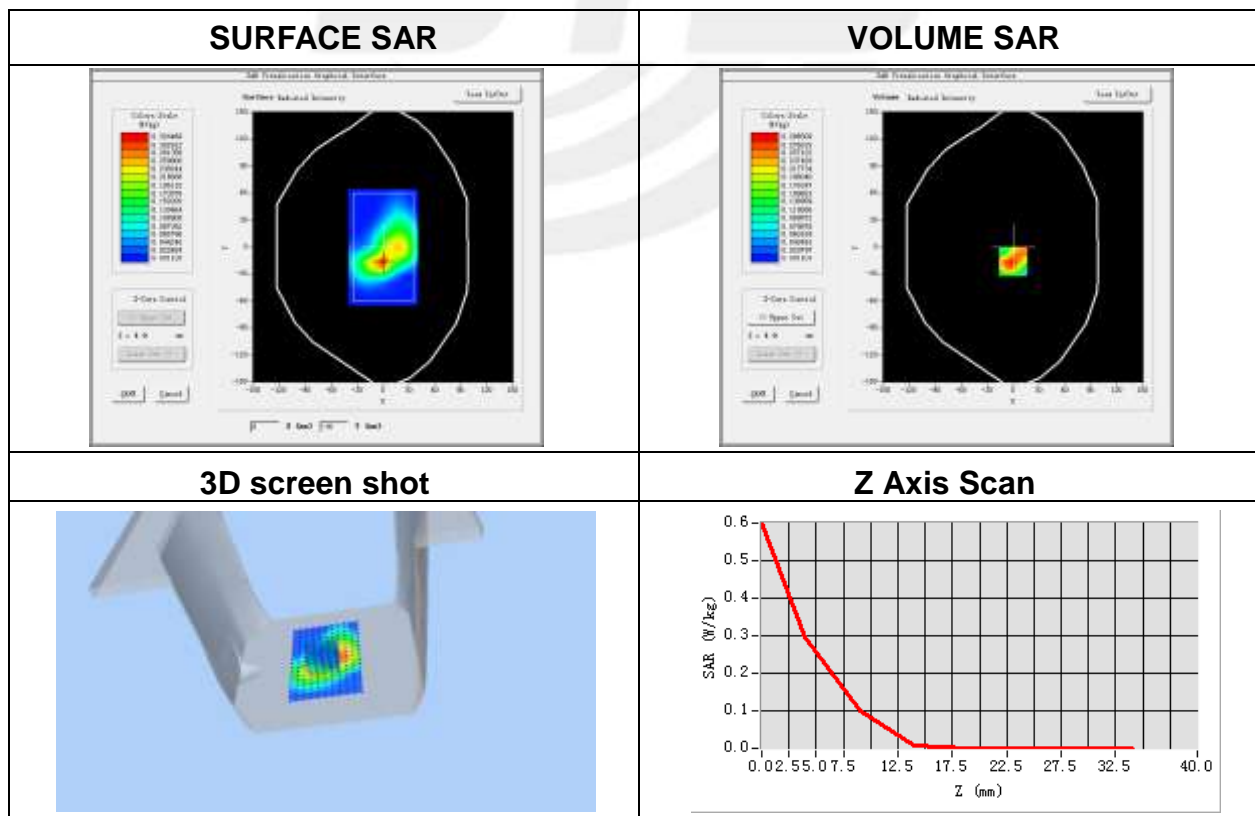


Plot 5: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	2.82

Maximum location: X=-49.00, Y=-63.00

SAR Peak: 1.35 W/kg

SAR 10g (W/Kg)	0.449583
SAR 1g (W/Kg)	0.839555

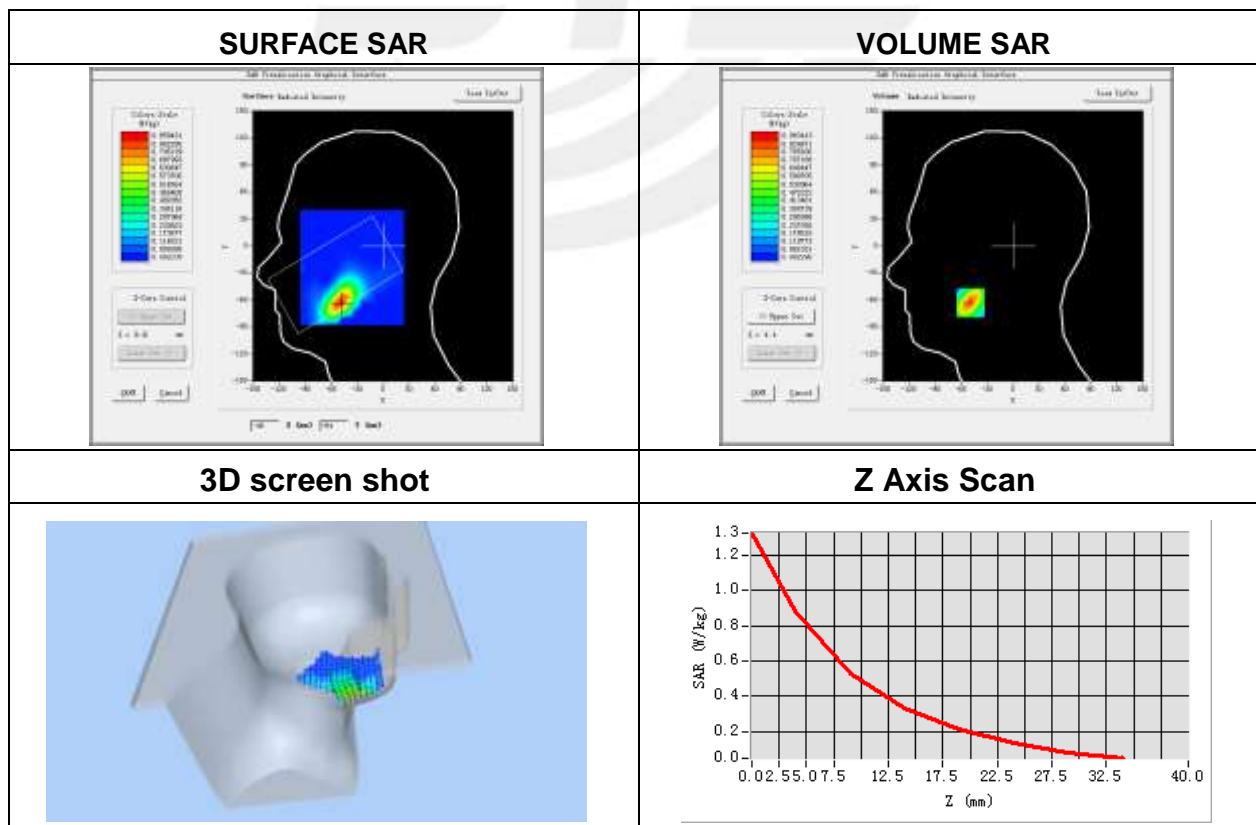


Plot 6: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	WCDMA II
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-2.15

Maximum location: X=9.00, Y=8.00

SAR Peak: 0.80 W/kg

SAR 10g (W/Kg)	0.194357
SAR 1g (W/Kg)	0.384686

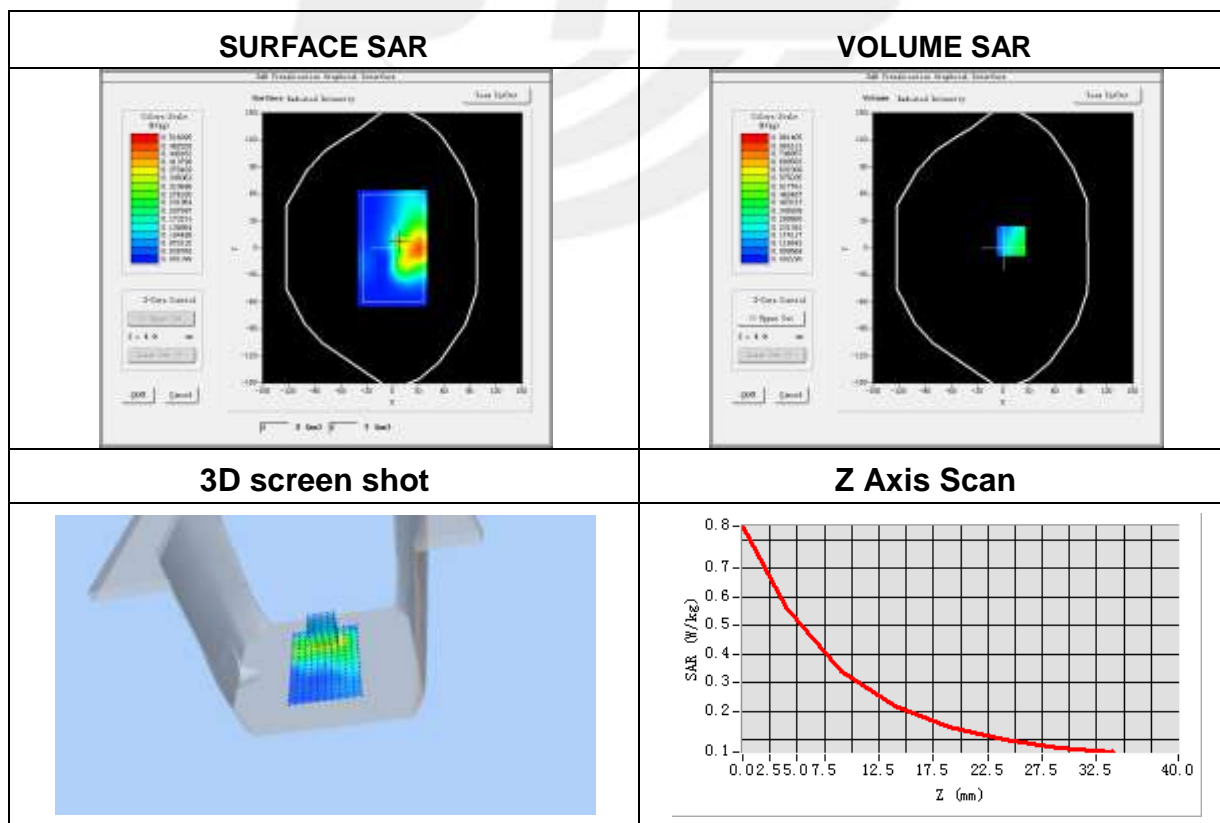


Plot 7: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-28
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA IV
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1712.6
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-0.56

Maximum location: X=-72.00, Y=8.00

SAR Peak: 0.42 W/kg

SAR 10g (W/Kg)	0.153136
SAR 1g (W/Kg)	0.252115

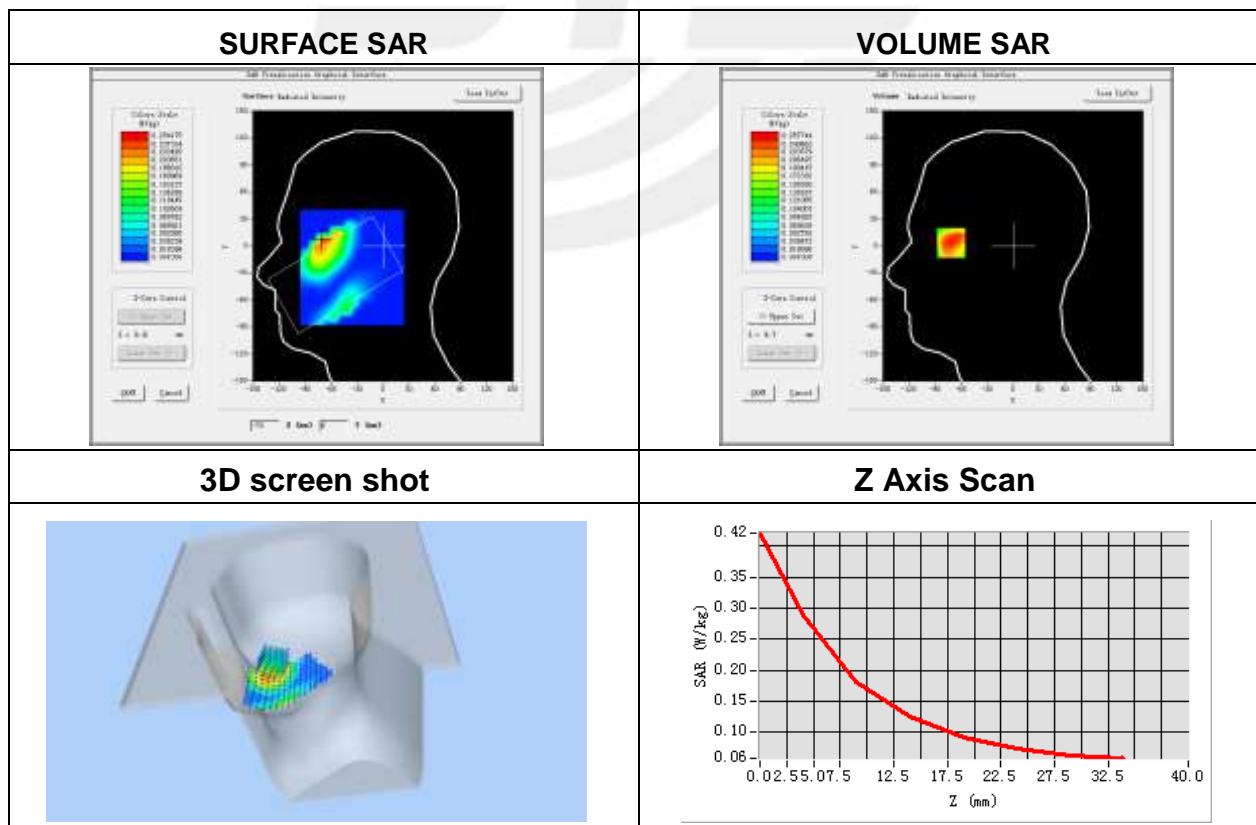


Plot 8: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-28
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA IV
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1712.6
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-0.50

Maximum location: X=8.00, Y=8.00

SAR Peak: 1.01 W/kg

SAR 10g (W/Kg)	0.410737
SAR 1g (W/Kg)	0.648502

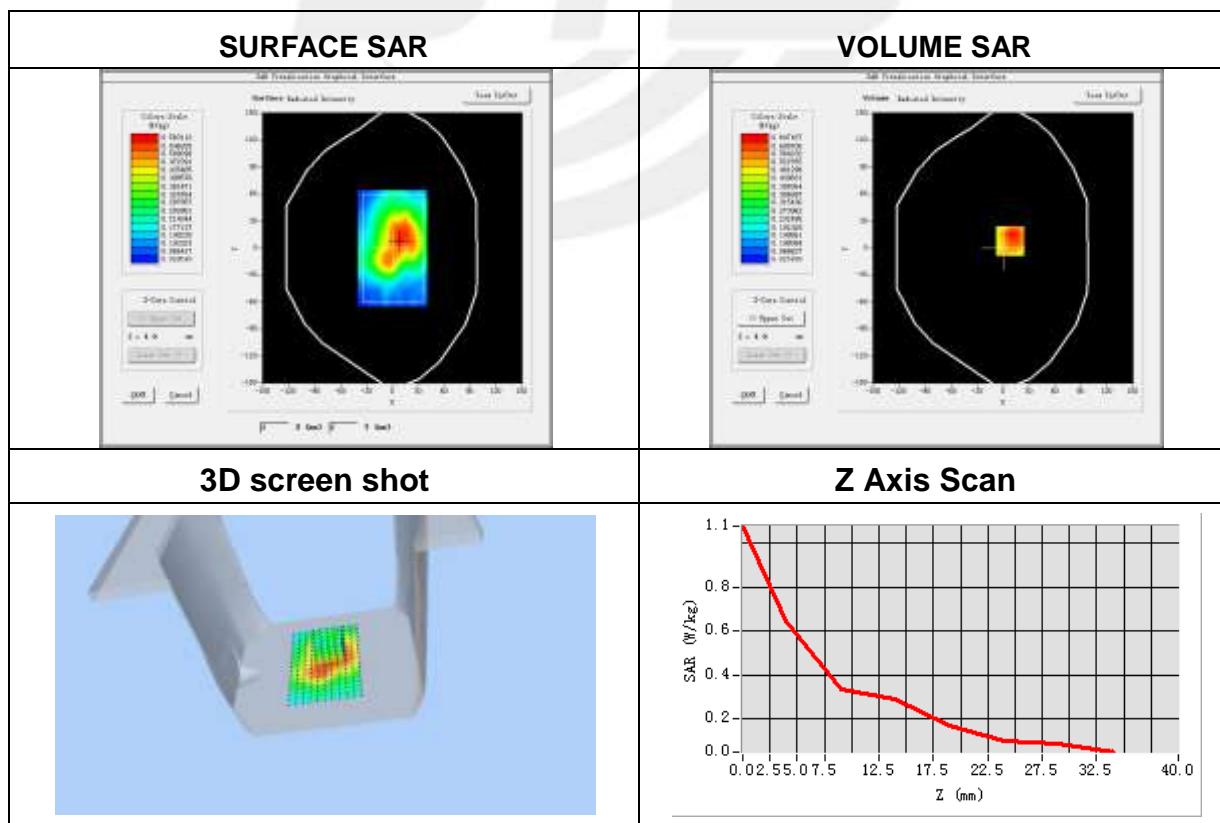


Plot 9: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	41.50
Conductivity (S/m)	0.90
Variation (%)	-0.72

Maximum location: X=-54.00, Y=-50.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.038068
SAR 1g (W/Kg)	0.058341

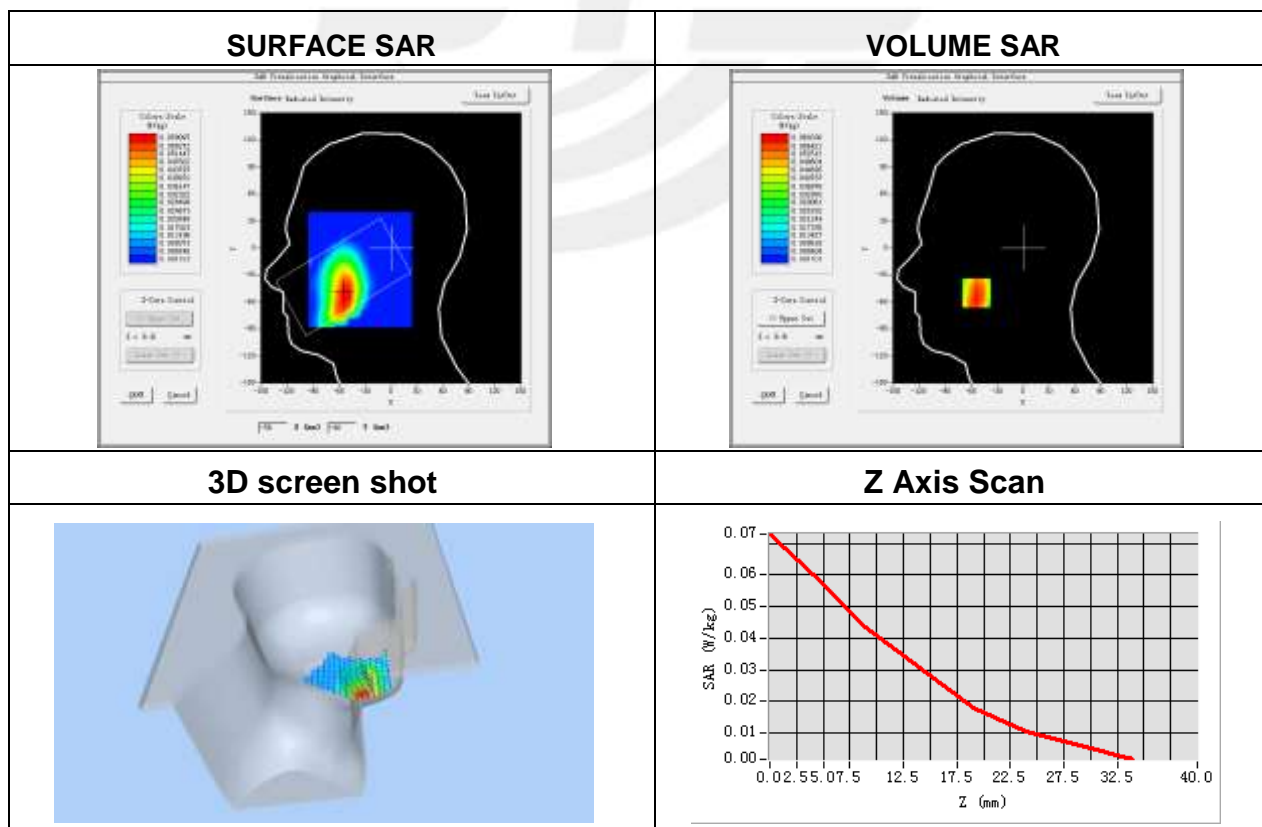


Plot 10: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA V
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	3.70

Maximum location: X=0.00, Y=18.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.045713
SAR 1g (W/Kg)	0.063648

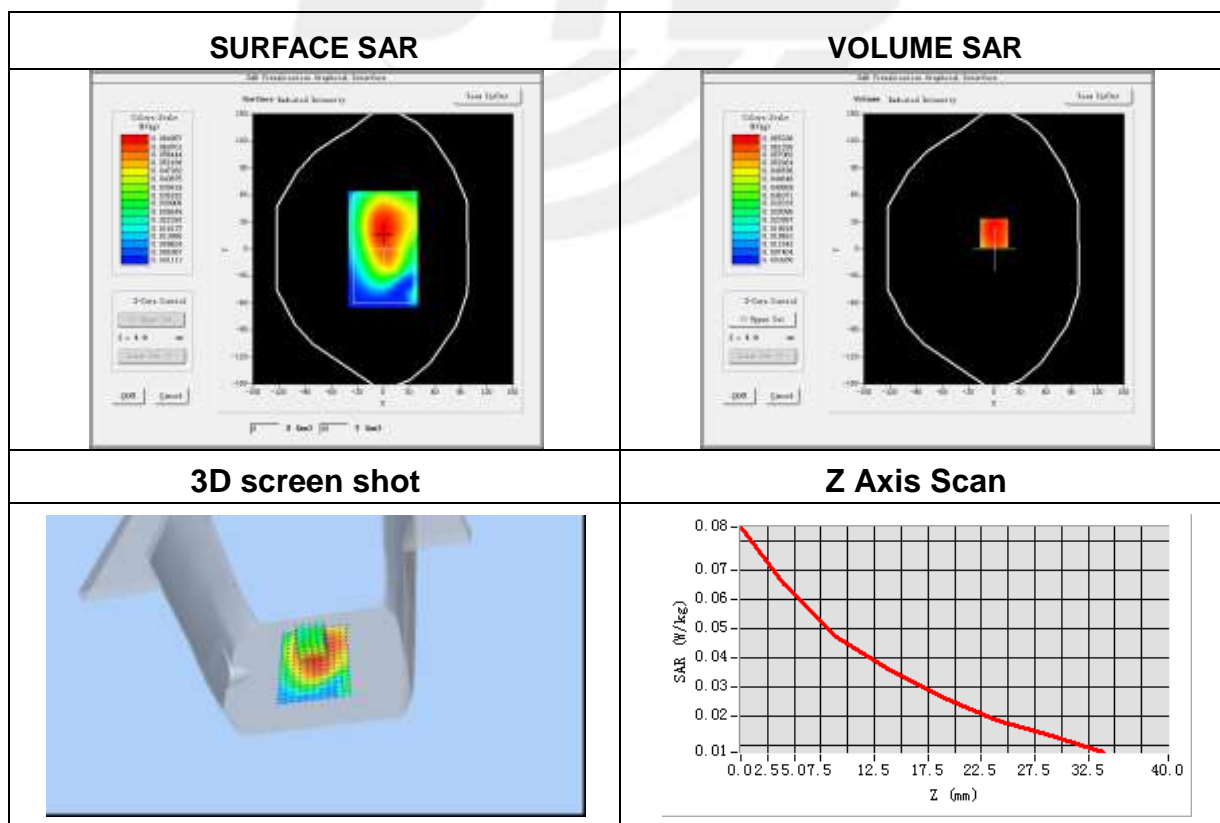


Plot 11: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-30
Probe	SN 45/15 EPGO281
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	39.20
Conductivity (S/m)	1.80
Variation (%)	-2.11

Maximum location: X=-8.00, Y=0.00
SAR Peak: 0.58 W/kg

SAR 10g (W/Kg)	0.136485
SAR 1g (W/Kg)	0.305142

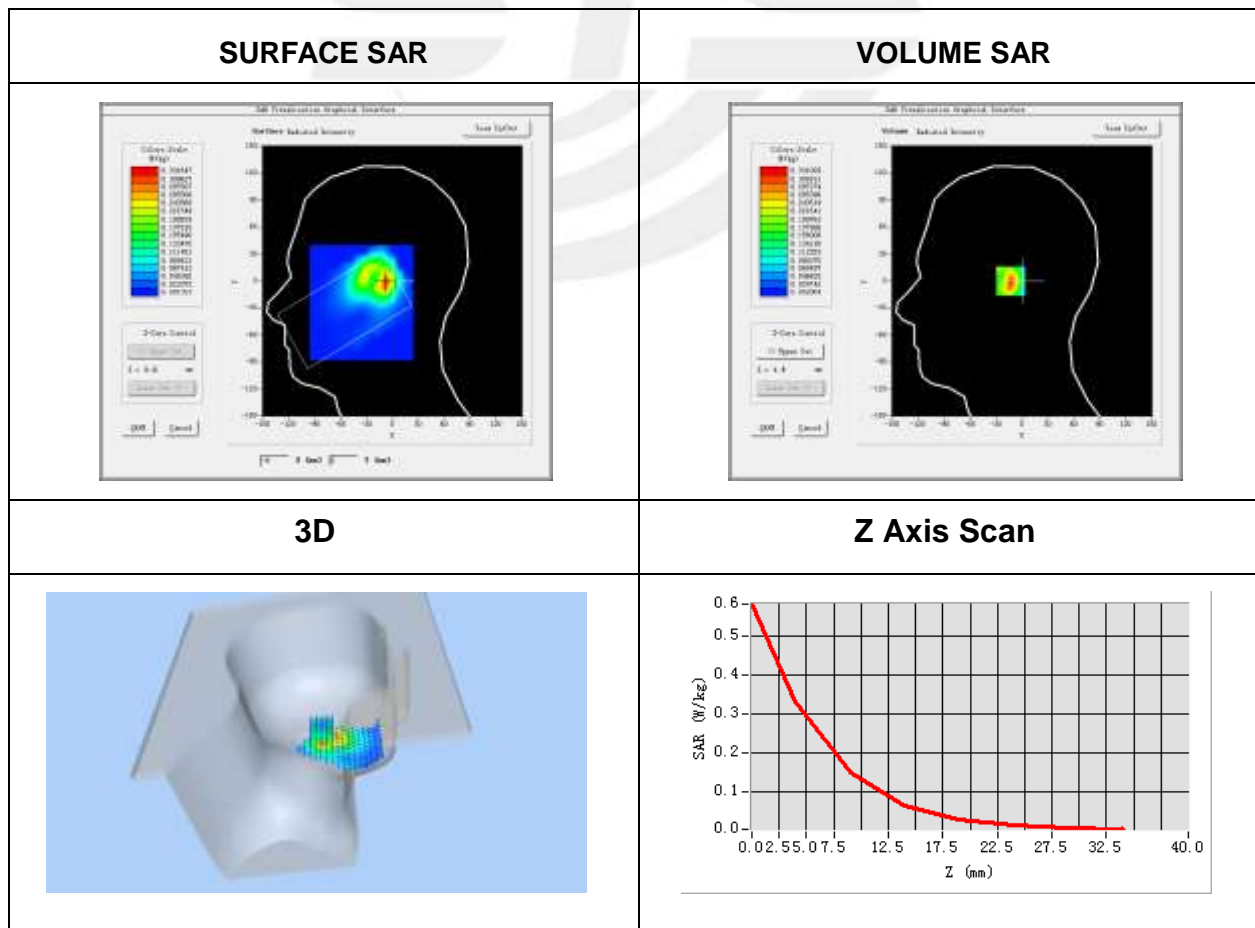


Plot 12: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-30
Probe	SN 45/15 EPGO281
ConvF	2.28
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	52.70
Conductivity (S/m)	1.95
Variation (%)	2.28

Maximum location: X=-800, Y=-700

SAR Peak: 0.29W/kg

SAR 10g (W/Kg)	0.085900
SAR 1g (W/Kg)	0.167846

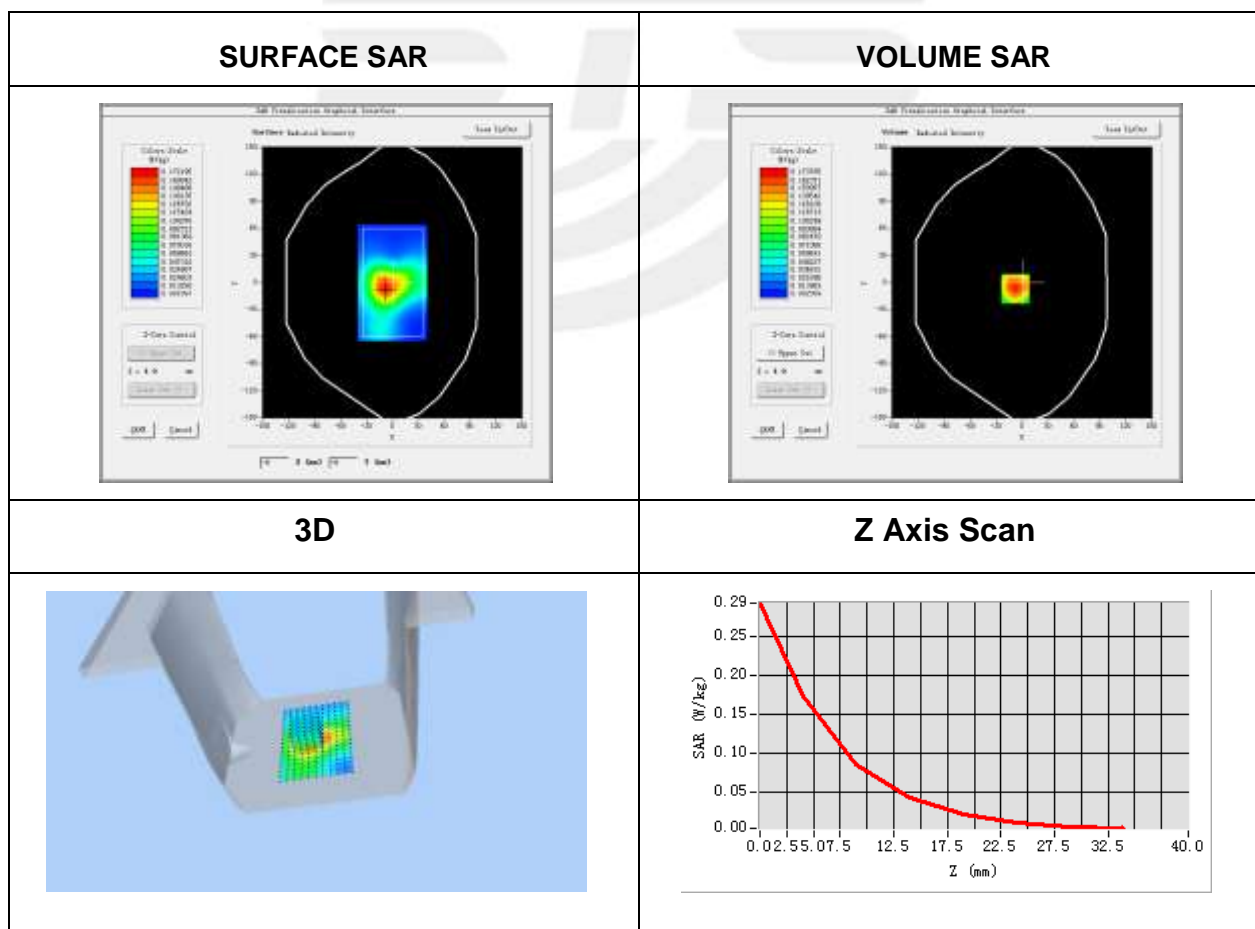


Plot 13: DUT: Smart phone; EUT Model: Titan

Test Date	2019-09-03
Probe	SN 45/15 EPGO281
ConvF	2.46
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11n U-NII
Channels	40
Signal	IEEE802.n (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	36.0
Conductivity (S/m)	4.66
Variation (%)	3.71

Maximum location: X=-8.00, Y=25.00

SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.125797
SAR 1g (W/Kg)	0.388525

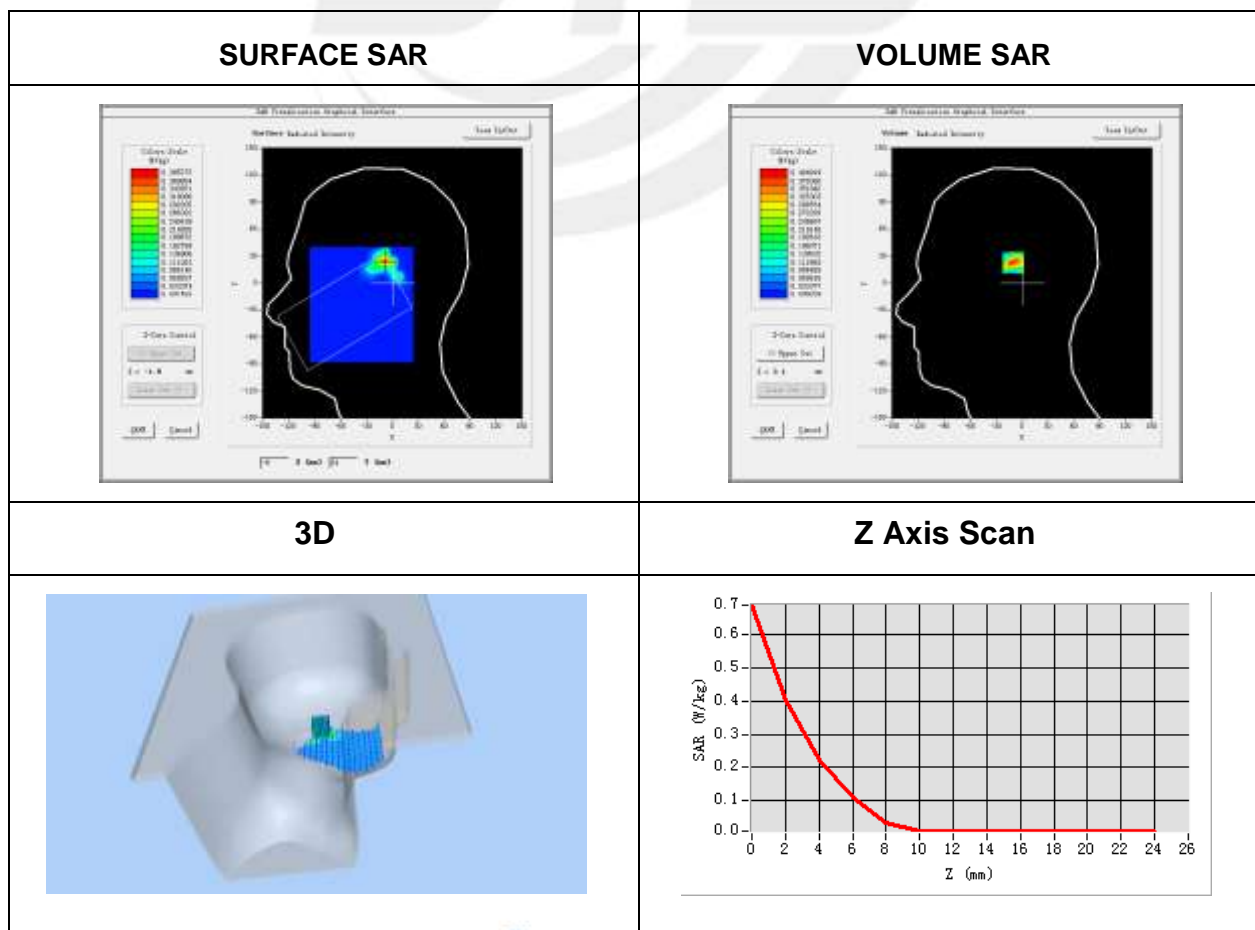


Plot 14: DUT: Smart phone; EUT Model: Titan

Test Date	2019-09-03
Probe	SN 45/15 EPGO281
ConvF	2.52
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11n U-NII
Channels	40
Signal	IEEE802.n (Crest factor: 1.0)
Frequency (MHz)	5200
Relative permittivity (real part)	49.0
Conductivity (S/m)	5.30
Variation (%)	0.47

Maximum location: X=0.00, Y=-31.00

SAR Peak: 0.61 W/kg

SAR 10g (W/Kg)	0.077041
SAR 1g (W/Kg)	0.213644

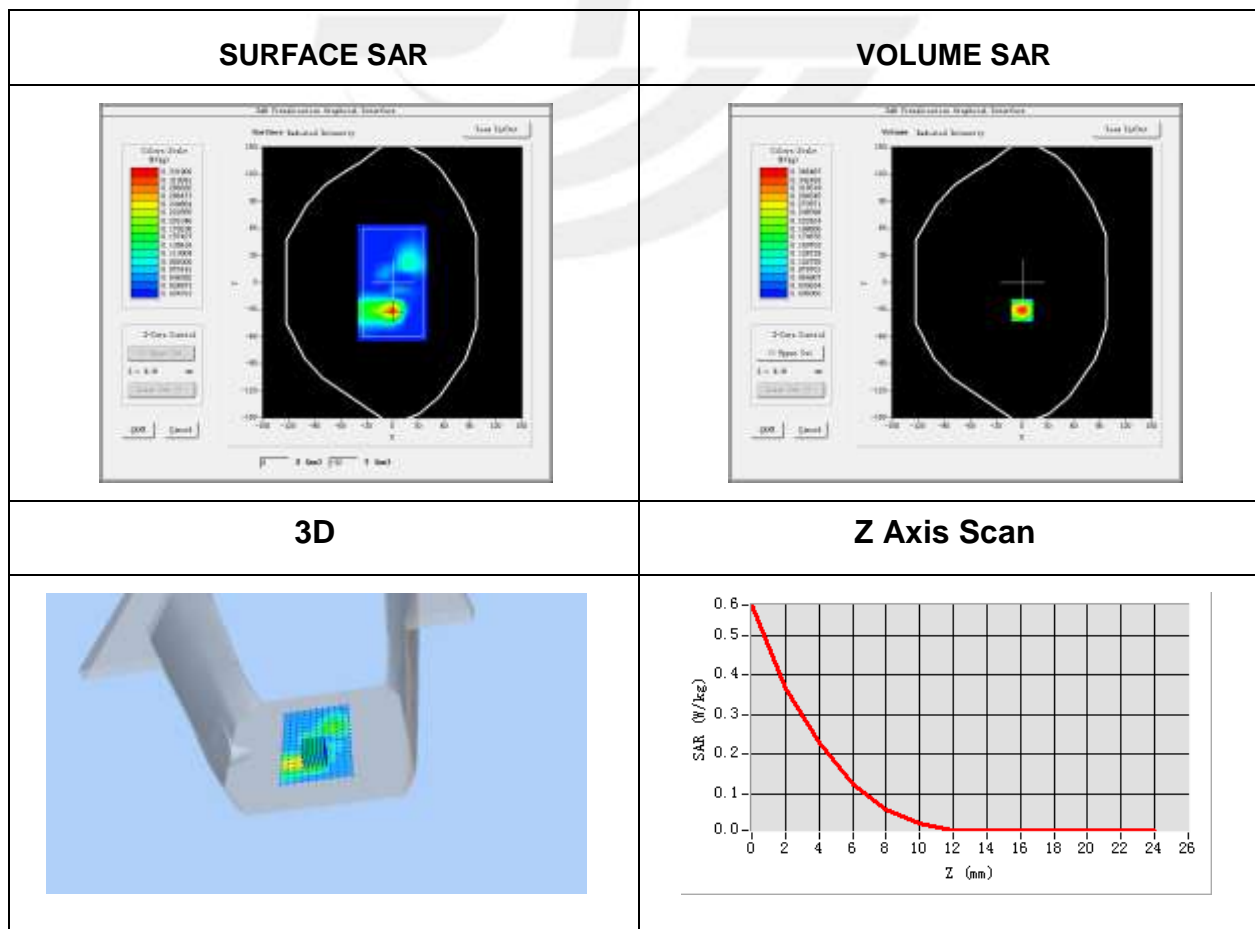


Plot 15: DUT: Smart phone; EUT Model: Titan

Test Date	2019-09-03
Probe	SN 45/15 EPGO281
ConvF	2.70
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	IEEE 802.11a U-NII
Channels	52
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5260
Relative permittivity (real part)	35.90
Conductivity (S/m)	4.76
Variation (%)	-3.37

Maximum location: X=0.00, Y=26.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.059541
SAR 1g (W/Kg)	0.181459

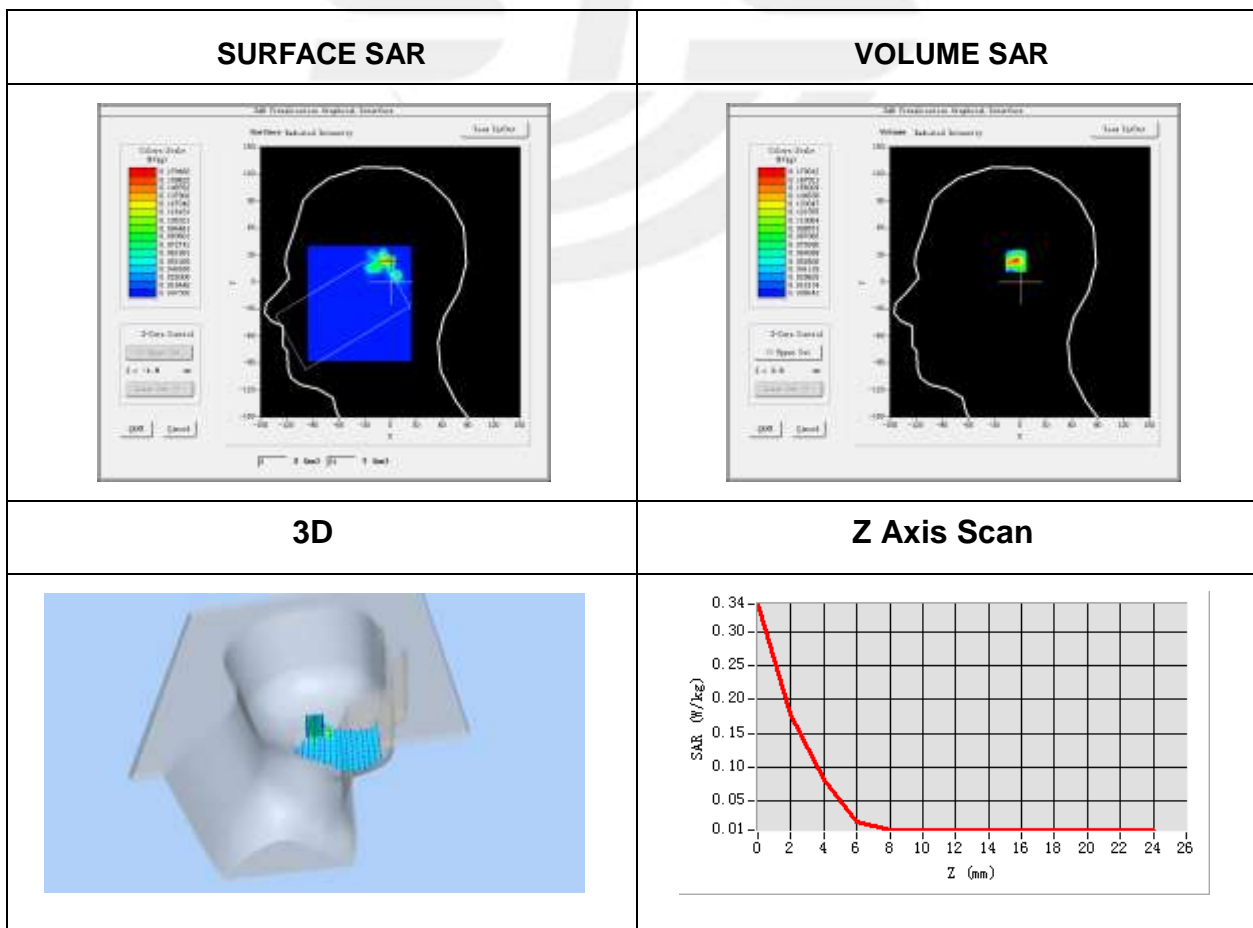


Plot 16: DUT: Smart phone; EUT Model: Titan

Test Date	2019-09-03
Probe	SN 45/15 EPGO281
ConvF	2.79
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm,Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a U-NII
Channels	52
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5260
Relative permittivity (real part)	48.70
Conductivity (S/m)	5.53
Variation (%)	2.25

Maximum location: X=-9.00, Y=-30.00
SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.034799
SAR 1g (W/Kg)	0.092060

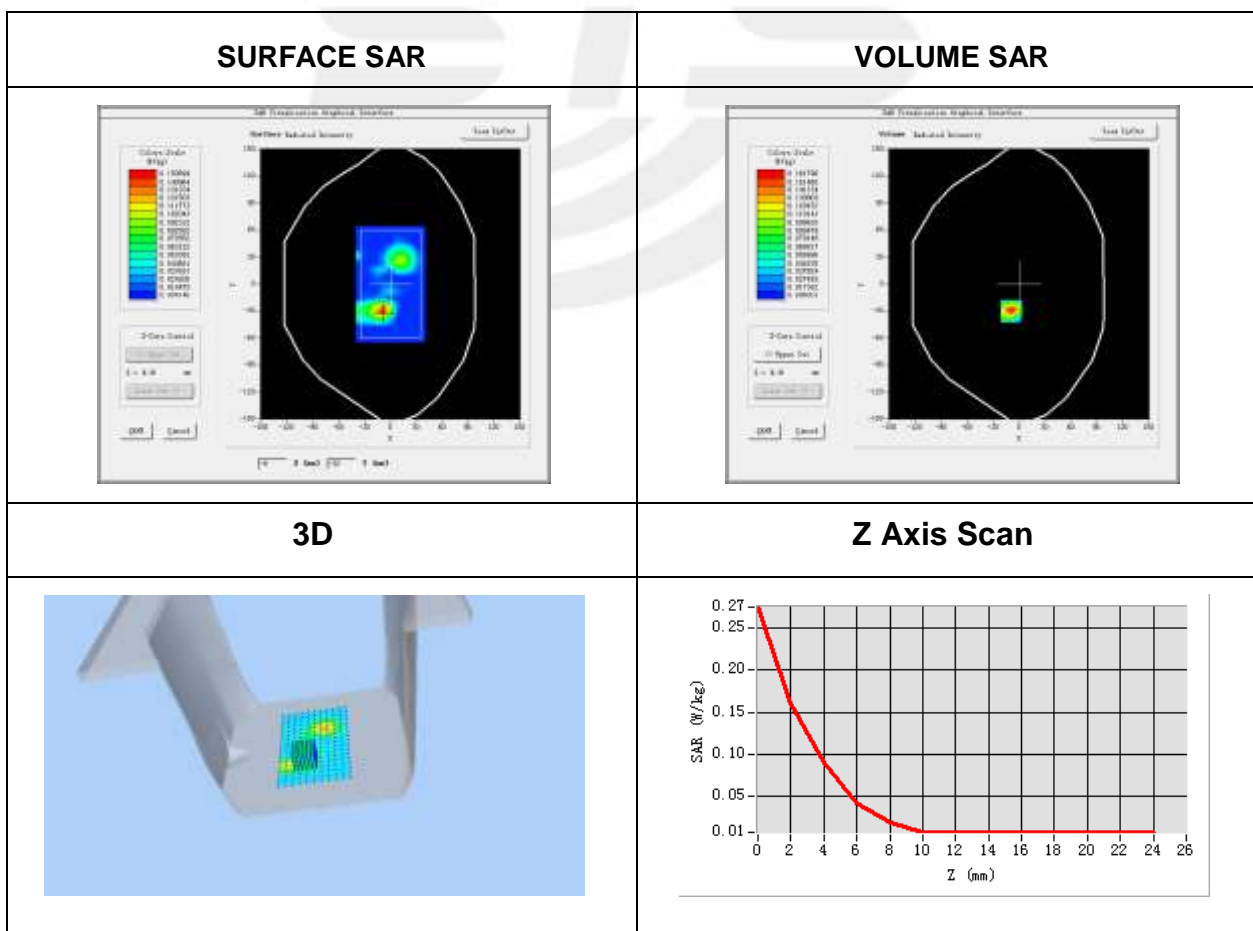


Plot 17: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 2 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.32

Maximum location: X=-70.00, Y=1.00

SAR Peak: 0.29 W/kg

SAR 10g (W/Kg)	0.100230
SAR 1g (W/Kg)	0.178532

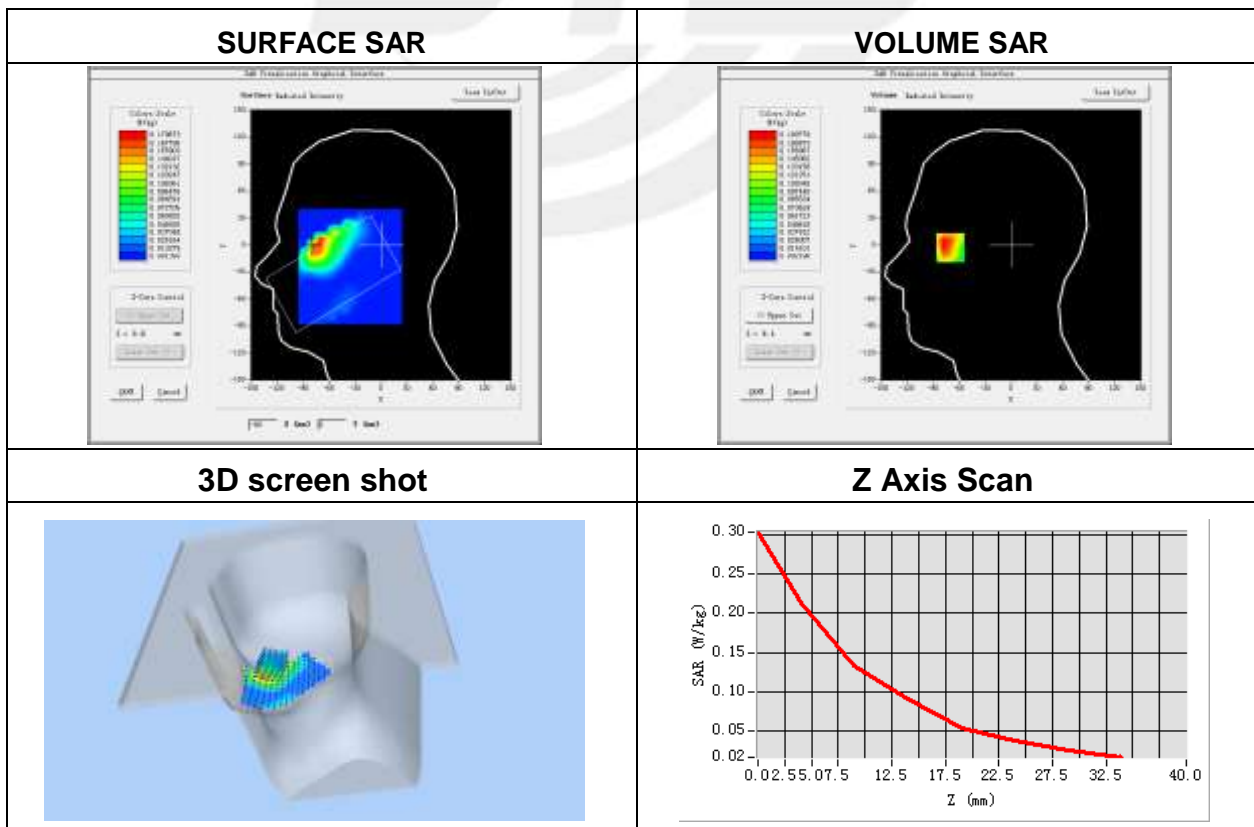


Plot 18: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back side
Band	LTE Band 2 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	2.91

Maximum location: X=-22.00, Y=-7.00

SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.149234
SAR 1g (W/Kg)	0.246834

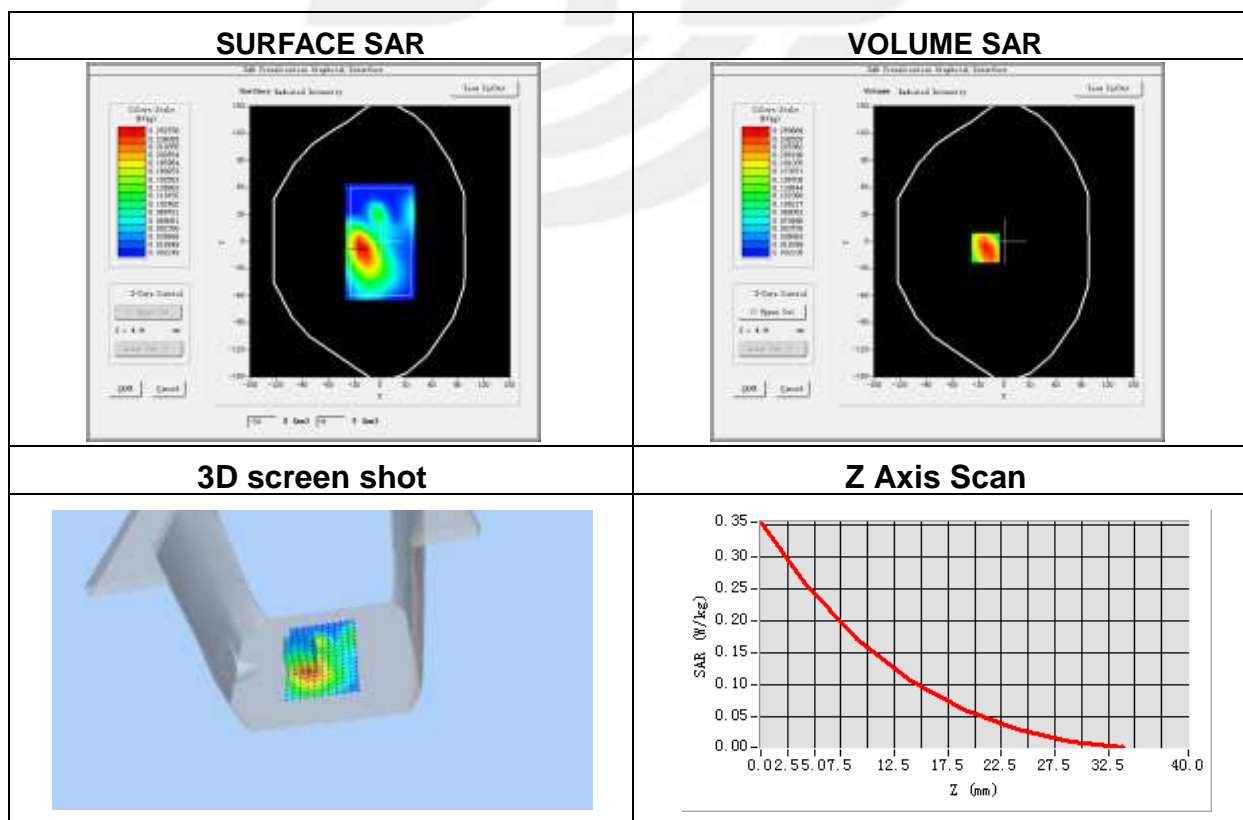


Plot 19: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-28
Probe	SN 45/15 EPGO281
ConvF	1.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 4 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	3.99

Maximum location: X=-72.00, Y=8.00

SAR Peak: 0.40W/kg

SAR 10g (W/Kg)	0.149769
SAR 1g (W/Kg)	0.249832

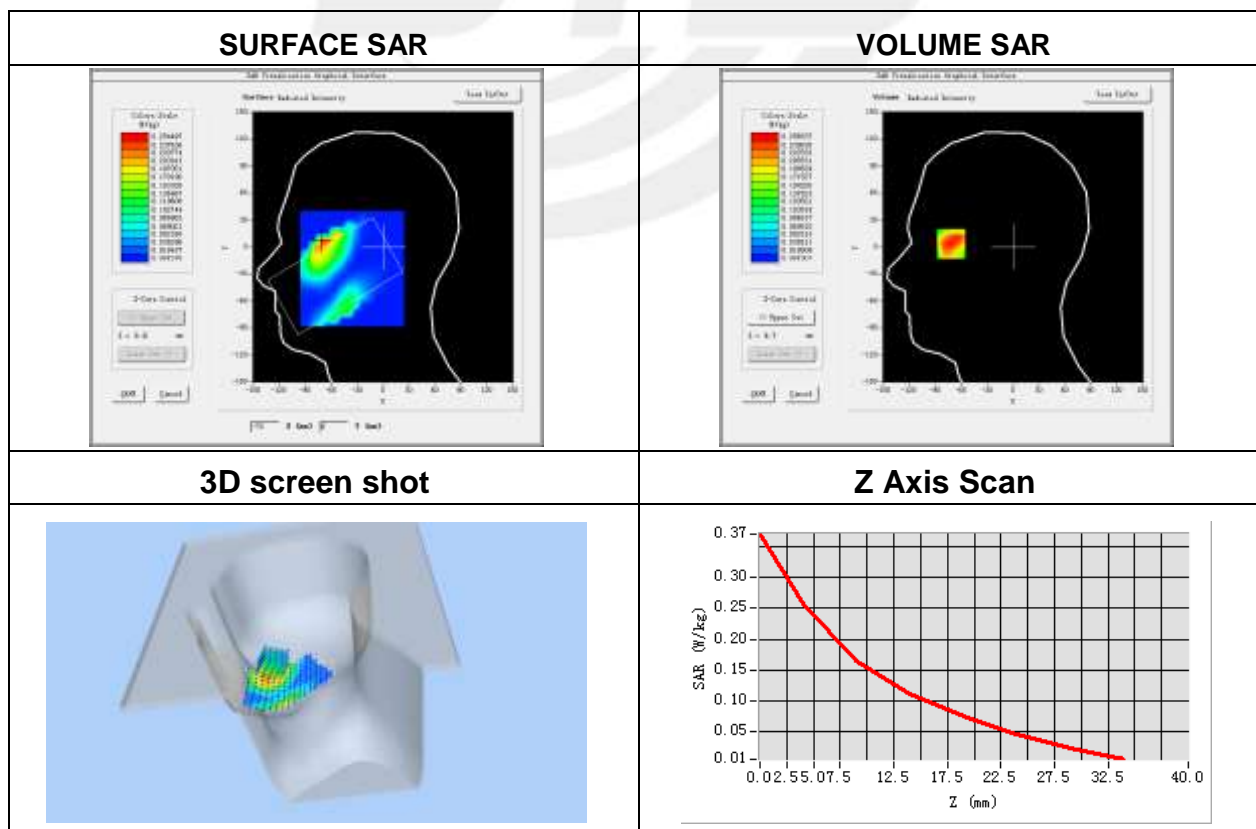


Plot 20: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-28
Probe	SN 45/15 EPGO281
ConvF	1.87
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 4 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	0.03

Maximum location: X=-14.00, Y=-2.00

SAR Peak: 0.57 W/kg

SAR 10g (W/Kg)	0.240061
SAR 1g (W/Kg)	0.386156

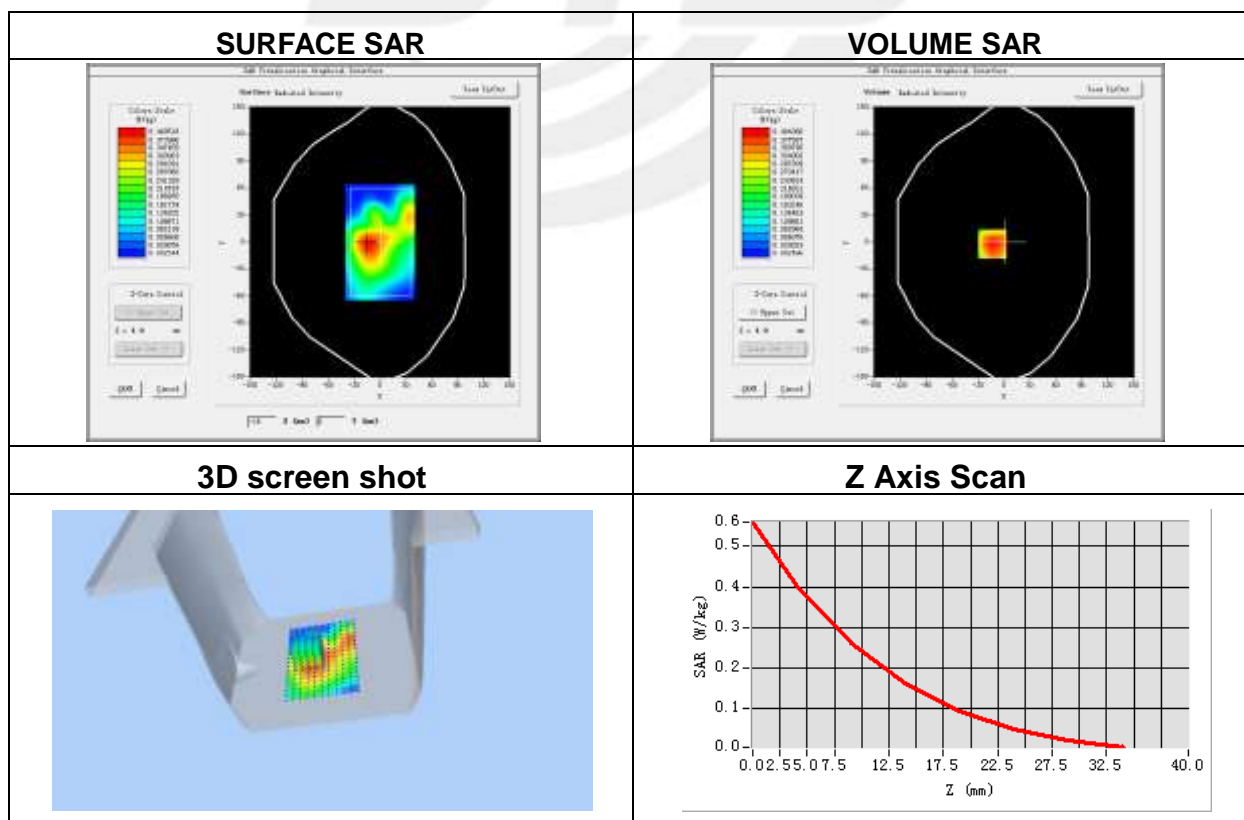


Plot 21: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	829.0
Relative permittivity (real part)	41.50
Conductivity (S/m)	0.90
Variation (%)	-2.68

Maximum location: X=-49.00, Y=-64.00

SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.056085
SAR 1g (W/Kg)	0.089143

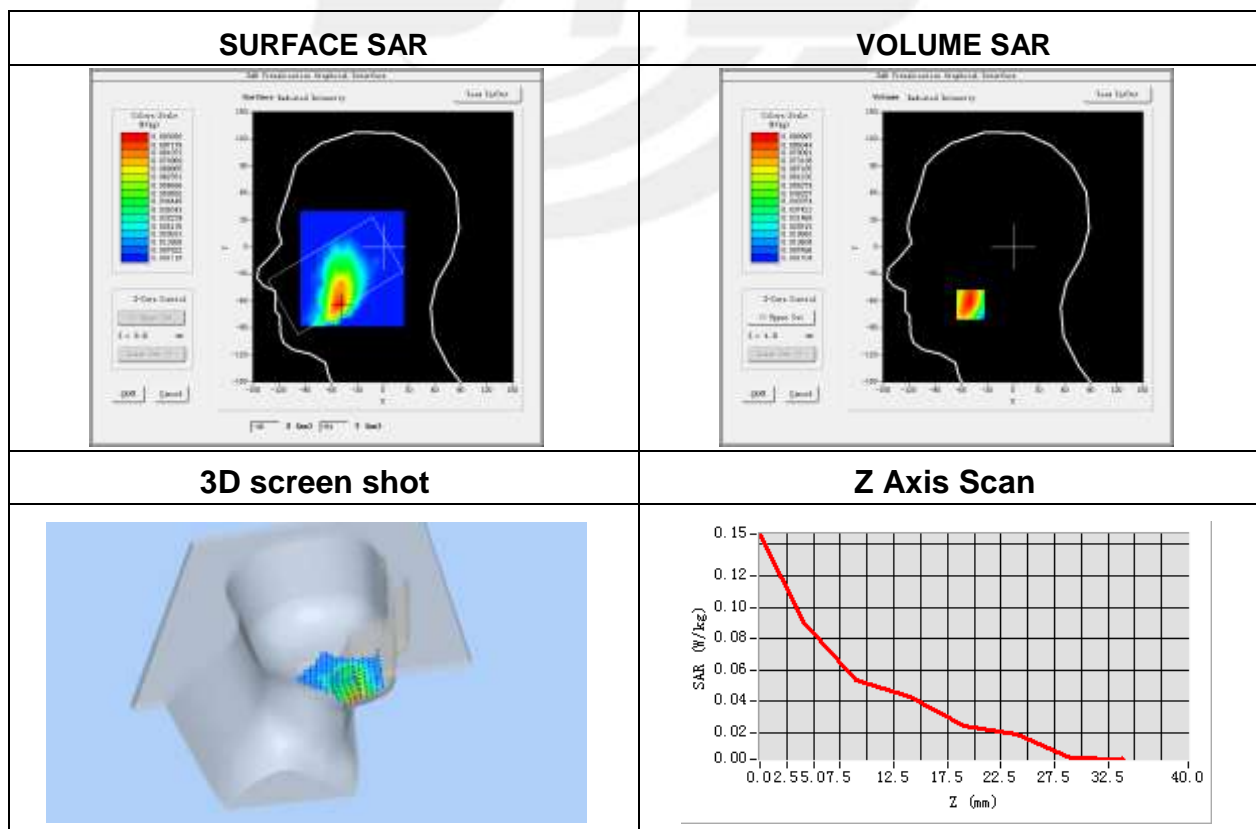


Plot 22: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	829.0
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	0.31

Maximum location: X=-1.00, Y=32.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.062599
SAR 1g (W/Kg)	0.093302

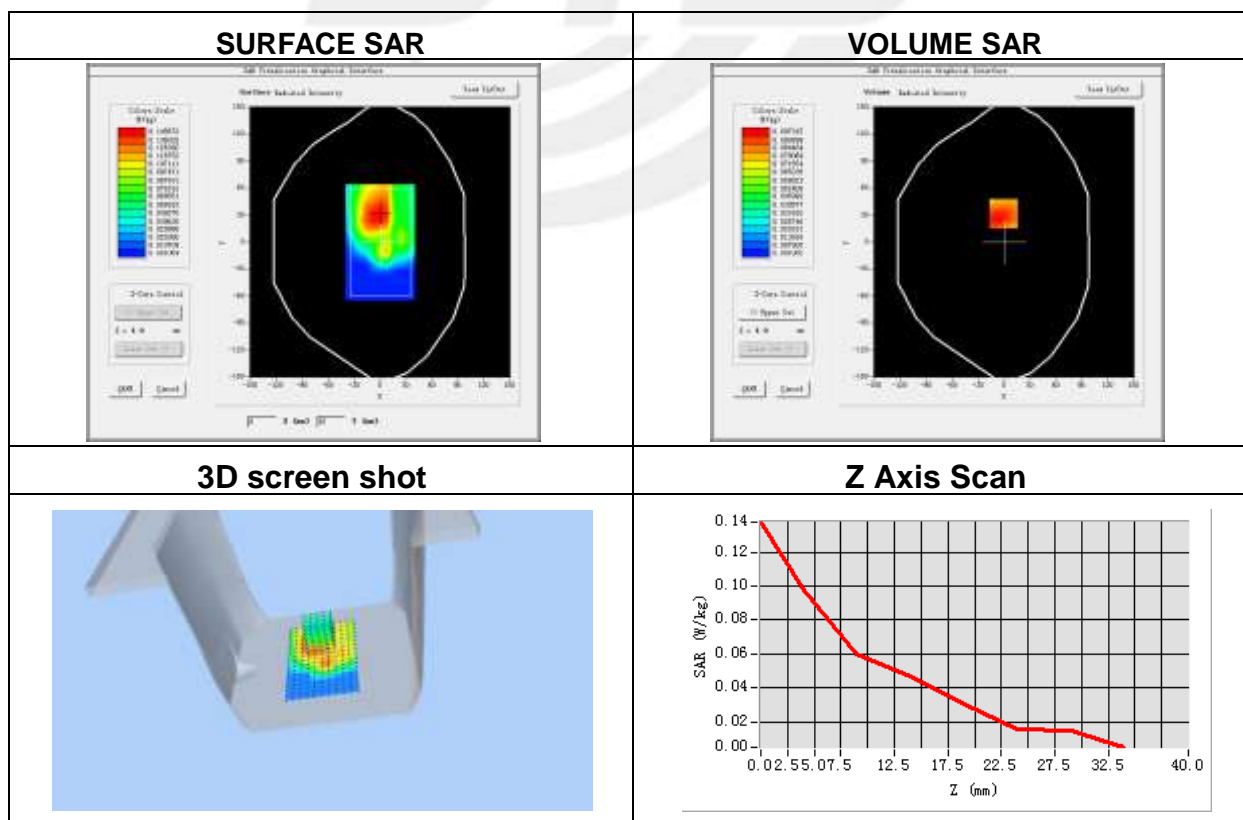


Plot 23: DUT: Smart phone; EUT Model: Titan

Test Date	2019-09-02
Probe	SN 45/15 EPGO281
ConvF	2.32
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2535.0
Relative permittivity (real part)	39.00
Conductivity (S/m)	1.96
Variation (%)	1.21

Maximum location: X=-67.00, Y=3.00

SAR Peak: 0.21 W/kg

SAR 10g (W/Kg)	0.072825
SAR 1g (W/Kg)	0.135000

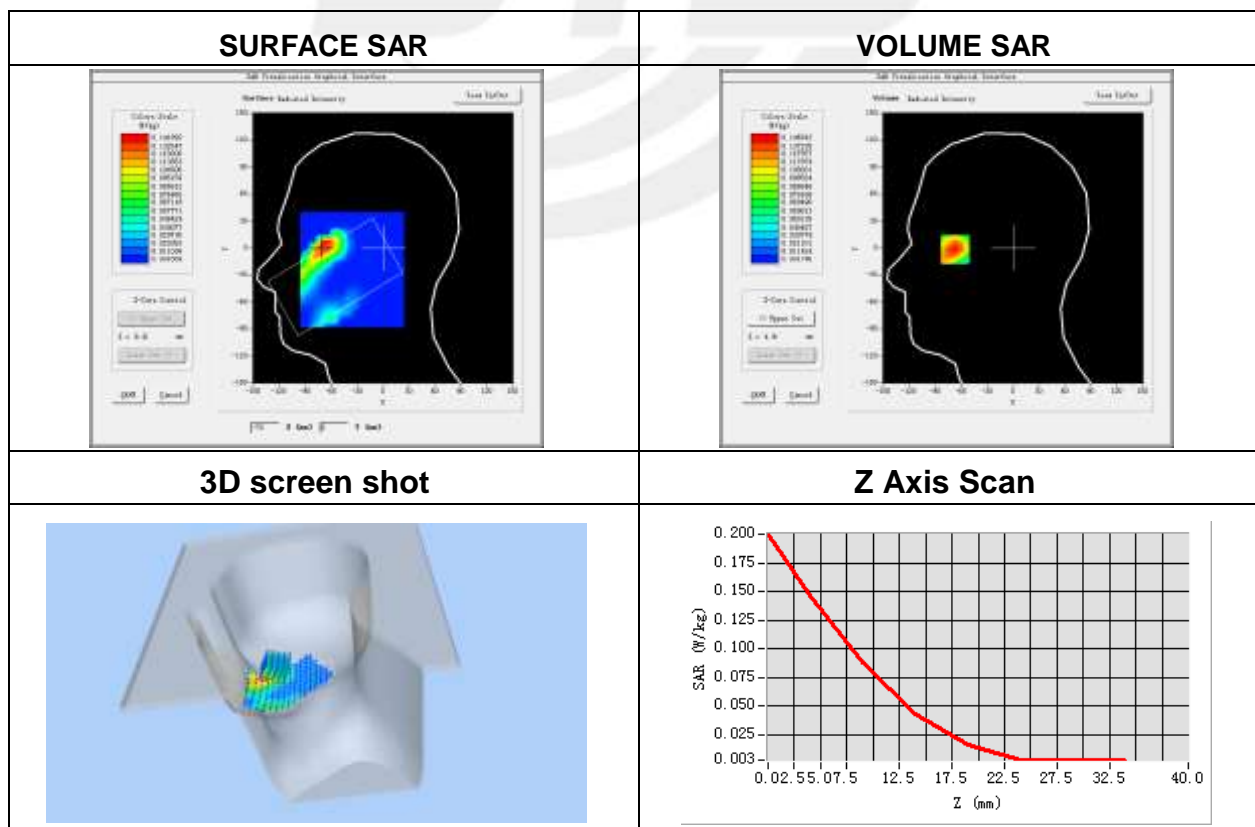


Plot 24: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-30
Probe	SN 45/15 EPGO281
ConvF	2.38
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	LTE Band 7 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2535.0
Relative permittivity (real part)	52.50
Conductivity (S/m)	2.16
Variation (%)	3.79

Maximum location: X=-10.00, Y=-19.00

SAR Peak: 1.38 W/kg

SAR 10g (W/Kg)	0.559406
SAR 1g (W/Kg)	0.927283

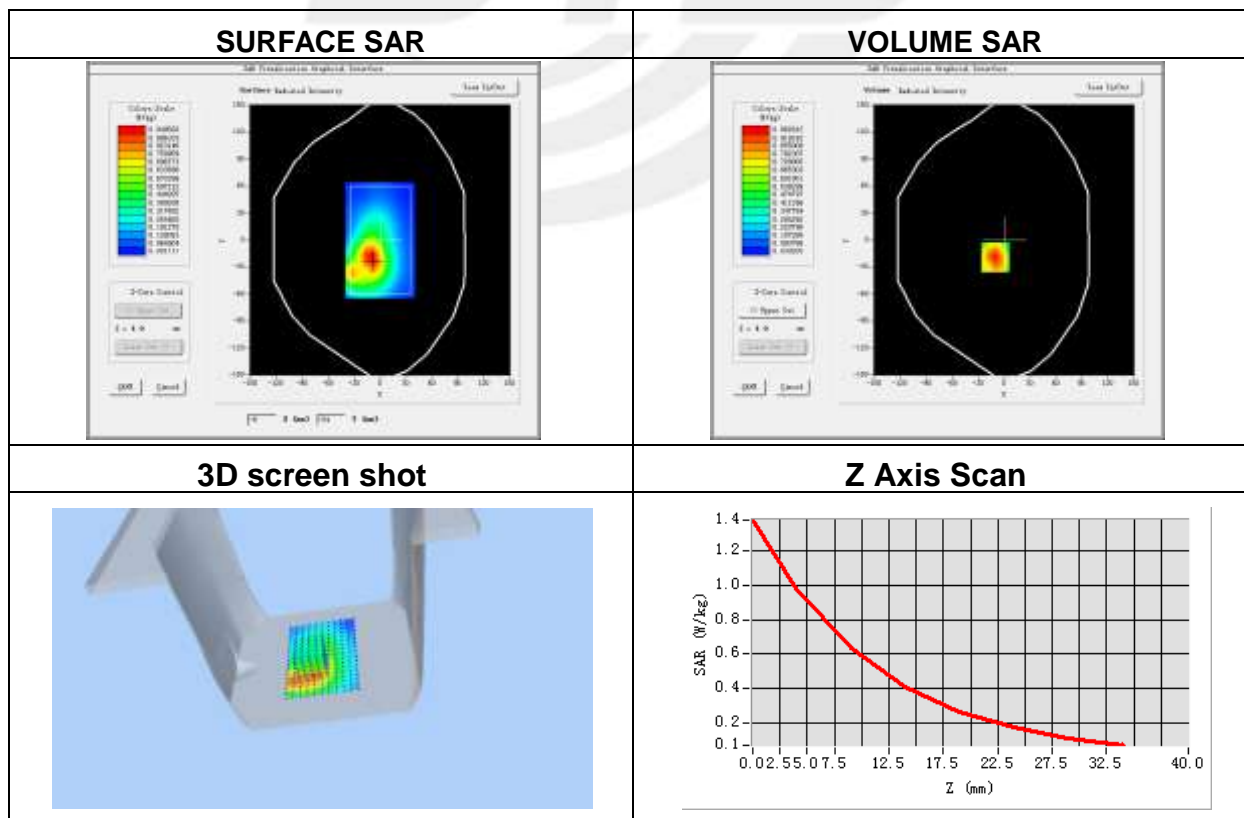


Plot 25: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-26
Probe	SN 45/15 EPGO281
ConvF	1.53
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 12 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704.0
Relative permittivity (real part)	41.90
Conductivity (S/m)	0.89
Variation (%)	3.28

Maximum location: X=-51.00, Y=-61.00

SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.041488
SAR 1g (W/Kg)	0.064252

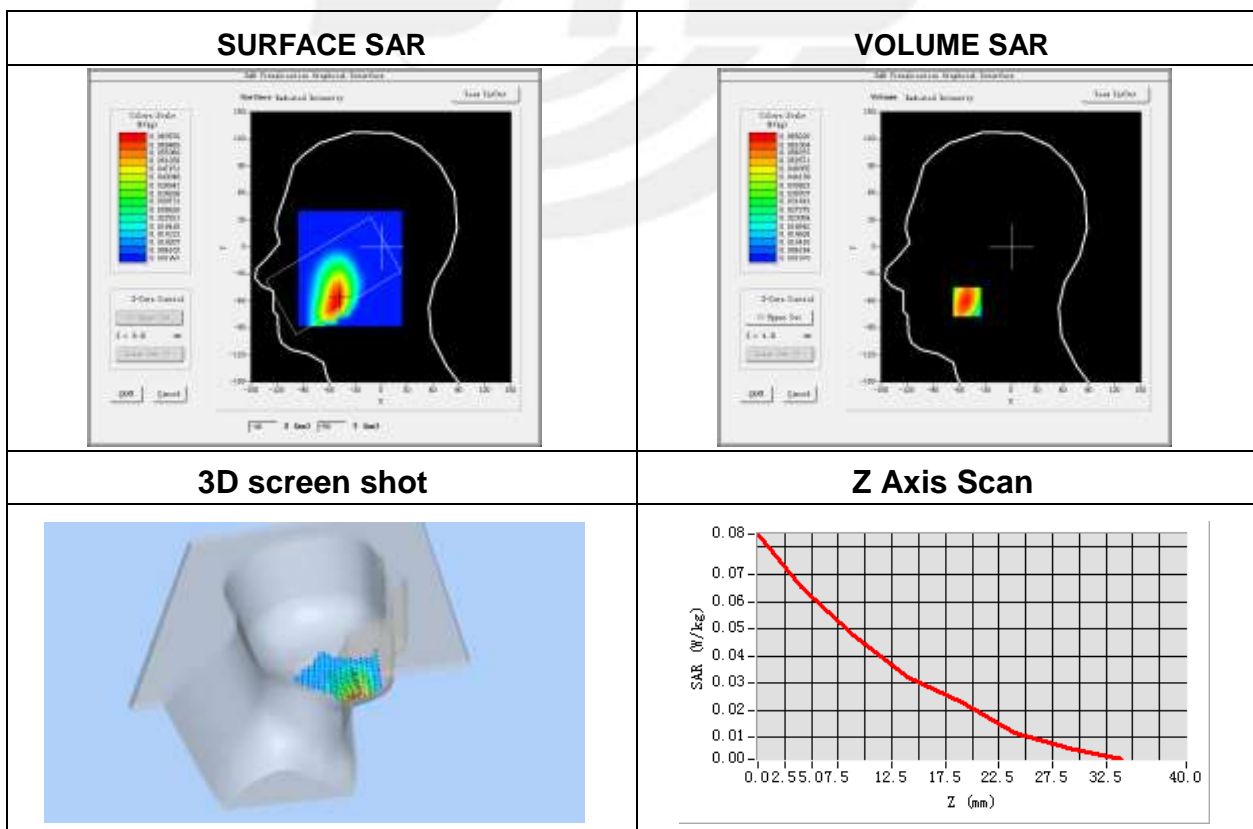


Plot 26: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-26
Probe	SN 45/15 EPGO281
ConvF	1.59
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom can	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	704.0
Relative permittivity (real part)	55.50
Conductivity (S/m)	0.96
Variation (%)	3.51

Maximum location: X=16.00, Y=31.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.061252
SAR 1g (W/Kg)	0.083557

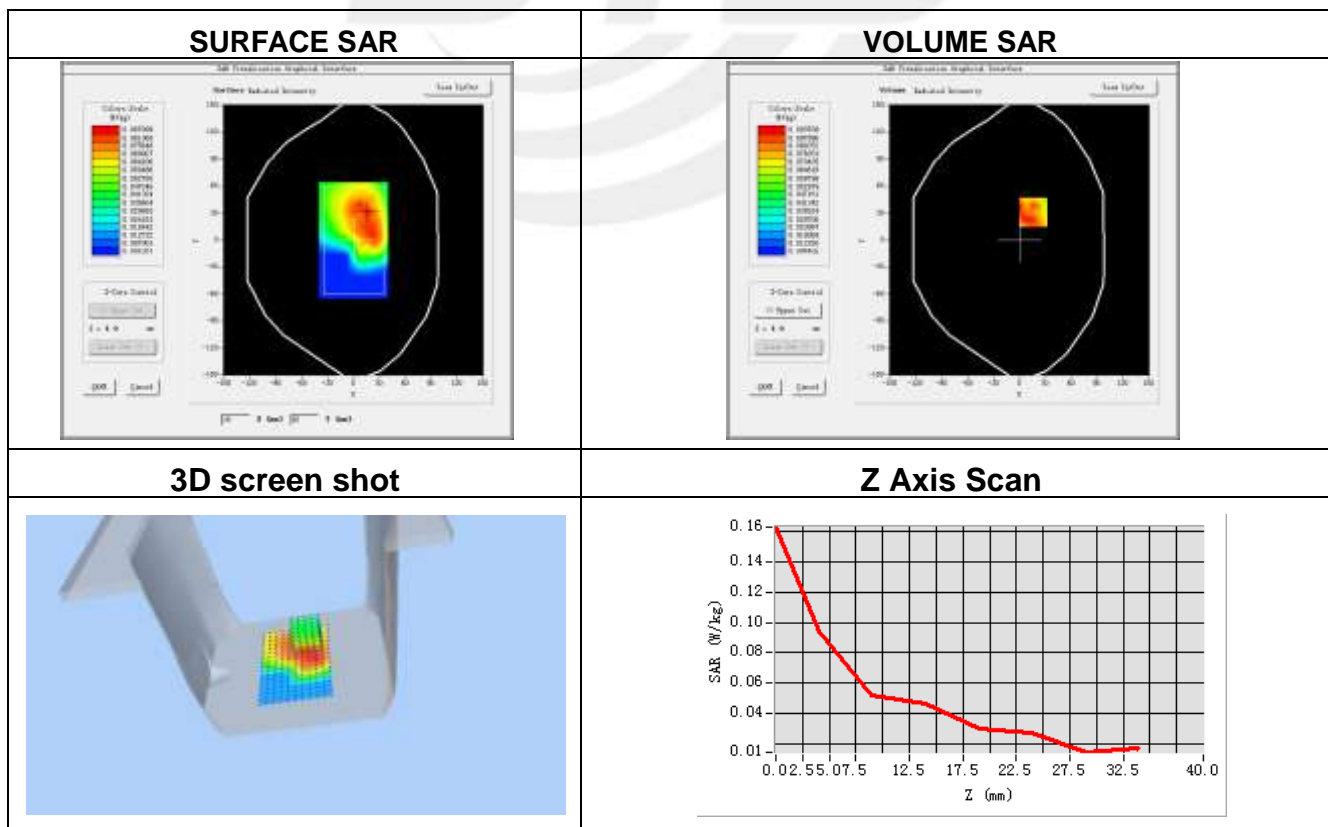


Plot 27: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-26
Probe	SN 45/15 EPGO281
ConvF	1.53
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 13 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	782.0
Relative permittivity (real part)	41.90
Conductivity (S/m)	0.89
Variation (%)	-2.60

Maximum location: X=-51.00, Y=-63.00

SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.021001
SAR 1g (W/Kg)	0.037674

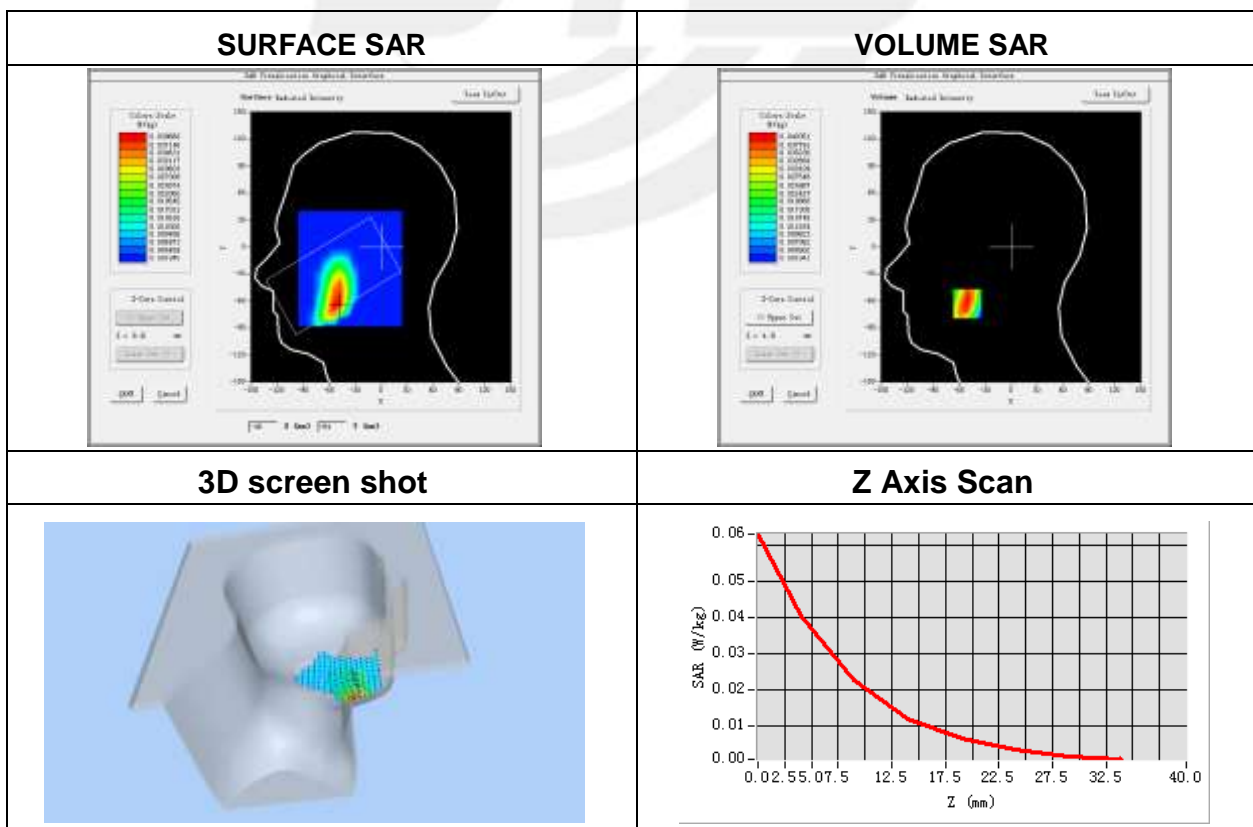


Plot 28: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-26
Probe	SN 45/15 EPGO281
ConvF	1.59
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 13 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	782.0
Relative permittivity (real part)	55.50
Conductivity (S/m)	0.96
Variation (%)	-2.29

Maximum location: X=14.00, Y=-16.00

SAR Peak: 0.15 W/kg

SAR 10g (W/Kg)	0.064807
SAR 1g (W/Kg)	0.101562

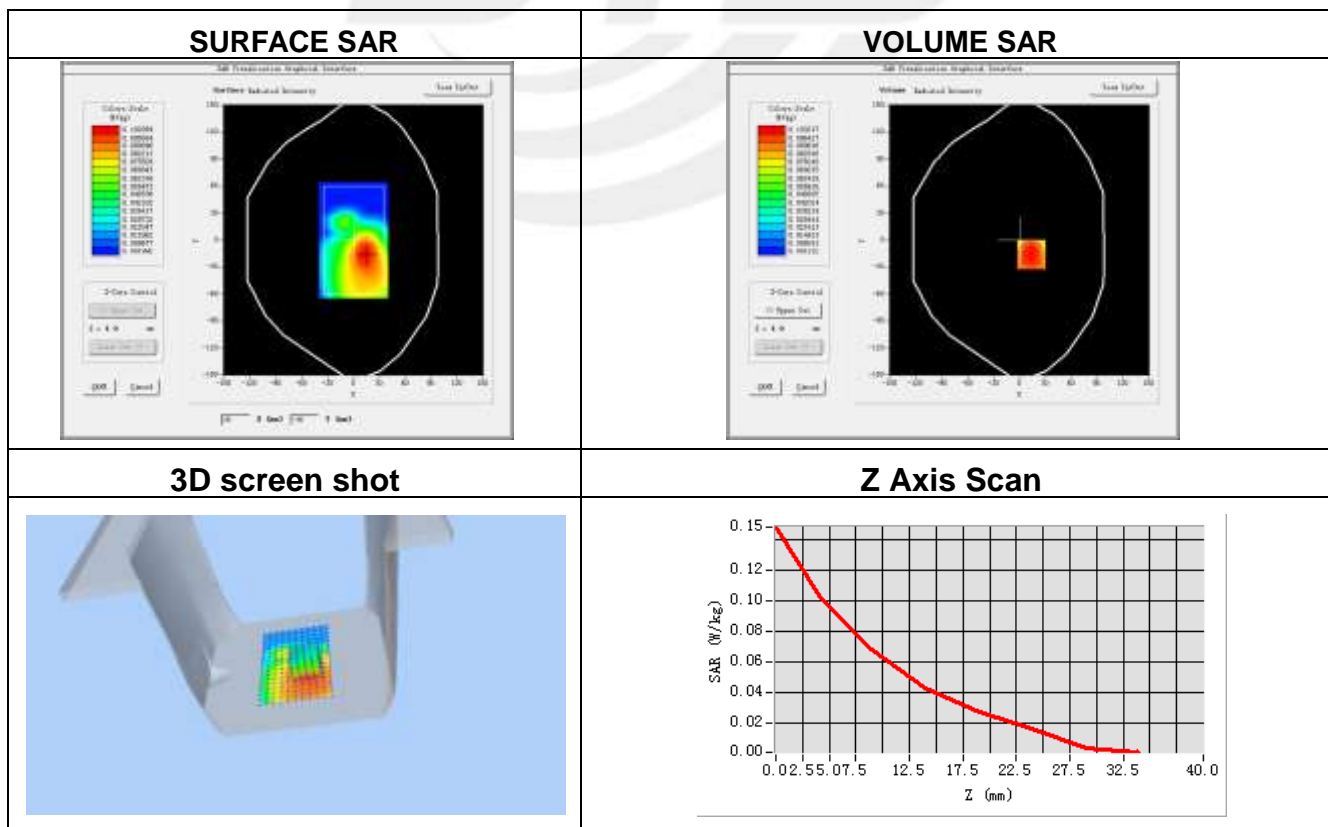


Plot 29: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-26
Probe	SN 45/15 EPGO281
ConvF	1.53
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 17 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	710.0
Relative permittivity (real part)	41.90
Conductivity (S/m)	0.89
Variation (%)	-0.54

Maximum location: X=-51.00, Y=-59.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.049712
SAR 1g (W/Kg)	0.075391

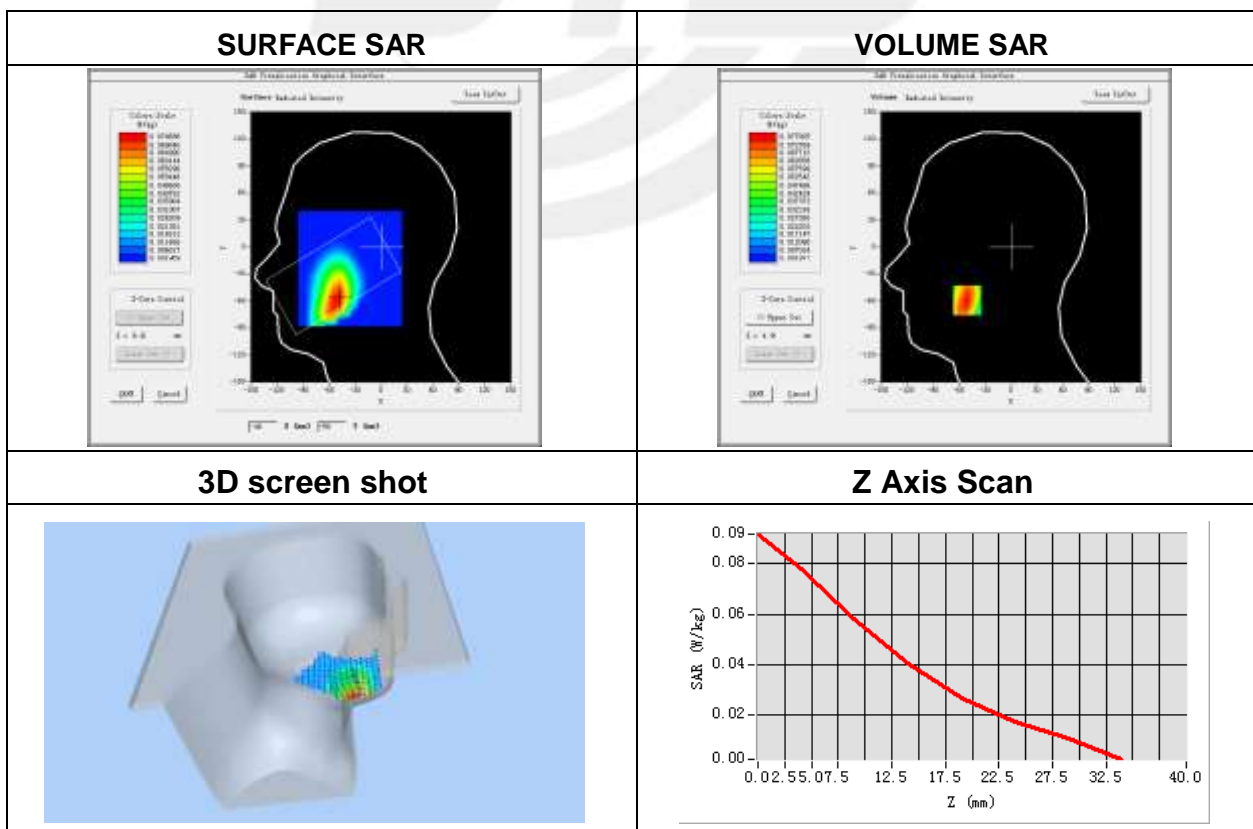


Plot 30: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-26
Probe	SN 45/15 EPGO281
ConvF	1.59
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 17 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	710.0
Relative permittivity (real part)	55.50
Conductivity (S/m)	0.96
Variation (%)	1.05

Maximum location: X=0.00, Y=40.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.080962
SAR 1g (W/Kg)	0.117814

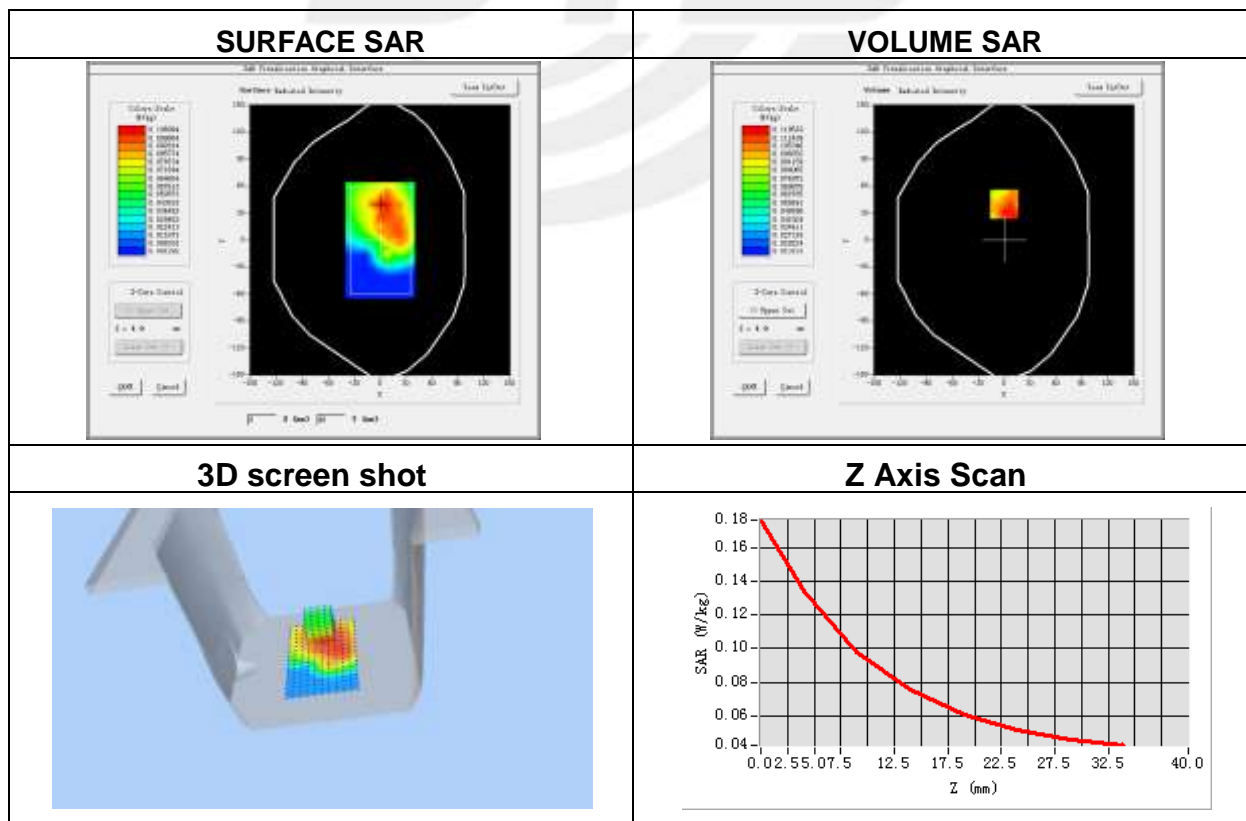


Plot 31: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 25 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1882.5
Relative permittivity (real part)	40.0
Conductivity (S/m)	1.40
Variation (%)	-3.14

Maximum location: X=-70.00, Y=1.00

SAR Peak: 0.31 W/kg

SAR 10g (W/Kg)	0.110107
SAR 1g (W/Kg)	0.193568

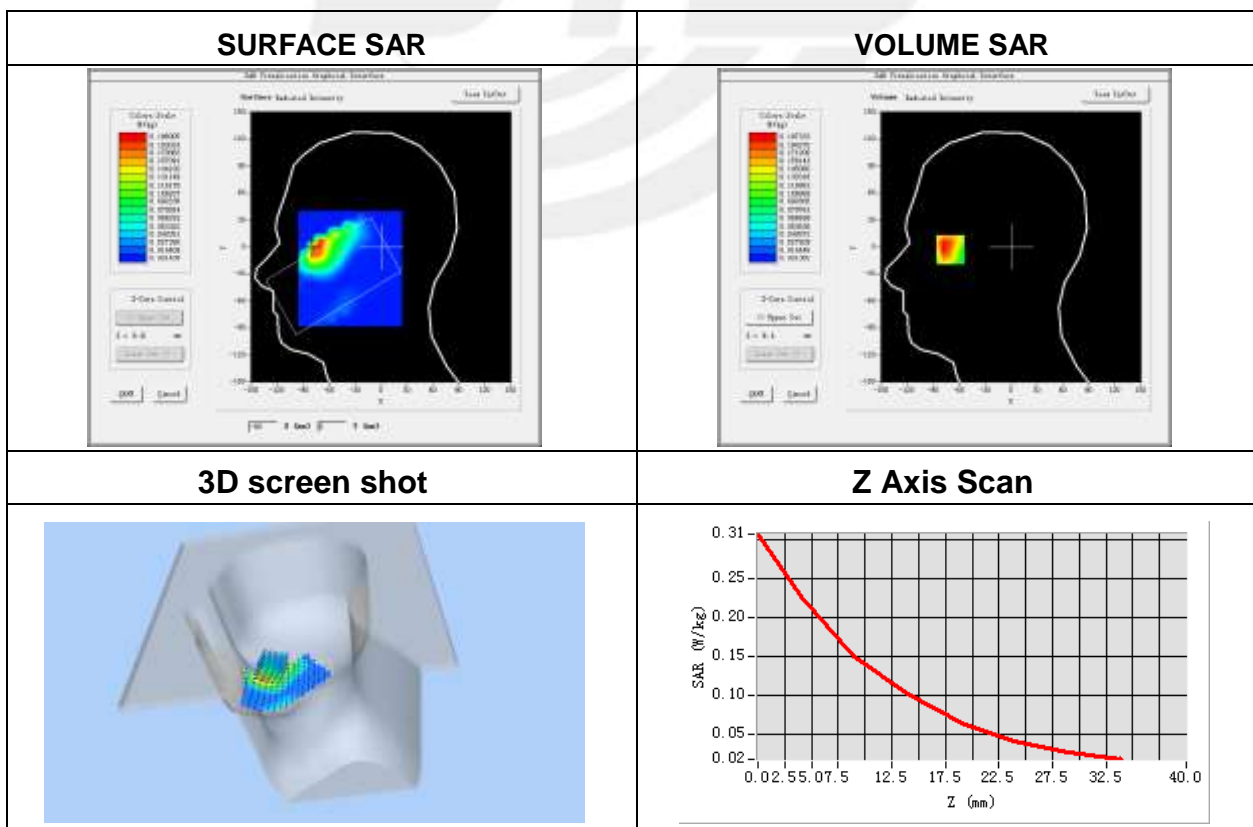


Plot 32: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-29
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 25 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1882.5
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	1.17

Maximum location: X=-22.00, Y=-7.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.163316
SAR 1g (W/Kg)	0.269731

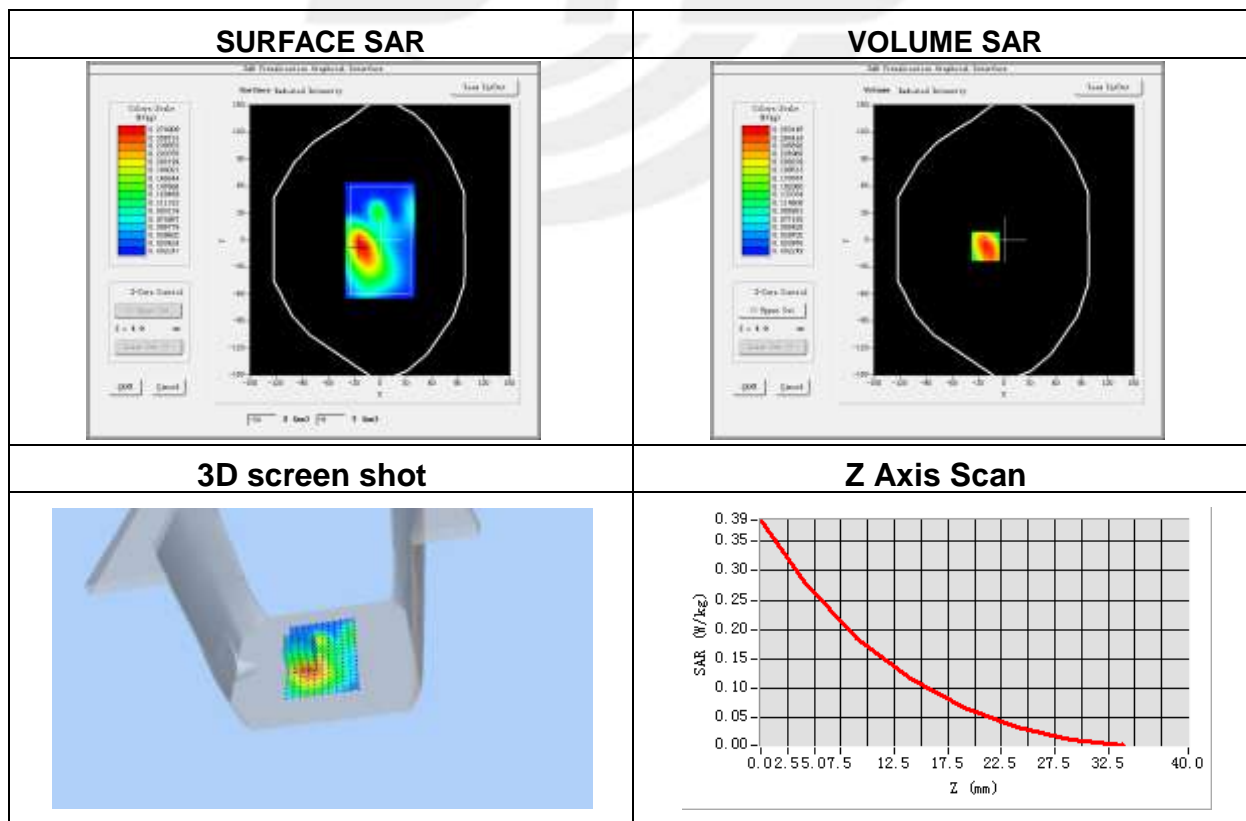


Plot 33: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 26 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844.0
Relative permittivity (real part)	41.50
Conductivity (S/m)	0.90
Variation (%)	3.33

Maximum location: X=-71.00, Y=-39.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.035723
SAR 1g (W/Kg)	0.052149

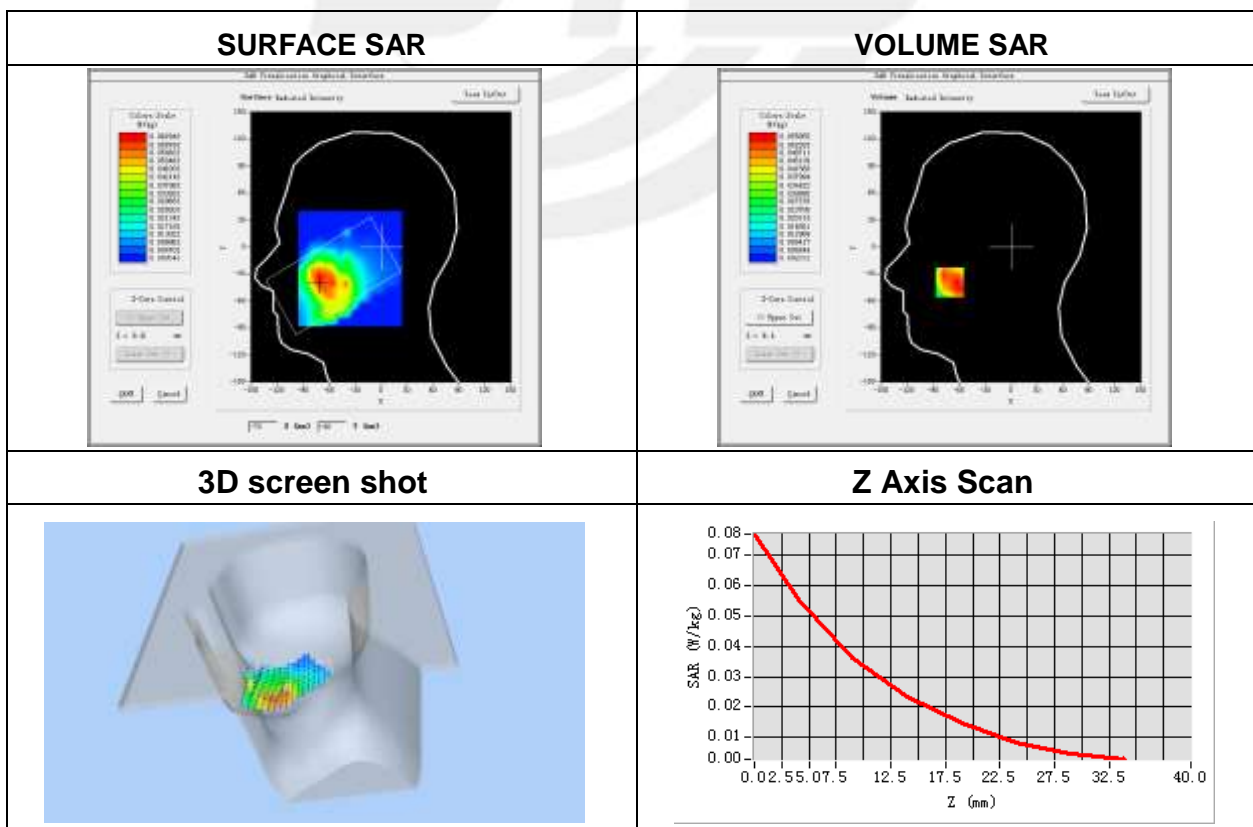


Plot 34: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-27
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 26 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844.0
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	1.45

Maximum location: X=8.00, Y=49.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.019753
SAR 1g (W/Kg)	0.038062

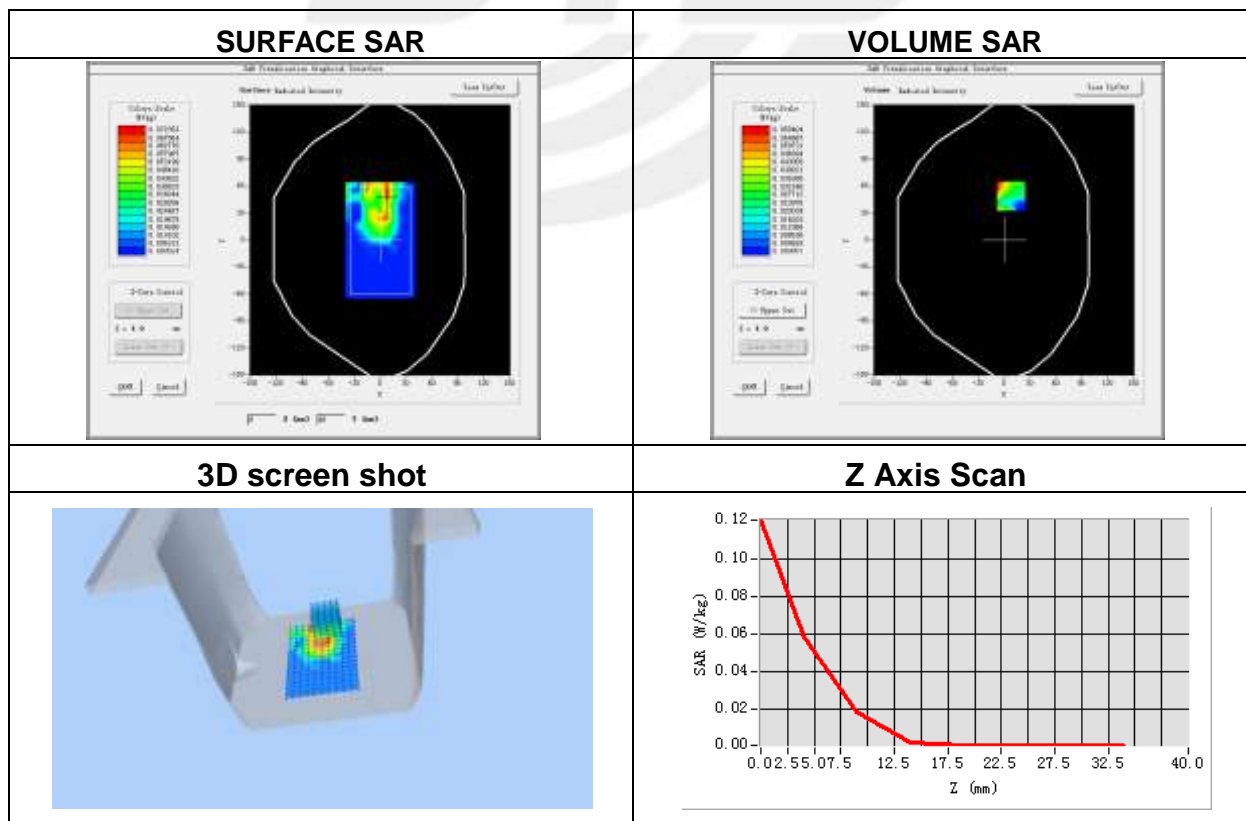


Plot 35: DUT: Smart phone; EUT Model: Titan

Test Date	2019-09-02
Probe	SN 45/15 EPGO281
ConvF	2.32
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 41 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2593.0
Relative permittivity (real part)	39.0
Conductivity (S/m)	1.96
Variation (%)	0.45

Maximum location: X=-80.00, Y=-43.00

SAR Peak: 0.03 W/kg

SAR 10g (W/Kg)	0.008264
SAR 1g (W/Kg)	0.017694

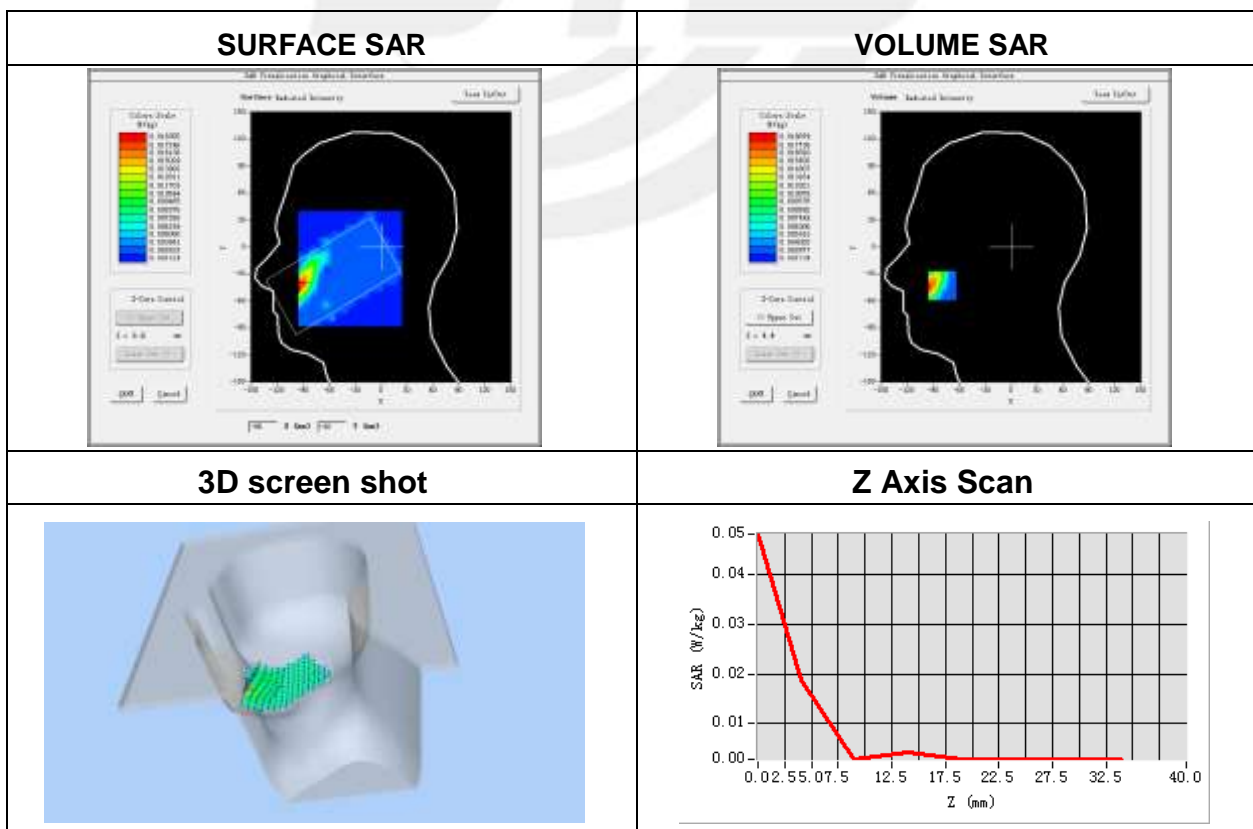


Plot 36: DUT: Smart phone; EUT Model: Titan

Test Date	2019-09-02
Probe	SN 45/15 EPGO281
ConvF	2.38
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 41 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2593
Relative permittivity (real part)	52.50
Conductivity (S/m)	2.16
Variation (%)	2.27

Maximum location: X=1.00, Y=25.00

SAR Peak: 1.18 W/kg

SAR 10g (W/Kg)	0.315016
SAR 1g (W/Kg)	0.661811

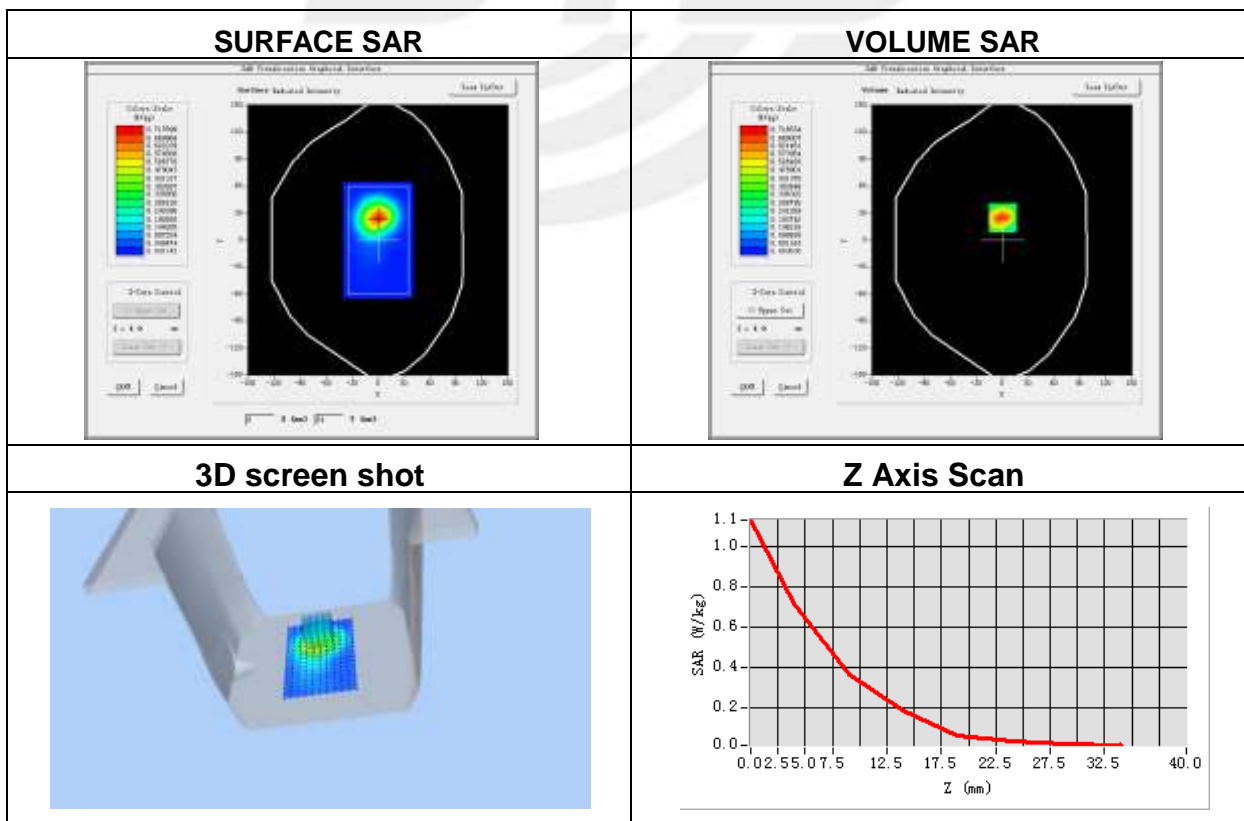


Plot 37: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-28
Probe	SN 45/15 EPGO281
ConvF	1.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	LTE Band 66 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720.0
Relative permittivity (real part)	40.0
Conductivity (S/m)	1.40
Variation (%)	-3.42

Maximum location: X=-64.00, Y=-8.00

SAR Peak: 0.44 W/kg

SAR 10g (W/Kg)	0.183732
SAR 1g (W/Kg)	0.293896

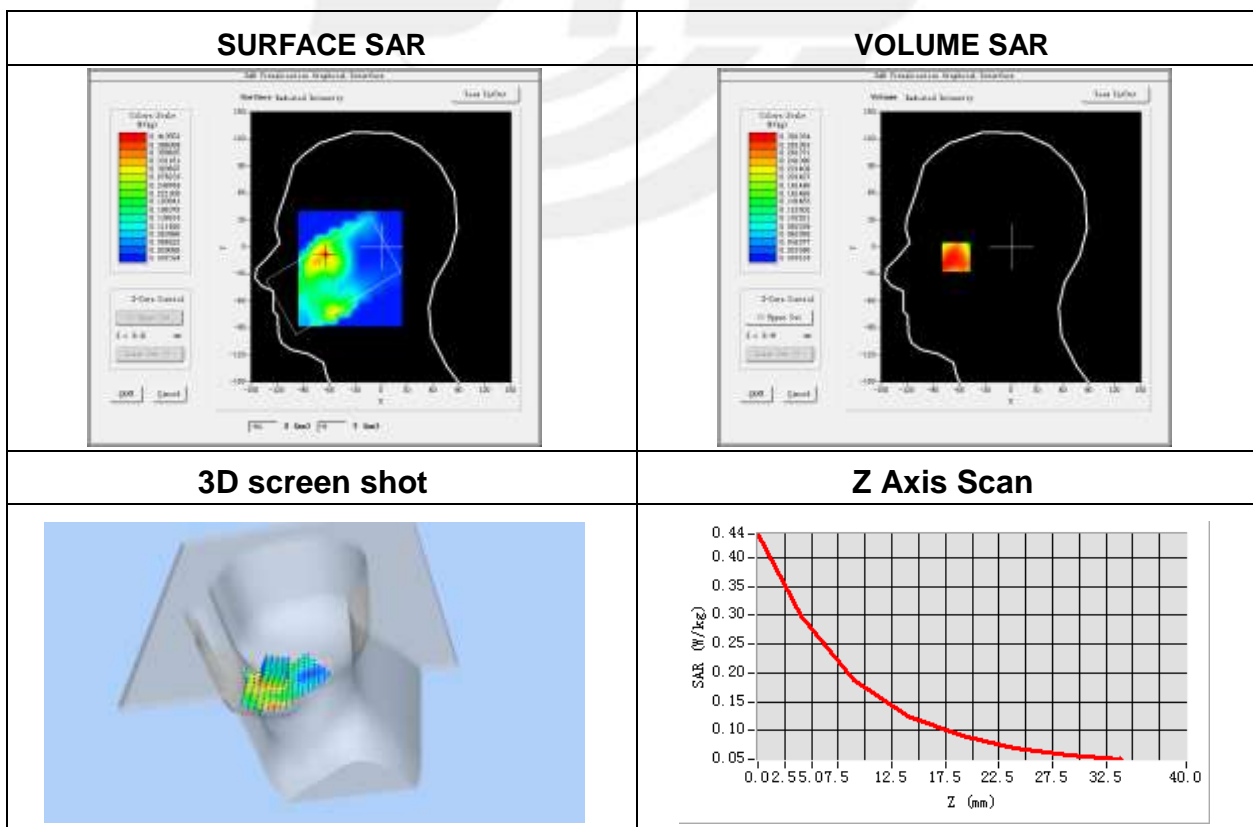


Plot 38: DUT: Smart phone; EUT Model: Titan

Test Date	2019-08-28
Probe	SN 45/15 EPGO281
ConvF	1.87
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1720.0
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-2.03

Maximum location: X=5.00, Y=-9.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.224667
SAR 1g (W/Kg)	0.409616

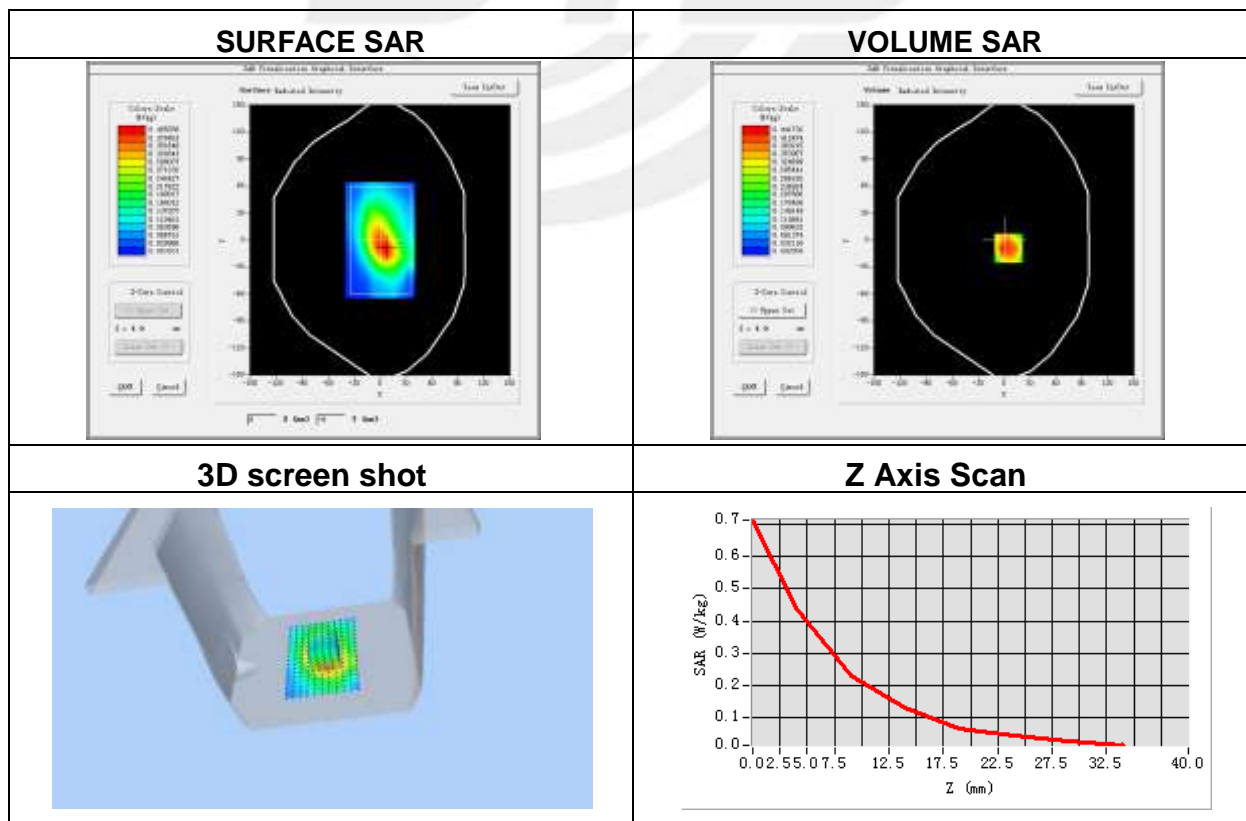



Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

