



## TEST REPORT # 316398 WLAN

### LSR Job #: C-2664

#### Compliance Testing of:

Bryant Evolution Connex Control Thermostat

#### Test Date(s):

2/8/17 - 3/24/17 & 5/25/17 - 6/9/17 & 7/13/17

#### Prepared For:

Attn: Gregg Householder  
United Technologies Electronic Controls Inc.  
3650 W 200 N  
Huntington, IN 46750

**This Test Report is issued under the Authority of:**  
Coty Hammerer, EMC Engineer

Signature: *Coty Hammerer*

Date: 7/14/17

**Test Report Reviewed by:**  
Adam Alger, Quality Systems Engineer

Signature: *Adam Alger*

Date: 7/11/17

**Project Engineer:**  
Coty Hammerer, EMC Engineer

Signature: *Coty Hammerer* Date: 7/5/17

*This Test Report may not be reproduced, except in full, without written approval of Laird Technologies, Inc.*

## TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION .....	4
1.1 - Scope.....	4
1.2 – Normative References.....	4
1.3 -Laird Technologies, Inc. Test Lab in Review .....	5
EXHIBIT 2. PERFORMANCE ASSESSMENT .....	6
2.1 – Client Information .....	6
2.2 - Equipment Under Test (EUT) Information .....	6
2.3 - Associated Antenna Description.....	6
2.4 - EUT'S Technical Specifications.....	7
2.5 - Product Description.....	8
EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS .....	10
3.1 - Climate Test Conditions .....	10
3.2 - Applicability & Summary Of EMC Emission Test Results .....	10
3.3 - Modifications Incorporated In The EUT For Compliance Purposes.....	10
3.4 - Deviations & Exclusions From Test Specifications .....	10
EXHIBIT 4. CONFORMANCE SUMMARY .....	11
EXHIBIT 5. UNWANTED EMISSIONS INTO THE RESTRICTED FREQUENCY BANDS.....	12
5.1 - Test Setup.....	12
5.2 - Test Procedure.....	12
5.3 - Test Equipment Utilized .....	13
5.4 - Test Results .....	13
5.5 - Calculation of Radiated Emissions Limits and reported data. ....	14
5.6 - Data .....	15
5.7 – Screen Captures. ....	16
EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE.....	21
6.1   Test Setup.....	21
6.2   Test Procedure.....	21
6.3   Test Equipment Utilized.....	21
6.4   Test Results .....	21
6.5   FCC Limits of Conducted Emissions at the AC Mains Ports .....	22
6.6   Conducted Emissions Test Data Chart.....	23
EXHIBIT 7. OCCUPIED BANDWIDTH.....	25

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

7.1 - Limits.....	25
7.2 - Method of Measurements.....	25
7.3 - Test Data .....	26
7.4 – Screen Captures .....	27
EXHIBIT 8. BAND EDGE MEASUREMENTS .....	45
8.1 - Method of Measurements.....	45
8.2. Band Edge Screen Captures .....	45
EXHIBIT 9. POWER OUTPUT (CONDUCTED): 15.247(b) .....	63
9.1 - Method of Measurements.....	63
9.2 - Test Data .....	63
EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS: 15.247(d) .....	70
10.1 - Limits.....	70
10.2 – Conducted Harmonic And Spurious RF Measurements.....	70
10.3 - Test Data .....	71
EXHIBIT 11. POWER SPECTRAL DENSITIES: 15.247(e) .....	73
11.1     Limits .....	73
11.2     Test Data .....	74
11.3     Screen Captures – Power Spectral Density .....	75
EXHIBIT 12. FREQUENCY STABILITY OVER VOLTAGE VARIATIONS .....	83
APPENDIX A – Test Equipment List.....	84
APPENDIX B – Test Standards: CURRENT PUBLICATION DATES RADIO .....	85
APPENDIX C - Uncertainty Summary .....	86

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 1. INTRODUCTION

### 1.1 - Scope

References:	FCC Part 15, Subpart C, Section 15.247 RSS 247
Title:	FCC : Telecommunication – Code of Federal Regulations, CFR 47, Part 15
Purpose of Test:	FCC and IC Certification Authorization for Low-Power License-Exempt Transmitters.
Test Procedures:	FCC KDB 558074 D01 DTS Measurement Guidance v04 ANSI C63.10 RSS 247 RSS GEN
Environmental Classification:	Residential

### 1.2 – Normative References

Publication	Year	Title
FCC CFR Parts 0-15	2017	Code of Federal Regulations – Telecommunications
ANSI C63.4	2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices
RSS-GEN Issue 4	2014	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.10	2013	American National Standard for Testing Unlicensed Wireless Devices
FCC KDB 558074 D01 DTS Measurement Guidance v04	2017	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## **1.3 -Laird Technologies, Inc. Test Lab in Review**

*As an EMC Testing Laboratory, our Accreditation and Assessments are recognized through the following:*

---



TESTING CERT #1255.01

### A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025: 2005 with Electrical (EMC) Scope of Accreditation  
A2LA Certificate Number: 1255.01

---



### Federal Communications Commission (FCC) – USA

Listing of two 3 Meter Semi-Anechoic Chambers based on Title 47 CFR – Part 2.948  
FCC Registration Number: 90756

---



### Industry Canada

On file, 3 Meter Semi-Anechoic Chamber based on RSS-GEN – Issue 4  
File Number: IC 3088A-2

On file, 3 Meter Semi-Anechoic Chamber based on RSS-GEN – Issue 4  
File Number: IC 3088A-3

---

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1 - Client Information

Manufacturer Name:	United Technology Electronic Controls Inc.
Address:	3650 W 200 N Huntington, IN 46750
Contact Name:	Gregg Householder

### 2.2 - Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	Bryant Evolution Connex Control Thermostat
Model Number:	SYSTXBBECC01-B
Serial Number:	Engineering Samples #26 and #33

### 2.3 - Associated Antenna Description

The associated antenna is a chip antenna, a WiLink 8 CC1835 with a part # of ANT162442DT-2001A2. The peak antenna gain of this chip antenna is +2.1 dBi.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## 2.4 - EUT'S Technical Specifications

EUT Frequency Range (in MHz)	2412 – 2462 MHz	
Type of Modulation	DSSS (802.11b) OFDM (802.11g and n)	
Transmitter Spurious (worst case) at 3 meters	55.0 dB $\mu$ V/m (Peak) at 4824 MHz, 53.28 dB $\mu$ V/m (Average) at 4824 MHz	
Frequency Tolerance %, Hz, ppm	Better than 100 ppm	
Microprocessor Model # (if applicable)	N/A	
Antenna Information		
Detachable/non-detachable	Non-Detachable	
Type	Chip	
Gain	2.1 dBi	
EUT will be operated under FCC Rule Part(s)	Title 47 part 15.247	
Modular Filing	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No

### Radio Characteristics

	802.11 b	802.11 g	802.11 n
Maximum Average conducted Output Power (dBm)	15.94	15.54	16.949
Maximum Average conducted Output Power (Watts)	0.0393	0.0358	0.0495
Minimum Average Conducted Output Power (dBm)	15.02	11.61	10.67
Minimum Average Conducted Output Power (Watts)	0.0318	0.0145	0.0117
99% BW (MHz)	14.58	18.32	18.41
6 dB BW (MHz)	11.12	15.95	15.28

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## 2.5 - Product Description

Product Description for Bryant Evolution Connex Control (BING)



The new Infinity System Control (SYSTXCCITC01-B) and Bryant Connex Control (SYSTXBBECC01-B) is the user interface and control for Infinity or Bryant system. The Infinity System Control communicates to other intelligent devices in the system, such as Furnace, fan coil, air conditioner and heat pump using a 4 wire digital communication interface (ABCD) bus.

The Infinity System Control offers the following hardware features:

1. A sleek, new flat glass design
2. 5" WQVGA landscape display at 480x272 resolution
3. An integrated capacitive touch interface with smart phone like response
4. On board flat lens infrared motion detector to support occupancy sensing
5. New Temperature / Humidity sensor for better performance
6. MicroSD card interface for flexible, concealed, mass storage area for pictures for wall control
7. WiFi ( w/MIMO) and Bluetooth Low Energy (BLE) radio to support internet connection and wireless sensors for zone control

The Infinity System Control has a rich graphical menu system which offers the following application features.



Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

1. 4 Programmable Comfort profiles – Home/Away/Sleep/Wake
2. Programmable schedule and Vacation menus
3. Energy Tracking information
4. Photo Upload capability to display
5. Zoning definition capability
6. Intelligent WiFi and BLE interface
7. Real time weather icon per zip code
8. Reminders for filter and accessories

There is an “i” button on each screen to help define what every button is for.

**Note:** For WLAN testing only the 2.4 GHz Band (802.11 b, g, and n) HT20 and 2.4 GHz MIMO (802.11 n) HT20 were tested during the specified test dates. The 5 GHz WLAN HT20 with and without Diversity along with the 2.4 GHz WLAN HT40 functionalities were not tested at any time.

**Note:** The AC Adapter/Transformer used to power the EUT throughout testing is not supplied with the unit. This power supply was for testing purposes only.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

### 3.1 - Climate Test Conditions

Temperature:	70 -74° F
Humidity:	30-42%
Pressure:	728-741mmHg

### 3.2 - Applicability & Summary Of EMC Emission Test Results

FCC and IC Paragraph	Test Requirements	Compliance (Yes/No)
FCC: 15.207 IC: RSS-GEN 8.8	Power Line Conducted Emissions Measurements	Yes
FCC: 2.1049 IC: RSS-GEN 6.6	99% Bandwidth	Yes
FCC: 15.247 (b)(3) IC: RSS-247 5.4 (4)	Maximum Output Power	Yes
FCC: 2.1055 (d) IC: RSS-GEN 6.11	Frequency Stability	Yes
FCC: 15.247(d) IC: RSS-247 5.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
FCC: 15.247 (a)(2) IC: RSS-247 5.2 (1)	6 dB Bandwidth of a Digital Modulation System	Yes
FCC: 15.247 (e) IC: RSS-247 5.2 (2)	Power Spectral Density of a Digital Modulation System	Yes
FCC: 15.247(d), 15.209 & 15.205 IC: RSS-GEN 8.10	Spurious Radiated Emissions in Restricted Bands	Yes

### 3.3 - Modifications Incorporated In The EUT For Compliance Purposes

None       Yes (explain below)

### 3.4 - Deviations & Exclusions From Test Specifications

None       Yes (explain below)

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 4. CONFORMANCE SUMMARY

When tested between February 8<sup>th</sup> to March 24<sup>th</sup> of 2017 and May 25<sup>th</sup> to June 9<sup>th</sup> of 2017 and July 13<sup>th</sup> of 2017, it was determined that the EUT, BING, was compliant to the requirements of:

FCC Title 47 CFR Part 15.247  
RSS 247 Issue 2

Using the methods of ANSI C63.10-2013, RSS GEN, and KDB 558074 D01 DTS Measurement Guidance v04.

Any modifications made to the EUT after the specified test date(s) will invalidate the data herein.

If some emissions measurements are seen to be within the uncertainty value, as listed in Appendix C there is a possibility that this unit may not meet the required limit specification if subsequently tested.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 5. UNWANTED EMISSIONS INTO THE RESTRICTED FREQUENCY BANDS.

### 5.1 - Test Setup

The test setup was assembled in accordance with Title 47, CFR FCC Part 15 and ANSI C63.10-2013. The EUT was placed on a 150 cm high non-conductive pedestal (80 cm for measurements under 1 GHz), centered on a flush mounted turntable inside a 3 meter Semi-Anechoic Chamber. The EUT was operated in continuous transmit mode. The unit was tested on the low, middle and high channels, controllable via proprietary software provided by the manufacturer.

The applicable limits apply at a 3 meter distance. The calculations to determine these limits are detailed in the following pages. Please refer to Appendix A for a complete list of test equipment. The test sample was operated on one of three (3) standard channels to comply with FCC Part 15.31(m).

### 5.2 - Test Procedure

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 30 MHz to 25000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Biconical Antenna was used to measure emissions from 30 MHz to 200 MHz, and a Log Periodic Antenna was used to measure emissions from 200 MHz to 1000 MHz. A Double-Ridged Waveguide Horn Antenna was used from 1 GHz to 18 GHz while a standard gain horn antenna was used in the 18 GHz to 25 GHz range. The maximum radiated RF emissions between 30MHz to 25 GHz were found by raising and lowering the sense antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities. A tilt gear was utilized to keep the EUT within the cone of radiation for measurements above 1 GHz. Attenuating foam lined the chamber floor between the EUT and Mast for measurements above 1 GHz.

The EUT was positioned in a single orientation in which it is intended to be installed.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

### **5.3 - Test Equipment Utilized**

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at a calibration laboratory accredited to ISO 17025, and are traceable to the SI standard. The resulting correction factors and the cable loss factors from these calibrations were entered into the EMI Receiver database. As a result, the data taken from the EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The EMI Receiver was operated with a resolution bandwidth of 120 kHz for measurements below 1 GHz (video bandwidth of at least 300 kHz), and a resolution bandwidth of 1 MHz for measurements above 1 GHz (video bandwidth of at least 3 MHz). For some plots, a reduced video bandwidth was used in order to identify spurious emissions (The relevant plots are labeled as such). In these cases, the standard video bandwidth was used with the appropriate detectors for measurement.

### **5.4 - Test Results**

The EUT was found to **MEET** the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.247 and RSS 247 for a DTS transmitter. The frequencies with significant RF signal strength were recorded and plotted as shown in the Data Charts and Graphs.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## **5.5 - Calculation of Radiated Emissions Limits and reported data.**

### **Reported data:**

For both fundamental and spurious emissions measurement, the data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

**Reported Measurement data = Raw receiver measurement (dB $\mu$ V) + Antenna correction Factor + Cable factor (dB) + Miscellaneous factors when applicable (dB) – amplification factor when applicable (dB).**

### **Generic example of reported data at 200 MHz:**

**Reported Measurement data = 18.2 (raw receiver measurement) + 15.8 (antenna factor) + 1.45 (cable factor) = 35.45 (dB $\mu$ V/m).**

As specified in 15.247 (d), radiated emissions that fall within the restricted band described in 15.205(c) for FCC must comply with the general emissions limit.

The following table depicts the general radiated emission limits above 30 MHz. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to any signals found in the 15.205 restricted bands. The mentioned limits correspond to those limits listed in RSS GEN.

Frequency (MHz)	3 m Limit $\mu$ V/m	3 m Limit (dB $\mu$ V/m)	1 m Limit (dB $\mu$ V/m)
30-88	100	40.0	-
88-216	150	43.5	-
216-960	200	46.0	-
960-40,000	500	54.0	63.5

Sample conversion of field strength ( $\mu$ V/m to dB $\mu$ V/m):

$$\text{dB}\mu\text{V/m} = 20 \log_{10} (100) = 40 \text{ dB}\mu\text{V/m} \text{ (from 30-88 MHz)}$$

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples #26 and #33	LSR Job #: C-2664

## 5.6 - Data

Manufacturer:	United Technology Electronic Controls				
Date(s) of Test:	2/8/17 to 3/24/17 and 5/25/17 to 6/9/17				
Project Engineer(s):	Coty Hammerer				
Test Engineer(s):	Coty Hammerer & Shane Dock				
Voltage:	120VAC/60 Hz to 24VAC (AC Adaptor/Transformer)				
Operation Mode:	Continuous transmit, modulated				
Environmental Conditions in the Lab:	Temperature: 70-74° F Relative Humidity: 30-42%				
EUT Power:		Single Phase 120VAC		3 Phase ____VAC	
	X	24VAC		Other: 3V	
EUT Placement:	X	150 cm non-conductive pedestal (80 cm for <1 GHz)		10cm Spacers	
EUT Test Location:	X	3 Meter Semi-Anechoic FCC Listed Chamber		3/10m OATS	
Measurements:		Pre-Compliance		Preliminary	X
Detectors Used:	X	Peak	X	Quasi-Peak	X
				Average	

### Measurements above 1 GHz:

*Note: Emissions below were maximized between the three channels tested in the standard EUT orientation.  
The worst-case emissions are reported*

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading A (dB $\mu$ V/m)	Average Reading B (dB $\mu$ V/m)	Peak Limit A (dB $\mu$ V/m)	Average Limit B (dB $\mu$ V/m)	Peak Margin A (dB)	Average Margin B (dB)	Antenna Polarity	EUT orientation	Notes
4824.00	1.22	206.60	54.80	53.17	74.00	54.00	19.20	0.83	H	V	1 Mbps
4824.00	1.00	113.60	55.00	53.28	74.00	54.00	19.00	0.72	V	V	1 Mbps
4874.00	1.00	197.00	50.72	47.19	74.00	54.00	23.28	6.81	H	V	1 Mbps
4874.00	1.96	266.00	52.96	46.98	74.00	54.00	21.04	7.02	V	V	1 Mbps
4924.00	1.00	198.00	50.51	47.10	74.00	54.00	23.49	6.90	H	V	1 Mbps
4924.00	1.00	114.60	46.87	42.01	74.00	54.00	27.13	11.99	V	V	1 Mbps
7386.00	1.56	76.10	49.03	42.14	74.00	54.00	24.97	11.86	H	V	1 Mbps
7386.00	1.50	339.50	49.60	42.06	74.00	54.00	24.40	11.94	V	V	1 Mbps
4824.00	1.84	145.00	48.66	38.73	74.00	54.00	25.34	15.27	H	V	MIMO, MCS8
4824.00	1.00	34.75	47.69	37.99	74.00	54.00	26.31	16.01	V	V	MIMO, MCS8
4874.00	1.73	204.25	43.89	34.43	74.00	54.00	30.11	19.57	H	V	MIMO, MCS8
4874.00	1.00	37.00	47.92	36.47	74.00	54.00	26.08	17.53	V	V	MIMO, MCS8
7311.00	1.50	99.00	46.26	36.38	74.00	54.00	27.74	17.62	H	V	MIMO, MCS8
4924.00	1.65	152.25	48.63	37.83	74.00	54.00	25.37	16.17	H	V	MIMO, MCS8
4924.00	1.42	33.75	46.94	36.78	74.00	54.00	27.06	17.22	V	V	MIMO, MCS8


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## 5.7 – Screen Captures.


The screen captures below are those using the Peak detector of the analyzer. In addition, the screen captures presented are those which were deemed to be an appropriate representation of the spectrum scan.

1 MBPS used for below screenshots. Screenshots shown are worst-case.

30 to 200 MHz, 3m distance

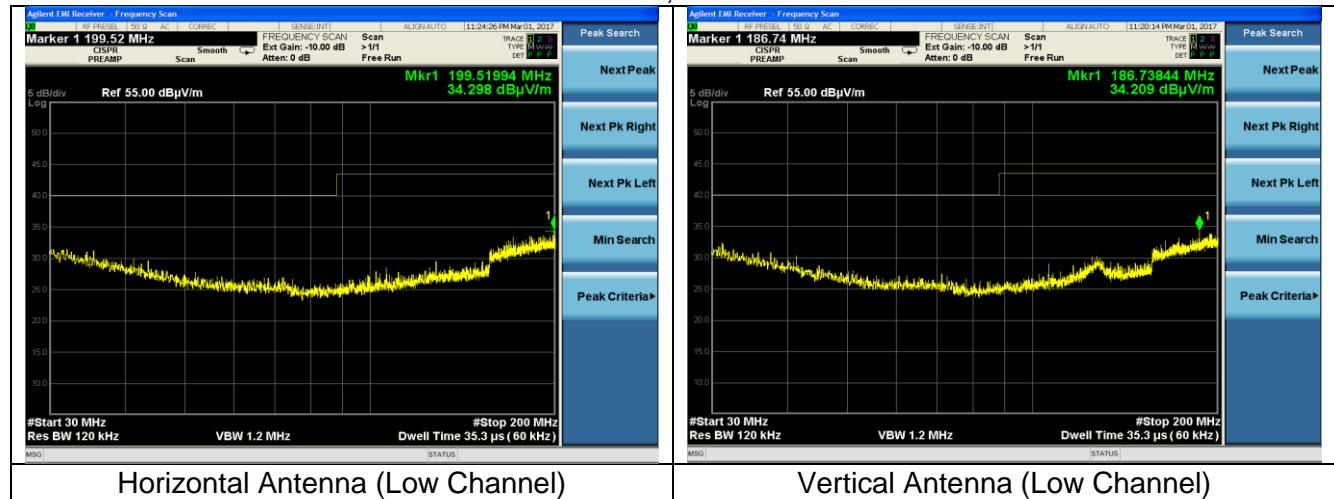


200 to 1000 MHz, 3m distance.

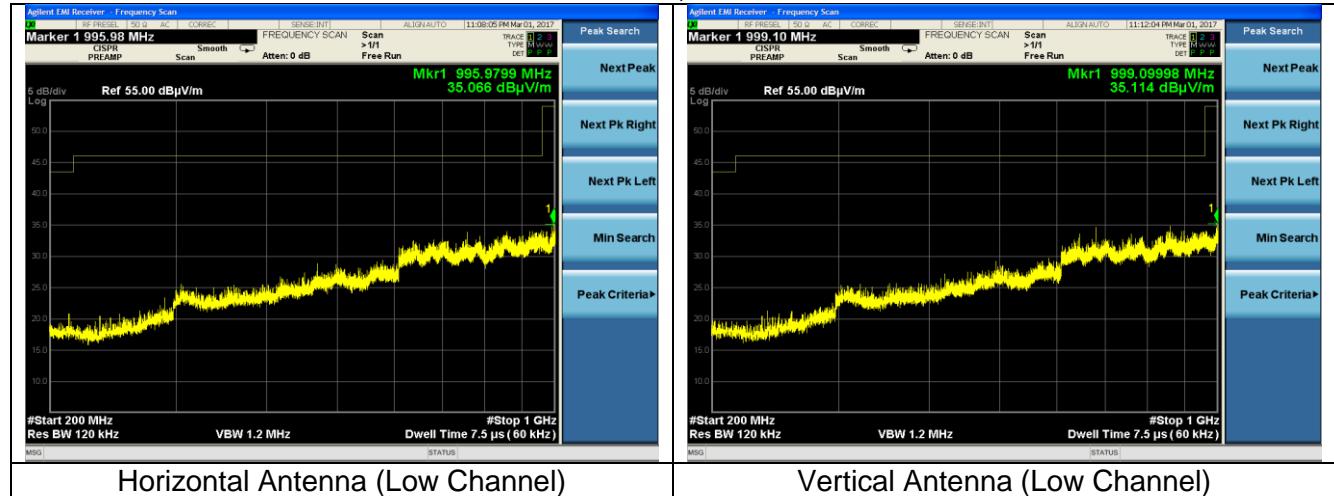

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


### 1000 to 2310 MHz, 3m distance (Reduced BW)

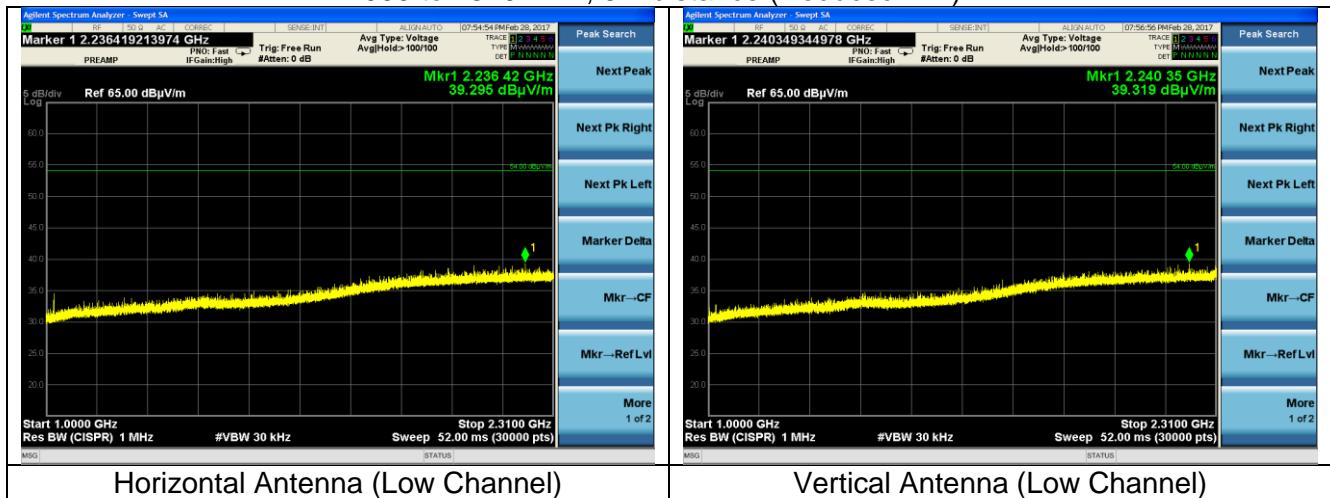


Note: The ranges 2310 to 2390, and 2483.5 to 2500 MHz is in section 8 of this report (Band-edges).

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

2500 to 4000 MHz, 3m distance. (Reduced Bandwidth)

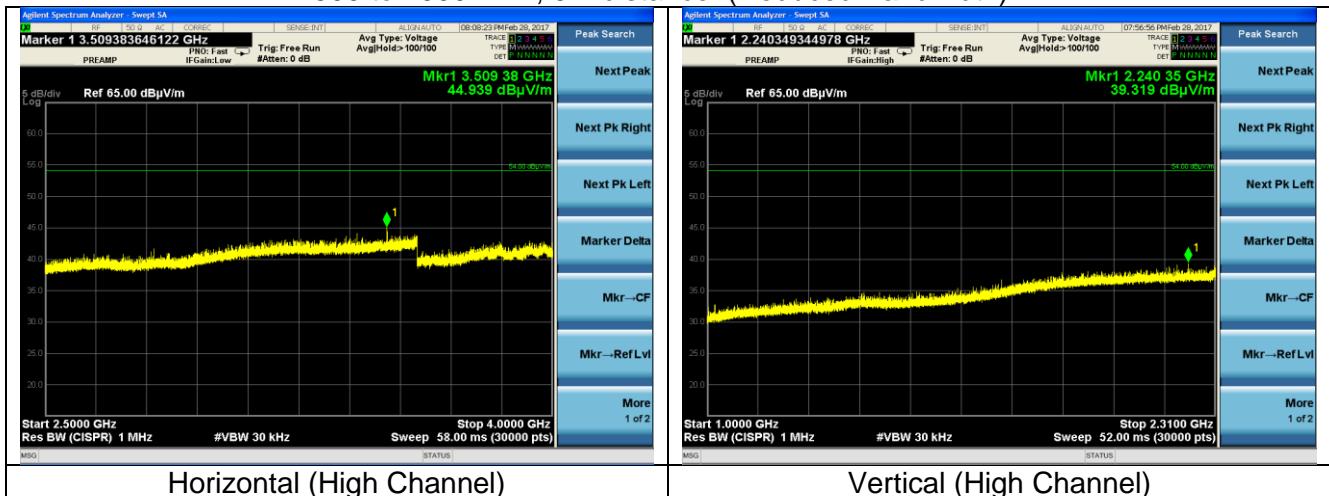


4000 to 18000 MHz, 3m distance, (Reduced Bandwidth)

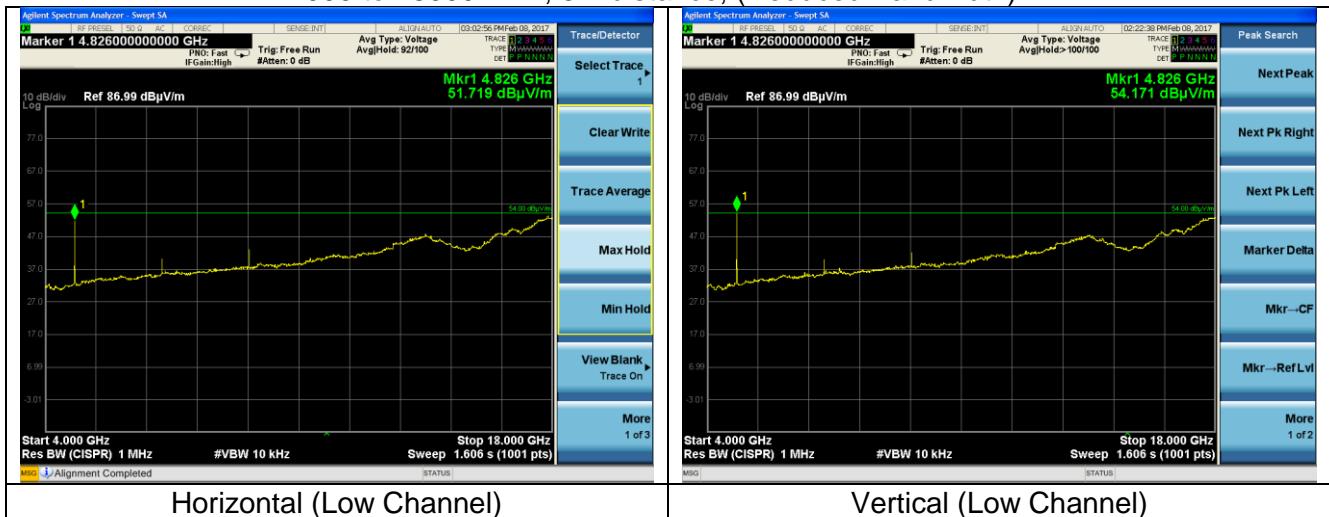

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


18000 to 25000 MHz, 3m distance, (Reduced Bandwidth)

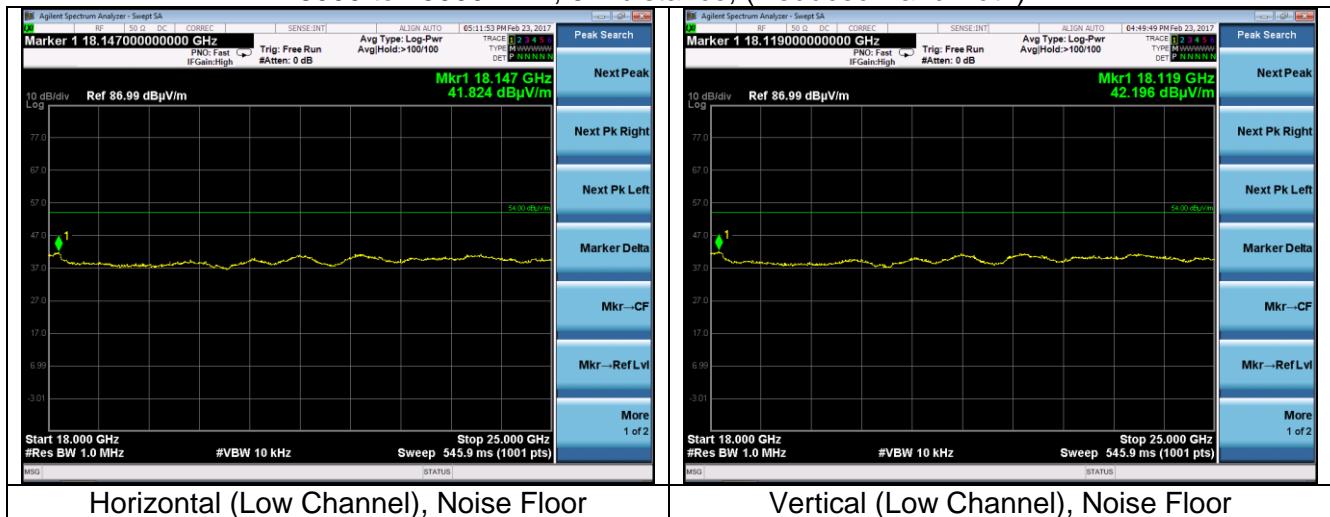


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

MCS8 (MIMO) used for below screenshots. Screenshots shown are worst-case.

4000 to 18000 MHz, 3m distance, (Reduced Bandwidth)

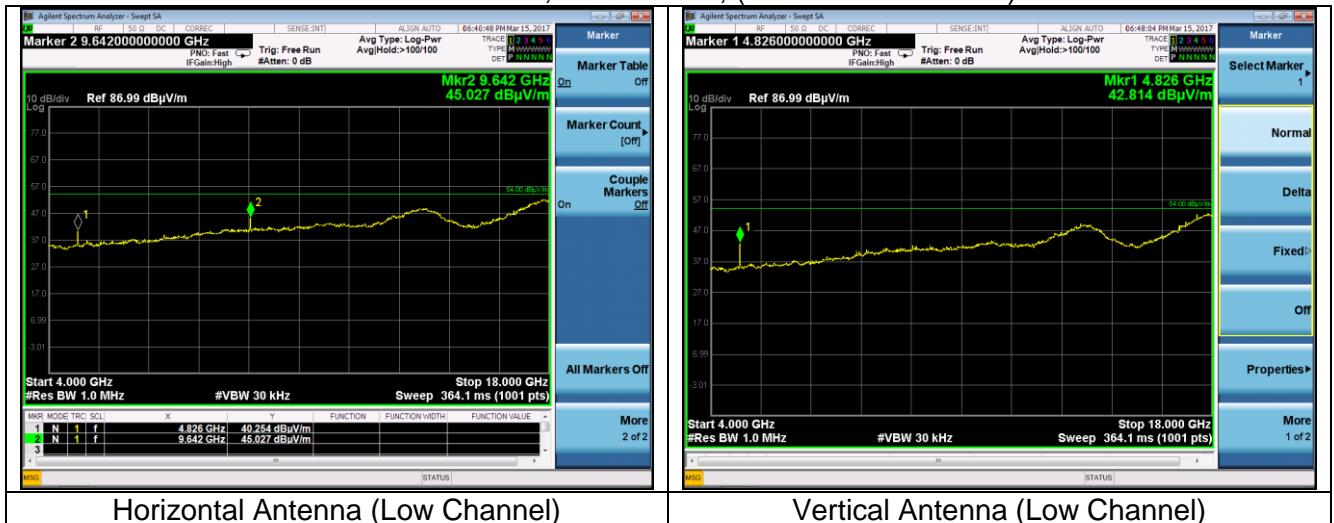

18000 to 25000 MHz, 3m distance, (Reduced Bandwidth)

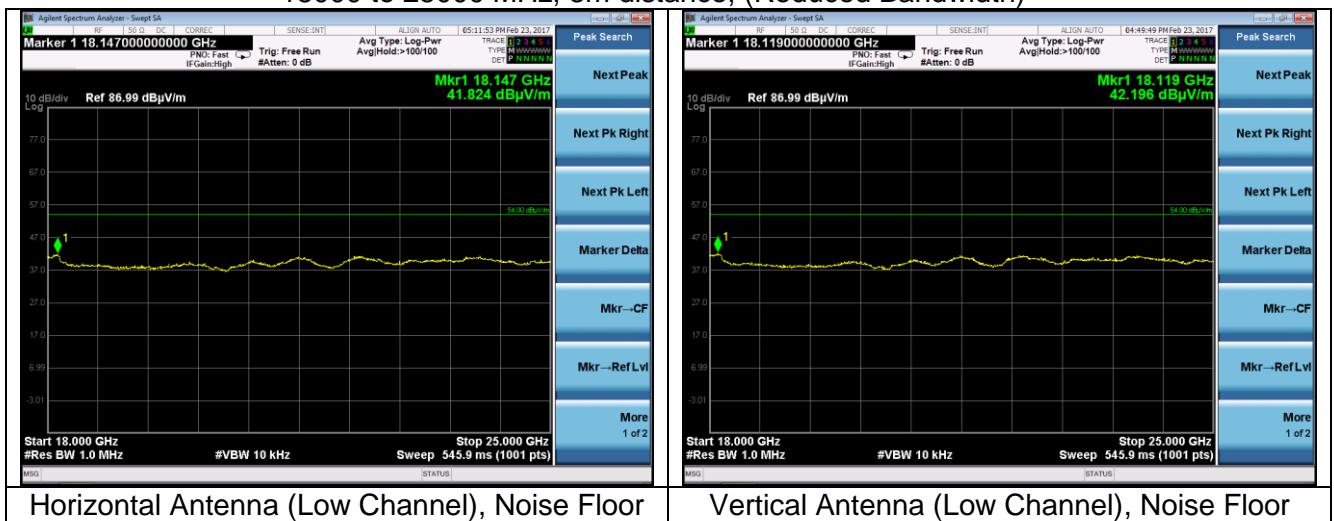

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE

### 6.1 Test Setup

The test area and setup are in accordance with ANSI C63.10 and with Title 47 CFR, FCC Part 15/ The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The power supply was then plugged into a  $50\Omega$  (ohm) Line Impedance Stabilization Network (LISN). The AC power supply was provided via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to an EMI receiver System. The LISN used has the ability to be switched between either L1 (line) or L2 (neutral).

### 6.2 Test Procedure

The EUT was investigated in continuous modulated transmit mode for this portion of the testing. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

### 6.3 Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is provided in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. The emissions are measured on the EMI System, which contains correction factors to account for the equipment used in measurements.

### 6.4 Test Results

The EUT was found to **MEET** the Conducted Emission requirements of FCC Part 15.207 for Conducted Emissions for an Intentional Radiator. See the Data Charts and Graphs for more details of the test results.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## 6.5 FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range (MHz)	Class B Limits (dB $\mu$ V)	
	Quasi-Peak	Average
0.150 -0.50 *	66-56	56-46
0.5 – 5.0	56	46
5.0 – 30	60	50

\* The limit decreases linearly with the Logarithm of the frequency in this range.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## 6.6 Conducted Emissions Test Data Chart

Frequency Range inspected: 150 KHz to 30 MHz

Manufacturer:	United Technology Electronic Controls				
Date(s) of Test:	3/22/17				
Project Engineer:	Coty Hammerer				
Test Engineer:	Khairul Aidi Zainal				
Voltage:	24VAC via a (120VAC/60 Hz AC Adapter/ step-down transformer)				
Operation Mode:	Continuous transmit, modulated				
Environmental Conditions in the Lab:	Temperature: 71°F Relative Humidity: 42%				
Test Location:	X	AC Mains Test area			Chamber
EUT Placed On:	X	40cm from Vertical Ground Plane			10cm Spacers
	X	80cm above Ground Plane			Other:
Measurements:		Pre-Compliance		Preliminary	X Final
Detectors Used:		Peak	X	Quasi-Peak	X Average

Data Table

Frequency (MHz)	Line	Q-Peak Reading (dB $\mu$ V)	Q-Peak Limit (dB $\mu$ V)	Quasi-Peak Margin (dB)	Average Reading (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Average Margin (dB)
0.150	1	42.3	66.0	23.7	32.3	56.0	23.7
1.314	1	20.1	56.0	35.9	13.3	46.0	32.7
5.792	1	26.5	60.0	33.5	15.1	50.0	34.9
11.385	1	22.8	60.0	37.2	12.0	50.0	38.0
11.475	2	23.6	60.0	36.4	13.3	50.0	36.7
6.467	2	17.9	60.0	42.1	11.2	50.0	38.8
1.964	2	18.9	56.0	37.1	12.0	46.0	34.0


**Note:** The following data is representative of the worst case emissions. MCS8 (MIMO) with the middle channel selected was found to generate the highest emissions. Changing to the low and high channel of the EUT showed no difference in emissions.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## 6.8 Screen Captures – Conducted Emissions Test

These screen captures represent the worst-case Peak Emissions. For conducted emission measurements, both a Quasi-Peak detector function and an Average detector function are utilized.

### Transmit Mode, MCS8 (MIMO) (Mid Channel)

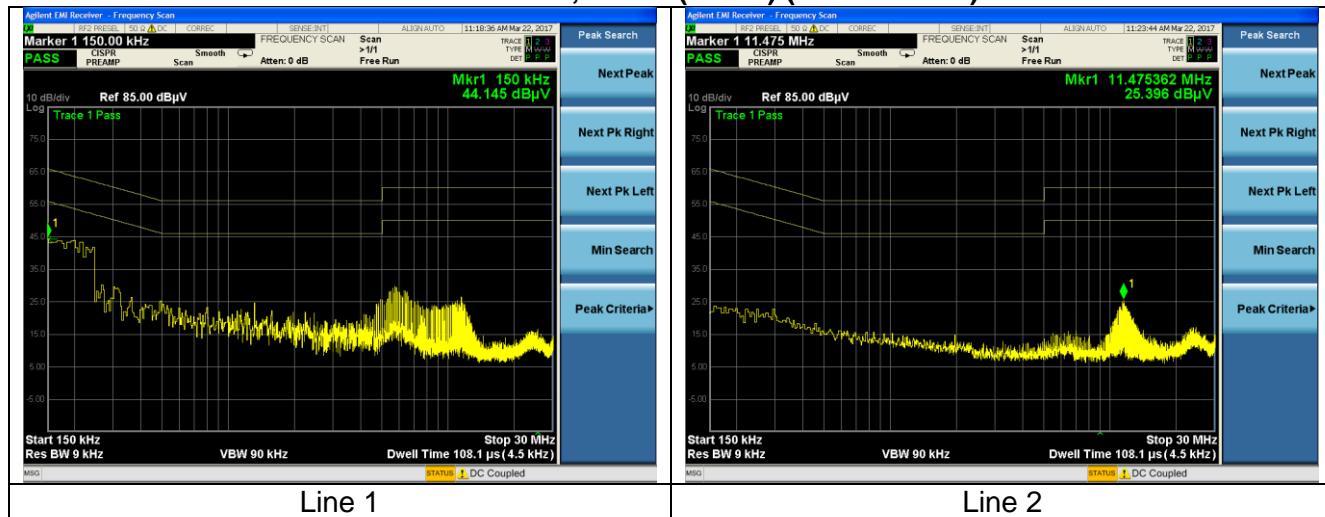

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 7. OCCUPIED BANDWIDTH

Test Engineer(s): Shane Dock

### **7.1 - Limits**

For a DTS system operating in the 2400 to 2483.5 MHz band, the minimum 6dB emission bandwidth limit is 500 kHz.

### **7.2 - Method of Measurements**

For this portion of the tests, a direct measurement of the transmitted signal was performed at the antenna port of the EUT, via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings thereby allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. A bandwidth measurement function that is built into the spectrum analyzer was used to measure the 20dB/emission bandwidth while the 6dB bandwidth was measured using **FCC OET KDB 558074 section 8**.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


### 7.3 - Test Data

Data Rate (Mbps)	Channel (MHz)	6 dB BW (MHz)	99% BW (MHz)
1	2412	10.09	14.51
	2437	10.08	14.55
	2462	10.09	14.58
6	2412	15.08	16.52
	2437	15.12	18.32
	2462	15.11	16.39
11	2412	11.12	14.54
	2437	9.8	14.58
	2462	11.08	14.56
54	2412	15.41	16.42
	2437	15.34	16.64
	2462	15.95	16.44
6.5	2412	15.09	17.61
	2437	15.11	18.41
	2462	15.1	17.62
65	2412	15.23	17.53
	2437	15.13	17.72
	2462	15.28	17.71


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## 7.4 – Screen Captures


Examples of bandwidth measurements:

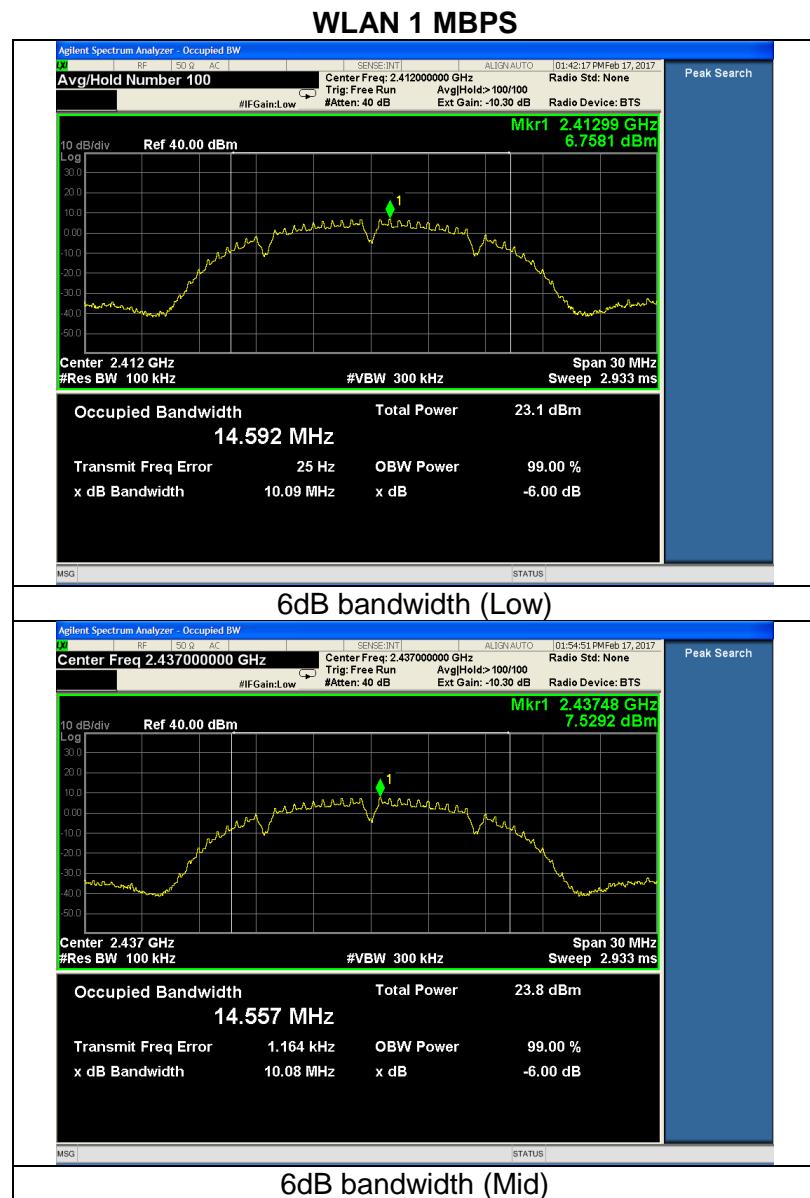

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

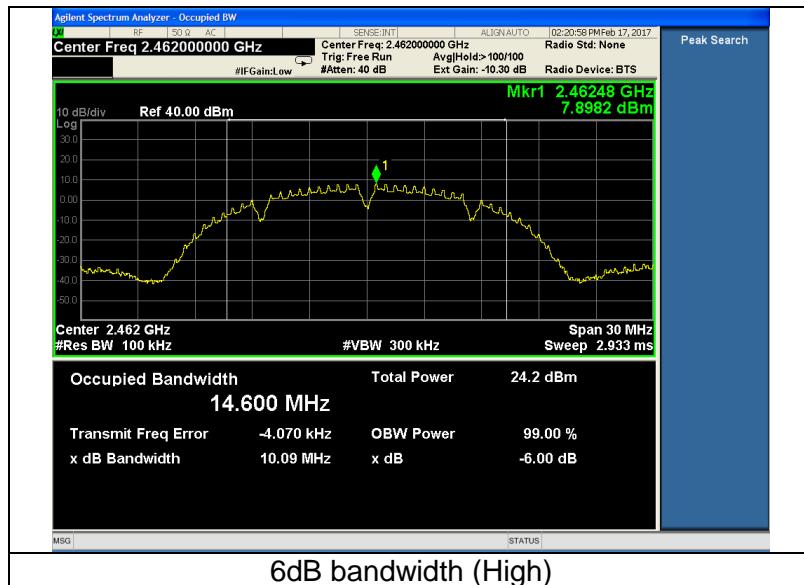


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

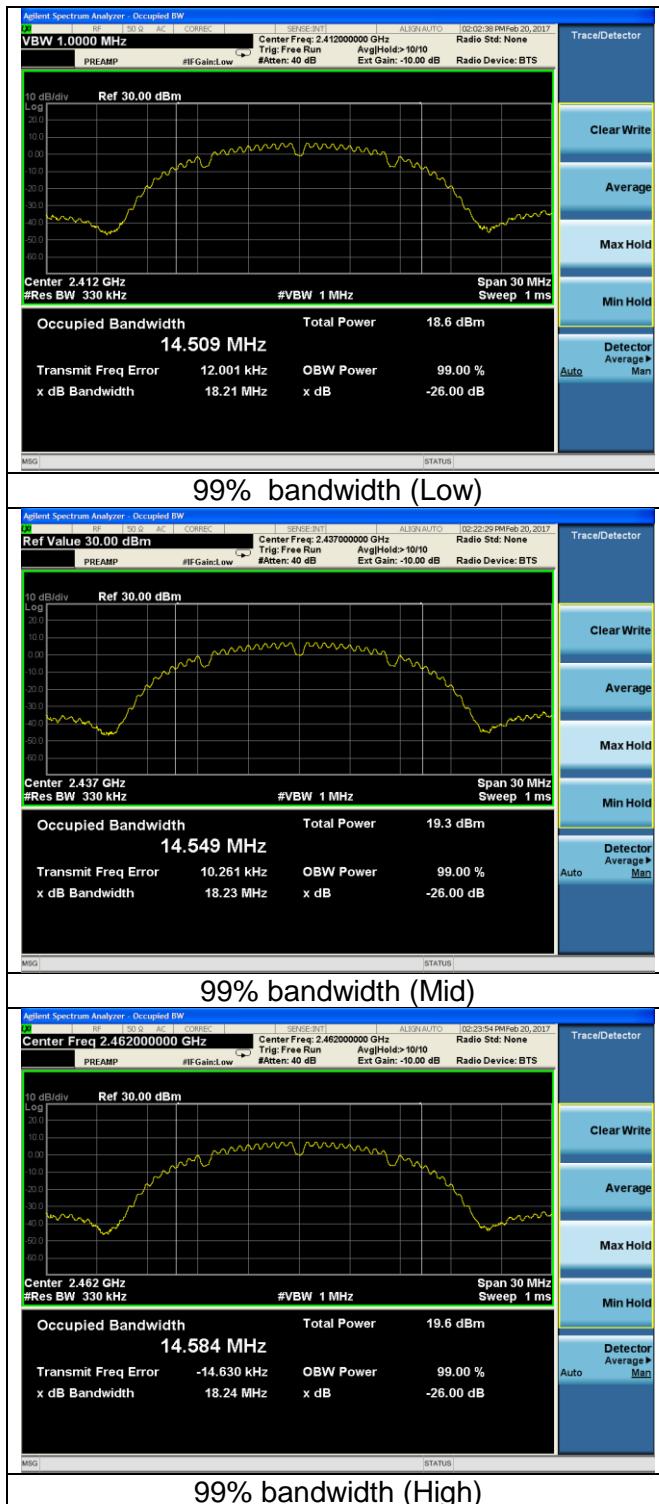


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


## WLAN 6 MBPS

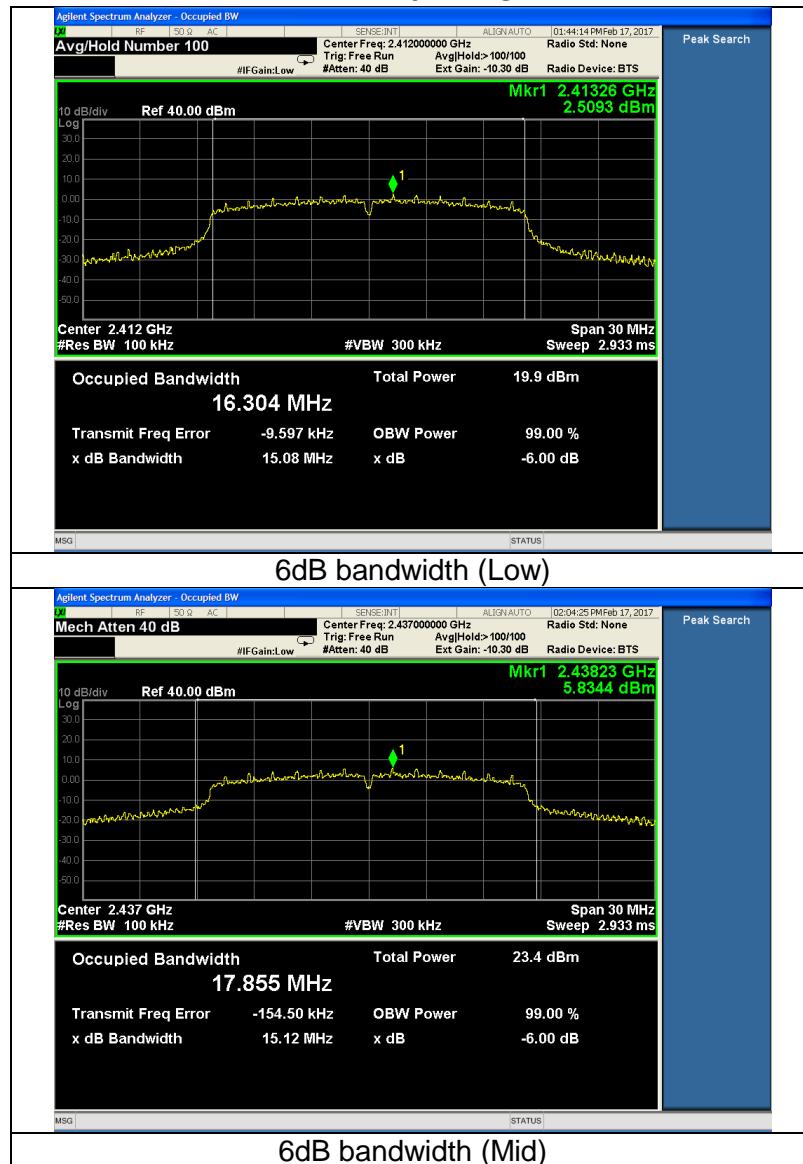

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

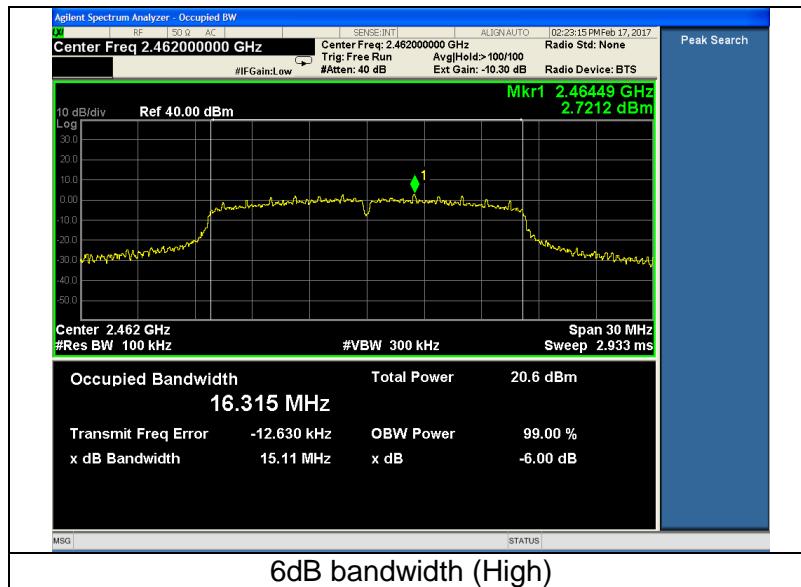


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

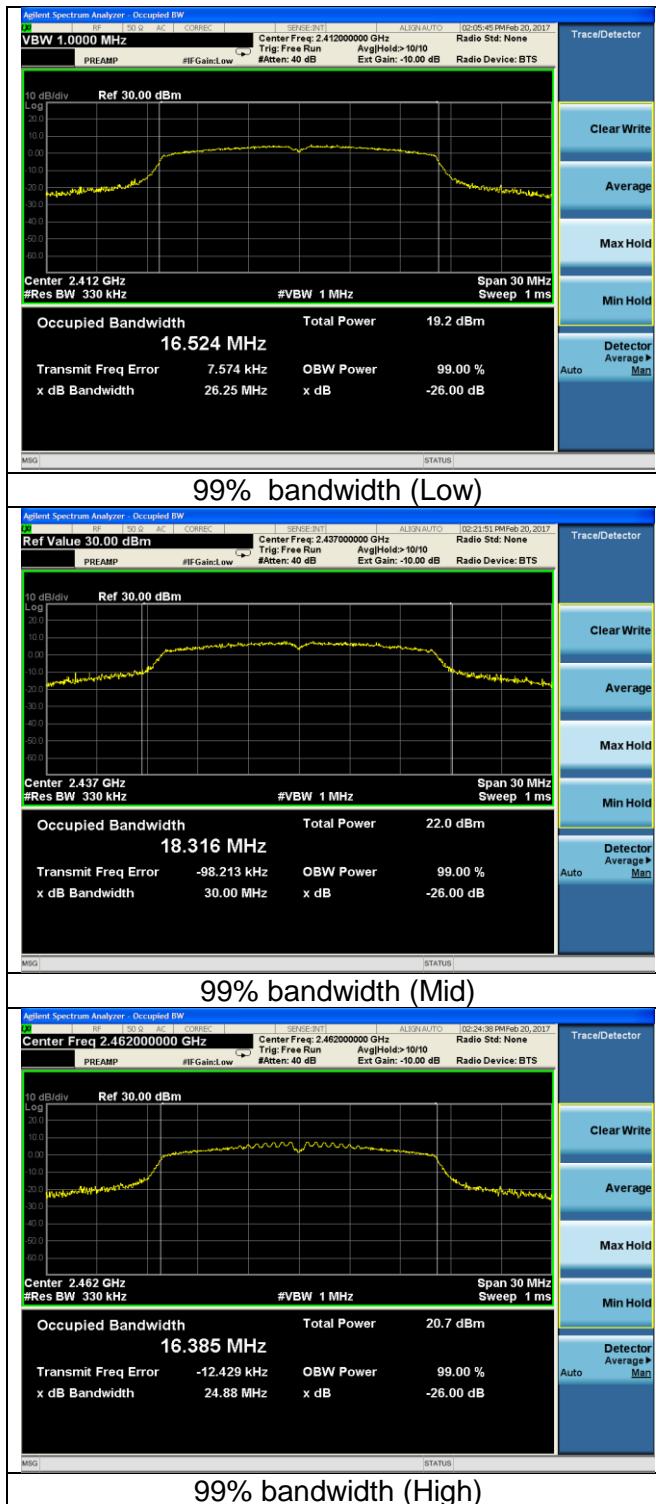

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


## WLAN 11 MBPS

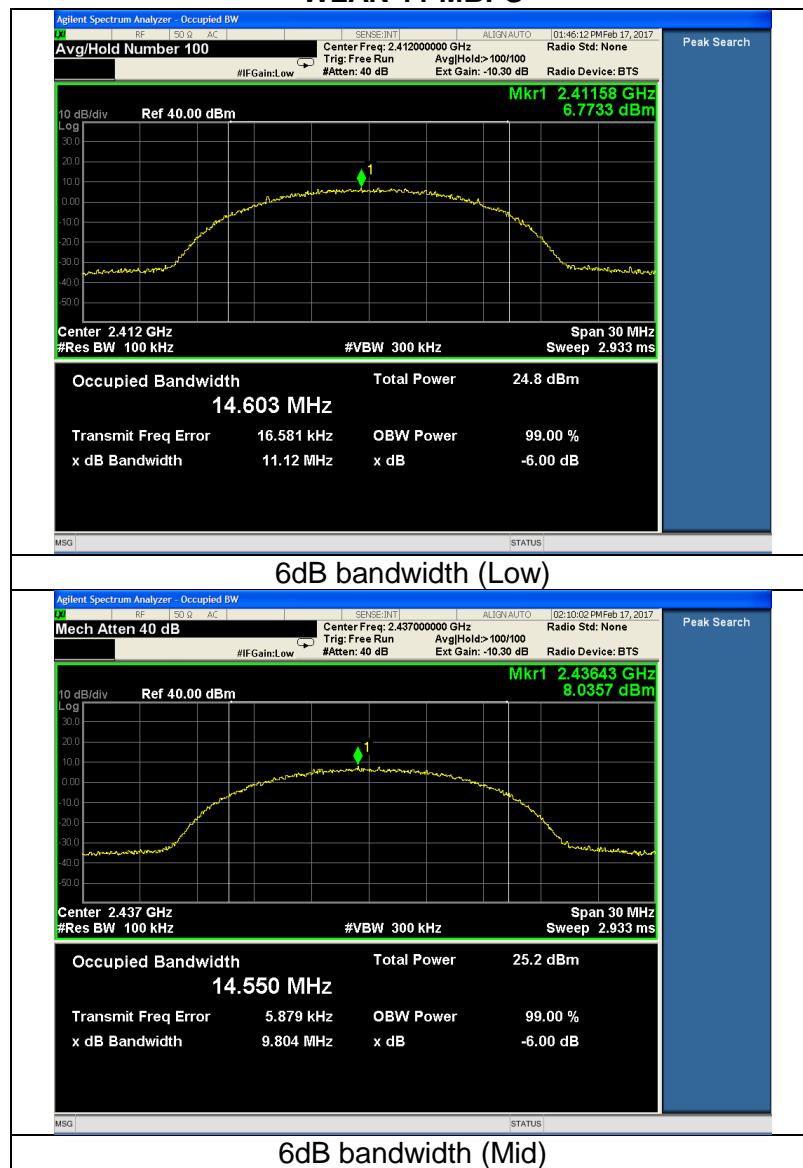

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664




Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

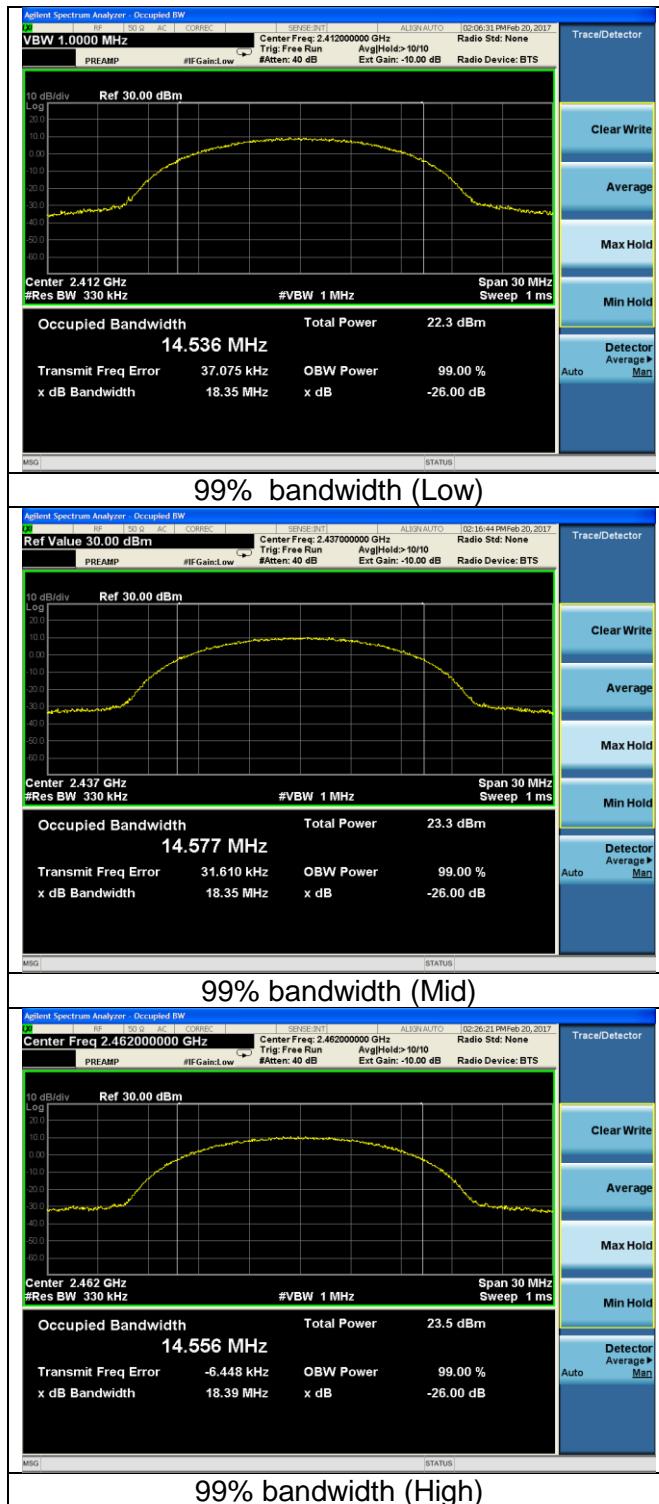


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


## WLAN 54 MBPS

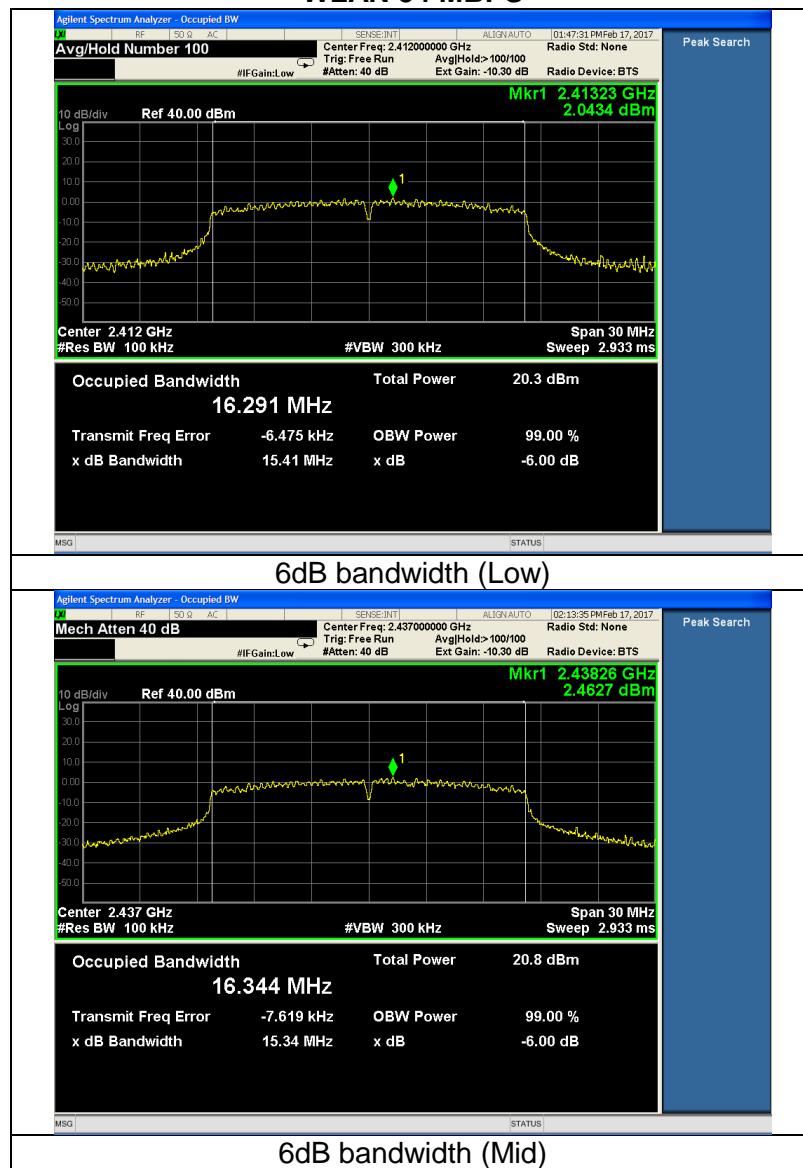

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

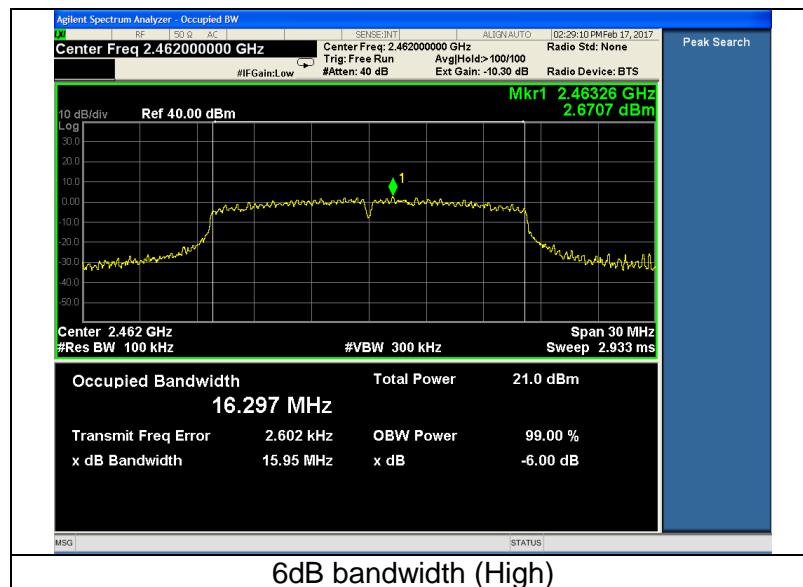


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

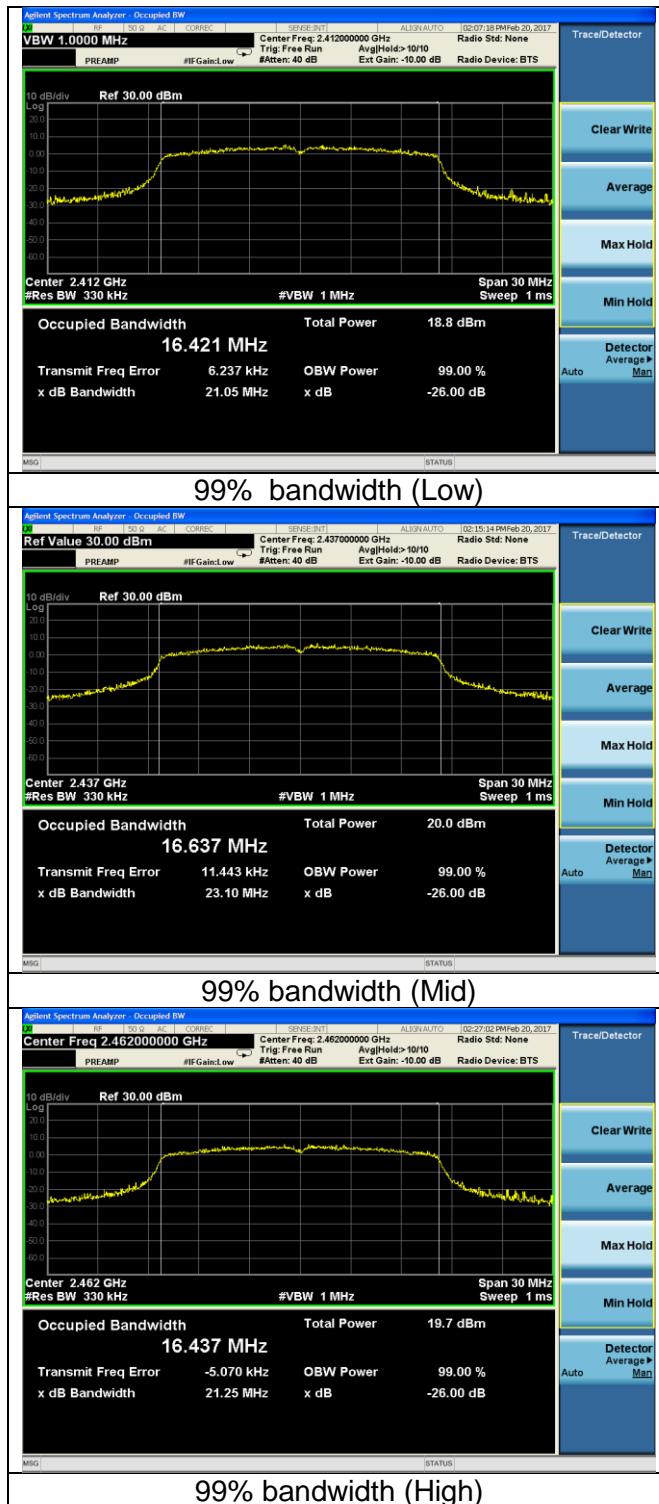


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


## WLAN MCS0

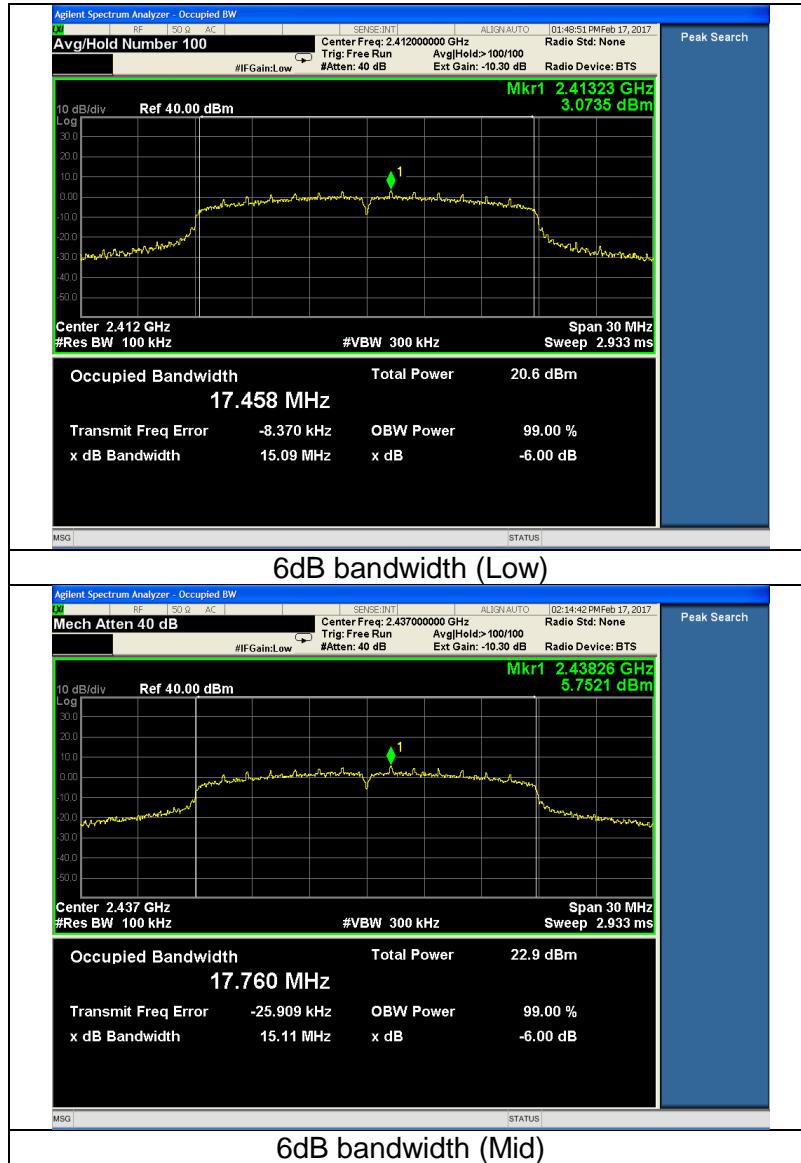

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

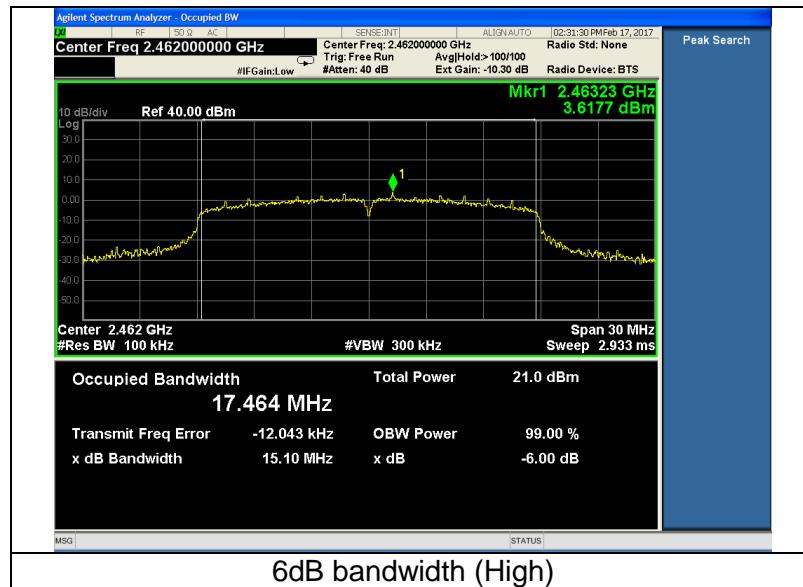


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

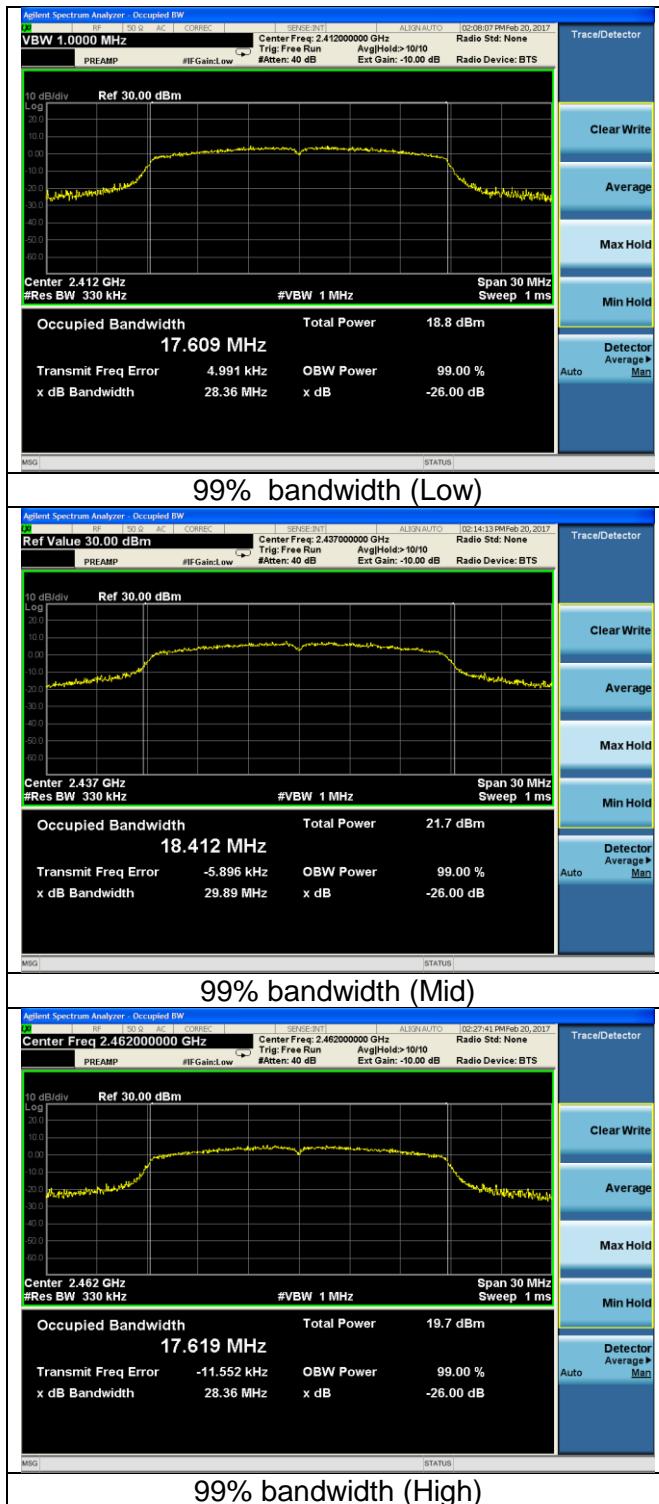


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


## WLAN MCS7

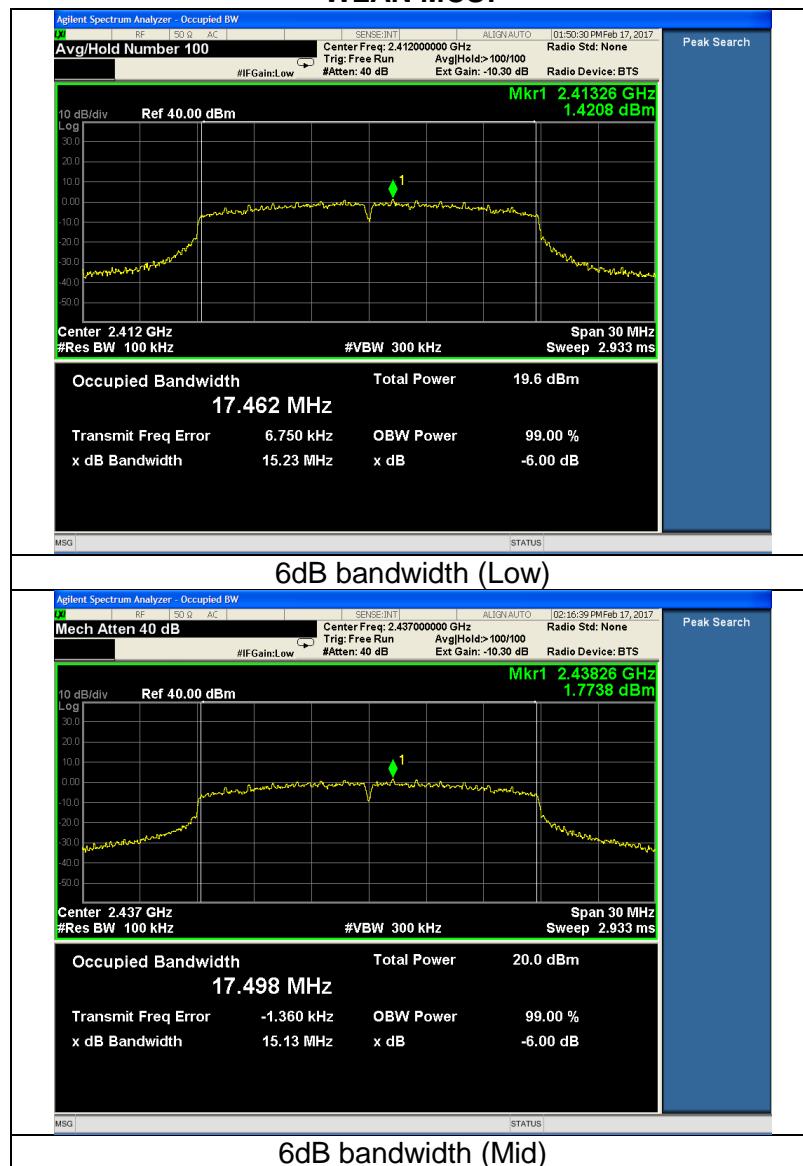

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

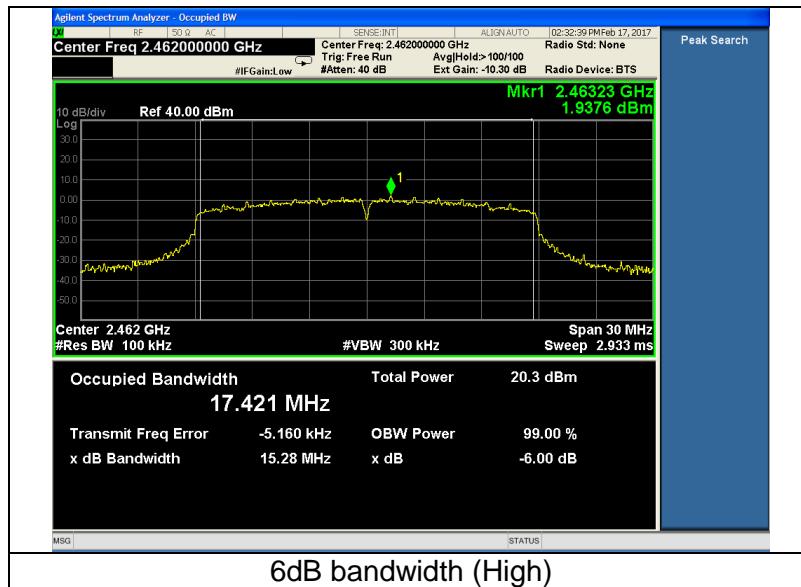

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

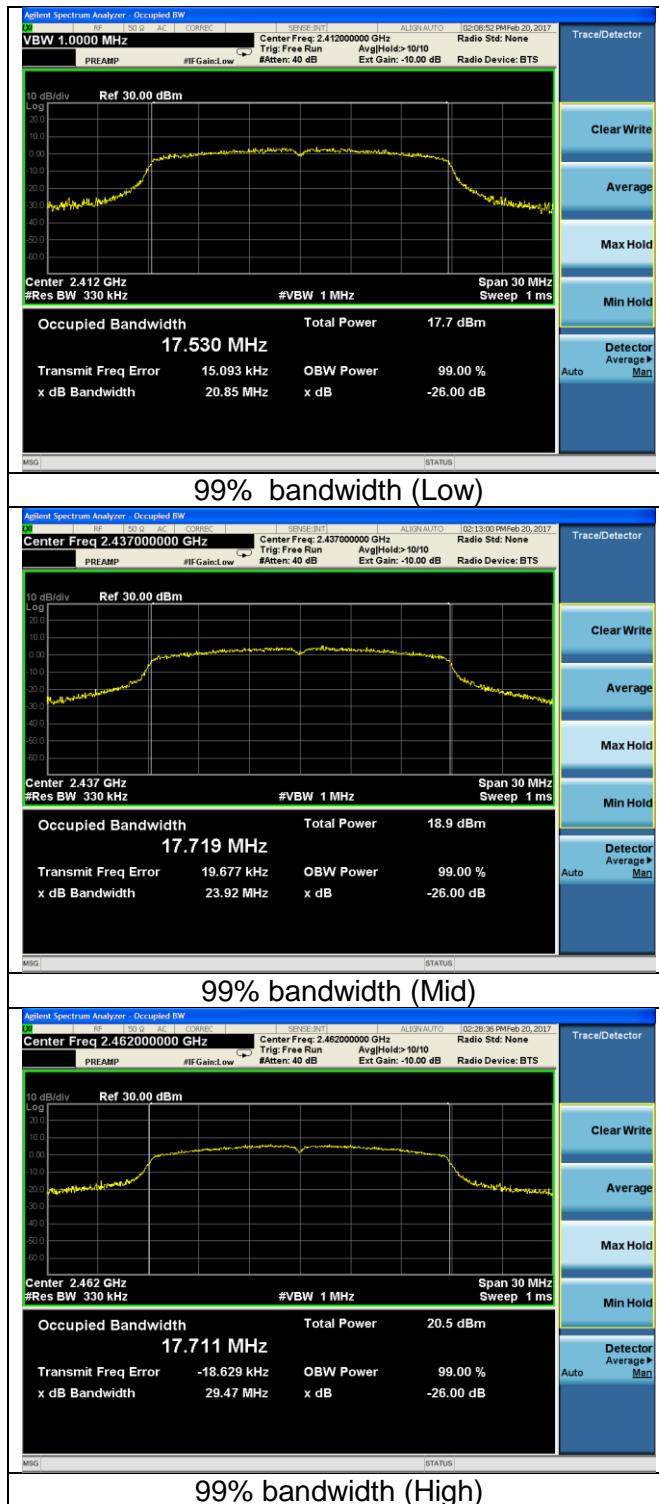

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

## EXHIBIT 8. BAND EDGE MEASUREMENTS

Test Engineer(s): Coty Hammerer

### **8.1 - Method of Measurements**

FCC 15.247 require a measurement of spurious emission levels at the restricted band to be compliant to the general emissions limit, in particular at the Band-Edges where the intentional radiator operates. The EUT was operated in continuous transmit mode with continuous modulation, with internally generated data as the modulating source. The EUT was operated at the lowest channel for the investigation of the lower Band-Edge, and at the highest channel for the investigation of the higher Band-Edge.

The Band-edge measurements were performed conducted (100 kHz bandwidth) and radiated. The measurement of band-edge was performed to satisfy FCC 15.247(d).

**Per FCC KDB 558074 D01 Measurement Guidance v04 (section 11)**, conducted measurements were performed with 100 kHz bandwidth for all emissions outside of the band of operation. For measuring radiated emissions in the restricted band, a bandwidth of 120 kHz (below 1000MHz) or 1MHz (above 1000MHz) was used in accordance with C63.4.

For both conducted and radiated measurements, correction factors and the cable loss factors were entered into the EMI Receiver database. As a result, the plots taken from the EMI Receiver accounts for all applicable correction factor as well as cable loss, and can therefore be entered into the database as a corrected meter reading.

### **8.2. Band Edge Screen Captures.**


The data presented below are samples selected from the various data rates and channels tested.

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664


## Band-edge in Restricted Band

Radiated Band-edge in Restricted Band:

2310 to 2390 MHz, 3m distance  
1 MBPS

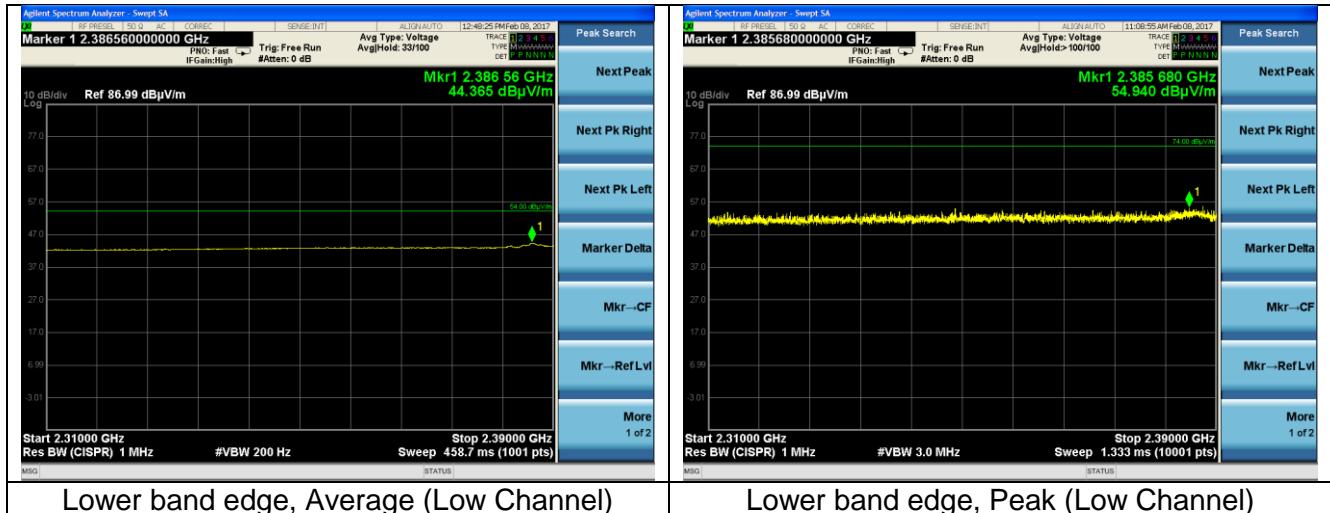


2483.5 to 2500 MHz Restricted band  
1MBPS

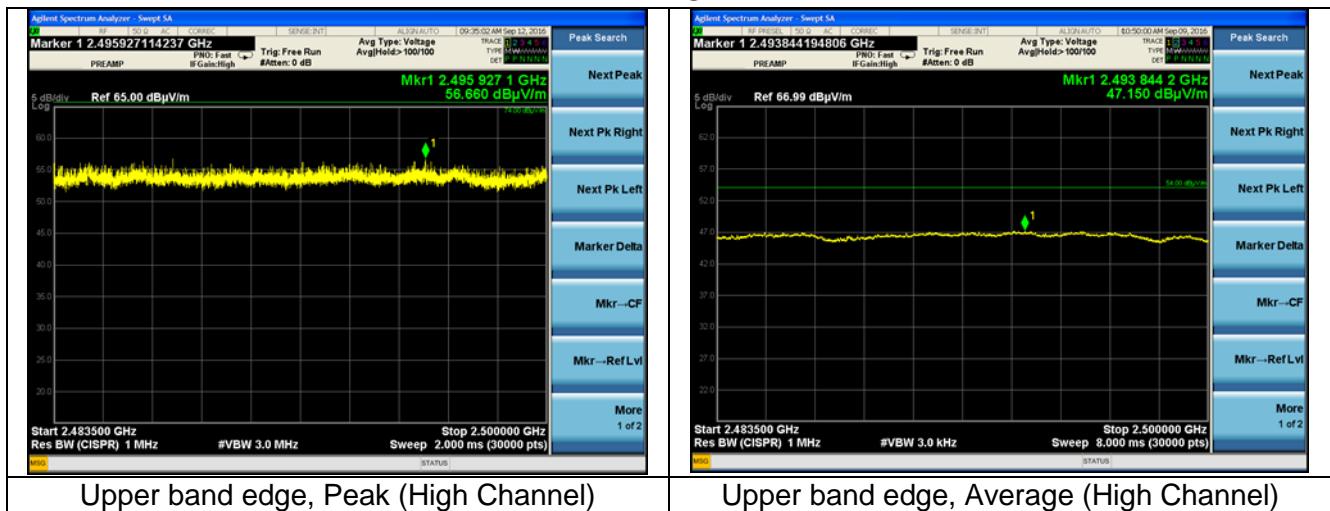


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

2310 to 2390 MHz, 3m distance  
6 MBPS

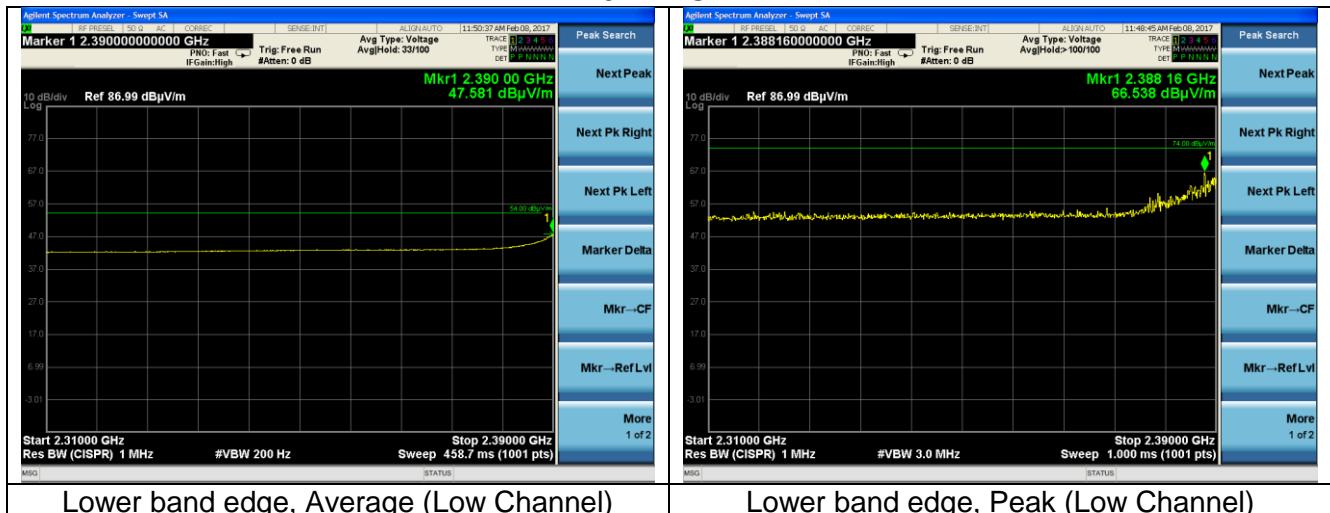


2483.5 to 2500 MHz Restricted band  
6 MBPS

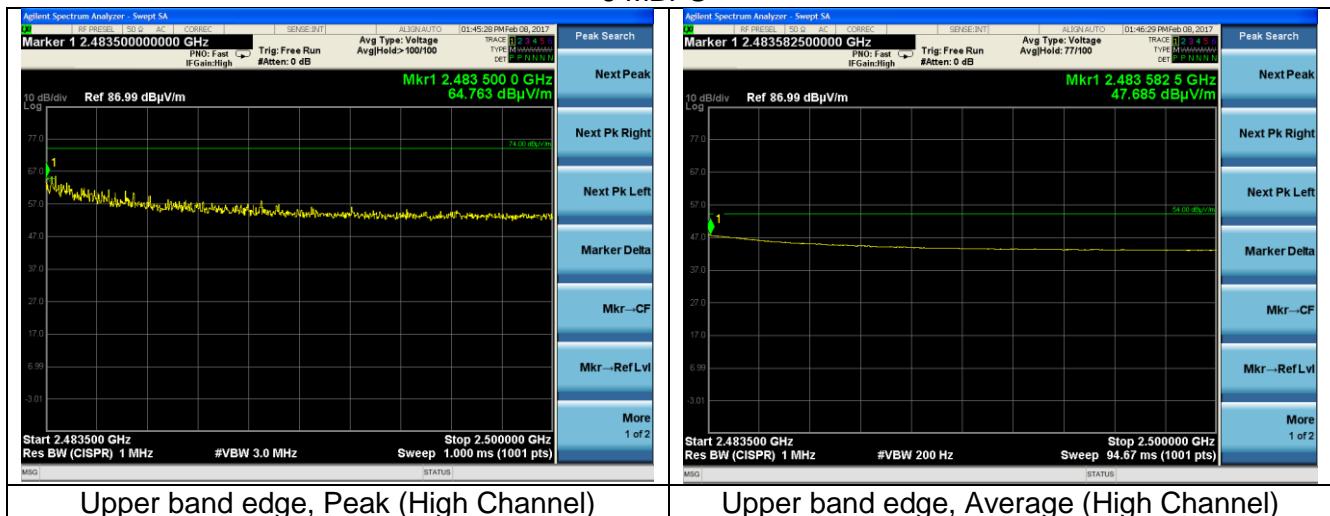


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

2310 to 2390 MHz, 3m distance  
11 MBPS

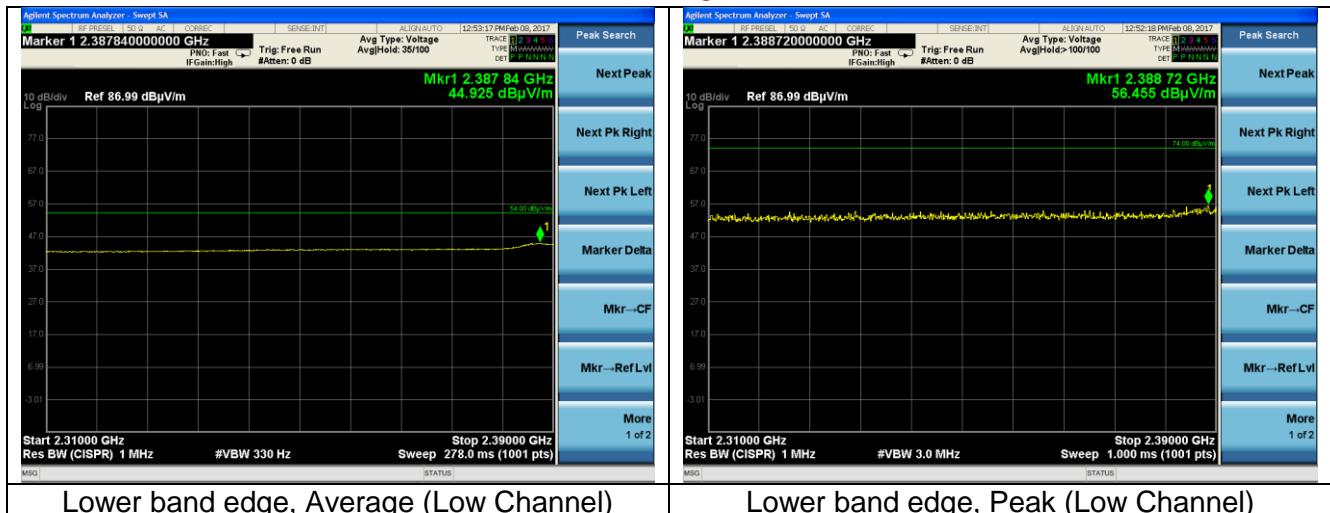


2483.5 to 2500 MHz Restricted band  
11 MBPS

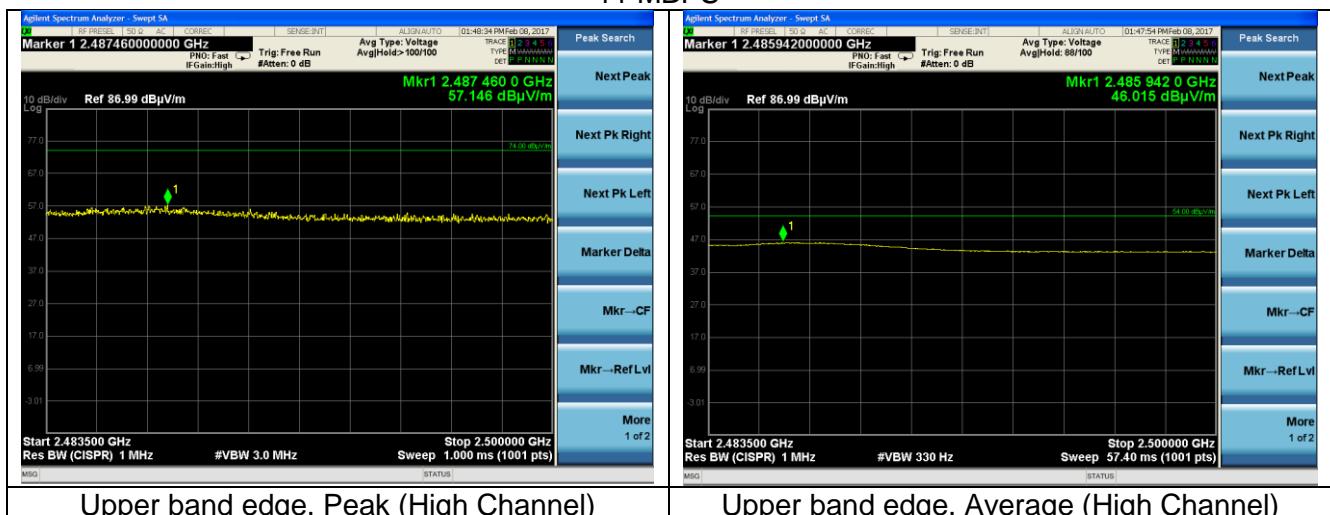


Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

2310 to 2390 MHz, 3m distance  
54 MBPS

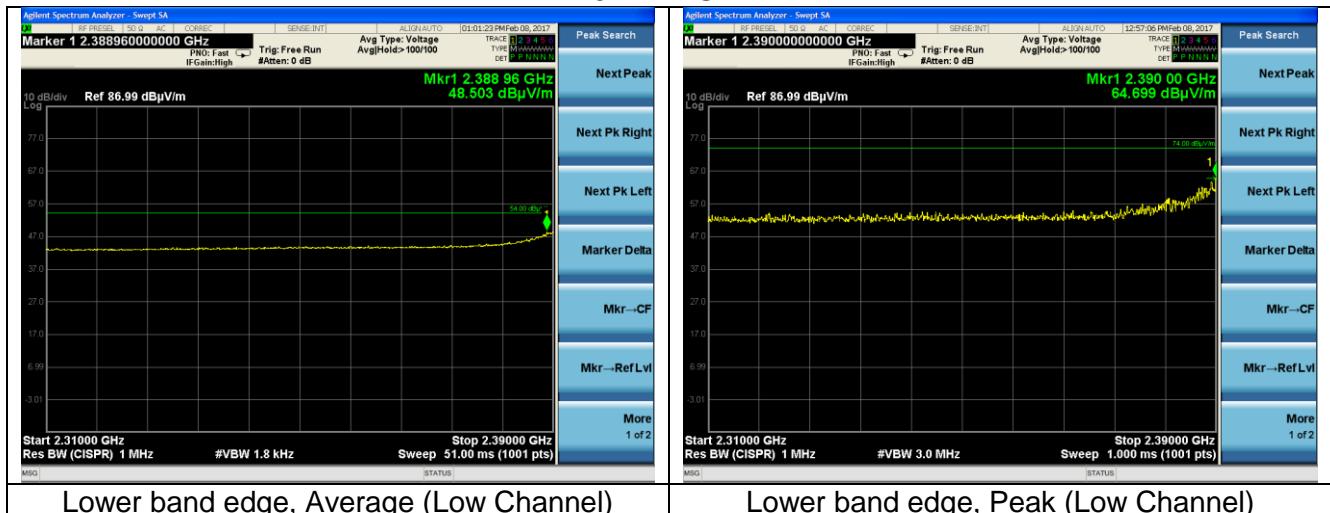


2483.5 to 2500 MHz Restricted band  
54 MBPS

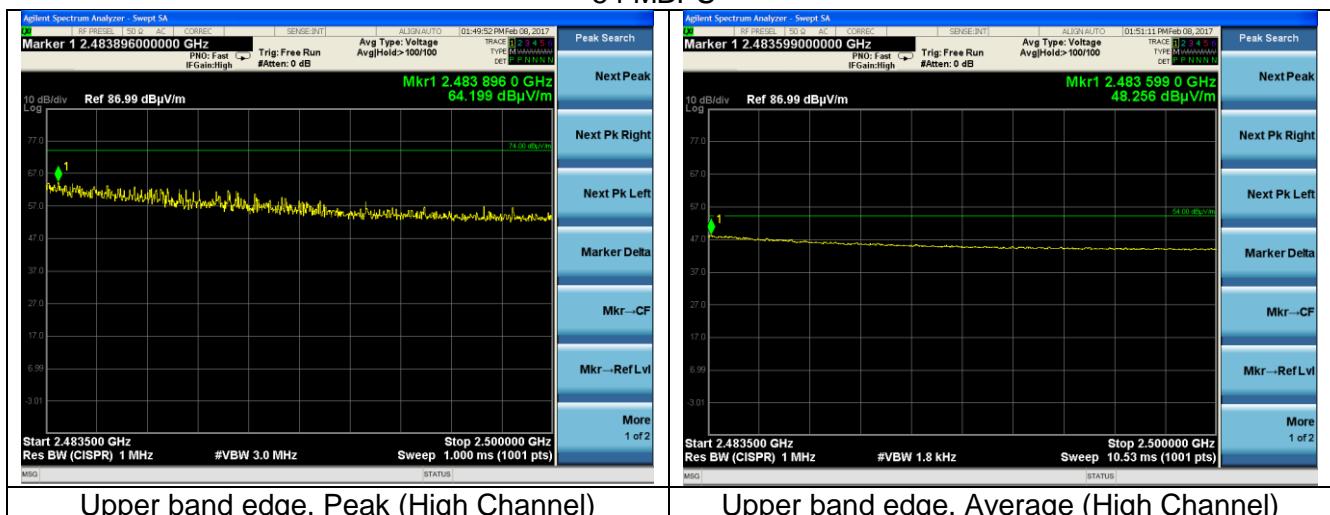

Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

2310 to 2390 MHz, 3m distance  
MCS0

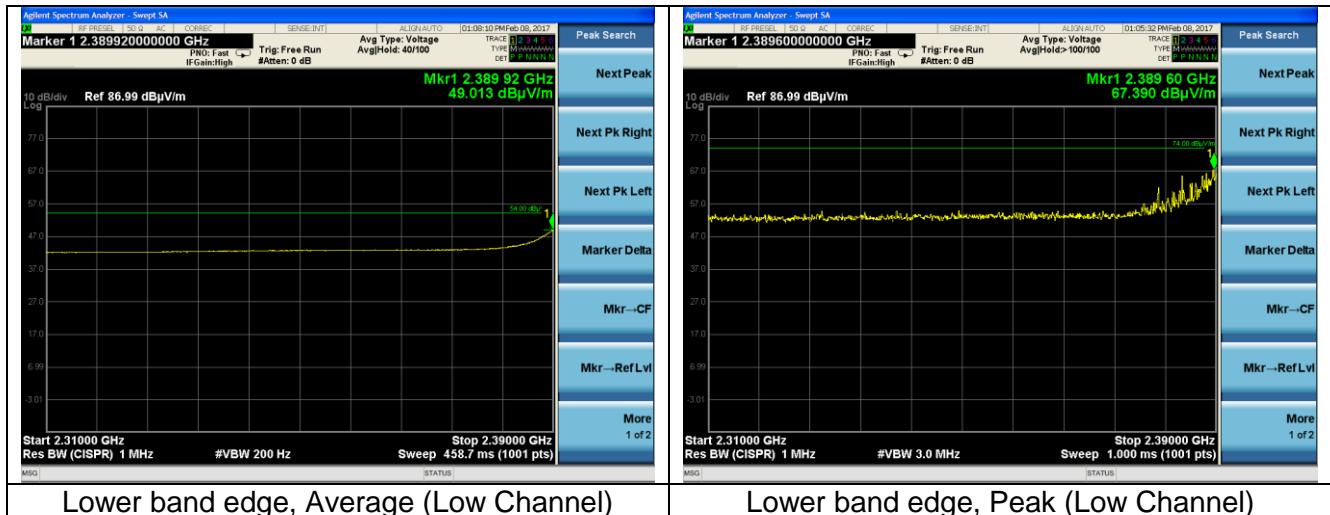


2483.5 to 2500 MHz Restricted band  
MCS0



Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664

2310 to 2390 MHz, 3m distance  
MCS7

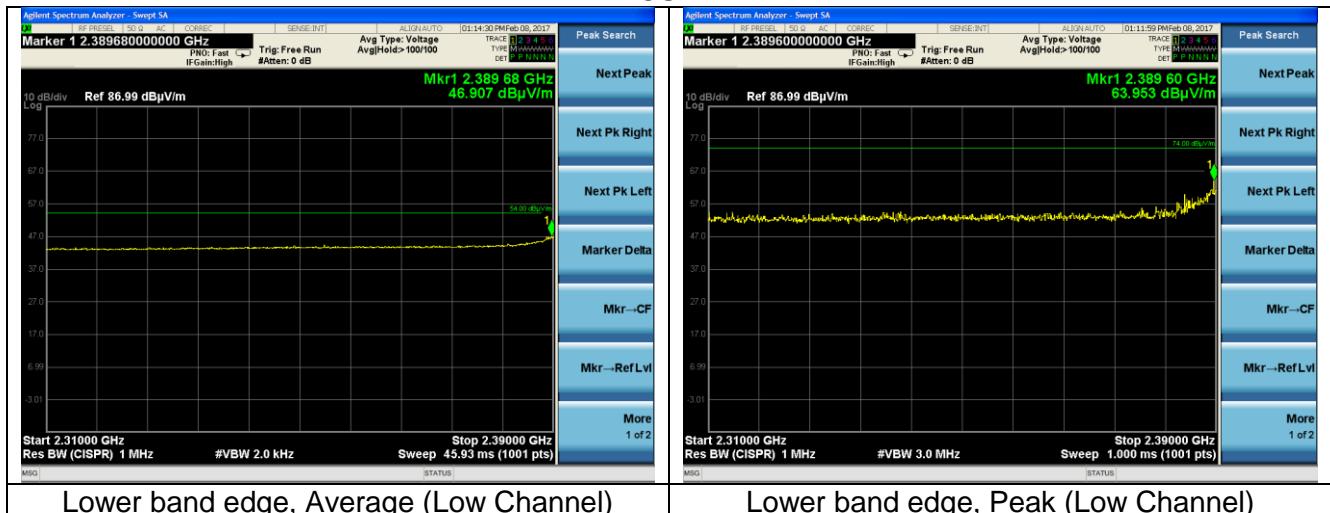

2483.5 to 2500 MHz Restricted band  
MCS7



Prepared For: United Technology Electronic Controls Inc.	Model #: SYSTXBBECC01-B	Report #: 316398
EUT: Bryant Evolution Connex Control Thermostat	Serial #: Engineering Samples#26 and #33	LSR Job #: C-2664