EUT: Home DSP Model No: 02018

Requirement: General limit of 15.209 Tech: CL Payne

Low Channel: 2406 Result: Pass

RADIATED SPURIOUS										
Freq (MHz)	Meter (dBuV/m)	Pre-Amp (dB)	Cable (dB)	Antenna (dB)	Corrected (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Polarity	Туре	Axis
4812.000	39.43	25.68	5.92	33.12	52.80	74.00	-21.20	V	Peak	N/A
4812.000	26.30	25.68	5.92	33.12	39.67	54.00	-14.33	V	Ave	N/A
7218.000	33.29	25.50	7.22	36.97	51.98	74.00	-22.02	V	Peak	N/A
7218.000	20.54	25.50	7.22	36.97	39.23	54.00	-14.77	V	Ave	N/A
9624.000	30.43	25.05	9.10	37.95	52.43	74.00	-21.57	V	Peak	N/A
9624.000	17.12	25.05	9.10	37.95	39.12	54.00	-14.88	V	Ave	N/A
4812.000	36.50	25.68	5.92	33.12	49.87	74.00	-24.13	Н	Peak	N/A
4812.000	25.97	25.68	5.92	33.12	39.34	54.00	-14.66	Н	Ave	N/A
7218.000	33.20	25.50	7.22	36.97	51.89	74.00	-22.11	Н	Peak	N/A
7218.000	20.47	25.50	7.22	36.97	39.16	54.00	-14.84	Н	Ave	N/A
9624.000	29.70	25.05	9.10	37.95	51.70	74.00	-22.30	Н	Peak	N/A
9624.000	17.10	25.05	9.10	37.95	39.10	54.00	-14.90	Н	Ave	N/A

No readings were observed above the third harmonic

EUT: Home DSP Model No: 02018

Requirement: General limit of 15.209 Tech: CL Payne

Mid Channel: 2442 Result: Pass

RADIATED SPURIOUS										
Freq (MHz)	Meter (dBuV/m)	Pre-Amp (dB)	Cable (dB)	Antenna (dB)	Corrected (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Polarity	Туре	Axis
4848.000	31.99	25.66	5.94	33.25	45.52	74.00	-28.48	V	Peak	N/A
4848.000	18.00	25.66	5.94	33.25	31.53	54.00	-22.47	V	Ave	N/A
7326.000	30.40	25.50	7.33	37.06	49.29	74.00	-24.71	V	Peak	N/A
7326.000	17.40	25.50	7.33	37.06	36.29	54.00	-17.71	V	Ave	N/A
9768.000	29.70	24.99	9.10	38.01	51.81	74.00	-22.19	V	Peak	N/A
9768.000	17.10	24.99	9.10	38.01	39.21	54.00	-14.79	V	Ave	N/A
4848.000	31.15	25.66	5.94	33.25	44.68	74.00	-29.32	Н	Peak	N/A
4848.000	18.27	25.66	5.94	33.25	31.80	54.00	-22.20	Н	Ave	N/A
7326.000	30.13	25.50	7.33	37.06	49.02	74.00	-24.98	Н	Peak	N/A
7326.000	17.30	25.50	7.33	37.06	36.19	54.00	-17.81	Н	Ave	N/A
9768.000	29.28	24.99	9.10	38.01	51.39	74.00	-22.61	Н	Peak	N/A
9768.000	16.54	24.99	9.10	38.01	38.65	54.00	-15.35	Н	Ave	N/A

No readings were observed above the third harmonic

EUT: Home DSP Model No: 02018

Requirement: General limit of 15.209 Tech: CL Payne

High Channel: 2474 Result: Pass

RADIATED SPURIOUS										
Freq (MHz)	Meter (dBuV)	Pre-Amp (dB)	Cable (dB)	Antenna (dB/m)	Corrected (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Polarity	Туре	Axis
4948.000	33.97	25.62	5.98	33.61	47.94	74.00	-26.06	V	Peak	N/A
4948.000	21.19	25.62	5.98	33.61	35.16	54.00	-18.84	V	Ave	N/A
7422.000	32.90	25.50	7.42	37.14	51.96	74.00	-22.04	V	Peak	N/A
7422.000	19.65	25.50	7.42	37.14	38.71	54.00	-15.29	V	Ave	N/A
9896.000	33.37	24.94	9.10	38.06	55.59	74.00	-18.41	V	Peak	N/A
9896.000	19.63	24.94	9.10	38.06	41.85	54.00	-12.15	V	Ave	N/A
4948.000	33.83	25.62	5.98	33.61	47.80	74.00	-26.20	Н	Peak	N/A
4948.000	21.15	25.62	5.98	33.61	35.12	54.00	-18.88	Н	Ave	N/A
7422.000	32.22	25.50	7.42	37.14	51.28	74.00	-22.72	Н	Peak	N/A
7422.000	19.65	25.50	7.42	37.14	38.71	54.00	-15.29	Н	Ave	N/A
9896.000	33.01	24.94	9.10	38.06	55.23	74.00	-18.77	Н	Peak	N/A
9896.000	19.63	24.94	9.10	38.06	41.85	54.00	-12.15	Н	Ave	N/A

No readings were observed above the third harmonic

11.12.2 Antenna-port conducted measurements

11.12.2.1 General

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for determining compliance in the restricted frequency bands requirements. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions is required.

11.12.2.2 General procedure for conducted measurements in restricted bands

The general procedure for conducted measurements in restricted bands is as follows:

- a) Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 11.12.2.3 through 11.12.2.5 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP (see 11.12.2.6 for guidance on determining the applicable antenna gain).
- c) Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies \leq 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).
- d) For MIMO devices, measure the power of each chain and sum the EIRP of all chains in linear terms (i.e., watts and mW).
- e) Convert the resultant EIRP to an equivalent electric field strength using the following relationship:

 $E = \text{EIRP} - 20 \log d + 104.8$ where E is the electric field strength in dB μ V/m EIRP is the equivalent isotropically radiated power in dBm d is the specified measurement distance in m

- f) Compare the resultant electric field strength level with the applicable regulatory limit.
- g) Perform the radiated spurious emission test.

15.247 (d) Restricted Bands - continued

Note: With respect to steps e) and f) a limit line (EIRP) based upon the dBuV/m limit was calculated and put on the plots to satisfy the requirement of step f) above. Formula is: (E + 20 log d) - 104.8 = (EIRP limit). The appropriate correction factor from step c) was included in the final calculation.

Limit Calculation:

Formula: $E - 104.8 + 20\log(3)$ – antenna gain – ground reflection factor

Note: (d) = *Measurement distance in meters* = 3 *meters*

Requirement: FCC Part 15.247 Clause (d)

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 30 MHz to 300 MHz Result: Pass

Detector Function: Peak

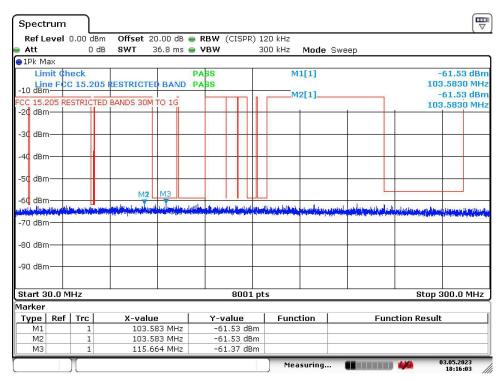

Date: 3.MAY.2023 18:16:03


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 300 MHz to 1000 MHz Result: Pass

Detector Function: Peak

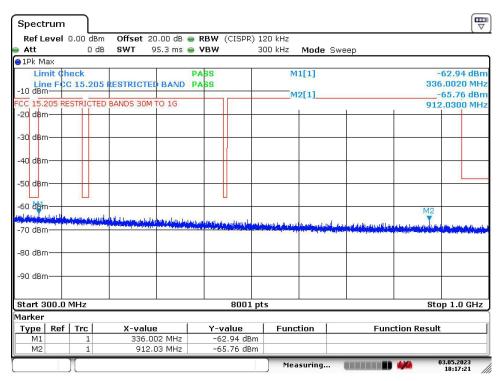

Date: 3.MAY.2023 18:17:21


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 1000 MHz to 2400 MHz Result: Pass

Detector Function: Peak

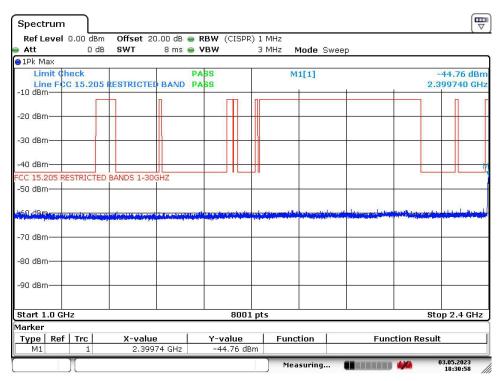

Date: 3.MAY.2023 18:30:58


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 2483.5 MHz to 5000 MHz Result: Pass

Detector Function: Peak

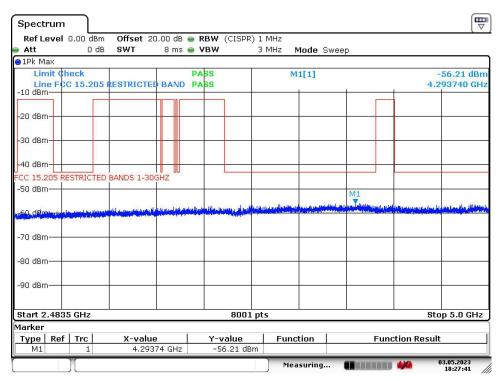

Date: 3.MAY.2023 18:27:41


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 5000 MHz to 10000 MHz Result: Pass

Detector Function: Peak

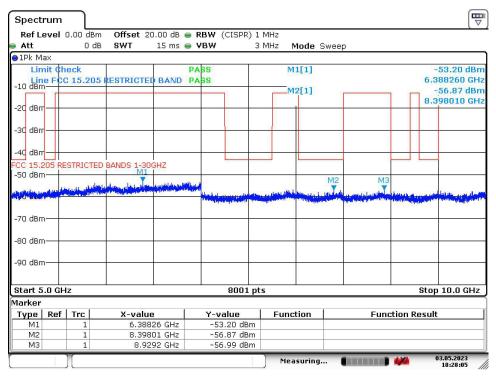

Date: 3.MAY.2023 18:28:05


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 10000 MHz to 15000 MHz Result: Pass

Detector Function: Peak

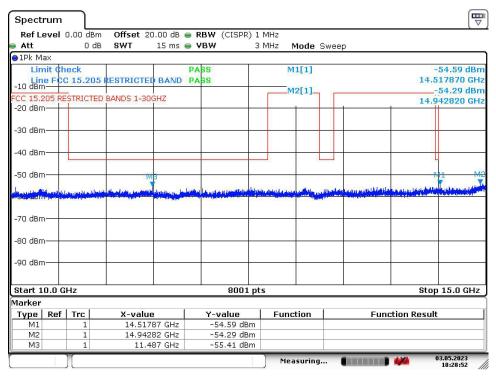

Date: 3.MAY.2023 18:28:52


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 15000 MHz to 20000 MHz Result: Pass

Detector Function: Peak

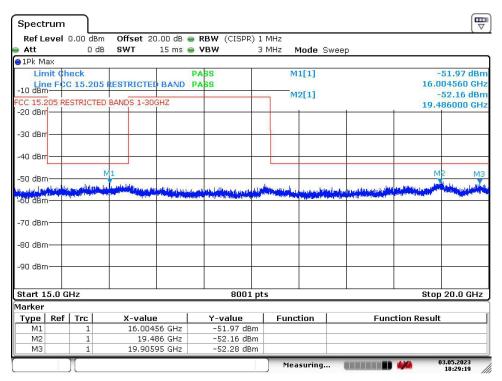

Date: 3.MAY.2023 18:29:19


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Low Channel: 2406 MHz

Frequency Range: 20000 MHz to 25000 MHz Result: Pass

Detector Function: Peak

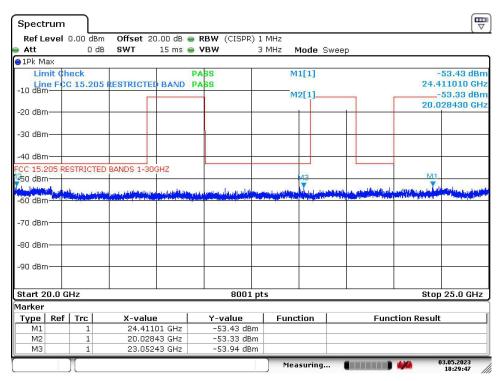

Date: 3.MAY.2023 18:29:47


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 30 MHz to 300 MHz Result: Pass

Detector Function: Peak

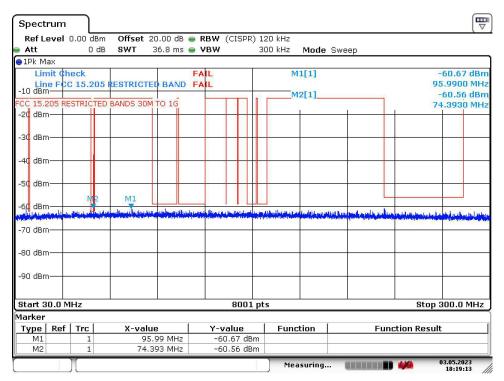

Date: 3.MAY.2023 18:19:13


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 300 MHz to 1000 MHz Result: Pass

Detector Function: Peak

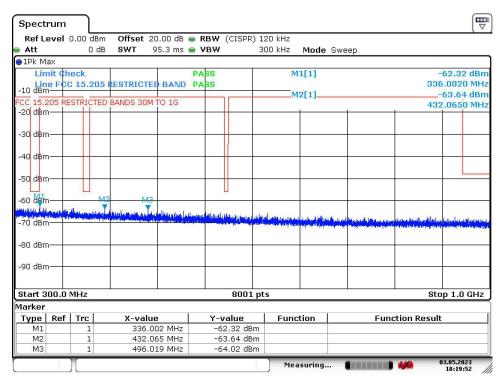

Date: 3.MAY.2023 18:19:52


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 1000 MHz to 2400 MHz Result: Pass

Detector Function: Peak

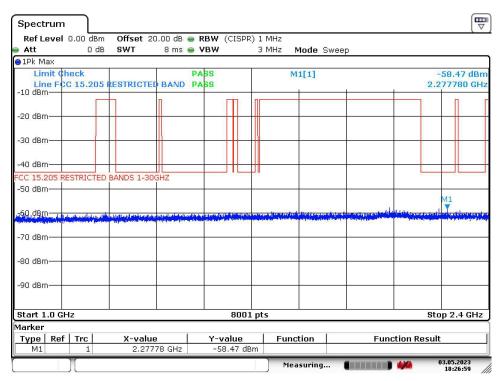

Date: 3.MAY.2023 18:26:59


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 2483.5 MHz to 5000 MHz Result: Pass

Detector Function: Peak

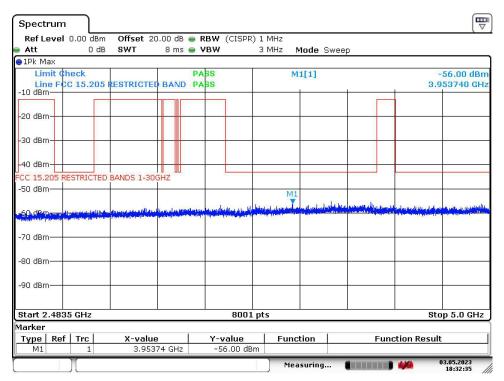

Date: 3.MAY.2023 18:32:35


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 5000 MHz to 10000 MHz Result: Pass

Detector Function: Peak

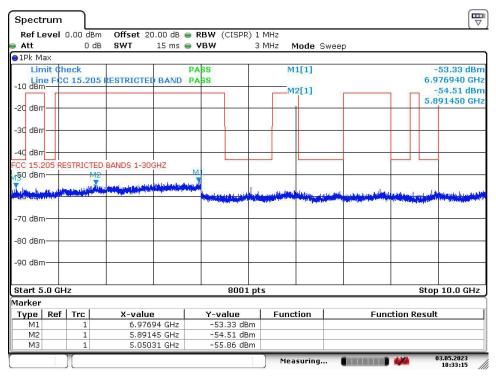

Date: 3.MAY.2023 18:33:15


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 10000 MHz to 15000 MHz Result: Pass

Detector Function: Peak

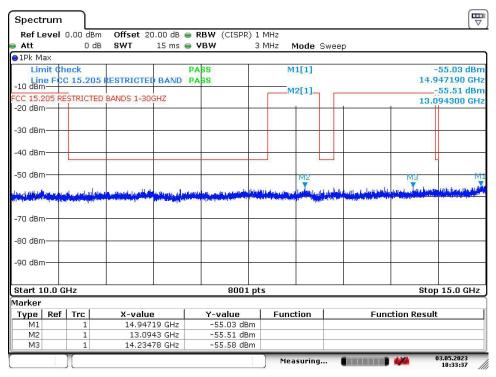

Date: 3.MAY.2023 18:33:37


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 15000 MHz to 20000 MHz Result: Pass

Detector Function: Peak

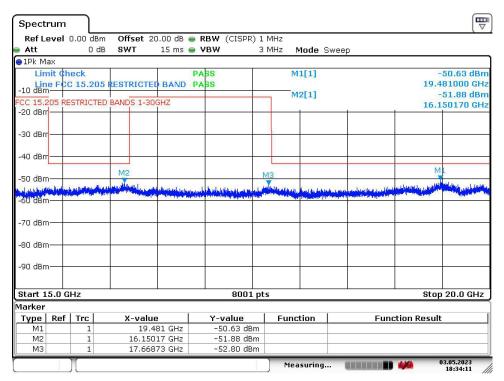

Date: 3.MAY.2023 18:34:11


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

Mid Channel: 2442 MHz

Frequency Range: 20000 MHz to 25000 MHz Result: Pass

Detector Function: Peak

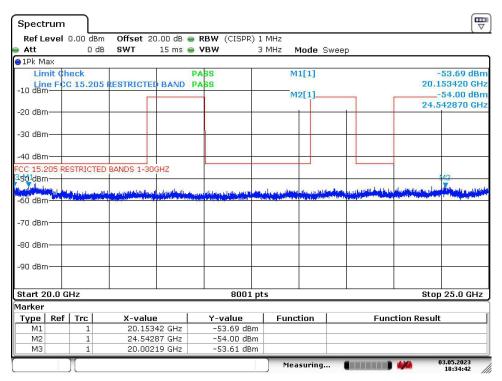

Date: 3.MAY.2023 18:34:42


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 30 MHz to 300 MHz Result: Pass

Detector Function: Peak

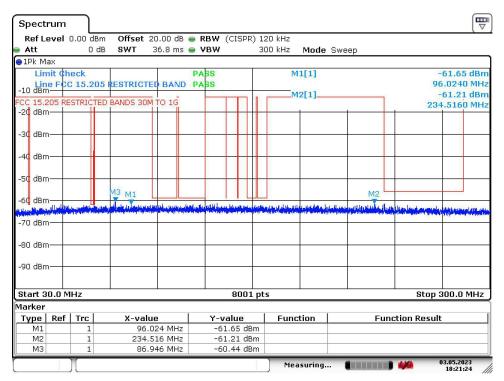

Date: 3.MAY.2023 18:21:24


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 300 MHz to 1000 MHz Result: Pass

Detector Function: Peak

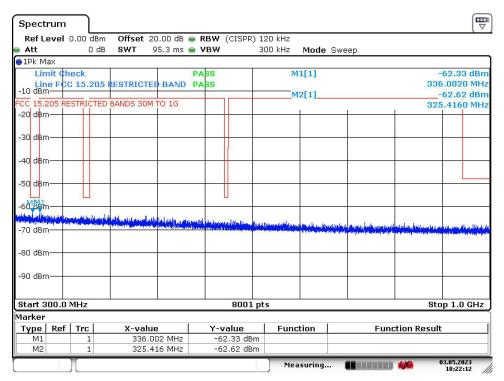

Date: 3.MAY.2023 18:22:12

EUT: Home DSP Model No: 02018


Requirement: Emissions Below Restricted Band Limits

Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 1000 MHz to 2400 MHz Result: Pass

Detector Function: Peak

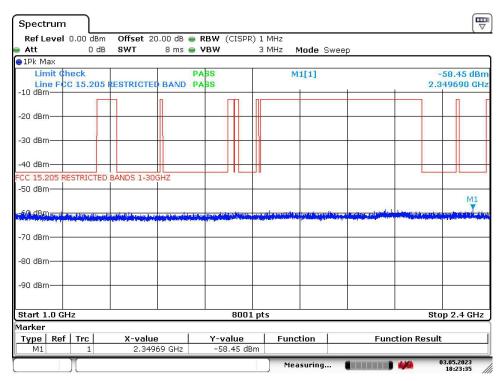

Date: 3.MAY.2023 18:23:35

EUT: Home DSP Model No: 02018


Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 2483.5 MHz to 5000 MHz

Result: Pass

Detector Function: Peak

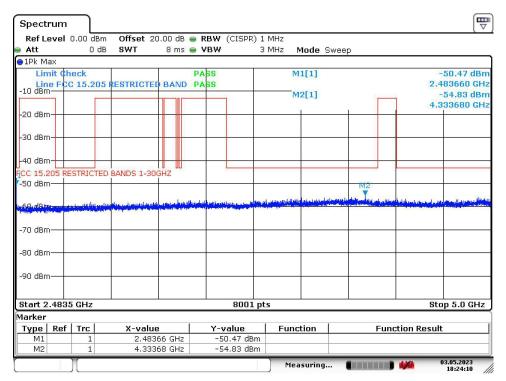

Date: 3.MAY.2023 18:24:10


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 5000 MHz to 10000 MHz Result: Pass

Detector Function: Peak

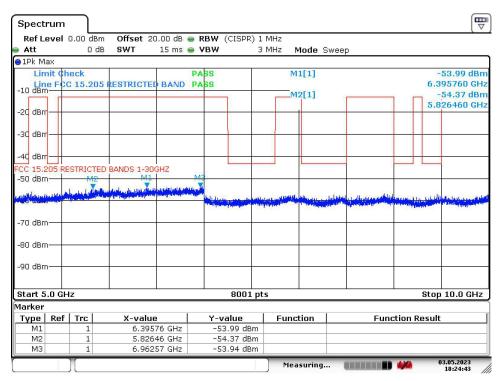

Date: 3.MAY.2023 18:24:43


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 10000 MHz to 15000 MHz Result: Pass

Detector Function: Peak

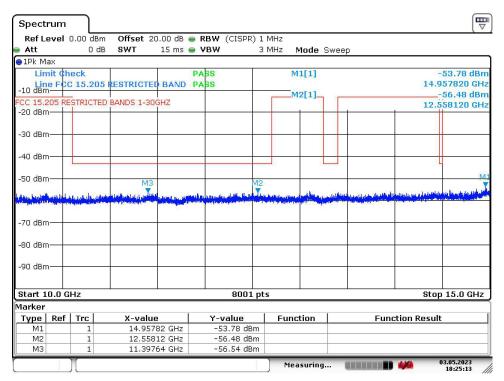

Date: 3.MAY.2023 18:25:13


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 15000 MHz to 20000 MHz Result: Pass

Detector Function: Peak

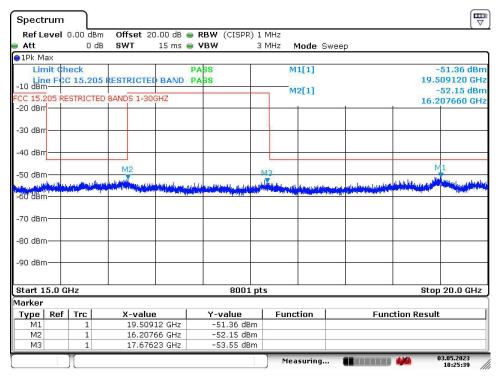

Date: 3.MAY.2023 18:25:39


EUT: Home DSP Model No: 02018

Requirement: Emissions Below Restricted Band Limits Tech: CL Payne

High Channel: 2474 MHz

Frequency Range: 20000 MHz to 25000 MHz Result: Pass

Detector Function: Peak

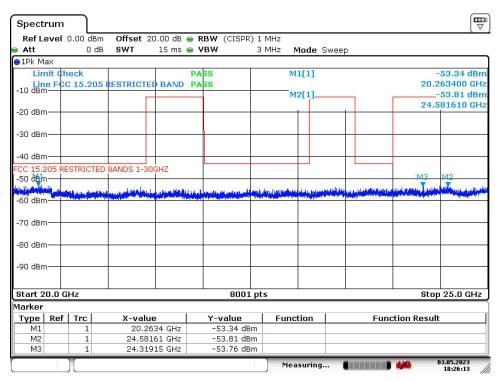

Date: 3.MAY.2023 18:26:13