

**EMC TEST REPORT****FCC 47 CFR Part 15B, ISED ICES-003 Issue 6**

<b>Report Reference No</b>	G0M-1805-7423-EF0115B-V01
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	 A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC Testing Laboratory site: 3470A-2
<b>Applicant</b>	Liftup A/S
Address	Hagensvej 21 DK- 9530 Støvring DENMARK
<b>Test Specification</b>	Full compliance test
Standard	47 CFR Part 15 Subpart B ISED ICES-003 Issue 6 ANSI C63.4:2014
Non-Standard Test Method	None
<b>Equipment under Test (EUT):</b>	
Product Description	Remote Control for Liftup A/S products
Model(s)	Remote 2
Additional Model(s)	None
Brand Name(s)	Liftup
Hardware Version(s)	C
Software Version(s)	0.13
FCC-ID	2AK8H-REMOTE2
IC	22516-REMOTE2
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
required by standard but not tested	N/T	
not required by standard	N/R	
required by standard but not appl. to test object	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Date of receipt of test item	2018-07-02	
<b>Report:</b>		
Compiled by	Jens Marquardt	
Tested by (+ signature) (Responsible for Test)	Jens Marquardt	
Approved by (+ signature) (Head of Lab)	Christian Weber	
Date of Issue	2018-07-17	
Total number of pages	25	
<b>General Remarks:</b>		
<p><b>The test results presented in this report relate only to the object tested.</b></p> <p><b>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</b></p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		

**ABBREVIATIONS AND ACRONYMS**

<b>Acronyms</b>	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
$T_{NOM}$	Nominal operating temperature
$V_{NOM}$	Nominal supply voltage

**VERSION HISTORY**

<b>Version History</b>			
Version	Issue Date	Remarks	Revised By
01	2018-07-17	Initial Release	

**REPORT INDEX**

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>6</b>
1.1	Equipment Ports.....	7
1.2	Equipment Photos - Internal.....	8
1.3	Equipment Photos - External.....	9
1.4	Support Equipment.....	11
1.5	Operational Modes.....	12
1.6	EUT Configuration.....	13
1.7	Sample emission level calculation.....	14
<b>2</b>	<b>Result Summary.....</b>	<b>15</b>
2.1	Test Conditions and Results - Radiated emissions acc. to ANSI C63.4.....	16



## 1 Equipment (Test Item) Under Test

Description	Remote Control for Liftup A/S products	
Model	Remote 2	
Additional Model(s)	None	
Brand Name(s)	Liftup	
Serial Number(s)	1806-0001	
Hardware Version(s)	C	
Software Version(s)	0.13	
FCC-ID	2AK8H-REMOTE2	
IC	22516-REMOTE2	
Class	Class B	
Equipment type	Table top	
Highest internal frequency [MHz]	2460	
Supply Voltage	V <sub>NOM</sub>	3 VDC (battery)
Manufacturer	Liftup A/S Hagensvej 21 DK- 9530 Støvring DENMARK	


### 1.1 Equipment Ports

Name	Type	Attributes	Comment
None			
Description:			
AC	AC mains power input/output port		
DC	DC power input/output port		
IO	Input/Output port		
TP	Telecommunication port		
NE	Non-electrical port		

## 1.2 Equipment Photos - Internal

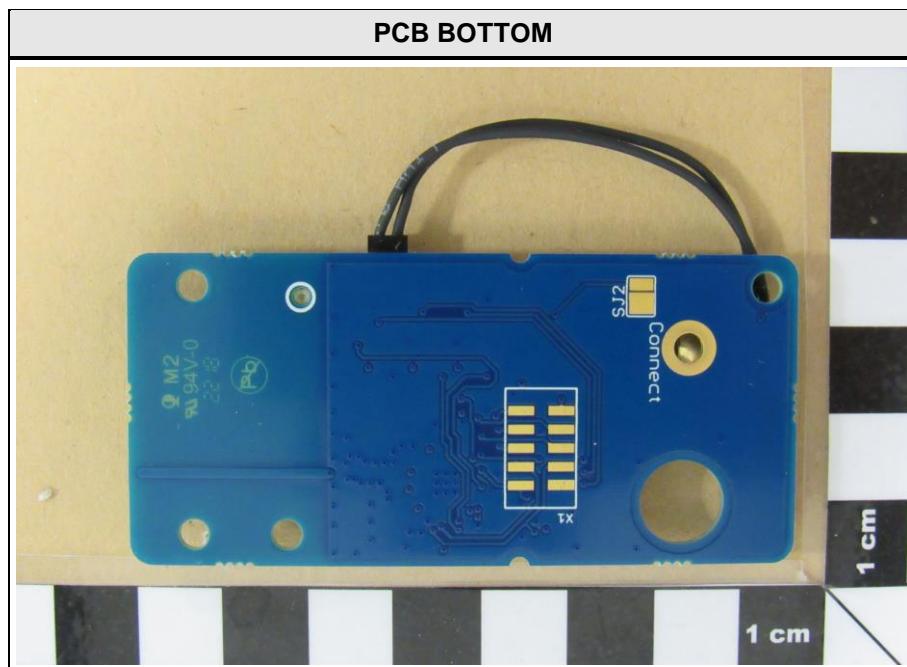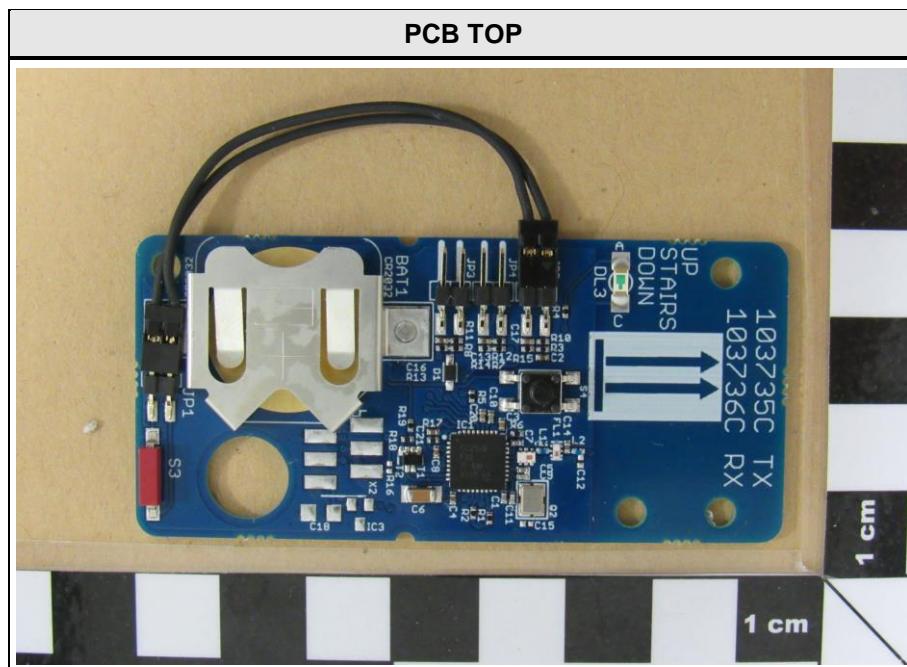

### 1.3 Equipment Photos - External

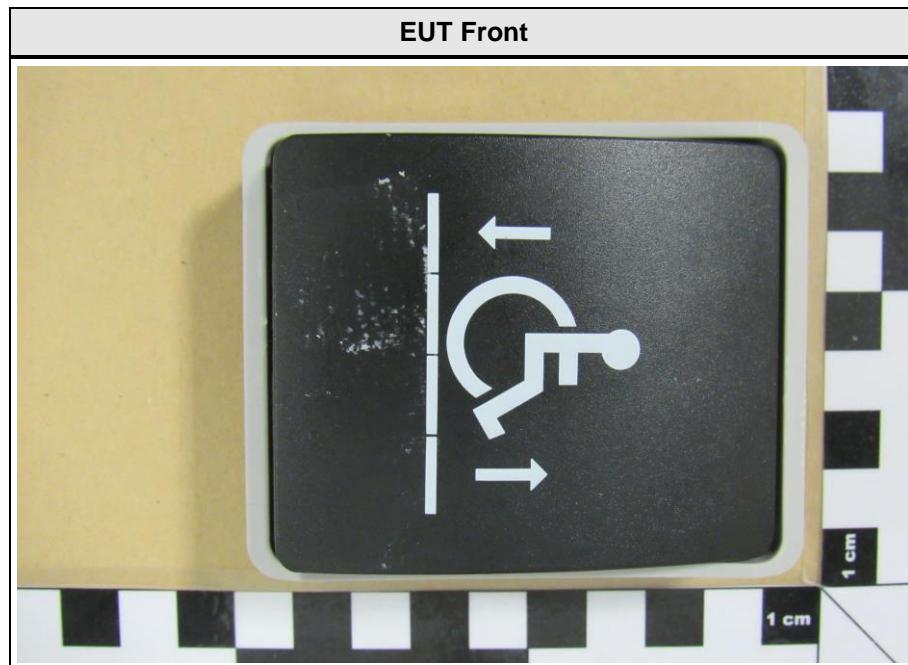

**EUT Side 1****EUT Side 2**

#### 1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment	
		none			
Description:					
AE	Auxillary Equipment				
SIM	Simulator				
CBL	Connecting Cable				
Comment:					

### 1.5 Operational Modes

Mode #	Description
1	continuous Tx
Comment:	

## 1.6 EUT Configuration

Configuration #	Description
1	EUT powered by internal battery
Comment:	

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin	
+21.5 dB $\mu$ V	+ 26 dB	= 47.5 dB $\mu$ V/m	:	47.5 dB $\mu$ V/m	- 57.0 dB $\mu$ V/m	= -9.5 dB

## 2 Result Summary

FCC 47 CFR Part 15B, ISED ICES-003 Issue 6				
Reference	Requirement	Reference Method	Result	Remarks
Emission				
FCC 15.109 ICES-003, 8, 6.1	Radiated emissions	ANSI C63.4:2014	PASS	
FCC 15.107 ICES-003, 8, 6.2	AC power line conducted emissions	ANSI C63.4:2014	N/T	
Comment:				



Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object



## 2.1 Test Conditions and Results - Radiated emissions acc. to ANSI C63.4

### 2.1.1 Information

Test Information	
Reference	FCC 15.109, ICES-003, 8, 6.1
Reference method	ANSI C63.4:2014 Section 8
Equipment class	Class B
Equipment type	Table top
Highest internal frequency [MHz]	2460
Measurement range	30 MHz to 13000 MHz
Temperature [°C]	22 – 24
Humidity [%]	50 – 60
Operator	Jens Marquardt
Date	2018-07-17

### 2.1.2 Setup

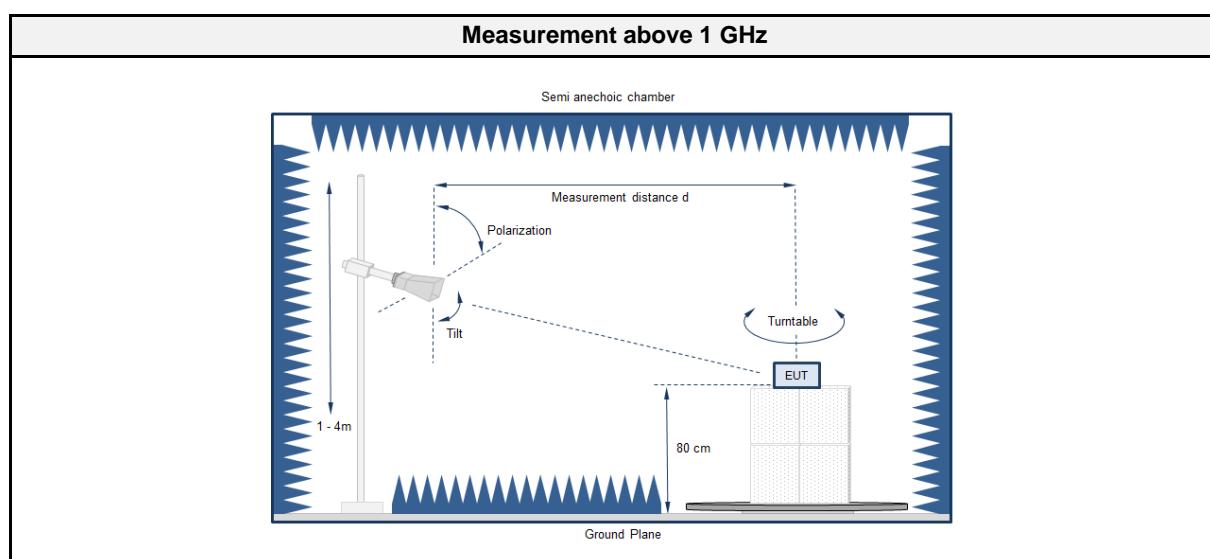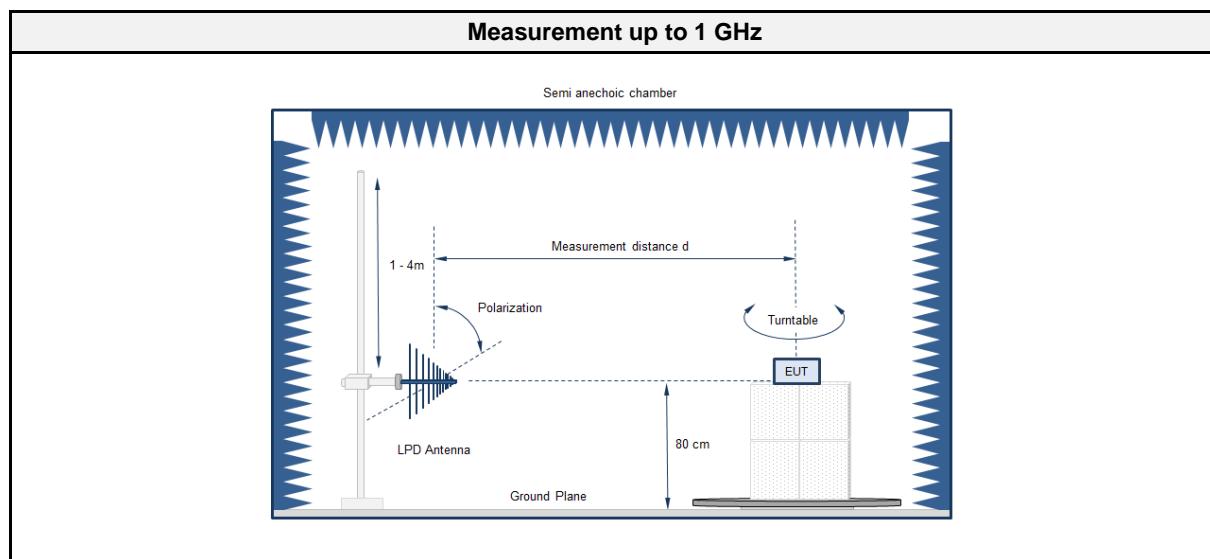

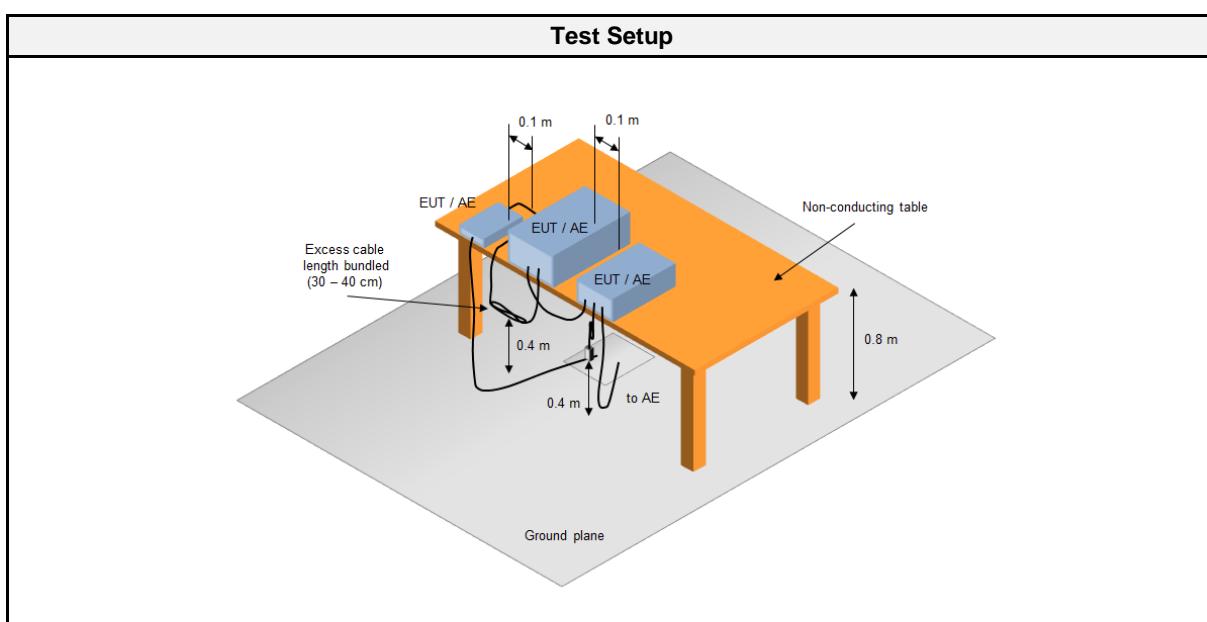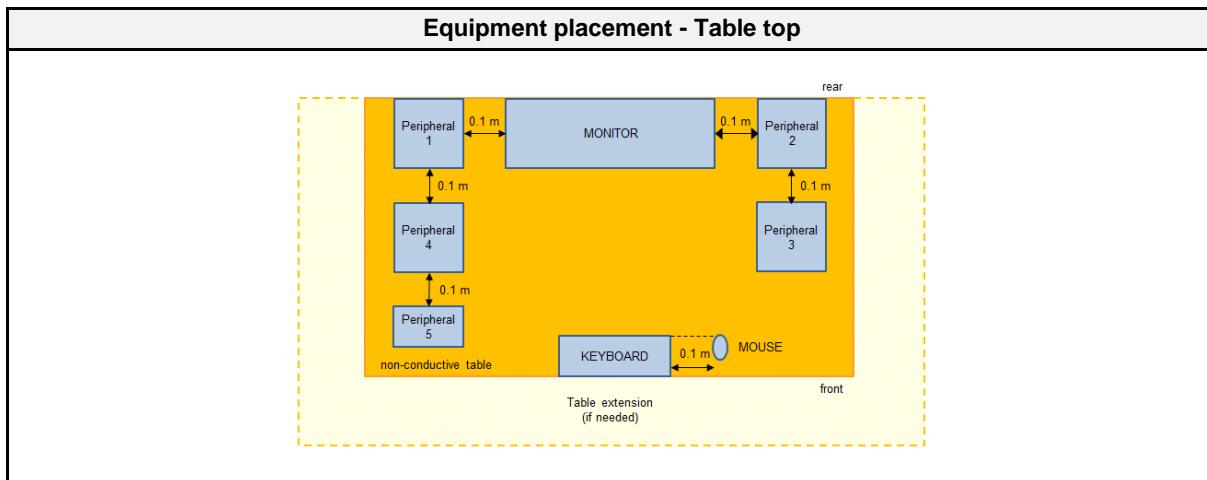

### 2.1.3 Equipment

Test Equipment					
Manufacturer	Description	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC1	EF00062	2017-02	2020-02
Keysight	EMI Test Receiver	N9038A-526/WXP	EF01070	2017-08	2018-08
R&S	Biconical Antenna	HK 116	EF00030	2016-04	2019-04
R&S	LPD Antenna	HL 223	EF00187	2016-05	2019-05
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2016-09	2019-09

#### 2.1.4 Procedure

<b>Exploratory measurement</b>
<ol style="list-style-type: none"> <li>1. The EUT was placed on a non-conductive table at a height of 0.8m.</li> <li>2. The EUT and support equipment, if needed, were set up to simulate typical usage.</li> <li>3. Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.</li> <li>4. The antenna was placed at a distance of 3 or 10 m.</li> <li>5. The received signal was monitored at the measurement receiver.</li> <li>6. This procedure has to be performed in both antenna polarizations, horizontal and vertical.</li> <li>7. The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3</li> </ol>

<b>Final measurement</b>
<ol style="list-style-type: none"> <li>1. The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver.</li> <li>2. A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast.</li> <li>3. The EUT and cable arrangement were based on the exploratory measurement results.</li> <li>4. Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.</li> <li>5. The test data of the worst-case conditions were recorded and shown on the next pages.</li> </ol>

#### 2.1.5 Limits



<b>Class B @ 3 m</b>		
Frequency [MHz]	Detector	Limit [dB $\mu$ V/m]
30 - 88	Quasi-peak	40
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46
960 - 1000	Quasi-peak	54
> 1000	Peak Average	74 54

<b>Class A @ 10 m</b>		
Frequency [MHz]	Detector	Limit [dB $\mu$ V/m]
30 - 88	Quasi-peak	39
88 - 216	Quasi-peak	43.5
216 - 960	Quasi-peak	46.5
960 - 1000	Quasi-peak	49.5
> 1000	Peak Average	69.5 49.5

#### 2.1.6 Results

<b>Test Results</b>			
Operational mode	EUT Configuration	Verdict	Remark
1	1	PASS	

2.1.7 Setup Photos

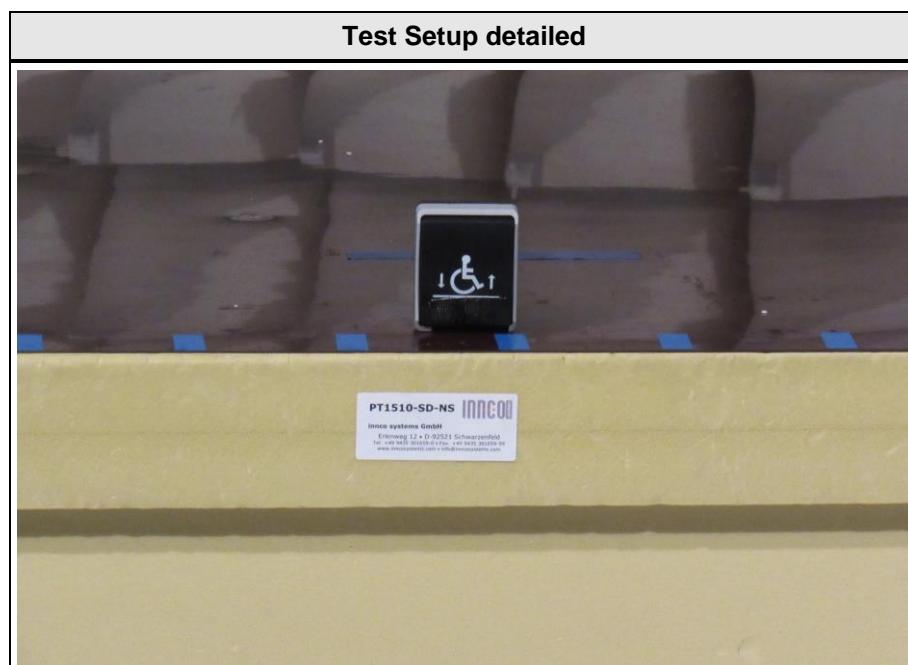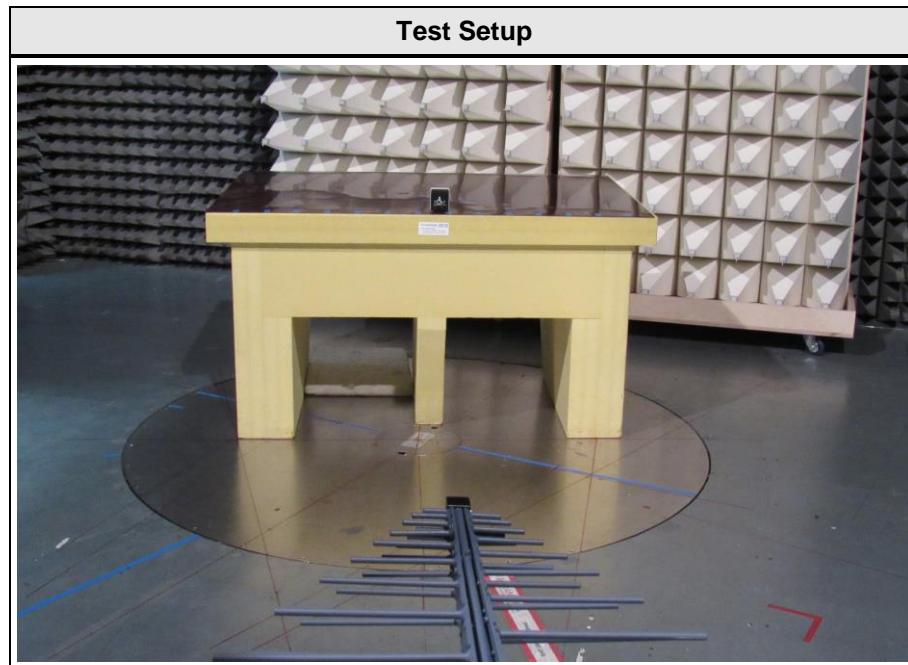


### 2.1.8 Records

#### Radiated emissions under normal conditions according to FCC Part 15b

Project number: G0M-1805-7423

Applicant: Liftup A/S  
EUT Name: Remote Control for Liftup A/S products  
Model: Remote 2  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Marquardt  
Test Conditions: Tnom: 23°C, Unom: 3 VDC (battery)  
Antenna: Rohde & Schwarz HK 116, Horizontal  
Measurement distance: 3m  
Mode: continous Tx  
Test Date: 2018-07-17  
Note:

Index 2

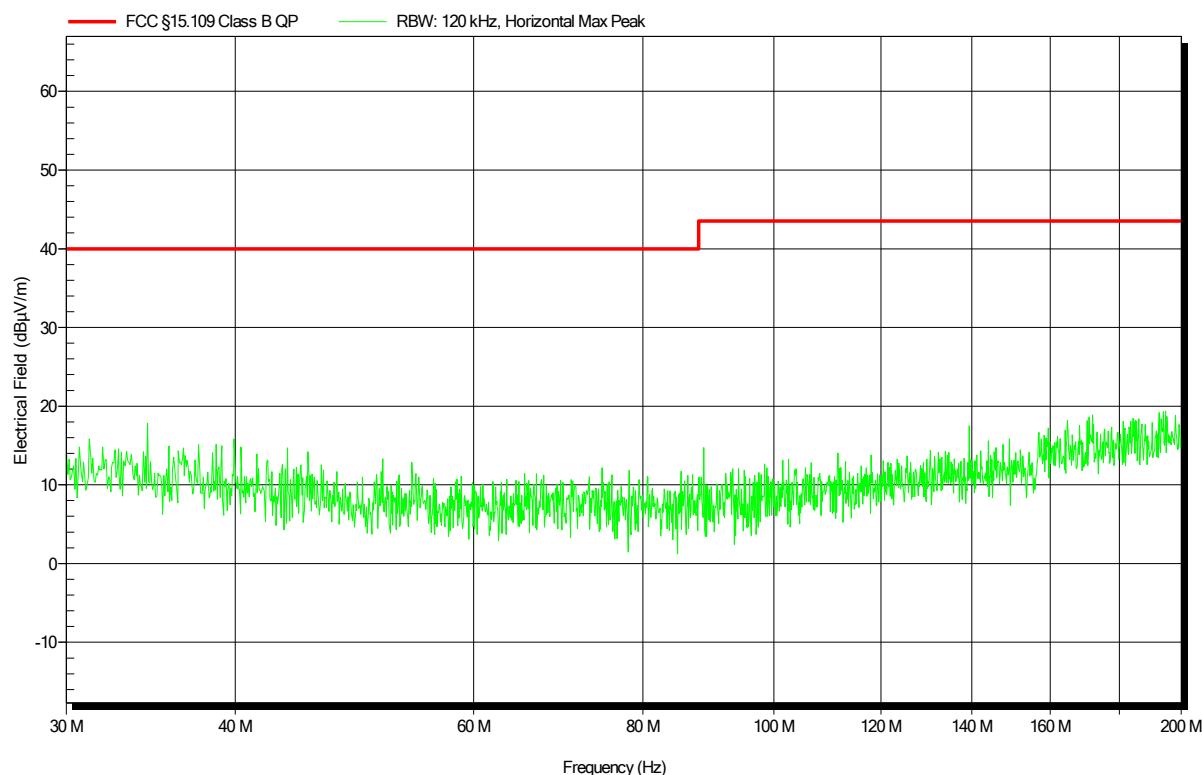


**Radiated emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1805-7423

Applicant: Liftup A/S  
EUT Name: Remote Control for Liftup A/S products  
Model: Remote 2  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Marquardt  
Test Conditions: Tnom: 23°C, Unom: 3 VDC (battery)  
Antenna: Rohde & Schwarz HK 116, Vertical  
Measurement distance: 3m  
Mode: continuous Tx  
Test Date: 2018-07-17  
Note:

Index 1

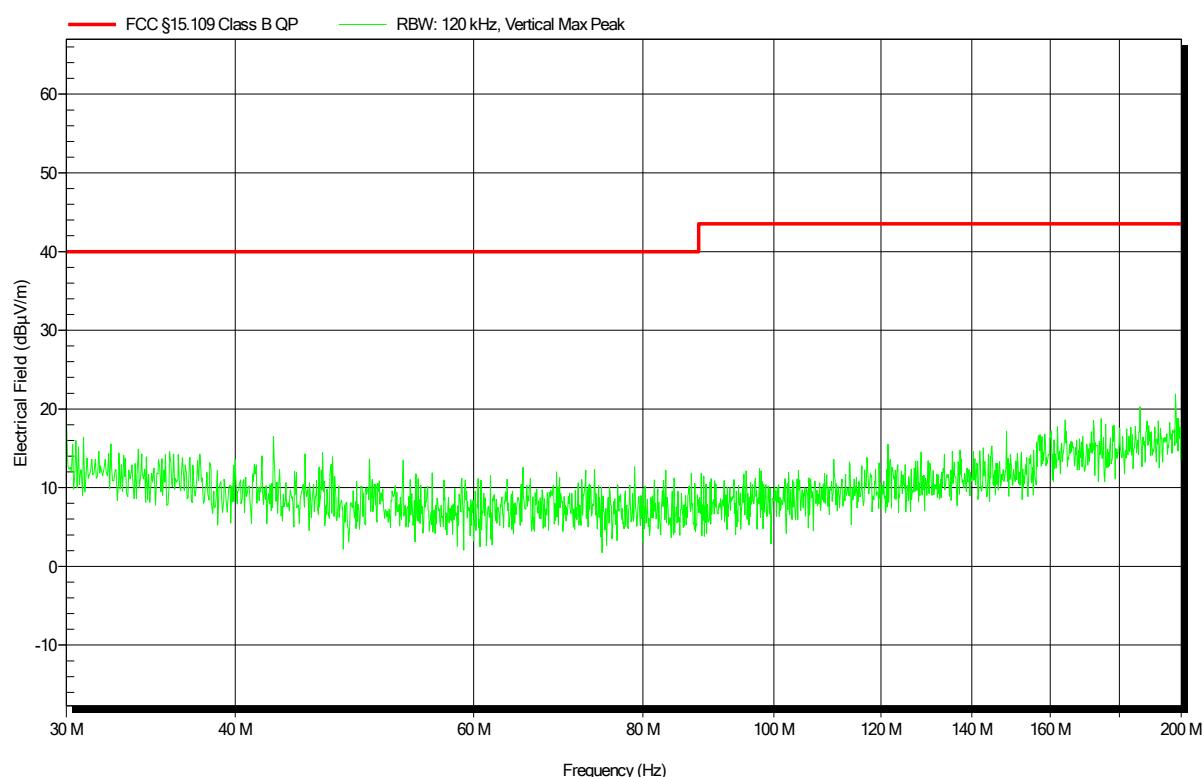


**Radiated emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1805-7423

Applicant: Liftup A/S  
EUT Name: Remote Control for Liftup A/S products  
Model: Remote 2  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Marquardt  
Test Conditions: Tnom: 23°C, Unom: 3 VDC (battery)  
Antenna: Rohde & Schwarz HL 223, Horizontal  
Measurement distance: 3m  
Mode: continuous Tx  
Test Date: 2018-07-17  
Note:

Index 3

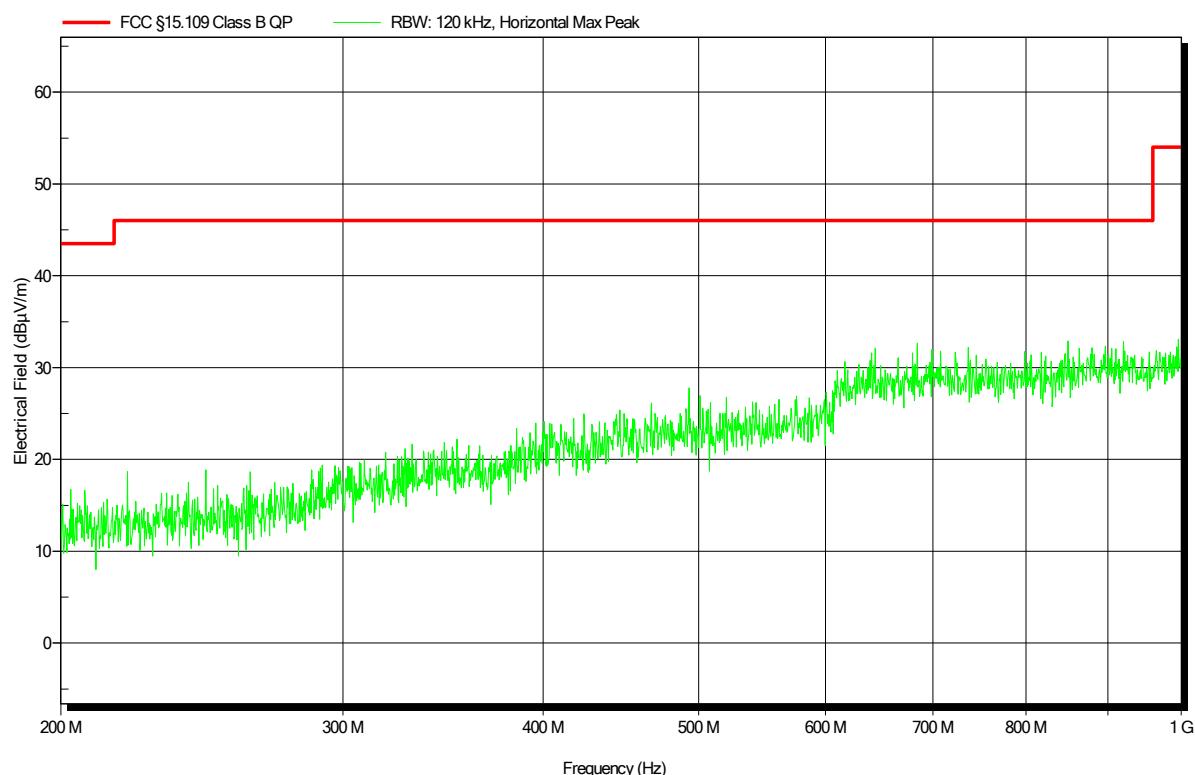

Test Report No.: G0M-1805-7423-EF0115B-V01

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 22 of 25

**Radiated emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1805-7423

Applicant: Liftup A/S  
EUT Name: Remote Control for Liftup A/S products  
Model: Remote 2  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Marquardt  
Test Conditions: Tnom: 23°C, Unom: 3 VDC (battery)  
Antenna: Rohde & Schwarz HL 223, Vertical  
Measurement distance: 3m  
Mode: continuous Tx  
Test Date: 2018-07-17  
Note:

Index 4

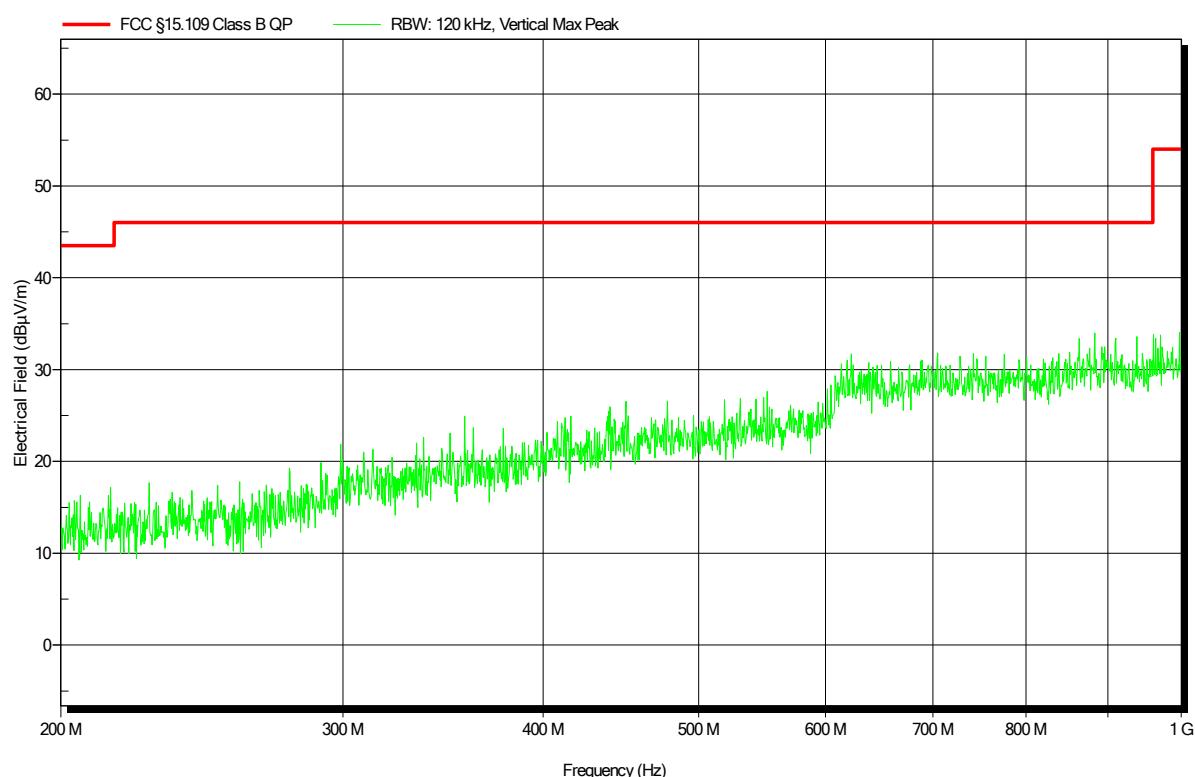

---

Test Report No.: G0M-1805-7423-EF0115B-V01

---


Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Radiated emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1805-7423

Applicant: Liftup A/S  
EUT Name: Remote Control for Liftup A/S products  
Model: Remote 2  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Marquardt  
Test Conditions: Tnom: 23°C, Unom: 3 VDC (battery)  
Antenna: Schwarzbeck BBHA 9120D, Horizontal  
Measurement distance: 3m  
Mode: continuous Tx  
Test Date: 2018-07-17  
Note:

Index 5

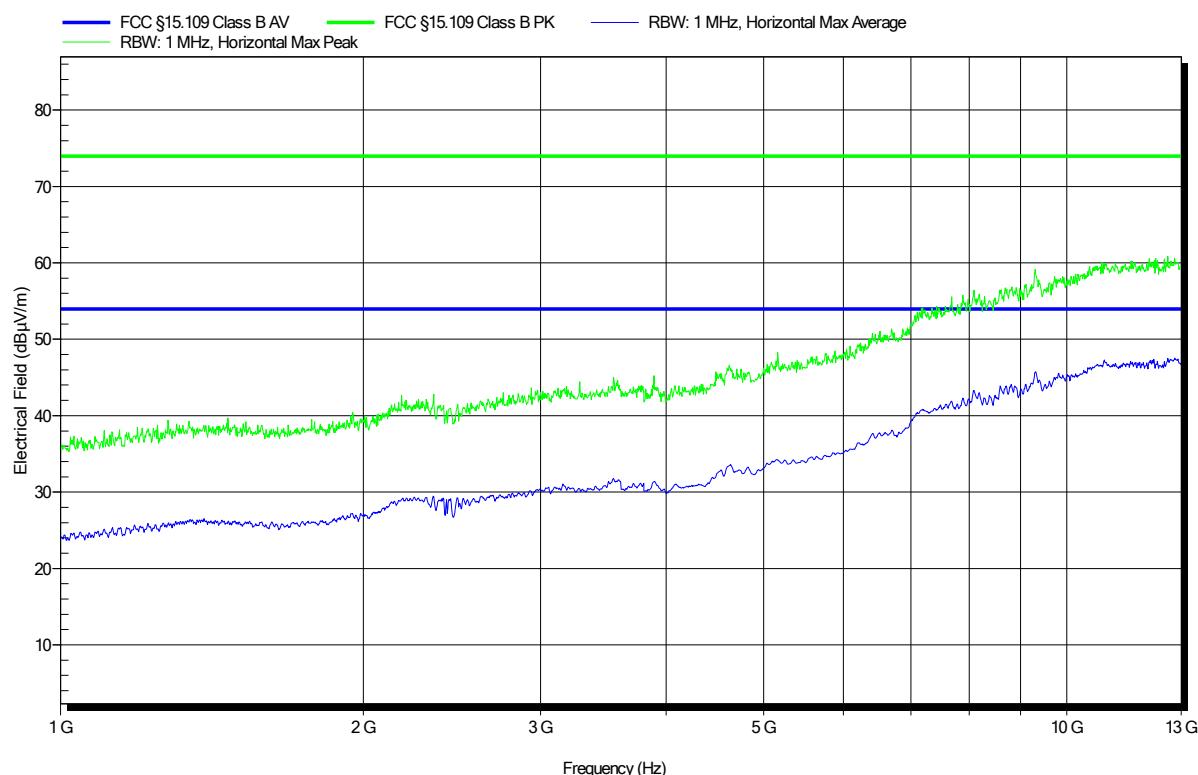

---

Test Report No.: G0M-1805-7423-EF0115B-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany


Page 24 of 25

**Radiated emissions under normal conditions according to FCC Part 15b**

Project number: G0M-1805-7423

Applicant: Liftup A/S  
EUT Name: Remote Control for Liftup A/S products  
Model: Remote 2  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Marquardt  
Test Conditions: Tnom: 23°C, Unom: 3 VDC (battery)  
Antenna: Schwarzbeck BBHA 9120D, Vertical  
Measurement distance: 3m  
Mode: continuous Tx  
Test Date: 2018-07-17  
Note:

Index 6

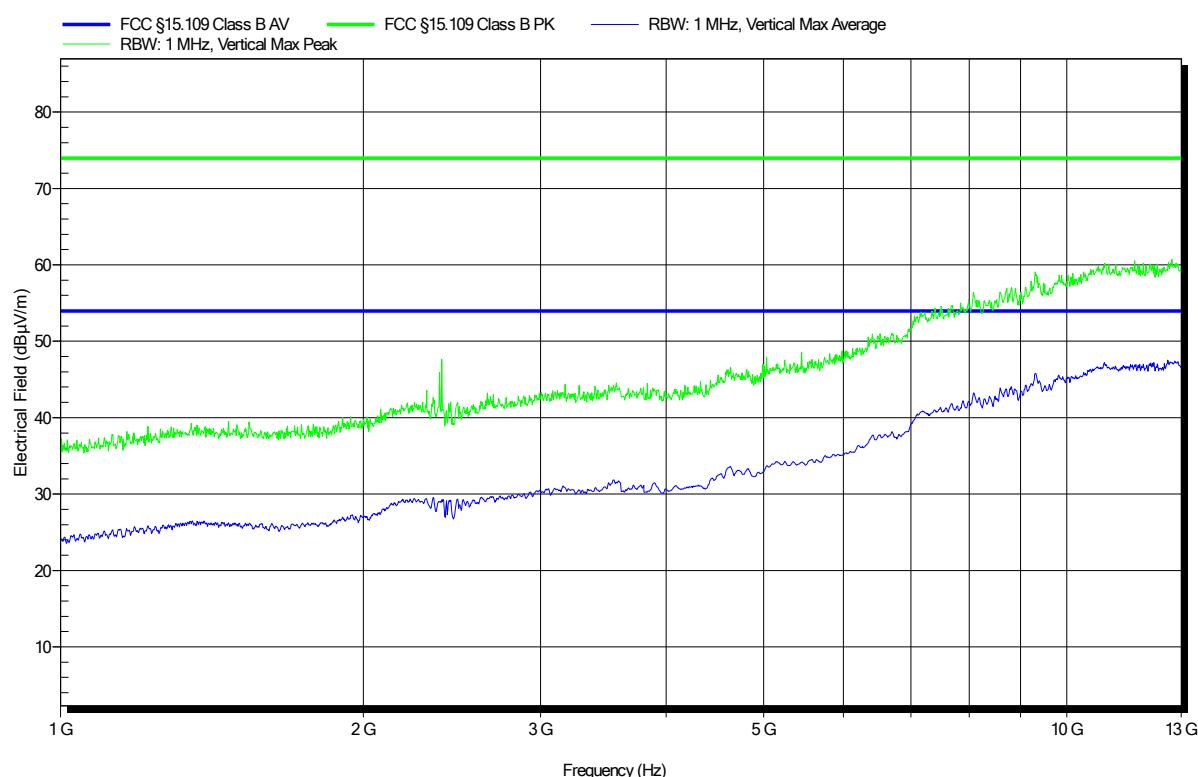

---

Test Report No.: G0M-1805-7423-EF0115B-V01

---

Eurofins Product Service GmbH  
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 25 of 25