

# FCC Radio Test Report

## FCC ID: 2AK80-S100

**Report No.** : TB-FCC151604  
**Applicant** : Shenzhen Qianyan Intelligent Technology Electric Vehicle Co., LTD.  
**Equipment Under Test (EUT)**  
**EUT Name** : Wireless Four Wheel Electric Scooter  
**Model No.** : S100  
**Serial No.** : Please see the page of 3  
**Brand Name** : FS.FCM  
**Receipt Date** : 2017-02-07  
**Test Date** : 2017-02-08 to 2017-02-23  
**Issue Date** : 2017-02-24  
**Standards** : FCC Part 15, Subpart C (15.249: 2016)  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC requirements

**Test/Witness Engineer** : 

**Approved & Authorized** : 



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

---

---

# Contents

**CONTENTS.....2**

**1. GENERAL INFORMATION ABOUT EUT .....3**

1.1 Client Information.....3

1.2 General Description of EUT (Equipment Under Test) .....3

1.3 Block Diagram Showing the Configuration of System Tested.....4

1.4 Description of Support Units .....5

1.5 Description of Test Mode.....6

1.6 Description of Test Software Setting .....6

1.7 Measurement Uncertainty .....7

1.8 Test Facility.....7

**2. TEST SUMMARY .....8**

**3. TEST EQUIPMENT .....9**

**4. CONDUCTED EMISSION TEST .....10**

4.1 Test Standard and Limit.....10

4.2 Test Setup.....10

4.3 Test Procedure.....10

4.4 EUT Operating Mode .....11

4.5 Test Data.....11

**5. RADIATED EMISSION TEST .....16**

5.1 Test Standard and Limit.....16

5.2 Test Setup.....17

5.3 Test Procedure.....18

5.4 EUT Operating Condition .....19

5.5 Test Data.....19

**6. BANDWIDTH TEST .....34**

6.1 Test Setup.....34

6.2 Test Procedure.....34

6.3 EUT Operating Condition .....34

6.4 Test Data.....34

**7. ANTENNA REQUIREMENT .....38**

7.1 Standard Requirement.....38

7.2 Antenna Connected Construction .....38

7.3 Result.....38

# 1. General Information about EUT

## 1.1 Client Information

<b>Applicant</b>	:	Shenzhen Qianyan Intelligent Technology Electric Vehicle Co., LTD.
<b>Address</b>	:	5F,8Building,Jinfanghua Electric Business Industrial Park,Zhongxing Road,Buji New District,Shenzhen City, China
<b>Manufacturer</b>	:	Shenzhen Qianyan Intelligent Technology Electric Vehicle Co., LTD.
<b>Address</b>	:	5F,8Building,Jinfanghua Electric Business Industrial Park,Zhongxing Road,Buji New District,Shenzhen City, China

## 1.2 General Description of EUT (Equipment Under Test)

<b>EUT Name</b>	:	Wireless Four Wheel Electric Scooter
<b>Models No.</b>	:	S100, SL100, S200, SL200, S300, SL300, SL400, SL500, SP400, SP300, SP200, SP100, SY100, S400, S500
<b>Model Difference</b>	:	All these models are identical in the same PCB, layout and electrical circuit, the only difference is model name for commercial.
<b>Product Description</b>	:	Operation Frequency:2402~2478 MHz
	Number of Channels:	77 Channels
	Out Power:	78.64 dBuV/m@3m Peak 74.65 dBuV/m@3m Avg
	Antenna Gain:	0 dBi PCB Antenna
	Modulation Type:	GFSK
<b>Power Supply</b>	:	DC power by USB cable. DC power by Li-ion battery.
<b>Power Rating</b>	:	DC 5V by USB Cable. DC 3.7V by 400mAh Li-ion Battery
<b>Connecting I/O Port(S)</b>	:	Please refer to the User's Manual

### Note:


- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Channel List:

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459


04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	<b>40</b>	<b>2442</b>	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	<b>76</b>	<b>2478</b>
23	2425	50	2452		
24	2426	51	2453		
25	2427	52	2454		
26	2428	53	2455		

### 1.3 Block Diagram Showing the Configuration of System Tested

Mode 1: USB Charging+TX Mode

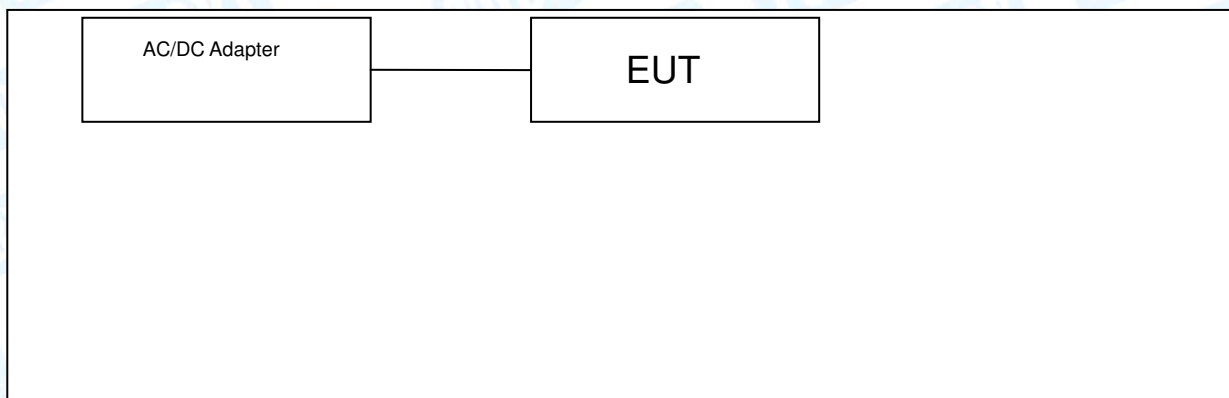

Mode 2: TX Mode

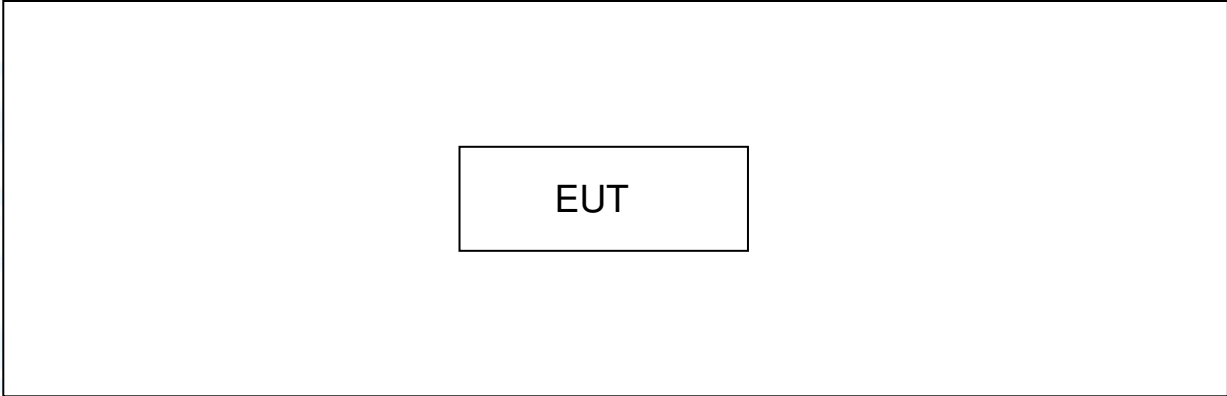

### 1.4 Description of Support Units

Equipment Information				
Name	Model	FCC ID/VOC	Manufacturer	Used “√”
AC/DC Adapter	TEKA012	VOC	TEKA	√
AC/DC Adapter: Input:100~240V, 50/60Hz, 0.2A. Output: 5V, 1A				
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	YES	YES	0.6M	

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Conducted Test	
Final Test Mode	Description
Mode 1	USB Charging with TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 2	TX Mode(CH00/CH40/CH76)

### Note:

For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

- (1)According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels.
- (2)During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

## 1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF mode.

<b>Product SW/HW Version :</b>	N/A		
<b>Radio SW/HW Version:</b>	N/A		
<b>Test Software Version</b>	N/A		
Frequency	2402 MHz	2442MHz	2478 MHz
GFSK	DEF	DEF	DEF

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty ( $U_{Lab}$ )
Conducted Emission	Level Accuracy: 9kHz~150kHz	$\pm 3.42$ dB
	150kHz to 30MHz	$\pm 3.42$ dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	$\pm 4.60$ dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	$\pm 4.40$ dB
Radiated Emission	Level Accuracy: Above 1000MHz	$\pm 4.20$ dB

## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **FCC List No.: (811562)**

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.

## 2. Test Summary

FCC Part 15 Subpart C(15.249)			
Standard Section	Test Item	Judgment	Remark
15.203	Antenna Requirement	PASS	N/A
15.205	Restricted Bands	PASS	N/A
15.207	AC Power Conducted Emission	PASS	N/A
15.249 &15.209	Radiated Spurious Emission	PASS	N/A
15.215(C)	20dB Bandwidth	PASS	N/A

**Note:** N/A is an abbreviation for Not Applicable.



### 3. Test Equipment

AC Main Conducted Emission					
Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	ROHDE& SCHWARZ	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	Rohde & Schwarz	ENV216	101131	Jul. 22, 2016	Jul. 21, 2017
L.I.S.N	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jul. 22, 2016	Jul. 21, 2017
Radiation Spurious Emission					
Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
EMI Test Receiver	Rohde & Schwarz	ESPI	100010/007	Jul. 22, 2016	Jul. 21, 2017
Bilog Antenna	ETS-LINDGREN	3142E	00117537	Mar. 20, 2016	Mar. 19, 2017
Horn Antenna	ETS-LINDGREN	3117	00143207	Mar. 19, 2016	Mar. 18, 2017
Pre-amplifier	Sonoma	310N	185903	Mar. 20, 2016	Mar. 19, 2017
Pre-amplifier	HP	8447B	3008A00849	Mar. 26, 2016	Mar. 25, 2017
Loop Antenna	Laplace instrument	RF300	0701	Mar. 19, 2016	Mar. 18, 2017
Cable	HUBER+SUHNER	100	SUCOFLEX	Mar. 26, 2016	Mar. 25, 2017
Positioning Controller	ETS-LINDGREN	2090	N/A	N/A	N/A
Antenna Conducted Emission					
Description	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4407B	MY45106456	Jul. 22, 2016	Jul. 21, 2017
Spectrum Analyzer	Rohde & Schwarz	ESCI	100321	Jul. 22, 2016	Jul. 21, 2017

## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

#### 4.1.1 Test Standard

FCC Part 15.207

#### 4.1.2 Test Limit

**Conducted Emission Test Limit**

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50


Notes:

(1) \*Decreasing linearly with logarithm of the frequency.

(2) The lower limit shall apply at the transition frequencies.

(3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

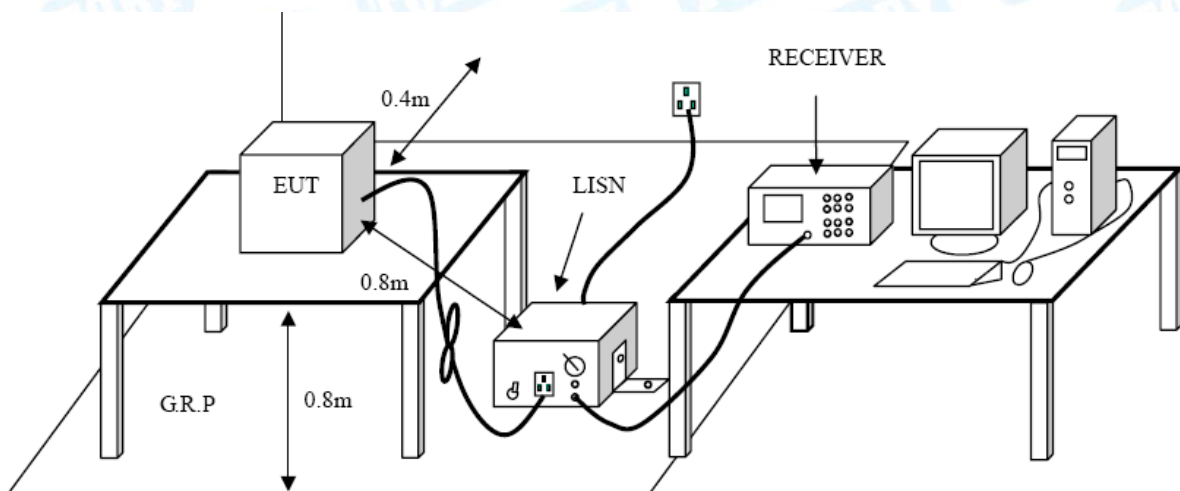

### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.


#### 4.4 EUT Operating Mode

Please refer to the description of test mode.

#### 4.5 Test Data

Test data please refer the following pages.


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60 Hz		
<b>Terminal:</b>	Line		
<b>Test Mode:</b>	Charging with TX Mode 2402 MHz		
<b>Remark:</b>	Only worse case is reported		

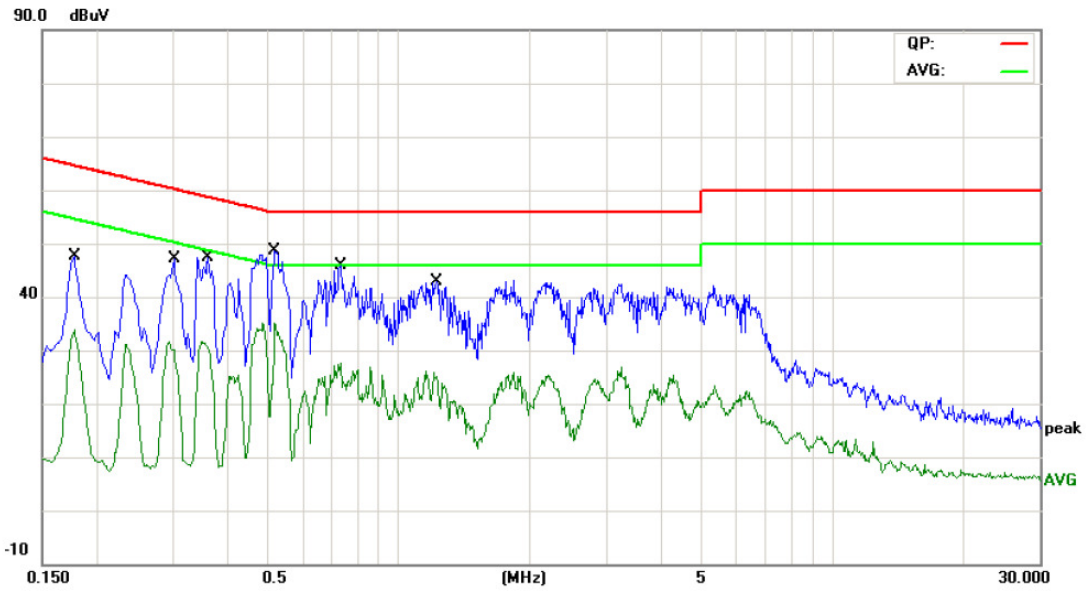

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1780	34.11	9.98	44.09	64.57	-20.48	QP
2		0.1780	22.49	9.98	32.47	54.57	-22.10	AVG
3		0.3020	31.16	10.02	41.18	60.19	-19.01	QP
4		0.3020	19.69	10.02	29.71	50.19	-20.48	AVG
5		0.3620	30.96	10.02	40.98	58.68	-17.70	QP
6		0.3620	20.44	10.02	30.46	48.68	-18.22	AVG
7	*	0.5180	35.28	10.03	45.31	56.00	-10.69	QP
8		0.5180	22.88	10.03	32.91	46.00	-13.09	AVG
9		0.7340	30.80	10.11	40.91	56.00	-15.09	QP
10		0.7340	15.70	10.11	25.81	46.00	-20.19	AVG
11		1.2180	26.78	10.06	36.84	56.00	-19.16	QP
12		1.2180	14.02	10.06	24.08	46.00	-21.92	AVG

**Emission Level= Read Level+ Correct Factor**


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 120V/60 Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Charging with TX Mode 2402 MHz		
<b>Remark:</b>	Only worse case is reported		

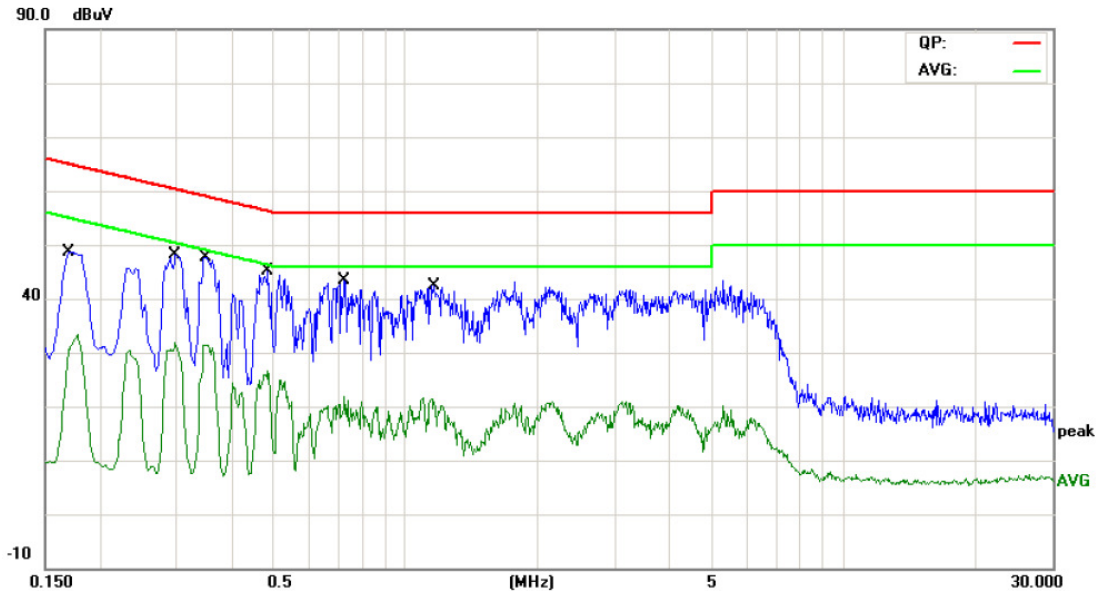

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1700	32.64	10.12	42.76	64.96	-22.20	QP
2		0.1700	16.03	10.12	26.15	54.96	-28.81	AVG
3		0.2980	33.98	10.09	44.07	60.30	-16.23	QP
4		0.2980	20.72	10.09	30.81	50.30	-19.49	AVG
5	*	0.3500	33.57	10.07	43.64	58.96	-15.32	QP
6		0.3500	20.32	10.07	30.39	48.96	-18.57	AVG
7		0.4860	30.38	10.02	40.40	56.24	-15.84	QP
8		0.4860	14.68	10.02	24.70	46.24	-21.54	AVG
9		0.7260	27.54	10.03	37.57	56.00	-18.43	QP
10		0.7260	9.24	10.03	19.27	46.00	-26.73	AVG
11		1.1620	25.83	10.14	35.97	56.00	-20.03	QP
12		1.1620	9.95	10.14	20.09	46.00	-25.91	AVG

**Emission Level= Read Level+ Correct Factor**


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 240V/60 Hz		
<b>Terminal:</b>	Line		
<b>Test Mode:</b>	Charging with TX Mode 2402 MHz		
<b>Remark:</b>	Only worse case is reported		

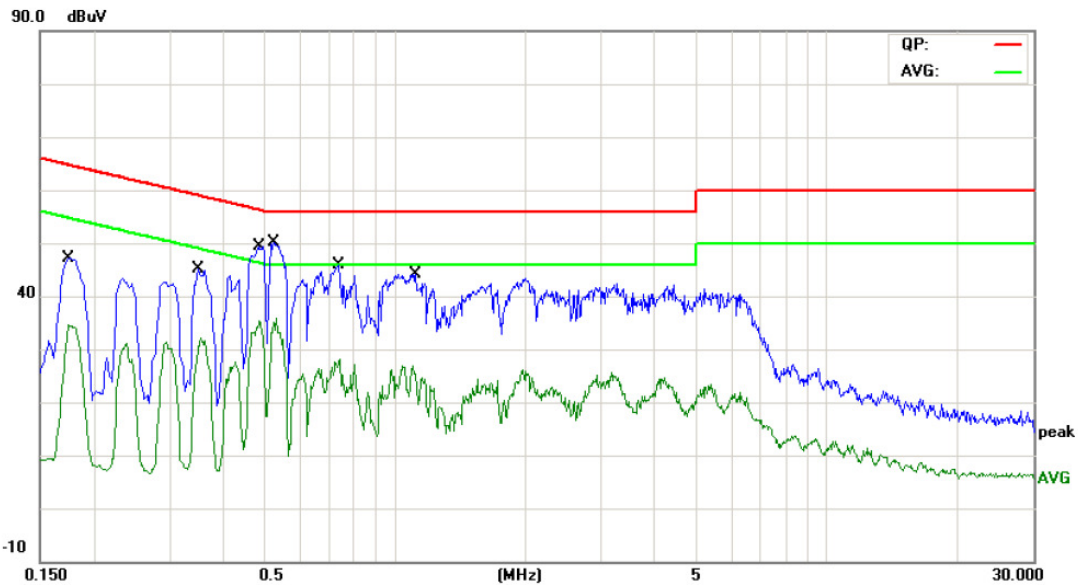

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1740	34.61	9.97	44.58	64.76	-20.18	QP
2		0.1740	22.51	9.97	32.48	54.76	-22.28	AVG
3		0.3500	31.46	10.02	41.48	58.96	-17.48	QP
4		0.3500	20.70	10.02	30.72	48.96	-18.24	AVG
5		0.4820	36.69	10.02	46.71	56.30	-9.59	QP
6		0.4820	24.07	10.02	34.09	46.30	-12.21	AVG
7	*	0.5220	37.39	10.03	47.42	56.00	-8.58	QP
8		0.5220	24.20	10.03	34.23	46.00	-11.77	AVG
9		0.7420	31.96	10.11	42.07	56.00	-13.93	QP
10		0.7420	16.09	10.11	26.20	46.00	-19.80	AVG
11		1.1140	29.80	10.06	39.86	56.00	-16.14	QP
12		1.1140	14.65	10.06	24.71	46.00	-21.29	AVG

**Emission Level= Read Level+ Correct Factor**

<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25°C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	AC 240V/60 Hz		
<b>Terminal:</b>	Neutral		
<b>Test Mode:</b>	Charging with TX Mode 2402 MHz		
<b>Remark:</b>	Only worse case is reported		

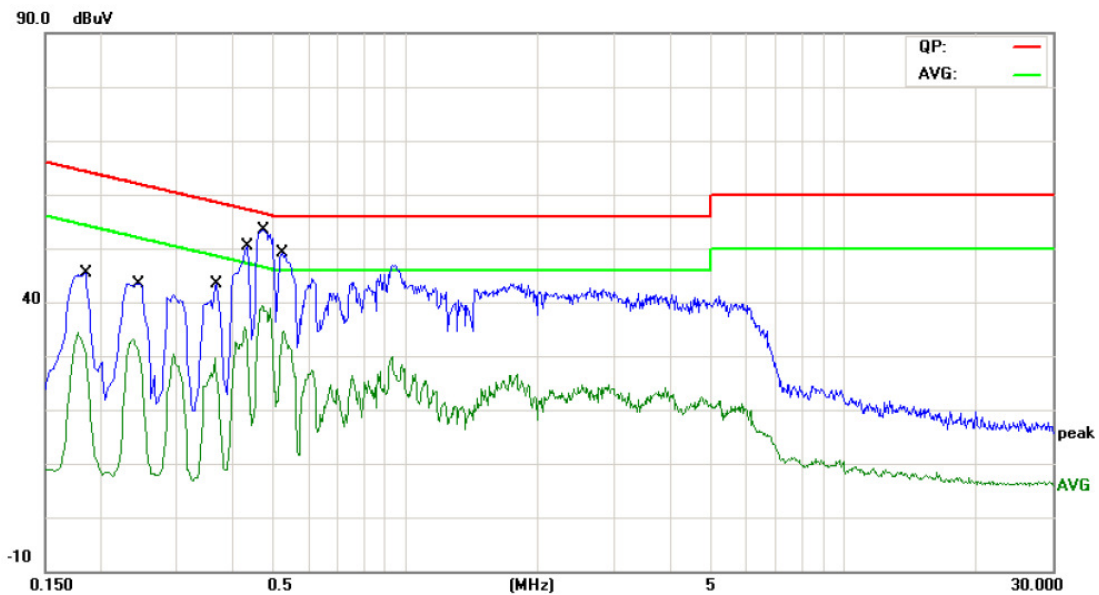

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1860	30.38	9.99	40.37	64.21	-23.84	QP
2		0.1860	16.99	9.99	26.98	54.21	-27.23	AVG
3		0.2460	31.39	10.02	41.41	61.89	-20.48	QP
4		0.2460	19.25	10.02	29.27	51.89	-22.62	AVG
5		0.3700	22.31	10.02	32.33	58.50	-26.17	QP
6		0.3700	7.65	10.02	17.67	48.50	-30.83	AVG
7		0.4300	30.43	10.02	40.45	57.25	-16.80	QP
8		0.4300	17.24	10.02	27.26	47.25	-19.99	AVG
9	*	0.4740	41.10	10.02	51.12	56.44	-5.32	QP
10		0.4740	28.67	10.02	38.69	46.44	-7.75	AVG
11		0.5220	33.44	10.03	43.47	56.00	-12.53	QP
12		0.5220	21.10	10.03	31.13	46.00	-14.87	AVG

**Emission Level= Read Level+ Correct Factor**

## 5. Radiated Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.209

#### 5.1.2 Test Limit

#### Radiated Emission Limit (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters (at 3m)	
	Peak	Average
Above 1000	74	54

#### Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(Uv/m)

#### Limits of radiated emission measurement (15.249)


FCC Part 15 (15.249), Subpart C	
Limit	Frequency Range (MHz)
Field strength of fundamental 50000 $\mu$ V/m (94 dB $\mu$ V/m) @ 3 m	2400~2483.5
Field strength of fundamental 500 $\mu$ V/m (94 dB $\mu$ V/m) @ 3 m	Above 2483.5

**Restricted bands requirement for equipment operating in 2400MHz to 2483.5 MHz (15.249)**




Restricted Frequency Band (MHz)	(dBuV/m)(at 3 M)
2310~2390	Attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation
2483.5~2500	


5.2 Test Setup

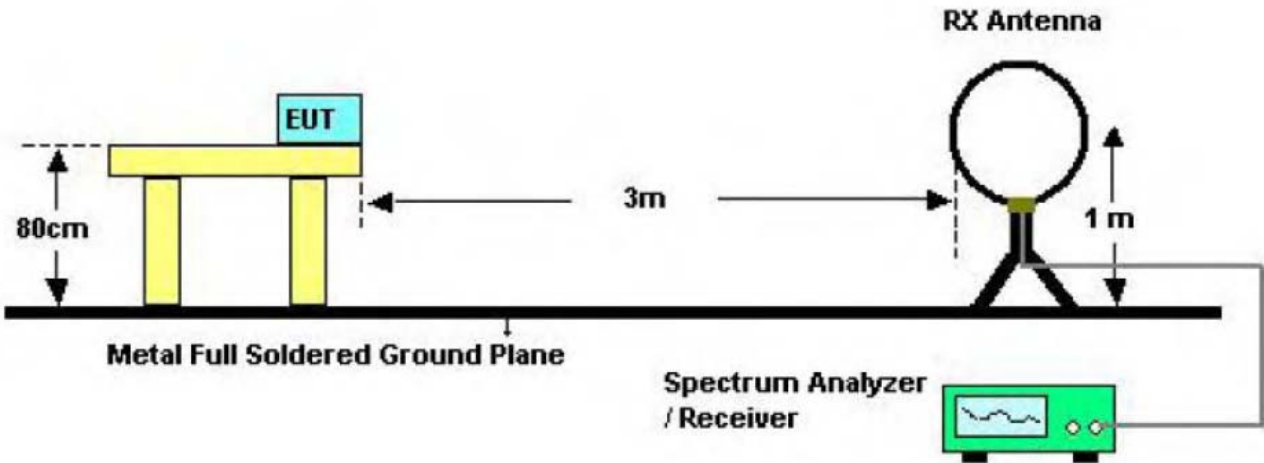

Bellow 30MHz Test Setup

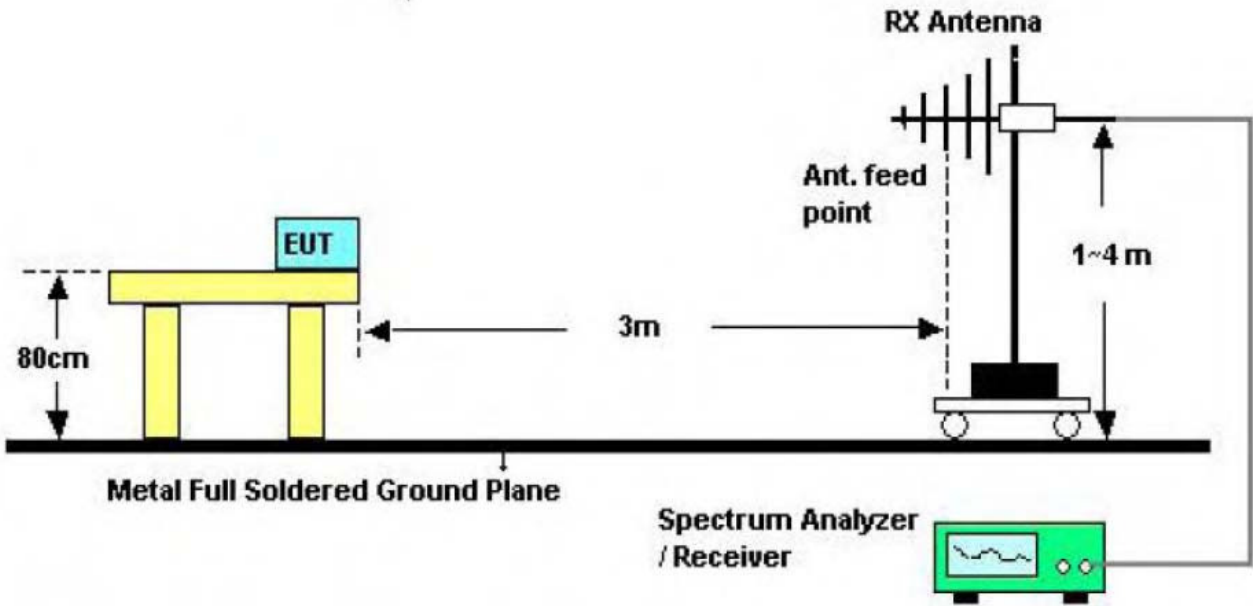

Bellow 1000MHz Test Setup

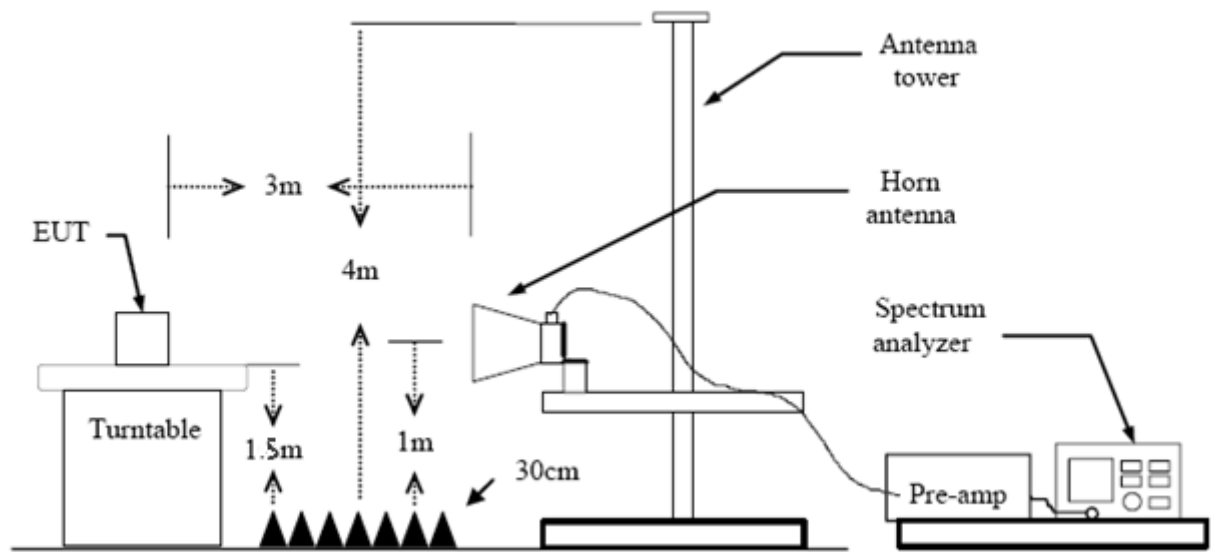

Above 1GHz Test Setup

### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

## 5.4 EUT Operating Condition


The EUT was set to Continual Transmitting in maximum power, and new batteries are used during testing.

## 5.5 Test Data

Please see the next page.

**5.6.1 Field Strength of the Fundamental**


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>			

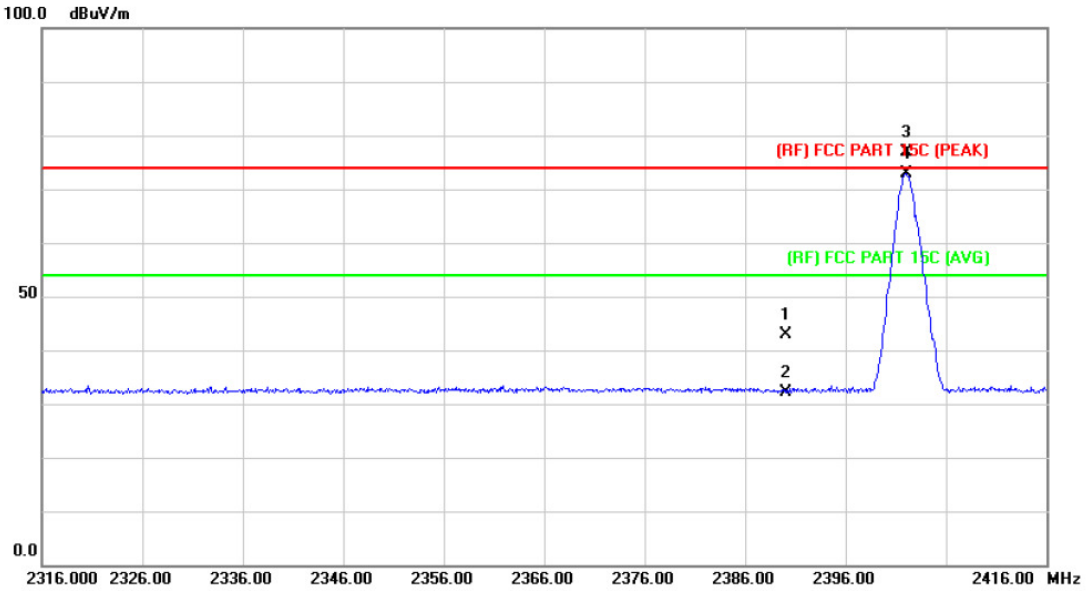

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2390.000	42.10	0.77	42.87	74.00	-31.13	peak
2		2390.000	31.39	0.77	32.16	54.00	-21.84	AVG
3	X	2402.000	76.17	0.82	76.99	114.00	-37.01	peak
4	*	2402.000	72.02	0.82	72.84	94.00	-21.16	AVG

Emission Level= Read Level+ Correct Factor


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>			

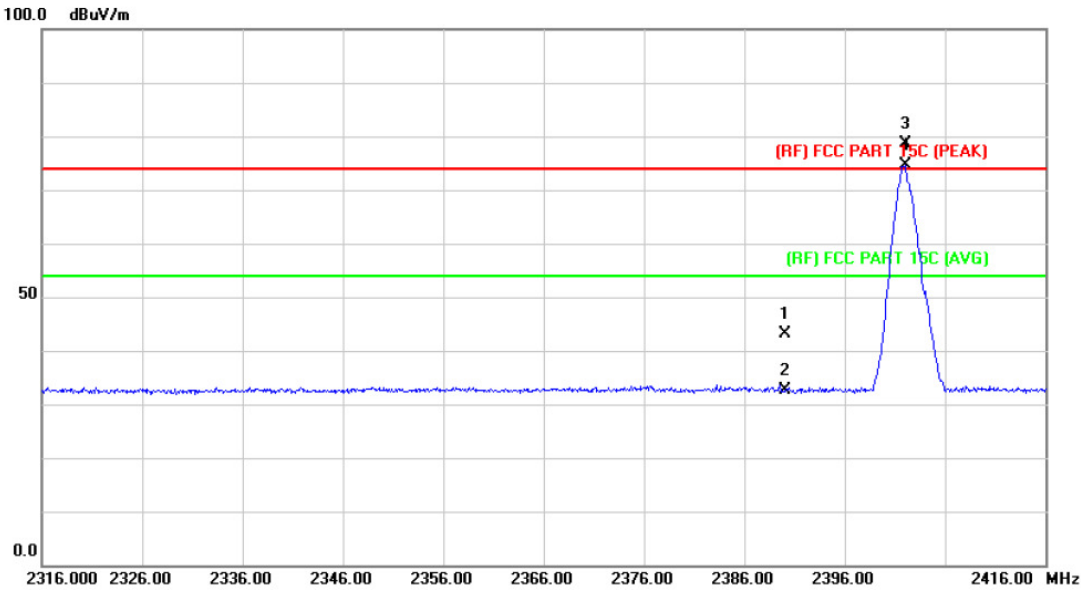

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1		2390.000	42.34	0.77	43.11	74.00	-30.89	peak
2		2390.000	31.81	0.77	32.58	54.00	-21.42	AVG
3	X	2402.000	77.82	0.82	78.64	114.00	-35.36	peak
4	*	2402.000	73.83	0.82	74.65	94.00	-19.35	AVG

**Emission Level= Read Level+ Correct Factor**


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>			

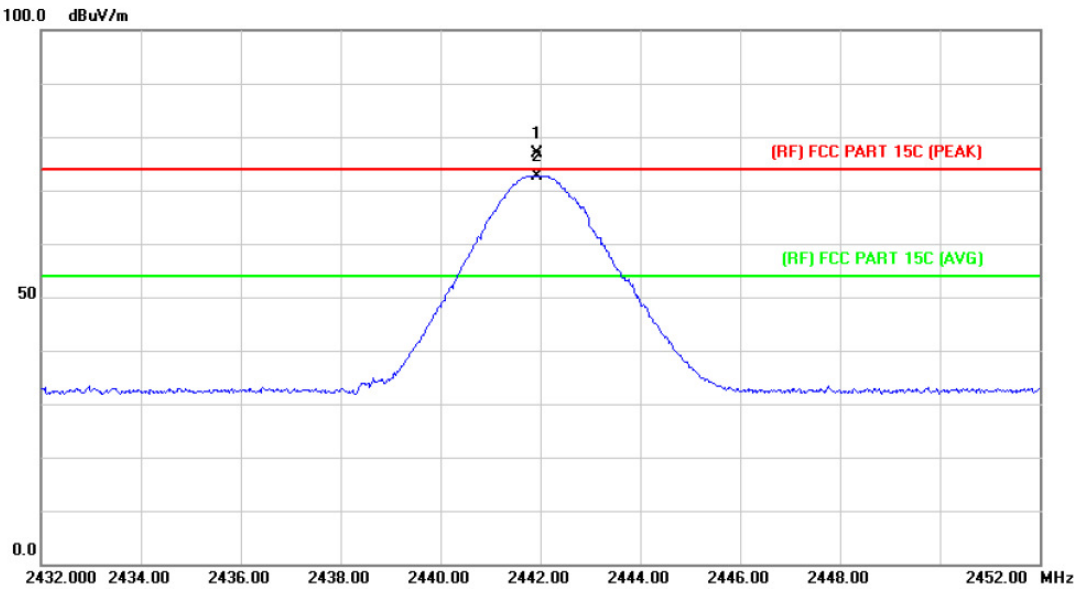

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	X	2441.920	75.87	0.99	76.86	114.00	-37.14	peak
2	*	2441.920	71.76	0.99	72.75	94.00	-21.25	AVG

Emission Level= Read Level+ Correct Factor


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>			

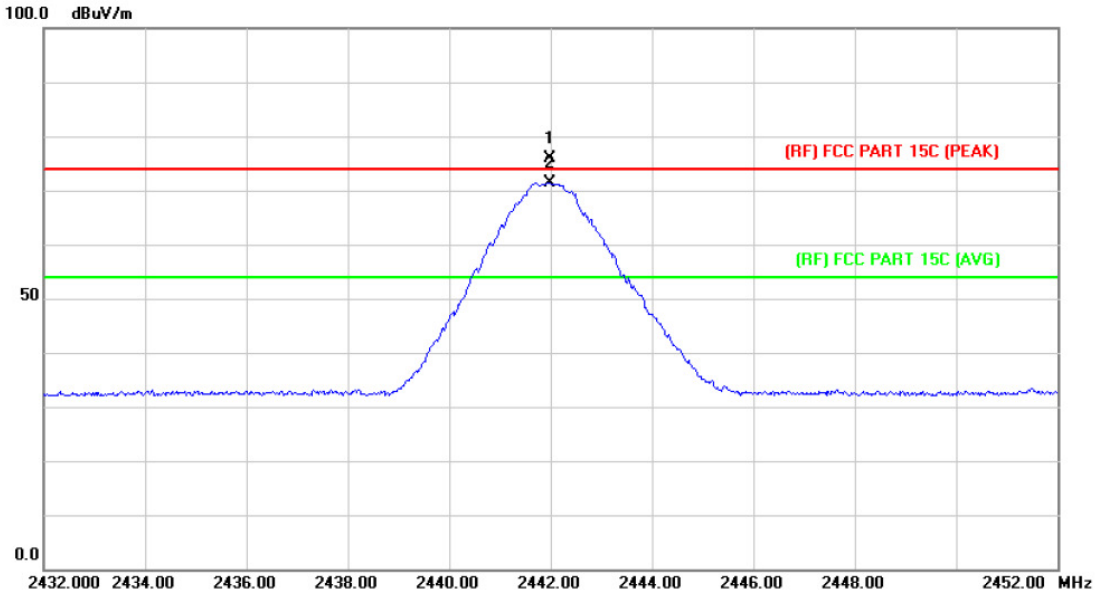

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2441.980	74.90	0.99	75.89	114.00	-38.11	peak
2	*	2441.980	70.39	0.99	71.38	94.00	-22.62	AVG

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2478MHz		
<b>Remark:</b>			

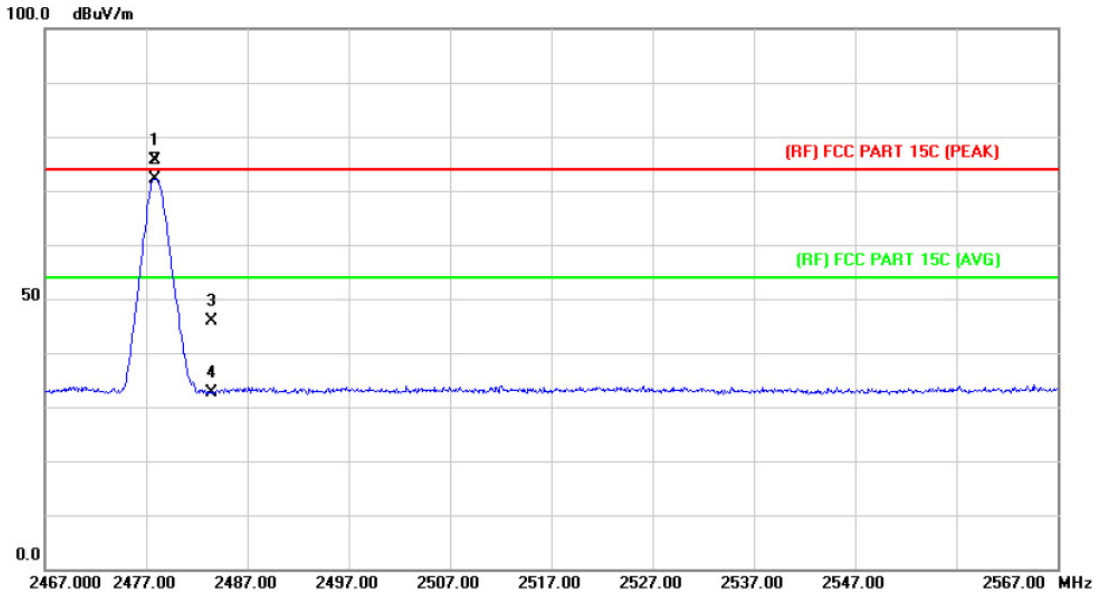


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2477.800	74.55	1.14	75.69	114.00	-38.31	peak
2	*	2477.900	71.06	1.14	72.20	94.00	-21.80	AVG
3		2483.500	44.59	1.17	45.76	74.00	-28.24	peak
4		2483.500	31.55	1.17	32.72	54.00	-21.28	AVG

Emission Level= Read Level+ Correct Factor



<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2478MHz		
<b>Remark:</b>			

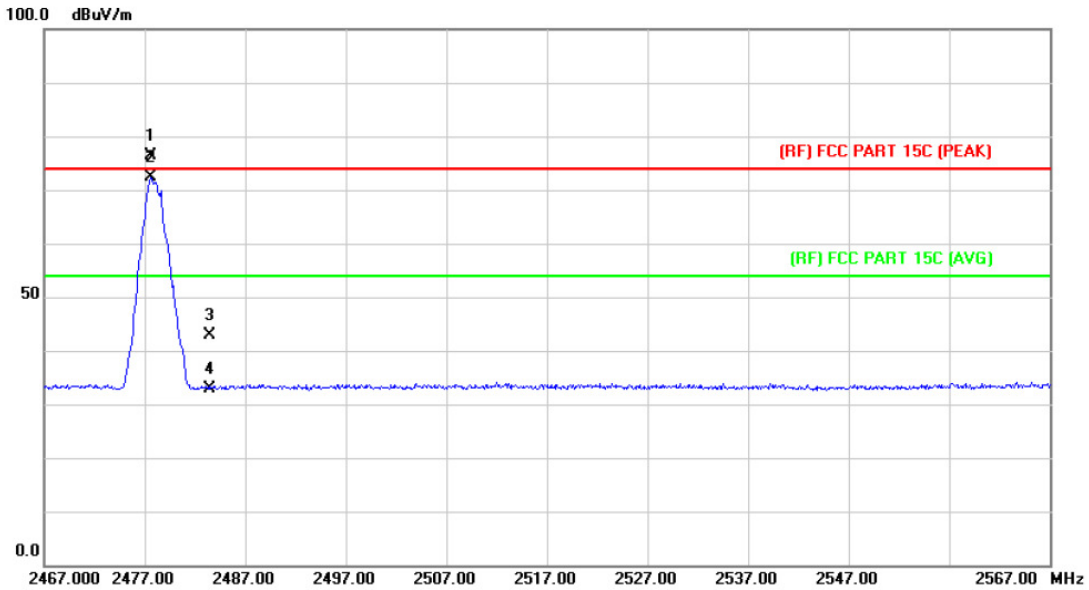

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	X	2477.600	75.24	1.14	76.38	114.00	-37.62	peak
2	*	2477.600	71.28	1.14	72.42	94.00	-21.58	AVG
3		2483.500	41.61	1.17	42.78	74.00	-31.22	peak
4		2483.500	31.72	1.17	32.89	54.00	-21.11	AVG

Emission Level= Read Level+ Correct Factor


**5.6.2 Radiated Spurious Emission (9 KHz~30 MHz)**

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

**5.6.3 Radiated Spurious Emission (Below 1 GHz)**


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>	Only worse case is reported		

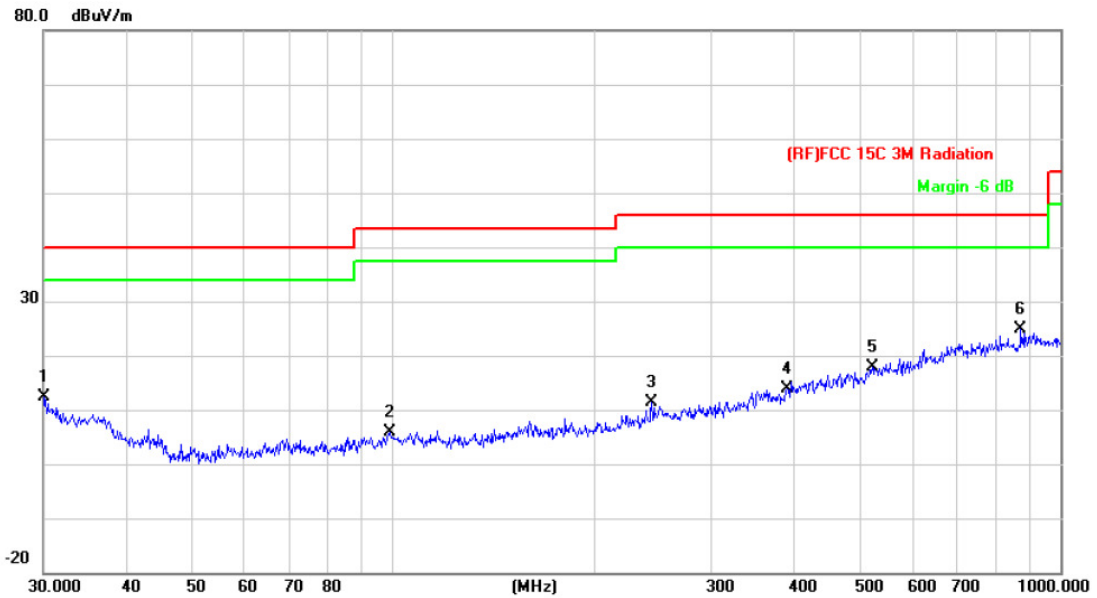

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector
1		30.0000	26.64	-14.15	12.49	40.00	-27.51	peak
2		98.8326	27.94	-21.95	5.99	43.50	-37.51	peak
3		244.2321	29.40	-17.99	11.41	46.00	-34.59	peak
4		389.3549	26.94	-13.05	13.89	46.00	-32.11	peak
5		522.7180	27.72	-9.74	17.98	46.00	-28.02	peak
6	*	872.1832	29.50	-4.71	24.79	46.00	-21.21	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>	Only worse case is reported		

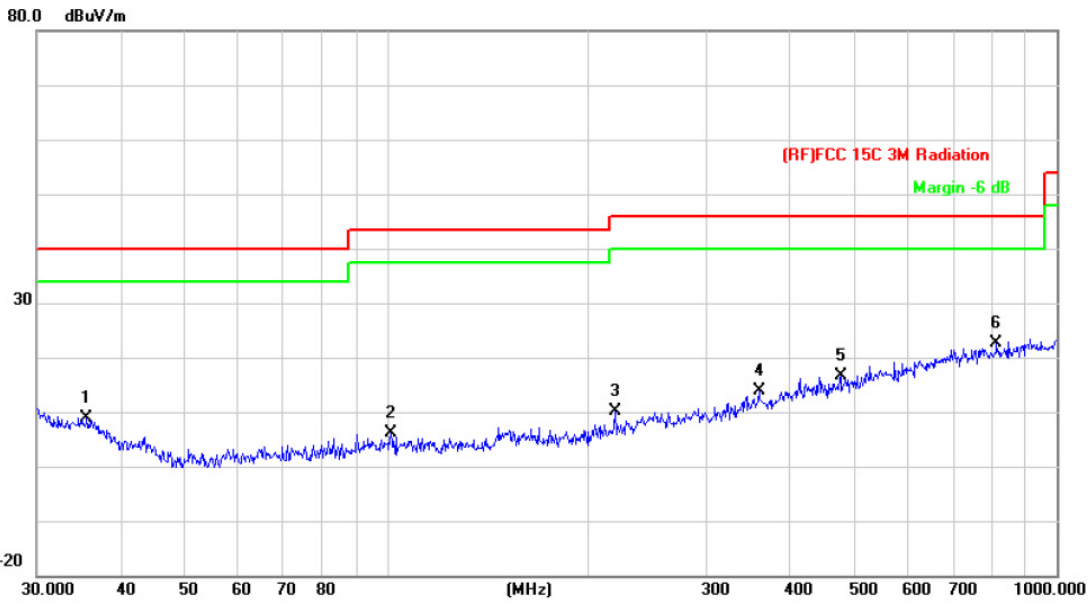


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		35.6240	26.48	-17.61	8.87	40.00	-31.13	peak
2		101.2885	28.09	-21.85	6.24	43.50	-37.26	peak
3		219.0753	29.23	-19.16	10.07	46.00	-35.93	peak
4		359.1860	27.86	-14.10	13.76	46.00	-32.24	peak
5		475.4991	27.78	-11.11	16.67	46.00	-29.33	peak
6	*	813.1115	27.82	-5.14	22.68	46.00	-23.32	peak

Emission Level= Read Level+ Correct Factor

### 5.6.4 Radiated Spurious Emission (Above 1 GHz)


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

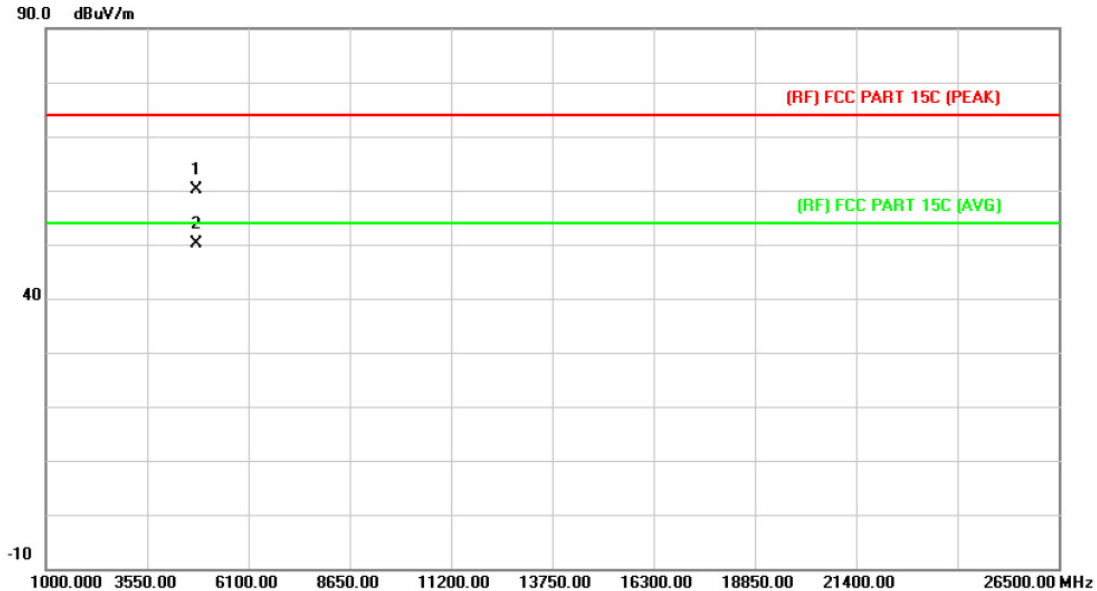

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4803.562	46.68	13.44	60.12	74.00	-13.88	peak
2	*	4805.470	36.58	13.45	50.03	54.00	-3.97	AVG

Emission Level= Read Level+ Correct Factor


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2402MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

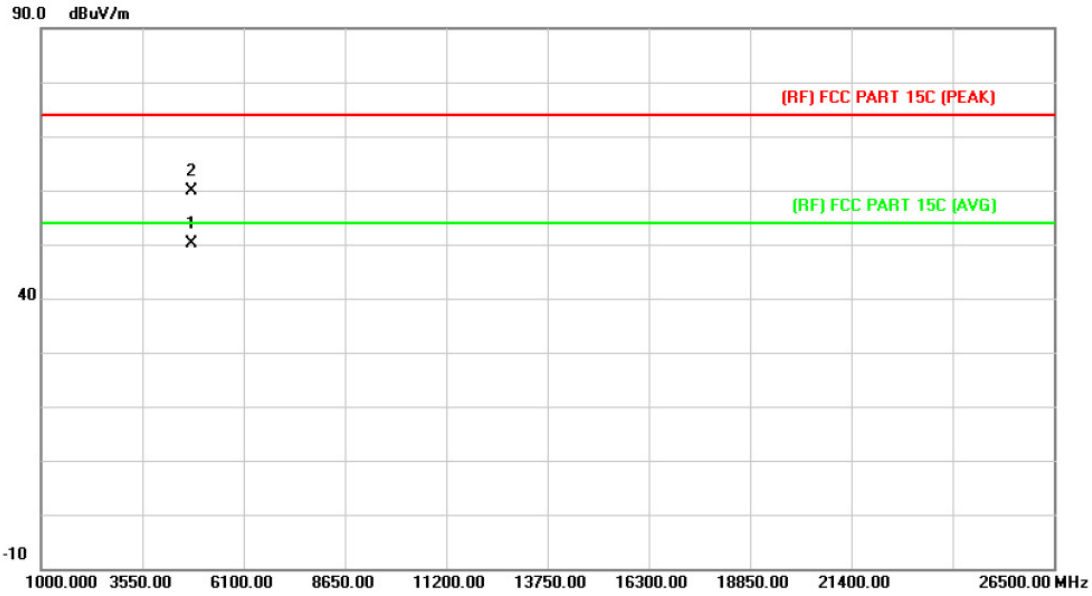

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4804.981	36.69	13.44	50.13	54.00	-3.87	AVG
2		4805.086	46.52	13.45	59.97	74.00	-14.03	peak

Emission Level= Read Level+ Correct Factor


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

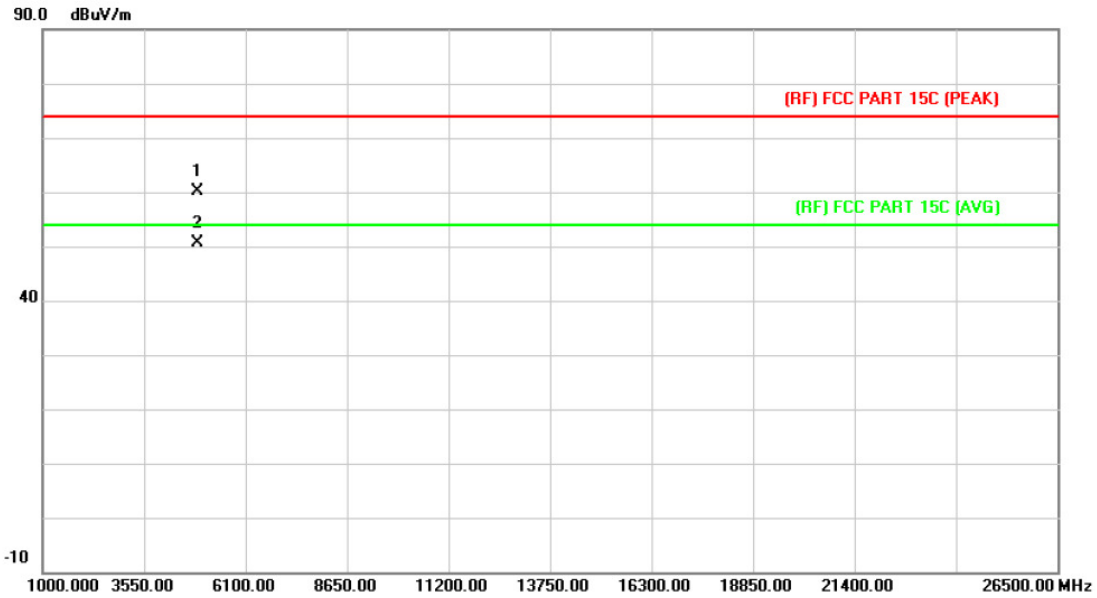

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4883.640	46.23	13.92	60.15	74.00	-13.85	peak
2	*	4883.868	36.71	13.92	50.63	54.00	-3.37	AVG

Emission Level= Read Level+ Correct Factor


<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2442MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

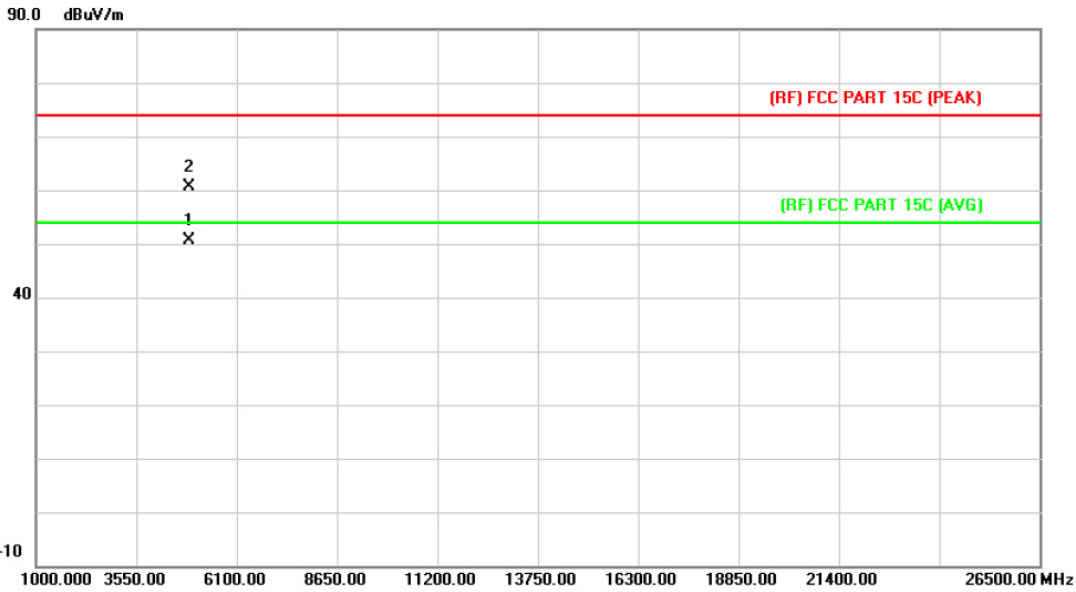

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4883.823	36.83	13.92	50.75	54.00	-3.25	AVG
2		4883.889	46.82	13.92	60.74	74.00	-13.26	peak

Emission Level= Read Level+ Correct Factor

<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Horizontal		
<b>Test Mode:</b>	TX 2478MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

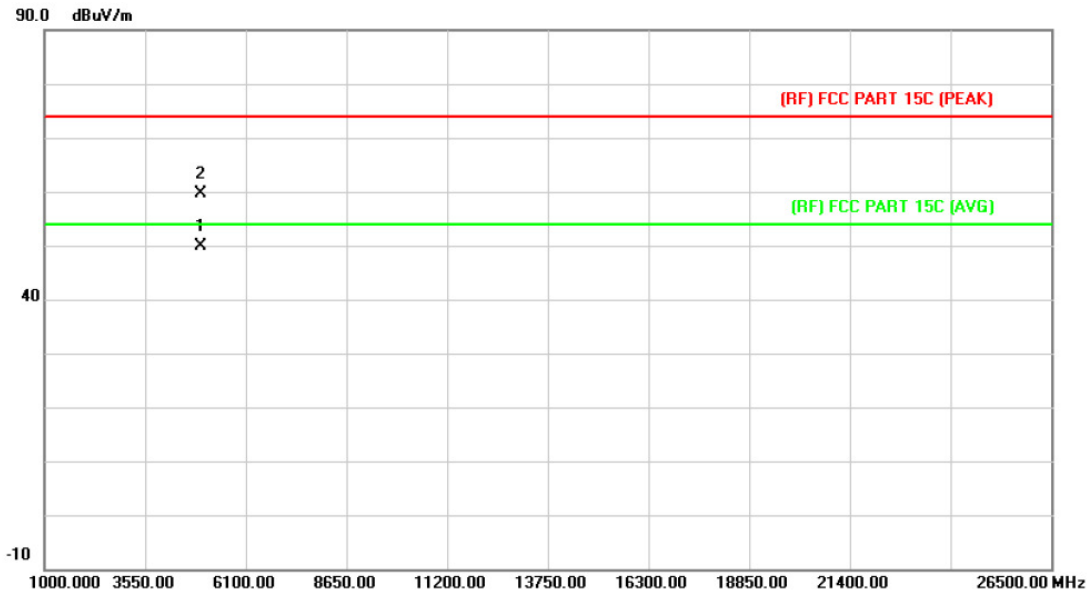


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	*	4955.853	35.59	14.34	49.93	54.00	-4.07	AVG
2		4956.216	45.20	14.34	59.54	74.00	-14.46	peak

Emission Level= Read Level+ Correct Factor



<b>EUT:</b>	Wireless Four Wheel Electric Scooter	<b>Model Name :</b>	S100
<b>Temperature:</b>	25 °C	<b>Relative Humidity:</b>	55%
<b>Test Voltage:</b>	DC 3.7V		
<b>Ant. Pol.</b>	Vertical		
<b>Test Mode:</b>	TX 2478MHz		
<b>Remark:</b>	No report for the emission which more than 10 dB below the prescribed limit.		

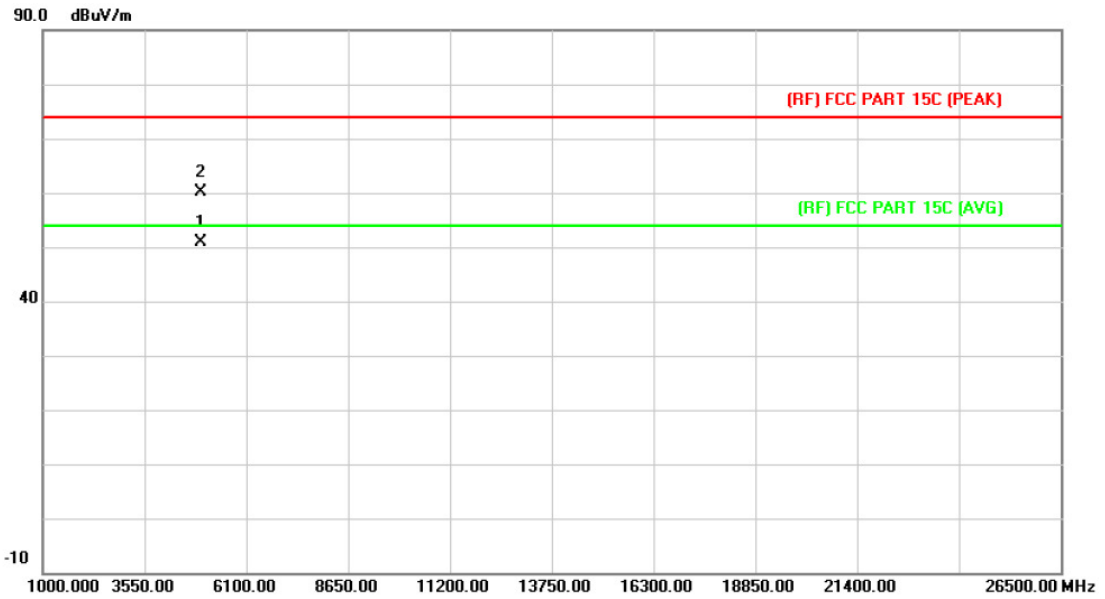


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	4955.814	36.58	14.34	50.92	54.00	-3.08	AVG
2		4955.844	45.82	14.34	60.16	74.00	-13.84	peak

Emission Level= Read Level+ Correct Factor

## 6. Bandwidth Test

### 6.1 Test Setup



### 6.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Bandwidth: RBW=100 kHz, VBW=300kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst -case (i.e the widest) bandwidth.


### 6.3 EUT Operating Condition

The EUT was set to continuously transmitting for the Bandwidth Test.

### 6.4 Test Data

Low Channel Frequency (MHz)	20dB Bandwidth (MHz)
2402	1.068


**2402 MHz**

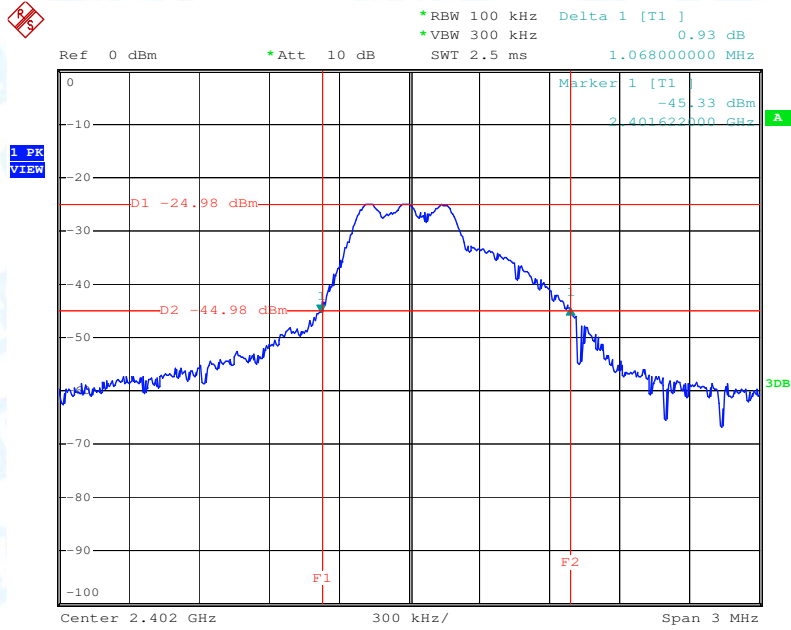

Date: 23.FEB.2017 13:09:50

<b>MID Channel Frequency (MHz)</b>	<b>20dB Bandwidth (MHz)</b>
2442	1.074


**2442 MHz**

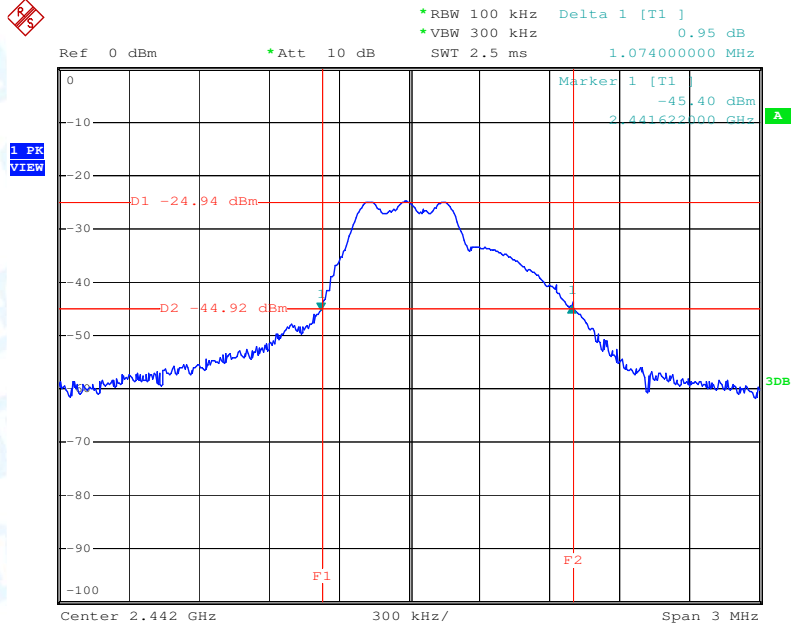

Date: 23.FEB.2017 13:16:13

HIGH Channel Frequency (MHz)	20dB Bandwidth (MHz)
2478	1.074

**2478 MHz**

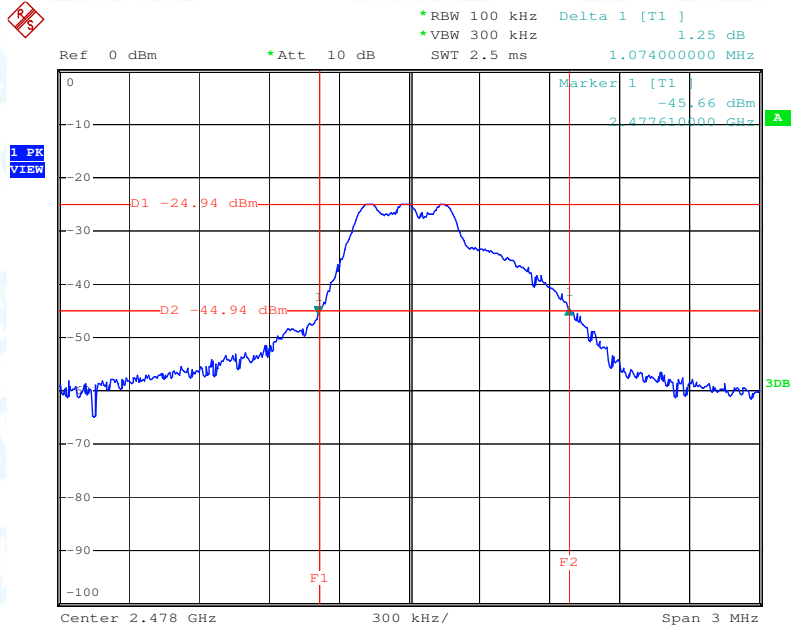

Date: 23.FEB.2017 13:13:44

## 7. Antenna Requirement

### 7.1 Standard Requirement

#### 7.1.1 Standard

FCC Part 15.203

#### 7.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 7.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 0 dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 7.3 Result

The EUT antenna is a PCB Antenna. It complies with the standard requirement.

Antenna Type
<input checked="" type="checkbox"/> Permanent attached antenna
<input type="checkbox"/> Unique connector antenna
<input type="checkbox"/> Professional installation antenna

-----END OF REPORT-----