



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT

FCC PART 15.227

Report Reference No.: **CTL1611252401-WF**

Compiled by:
(position+printed name+signature) File administrators Happy Guo

Happy Guo

Tested by:
(position+printed name+signature) Test Engineer Nice Nong

Nice Nong

Approved by:
(position+printed name+signature) Manager Tracy Qi

Tracy Qi

Product Name: Bump'n Eject RC Bumper Cars 27MHz

Model/Type reference: TG637

Trade Mark: ThinkGizmos

FCC ID: 2AKBL-TG637-01

Applicant's name: **STORMFORWARD RETAIL LTD**

Address of applicant: Unit 19, Lawson Hunt Industrial Park, Horsham, RH12 3 JR, United KingDom

Test Firm: **Shenzhen CTL Testing Technology Co., Ltd.**

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification:

Standard: **FCC Rules Part 15.227**: Operation within the band 26.96-27.28 MHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of Receipt: Nov. 25, 2016

Date of Test Date: Nov. 25, 2016–Dec. 29, 2016

Date of Issue: Dec. 29, 2016

Result: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

| | | |
|--------------------------|-------------------------|--------------------------------|
| Test Report No. : | CTL1611252401-WF | Dec. 29, 2016 Date of issue |
|--------------------------|-------------------------|--------------------------------|

Equipment under Test : Bump'n Eject RC Bumper Cars 27MHz

Model /Type : TG637

Applicant : **STORMFORWARD RETAIL LTD**

Address : Unit 19, Lawson Hunt Industrial Park, Horsham,
RH12 3 JR, United KingDom

Manufacturer : **STORMFORWARD RETAIL LTD**

Address : Unit 19, Lawson Hunt Industrial Park, Horsham,
RH12 3 JR, United KingDom

| | |
|--------------------|--------------|
| Test result | Pass* |
|--------------------|--------------|

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.


It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****



Table of Contents

| | Page |
|---|-----------|
| 1. SUMMARY..... | 5 |
| 1.1. TEST STANDARDS..... | 5 |
| 1.2. TEST DESCRIPTION..... | 5 |
| 1.3. TEST FACILITY | 6 |
| 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY..... | 6 |
| 2. GENERAL INFORMATION..... | 7 |
| 2.1. ENVIRONMENTAL CONDITIONS | 7 |
| 2.2. GENERAL DESCRIPTION OF EUT | 7 |
| 2.3. EQUIPMENTS USED DURING THE TEST | 7 |
| 2.4. RELATED SUBMITTAL(s) / GRANT (s)..... | 8 |
| 2.5. MODIFICATIONS..... | 8 |
| 3. TEST CONDITIONS AND RESULTS | 9 |
| 3.1. RADIATED EMISSION | 9 |
| 3.2. 20DB BANDWIDTH..... | 14 |
| 3.3. ANTENNA REQUIREMENT..... | 15 |
| 4. TEST SETUP PHOTOS | 16 |
| 5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT | 17 |

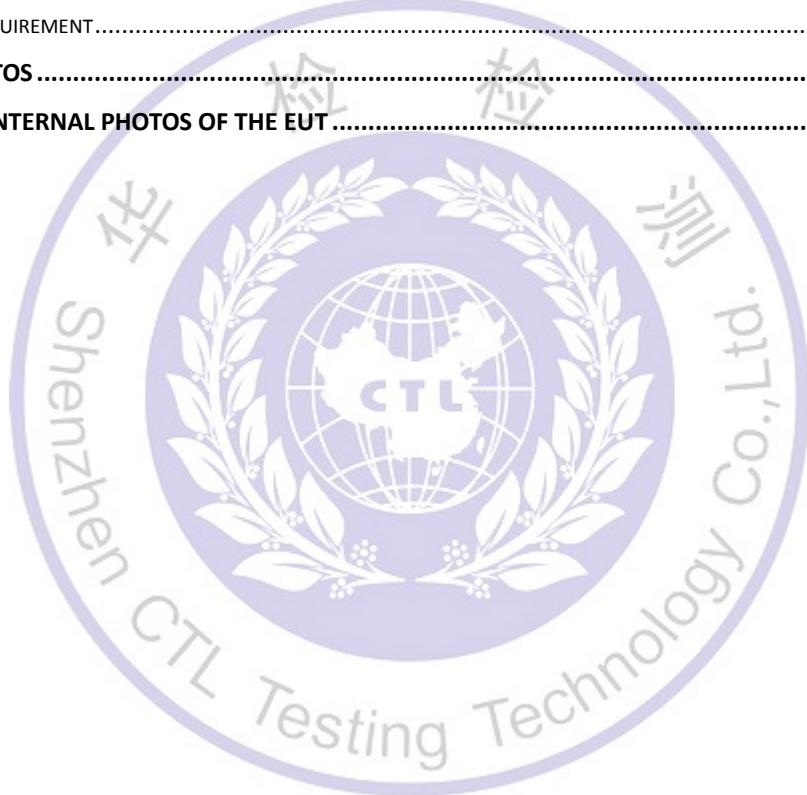

1. SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[**FCC Rules Part 15.227**](#): Operation within the band 26.96-27.28 MHz.

[**ANSI C63.10:2013**](#) : American National Standard for Testing Unlicensed Wireless Devices

[**ANSI C63.4: 2014**](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

1.2. Test Description

| FCC PART 15 .227 | | |
|-------------------------|----------------------------|------|
| FCC Part 15.227 | Transmitter Field Strength | PASS |
| FCC Part 2.1049/15.215 | 20dB Bandwidth | PASS |

Remark: The measurement uncertainty is not included in the test result.



1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

| Test | Measurement Uncertainty | Notes |
|---|-------------------------|-------|
| Transmitter power conducted | ±0.57 dB | (1) |
| Transmitter power Radiated | ±2.20 dB | (1) |
| Conducted spurious emission 9KHz-40 GHz | ±2.20 dB | (1) |
| Occupied Bandwidth | ±0.01ppm | (1) |
| Radiated Emission 30~1000MHz | ±4.10dB | (1) |
| Radiated Emission Above 1GHz | ±4.32dB | (1) |
| Conducted Disturbance 0.15~30MHz | ±3.20dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|---------------------|---------|
| Normal Temperature: | 25°C |
| Relative Humidity: | 55 % |
| Air Pressure: | 101 kPa |

2.2. General Description of EUT

| | |
|-----------------------|-----------------------------------|
| Product Name: | Bump'n Eject RC Bumper Cars 27MHz |
| Model/Type reference: | TG637 |
| Power supply: | DC 3.0V from battery |
| Operation frequency: | 27.145MHz |
| Modulation : | ASK |
| No. of Channel : | 1 |
| Antenna type: | External Antenna |

Note: For more details, please refer to the user's manual of the EUT.

2.3. Equipments Used during the Test

| Test Equipment | Manufacturer | Model No. | Serial No. | Calibration Date | Calibration Due Date |
|----------------------------|----------------------|---------------------------|--------------|------------------|----------------------|
| LISN | R&S | ENV216 | 3560.6550.12 | 2016/06/02 | 2017/06/01 |
| LISN | R&S | ESH2-Z5 | 860014/010 | 2016/06/02 | 2017/06/01 |
| Bilog Antenna | Sunol Sciences Corp. | JB1 | A061713 | 2016/06/02 | 2017/06/01 |
| EMI Test Receiver | R&S | ESCI | 103710 | 2016/06/02 | 2017/06/01 |
| Spectrum Analyzer | Agilent | N9020 | US46220290 | 2016/01/17 | 2017/01/16 |
| Controller | EM Electronics | Controller EM 1000 | N/A | 2016/05/21 | 2017/05/20 |
| Horn Antenna | Sunol Sciences Corp. | DRH-118 | A062013 | 2016/05/19 | 2017/05/18 |
| Active Loop Antenna | SCHWARZBECK | FMZB1519 | 1519-037 | 2016/05/19 | 2017/05/18 |
| Amplifier | Agilent | 8349B | 3008A02306 | 2016/05/19 | 2017/05/18 |
| Amplifier | Agilent | 8447D | 2944A10176 | 2016/05/19 | 2017/05/18 |
| Temperature/Humidity Meter | Gangxing | CTH-608 | 02 | 2016/05/20 | 2017/05/19 |
| High-Pass Filter | K&L | 9SH10-2700/X1 2750-O/O | N/A | 2016/05/20 | 2017/05/19 |
| High-Pass Filter | K&L | 41H10-1375/U1 2750-O/O | N/A | 2016/05/20 | 2017/05/19 |

| | | | | | |
|----------------|------------------|------------------------|-----|------------|------------|
| Coaxial Cables | HUBER+SUHN ER | SUCOFLEX 104PEA-10M | 10m | 2016/06/02 | 2017/06/01 |
| Coaxial Cables | HUBER+SUHN ER | SUCOFLEX 104PEA-3M | 3m | 2016/06/02 | 2017/06/01 |
| Coaxial Cables | HUBER+SUHN ER | SUCOFLEX 104PEA-3M | 3m | 2016/06/02 | 2017/06/01 |
| RF Cable | Megalon | RF-A303 | N/A | 2016/06/02 | 2017/06/01 |

The calibration interval was one year

2.4. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AKBL-TG637-01 filing to comply with Section 15.227 of the FCC Part 15, Subpart C Rules.

2.5. Modifications

No modifications were implemented to meet testing criteria.



3. TEST CONDITIONS AND RESULTS

3.1. Radiated Emission

Limit

the field strength of emissions from intentional radiators operated under this Section shall not exceed the following:

15.227(a):The field strength of any emission within this band shall not exceed 10,000 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.

15.227(b) :The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

| Frequency (MHz) | Distance (Meters) | Radiated (dBuV/m) | Radiated (μ V/m) |
|-----------------|-------------------|-------------------|-----------------------|
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

Test Procedure

1) 9 kHz to 30 MHz emissions: For testing performed with the loop antenna. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions: For testing performed with the bi-log type antenna. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{FS} = \text{RA} + \text{AF} + \text{CL} - \text{AG}$$

| | |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |


For example

| Frequency (MHz) | FS (dBuV/m) | RA (dBuV/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|-----------------|-------------|-------------|---------|---------|---------|-------------|
| 150.00 | 40 | 58.1 | 12.2 | 1.6 | 31.90 | -18.1 |


$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

Test Configuration

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

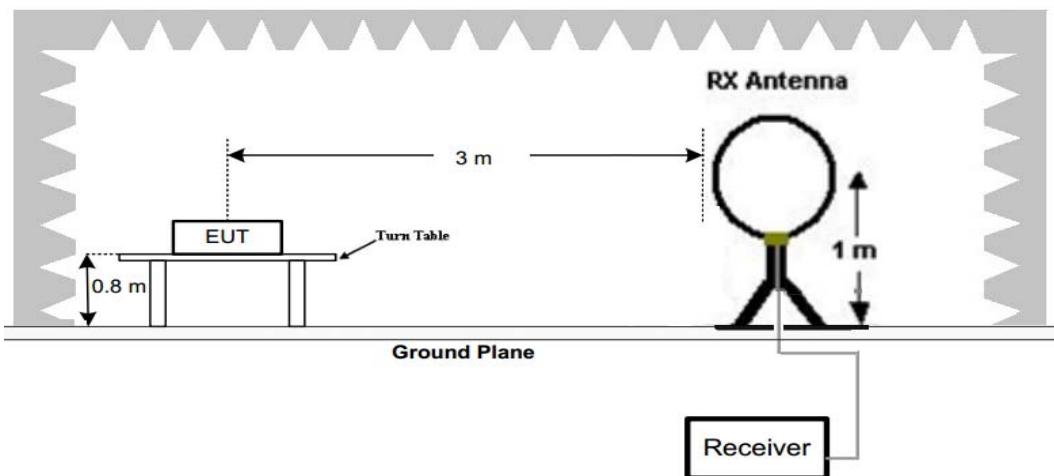

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

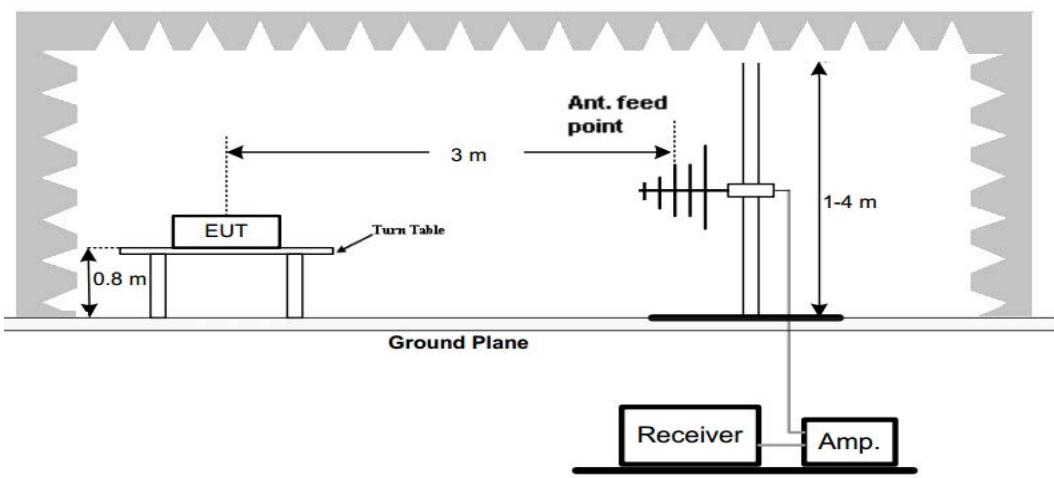

Test Results

Fundamental emission:

| Frequency (MHz) | Polarization | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark |
|-----------------|--------------|-------------------|-----------------------|-----------------|----------------|---------------------|-----------------|--------|
| 27.145 | H | 66.20 | 9.48 | 0.66 | 76.34 | 100.00 | -23.66 | PK |
| 27.145 | H | 60.94 | 9.48 | 0.66 | 71.08 | 80.00 | -8.92 | AV |
| 26.96 | H | 47.41 | 9.46 | 0.65 | 57.52 | 69.50 | -11.98 | QP |
| 27.28 | H | 46.95 | 9.48 | 0.66 | 57.09 | 69.50 | -12.41 | QP |

| Frequency (MHz) | Polarization | Read Level (dBuV) | Antenna Factor (dB/m) | Cable Loss (dB) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Remark |
|-----------------|--------------|-------------------|-----------------------|-----------------|----------------|---------------------|-----------------|--------|
| 27.145 | V | 61.57 | 9.48 | 0.66 | 71.71 | 100.00 | -28.29 | PK |
| 27.145 | V | 57.42 | 9.48 | 0.66 | 67.56 | 80.00 | -12.44 | AV |
| 26.96 | V | 47.88 | 9.46 | 0.65 | 57.99 | 69.50 | -11.51 | QP |
| 27.28 | V | 47.16 | 9.48 | 0.66 | 57.30 | 69.50 | -12.20 | QP |


Test Level =Receiver Reading + Antenna Factor + Cable Loss.

2) Other Emissions:

9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement:


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement:

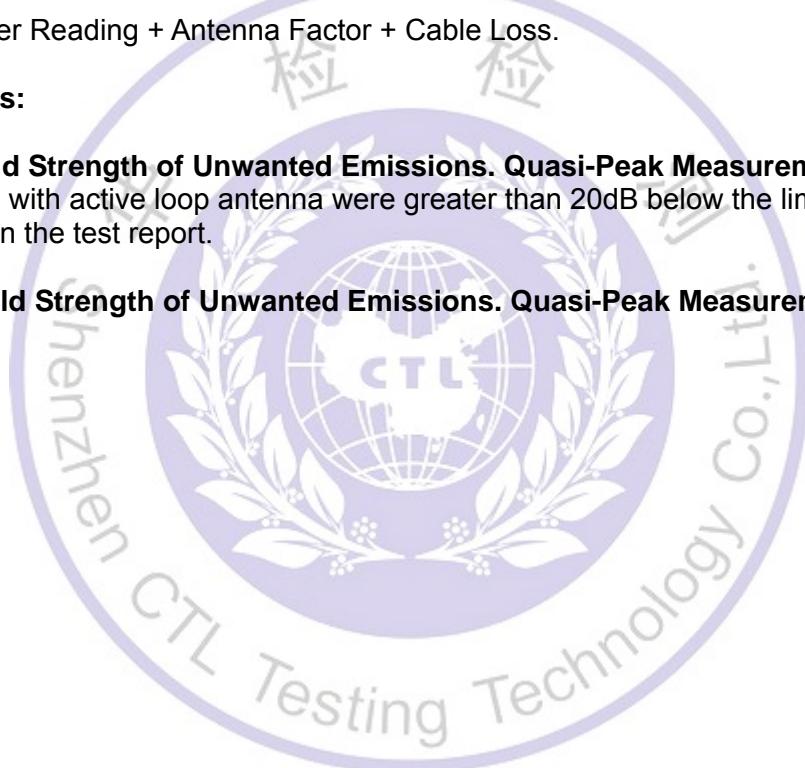

SWEET TABLE: "test (30M-1G)"

| Short Description: | | Field Strength | | |
|--------------------|----------------|----------------|----------|---------|
| Start Frequency | Stop Frequency | Detector | Meas. | IF |
| 30.0 MHz | 1.0 GHz | MaxPeak | 300.0 ms | 120 kHz |
| | | | Time | Bandw. |
| | | | | |

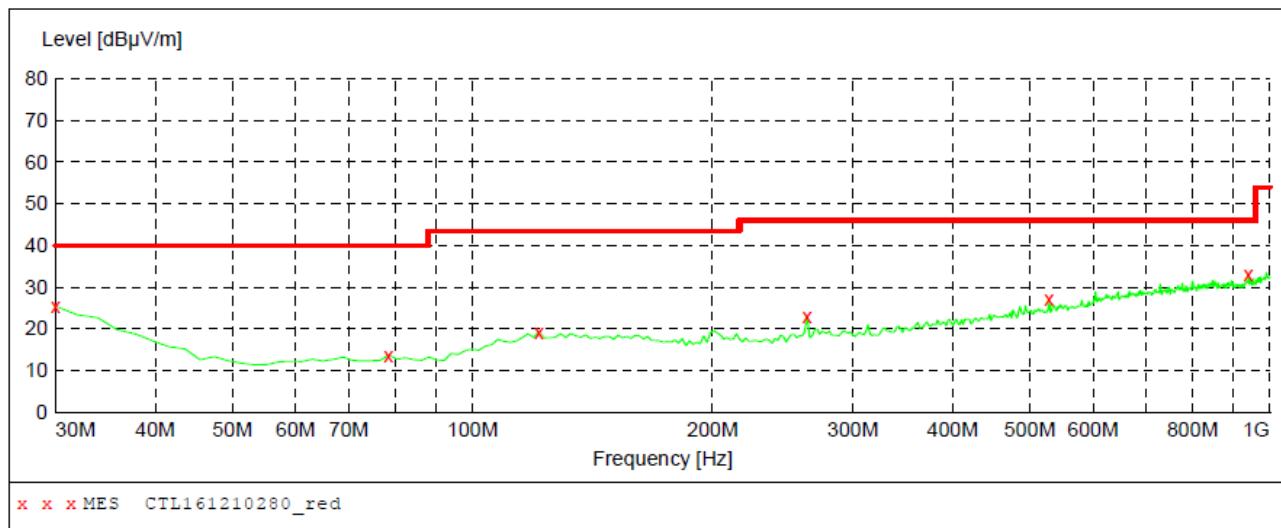***MEASUREMENT RESULT: "CTL161210280_red"***


12/10/2016 11:59AM

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Det. | Height cm | Azimuth deg | Polarization |
|------------------|-----------------------|--------------|-----------------------|--------------|------|--------------|----------------|--------------|
| 30.000000 | 25.40 | 20.8 | 40.0 | 14.6 | --- | 0.0 | 0.00 | HORIZONTAL |
| 78.500000 | 13.70 | 8.4 | 40.0 | 26.3 | --- | 0.0 | 0.00 | HORIZONTAL |
| 121.180000 | 19.20 | 14.7 | 43.5 | 24.3 | --- | 0.0 | 0.00 | HORIZONTAL |
| 262.800000 | 23.10 | 14.8 | 46.0 | 22.9 | --- | 0.0 | 0.00 | HORIZONTAL |
| 528.580000 | 27.10 | 20.4 | 46.0 | 18.9 | --- | 0.0 | 0.00 | HORIZONTAL |
| 939.860000 | 33.00 | 26.4 | 46.0 | 13.0 | --- | 0.0 | 0.00 | HORIZONTAL |



SWEET TABLE: "test (30M-1G)"

| Short Description: | | Field Strength | | |
|--------------------|----------------|----------------|----------|---------|
| Start Frequency | Stop Frequency | Detector | Meas. | IF |
| 30.0 MHz | 1.0 GHz | MaxPeak | 300.0 ms | 120 kHz |
| Transducer JB1 | | | | |

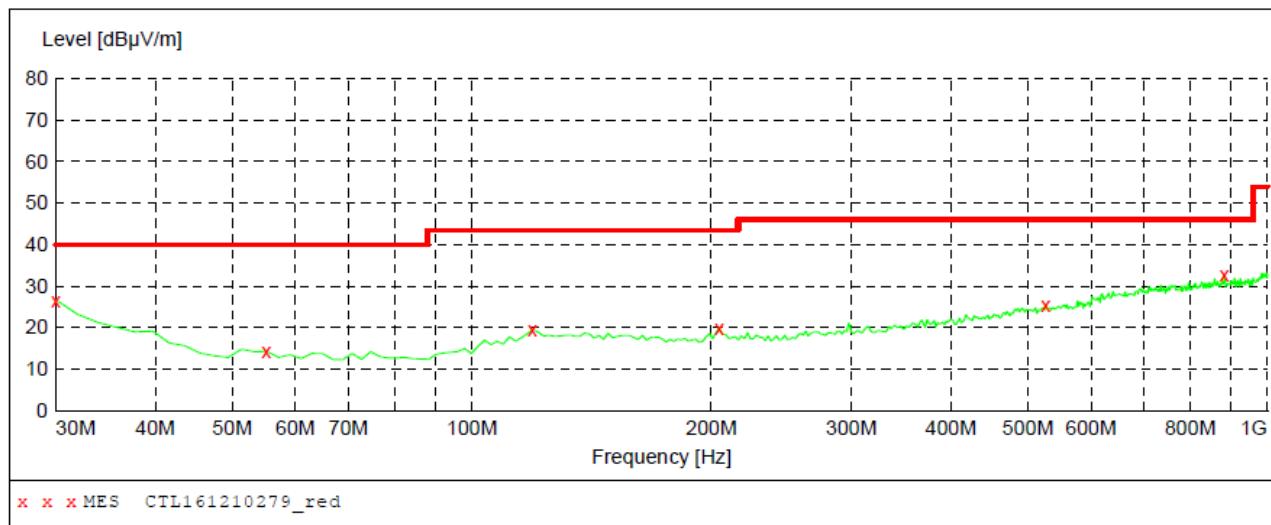***MEASUREMENT RESULT: "CTL161210279_red"***

12/10/2016 11:57AM

| Frequency MHz | Level dB μ V/m | Transd dB | Limit dB μ V/m | Margin dB | Det. --- | Height cm | Azimuth deg | Polarization |
|------------------|-----------------------|--------------|-----------------------|--------------|-------------|--------------|----------------|--------------|
| 30.000000 | 26.60 | 20.8 | 40.0 | 13.4 | --- | 0.0 | 0.00 | VERTICAL |
| 55.220000 | 14.20 | 8.0 | 40.0 | 25.8 | --- | 0.0 | 0.00 | VERTICAL |
| 119.240000 | 19.50 | 14.7 | 43.5 | 24.0 | --- | 0.0 | 0.00 | VERTICAL |
| 204.600000 | 19.90 | 14.1 | 43.5 | 23.6 | --- | 0.0 | 0.00 | VERTICAL |
| 526.640000 | 25.50 | 20.4 | 46.0 | 20.5 | --- | 0.0 | 0.00 | VERTICAL |
| 883.600000 | 32.60 | 25.6 | 46.0 | 13.4 | --- | 0.0 | 0.00 | VERTICAL |



3.2. 20dB Bandwidth

Limit

15.215(c), Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the 20 dB bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation. Operation within the band: 26. 96 – 27.28 MHz.

Test Procedure


The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results

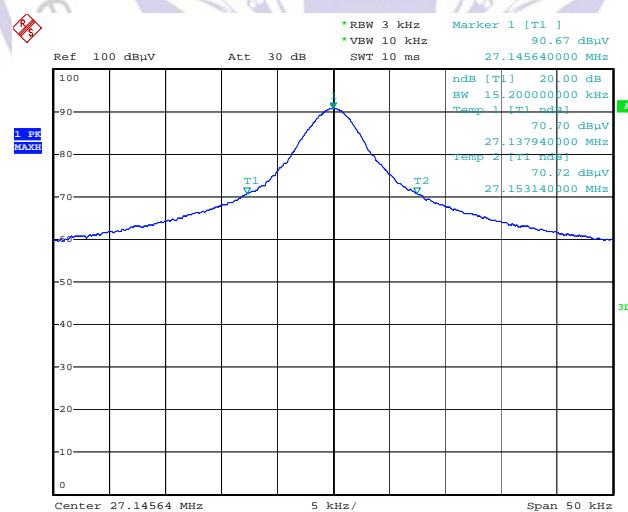

Date: 27.DEC.2016 12:11:13

3.3. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited



Test Result:

Compliance. The maximum gain of antenna was 2.0dBi.





4. TEST SETUP PHOTOS

Radiated Emission


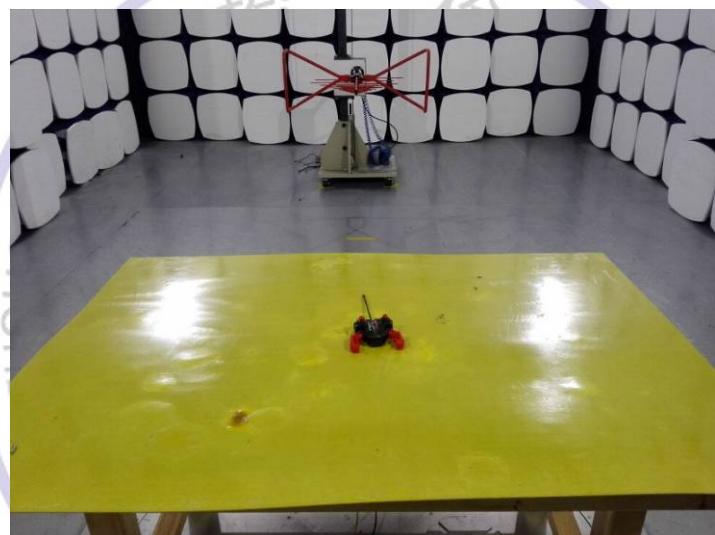
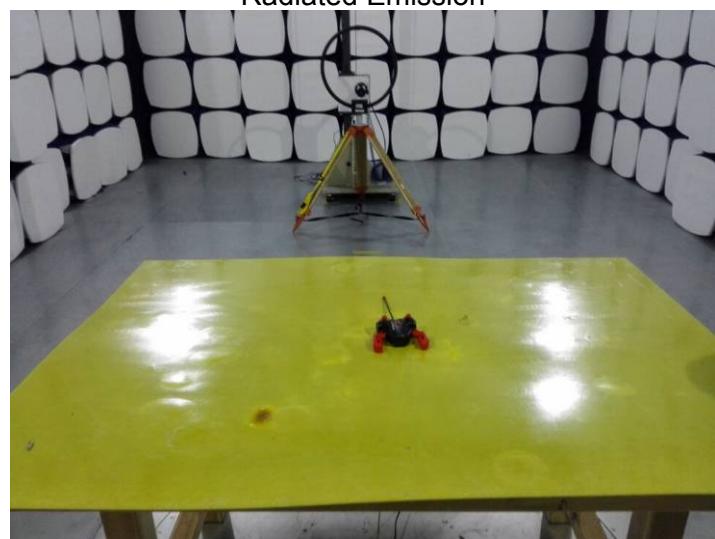



5. External and Internal Photos of the EUT

External Photos of EUT

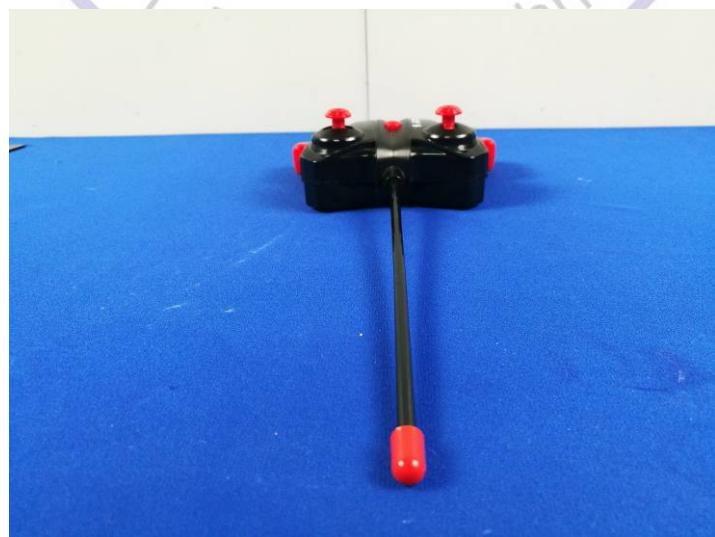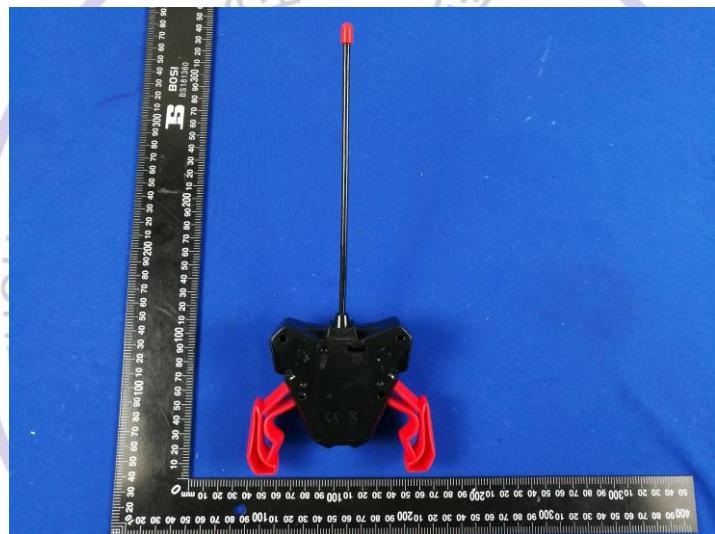

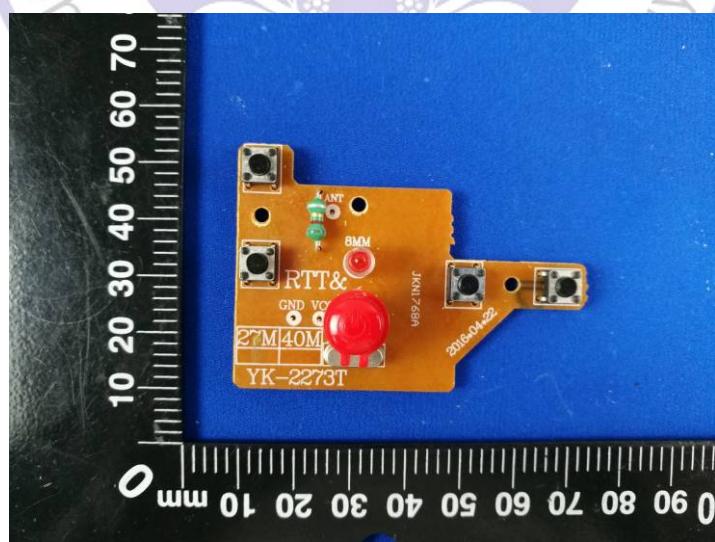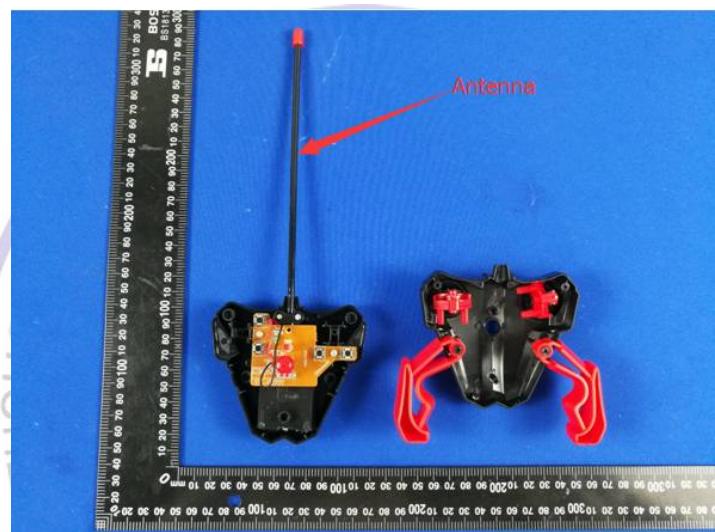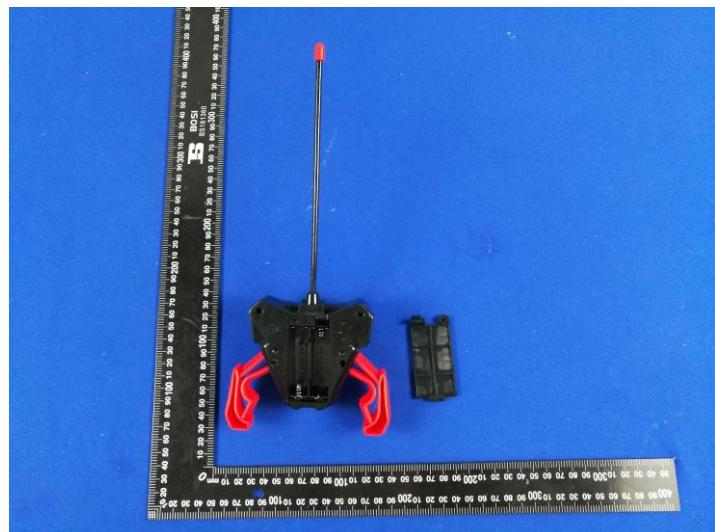

Internal Photos of EUT

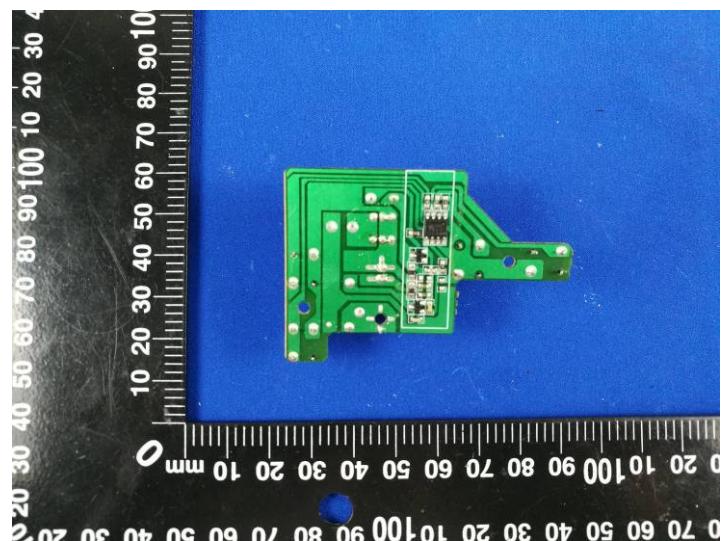

***** End of Report *****

