



No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM161000925702

Page: 1 of 56

FCC REPORT

Application No: SZEM1610009257CR (SGS SH No.:SH1610006915CR)
Applicant: Powervision Tech Inc.
Manufacturer: Powervision Tech Inc.
Factory: Huizhou BYD Electronic Co., Ltd
Product Name: PowerEye
Model No.(EUT): PEY10
Trade Mark: PowerVision
FCC ID: 2AKBMPEY10
Standards: 47 CFR Part 15, Subpart C (2015)
Date of Receipt: 2016-10-31
Date of Test: 2016-11-15 to 2016-11-28
Date of Issue: 2016-12-08

| | |
|---------------------|---------------|
| Test Result: | PASS * |
|---------------------|---------------|

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

| Revision Record | | | | |
|-----------------|---------|------------|----------|----------|
| Version | Chapter | Date | Modifier | Remark |
| 00 | | 2016-12-08 | | Original |
| | | | | |
| | | | | |

| | | | |
|---------------------------------|---|--|-------------|
| Authorized for issue by: | | | |
| Tested By |  | | 2016-11-28 |
| | _____ | | _____ |
| | (Hank Yan) /Project Engineer | | Date |
| Checked By |  | | 2016-12-08 |
| | _____ | | _____ |
| | (Eric Fu) /Reviewer | | Date |



3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|---|---|------------------|--------|
| Antenna Requirement | 47 CFR Part 15, Subpart C Section 15.203/15.247 (c) | ANSI C63.10 2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15, Subpart C Section 15.247 (b)(3) | ANSI C63.10 2013 | PASS |
| 6dB Occupied Bandwidth | 47 CFR Part 15, Subpart C Section 15.247 (a)(2) | ANSI C63.10 2013 | PASS |
| Power Spectral Density | 47 CFR Part 15, Subpart C Section 15.247 (e) | ANSI C63.10 2013 | PASS |
| Band-edge for RF Conducted Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | ANSI C63.10 2013 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.247(d) | ANSI C63.10 2013 | PASS |
| Radiated Spurious Emissions | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10 2013 | PASS |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15, Subpart C Section 15.205/15.209 | ANSI C63.10 2013 | PASS |



4 Contents

| | Page |
|---|-----------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 TEST SUMMARY | 3 |
| 4 CONTENTS | 4 |
| 5 GENERAL INFORMATION | 5 |
| 5.1 CLIENT INFORMATION | 5 |
| 5.2 GENERAL DESCRIPTION OF EUT | 5 |
| 5.3 TEST ENVIRONMENT | 9 |
| 5.4 DESCRIPTION OF SUPPORT UNITS | 9 |
| 5.5 TEST LOCATION | 9 |
| 5.6 TEST FACILITY | 10 |
| 5.7 DEVIATION FROM STANDARDS | 10 |
| 5.8 ABNORMALITIES FROM STANDARD CONDITIONS | 10 |
| 5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 10 |
| 5.10 EQUIPMENT LIST | 11 |
| 6 TEST RESULTS AND MEASUREMENT DATA | 13 |
| 6.1 ANTENNA REQUIREMENT | 13 |
| 6.2 CONDUCTED PEAK OUTPUT POWER | 14 |
| 6.3 6dB OCCUPY BANDWIDTH | 16 |
| 6.4 POWER SPECTRAL DENSITY | 20 |
| 6.5 BAND-EDGE FOR RF CONDUCTED EMISSIONS | 24 |
| 6.6 SPURIOUS RF CONDUCTED EMISSIONS | 27 |
| 6.7 RADIATED SPURIOUS EMISSION | 37 |
| 6.7.1 <i>Spurious Emissions</i> | 37 |
| 6.8 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY | 46 |
| 7 PHOTOGRAPHS - EUT TEST SETUP | 56 |
| 7.1 RADIATED EMISSION | 56 |
| 7.2 RADIATED SPURIOUS EMISSION | 56 |
| 8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS | 56 |



5 General Information

5.1 Client Information

| | |
|--------------------------|---|
| Applicant: | Powervision Tech Inc. |
| Address of Applicant: | Room 301, Building A, No.9 Fulin Road, Chaoyang District, Beijing, 100107, China |
| Manufacturer: | Powervision Tech Inc. |
| Address of Manufacturer: | Room 301, Building A, No.9 Fulin Road, Chaoyang District, Beijing, 100107, China |
| Factory: | Huizhou BYD Electronic Co., Ltd. |
| Address of Factory: | Xiangshui River, Economic Development Zone, Daya Bay, Huizhou, Guangdong, 516083, P.R.China |

5.2 General Description of EUT

| | |
|----------------------|--|
| Product Name: | PowerEye |
| Model No.: | PEY10 |
| Trade Mark: | PowerVision |
| Operation Frequency: | 4MHz Bandwidth mode: 2405MHz to 2475MHz 8MHz Bandwidth mode: 2407MHz to 2469MHz |
| Modulation Type: | OFDM |
| Number of Channel: | 4MHz Bandwidth mode: 71 8MHz Bandwidth mode: 63 |
| Sample Type: | Mobile Device |
| Antenna Type: | Dipole Antenna |
| Antenna Gain: | 3dBi |
| Power Supply: | DC 22.2V Li-ion Battery |



4MHz Bandwidth mode:

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1 | 2405.00 | 19 | 2423.00 | 37 | 2441.00 | 55 | 2459.00 |
| 2 | 2406.00 | 20 | 2424.00 | 38 | 2442.00 | 56 | 2460.00 |
| 3 | 2407.00 | 21 | 2425.00 | 39 | 2443.00 | 57 | 2461.00 |
| 4 | 2408.00 | 22 | 2426.00 | 40 | 2444.00 | 58 | 2462.00 |
| 5 | 2409.00 | 23 | 2427.00 | 41 | 2445.00 | 59 | 2463.00 |
| 6 | 2410.00 | 24 | 2428.00 | 42 | 2446.00 | 60 | 2464.00 |
| 7 | 2411.00 | 25 | 2429.00 | 43 | 2447.00 | 61 | 2465.00 |
| 8 | 2412.00 | 26 | 2430.00 | 44 | 2448.00 | 62 | 2466.00 |
| 9 | 2413.00 | 27 | 2431.00 | 45 | 2449.00 | 63 | 2467.00 |
| 10 | 2414.00 | 28 | 2432.00 | 46 | 2450.00 | 64 | 2468.00 |
| 11 | 2415.00 | 29 | 2433.00 | 47 | 2451.00 | 65 | 2469.00 |
| 12 | 2416.00 | 30 | 2434.00 | 48 | 2452.00 | 66 | 2470.00 |
| 13 | 2417.00 | 31 | 2435.00 | 49 | 2453.00 | 67 | 2471.00 |
| 14 | 2418.00 | 32 | 2436.00 | 50 | 2454.00 | 68 | 2472.00 |
| 15 | 2419.00 | 33 | 2437.00 | 51 | 2455.00 | 69 | 2473.00 |
| 16 | 2420.00 | 34 | 2438.00 | 52 | 2456.00 | 70 | 2474.00 |
| 17 | 2421.00 | 35 | 2439.00 | 53 | 2457.00 | 71 | 2475.00 |
| 18 | 2422.00 | 36 | 2440.00 | 54 | 2458.00 | | |



8MHz Bandwidth mode

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1 | 2407.00 | 17 | 2423.00 | 33 | 2439.00 | 49 | 2455.00 |
| 2 | 2408.00 | 18 | 2424.00 | 34 | 2440.00 | 50 | 2456.00 |
| 3 | 2409.00 | 19 | 2425.00 | 35 | 2441.00 | 51 | 2457.00 |
| 4 | 2410.00 | 20 | 2426.00 | 36 | 2442.00 | 52 | 2458.00 |
| 5 | 2411.00 | 21 | 2427.00 | 37 | 2443.00 | 53 | 2459.00 |
| 6 | 2412.00 | 22 | 2428.00 | 38 | 2444.00 | 54 | 2460.00 |
| 7 | 2413.00 | 23 | 2429.00 | 39 | 2445.00 | 55 | 2461.00 |
| 8 | 2414.00 | 24 | 2430.00 | 40 | 2446.00 | 56 | 2462.00 |
| 9 | 2415.00 | 25 | 2431.00 | 41 | 2447.00 | 57 | 2463.00 |
| 10 | 2416.00 | 26 | 2432.00 | 42 | 2448.00 | 58 | 2464.00 |
| 11 | 2417.00 | 27 | 2433.00 | 43 | 2449.00 | 59 | 2465.00 |
| 12 | 2418.00 | 28 | 2434.00 | 44 | 2450.00 | 60 | 2466.00 |
| 13 | 2419.00 | 29 | 2435.00 | 45 | 2451.00 | 61 | 2467.00 |
| 14 | 2420.00 | 30 | 2436.00 | 46 | 2452.00 | 62 | 2468.00 |
| 15 | 2421.00 | 31 | 2437.00 | 47 | 2453.00 | 63 | 2469.00 |
| 16 | 2422.00 | 32 | 2438.00 | 48 | 2454.00 | | |



Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

4MHz Bandwidth mode:

| Channel | Frequency |
|----------------------------|-----------|
| The lowest channel (CH1) | 2405MHz |
| The middle channel (CH36) | 2440MHz |
| The highest channel (CH71) | 2475MHz |

8MHz Bandwidth mode:

| Channel | Frequency |
|----------------------------|-----------|
| The lowest channel (CH1) | 2407MHz |
| The middle channel (CH32) | 2438MHz |
| The highest channel (CH63) | 2469MHz |



5.3 Test Environment

| Operating Environment: | |
|------------------------|----------|
| Temperature: | 25.0 °C |
| Humidity: | 50 % RH |
| Atmospheric Pressure: | 1010mbar |

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



5.10 Equipment List

| RF connected test | | | | | | |
|-------------------|-------------------|-----------------|-----------|---------------|---------------------------|-------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. Date (yyyy-mm-dd) | Cal. Due date (yyyy-mm-dd) |
| 1 | DC Power Supply | ZhaoXin | RXN-305D | SEM011-02 | 2016-10-09 | 2017-10-09 |
| 2 | Spectrum Analyzer | Rohde & Schwarz | FSP | SEM004-06 | 2016-10-09 | 2017-10-09 |
| 3 | Signal Generator | Rohde & Schwarz | SML03 | SEM006-02 | 2016-04-25 | 2017-04-25 |
| 4 | Power Meter | Rohde & Schwarz | NRVS | SEM014-02 | 2016-10-09 | 2017-10-09 |


| RE in Chamber | | | | | | |
|---------------|------------------------------------|----------------------|-----------|---------------|---------------------------|------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date (yyyy-mm-dd) | Cal.Due date (yyyy-mm-dd) |
| 1 | 10m Semi-Anechoic Chamber | SAEMC | FSAC1018 | SEM001-03 | 2016-05-13 | 2017-05-13 |
| 2 | EMI Test Receiver (9k-7GHz) | Rohde & Schwarz | ESR | SEM004-03 | 2016-04-25 | 2017-04-25 |
| 3 | Trilog-Broadband Antenna(30M-1GHz) | Schwarzbeck | VULB9168 | SEM003-18 | 2016-06-29 | 2019-06-29 |
| 4 | Pre-amplifier | Sonoma Instrument Co | 310N | SEM005-03 | 2016-07-06 | 2017-07-06 |
| 5 | Loop Antenna | ETS-Lindgren | 6502 | SEM003-08 | 2015-08-14 | 2018-08-14 |




| RE in Chamber | | | | | | |
|---------------|--------------------------------|--------------------------|-------------------|---------------|---------------------------|------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal. date (yyyy-mm-dd) | Cal.Due date (yyyy-mm-dd) |
| 1 | 3m Semi-Anechoic Chamber | AUDIX | N/A | SEM001-02 | 2016-05-13 | 2017-05-13 |
| 2 | EXA Spectrum Analyzer | Agilent Technologies Inc | N9010A | SEM004-09 | 2016-07-19 | 2017-07-19 |
| 3 | BiConiLog Antenna (26-3000MHz) | ETS-Lindgren | 3142C | SEM003-02 | 2014-11-15 | 2017-11-15 |
| 4 | Amplifier (0.1-1300MHz) | HP | 8447D | SEM005-02 | 2016-10-09 | 2017-10-09 |
| 5 | Horn Antenna (1-18GHz) | Rohde & Schwarz | HF907 | SEM003-07 | 2015-06-14 | 2018-06-14 |
| 6 | Horn Antenna (18-26GHz) | ETS-Lindgren | 3160 | SEM003-12 | 2014-11-24 | 2017-11-24 |
| 7 | Horn Antenna (26GHz-40GHz) | A.H.Systems, inc. | SAS-573 | SEM003-13 | 2015-02-12 | 2018-02-12 |
| 8 | Low Noise Amplifier | Black Diamond Series | BDLNA-0118-352810 | SEM005-05 | 2016-10-09 | 2017-10-09 |
| 9 | Band filter | Amindeon | Asi 3314 | SEM023-01 | N/A | N/A |

6 Test results and Measurement Data

6.1 Antenna Requirement
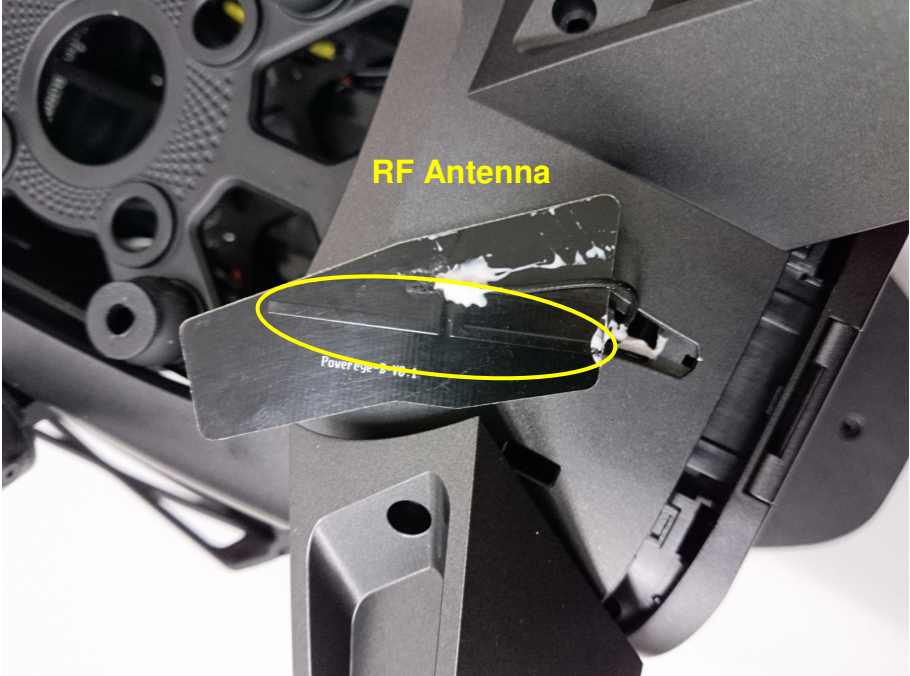
| | |
|--|---|
| Standard requirement: | 47 CFR Part 15C Section 15.203 /247(c) |
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> | |
| EUT Antenna: |  |
| <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.</p> | |

6.2 Conducted Peak Output Power
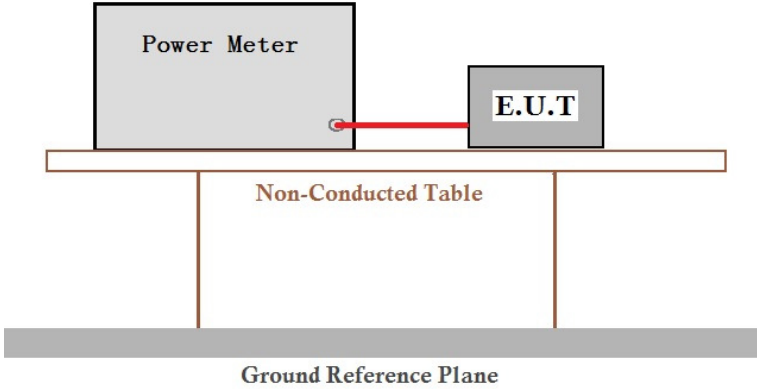
| | |
|-------------------|--|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (b)(1) |
| Test Method: | ANSI C63.10 :2013 Section 11.9.1 |
| Test Setup: |  <p>The diagram illustrates the test setup. A rectangular box labeled 'Power Meter' is connected via a red line to a smaller rectangular box labeled 'E.U.T.'. Both are positioned on a 'Non-Conducted Table', which is supported by two vertical legs. Below the table is a shaded horizontal bar labeled 'Ground Reference Plane'.</p> |
| Limit: | 30dBm |
| Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode |
| Instruments Used: | Refer to section 5.10 for details. |
| Test Results: | Pass |




Measurement Data

Peak Power:

| 4MHz Bandwidth mode: | | | |
|----------------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 27.65 | 30.00 | Pass |
| Middle | 27.43 | 30.00 | Pass |
| Highest | 26.64 | 30.00 | Pass |

| 8MHz Bandwidth mode: | | | |
|----------------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 27.99 | 30.00 | Pass |
| Middle | 27.04 | 30.00 | Pass |
| Highest | 26.22 | 30.00 | Pass |

6.3 6dB Occupy Bandwidth
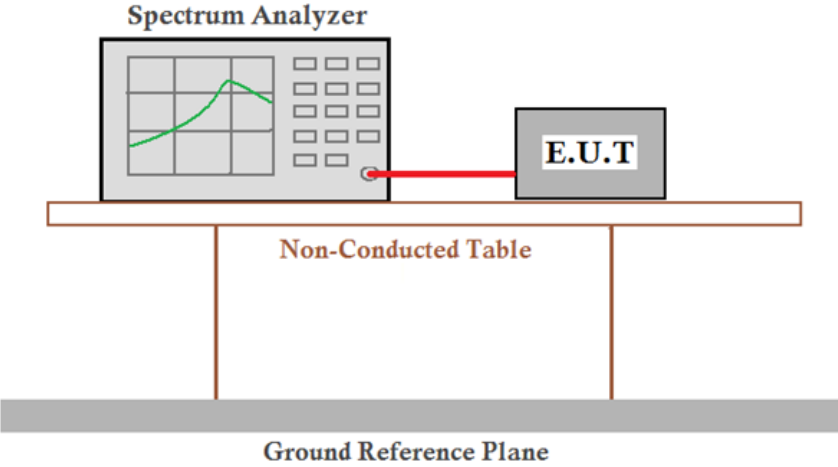
| | |
|-------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(2) |
| Test Method: | ANSI C63.10: 2013 Section 11.8 |
| Test Setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. The table is supported by two legs and sits on a Ground Reference Plane. The Spectrum Analyzer screen shows a graph with a green curve.</p> |
| Limit: | ≥ 500 kHz |
| Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode |
| Instruments Used: | Refer to section 5.10 for details. |
| Test Results: | Pass |

Measurement Data

| 4MHz Bandwidth mode | | | |
|---------------------|----------------------------|-------------|--------|
| Test channel | 6dB Occupy Bandwidth (MHz) | Limit (kHz) | Result |
| Lowest | 4.59 | ≥500 | Pass |
| Middle | 4.58 | ≥500 | Pass |
| Highest | 4.57 | ≥500 | Pass |


| 8MHz Bandwidth mode | | | |
|---------------------|----------------------------|-------------|--------|
| Test channel | 6dB Occupy Bandwidth (MHz) | Limit (kHz) | Result |
| Lowest | 9.15 | ≥500 | Pass |
| Middle | 9.15 | ≥500 | Pass |
| Highest | 9.13 | ≥500 | Pass |




Test plot as follows:

4MHz Bandwidth mode

| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

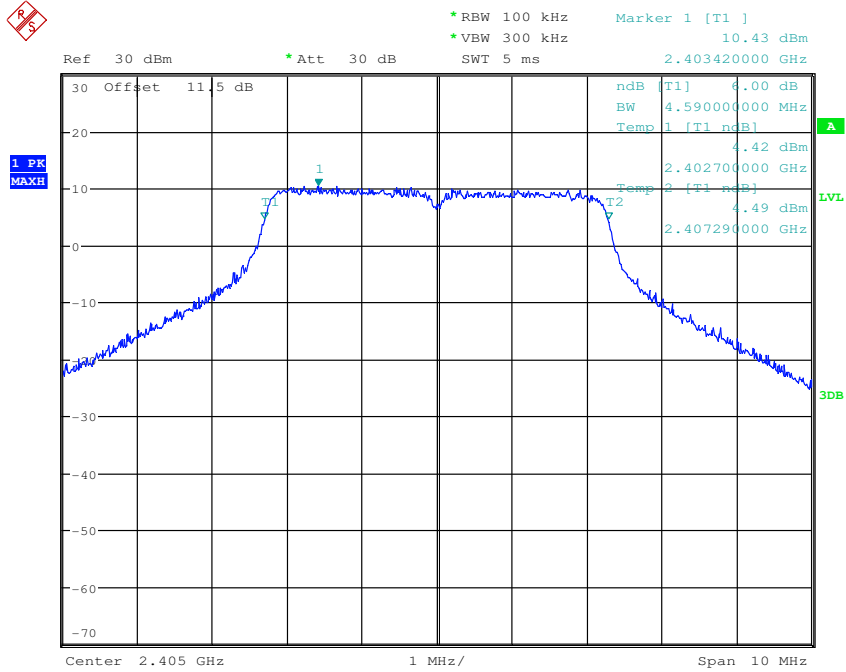


| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Middle |
|------------|---------------------|---------------|--------|

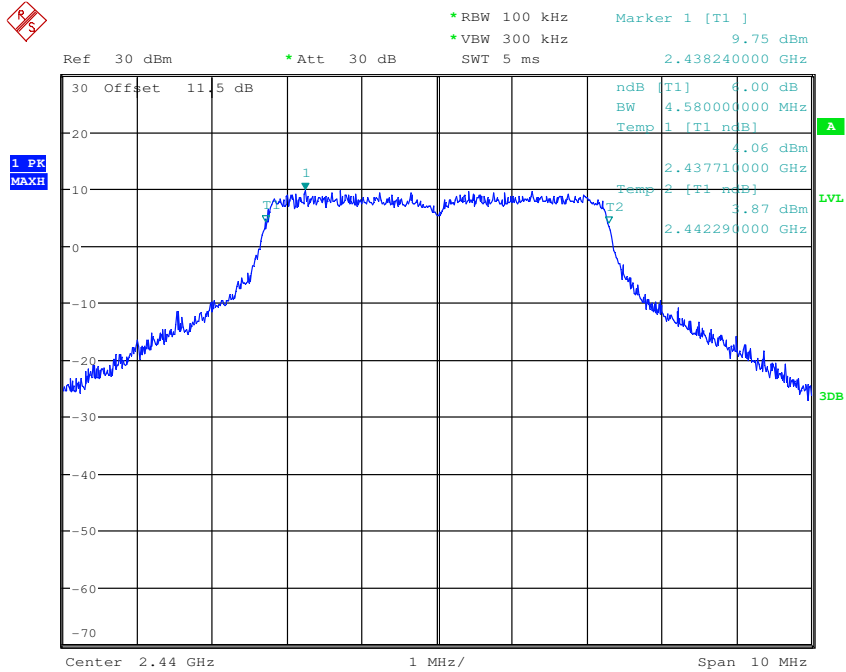




| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

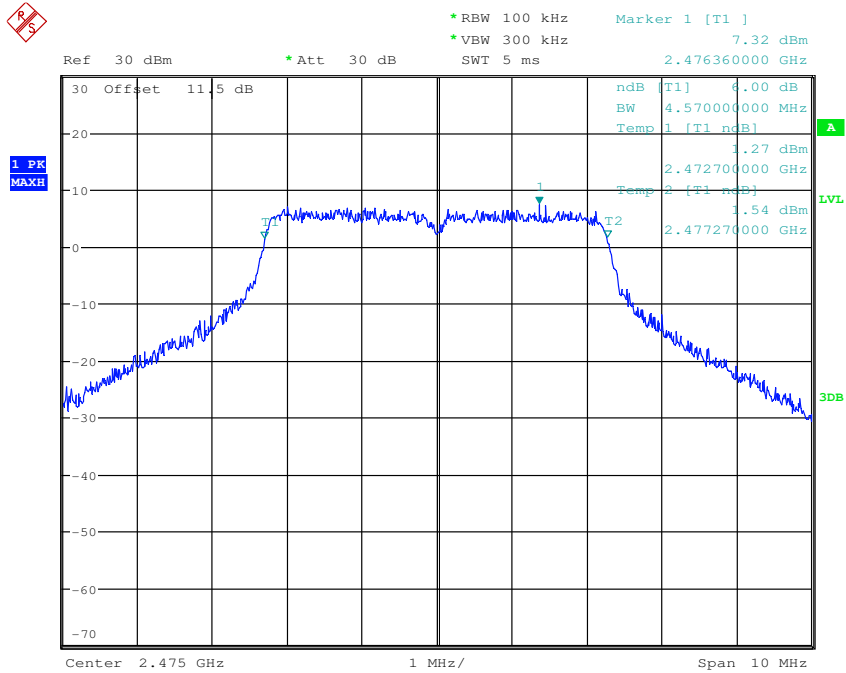


8MHz Bandwidth mode

| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

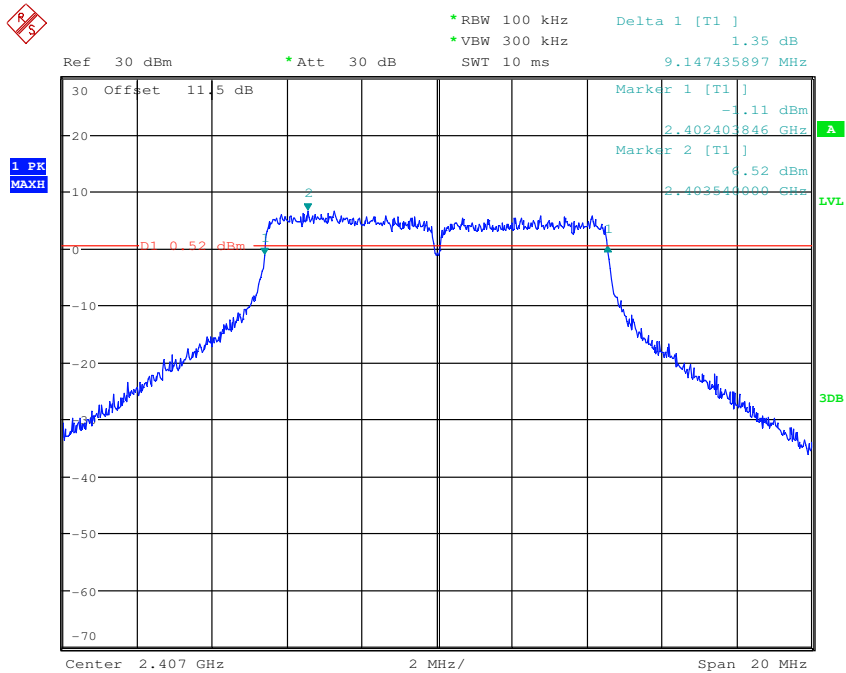





| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Middle |
|------------|---------------------|---------------|--------|

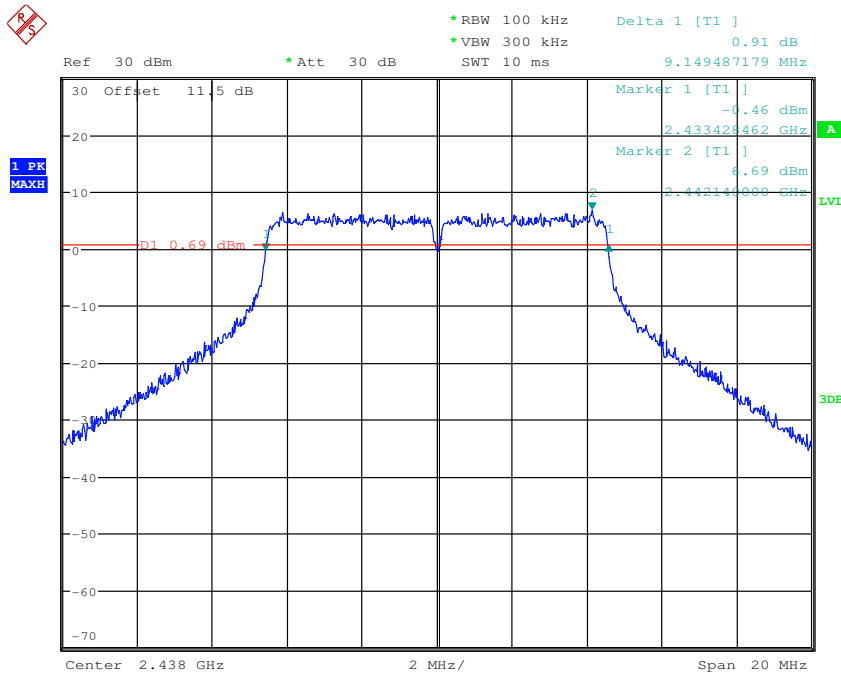

| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

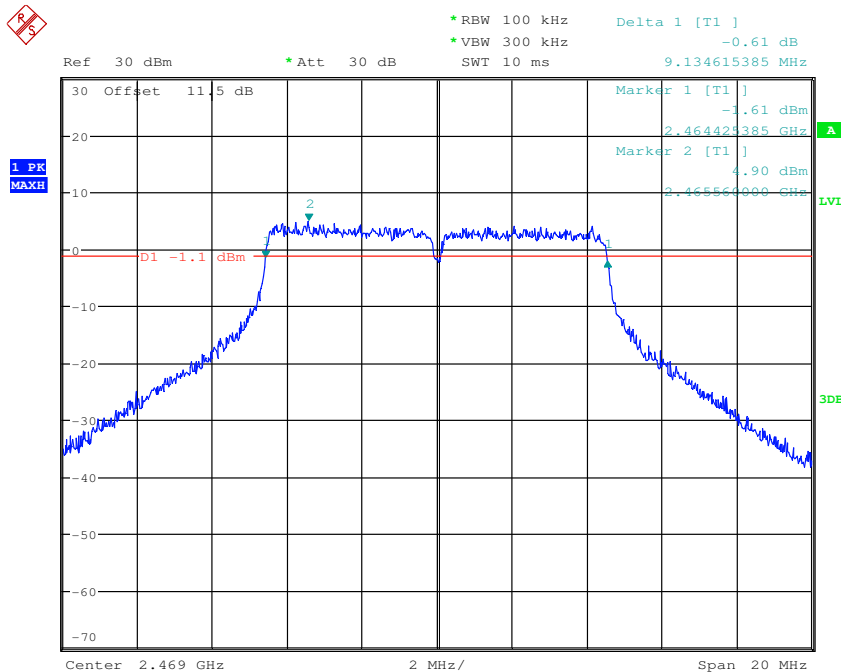

6.4 Power Spectral Density
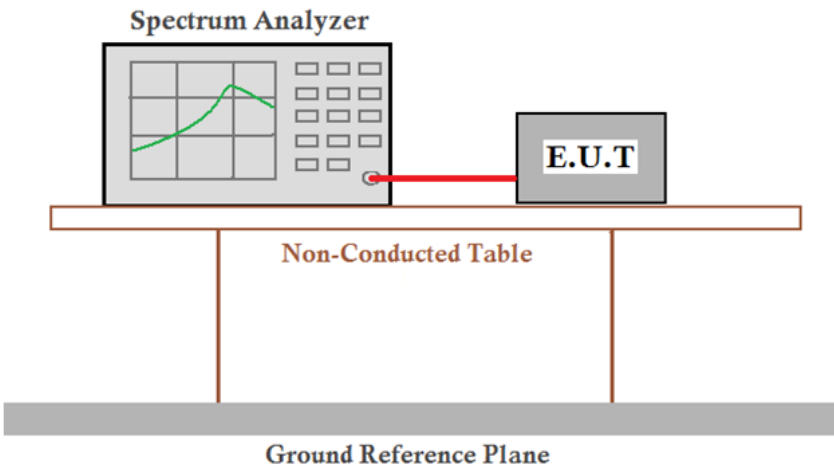
| | |
|-------------------|--|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (e) |
| Test Method: | ANSI C63.10 :2013 Section 11.10.2 |
| Test Setup: |  |
| Limit: | ≤8.00dBm/3kHz |
| Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode |
| Instruments Used: | Refer to section 5.10 for details. |
| Test Results: | Pass |

Measurement Data

| 4MHz Bandwidth mode | | | |
|---------------------|-----------------------------------|------------------|--------|
| Test channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| Lowest | -2.40 | ≤8.00 | Pass |
| Middle | -2.19 | ≤8.00 | Pass |
| Highest | -4.51 | ≤8.00 | Pass |


| 8MHz Bandwidth mode | | | |
|---------------------|-----------------------------------|------------------|--------|
| Test channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
| Lowest | -5.76 | ≤8.00 | Pass |
| Middle | -5.36 | ≤8.00 | Pass |
| Highest | -7.25 | ≤8.00 | Pass |




Test plot as follows:

4MHz Bandwidth mode

| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

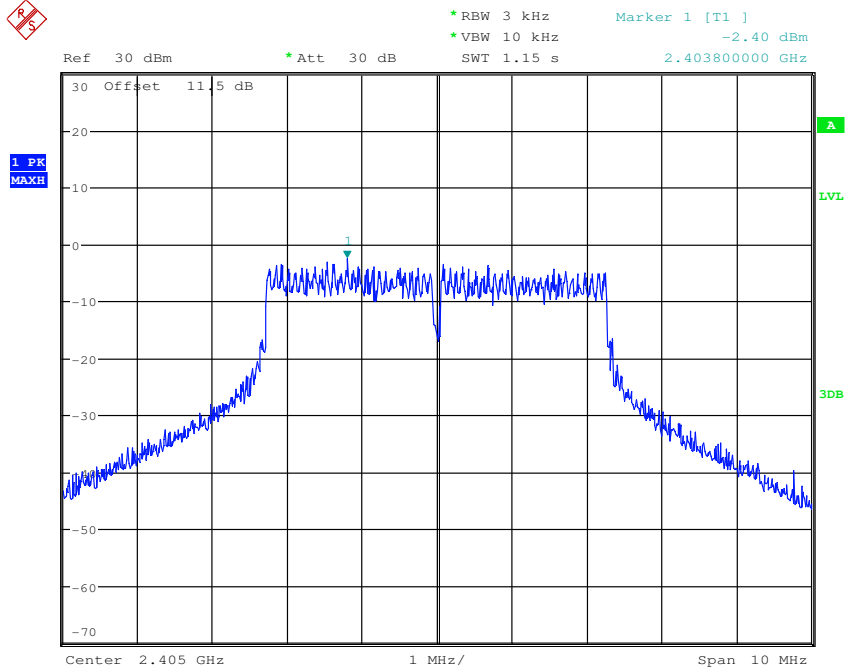


| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Middle |
|------------|---------------------|---------------|--------|

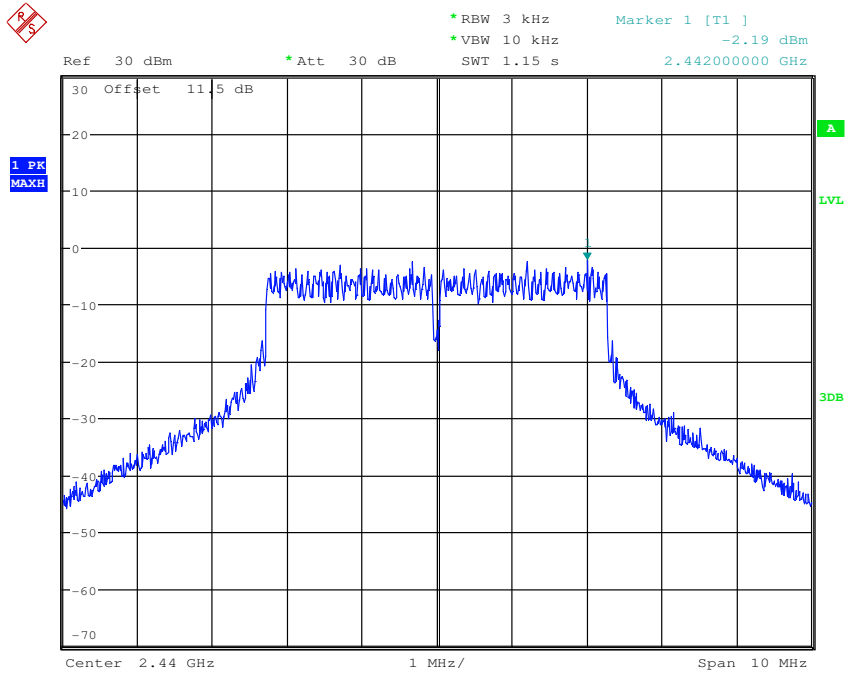




| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

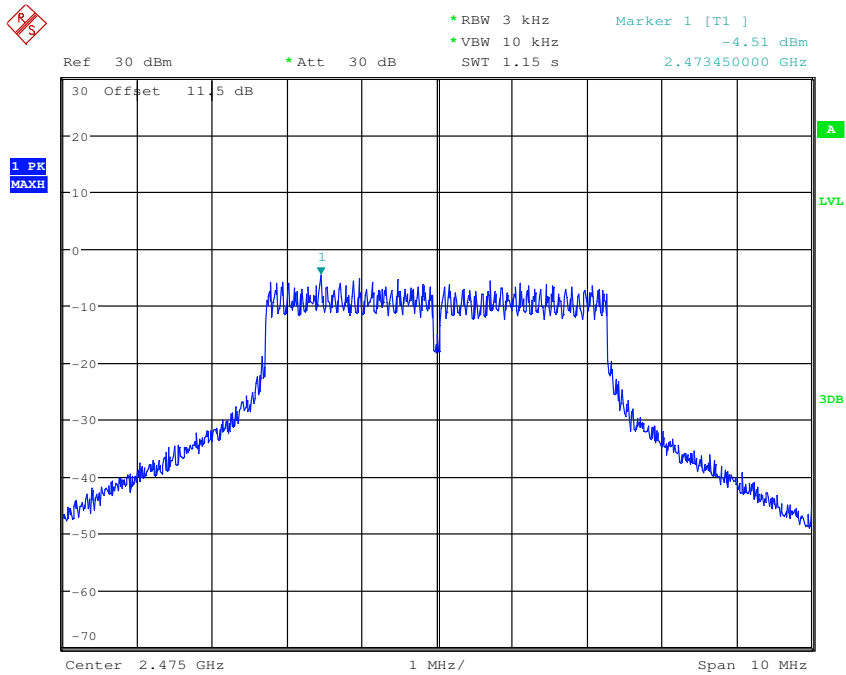


8MHz Bandwidth mode

| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

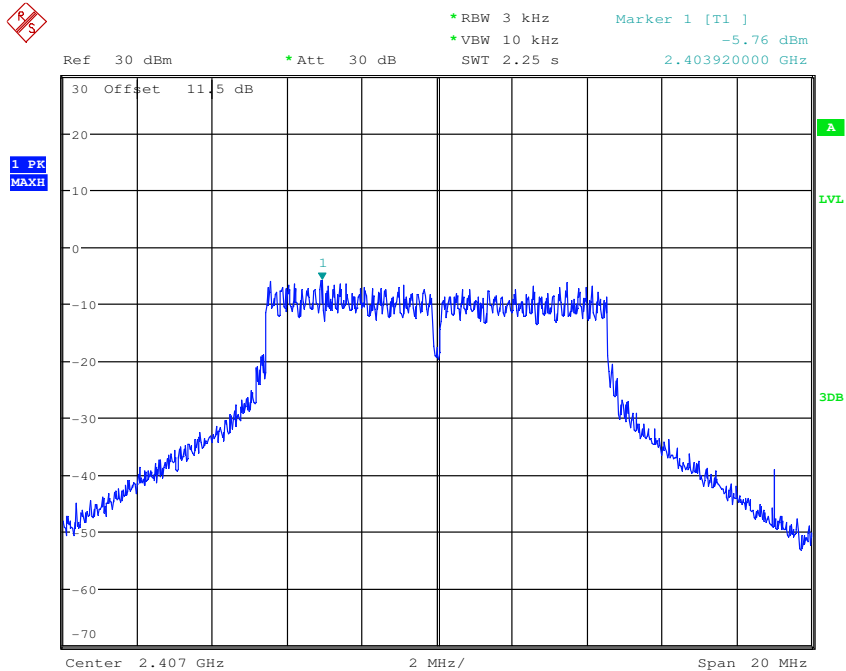





| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Middle |
|------------|---------------------|---------------|--------|

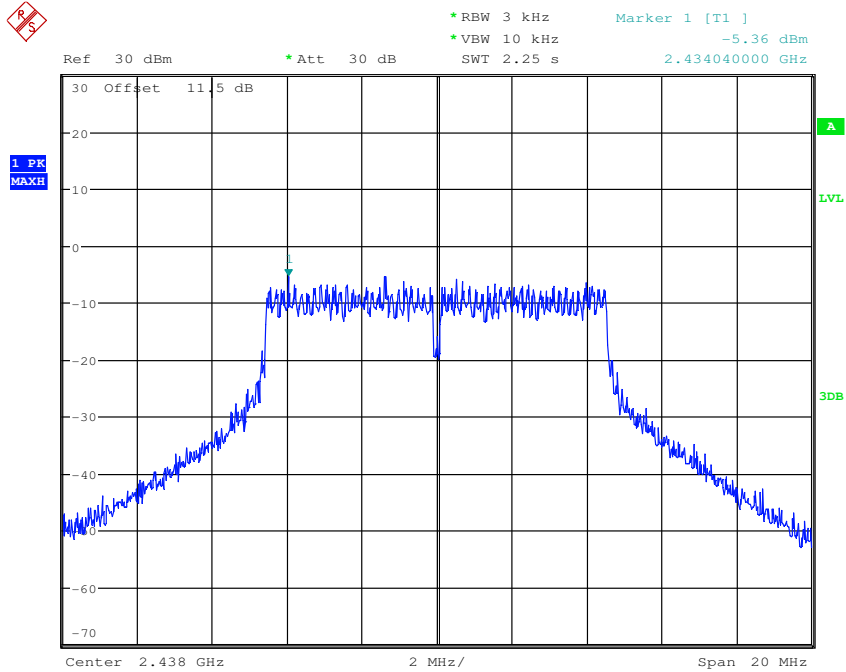

| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

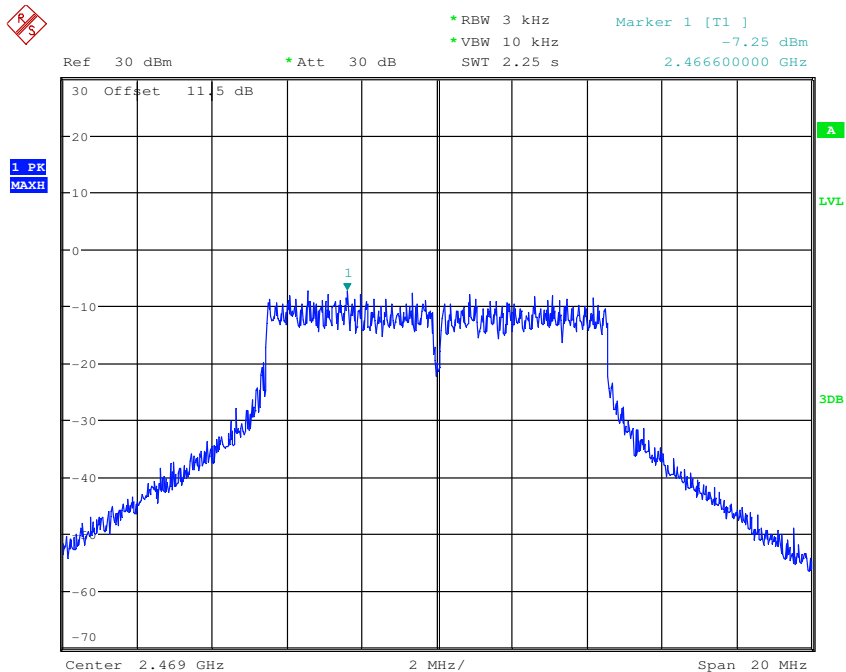

6.5 Band-edge for RF Conducted Emissions

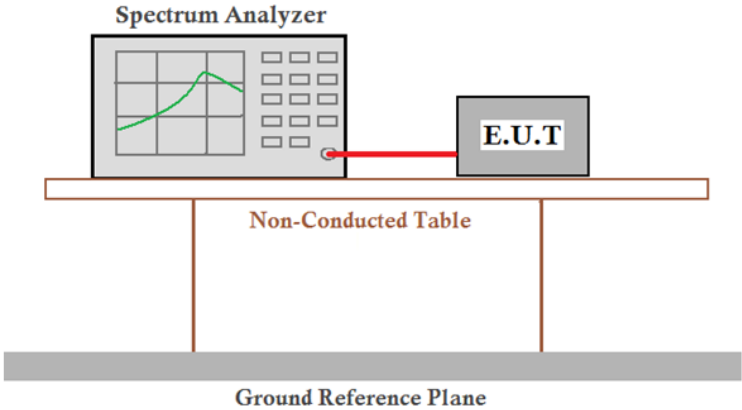
| | |
|-------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d) |
| Test Method: | ANSI C63.10: 2013 Section 11.13 |
| Test Setup: |  <p>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p> |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode |
| Instruments Used: | Refer to section 5.10 for details. |
| Test Results: | Pass |




Test plot as follows:

4MHz Bandwidth mode

| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

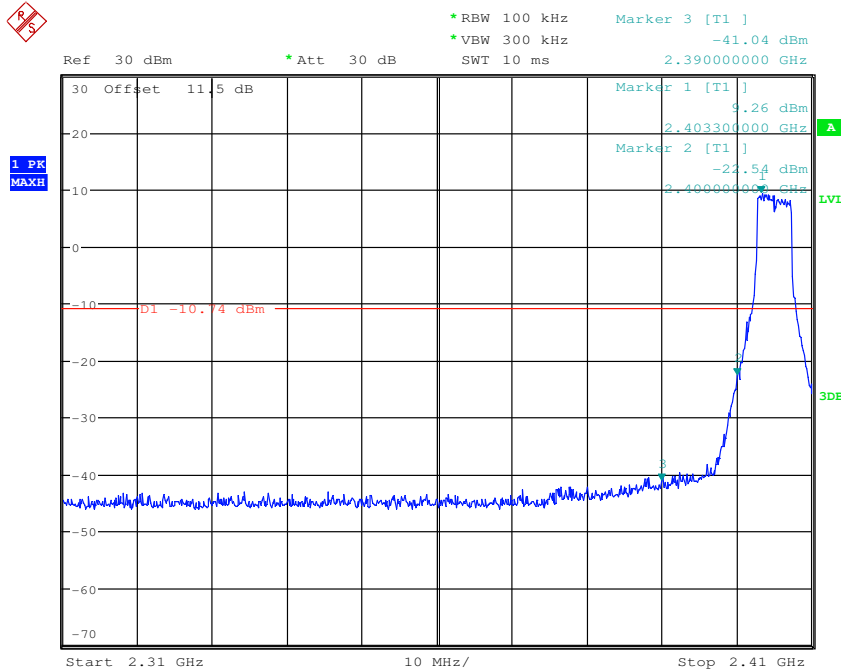


| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

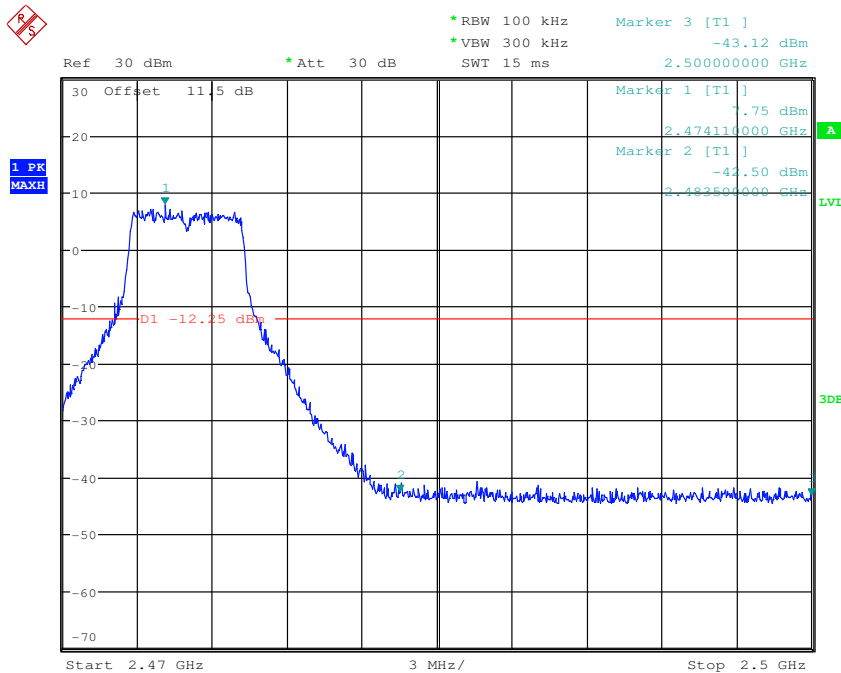




8MHz Bandwidth mode


| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

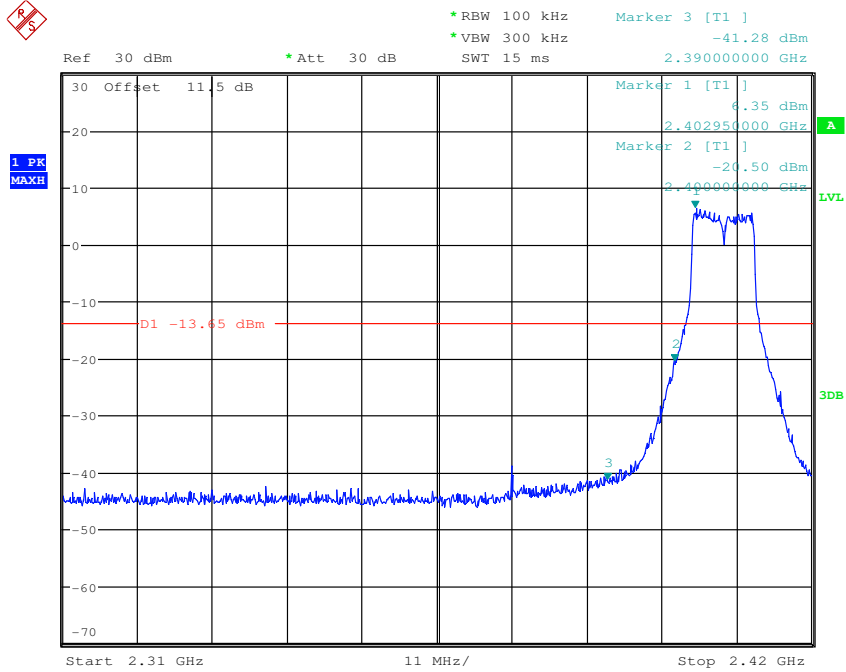

| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

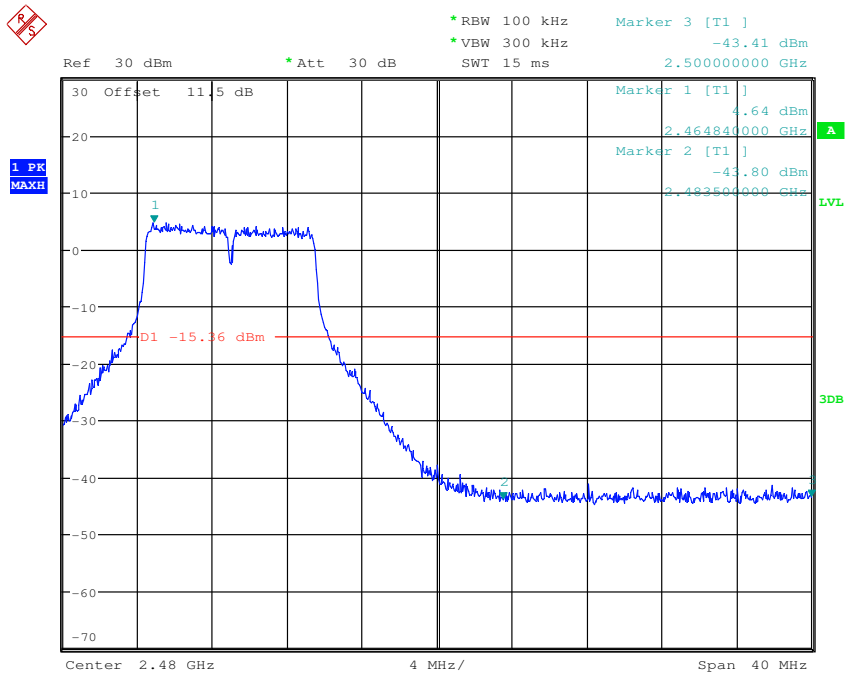

6.6 Spurious RF Conducted Emissions


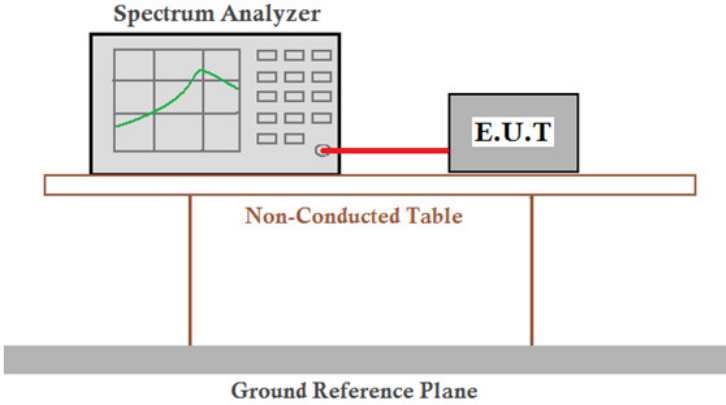
| | |
|-------------------|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (d) |
| Test Method: | ANSI C63.10: 2013 Section 11.11 |
| Test Setup: |  <p>Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p> |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode |
| Instruments Used: | Refer to section 5.10 for details. |
| Test Results: | Pass |




Test plot as follows:


4MHz Bandwidth mode



| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

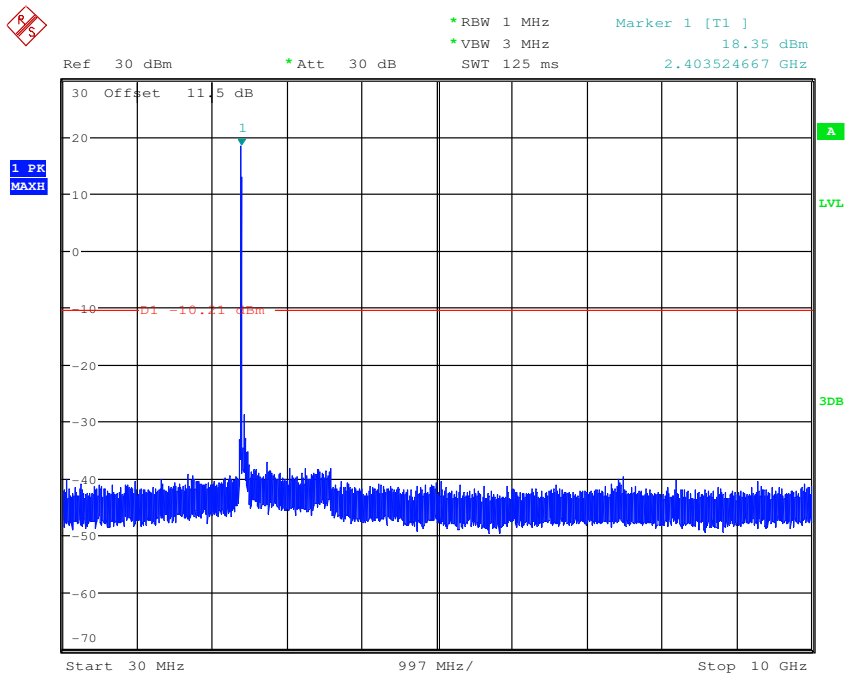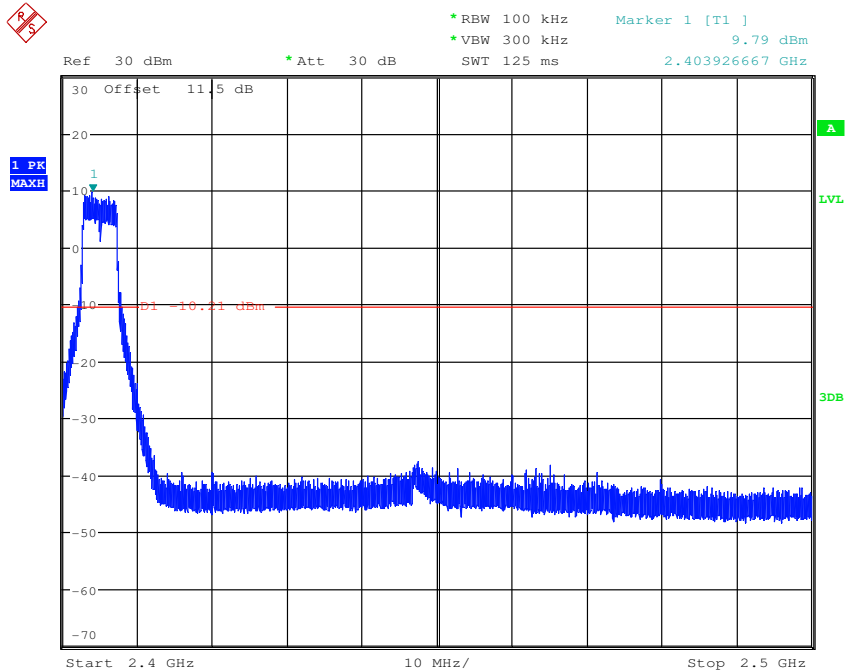

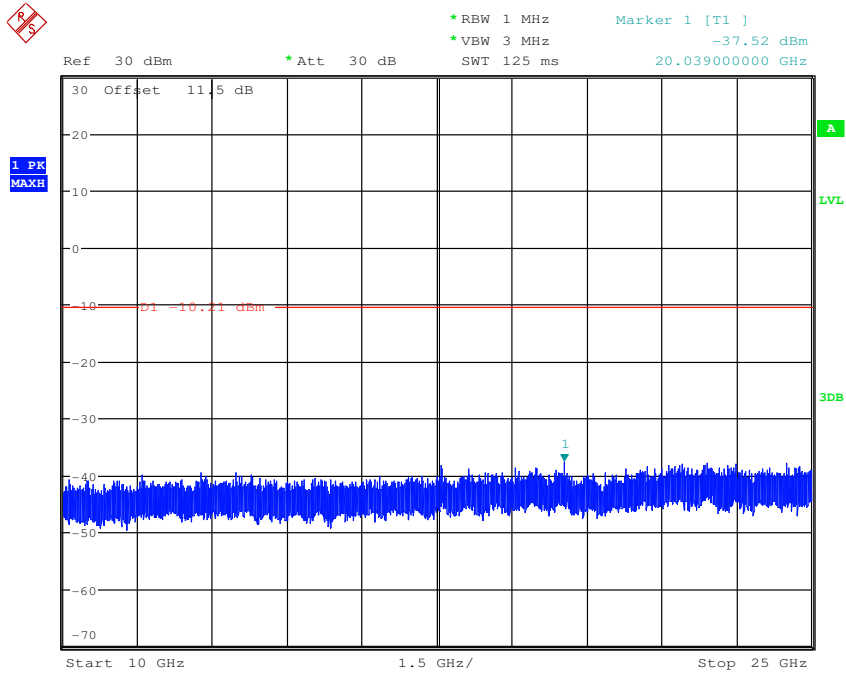



| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Middle |
|------------|---------------------|---------------|--------|

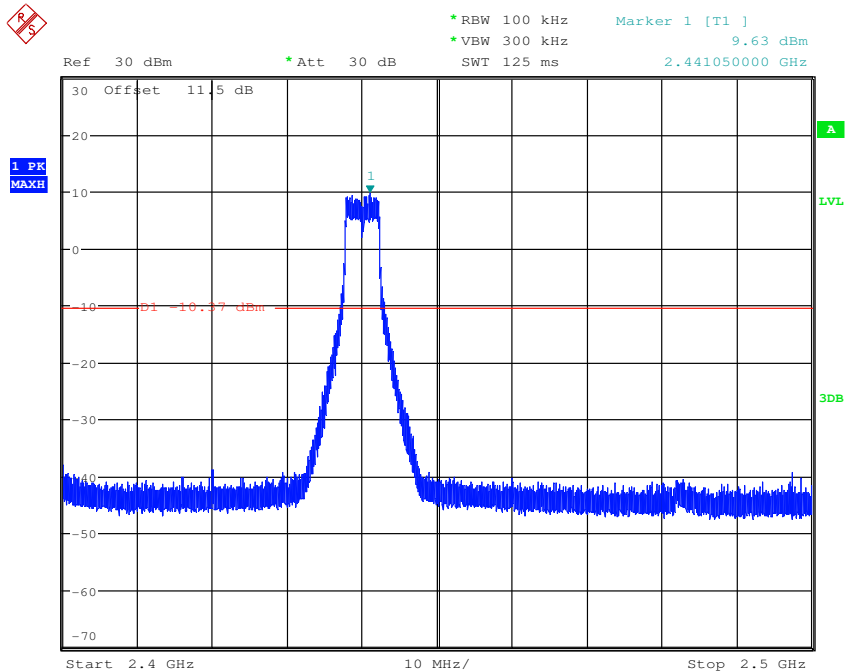


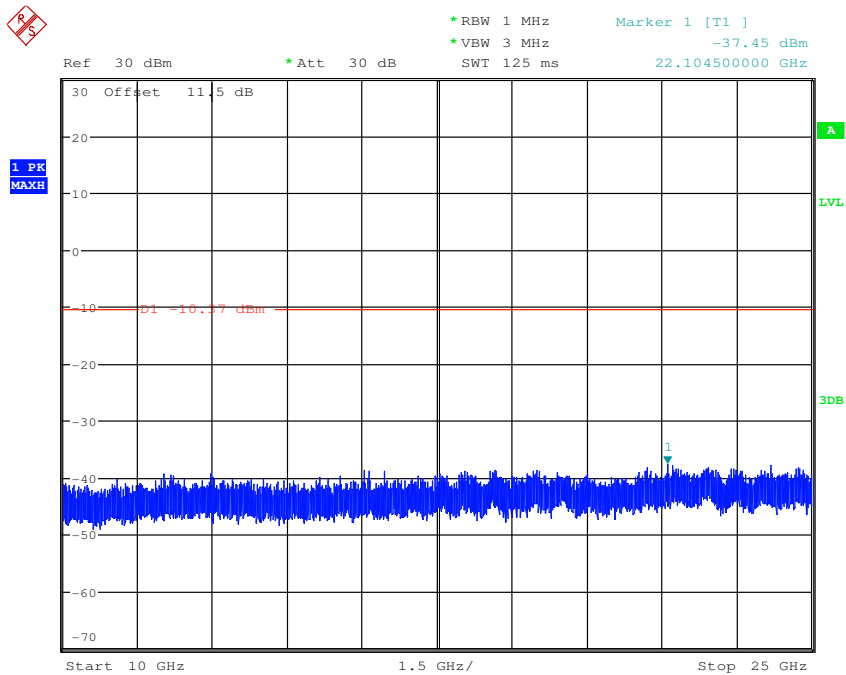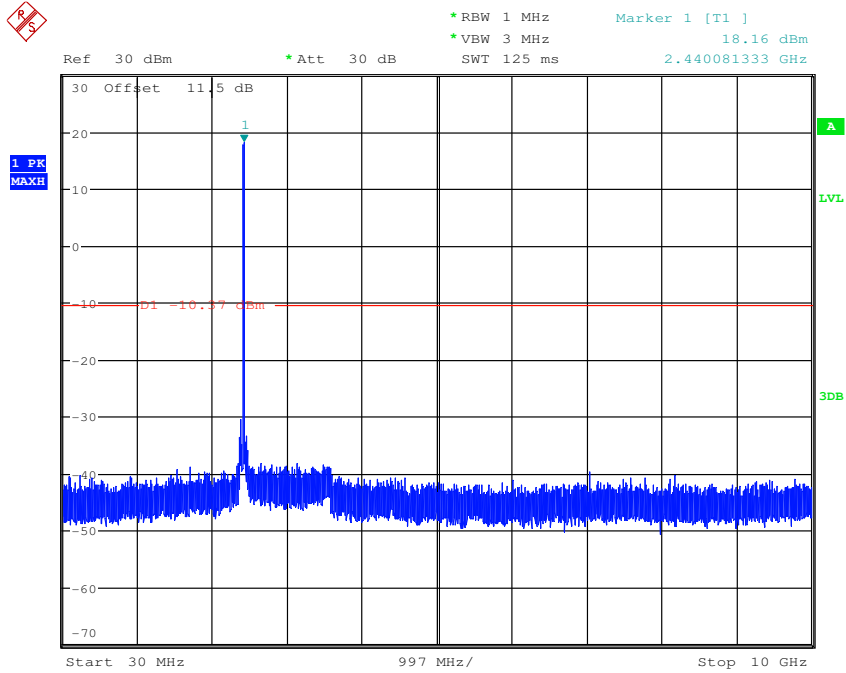




| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 4MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

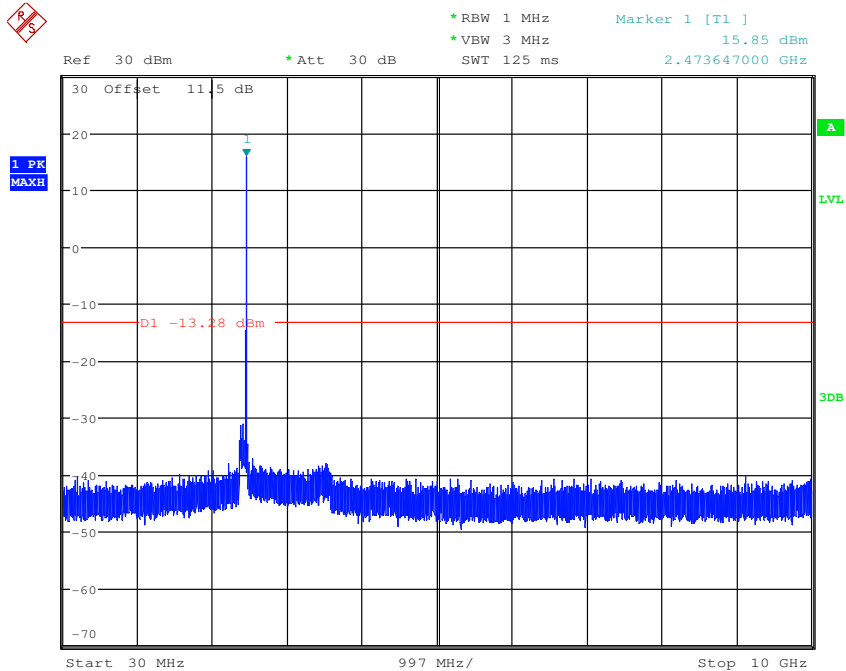
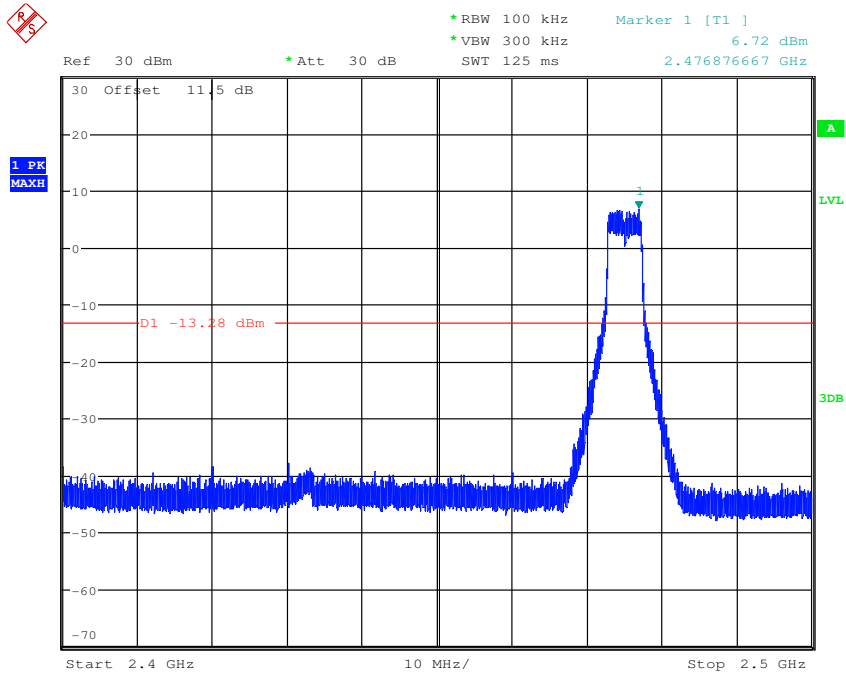


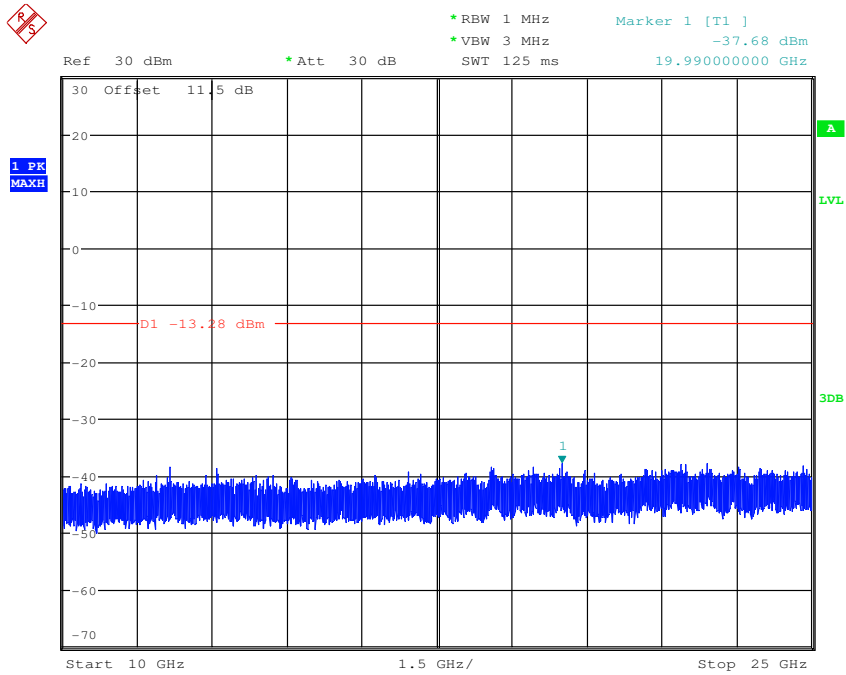

8MHz Bandwidth mode



| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Lowest |
|------------|---------------------|---------------|--------|

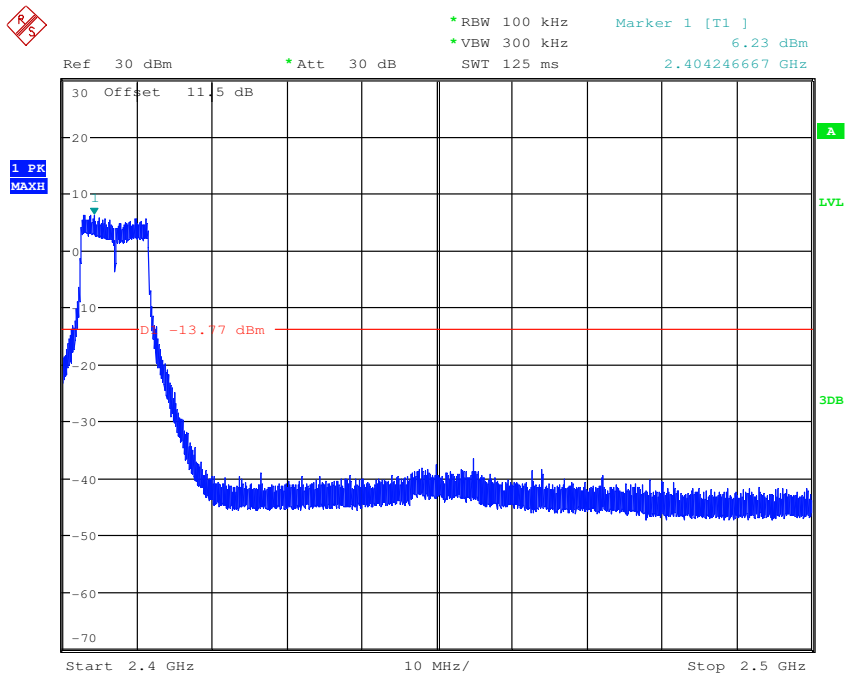


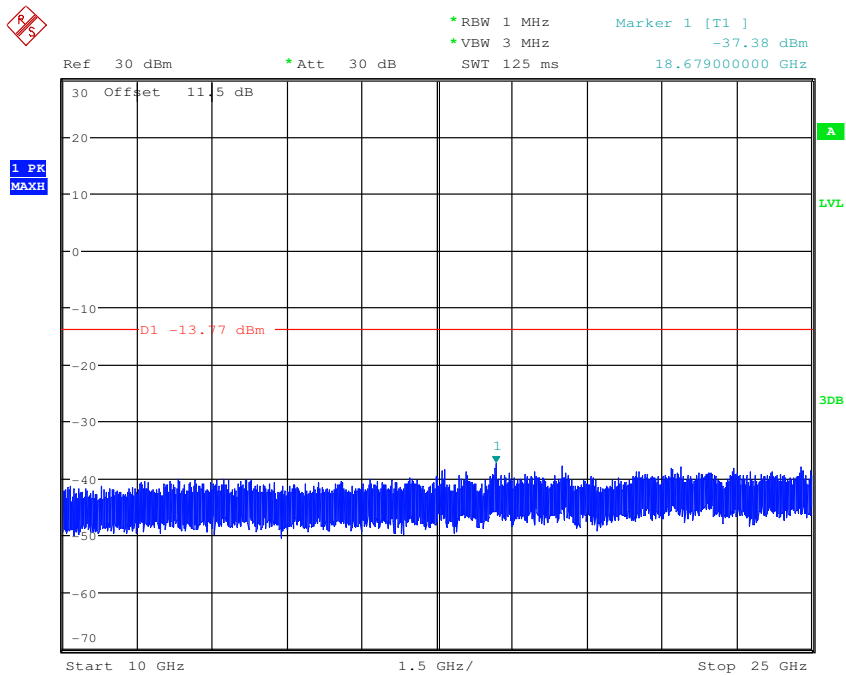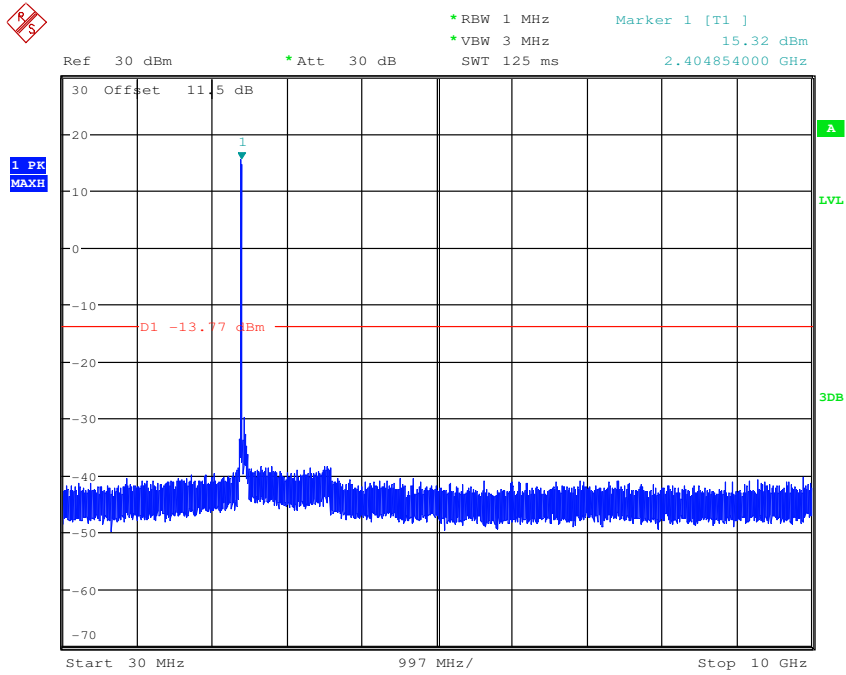






| | | | |
|------------|---------------------|---------------|--------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Middle |
|------------|---------------------|---------------|--------|

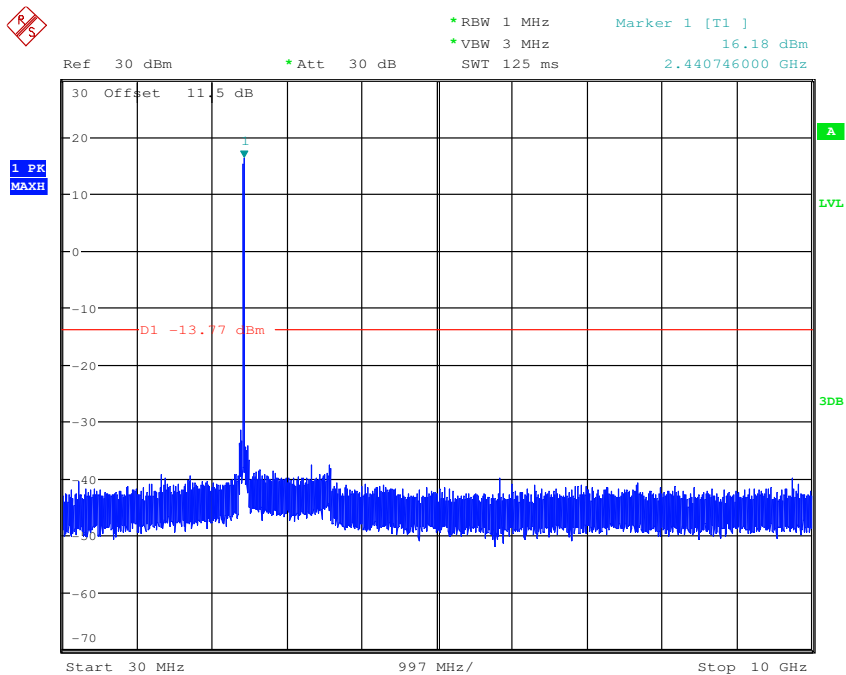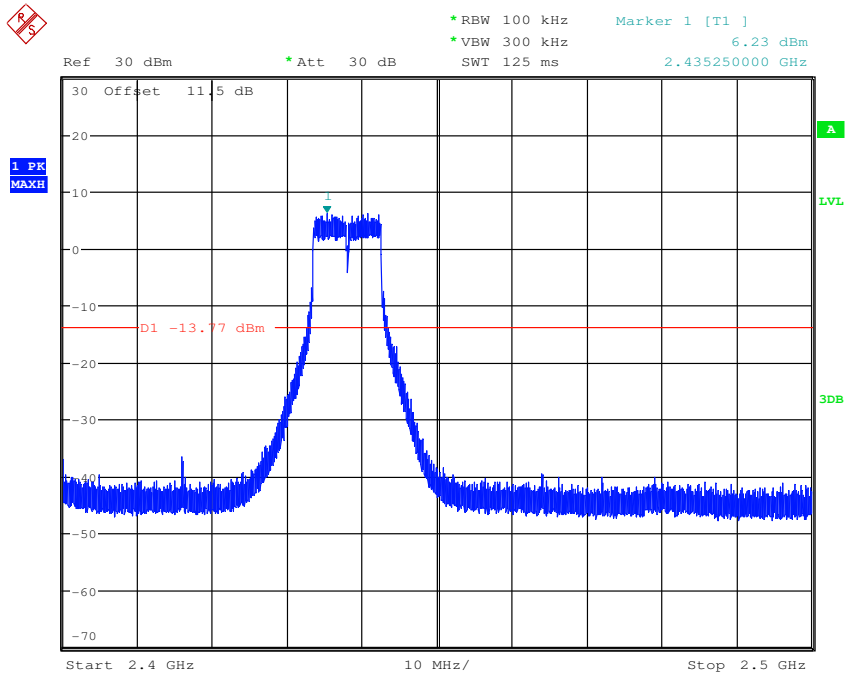

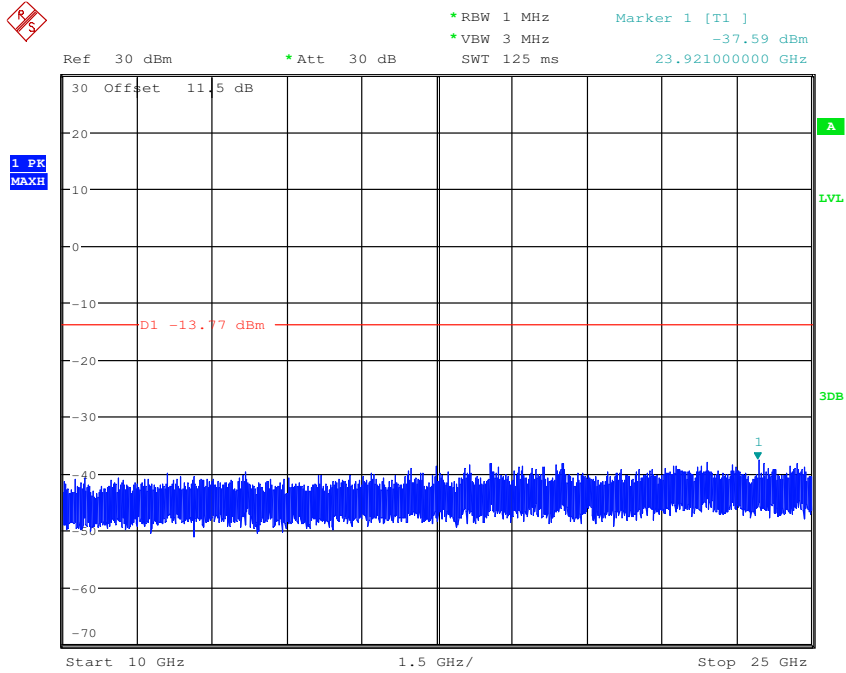

| | | | |
|------------|---------------------|---------------|---------|
| Test mode: | 8MHz Bandwidth mode | Test channel: | Highest |
|------------|---------------------|---------------|---------|

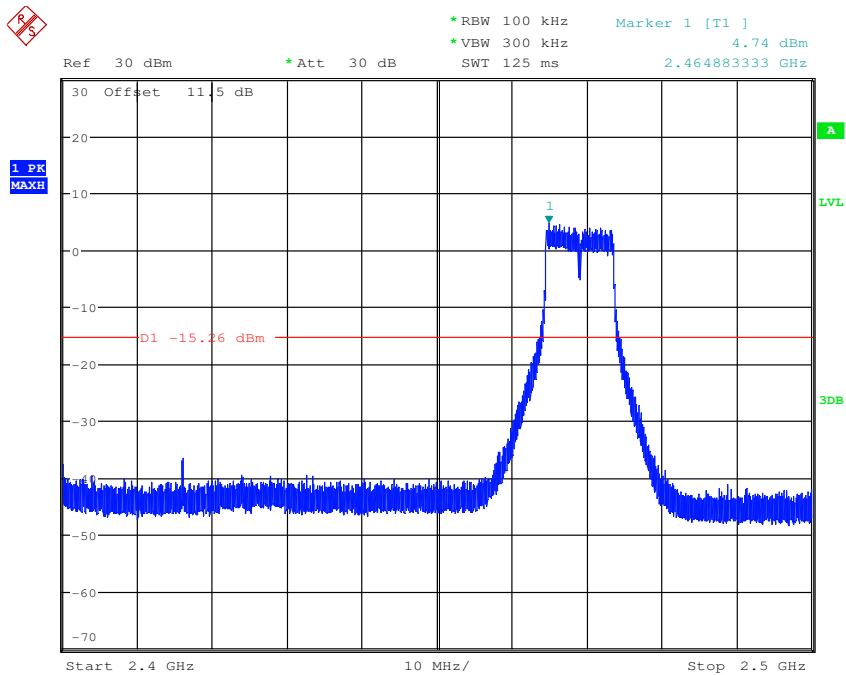


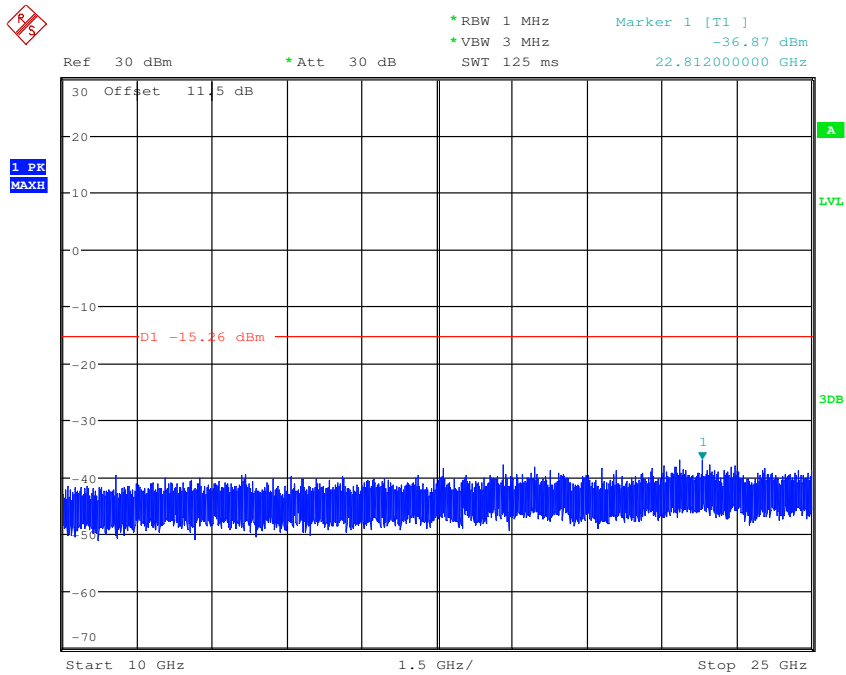
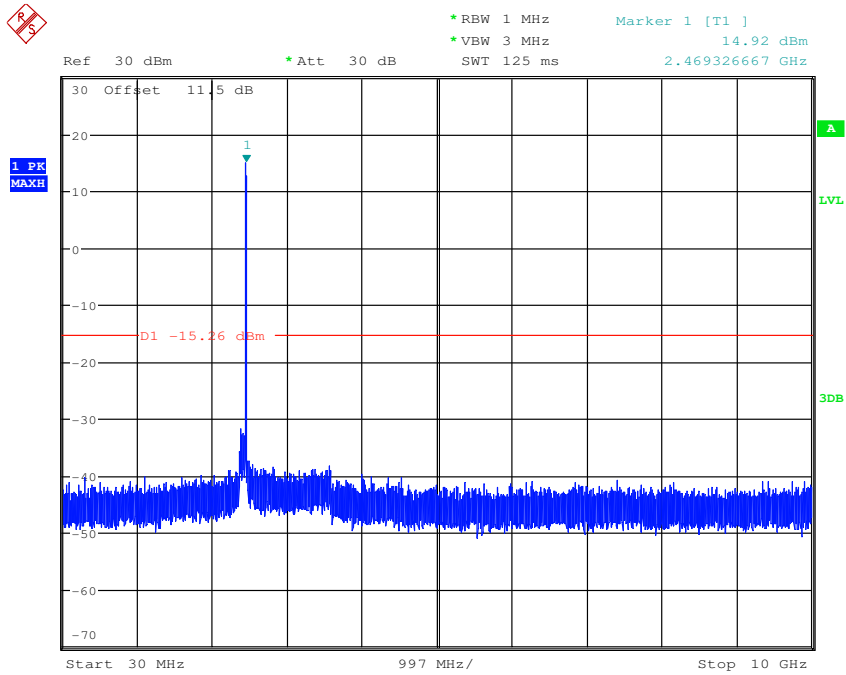


Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.

6.7 Radiated Spurious Emission

| 6.7.1 Spurious Emissions | | | | | |
|--|---|----------------------------------|----------------|------------|--------------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 | | | | |
| Test Method: | ANSI C63.10 :2013 Section 11.12 | | | | |
| Test Site: | Below 1GHz: Measurement Distance: 10m (Semi-Anechoic Chamber) Above 1GHz: Measurement Distance: 3m (Full-Anechoic Chamber) | | | | |
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
| | 0.009MHz-0.090MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.009MHz-0.090MHz | Average | 10kHz | 30kHz | Average |
| | 0.090MHz-0.110MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 0.110MHz-0.490MHz | Peak | 10kHz | 30kHz | Peak |
| | 0.110MHz-0.490MHz | Average | 10kHz | 30kHz | Average |
| | 0.490MHz -30MHz | Quasi-peak | 10kHz | 30kHz | Quasi-peak |
| | 30MHz-1GHz | Quasi-peak | 100 kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| Peak | | 1MHz | 10Hz | Average | |
| Limit: | Frequency | Field strength (microvolt/meter) | Limit (dBuV/m) | Remark | Measurement distance (m) |
| | 0.009MHz-0.490MHz | 2400/F(kHz) | - | - | 300 |
| | 0.490MHz-1.705MHz | 24000/F(kHz) | - | - | 30 |
| | 1.705MHz-30MHz | 30 | - | - | 30 |
| | 30MHz-88MHz | 100 | 40.0 | Quasi-peak | 3 |
| | 88MHz-216MHz | 150 | 43.5 | Quasi-peak | 3 |
| | 216MHz-960MHz | 200 | 46.0 | Quasi-peak | 3 |
| | 960MHz-1GHz | 500 | 54.0 | Quasi-peak | 3 |
| | Above 1GHz | 500 | 54.0 | Average | 3 |
| <p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p> | | | | | |
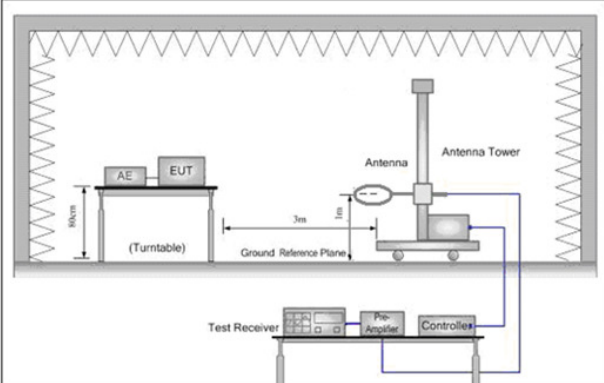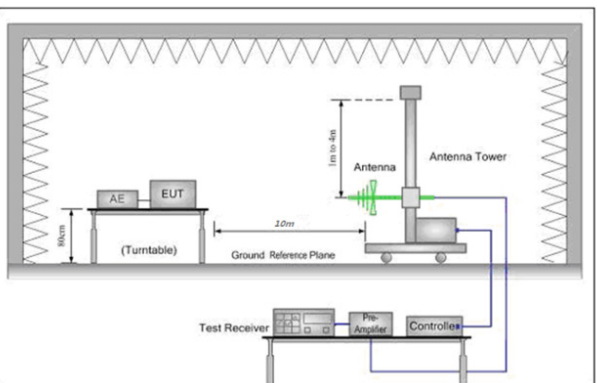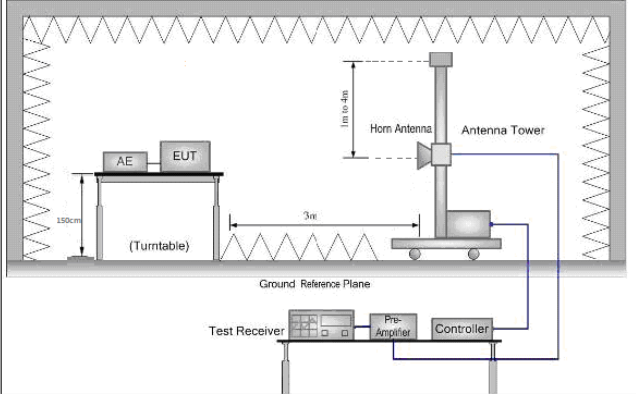
| Test Setup: | |
|--|--|
|  <p data-bbox="359 694 638 728">Figure 1. Below 30MHz</p> |  <p data-bbox="997 694 1300 728">Figure 2. 30MHz to 1GHz</p> |
|  <p data-bbox="678 1153 949 1187">Figure 3. Above 1 GHz</p> | |
| <p data-bbox="263 1198 454 1232">Test Procedure:</p> | <ol data-bbox="550 1198 1476 2038" style="list-style-type: none"> For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter Full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to height 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |



| | |
|------------------------|---|
| | h. Repeat above procedures until all frequencies measured was complete. |
| Exploratory Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode Transmitting mode |
| Final Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode Pretest the EUT at Transmitting mode For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 5.10 for details. |
| Test Results: | Pass |

For frequencies below 1GHz, the test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

L₃: Level @ 3m distance. Unit: uV/m;

L₁₀: Level @ 10m distance. Unit: uV/m;

D₃: 3m distance. Unit: m


D₁₀: 10m distance. Unit: m

The level at 3m test distance is below:

| Frequency (MHz) | Level @ 10m (dBuV/m) | Level @ 10m (uV/m) | Level @ 3m (uV/m) | Level @ 3m (dBuV/m) | Limit @ 3m (dBuV/m) | Margin (dB) | Ant. Polarization |
|-----------------|----------------------|--------------------|-------------------|---------------------|---------------------|-------------|-------------------|
| 65.57 | 21.97 | 12.55 | 41.82 | 32.43 | 40.00 | -7.57 | V |
| 97.80 | 23.65 | 15.22 | 50.74 | 34.11 | 43.50 | -9.39 | V |
| 139.85 | 27.30 | 23.17 | 77.25 | 37.76 | 43.50 | -5.74 | V |
| 210.05 | 24.09 | 16.01 | 53.38 | 34.55 | 43.50 | -8.95 | V |
| 258.33 | 25.26 | 18.32 | 61.08 | 35.72 | 46.00 | -10.28 | V |
| 319.94 | 28.42 | 26.36 | 87.88 | 38.88 | 46.00 | -7.12 | V |
| 115.73 | 17.98 | 7.93 | 26.42 | 28.44 | 43.50 | -15.06 | H |
| 147.92 | 22.89 | 13.95 | 46.49 | 33.35 | 43.50 | -10.15 | H |
| 210.79 | 24.46 | 16.71 | 55.70 | 34.92 | 43.50 | -8.58 | H |
| 319.94 | 27.80 | 24.55 | 81.82 | 38.26 | 46.00 | -7.74 | H |
| 560.69 | 29.02 | 28.25 | 94.16 | 39.48 | 46.00 | -6.52 | H |
| 601.43 | 28.82 | 27.61 | 92.02 | 39.28 | 46.00 | -6.72 | H |



| | | |
|------------------------------|-------------------|----------|
| Radiated Emission below 1GHz | | |
| 30MHz~1GHz (QP) | | |
| Test mode: | Transmitting mode | Vertical |

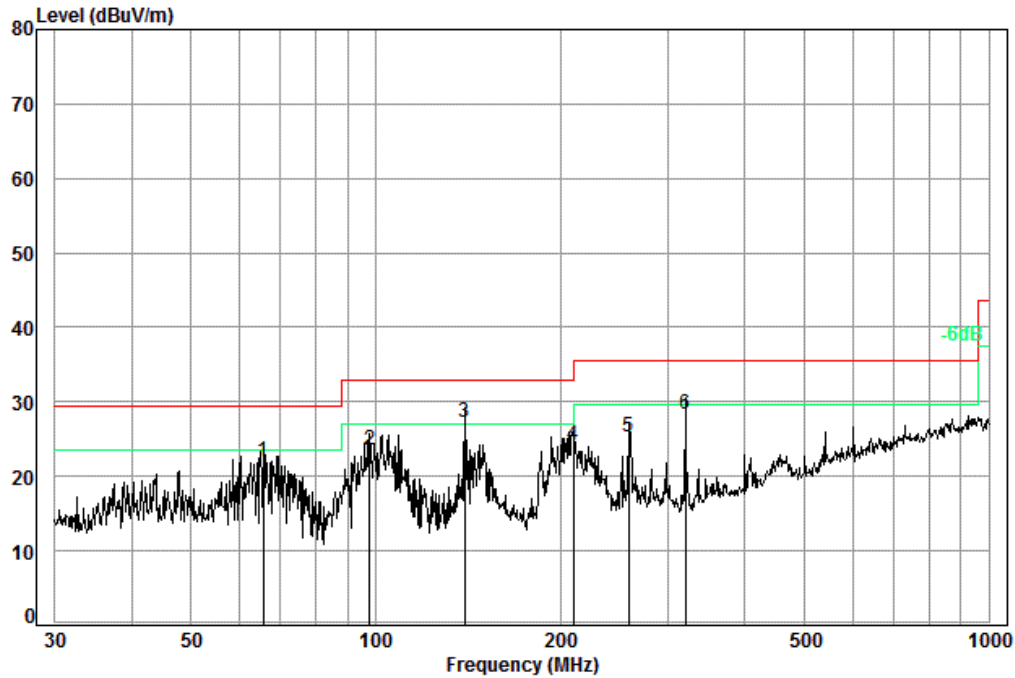

Condition: 10m VERTICAL


Job No. : 9257CR

Test Mode: TX mode

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Limit Level | Over Limit | |
|------|--------|------------|------------|---------------|------------|-------------|------------|--------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dB | |
| 1 | 65.57 | 6.99 | 10.89 | 32.92 | 37.01 | 21.97 | 29.50 | -7.53 |
| 2 | 97.80 | 7.20 | 9.24 | 32.81 | 40.02 | 23.65 | 33.00 | -9.35 |
| 3 pp | 139.85 | 7.40 | 12.75 | 32.75 | 39.90 | 27.30 | 33.00 | -5.70 |
| 4 | 210.05 | 7.65 | 9.53 | 32.69 | 39.60 | 24.09 | 35.60 | -11.51 |
| 5 | 258.33 | 7.90 | 11.44 | 32.64 | 38.56 | 25.26 | 35.60 | -10.34 |
| 6 | 319.94 | 8.10 | 13.23 | 32.60 | 39.69 | 28.42 | 35.60 | -7.18 |



| | | |
|------------|-------------------|------------|
| Test mode: | Transmitting mode | Horizontal |
|------------|-------------------|------------|

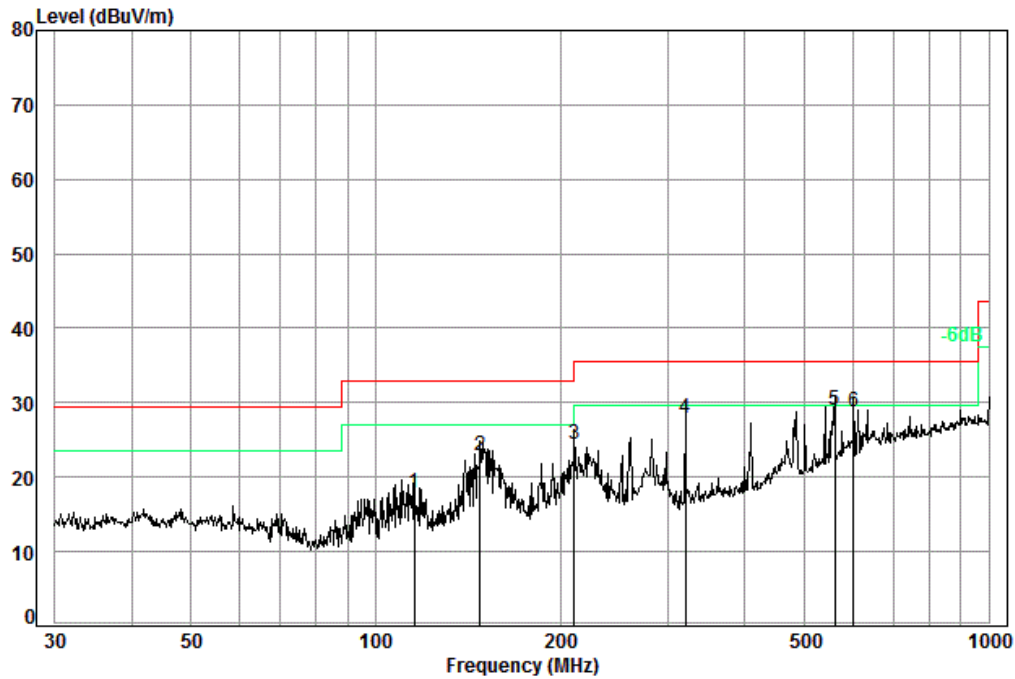

Condition: 10m HORIZONTAL

Job No. : 9257CR

Test Mode: TX mode

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Limit Level | Over Limit |
|------|--------|------------|------------|---------------|------------|-------------|--------------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dB |
| 1 | 115.73 | 7.28 | 11.02 | 32.78 | 32.46 | 17.98 | 33.00 -15.02 |
| 2 | 147.92 | 7.44 | 13.28 | 32.74 | 34.91 | 22.89 | 33.00 -10.11 |
| 3 | 210.79 | 7.66 | 9.58 | 32.69 | 39.91 | 24.46 | 35.60 -11.14 |
| 4 | 319.94 | 8.10 | 13.23 | 32.60 | 39.07 | 27.80 | 35.60 -7.80 |
| 5 pp | 560.69 | 8.80 | 17.92 | 32.60 | 34.90 | 29.02 | 35.60 -6.58 |
| 6 | 601.43 | 8.90 | 18.74 | 32.60 | 33.78 | 28.82 | 35.60 -6.78 |



Transmitter Emission above 1GHz

4MHz Bandwidth mode

| Test mode: | | 4MHz Bandwidth mode | | | Test channel: | | Lowest | | Remark: | Peak |
|-----------------|-----------------------|---------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|---------|------|
| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | | |
| 3568.847 | 32.40 | 7.66 | 38.50 | 45.19 | 46.75 | 74.00 | -27.25 | Vertical | | |
| 4810.000 | 34.17 | 8.88 | 39.03 | 44.71 | 48.73 | 74.00 | -25.27 | Vertical | | |
| 5828.433 | 34.60 | 10.08 | 39.02 | 45.21 | 50.87 | 74.00 | -23.13 | Vertical | | |
| 7215.000 | 36.41 | 10.68 | 38.17 | 42.39 | 51.31 | 74.00 | -22.69 | Vertical | | |
| 9620.000 | 37.52 | 12.51 | 36.98 | 39.86 | 52.91 | 74.00 | -21.09 | Vertical | | |
| 12085.370 | 38.65 | 14.49 | 38.39 | 38.71 | 53.46 | 74.00 | -20.54 | Vertical | | |
| 3765.116 | 32.97 | 7.73 | 38.59 | 44.76 | 46.87 | 74.00 | -27.13 | Horizontal | | |
| 4810.000 | 34.17 | 8.88 | 39.03 | 43.07 | 47.09 | 74.00 | -26.91 | Horizontal | | |
| 5761.355 | 34.56 | 9.89 | 39.02 | 45.04 | 50.47 | 74.00 | -23.53 | Horizontal | | |
| 7215.000 | 36.41 | 10.68 | 38.17 | 43.16 | 52.08 | 74.00 | -21.92 | Horizontal | | |
| 9620.000 | 37.52 | 12.51 | 36.98 | 39.89 | 52.94 | 74.00 | -21.06 | Horizontal | | |
| 12155.510 | 38.69 | 14.43 | 38.46 | 38.53 | 53.19 | 74.00 | -20.81 | Horizontal | | |

| Test mode: | | 4MHz Bandwidth mode | | | Test channel: | | Middle | | Remark: | Peak |
|-----------------|-----------------------|---------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|---------|------|
| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | | |
| 3842.163 | 33.18 | 7.76 | 38.63 | 45.75 | 48.06 | 74.00 | -25.94 | Vertical | | |
| 4880.000 | 34.29 | 8.97 | 39.06 | 43.49 | 47.69 | 74.00 | -26.31 | Vertical | | |
| 6069.413 | 34.76 | 10.47 | 38.96 | 44.69 | 50.96 | 74.00 | -23.04 | Vertical | | |
| 7320.000 | 36.37 | 10.72 | 38.07 | 42.52 | 51.54 | 74.00 | -22.46 | Vertical | | |
| 9760.000 | 37.55 | 12.58 | 36.92 | 39.70 | 52.91 | 74.00 | -21.09 | Vertical | | |
| 12279.260 | 38.77 | 14.33 | 38.59 | 38.53 | 53.04 | 74.00 | -20.96 | Vertical | | |
| 3836.607 | 33.16 | 7.75 | 38.63 | 46.12 | 48.40 | 74.00 | -25.60 | Horizontal | | |
| 4880.000 | 34.29 | 8.97 | 39.06 | 42.09 | 46.29 | 74.00 | -27.71 | Horizontal | | |
| 6069.413 | 34.76 | 10.47 | 38.96 | 44.44 | 50.71 | 74.00 | -23.29 | Horizontal | | |
| 7320.000 | 36.37 | 10.72 | 38.07 | 41.56 | 50.58 | 74.00 | -23.42 | Horizontal | | |
| 9760.000 | 37.55 | 12.58 | 36.92 | 39.04 | 52.25 | 74.00 | -21.75 | Horizontal | | |
| 12190.740 | 38.72 | 14.40 | 38.50 | 38.56 | 53.18 | 74.00 | -20.82 | Horizontal | | |



| Test mode: | 4MHz Bandwidth mode | | | Test channel: | Highest | | Remark: | Peak |
|-----------------|-----------------------|-----------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 3915.118 | 33.38 | 7.78 | 38.66 | 44.76 | 47.26 | 74.00 | -26.74 | Vertical |
| 4950.000 | 34.41 | 9.07 | 39.08 | 42.49 | 46.89 | 74.00 | -27.11 | Vertical |
| 6211.563 | 34.87 | 10.29 | 38.87 | 44.59 | 50.88 | 74.00 | -23.12 | Vertical |
| 7425.000 | 36.33 | 10.76 | 37.96 | 41.93 | 51.06 | 74.00 | -22.94 | Vertical |
| 9900.000 | 37.58 | 12.66 | 36.85 | 38.90 | 52.29 | 74.00 | -21.71 | Vertical |
| 12085.370 | 38.65 | 14.49 | 38.39 | 38.99 | 53.74 | 74.00 | -20.26 | Vertical |
| 3960.700 | 33.50 | 7.80 | 38.68 | 44.63 | 47.25 | 74.00 | -26.75 | Horizontal |
| 4950.000 | 34.41 | 9.07 | 39.08 | 43.08 | 47.48 | 74.00 | -26.52 | Horizontal |
| 6157.871 | 34.83 | 10.36 | 38.90 | 44.30 | 50.59 | 74.00 | -23.41 | Horizontal |
| 7425.000 | 36.33 | 10.76 | 37.96 | 41.13 | 50.26 | 74.00 | -23.74 | Horizontal |
| 9900.000 | 37.58 | 12.66 | 36.85 | 38.26 | 51.65 | 74.00 | -22.35 | Horizontal |
| 12067.890 | 38.64 | 14.50 | 38.37 | 39.01 | 53.78 | 74.00 | -20.22 | Horizontal |

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



8MHz Bandwidth mode

| Test mode: | | 8MHz Bandwidth mode | | | Test channel: | | Lowest | | Remark: | Peak |
|-----------------|-----------------------|---------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|---------|------|
| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | | |
| 3858.877 | 33.22 | 7.76 | 38.64 | 44.33 | 46.67 | 74.00 | -27.33 | Vertical | | |
| 4814.000 | 34.18 | 8.88 | 39.03 | 42.68 | 46.71 | 74.00 | -27.29 | Vertical | | |
| 5828.433 | 34.60 | 10.08 | 39.02 | 44.36 | 50.02 | 74.00 | -23.98 | Vertical | | |
| 7221.000 | 36.41 | 10.69 | 38.17 | 42.70 | 51.63 | 74.00 | -22.37 | Vertical | | |
| 9628.000 | 37.53 | 12.51 | 36.98 | 39.45 | 52.51 | 74.00 | -21.49 | Vertical | | |
| 12155.510 | 38.69 | 14.43 | 38.46 | 38.78 | 53.44 | 74.00 | -20.56 | Vertical | | |
| 3825.521 | 33.13 | 7.75 | 38.62 | 44.31 | 46.57 | 74.00 | -27.43 | Horizontal | | |
| 4814.000 | 34.18 | 8.88 | 39.03 | 42.36 | 46.39 | 74.00 | -27.61 | Horizontal | | |
| 5803.188 | 34.59 | 10.01 | 39.02 | 44.91 | 50.49 | 74.00 | -23.51 | Horizontal | | |
| 7221.000 | 36.41 | 10.69 | 38.17 | 43.38 | 52.31 | 74.00 | -21.69 | Horizontal | | |
| 9628.000 | 37.53 | 12.51 | 36.98 | 39.60 | 52.66 | 74.00 | -21.34 | Horizontal | | |
| 11455.380 | 38.07 | 13.97 | 37.77 | 39.16 | 53.43 | 74.00 | -20.57 | Horizontal | | |

| Test mode: | | 8MHz Bandwidth mode | | | Test channel: | | Middle | | Remark: | Peak |
|-----------------|-----------------------|---------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|---------|------|
| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization | | |
| 3781.495 | 33.01 | 7.73 | 38.60 | 46.09 | 48.23 | 74.00 | -25.77 | Vertical | | |
| 4876.000 | 34.29 | 8.97 | 39.05 | 42.54 | 46.75 | 74.00 | -27.25 | Vertical | | |
| 6175.716 | 34.84 | 10.33 | 38.89 | 44.66 | 50.94 | 74.00 | -23.06 | Vertical | | |
| 7314.000 | 36.37 | 10.72 | 38.07 | 41.88 | 50.90 | 74.00 | -23.10 | Vertical | | |
| 9752.000 | 37.55 | 12.58 | 36.92 | 38.66 | 51.87 | 74.00 | -22.13 | Vertical | | |
| 12261.500 | 38.76 | 14.34 | 38.57 | 39.12 | 53.65 | 74.00 | -20.35 | Vertical | | |
| 3574.015 | 32.42 | 7.66 | 38.50 | 44.18 | 45.76 | 74.00 | -28.24 | Horizontal | | |
| 4876.000 | 34.29 | 8.97 | 39.05 | 41.89 | 46.10 | 74.00 | -27.90 | Horizontal | | |
| 6078.201 | 34.76 | 10.46 | 38.95 | 44.67 | 50.94 | 74.00 | -23.06 | Horizontal | | |
| 7314.000 | 36.37 | 10.72 | 38.07 | 43.05 | 52.07 | 74.00 | -21.93 | Horizontal | | |
| 9752.000 | 37.55 | 12.58 | 36.92 | 39.72 | 52.93 | 74.00 | -21.07 | Horizontal | | |
| 12226.070 | 38.74 | 14.37 | 38.53 | 38.82 | 53.40 | 74.00 | -20.60 | Horizontal | | |



| Test mode: | 8MHz Bandwidth mode | | | Test channel: | Highest | | Remark: | Peak |
|-----------------|-----------------------|-----------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|
| Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
| 3781.495 | 33.01 | 7.73 | 38.60 | 46.09 | 48.23 | 74.00 | -25.77 | Vertical |
| 4938.000 | 34.39 | 9.05 | 39.08 | 43.65 | 48.01 | 74.00 | -25.99 | Vertical |
| 6069.413 | 34.76 | 10.47 | 38.96 | 44.96 | 51.23 | 74.00 | -22.77 | Vertical |
| 7407.000 | 36.34 | 10.76 | 37.98 | 41.99 | 51.11 | 74.00 | -22.89 | Vertical |
| 9876.000 | 37.58 | 12.64 | 36.86 | 39.13 | 52.49 | 74.00 | -21.51 | Vertical |
| 12314.840 | 38.79 | 14.30 | 38.62 | 39.33 | 53.80 | 74.00 | -20.20 | Vertical |
| 3792.453 | 33.04 | 7.74 | 38.61 | 44.26 | 46.43 | 74.00 | -27.57 | Horizontal |
| 4938.000 | 34.39 | 9.05 | 39.08 | 43.34 | 47.70 | 74.00 | -26.30 | Horizontal |
| 5939.103 | 34.66 | 10.39 | 39.01 | 44.13 | 50.17 | 74.00 | -23.83 | Horizontal |
| 7407.000 | 36.34 | 10.76 | 37.98 | 40.25 | 49.37 | 74.00 | -24.63 | Horizontal |
| 9876.000 | 37.58 | 12.64 | 36.86 | 38.74 | 52.10 | 74.00 | -21.90 | Horizontal |
| 12350.530 | 38.81 | 14.27 | 38.66 | 39.55 | 53.97 | 74.00 | -20.03 | Horizontal |

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

6.8 Restricted bands around fundamental frequency

| | | | |
|-------------------|---|--------------------|------------------|
| Test Requirement: | 47 CFR Part 15C Section 15.209 and 15.205 | | |
| Test Method: | ANSI C63.10: 2013 Section 11.12 | | |
| Test Site: | Below 1GHz: Measurement Distance: 10m (Semi-Anechoic Chamber) Above 1GHz: Measurement Distance: 3m (Full-Anechoic Chamber) | | |
| Limit: | Frequency | Limit (dBuV/m @3m) | Remark |
| | 30MHz-88MHz | 40.0 | Quasi-peak Value |
| | 88MHz-216MHz | 43.5 | Quasi-peak Value |
| | 216MHz-960MHz | 46.0 | Quasi-peak Value |
| | 960MHz-1GHz | 54.0 | Quasi-peak Value |
| | Above 1GHz | 54.0 | Average Value |
| | | 74.0 | Peak Value |

Test Setup:

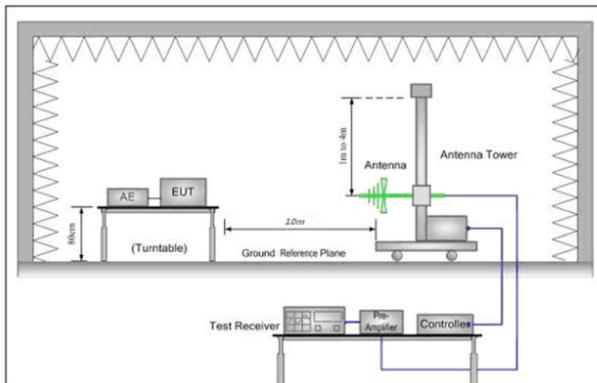


Figure 1. 30MHz to 1GHz

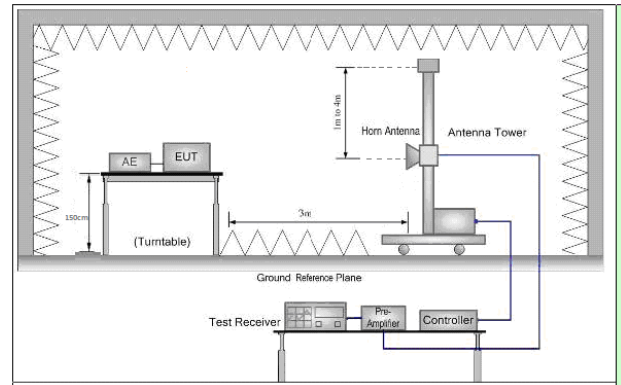


Figure 2. Above 1 GHz

| | |
|-----------------|--|
| Test Procedure: | <ol style="list-style-type: none"> For frequency below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter semi-anechoic chamber. For frequency above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter Full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3/10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel! Test the EUT in the lowest channel, the Highest channel Repeat above procedures until all frequencies measured was complete. |
|-----------------|--|




| | |
|------------------------|---|
| Exploratory Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode Transmitting mode. |
| Final Test Mode: | Transmitting with 4MHz Bandwidth mode and 8MHz Bandwidth mode Pretest the EUT at Transmitting mode. Only the worst case is recorded in the report. |
| Instruments Used: | Refer to section 5.10 for details. |
| Test Results: | Pass |



Test plot as follows:

4MHz Bandwidth mode

| | | | | |
|---------------|--------|---------|------|----------|
| Test channel: | Lowest | Remark: | Peak | Vertical |
|---------------|--------|---------|------|----------|

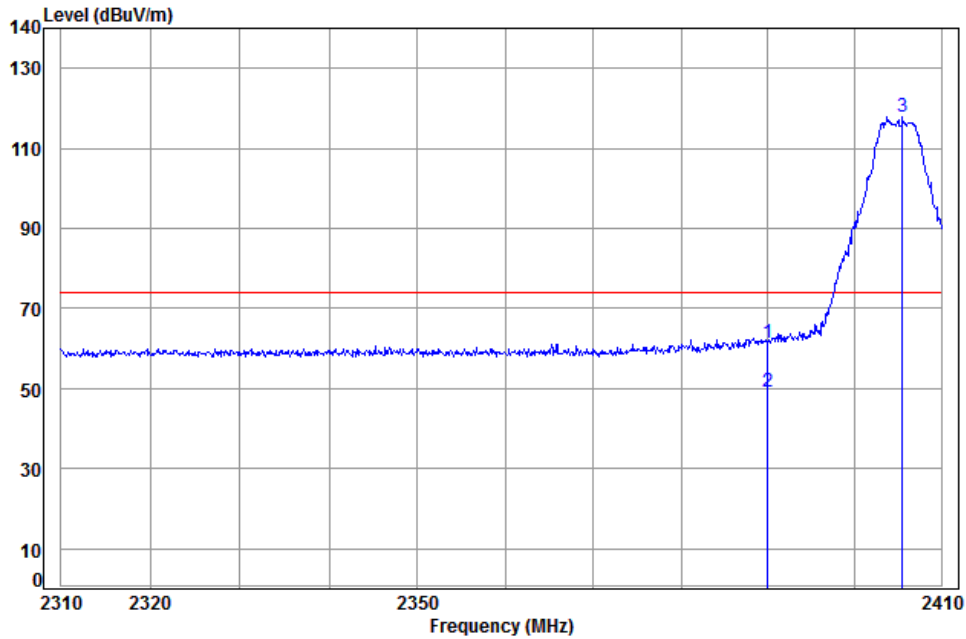

Condition: 3m Vertical

Job No: : 9257CR


Mode: : 2405 Band edge

: 4M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-------------|------------|------------|---------------|------------|--------|------------|------------|---------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 2390.000 | 3.33 | 29.08 | 0.00 | 29.13 | 61.54 | 74.00 | -12.46 | |
| 2 | av 2390.000 | 3.33 | 29.08 | 0.00 | 16.71 | 49.12 | 54.00 | -4.88 | Average |
| 3 | pp 2405.510 | 3.34 | 29.12 | 0.00 | 85.39 | 117.85 | 74.00 | 43.85 | |



| | | | | |
|---------------|--------|---------|------|------------|
| Test channel: | Lowest | Remark: | Peak | Horizontal |
|---------------|--------|---------|------|------------|

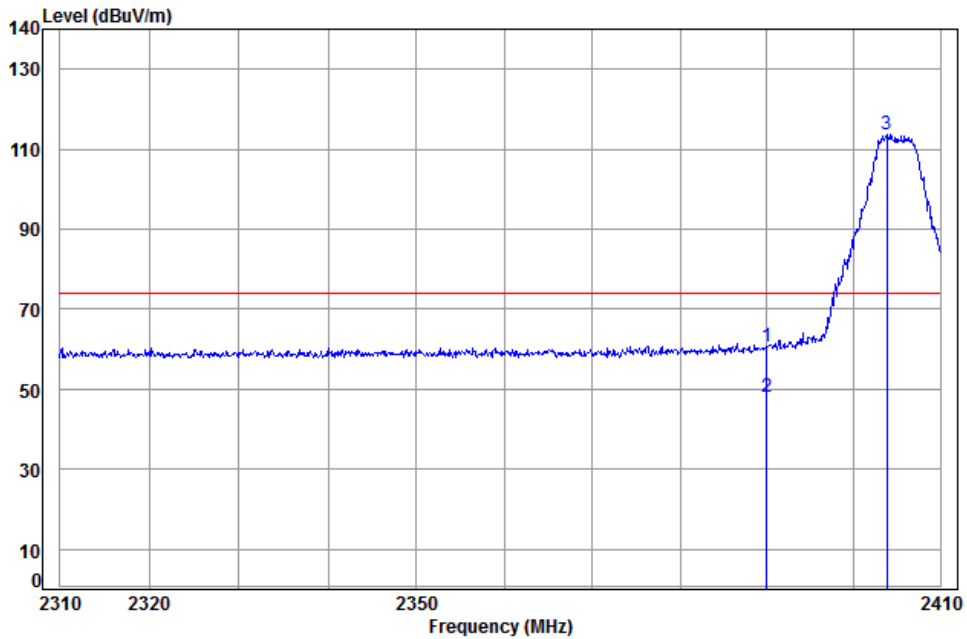


Condition: 3m HORIZONTAL
Job No: : 9257CR
Mode: : 2405 Band edge
: 4M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-------------|------------|------------|---------------|------------|--------|------------|------------|---------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 2390.000 | 3.33 | 29.08 | 0.00 | 28.26 | 60.67 | 74.00 | -13.33 | |
| 2 | av 2390.000 | 3.33 | 29.08 | 0.00 | 15.49 | 47.90 | 54.00 | -6.10 | Average |
| 3 | pp 2403.880 | 3.34 | 29.12 | 0.00 | 81.27 | 113.73 | 74.00 | 39.73 | |



| | | | | |
|---------------|---------|---------|------|----------|
| Test channel: | Highest | Remark: | Peak | Vertical |
|---------------|---------|---------|------|----------|

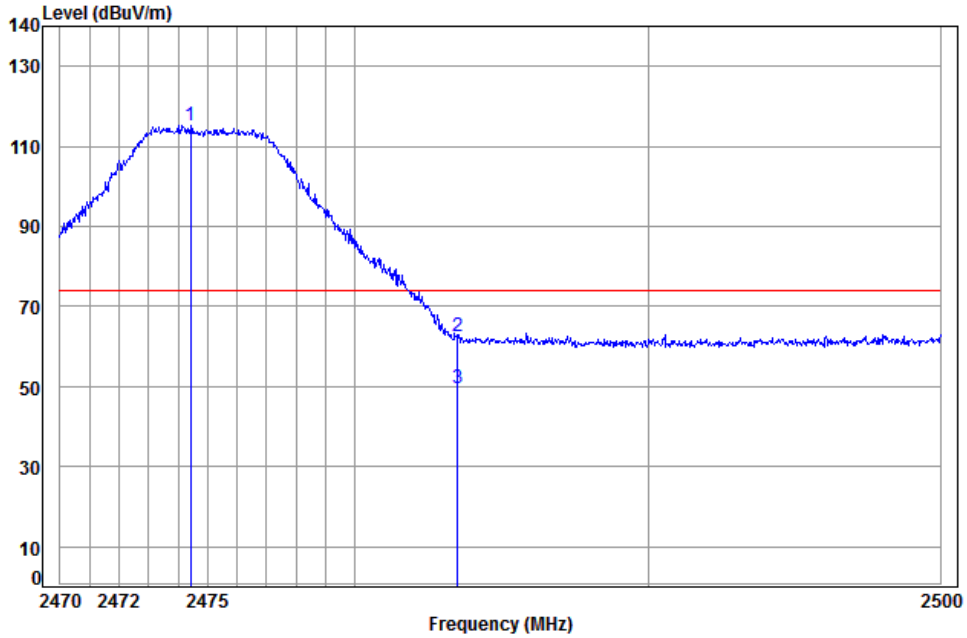

Condition: 3m VERTICAL

Job No: : 9257CR


Mode: : 2475 Band edge

: 4M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|---------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 pp | 2474.417 | 3.40 | 29.33 | 0.00 | 82.49 | 115.22 | 74.00 | 41.22 | |
| 2 | 2483.500 | 3.41 | 29.35 | 0.00 | 29.66 | 62.42 | 74.00 | -11.58 | |
| 3 av | 2483.500 | 3.41 | 29.35 | 0.00 | 16.76 | 49.52 | 54.00 | -4.48 | Average |



| | | | | |
|---------------|---------|---------|------|------------|
| Test channel: | Highest | Remark: | Peak | Horizontal |
|---------------|---------|---------|------|------------|

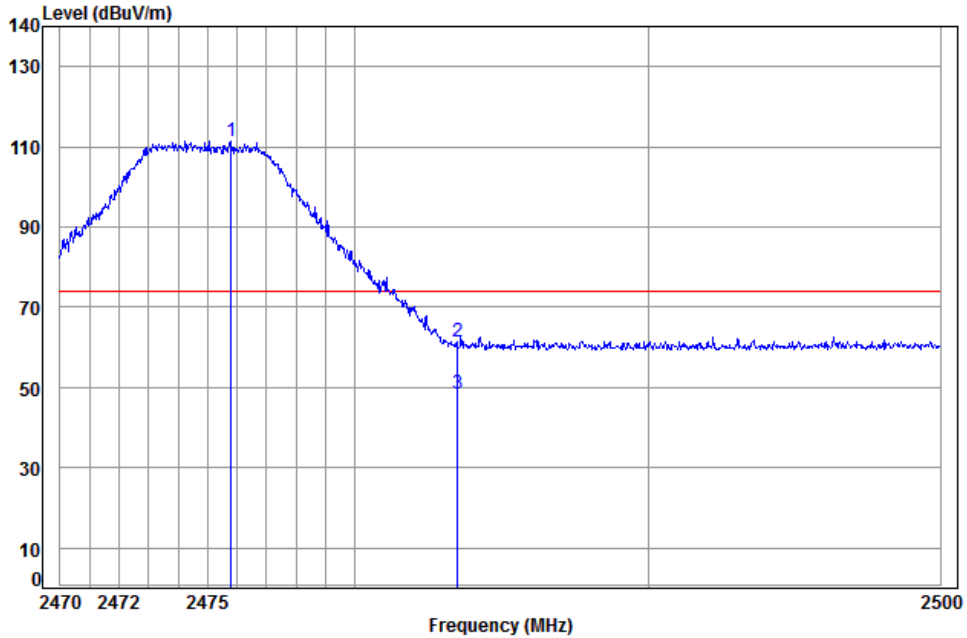


Condition: 3m HORIZONTAL
Job No: : 9257CR
Mode: : 2475 Band edge
: 4M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-------------|------------|------------|---------------|------------|--------|------------|------------|---------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | pp 2475.792 | 3.40 | 29.33 | 0.00 | 78.82 | 111.55 | 74.00 | 37.55 | |
| 2 | 2483.500 | 3.41 | 29.35 | 0.00 | 28.48 | 61.24 | 74.00 | -12.76 | |
| 3 | av 2483.500 | 3.41 | 29.35 | 0.00 | 15.85 | 48.61 | 54.00 | -5.39 | Average |



8MHz Bandwidth mode

| | | | | |
|---------------|--------|---------|------|----------|
| Test channel: | Lowest | Remark: | Peak | Vertical |
|---------------|--------|---------|------|----------|

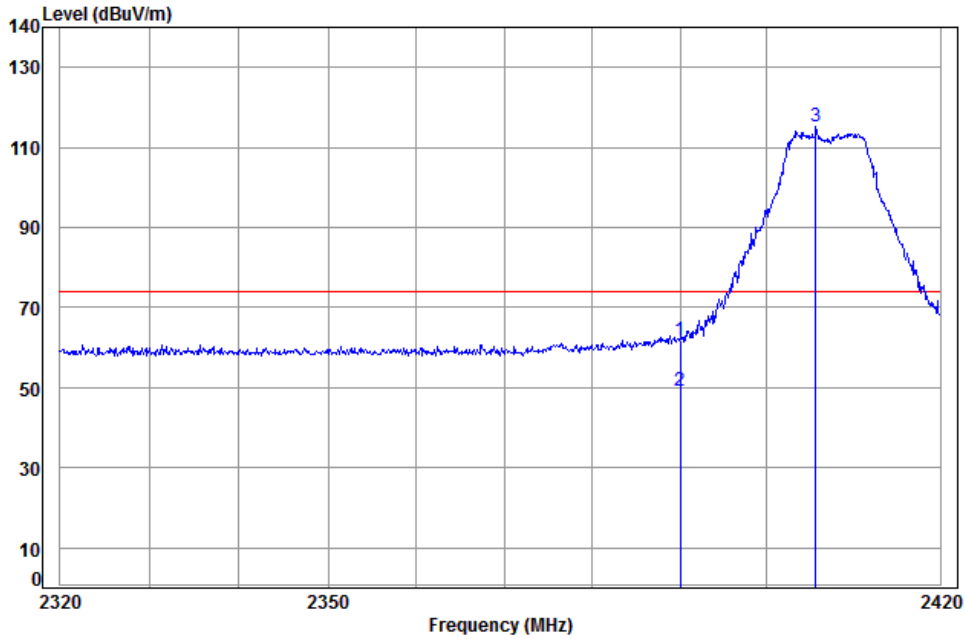

Condition: 3m VERTICAL

Job No: : 9257CR


Mode: : 2407 Band edge

: 8M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Limit Level | Over Limit | Remark |
|---|-------------|------------|------------|---------------|------------|-------------|------------|---------------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2390.000 | 3.33 | 29.08 | 0.00 | 29.39 | 61.80 | 74.00 | -12.20 |
| 2 | av 2390.000 | 3.33 | 29.08 | 0.00 | 16.76 | 49.17 | 54.00 | -4.83 Average |
| 3 | pp 2405.643 | 3.34 | 29.12 | 0.00 | 82.63 | 115.09 | 74.00 | 41.09 |



| | | | | |
|---------------|--------|---------|------|------------|
| Test channel: | Lowest | Remark: | Peak | Horizontal |
|---------------|--------|---------|------|------------|

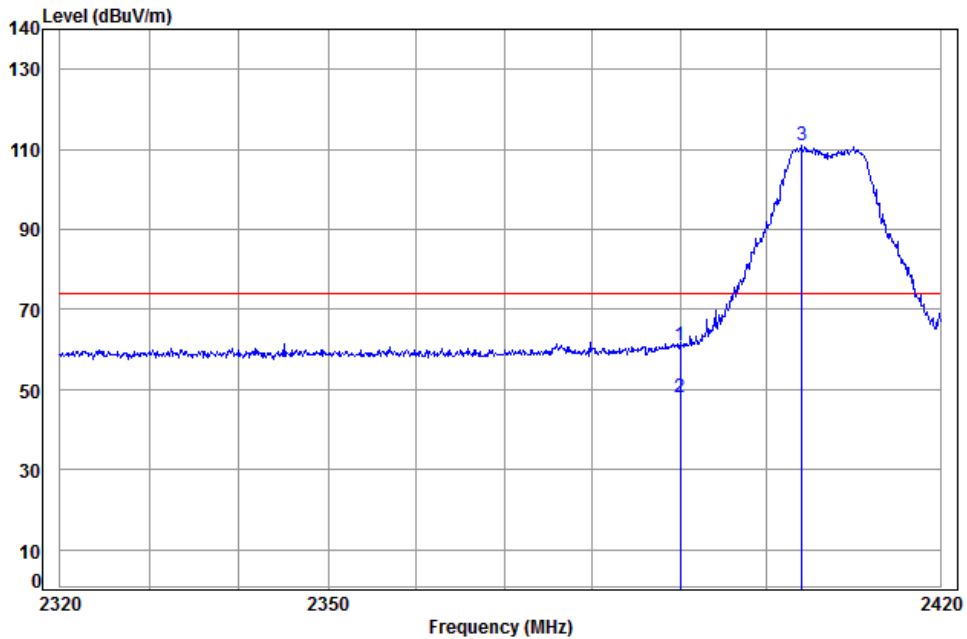


Condition: 3m HORIZONTAL
Job No: : 9257CR
Mode: : 2407 Band edge
: 8M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|-------------|------------|------------|---------------|------------|--------|------------|------------|---------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 2390.000 | 3.33 | 29.08 | 0.00 | 28.73 | 61.14 | 74.00 | -12.86 | |
| 2 | av 2390.000 | 3.33 | 29.08 | 0.00 | 15.59 | 48.00 | 54.00 | -6.00 | Average |
| 3 | pp 2404.019 | 3.34 | 29.12 | 0.00 | 78.46 | 110.92 | 74.00 | 36.92 | |



| | | | | |
|---------------|---------|---------|------|----------|
| Test channel: | Highest | Remark: | Peak | Vertical |
|---------------|---------|---------|------|----------|

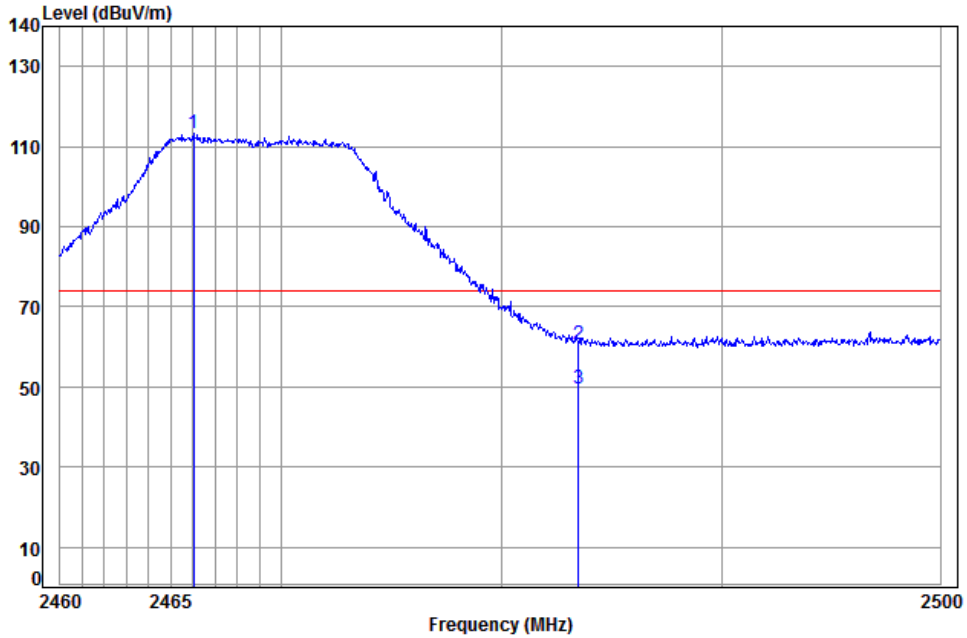

Condition: 3m VERTICAL

Job No: : 9257CR


Mode: : 2469 Band edge

: 8M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|------|----------|------------|------------|---------------|------------|--------|------------|------------|---------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 pp | 2466.039 | 3.39 | 29.30 | 0.00 | 80.74 | 113.43 | 74.00 | 39.43 | |
| 2 | 2483.500 | 3.41 | 29.35 | 0.00 | 28.04 | 60.80 | 74.00 | -13.20 | |
| 3 av | 2483.500 | 3.41 | 29.35 | 0.00 | 16.67 | 49.43 | 54.00 | -4.57 | Average |



| | | | | |
|---------------|---------|---------|------|------------|
| Test channel: | Highest | Remark: | Peak | Horizontal |
|---------------|---------|---------|------|------------|

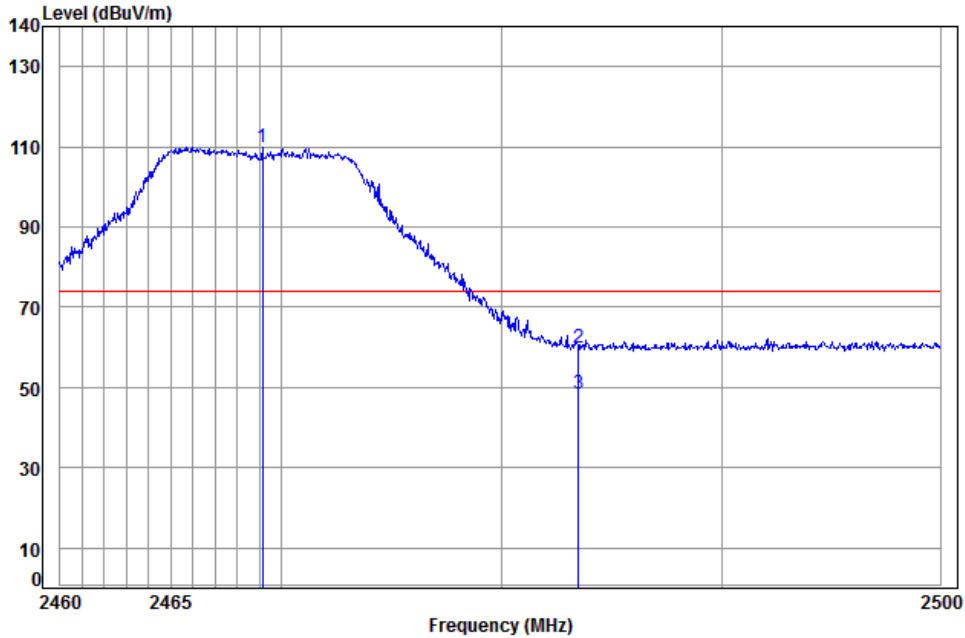

Condition: 3m HORIZONTAL
Job No: : 9257CR
Mode: : 2469 Band edge
: 8M

| | Freq | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level | Limit | Over | Remark |
|---|-------------|------------|------------|---------------|------------|--------|--------|--------|---------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | pp 2469.143 | 3.39 | 29.31 | 0.00 | 77.30 | 110.00 | 74.00 | 36.00 | |
| 2 | 2483.500 | 3.41 | 29.35 | 0.00 | 27.21 | 59.97 | 74.00 | -14.03 | |
| 3 | av 2483.500 | 3.41 | 29.35 | 0.00 | 15.64 | 48.40 | 54.00 | -5.60 | Average |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$


7 Photographs - EUT Test Setup

Test model No.: PEY10

7.1 Radiated Emission



7.2 Radiated Spurious Emission

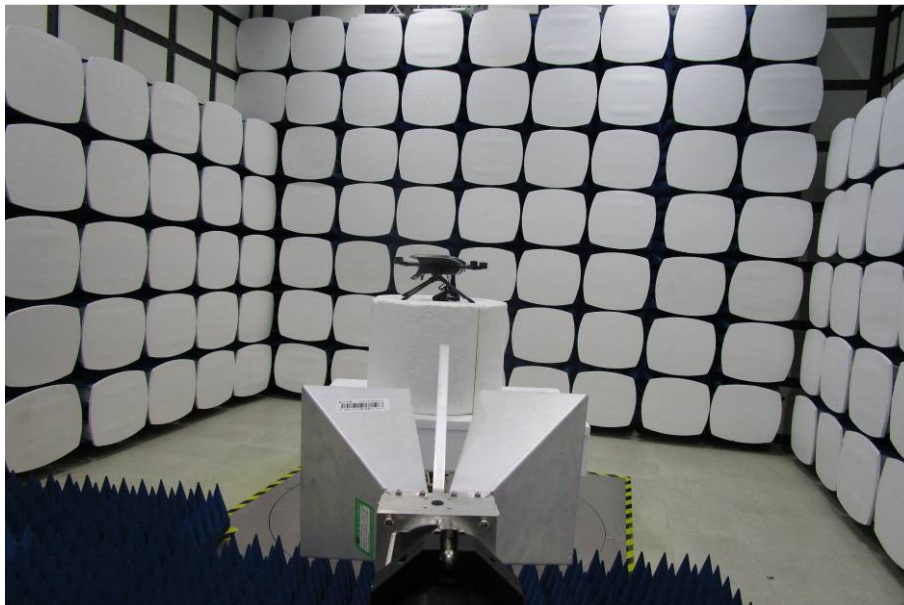

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1610009257CR.