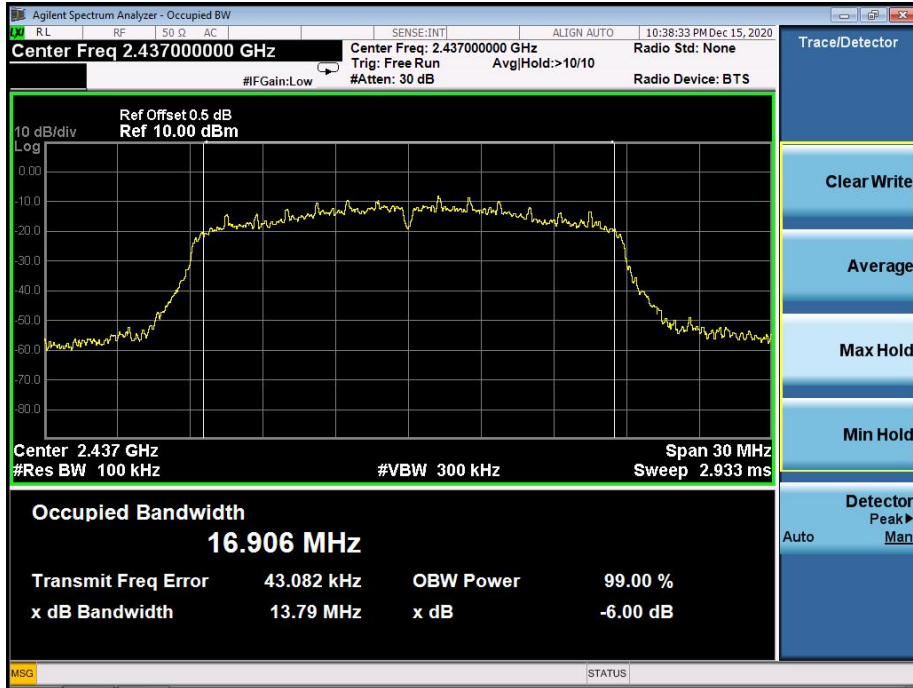
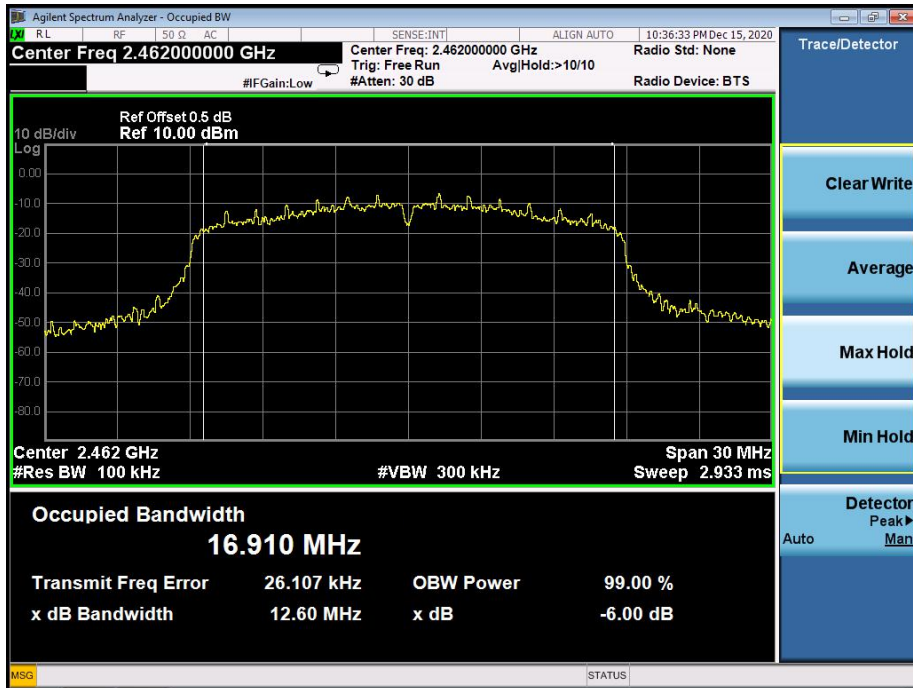
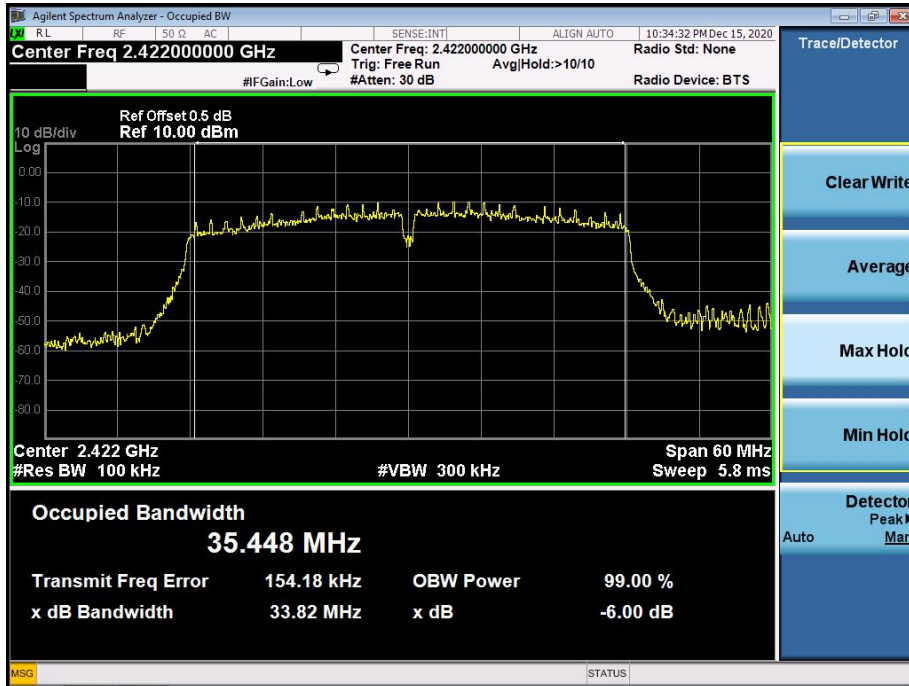




TX CH 06

TX CH 11


Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX n Mode(40M)		

Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
2422	33.82	500	Pass
2437	33.86	500	Pass
2452	33.86	500	Pass

TX CH 03

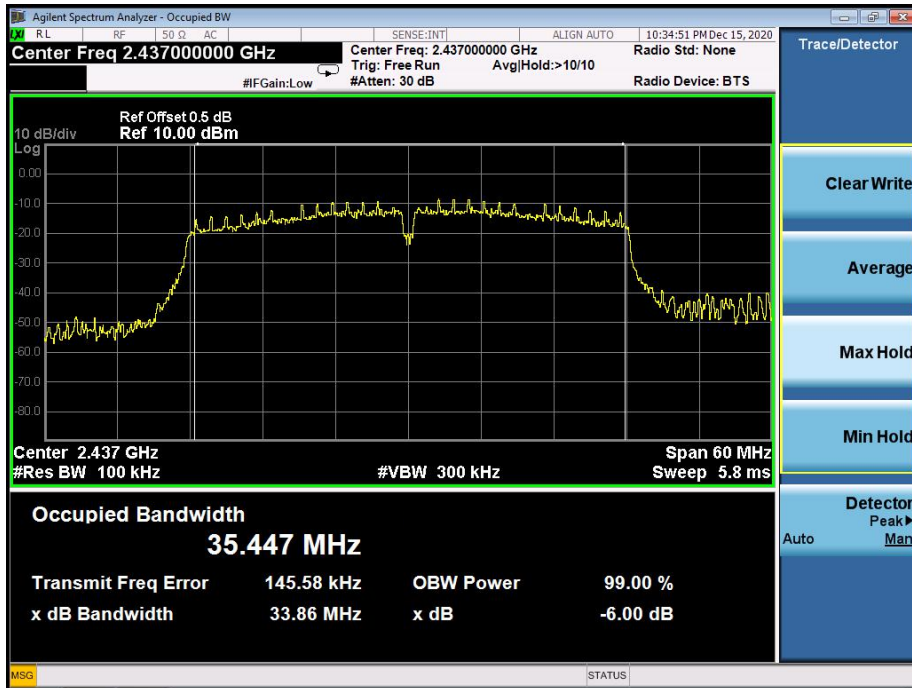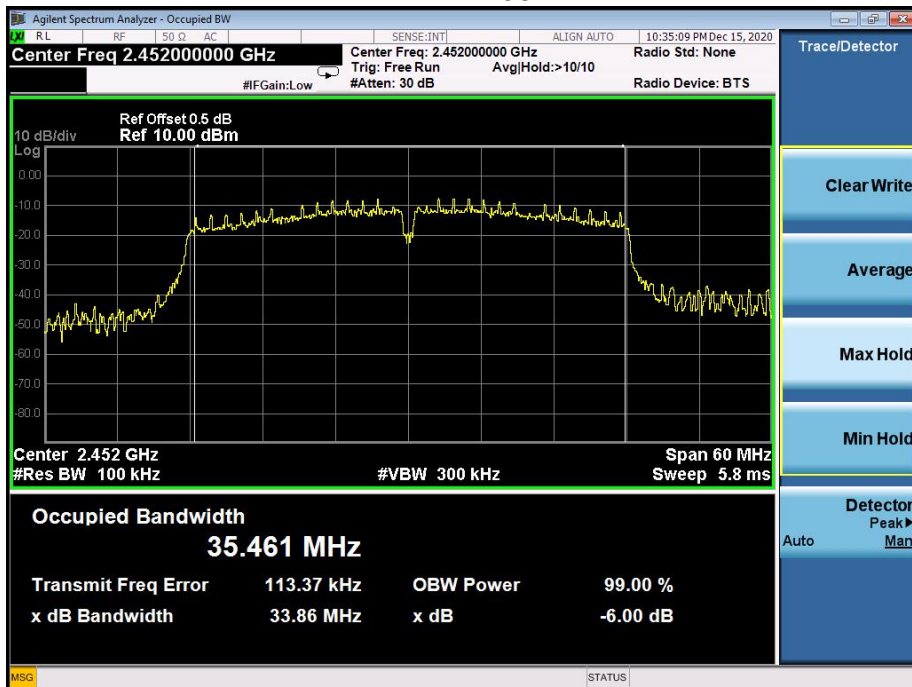

TX CH 06

TX CH 09


11. PEAK OUTPUT POWER TEST

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


11.3 Test procedure

- a. The EUT was directly connected to the Power meter

11.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss

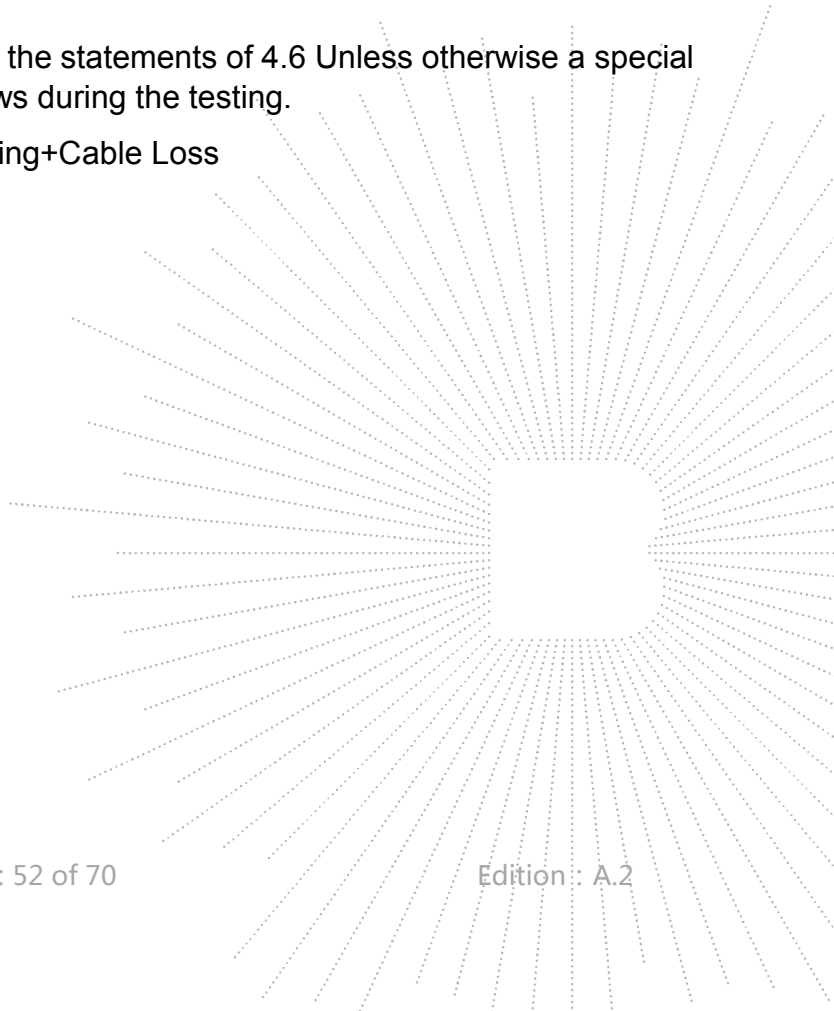

11.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V

	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
802.11b	2412	6.300	30
	2437	7.285	30
	2462	8.467	30
802.11g	2412	4.433	30
	2437	6.395	30
	2462	7.963	30
802.11n20	2412	3.154	30
	2437	4.964	30
	2462	6.509	30
802.11n40	2422	3.297	30
	2437	4.490	30
	2452	5.376	30

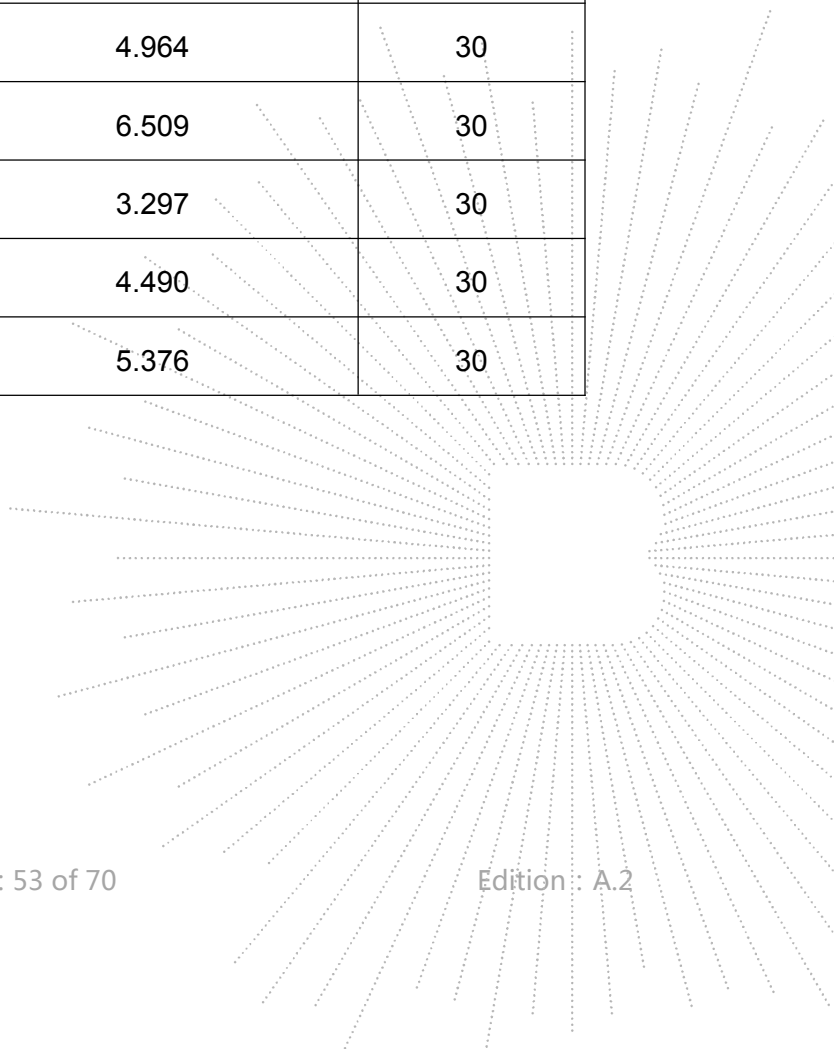

12. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

12.1 Block Diagram Of Test Setup



12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize..

12.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

12.5 Test Result

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V


802.11b: Band Edge, Left Side



802.11b: Band Edge, Right Side




802.11g: Band Edge, Left Side

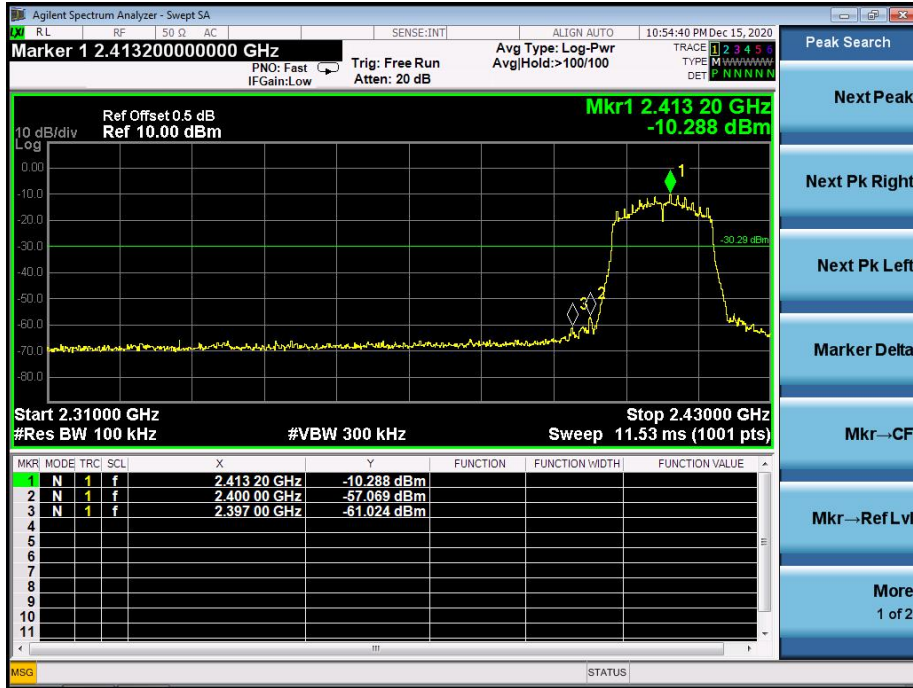


802.11g: Band Edge, Right Side

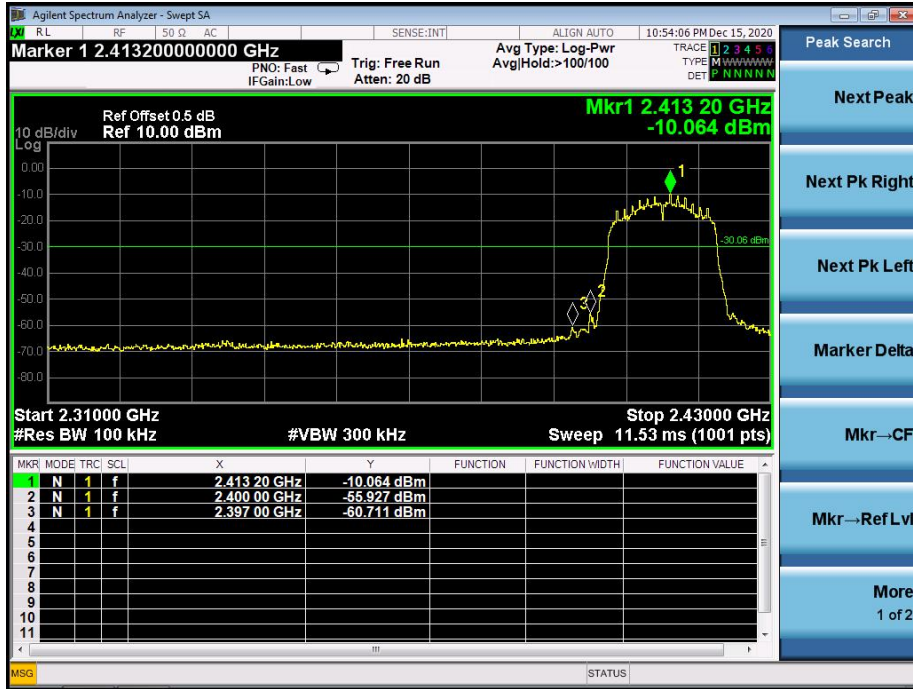


802.11n-HT20: Band Edge, Left Side

802.11n-HT20: Band Edge, Right Side

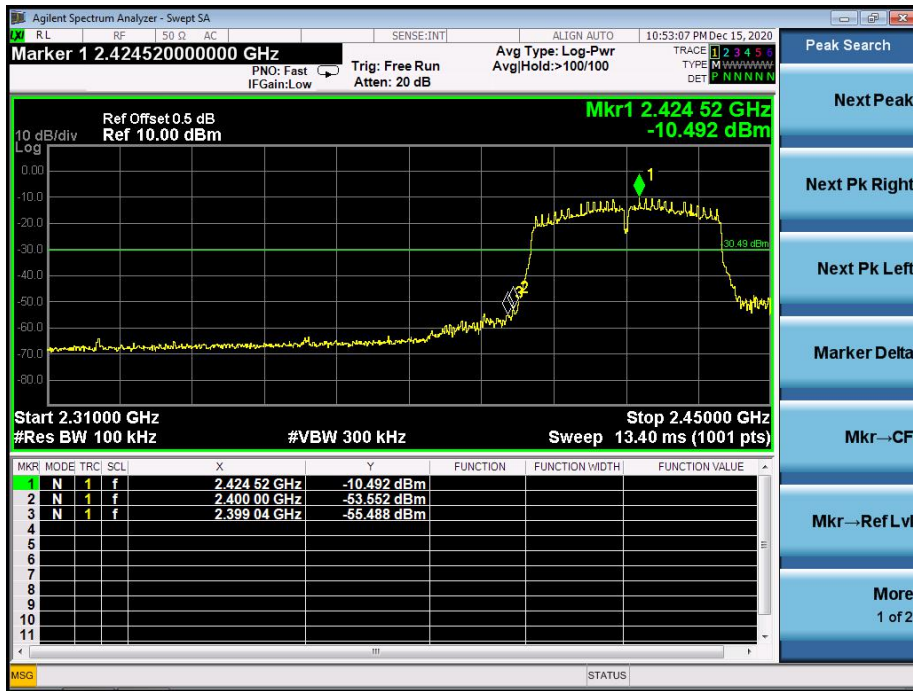
802.11n-HT40: Band Edge, Left Side



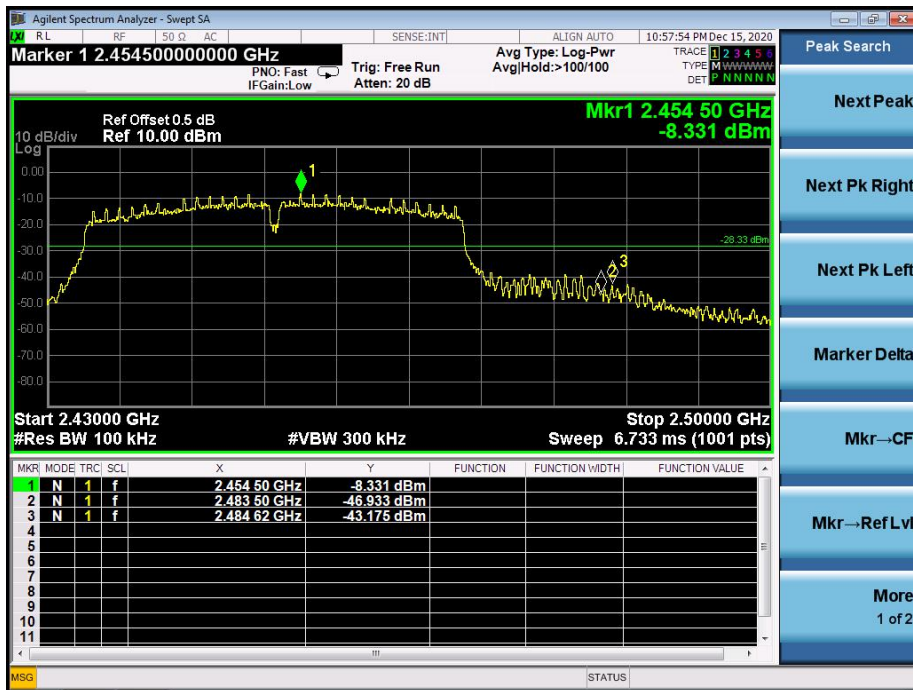


802.11n-HT40: Band Edge, Right Side






CONDUCTED EMISSION MEASUREMENT



802.11b

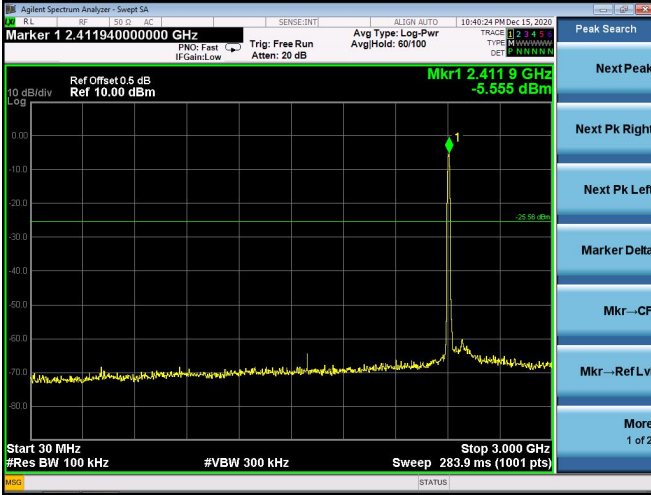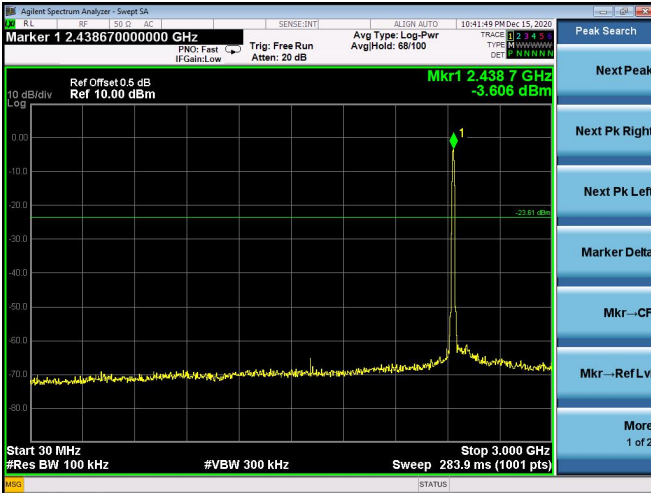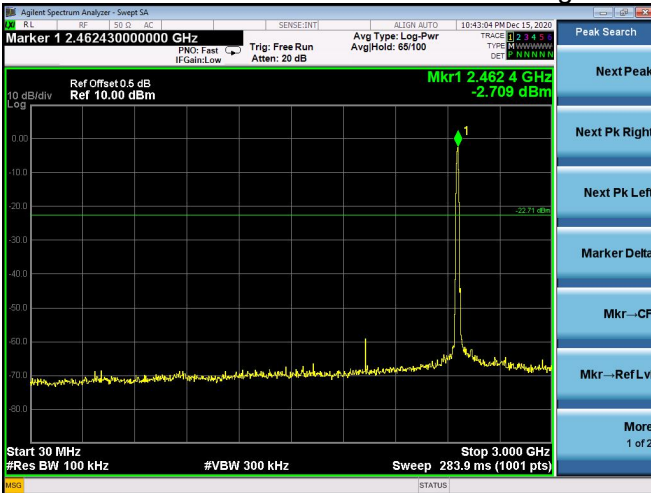Low Channel 2412MHz

Middle Channel 2437MHz

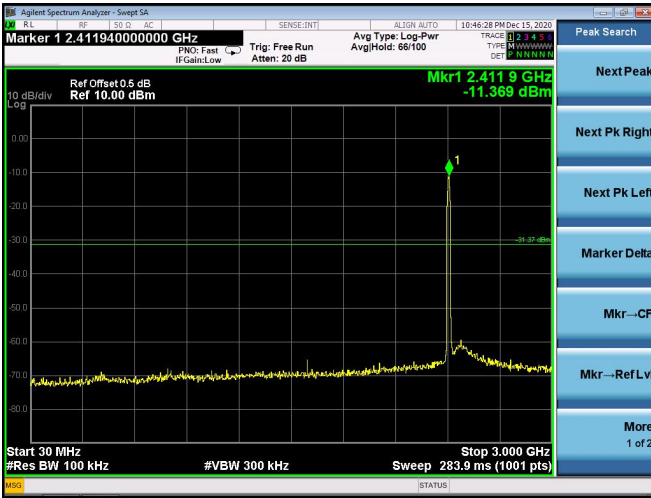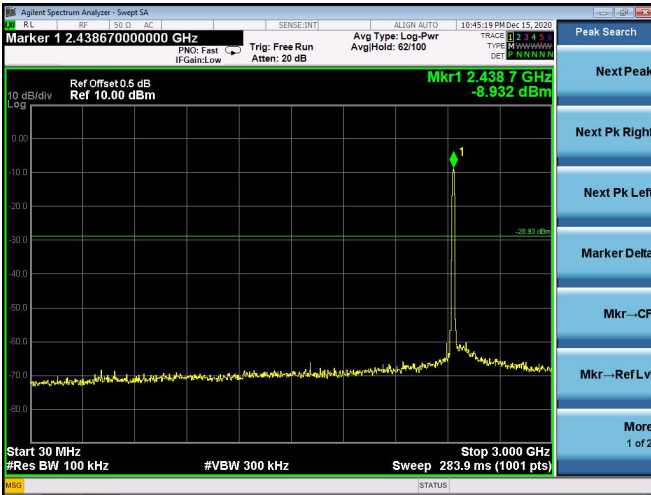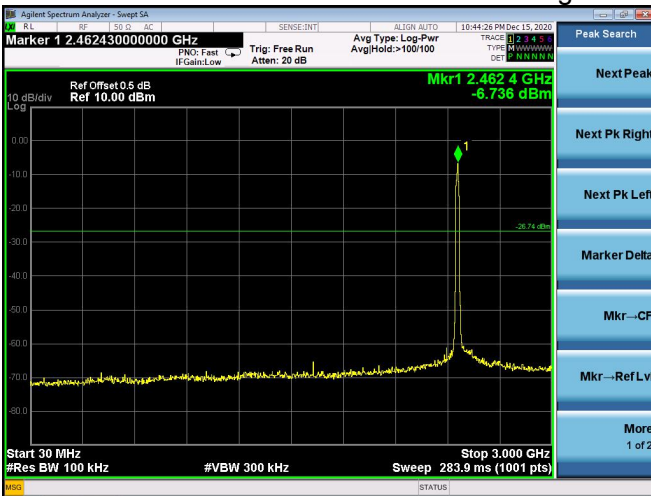High Channel 2462MHz


802.11g

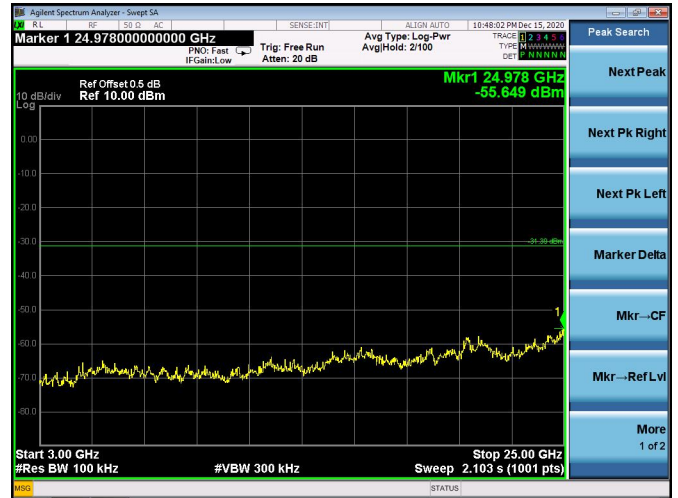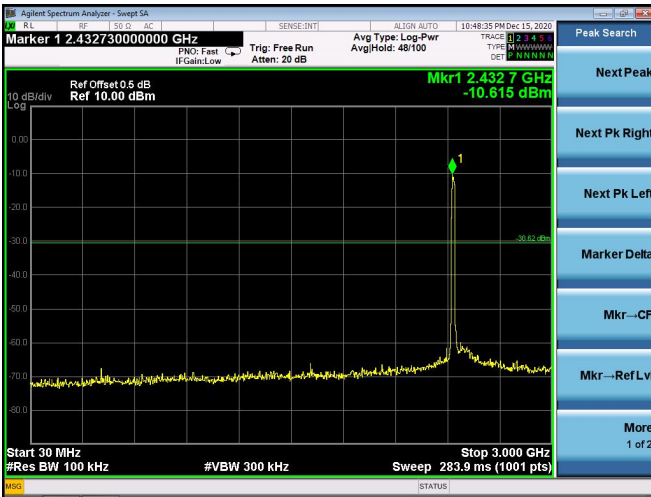Low Channel 2412MHz

Middle Channel 2437MHz

High Channel 2462MHz


802.11n20

Low Channel 2412MHz

Middle Channel 2437MHz

High Channel 2462MHz
