

FCC Test Report

Report No.: AGC00688241004FR01

FCC ID	:	2AKC6-AX916-18
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless USB Adapter
BRAND NAME	:	N/A
MODEL NAME	:	AX916, AX918, 6B32, BT12
APPLICANT	:	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
DATE OF ISSUE	:	Nov. 05, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 05, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	6
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Receiver Input Bandwidth	7
2.6 Equally Average Use of Frequencies and Behaviour	7
2.7 Pseudorandom Frequency Hopping Sequence	
2.8 Special Accessories	9
2.9 Equipment Modifications	
2.10 Antenna Requirement	9
3. Test Environment	
3.1 Address of The Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	11
3.4 Measurement Uncertainty	11
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used in Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. RF Output Power Measurement	
6.1 Provisions Applicable	
6.2 Measurement Procedure	
6.3 Measurement Setup (Block Diagram of Configuration)	
6.4 Measurement Result	
7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Results	
8. Conducted Band Edge and Out-of-Band Emissions	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	



9. Radiated Spurious Emission	51
9.1 Measurement Limit	51
9.2 Measurement Procedure	51
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Number of Hopping Frequency Measurement	64
10.1 Provisions Applicable	64
10.2 Measurement Procedure	64
10.3 Measurement Setup (Block Diagram of Configuration)	64
10.4 Measurement Result	64
11. Time of Occupancy (Dwell Time) Measurement	
11.1 Provisions Applicable	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. Frequency Separation Measurement	70
12.1 Provisions Applicable	70
12.2 Measurement Procedure	70
12.3 Measurement Setup (Block Diagram of Configuration)	
12.4 Measurement Result	70
13. AC Power Line Conducted Emission Test	72
13.1 Measurement Limit	72
13.2 Measurement Setup (Block Diagram of Configuration)	72
13.3 Preliminary Procedure of Line Conducted Emission Test	73
13.4 Final Procedure of Line Conducted Emission Test	
13.5 Measurement Results	74
Appendix I: Photographs of Test Setup	76
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
Address	3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Manufacturer	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
Address	3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Factory	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD
Address	3Floor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Product Designation	Wireless USB Adapter
Brand Name	N/A
Test Model	AX916
Series Model	AX918, 6B32, BT12
Declaration of Difference	Only different model name and shape of appearance
Date of receipt of test item	Oct. 15, 2024
Date of Test	Oct. 15, 2024~ Nov. 05, 2024
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-BR_EDR-V1
	·

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By

XCI Li

Cici Li (Project Engineer)

Nov. 05, 2024

Reviewed By

Calvin Liu (Reviewer)

Nov. 05, 2024

Approved By

Max Zrang

Max Zhang (Authorized Officer)

Nov. 05, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BR 🖾 GFSK, EDR 🖾 π /4-DQPSK, 🖾 8DPSK
Number of channels	79 Channels
Channel Separation	1 MHz
Maximum Transmitter Power	2.754dBm
Hardware Version	V2.0
Software Version	V1.2
Antenna Designation	PCB antenna
Antenna Gain	-0.376dBi
Power Supply	DC 5V by PC

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2403 MHz
	:	:
2400~2483.5MHz	39	2441MHz
	:	:
	77	2479 MHz
	78	2480 MHz
Note: f = 2402 + 1k MHz, k =	0, …, 78 ; "f "is the operating frequency	(MHz); "k" is the operating channel.



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2AKC6-AX916-18**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title	
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations	
2	2 FCC 47 CFR Part 15 Radio Frequency Devices		
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices	
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules	

2.5 Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.6 Equally Average Use of Frequencies and Behaviour.

The generation of the hopping sequence in connection mode depends essentially on two input values:

1. LAP/UAP of the master of the connection.

2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30).

In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:


The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.



2.7 Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 1 = 511 bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of The PRBS Sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

44	35	78	03	20	76	02	19		21	64	75
								1	1		
			li						:		
						; ;			i i		
				i		<u></u>		1	i		

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



2.8 Special Accessories

Not available for this EUT intended for grant.

2.9 Equipment Modifications

Not available for this EUT intended for grant.

2.10 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -0.376dBi.



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 5V

3.4 Measurement Uncertainty

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 List of Equipment Used

• R	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31		
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20		
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
\square	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23		
\square	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27		
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04		
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30		
\square	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23		
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23		
\square	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22		
\square	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08		

• A	AC Power Line Conducted Emission								
Used	Used Equipment No. Test Equipment Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD) (YY-MM-D								
\boxtimes	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
\boxtimes	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
\boxtimes	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		



• Te:	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
\boxtimes	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
\boxtimes	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0			
\boxtimes	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
\boxtimes	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



4.System Test Configuration

4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Huawei Notebook PC	Huawei	D15		
2	Huawei Notebook Adapter	Huawei	HW-200325CP0	Input:100-240V 50/60Hz,1.8A Output:5V2A/9V2A/12V2A/15V3A/20V3.25A	2.2m,unshielded

Test Accessories Come From The Manufacturer

No.	Equipment	Manufacturer	Model No.	odel No. Specification Information	
1					
2					

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	20 dB Bandwidth	Pass
4	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
5	§15.209	Radiated Spurious Emission	Pass
6	§15.247 (a)(1)(iii)	Number of Hopping Frequency	Pass
7	§15.247 (a)(1)(iii)	Time of Occupancy	Pass
8	§15.247 (a)(1)	Frequency Separation	Pass
9	§15.207	AC Power Line Conducted Emission	Pass



5. Description of Test Modes

	Summary table of Test Cases					
Test	Data Rate / Modulation					
Test Item	Bluetooth – BR_EDR (GFSK/π /4-DQPSK/8DPSK)					
Radiated & Conducted Test Cases	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps (PC powered) Mode 2: Bluetooth Tx CH39_2441 MHz_1Mbps (PC powered) Mode 3: Bluetooth Tx CH78_2480 MHz_1Mbps (PC powered) Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps (PC powered) Mode 5: Bluetooth Tx CH39_2441 MHz_2Mbps (PC powered) Mode 6: Bluetooth Tx CH78_2480 MHz_2Mbps (PC powered) Mode 6: Bluetooth Tx CH78_2480 MHz_3Mbps (PC powered) Mode 7: Bluetooth Tx CH39_2441 MHz_3Mbps (PC powered) Mode 8: Bluetooth Tx CH39_2441 MHz_3Mbps (PC powered) Mode 9: Bluetooth Tx CH39_2441 MHz_3Mbps (PC powered) Mode 9: Bluetooth Tx CH78_2480 MHz_3Mbps (PC powered) Mode 10: Bluetooth Tx Hopping-1Mbps (PC powered) Mode11: Bluetooth Tx Hopping-2Mbps (PC powered) Mode12: Bluetooth Tx Hopping-3Mbps (PC powered)					
AC Conducted Emission	Mode 1: Bluetooth Link + PC+ Charging Cable (Charging from AC Adapter)					
 For Radiated Emissic For Conducted Test n arc arc	<pre>> set_mode 1 e:BLE > set_chidx 39 chidx:39 > set_pkt 42 pkt 0x42 LE 2M > set_pent 255 len 255 > set_len 255 > set_addr 0A 1C 6B C6 96 7E or: BLE invalid addr mand fail > settxpwr 4 txpwr_lvl:0x4F > settx 1 1 _test_start: s:28,28 1,27,2 ></pre>					



6. RF Output Power Measurement

6.1 Provisions Applicable

The maximum out power permissible output power is 1 Watt for all frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels.

The maximum out power permissible output power is 0.125 watts for all other frequency hopping systems in the 2400-2483.5 MHz band.

6.2 Measurement Procedure

⊠For Peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW \geq RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power test:

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required


6.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

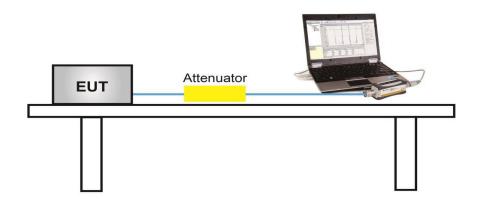




For peak power test setup

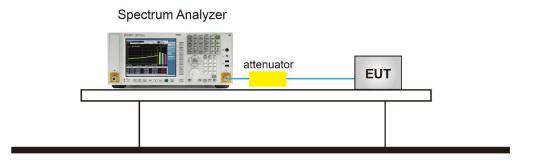

6.4 Measurement Result


Test Data of Conducted Output Power							
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2402	2.754	≤21	Pass			
GFSK	2441	2.165	≤21	Pass			
	2480	1.839	≤21	Pass			
	2402	2.031	≤21	Pass			
π /4-DQPSK	2441	1.441	≤21	Pass			
	2480	1.122	≤21	Pass			
	2402	2.219	≤21	Pass			
8DPSK	2441	1.642	≤21	Pass			
	2480	1.360	≪21	Pass			



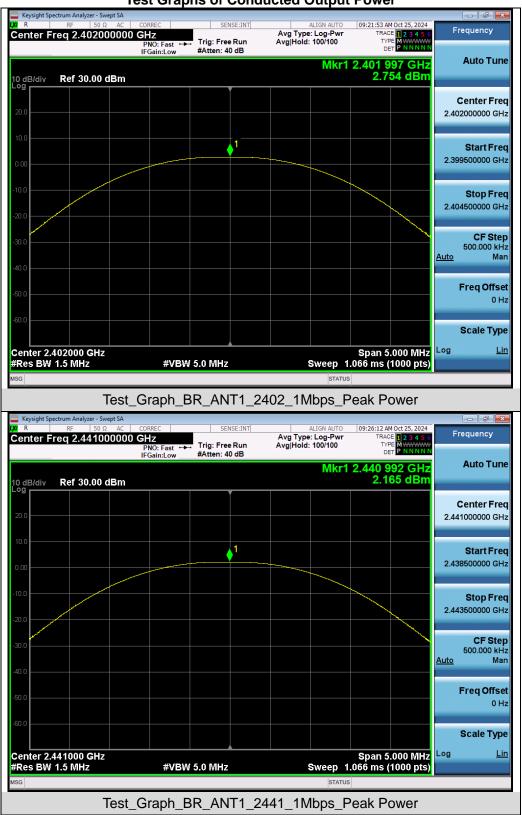

Test Graphs of Conducted Output Power




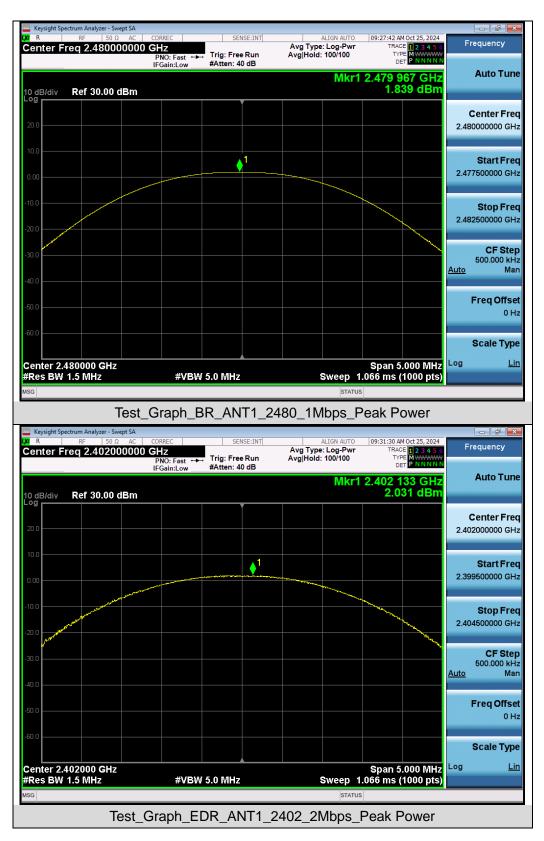








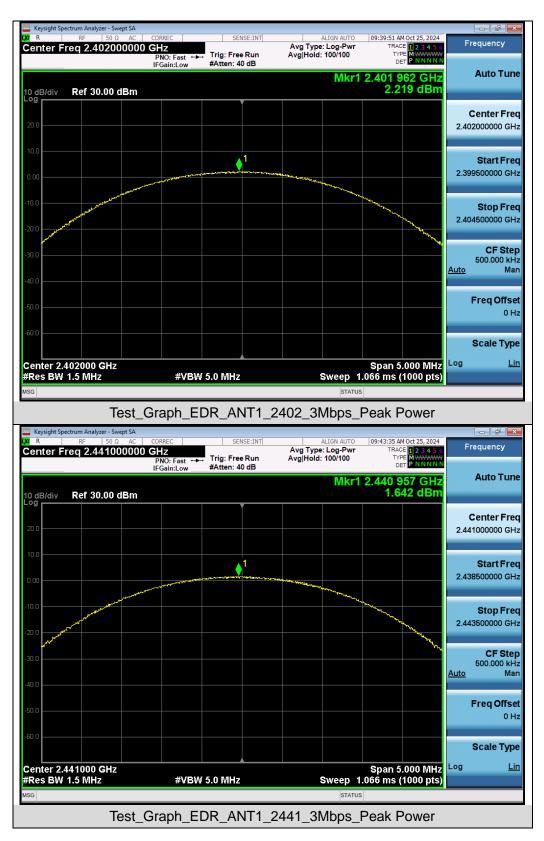



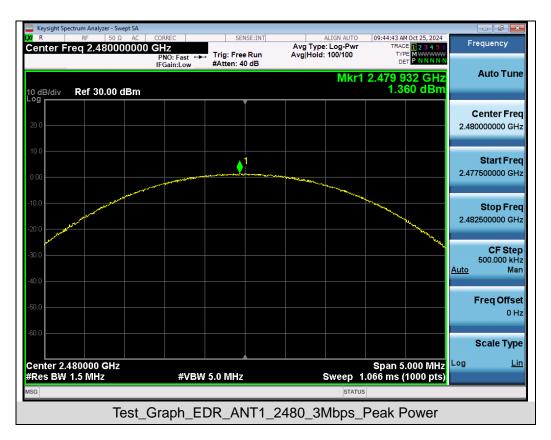



7. 20dB Bandwidth and 99% Occupied Bandwidth Measurement

7.1 Provisions Applicable


There is no corresponding limit requirement for this test item.

7.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 6.9.2 (20dB BW).

- The 20dB bandwidth spectrum analyzer setting reference is as follows:
- 1. Set RBW \geq 1% to 5% of the 20dB bandwidth
- 2. VBW = Approximately three times RBW
- 3. Span = Approximately 2 to 5 times the 20dB bandwidth, centered on a hopping channel
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace to stabilize
- 8. Measure the maximum width of the emission that is constrained by the frequencies associated
- 9. with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20
- 10. dB relative to the maximum level in the fundamental emission.
- The 99% bandwidth spectrum analyzer setting reference is as follows:
- 1. Span = 1.5 times to 5 times the OBW
- 2. Set RBW = 1% to 5% the OBW
- 3. VBW \geq 3 × RBW
- 4. Detector = Peak
- 5. Trace mode = Max hold
- 6. Sweep = Auto couple
- 7. Allow the trace was allowed to stabilize

7.3 Measurement Setup (Block Diagram of Configuration)

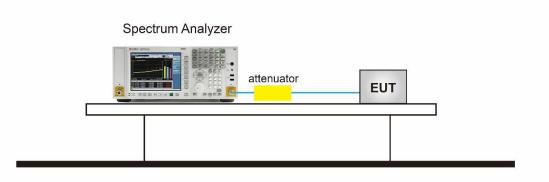





7.4 Measurement Results

Test Data of Occupied Bandwidth and -20dB Bandwidth								
Test Mode	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail			
	2402	0.861	0.947	N/A	Pass			
GFSK	2441	0.846	0.948	N/A	Pass			
	2480	0.845	0.948	N/A	Pass			
	2402	1.184	1.323	N/A	Pass			
π /4-DQPSK	2441	1.186	1.324	N/A	Pass			
	2480	1.186	1.323	N/A	Pass			
	2402	1.184	1.315	N/A	Pass			
8DPSK	2441	1.187	1.310	N/A	Pass			
	2480	1.191	1.313	N/A	Pass			


Test Graphs of Occupied Bandwidth and -20 Bandwidth

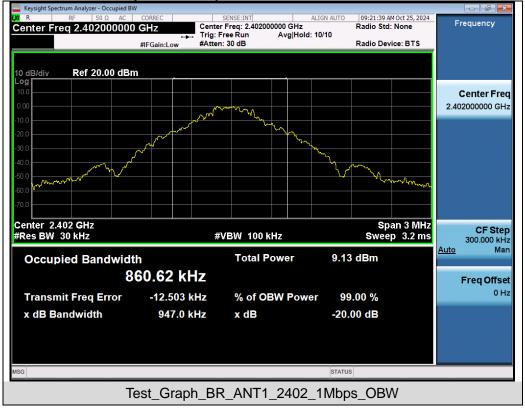




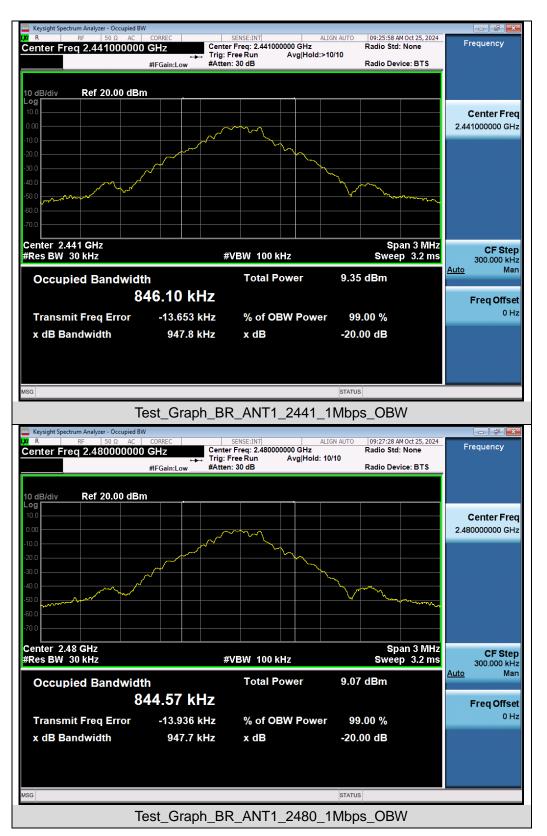




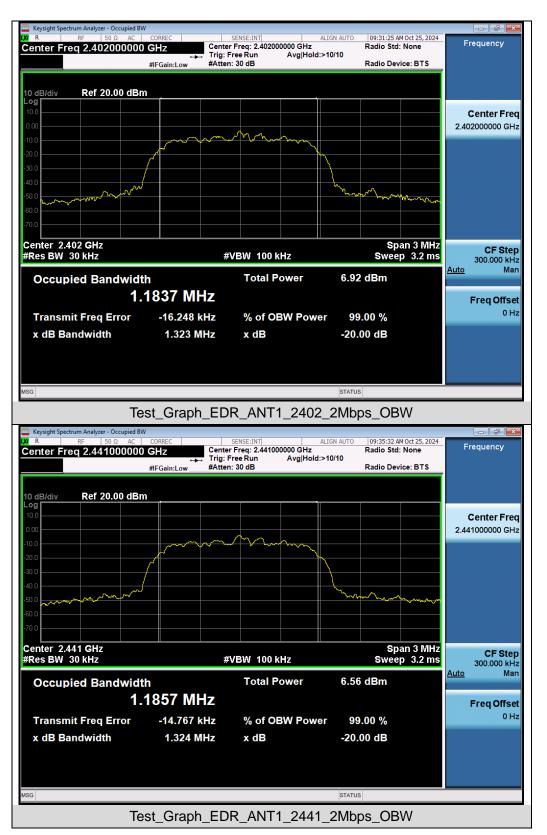



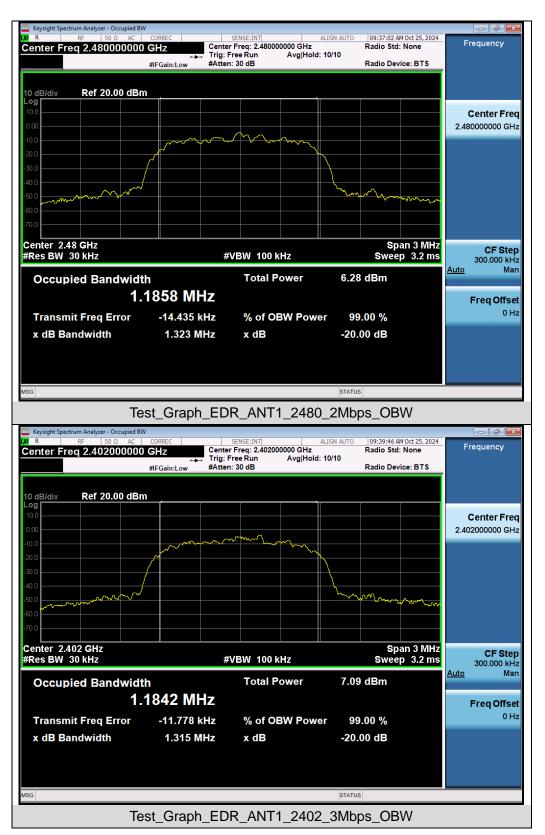



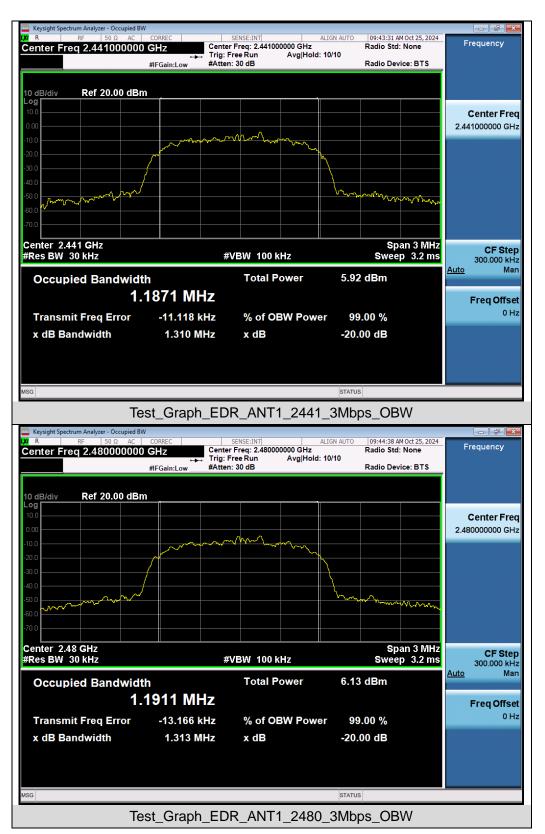



8. Conducted Band Edge and Out-of-Band Emissions

8.1 Provisions Applicable


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.10.4 and 7.8.8:


- Reference level measurement
- 1. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission.
- Emission level measurement
- 1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Sweep time = Auto couple
- 6. Trace mode = Max hold
- 7. Trace was allowed to stabilize
- 8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

8.3 Measurement Setup (Block Diagram of Configuration)

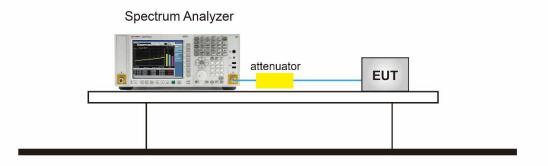




8.4 Measurement Results

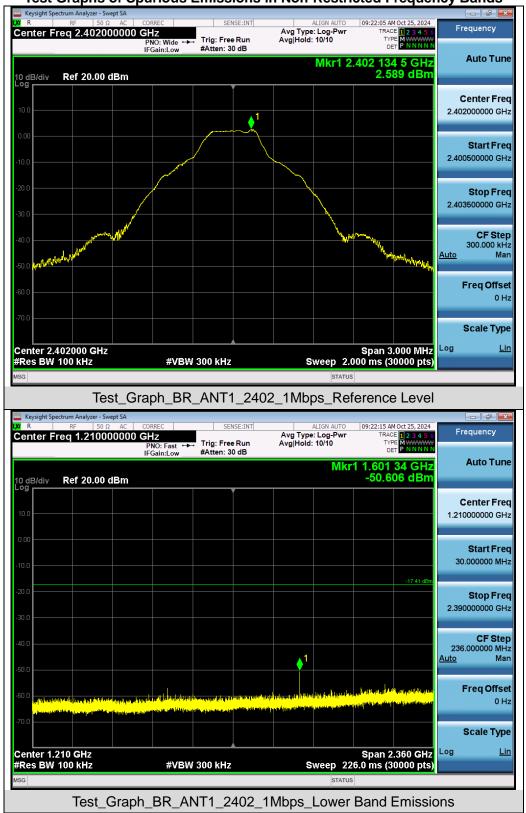


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




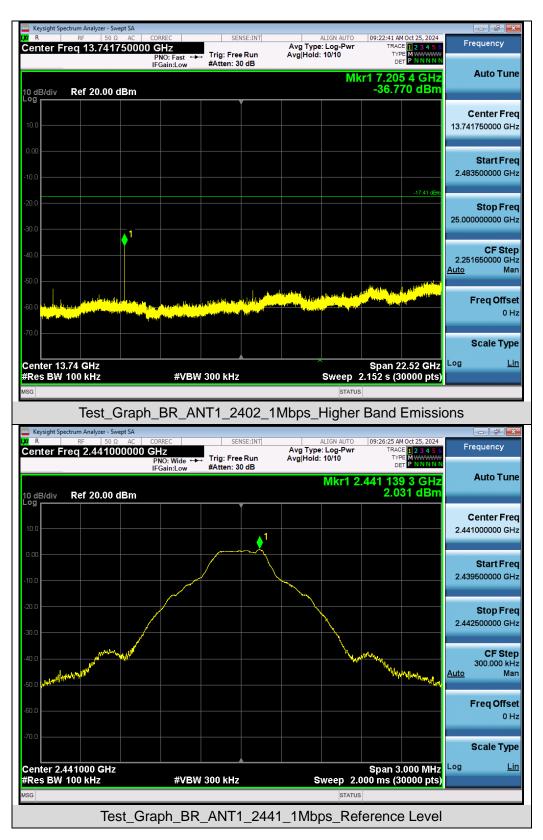




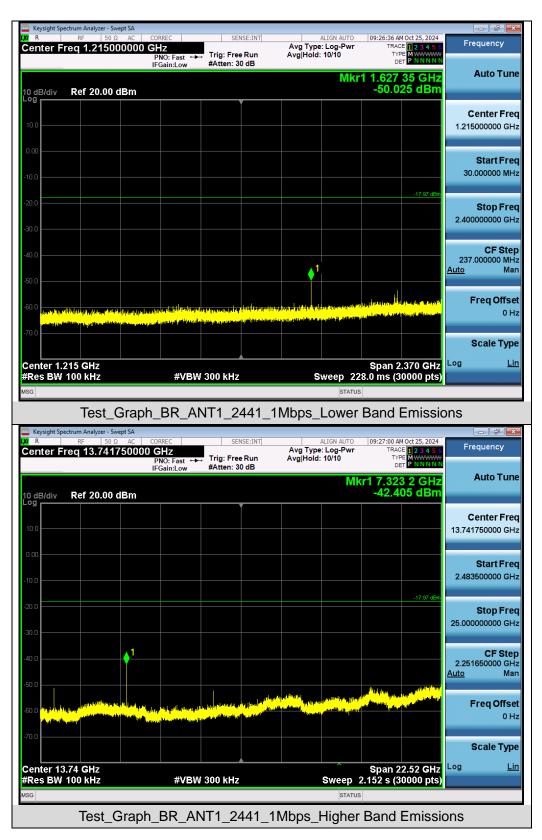




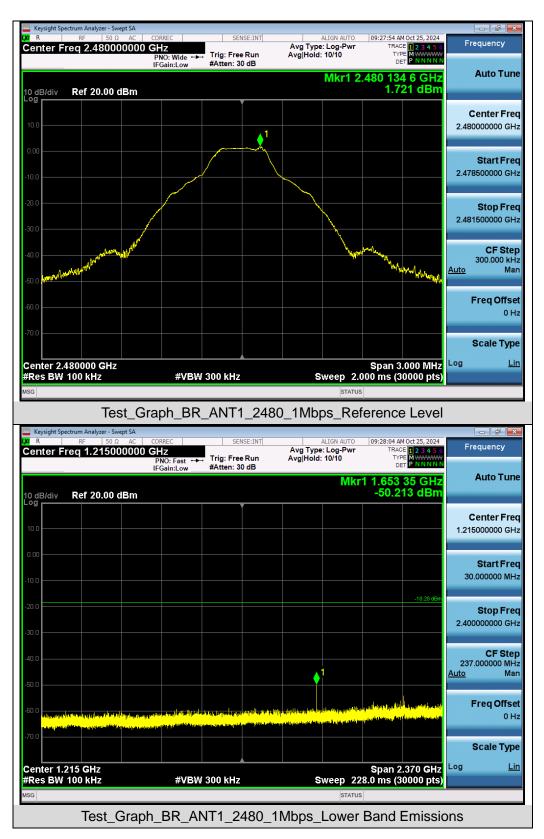




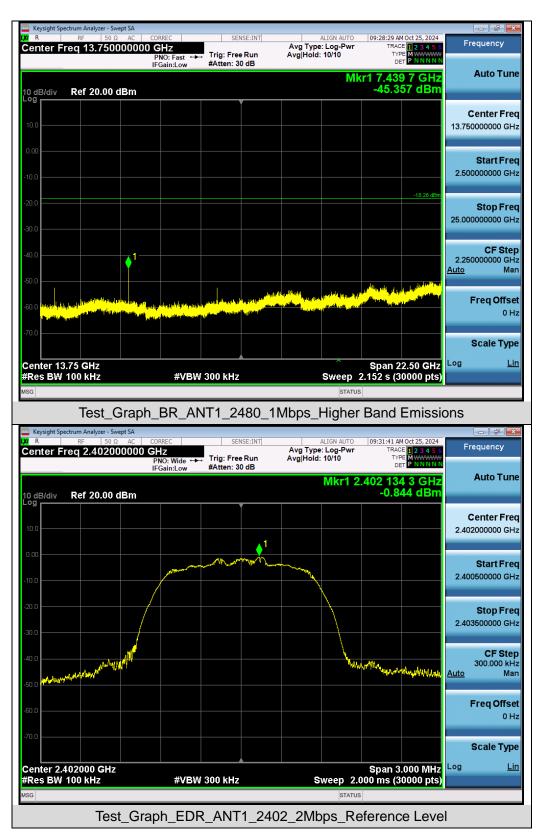




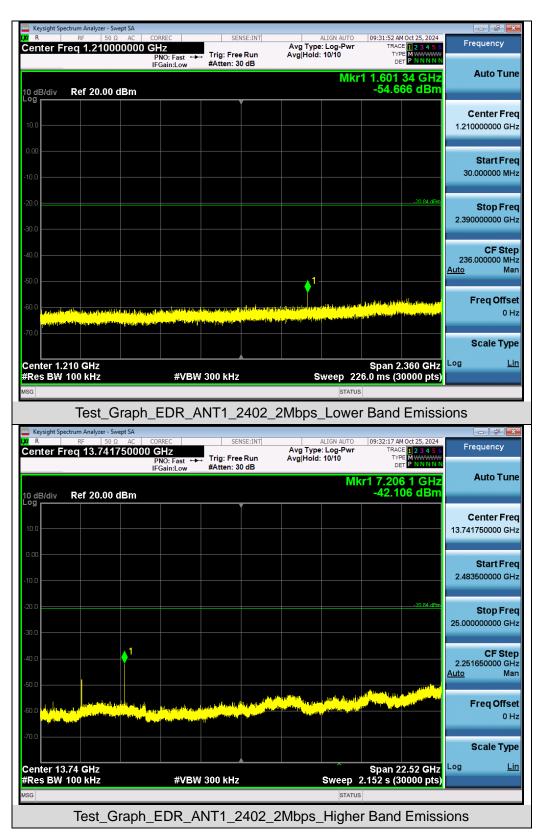




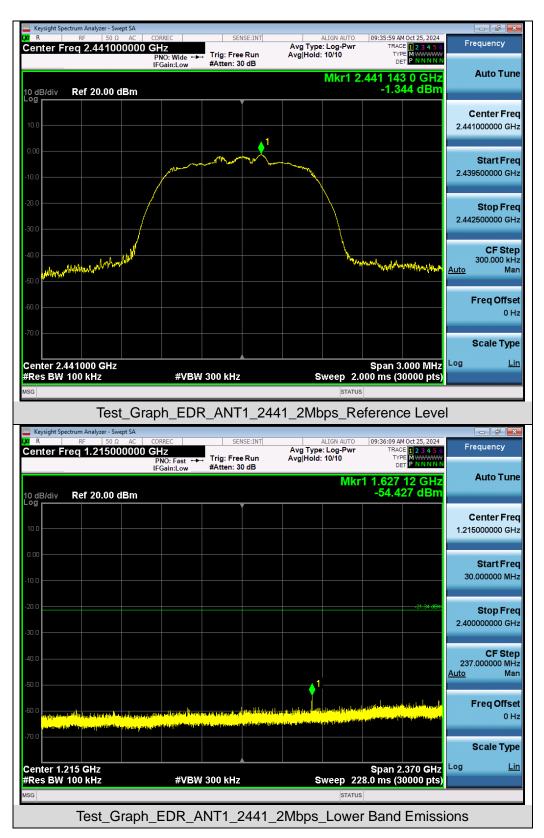




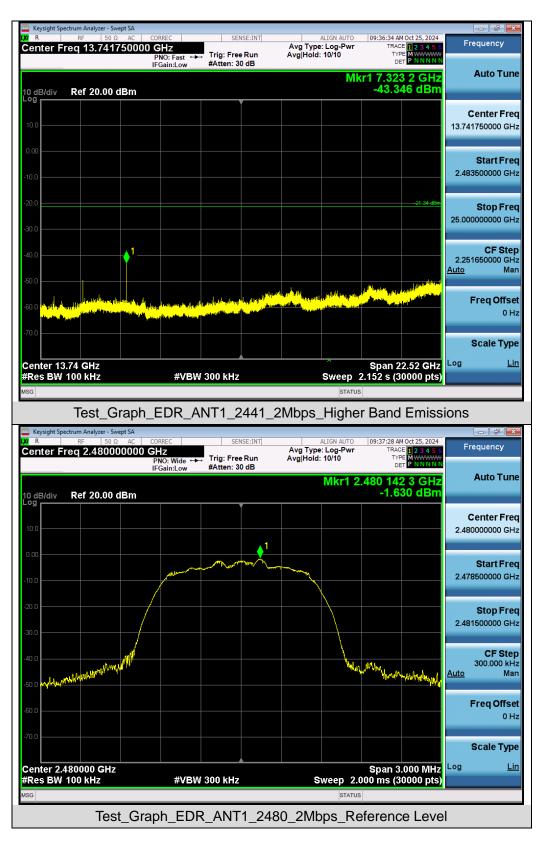




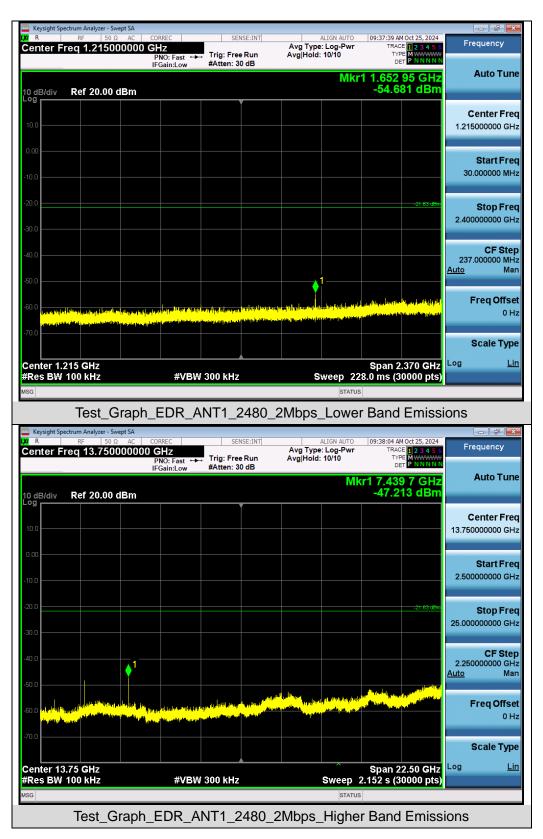




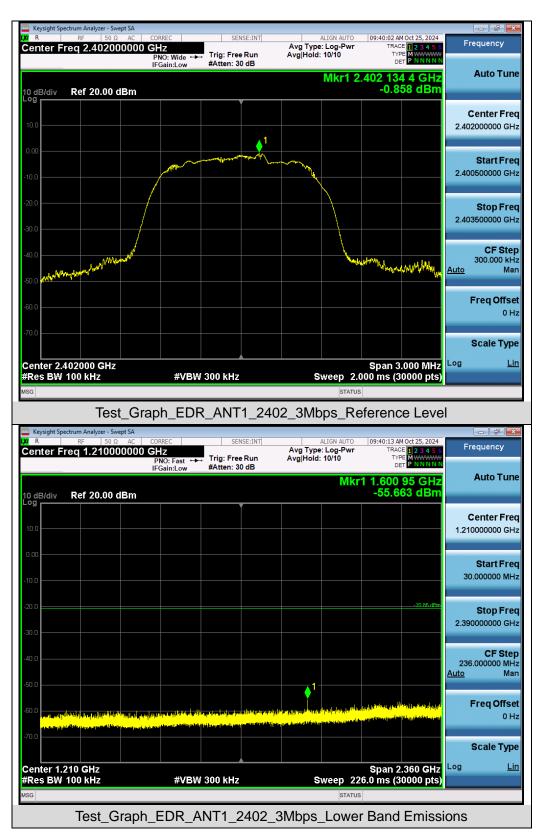



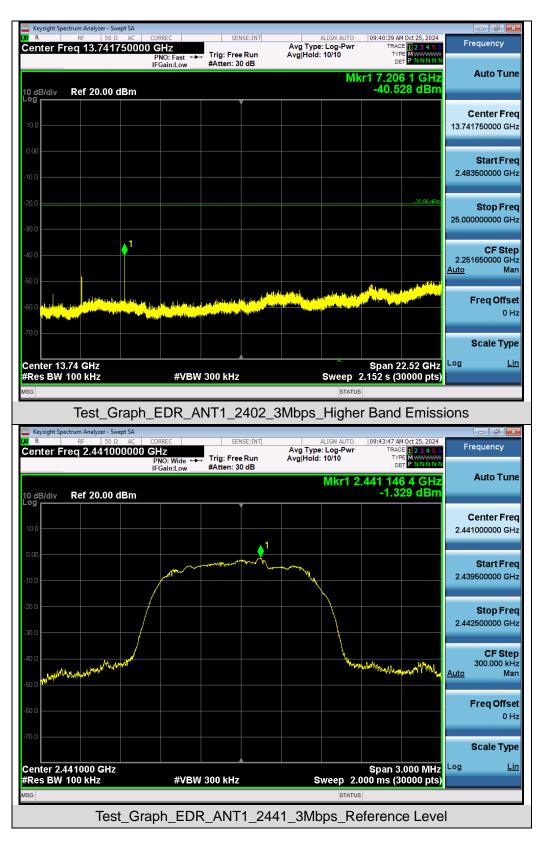




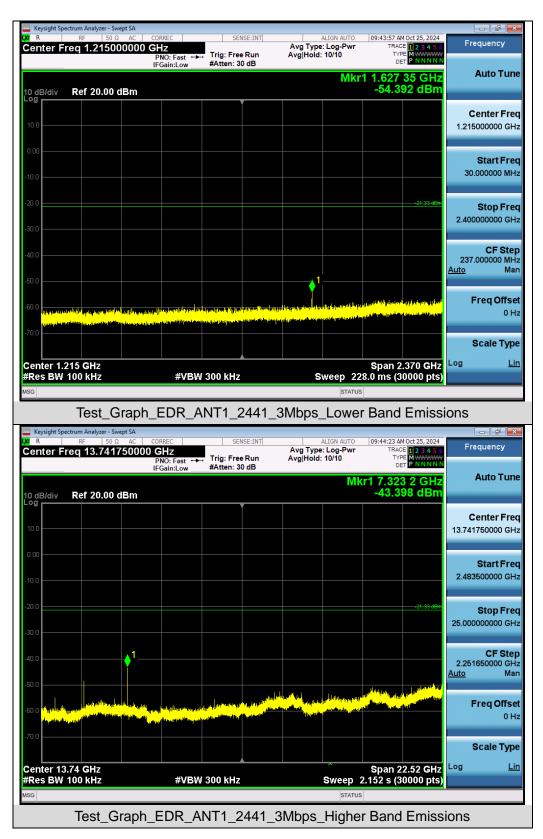








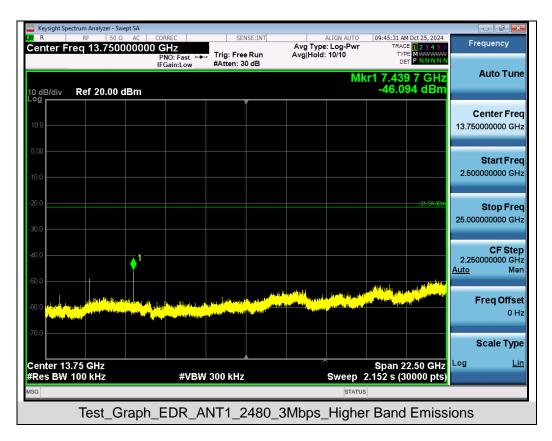




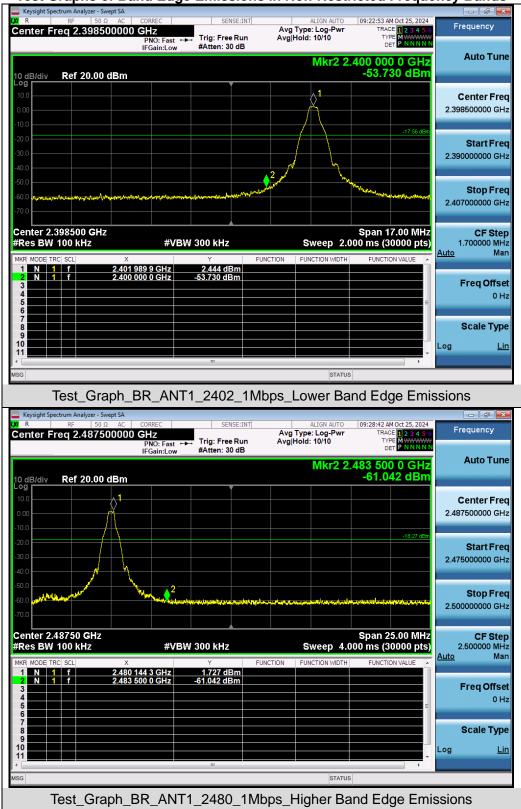


Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands




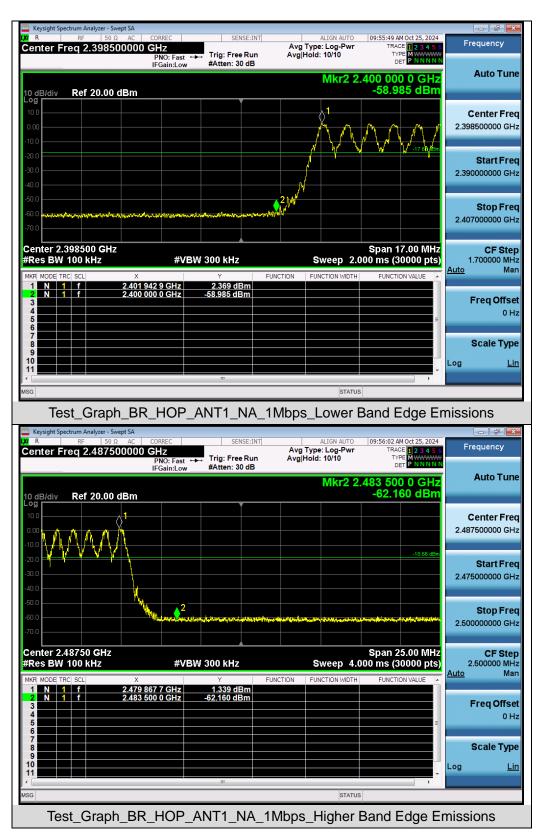




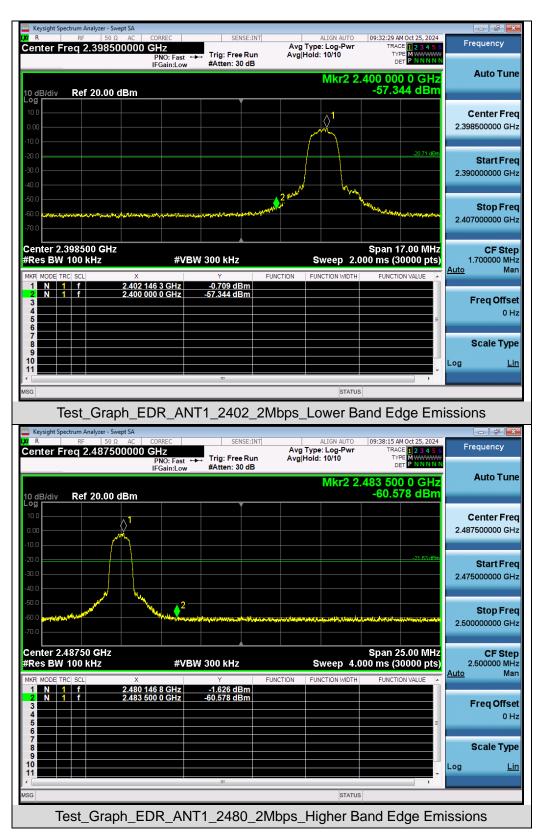




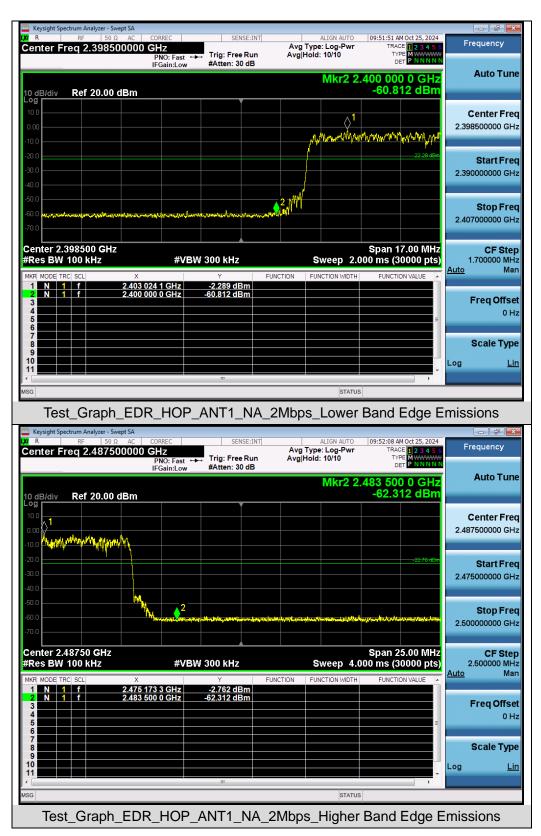



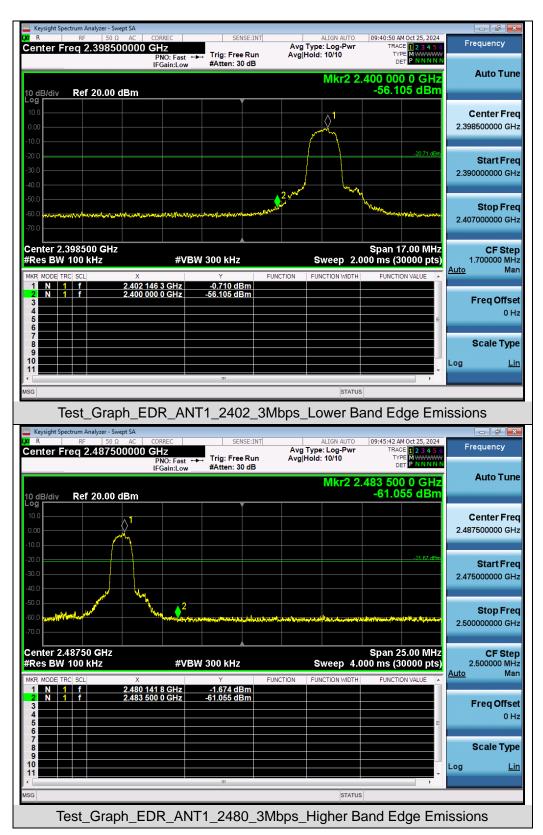



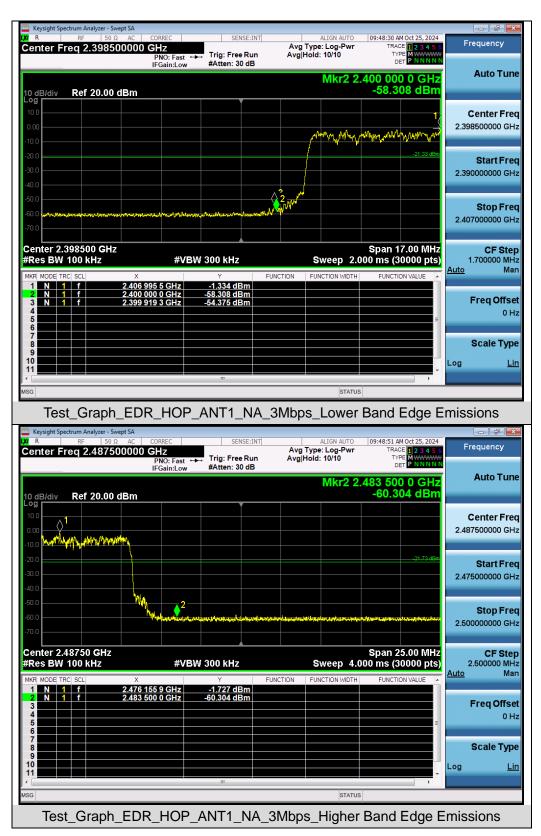



9. Radiated Spurious Emission

9.1 Measurement Limit

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

9.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average



absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz
Start ~Stop Trequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize

<u>Average Measurements above 1GHz</u>


- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW \geq [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




9.3 Measurement Setup (Block Diagram of Configuration)

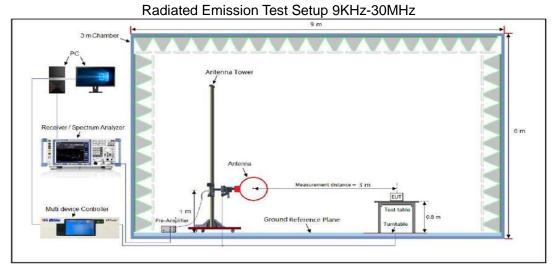

Radiated Emission Test Setup 30MHz-1000MHz

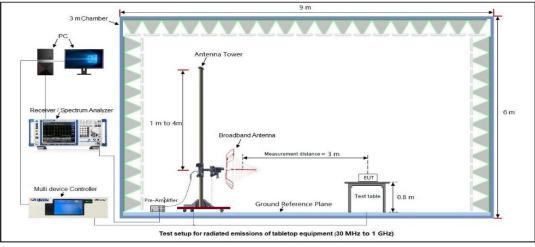

Radiated Emission Test Setup Above 1000MHz

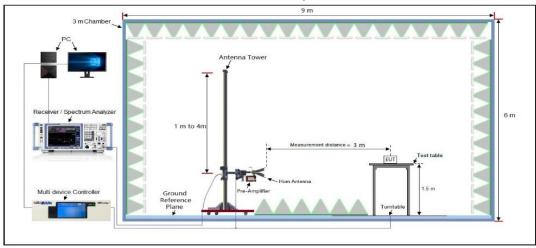

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



9.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Radia	ted Emiss	ion Test Res	ults at 30MHz	z-1GHz		
EUT N	lame	Wire	eless USB Ada	pter		Model Na	Model Name AX916		
Tempe	erature	22.8	3°C			Relative H	Relative Humidity 57.9 %		
Press	ure	960	hPa			Test Volta	ige	Normal Vo	oltage
Test N	lode	Мос	le 1			Antenna	Polarity	Horizontal	
	100				FCC Part 15	c			
	130 120								
	110								
	100 90								
	80								
	[W/\/180 [mi/\/180 [g] 60 50								
	90 even 50								
	40								
	30			~		man manual	Werterfor where where the state of the state	- Aller	
	10	Ť			~~~	and the second s			
	-10								
	30M	·		100M	Frequency[H	7]			1G
	-	— QP Limi			i requerey[r	-1			
		# QP Dete	ctor						
Final [Data List								
NO.	Frec [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	61.0	4	25.74	17.54	40.00	14.26	100	358	Horizontal
2	158.0)4	25.63	17.69	43.50	17.87	100	342	Horizontal
3	240.4	19	24.30	15.92	46.00	21.70	100	69	Horizontal
4	460.6	68	30.78	24.60	46.00	15.22	100	276	Horizontal
5	615.8	38	33.27	25.47	46.00	12.73	100	359	Horizontal
							1		



			Radia	ted Emiss	ion Test Res	ults at 30MHz	z-1GHz			
	lame	Wireless USB Adapter			Model Na	me	AX916			
Temp	erature	22.8°C			Relative H	Relative Humidity				
Press	ure	960hl	Pa			Test Volta	ige	Normal Voltage		
Test N	lode	Mode	9 1			Antenna	Polarity	Vertical		
	130				FCC Part 150					
	120									
	100									
	90 80									
	[W/\71 [W/\71 [Q] 60 50									
	ق 50 40							8.		
	30			*				man and make with all wall	Two	
	20				mmmmm m	mon Marken with with w	Mary Mary Mary Mary			
	10 0									
	-10 30M			100M					1G	
					Frequency[Hz	:]				
	-	QP Limit QP Detecto	Vertical PK							
Final I	Data List									
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	66.8	6	25.38	15.66	40.00	14.62	100	3	Vertical	
2	105.6	6	27.65	16.78	43.50	15.85	100	89	Vertical	
3	288.0)2	26.66	12.62	46.00	19.34	100	328	Vertical	
4	457.7	7	31.36	24.14	46.00	14.64	100	178	Vertical	
5	620.7	'3	33.49	25.82	46.00	12.51	100	144	Vertical	
6	860.3	32	37.94	30.00	46.00	8.06	100	328	Vertical	

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 1 is the worst case and recorded in the report.



EUT Name Wireless USB			SB Adapter	Model Name		AX916 57.9 %		
Temperature 22.8 °C			Relative Humidity					
Pressure	Pressure 960hPa				Test V	oltage	Normal Voltage	
Test Mode		Mode 1			Anten	na Polarity	Horizontal	
Frequency	Met	er Reading	Factor	Emissio	n Level	Limits	Margin	Value Type
(MHz)		(dBµV)	(dB)	(dBµ\	√/m)	(dBµV/m)	(dB)	
4804.000		46.85	0.08	46.9	93	74	-27.07	peak
4804.000		37.22	0.08	37.3	30	54	-16.70	AVG
7206.000		41.04	2.21	43.2	25	74	-30.75	peak
7206.000	<u> </u>	32.19	2.21	34.4	40	54	-19.60	AVG
Factor = Anter		1		ampillier.				
EUT Name		Wireless U	SB Adapter		Model Name		AX916	
Temperature		22.8 ℃			Relative Humidity		57.9 %	
		960hPa Test Voltage Normal Voltage			•			
Pressure		960hPa			Test V	oltage	Normal Vo	ltage
		960hPa Mode 1				oltage na Polarity	Normal Vo Vertical	ltage
	Meta		Factor	Emissio	Anten			
Test Mode	Met	Mode 1	Factor (dB)	Emissio (dBµ\	Anten	na Polarity	Vertical	
Test Mode Frequency	Met	Mode 1			Anten n Level V/m)	na Polarity Limits	Vertical Margin	
Test Mode Frequency (MHz)	Met	Mode 1 er Reading (dBµV)	(dB)	(dBµ\	Anten n Level V/m) 48	Limits (dBµV/m)	Vertical Margin (dB)	- Value Type
Test Mode Frequency (MHz) 4804.000	Met	Mode 1 er Reading (dBµV) 46.40	(dB) 0.08	(dBµ\ 46.4	Anten n Level V/m) 48 48	Limits (dBµV/m) 74	Vertical Margin (dB) -27.52	– Value Type peak
Test Mode Frequency (MHz) 4804.000 4804.000	Met	Mode 1 er Reading (dBµV) 46.40 37.40	(dB) 0.08 0.08	(dBµ\ 46.4 37.4	Anten n Level V/m) 48 48 58	Limits (dBµV/m) 74 54	Vertical Margin (dB) -27.52 -16.52	– Value Type peak AVG
Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	Met	Mode 1 er Reading (dBµV) 46.40 37.40 41.37	(dB) 0.08 0.08 2.21	(dBµ) 46.4 37.4 43.5	Anten n Level V/m) 48 48 58	Limits (dBµV/m) 74 54 74	Vertical Margin (dB) -27.52 -16.52 -30.42	Value Type peak AVG peak

Radiated Emissions Test Results Above 1GHz

RESULT: Pass



Radiated Emissions Test Results for Above 1GHz

4882.000 37.85 0.08 37.93 54 -16.07 AV 7323.000 41.81 2.21 44.02 74 -29.98 per 7323.000 32.85 2.21 35.06 54 -18.94 AV Remark:	EUT Name Wireless USB Adapter			Model	Name	AX916				
Test Mode Mode 2 Antenna Polarity Horizontal Frequency Meter Reading Factor Emission Level Limits Margin Value (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value 4882.000 46.20 0.08 46.28 74 -27.72 period 4882.000 37.85 0.08 37.93 54 -16.07 AV 7323.000 41.81 2.21 44.02 74 -29.98 period 7323.000 32.85 2.21 35.06 54 -18.94 AV EUT Name Wireless USB Adapter Model Name AX916 Temperature 22.8°C Relative Humidity 57.9 % Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 2 Antenna Polarity Vertical Érequency Meter Reading Factor Emission Level Limits Margin Value (MHz) (dBµV) (dB	Temperature22.		22.8 ℃			Relative Humidity		57.9 %	57.9 %	
Frequency Meter Reading Factor Emission Level Limits Margin Value (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value 4882.000 46.20 0.08 46.28 74 -27.72 per 4882.000 37.85 0.08 37.93 54 -16.07 AV 7323.000 41.81 2.21 44.02 74 -29.98 per 7323.000 32.85 2.21 35.06 54 -18.94 AV Eurona Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. AX916 Temperature 22.8°C Relative Humidity 57.9 % Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 2 Antenna Polarity Vertical (MHz) (dBµV) (dB) (dBµV/m) (dB) <t< th=""><th>Pressure</th><th colspan="2">e 960hPa Test Voltage Normal Volta</th><th>ltage</th></t<>	Pressure	e 960hPa Test Voltage Normal Volta		ltage						
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (value) 4882.000 46.20 0.08 46.28 74 -27.72 pead 4882.000 37.85 0.08 37.93 54 -16.07 AV 7323.000 41.81 2.21 44.02 74 -29.98 pead 7323.000 32.85 2.21 35.06 54 -18.94 AV Remark:	Test Mode	Ν	/lode 2			Anten	na Polarity	Horizontal		
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (dBµV/m) (dB) (dB) </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>										
(MH2) (dBµV) (dB) (dBµVm) (dBµVm) (dBµVm) (dB) 4882.000 46.20 0.08 46.28 74 -27.72 pea 4882.000 37.85 0.08 37.93 54 -16.07 AV 7323.000 41.81 2.21 44.02 74 -29.98 pea 7323.000 32.85 2.21 35.06 54 -18.94 AV Remark:	Frequency	Meter	Reading	Factor	Emissic	n Level	Limits	Margin		
4882.000 37.85 0.08 37.93 54 -16.07 AV 7323.000 41.81 2.21 44.02 74 -29.98 pea 7323.000 32.85 2.21 35.06 54 -18.94 AV Remark:	(MHz)	(d	BμV)	(dB)	(dBµ'	V/m)	(dBµV/m)	(dB)	value Type	
Total of the second	4882.000	40	6.20	0.08	46.	28	74	-27.72	peak	
7323.000 32.85 2.21 35.06 54 -18.94 AV Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Model Name AX916 EUT Name Wireless USB Adapter Model Name AX916 Temperature 22.8°C Relative Humidity 57.9 % Pressure 960hPa Test Voltage Normal Voltage Frequency Meter Reading Factor Emission Level Limits Margin Value (MHz) (dBµV) (dB) (dBµV/m) (dB) Value 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 pear 7323.000 32.47 2.21 34.68 54 -19.32 AV	4882.000	3	7.85	0.08	37.	93	54	-16.07	AVG	
Image: Second	7323.000	4	1.81	2.21	44.	02	74	-29.98	peak	
Factor = Antenna Factor + Cable Loss – Pre-amplifier. Model Name AX916 EUT Name Wireless USB Adapter Model Name AX916 Temperature 22.8 °C Relative Humidity 57.9 % Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 2 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value KMHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 pear 7323.000 32.47 2.21 34.68 54 -19.32 AV	7323.000	32	2.85	2.21	35.	06	54	-18.94	AVG	
Factor = Antenna Factor + Cable Loss – Pre-amplifier.EUT NameWireless USB AdapterModel NameAX916Temperature22.8°CRelative Humidity57.9 %Pressure960hPaTest VoltageNormal VoltageTest ModeMode 2Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMargin(MHz)(dBµV)(dB)(dBµV/m)(dB)Value4882.00046.570.0846.6574-27.35pead4882.00037.750.0837.8354-16.17AV7323.00041.072.2143.2874-30.72pead7323.00032.472.2134.6854-19.32AV										
EUT NameWireless USB AdapterModel NameAX916Temperature22.8°CRelative Humidity57.9 %Pressure960hPaTest VoltageNormal VoltageTest ModeMode 2Antenna PolarityVerticalFrequencyMeter ReadingFactorEmission LevelLimitsMarginValue(MHz)(dBµV)(dB)(dBµV/m)(dB)Value4882.00046.570.0846.6574-27.35pead4882.00037.750.0837.8354-16.17AV7323.00041.072.2143.2874-30.72pead7323.00032.472.2134.6854-19.32AV	Remark:									
Pressure 960hPa Test Voltage Normal Voltage Test Mode Mode 2 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value (MHz) (dBµV) (dB) (dBµV/m) (dB) Value 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 peac 7323.000 32.47 2.21 34.68 54 -19.32 AV	EUT Name	V	Vireless U	SB Adapter		Model	Name	AX916		
Test Mode Mode 2 Antenna Polarity Vertical Frequency Meter Reading Factor Emission Level Limits Margin Value (MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) Value 4882.000 46.57 0.08 46.65 74 -27.35 peace 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 peace 7323.000 32.47 2.21 34.68 54 -19.32 AV	Temperature	2	2.8℃			Relative Humidity 57.9 %				
Frequency Meter Reading Factor Emission Level Limits Margin Value (MHz) (dBμV) (dB) (dBμV/m) (dBμV/m) (dB) Value 4882.000 46.57 0.08 46.65 74 -27.35 pea 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 pea 7323.000 32.47 2.21 34.68 54 -19.32 AV	Pressure	9	60hPa			Test V	oltage	Normal Vo	ltage	
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (dBµV/m) (dB) (dBµV/m) (dB) (dB) 4882.000 46.57 0.08 46.65 74 -27.35 pea 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 pea 7323.000 32.47 2.21 34.68 54 -19.32 AV	Test Mode	Ν	/lode 2			Anten	na Polarity	Vertical		
(MHz) (dBµV) (dB) (dBµV/m) (dBµV/m) (dB) (dBµV/m) (dB) 4882.000 46.57 0.08 46.65 74 -27.35 pea 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 pea 7323.000 32.47 2.21 34.68 54 -19.32 AV	Frequency	Motor	Reading	Factor	Emissic		Limite	Margin		
4882.000 46.57 0.08 46.65 74 -27.35 pea 4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 pea 7323.000 32.47 2.21 34.68 54 -19.32 AV			-					-	Value Type	
4882.000 37.75 0.08 37.83 54 -16.17 AV 7323.000 41.07 2.21 43.28 74 -30.72 pea 7323.000 32.47 2.21 34.68 54 -19.32 AV	· · ·			()		,	,	. ,	peak	
7323.000 41.07 2.21 43.28 74 -30.72 pea 7323.000 32.47 2.21 34.68 54 -19.32 AV					-				AVG	
7323.000 32.47 2.21 34.68 54 -19.32 AV		_	-					_	peak	
Image: Constraint of the second sec									AVG	
Remark:										
Factor = Antenna Factor + Cable Loss – Pre-amplifier.	Remark:				•					

RESULT: Pass



Radiated Emissions Test Results for Above 1GHz

EUT Name		Wireless USB Adapter			Model Name		AX916	AX916	
Temperature	emperature 22.8 °C			Relative Humidity		57.9 %			
Pressure		960hPa			Test Vo	oltage	Normal \	/oltage	
Test Mode		Mode 3			Antenr	na Polarity	Horizont	al	
Frequency	Mete	er Reading	Factor	Emissi	on Level	Limits	Margin	Value Typ	
(MHz)		(dBµV)	(dB)	(dBµ	uV/m)	(dBµV/m)	(dB)	value Typ	
4960.000		46.44	0.08	46	6.52	74	-27.48	peak	
4960.000		37.97	0.08	38	8.05	54	-15.95	AVG	
7440.000		41.50	2.21	43	3.71	74	-30.29	peak	
7440.000		32.71	2.21	34	.92	54	-19.08	AVG	
Factor = Anter	nna Fa	actor + Cable	e Loss – Pre-a	amplitier.					
EUT Name		Wireless US	SB Adapter		Model	Name	AX916		
		Wireless U\$ 22.8℃	SB Adapter			Name e Humidity	AX916 57.9 %		
Temperature			SB Adapter			e Humidity		/oltage	
Temperature Pressure		22.8 ℃	SB Adapter		Relativ	e Humidity	57.9 %	/oltage	
Temperature Pressure	y N	22.8℃ 960hPa	SB Adapter	Emissic	Relative Test Vo Antenr	e Humidity Ditage	57.9 %	1	
Temperature Pressure Test Mode	y N	22.8℃ 960hPa Mode 3		Emissic (dBµ	Relative Test Vo Antenr	e Humidity oltage na Polarity	57.9 % Normal \ Vertical	/oltage Value Type	
Temperature Pressure Test Mode Frequence		22.8℃ 960hPa Mode 3 //eter Reading	Factor		Relative Test Vo Antenr	e Humidity oltage na Polarity Limits	57.9 % Normal V Vertical Margin	1	
Temperature Pressure Test Mode Frequence (MHz)		22.8℃ 960hPa Mode 3 //eter Reading (dBµV)	Factor (dB)	(dBµ	Relative Test Vo Antenr on Level V/m) 88	e Humidity bltage ha Polarity Limits (dBµV/m)	57.9 % Normal V Vertical Margin (dB)	- Value Type	
Temperature Pressure Test Mode Frequence (MHz) 4960.000		22.8℃ 960hPa Mode 3 //eter Reading (dBµV) 46.80	Factor (dB) 0.08	(dBµ) 46.	Relative Test Vo Antenr on Level V/m) 88 70	e Humidity bltage ha Polarity Limits (dBµV/m) 74	57.9 % Normal V Vertical Margin (dB) -27.12	Value Type	
(MHz) 4960.000 4960.000		22.8℃ 960hPa Mode 3 //eter Reading (dBµV) 46.80 37.62	Factor (dB) 0.08 0.08	(dBµ 46. 37.	Relative Test Vo Antenr on Level V/m) 88 70 .00	E Humidity Ditage Dia Polarity Limits (dBµV/m) 74 54	57.9 % Normal \ Vertical Margin (dB) -27.12 -16.30	- Value Type peak AVG	
Temperature Pressure Test Mode Frequence (MHz) 4960.000 7440.000 7440.000		22.8℃ 960hPa Mode 3 //eter Reading (dBµV) 46.80 37.62 41.79	Factor (dB) 0.08 0.08 2.21	(dBµ 46. 37. 44.	Relative Test Vo Antenr on Level V/m) 88 70 .00	e Humidity bltage ha Polarity Limits (dBµV/m) 74 54 74	57.9 % Normal \ Vertical Margin (dB) -27.12 -16.30 -30.00	Value Type peak AVG peak	
Temperature Pressure Test Mode Frequence (MHz) 4960.000 4960.000 7440.000 7440.000 Remark:		22.8℃ 960hPa Mode 3 //eter Reading (dBµV) 46.80 37.62 41.79 32.40	Factor (dB) 0.08 0.08 2.21	(dBµ 46. 37. 44. 34.	Relative Test Vo Antenr on Level V/m) 88 70 .00	e Humidity bltage ha Polarity Limits (dBµV/m) 74 54 74	57.9 % Normal \ Vertical Margin (dB) -27.12 -16.30 -30.00	Value Type peak AVG peak	

RESULT: Pass


Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.




Band Edge Emission	Test Results for Restricted Bands
--------------------	-----------------------------------

EUT Name	Wireless USB Adapter	Model Name	AX916
Temperature	25.9℃	Relative Humidity	43 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

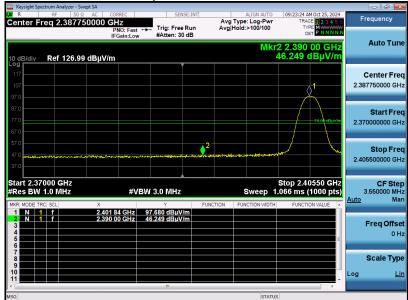

Test Graph for Average Measurement

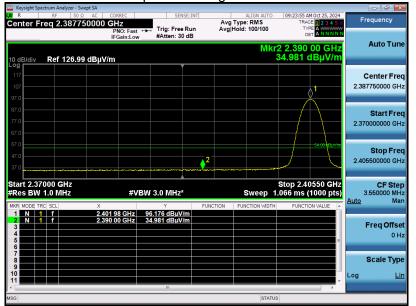


RESULT: Pass




Band Edge Emission Test R	esults for Restricted Bands
---------------------------	-----------------------------

EUT Name	Wireless USB Adapter	Model Name	AX916
Temperature	25.9℃	Relative Humidity	43 %
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

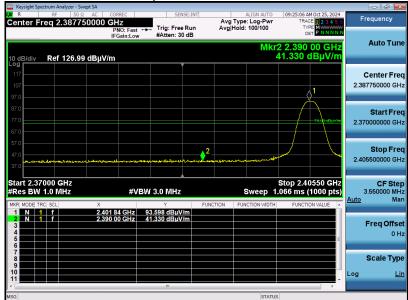


Test Graph for Average Measurement

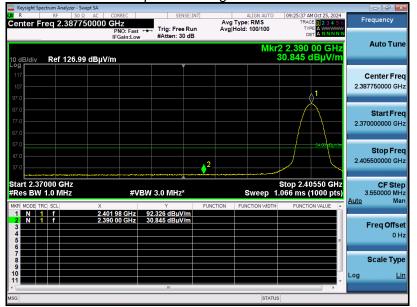


RESULT: Pass



EUT Name	Wireless USB Adapter	Model Name	AX916
Temperature	25.9 ℃	Relative Humidity	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

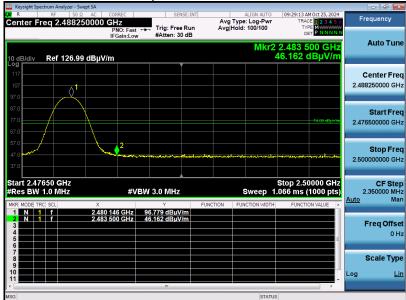


Test Graph for Average Measurement

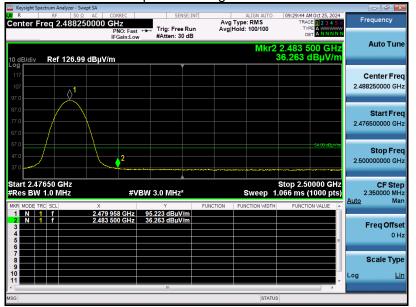


RESULT: Pass



EUT Name	Wireless USB Adapter	Model Name	AX916
Temperature	25.9 ℃	Relative Humidity	
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

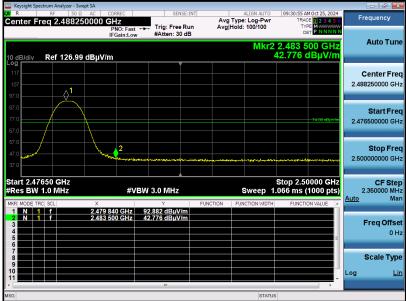

Test Graph for Average Measurement

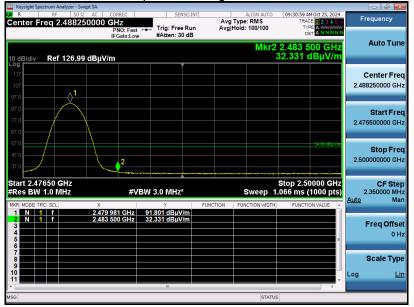

RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



10. Number of Hopping Frequency Measurement

10.1 Provisions Applicable


This frequency hopping system must employ a minimum of 15 hopping channels.

10.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = The frequency band of operation. Depending on the number of channels the device
- 2. supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- 3. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 4. VBW \geq RBW
- 5. Sweep time = Auto couple
- 6. Detector = Peak
- 7. Trace mode = Max hold
- 8. Allow the trace to stabilize


10.3 Measurement Setup (Block Diagram of Configuration)

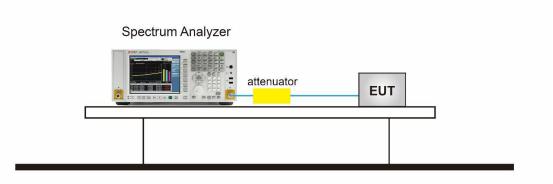

10.4 Measurement Result

Test Data of Number of Hopping Frequency					
Test Mode	Number of Hopping Frequency	Limits	Pass or Fail		
GFSK Hopping	79	>=15	Pass		



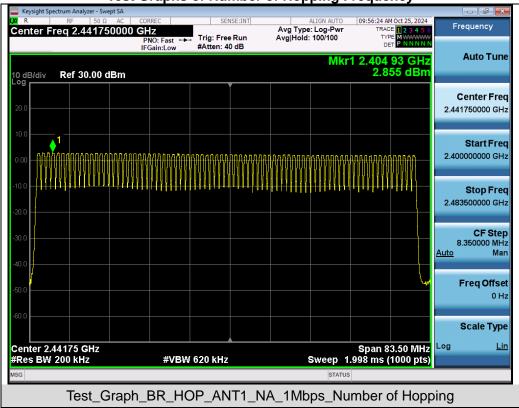

Test Graphs of Number of Hopping Frequency

Note: All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.



11. Time of Occupancy (Dwell Time) Measurement

11.1 Provisions Applicable


The maximum permissible time of occupancy is 400ms within a period of 400ms multiplied by the number of hopping channels employed.

11.2 Measurement Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- 1. Span = Zero span, centered on a hopping channel.
- 2. RBW shall be \leq channel spacing and where possible RBW should be set >> 1 / T, where T is the expected dwell time per channel.
- 3. VBW \geq RBW
- 4. Sweep time = As necessary to capture the entire dwell time per hopping channel
- 5. Detector = Peak
- 6. Trace mode = Free Run
- 7. Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time. An oscilloscope may be used instead of a spectrum analyzer. The EUT shall show compliance with the appropriate regulatory limit for the number of hopping channels. A plot of the data shall be included in the test report.


11.3 Measurement Setup (Block Diagram of Configuration)

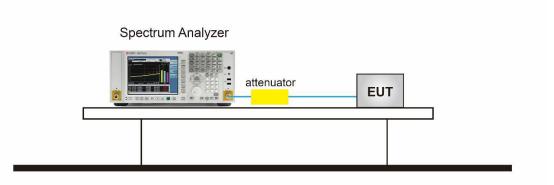

11.4 Measurement Result


Test Data of Dwell Time						
Channel	Time of Pulse for DH5 (ms)	Number of hops in the period specified in the requirements	Dwell Time (ms)	Limit (ms)	Pass or Fail	
2402	2.870	24.0*4	275.520	400	Pass	
2441	2.870	30.0*4	344.400	400	Pass	
2480	2.870	22.0*4	252.560	400	Pass	



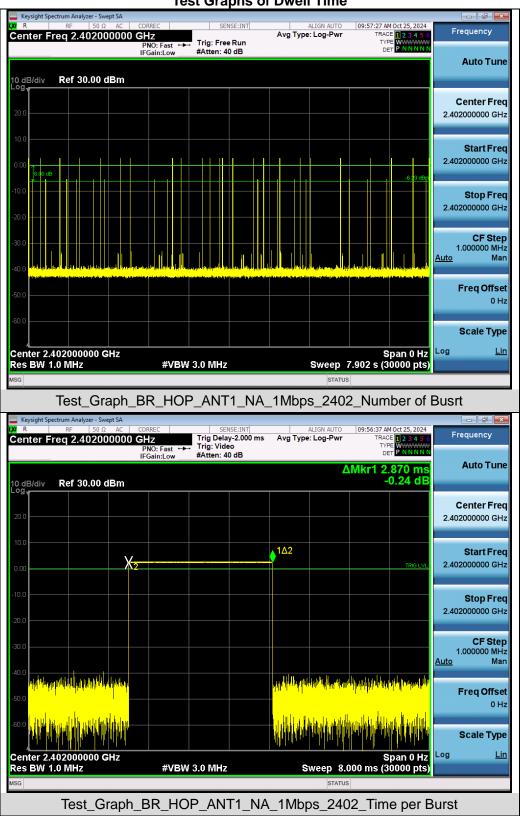


Test Graphs of Dwell Time



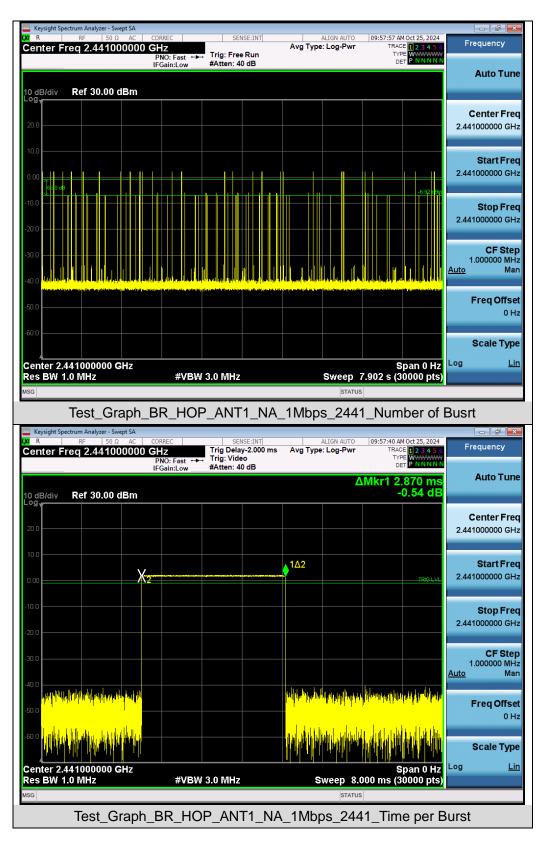



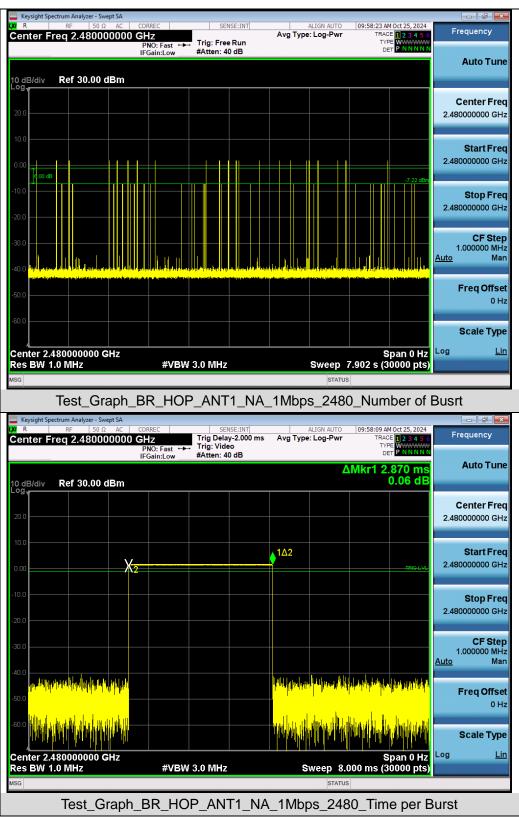

Note: All mode rates are tested and evaluated, GFSK modulated DH5 mode is the worst case and documented in the report.