

FCC Test Report

Report No.: AGC00742200402FE06

FCC ID : 2AKC6XHT-6B14

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: WIRELESS USB ADAPTER

BRAND NAME : N/A

MODEL NAME : 6B14, 6B13, 6B15

APPLICANT: SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD.

DATE OF ISSUE : Apr. 28, 2020

STANDARD(S) FCC Part 15.407

TEST PROCEDURE(S) KDB 789033 D02 v02r01

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline: 400 089 2118



Page 2 of 82

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 28, 2020	Valid	Initial Release






TABLE OF CONTENTS


1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S) / GRANT (S)	
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	7
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	10
5.2. EQUIPMENT USED IN EUT SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. MAXIMUM CONDUCTED OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP	
7.3. LIMITS AND MEASUREMENT RESULT	13
8. EMISSION BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
8.3. LIMITS AND MEASUREMENT RESULTS	
9. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY	
9.1 MEASUREMENT PROCEDURE	24
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
9.3 MEASUREMENT EQUIPMENT USED	24
9.4 LIMITS AND MEASUREMENT RESULT	
10. CONDUCTED SPURIOUS EMISSION	
10.1. MEASUREMENT PROCEDURE	40







10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	40
10.3. MEASUREMENT EQUIPMENT USED	
10.4. LIMITS AND MEASUREMENT RESULT	40
11. RADIATED EMISSION	
11.1. MEASUREMENT PROCEDURE	
11.2. TEST SETUP	53
11.3. LIMITS AND MEASUREMENT RESULT	
11.4. TEST RESULT	
12. BAND EDGE EMISSION	
12.1. MEASUREMENT PROCEDURE	59
12.2. TEST SET-UP	59
12.3. TEST RESULT	60
13. FREQUENCY STABILITY	
13.1. MEASUREMENT PROCEDURE	66
13.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	66
13.3. MEASUREMENT RESULTS	
14. FCC LINE CONDUCTED EMISSION TEST	70
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	70
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	70
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	74
ADDENDIY D. DUOTOGDADUS OF ELIT	76





1. VERIFICATION OF CONFORMITY

Applicant	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD.
Address	3Foor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Manufacturer	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD.
Address	3Foor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Factory 1	SHEN ZHEN XIN HUA TIAN TECHNOLOGY CO., LTD.
Address	3Foor, B Buliding, DaHong Industrial Park, GuangMin District, Shenzhen City, China
Product Designation	WIRELESS USB ADAPTER
Brand Name	N/A
Test Model	6B14
Series Model	6B13, 6B15
Difference description	All the same except for the model name and appearance
Date of test	Apr. 15, 2020 to Apr. 28, 2020
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BGN/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By	BUK. Vang	
NG -	Erik Yang (Project Engineer)	Apr. 28, 2020
Reviewed By	Max Zhang	
No.	Max Zhang (Reviewer)	Apr. 28, 2020
Approved By	Formerties	
No.	Forrest Lei (Authorized Officer)	Apr. 28, 2020



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,

Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118



Page 6 of 82

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "WIRELESS USB ADAPTER". It is designed by way of utilizing the OFDM technology to achieve the system operation.

A major technical description of EUT is described as following

A major technical description	of Lot is described as following
Operation Frequency	5150 MHz~5250MHz
Output Power	IEEE 802.11a20:7.64dBm IEEE 802.11n(20):7.63dBm; IEEE802.11n(40):6.02dBm IEEE802.11ac(20):7.61dBm IEEE802.11ac(40):7.07dBm IEEE802.11ac(80):3.71dBm
Modulation	BPSK, QPSK, 16QAM, 64QAM, 128QAM, 256QAM,OFDM
Number of channels	7
Hardware Version	V2.0
Software Version	V2.0
Antenna Designation	Integral Antenna
Number of transmit chain	2(802.11n20/n40/a/ac all used two antennas,but 802.11a support SISO and 802.11n20/n40/ac support MIMO)
Directional gain	All transmit signals are completely uncorrelated with each other
Antenna Gain	5dBi
Power Supply	DC 5V by PC

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
GO 6.	36	5180 MHz
	38	5190 MHz
	40	5200 MHz
5450 011- 5050011-	42	5210 MHz
5150 GHz~5250GHz	44	5220 MHz
	46	5230 MHz
	48	5240 MHz

Note: For 20MHZ bandwidth system use Channel 36,40,44,48; For 40MHZ bandwidth system use Channel 38,46; For 80MHZ bandwidth system use Channel 42



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 7 of 82

2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AKC6XHT-6B14** filing to comply with the FCC Part 15 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.407 rules KDB 789033 D02


2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.







3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±5.4 dB





Page 9 of 82

4. DESCRIPTION OF TEST MODES

Mode	Available channel	Tested channel	Modulation	Date rate(Mbps)
802.11a/n20/ac20	36,40,44,48	36,38,48	OFDM	6/6.5
802.11n40/ac40	38,46	38,46	OFDM	13.5
802.11ac80	42	42	OFDM	13.5

Note:

- 1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. The test software is the RtkTestAPP-v2.0.0_20170425 which can set the EUT into the individual test modes.




Page 10 of 82

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item Equipment		Model No.	ID or Specification	Remark
1	WIRELESS USB ADAPTER	6B14	2AKC6XHT-6B14	EUT
2	PC	Xiaomi	Air 13.3	AE
3	PC adapter	Xiaomi	DC 5V2A/9V2A/12V2A/15V3A/20V 3.25A 65W max	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.407	Emission Bandwidth	Compliant
§15.407	Maximum conducted output power	Compliant
§15.407	Conducted Spurious Emission	Compliant
§15.407	Maximum Conducted Output Power Density	Compliant
§15.209	Radiated Emission	Compliant
§15.407	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755 2523 4088 E-mail:agc@agc-cert.com Service Hotline:400 089 2118



Page 11 of 82

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 12, 2019	Jun. 11, 2020
LISN	R&S	ESH2-Z5	100086	Aug. 26, 2019	Aug. 25, 2020
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 11, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
Power sensor	Aglient	U2021XA	MY54110007	Sep. 09, 2019	Sep. 08, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 09, 2019	Sep. 08, 2021
preamplifier	ChengYi	EMC184045SE	980508	Sep. 21, 2017	Sep. 20, 2020
Active loop antenna (9K-30MHz)	A.H.	SAS-562B	XGIMI	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Oct. 15, 2019	Oct. 16, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 09, 2019	Jan. 08, 2021
Test software	FARA	EZ-EMC (Ver RA-03A)	N/A	N/A	N/A



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 12 of 82

7. MAXIMUM CONDUCTED OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For average power test:

- 1. Connect EUT RF output port to power sensor through an RF attenuator.
- 2. Connect the power sensor to the PC.
- 3. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 4. Record the maximum power from the software.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

7.2. TEST SET-UP

AVERAGE POWER SETUP







Page 13 of 82

7.3. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION							
Frequency (MHz) Average Power Chain 1(dBm) Average Power Chain 2(dBm) Average Power Total(dBm) Applicable Limits (dBm)							
5180	7.31	7.28	N/A	30	Pass		
5200	6.91	6.85	N/A	30	Pass		
5240	7.64	7.59	N/A	30	Pass		

LIMITS AND MEASUREMENT RESULT FOR 802.11N20 MODULATION							
Frequency (MHz)	Average Power Chain 1(dBm)	Average Power Chain 2(dBm)	Average Power Total(dBm)	Applicable Limits (dBm)	Pass or Fail		
5180	4.12	4.01	7.08	30	Pass		
5200	4.45	4.32	7.40	30	Pass		
5240	4.70	4.54	7.63	30	Pass		

LIMITS AND MEASUREMENT RESULT FOR 802.11AC20 MODULATION							
Frequency (MHz)	Average Power Chain 1(dBm)	Average Power Chain 2(dBm)	Average Power Total(dBm)	Applicable Limits (dBm)	Pass or Fail		
5180	3.77	3.71	6.75	30	Pass		
5200	3.99	3.92	6.97	30	Pass		
5240	4.63	4.56	7.61	30	Pass		

	LIMITS AND MEASUREMENT RESULT FOR 802.11N40 MODULATION							
Frequency (MHz)	Average Power Chain 1(dBm)	Applicable Limits (dBm)	Pass or Fail					
5190	2.47	2.40	5.45	30	Pass			
5230	3.03	2.98	6.02	30	Pass			

	LIMITS AND MEASUREMENT RESULT FOR 802.11AC40 MODULATION							
Frequency Average Power Average Power Chain 1(dBm) Average Power Total(dBm) Average Power (dBm) Pass o								
5190	3.63	3.59	6.62	30	Pass			
5230	4.10	4.02	7.07	30	Pass			



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,

Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118



Page 14 of 82

LIMITS AND MEASUREMENT RESULT FOR 802.11AC80 MODULATION							
Frequency (MHz) Average Power Chain 1(dBm) Average Power Chain 2(dBm) Average Power Total(dBm) Applicable Limits (dBm) Pass or							
5210	0.77	0.62	3.71	30	Pass		





Page 15 of 82


8. EMISSION BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

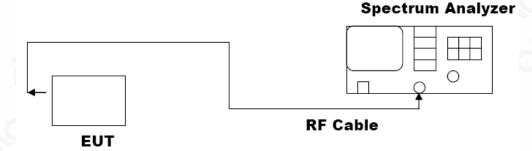





Page 16 of 82

8.3. LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION						
Annlinghla Limita	Applicable Limits					
Applicable Limits —	Test Data	a (MHz)	Criteria			
NO GO	5180MHz	20.31	PASS			
Within the Band	5200MHz	20.10	PASS			
-C	5240MHz	19.92	PASS			

LIMITS AND	MEASUREMENT RESUL	T FOR 802.11N20/40 MOI	DULATION
Aunliachla Limita		Applicable Limits	
Applicable Limits	Test Data	a (MHz)	Criteria
	5180MHz	20.58	PASS
CC C	5200MHz	20.31	PASS
Within the Band	5240MHz	20.49	PASS
C P	5190MHz	42.29	PASS
	5230MHz	41.99	PASS

LIMITS AND MEASUREMENT RESULT FOR 802.11AC80 MODULATION						
Applicable Limite		Applicable Limits				
Applicable Limits —	Test Date	a (MHz)	Criteria			
8	5180MHz	20.42	PASS			
CO CO	5200MHz	20.58	PASS			
With in the Decad	5240MHz	20.23	PASS			
Within the Band	5190MHz	41.96	PASS			
NGC NG	5230MHz	41.72	PASS			
	5210MHz	81.60	PASS			




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



802.11a20 TEST RESULT

TEST PLOT OF BANDWIDTH FOR 5180MHz

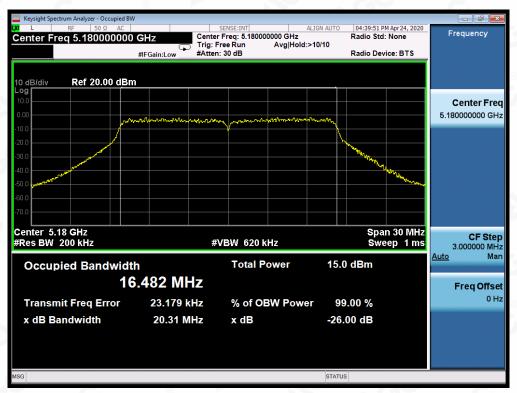


TEST PLOT OF BANDWIDTH FOR 5200MHz






Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China






TEST PLOT OF BANDWIDTH FOR 5240MHz

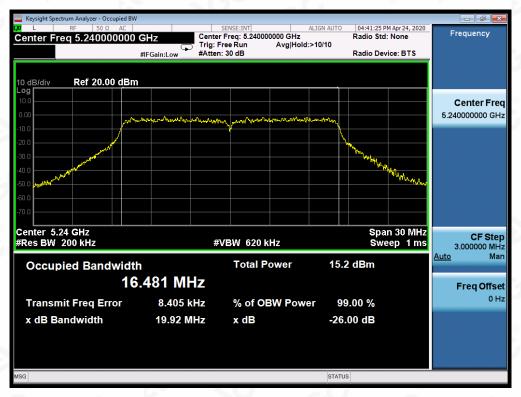

802.11n20 TEST RESULTTEST PLOT OF BANDWIDTH FOR 5180MHz

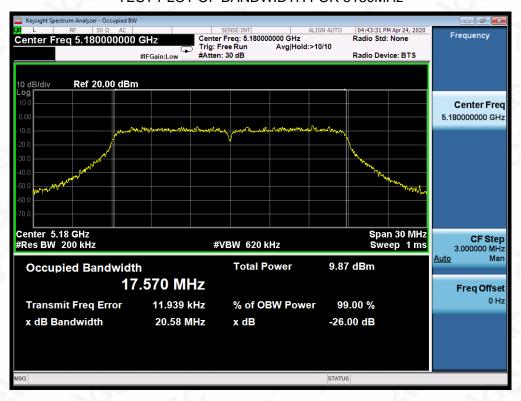



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF BANDWIDTH FOR 5200MHz



TEST PLOT OF BANDWIDTH FOR 5240MHz





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



802.11n40 TEST RESULT

TEST PLOT OF BANDWIDTH FOR 5190MHz



TEST PLOT OF BANDWIDTH FOR 5230MHz





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China




802.11ac20 TEST RESULT

TEST PLOT OF BANDWIDTH FOR 5180MHz




TEST PLOT OF BANDWIDTH FOR 5200MHz

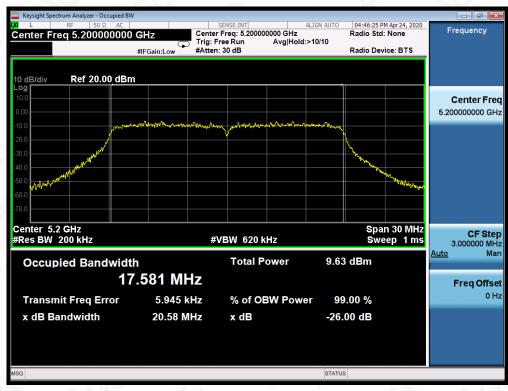




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China






TEST PLOT OF BANDWIDTH FOR 5240MHz

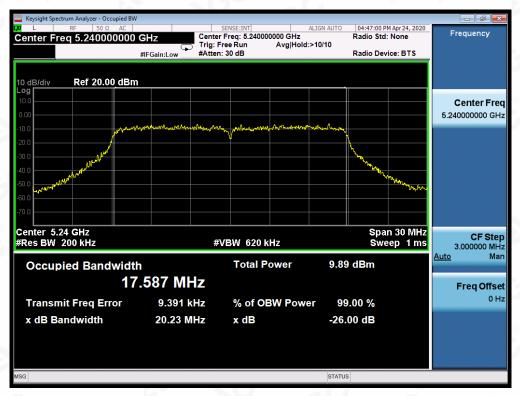


802.11ac40 TEST RESULTTEST PLOT OF BANDWIDTH FOR 5190MHz

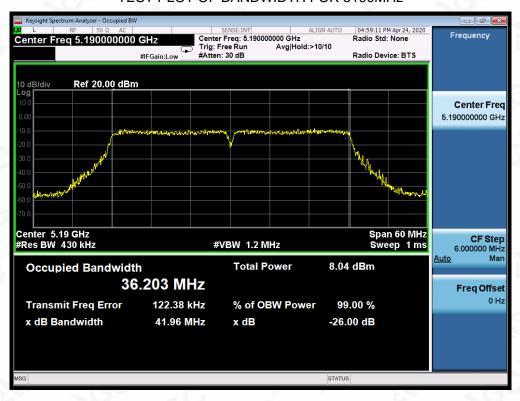




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China






TEST PLOT OF BANDWIDTH FOR 5230MHz

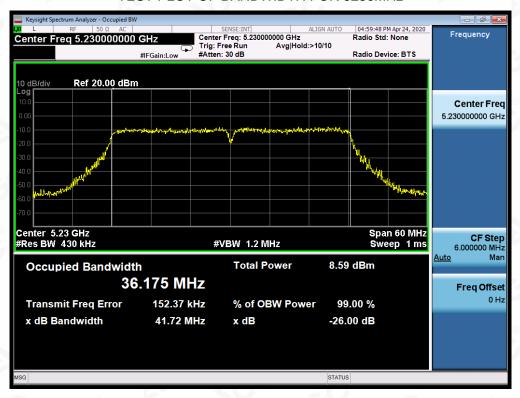

802.11ac80 TEST RESULTTEST PLOT OF BANDWIDTH FOR 5210MHz

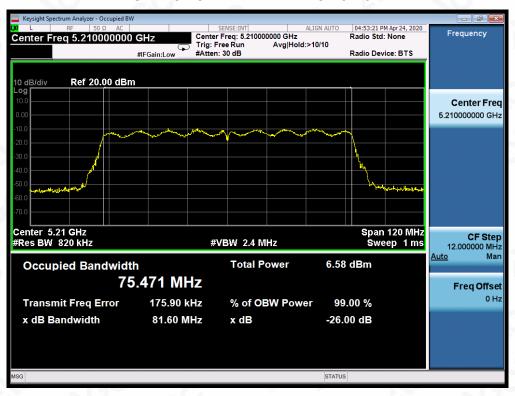



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Page 24 of 82

9. MAXIMUM CONDUCTED OUTPUT PEAK POWER SPECTRAL DENSITY

9.1 MEASUREMENT PROCEDURE

Refer to KDB 789033 section F

9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

9.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.

9.4 LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT FOR 802.11A20 MODULATION							
Frequency (MHz)	Chain 1 Chain 2 Iotal 1						
5180	6.183	6.431	N/A	17	Pass		
5200	6.654	6.616	N/A	17	Pass		
5240	6.910	6.393	N/A	17	Pass		

LIMITS AND MEASUREMENT RESULT FOR 802.11N20/40 MODULATION							
Frequency (MHz)	Power density Chain 1 (dBm/MHz)	Power density Chain 2 (dBm/MHz)	Power density Total (dBm/MHz)	Applicable Limits (dBm)	Pass or Fail		
5180	1.426	1.414	4.430	17	Pass		
5200	1.727	1.374	4.564	17	Pass		
5240	2.003	1.900	4.962	17	Pass		
5190	-1.930	-1.962	1.064	17	Pass		
5230	-1.298	-1.365	1.679	17	Pass		



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,



Page 25 of 82

FOR 802.11AC20/40/80 MODULATION					
Frequency (MHz)	Power density Chain 1 (dBm/MHz)	Power density Chain 2 (dBm/MHz)	Power density Total (dBm/MHz)	Applicable Limits (dBm)	Pass or Fail
5180	0.449	0.374	3.422	17	Pass
5200	0.612	0.580	3.606	17	Pass
5240	1.415	1.349	4.392	17	Pass
5190	-3.246	-3.912	-0.556	17	Pass
5230	-3.445	-3.930	-0.670	17	Pass
5210	-6.680	-6.698	-3.679	17	Pass



802.11a20 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR 5180MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5180MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5200MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5200MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5240MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5240MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118



802.11n20 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR 5180MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5180MHz AT CHAIN 2

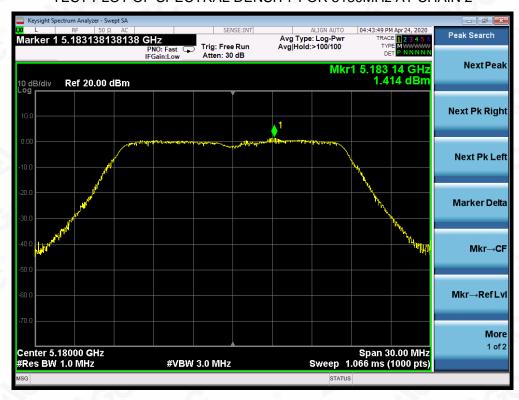



Attestation of Global Compliance(Shenzhen)Co.,Ltd.


Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5200MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5200MHz AT CHAIN 2

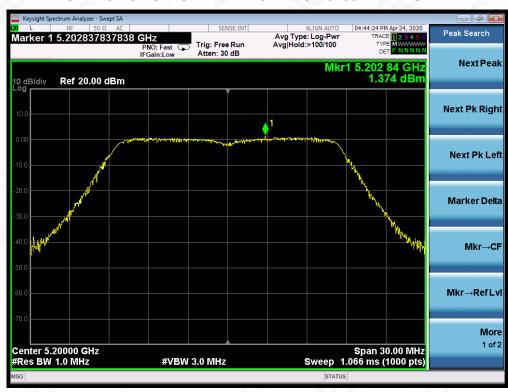



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5240MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5240MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



802.11n40 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR 5190MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5190MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5230MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5230MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



802.11ac20 TEST RESULT TEST PLOT OF SPECTRAL DENSITY FOR 5180MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5180MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5200MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5200MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5240MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5240MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



802.11ac40 TEST RESULT

TEST PLOT OF SPECTRAL DENSITY FOR 5190MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5190MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF SPECTRAL DENSITY FOR 5230MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5230MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



802.11ac80 TEST RESULT

TEST PLOT OF SPECTRAL DENSITY FOR 5210MHz AT CHAIN 1



TEST PLOT OF SPECTRAL DENSITY FOR 5210MHz AT CHAIN 2





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC00742200402FE06

Page 40 of 82

10. CONDUCTED SPURIOUS EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2.


10.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

10.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT							
	Applicable Limite	Measurement Result					
	Applicable Limits	Test channel	Criteria				
. GO	-27dBm/MHz	5150MHz-5250MHz	PASS				









FOR 802.11A20 MODULATION

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5180MHz

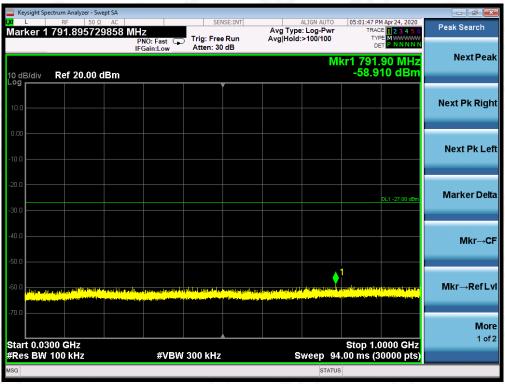

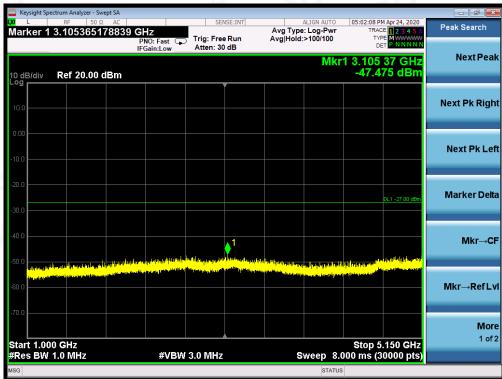




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



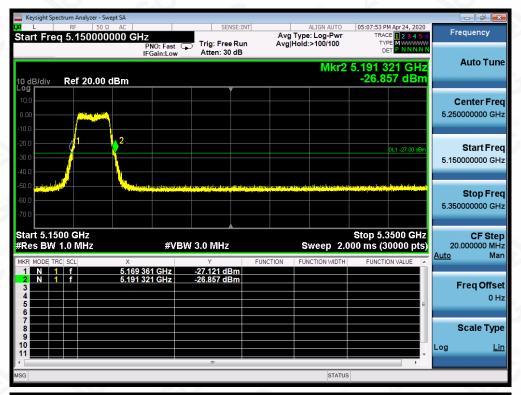



Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5240MHz








Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



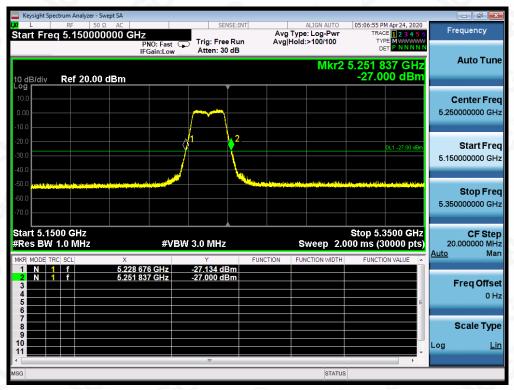





Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



FOR 802.11N40 MODULATION

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5190MHz

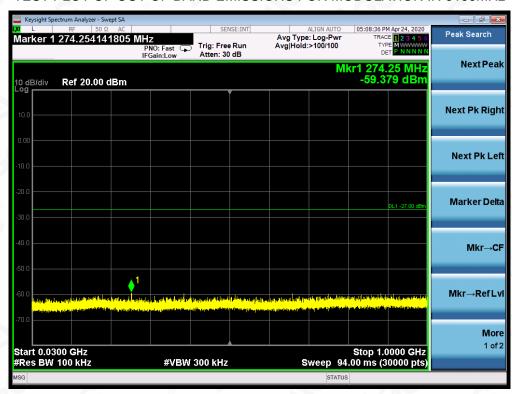

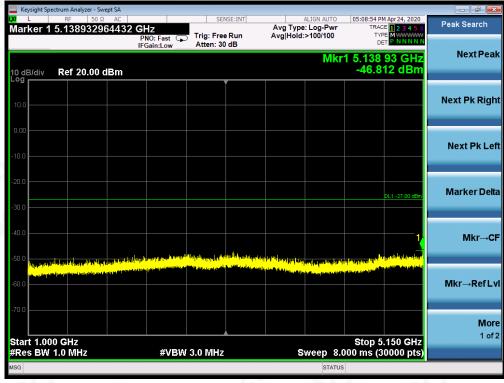





Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



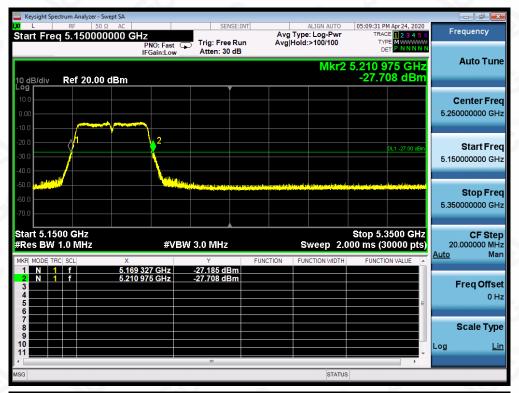


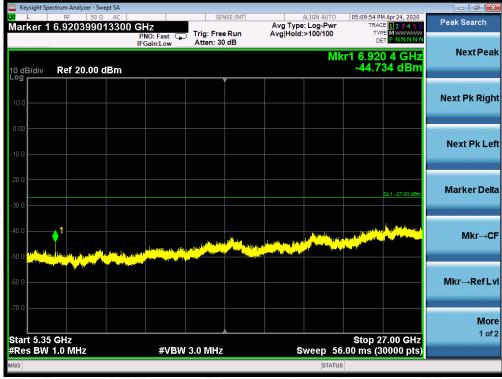

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5230MHz

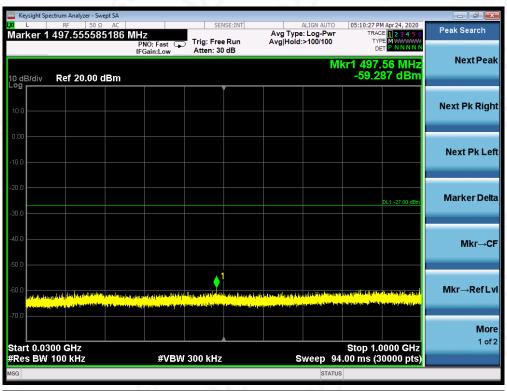






Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



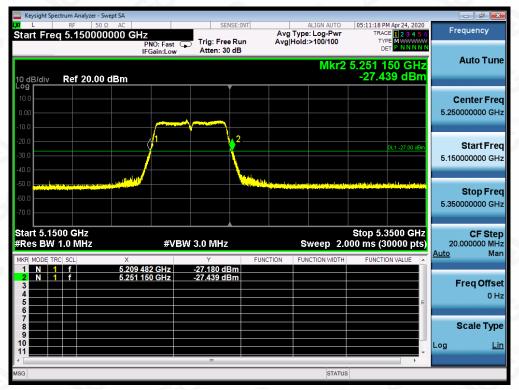





Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



FOR 802.11AC80 MODULATION

TEST PLOT OF OUT OF BAND EMISSIONS FOR MODULATION IN 5210MHz

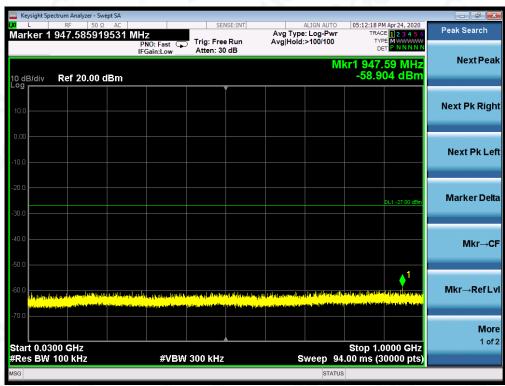

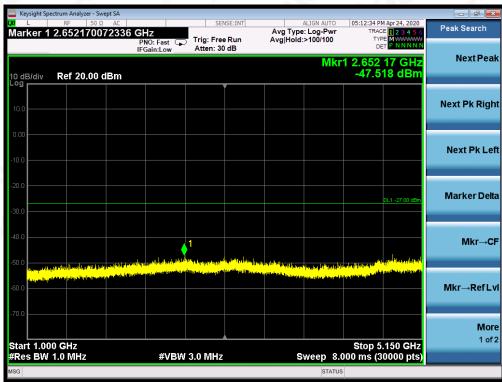




Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



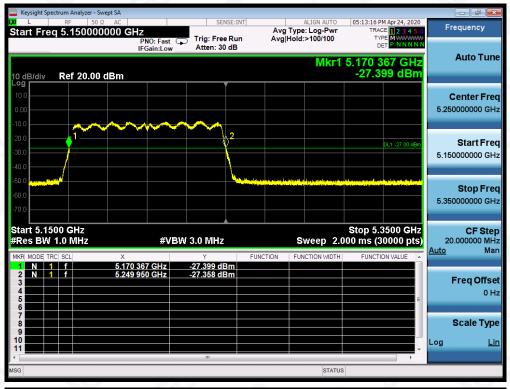



Note: All the 20MHz bandwidth modulation had been tested, the 802.11a20 was the worst case and record in his test report. All the 40MHz bandwidth modulation had been tested, the 802.11N40 was the worst case and record in his test report. All the 80MHz bandwidth modulation had been tested, the 802.11ac80 was the worst case and record in his test report.



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China





Two transmit chains had been tested, the chain 1 was the worst case and record in the test report. The spurious emission at chain 1 is more than 3dB below the limits, so the MIMO results for the spurious emissions are comply with the requirement.





Report No.: AGC00742200402FE06

Page 52 of 82

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

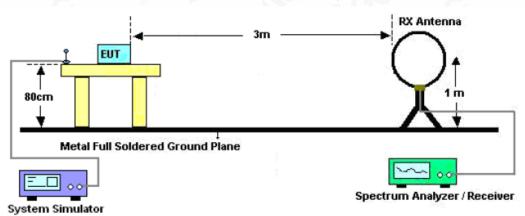

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

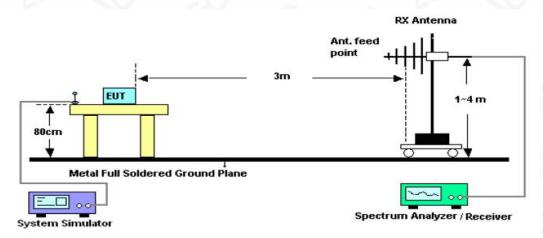

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

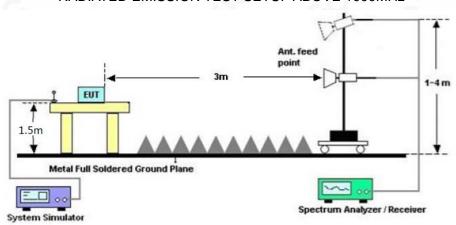



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2,Sanwei Chaxi Industrial Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China



Report No.: AGC00742200402FE06

Page 54 of 82

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(KHz)	300		
0.490~1.705	24000/F(KHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested For restricted band radiated emission, the test records reported below are the worst result compared to other modes.


11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.




Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118





RADIATED EMISSION BELOW 1GHZ

EUT	WIRELESS USB ADAPTER	Model Name	6B14	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	802.11a20 5180MHz	Antenna	Horizontal	

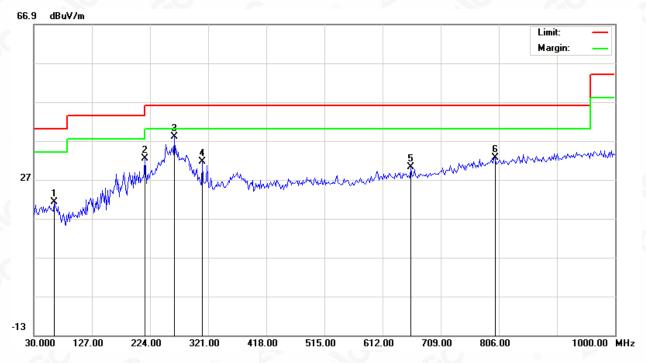

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		63.9500	3.08	18.17	21.25	40.00	-18.75	peak			
2		215.9167	15.41	17.00	32.41	43.50	-11.09	peak			
3	*	264.4166	19.28	18.67	37.95	46.00	-8.05	peak			
4		311.3000	11.65	19.87	31.52	46.00	-14.48	peak			
5		658.8832	2.54	27.66	30.20	46.00	-15.80	peak			
6		799.5333	2.27	30.40	32.67	46.00	-13.33	peak			

RESULT: PASS



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,