

Annex 1: Measurement diagrams to  
**TEST REPORT**  
 No.: 17-1-0105501T02a-C1

According to:  
**FCC Regulations**  
 Part 22, Part 24







**IC-Regulations**  
 RSS-132 Issue 3, RSS-133 Issue 6,  
 RSS-Gen Issue 4

for

Daimler Trucks North America

7620 000 296  
 66-10777-001

FCC: 2AKC8CTP10777001  
 ISED: 22221-CTP10777001  
 PMN: CTPMIDDTNA  
 HVIN: CTPMIDDTNA  
 FVIN: 17.02.S.016

Laboratory Accreditation and Listings			
 Deutsche Akkreditierungsstelle D-PL-12047-01-01	 FEDERAL COMMUNICATIONS COMMISSION USA MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
 <b>WiFi</b> ALLIANCE AUTHORIZED RF LABORATORY	 <b>ctia</b> Authorized Test Lab Lab Code: 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
<p align="center"> <b>CETECOM GmbH</b>            Laboratory Radio Communications &amp; Electromagnetic Compatibility            Im Teelbruch 116 • 45219 Essen • Germany            Registered in Essen, Germany, Reg. No.: HRB Essen 8984            Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964            E-mail: info@cetecom.com • Internet: www.cetecom.com         </p>			


## Table of contents

<b>1. MEASUREMENT DIAGRAMS.....</b>	<b>3</b>
1.1. Power Measurements and PAPR-Value .....	3
1.2. Magnetic field emissions radiated (850 MHz transmitting mode).....	11
1.3. Magnetic field emissions radiated (1900 MHz transmitting mode).....	14
1.4. Spurious emissions radiated (850 MHz transmitting mode).....	17
1.5. Spurious emissions radiated (1900 MHz transmitting mode).....	20
1.6. Radiated emissions on 850 MHz transmitting band-edge.....	23
1.7. Radiated emissions on 1900 MHz transmitting band-edge.....	25

# 1. Measurement diagrams

## 1.1. Power Measurements and PAPR-Value


### 1.1.1. GSM 850 (GMSK Modulation)

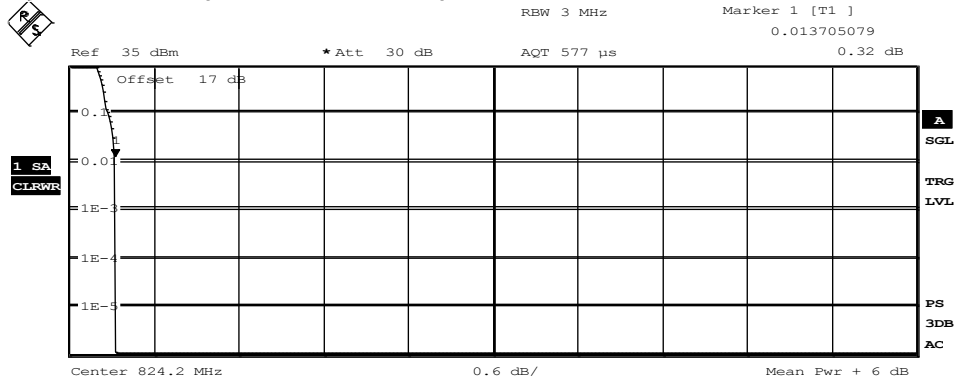

Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	31.69 dBm
Peak	32.01 dBm
Crest	0.32 dB
10 %	0.27 dB
1 %	0.32 dB
.1 %	0.33 dB
.01 %	0.33 dB


### Diagram CCDF\_128\_GMSK

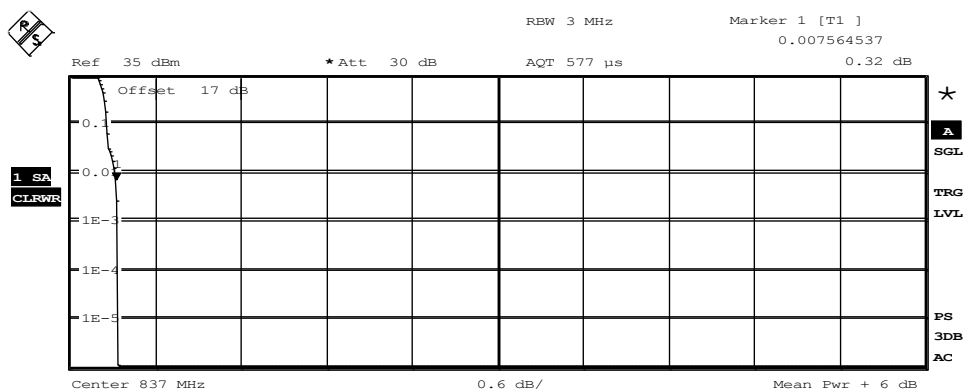

Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	31.61 dBm
Peak	31.94 dBm
Crest	0.33 dB
10 %	0.26 dB
1 %	0.31 dB
.1 %	0.34 dB
.01 %	0.34 dB

### Diagram CCDF\_192\_GMSK

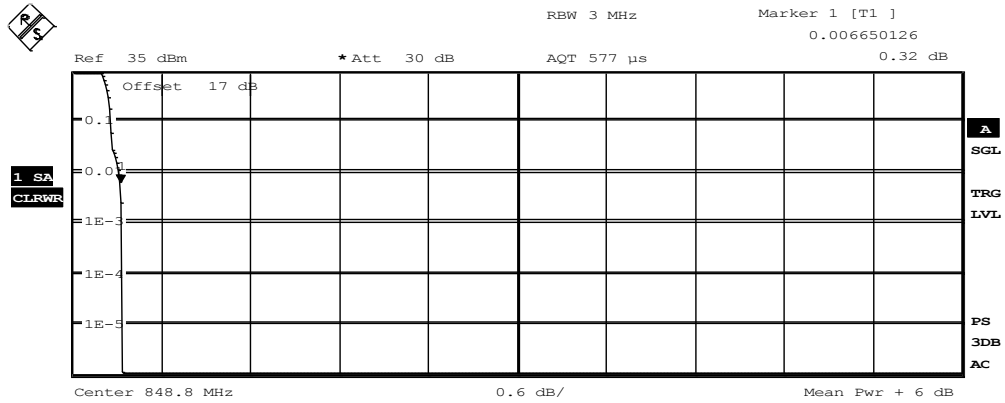


Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	31.61 dBm
Peak	31.94 dBm
Crest	0.33 dB
10 %	0.26 dB
1 %	0.31 dB
.1 %	0.34 dB
.01 %	0.34 dB

**Diagram CCDF\_251\_GMSK**


### 1.1.2. GSM 850 (8-PSK Modulation)

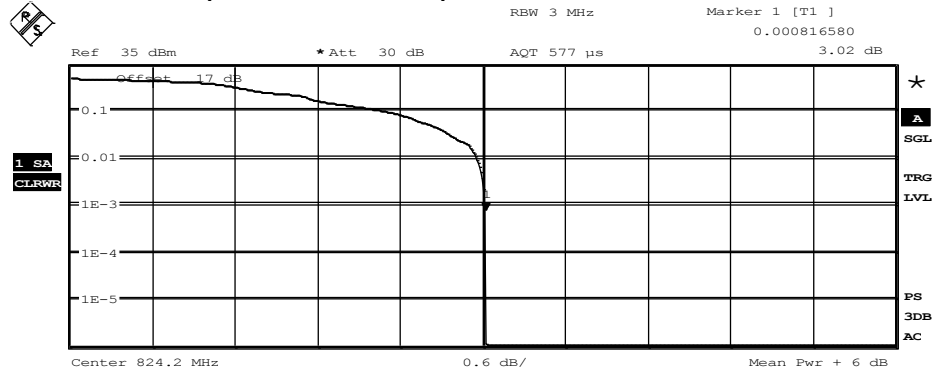

Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	26.80 dBm
Peak	29.82 dBm
Crest	3.02 dB
10 %	2.32 dB
1 %	2.96 dB
.1 %	3.02 dB
.01 %	3.03 dB


### Diagram CCDF\_128\_8PSK

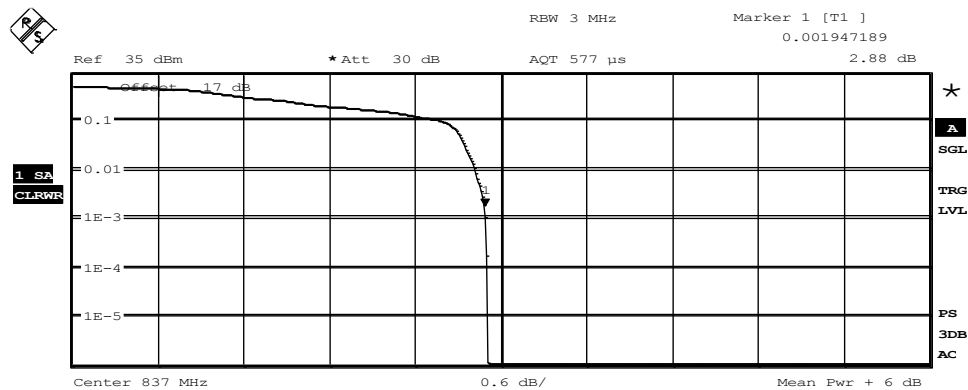

Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	27.14 dBm
Peak	30.04 dBm
Crest	2.90 dB
10 %	2.60 dB
1 %	2.82 dB
.1 %	2.89 dB
.01 %	2.90 dB

### Diagram CCDF\_192\_8PSK

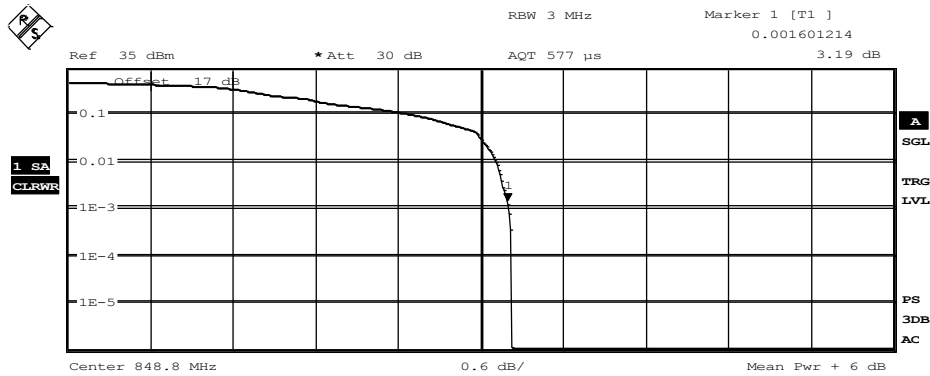


Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	27.02 dBm
Peak	30.25 dBm
Crest	3.22 dB
10 %	2.53 dB
1 %	3.12 dB
.1 %	3.20 dB
.01 %	3.23 dB

Diagram CCDF\_251\_8PSK


### 1.1.3. GSM 1900 (GMSK Modulation)

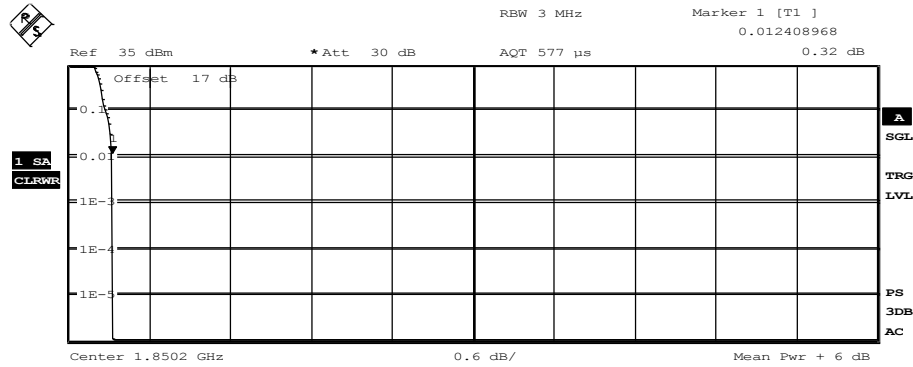

Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	29.08 dBm
Peak	29.40 dBm
Crest	0.32 dB
10 %	0.27 dB
1 %	0.32 dB
.1 %	0.33 dB
.01 %	0.33 dB


### Diagram CCDF\_512\_GMSK

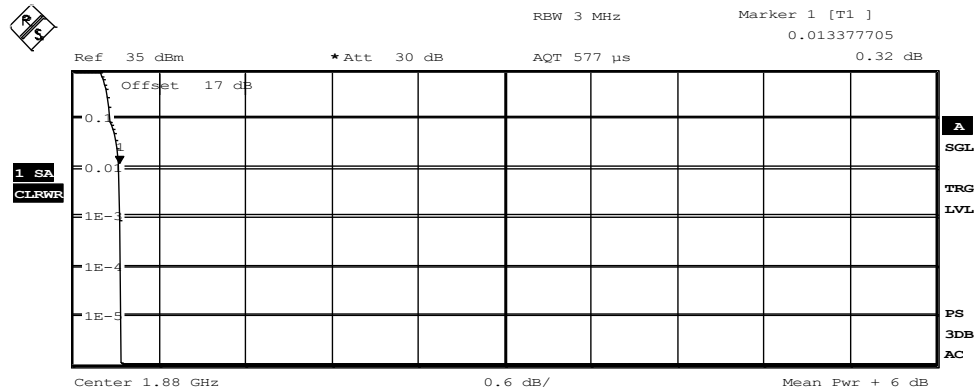

Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	29.07 dBm
Peak	29.40 dBm
Crest	0.33 dB
10 %	0.26 dB
1 %	0.32 dB
.1 %	0.33 dB
.01 %	0.34 dB

### Diagram CCDF\_661\_GMSK

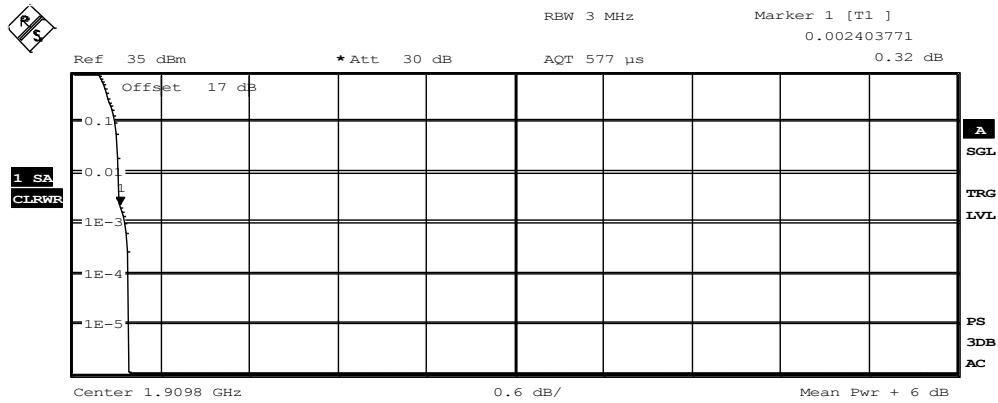


**Complementary Cumulative Distribution Function**  
 NOF samples: 2308, Usable BW: 3.5MHz

	Trace 1	
Mean	29.30	dBm
Peak	29.68	dBm
Crest	0.38	dB
10 %	0.29	dB
1 %	0.32	dB
.1 %	0.36	dB
.01 %	0.38	dB

**Diagram CCDF\_810\_GMSK**



### 1.1.4. GSM 1900 (8-PSK Modulation)

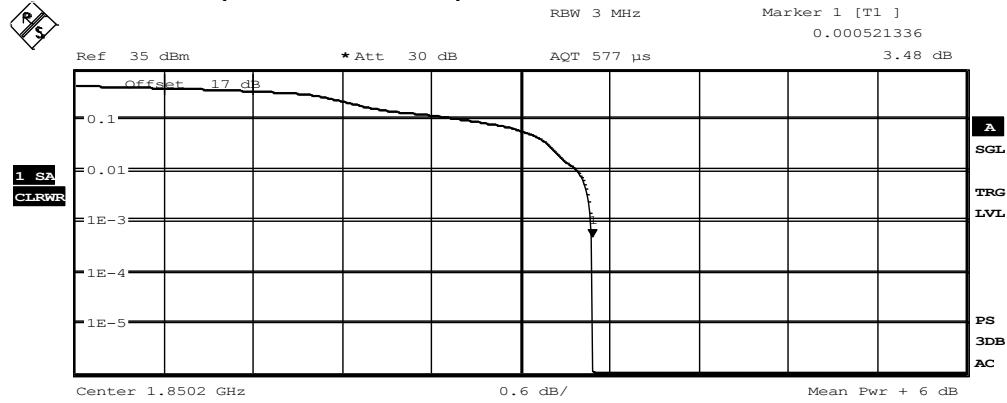

Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	25.00 dBm
Peak	28.48 dBm
Crest	3.48 dB
10 %	2.68 dB
1 %	3.38 dB
.1 %	3.48 dB
.01 %	3.49 dB


### Diagram CCDF\_512\_8PSK



Complementary Cumulative Distribution Function  
 NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	25.43 dBm
Peak	28.63 dBm
Crest	3.20 dB
10 %	2.51 dB
1 %	3.01 dB
.1 %	3.15 dB
.01 %	3.20 dB

### Diagram CCDF\_661\_8PSK

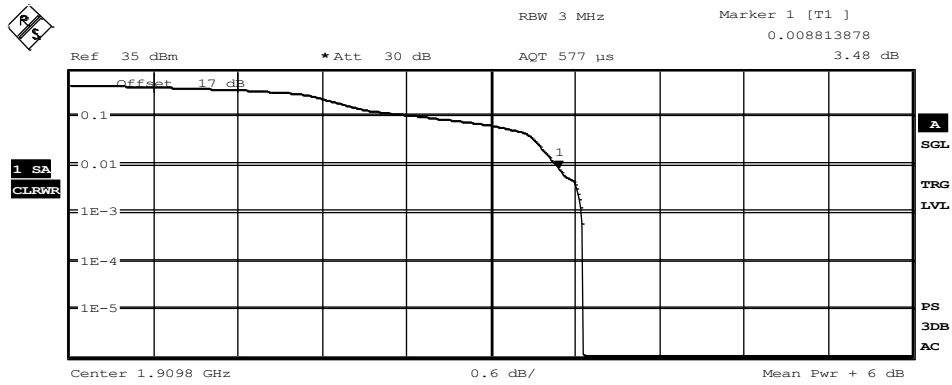

Complementary Cumulative Distribution Function  
NOF samples: 2308, Usable BW: 3.5MHz

Trace 1	
Mean	24.90 dBm
Peak	28.55 dBm
Crest	3.66 dB
10 %	2.58 dB
1 %	3.46 dB
.1 %	3.64 dB
.01 %	3.66 dB

Diagram CCDF\_810\_8PSK

## 1.2. Magnetic field emissions radiated (850 MHz transmitting mode) Diagram No. 2.01\_RSE\_R\_Ch128\_GPRS


### Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	RIs
Operating conditions:	TX-on
Power during tests:	12V DC
Comment 1:	Channel low

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

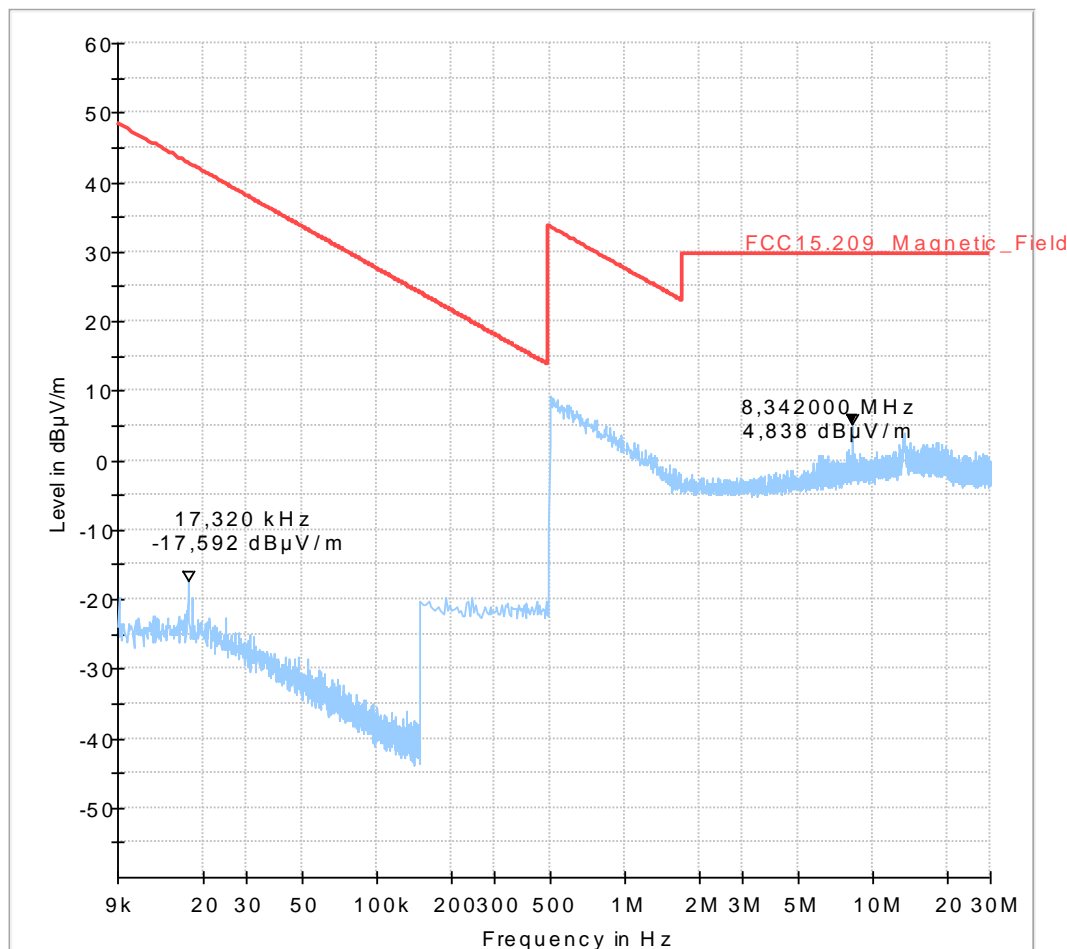

## Diagram No. 2.02\_RSE\_R\_Ch192\_GPRS


### Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	RIs
Operating conditions:	TX-on
Power during tests:	12V DC
Comment 1:	Channel middle

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

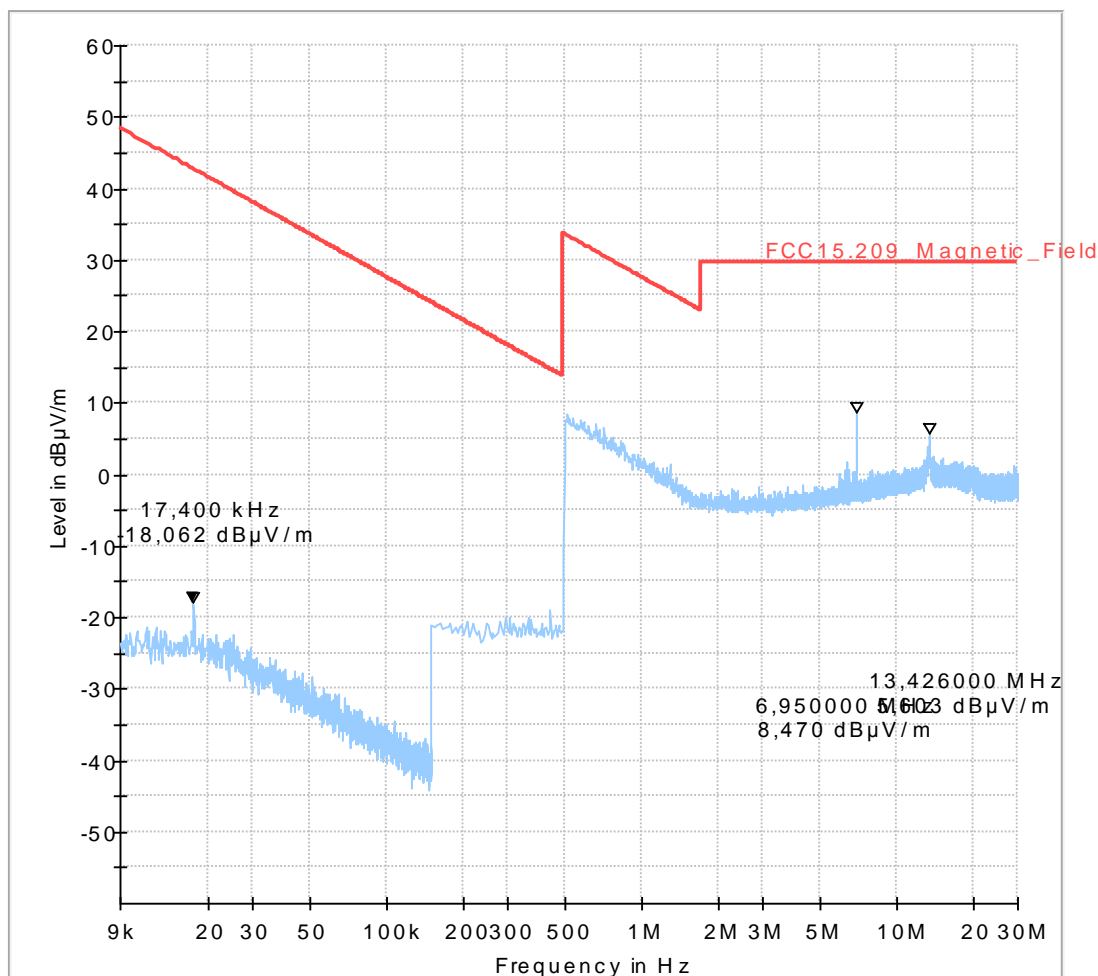

## Diagram No. 2.03\_RSE\_R\_Ch251\_GPRS


### Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	RIs
Operating conditions:	TX-on
Power during tests:	12V DC
Comment 1:	Channel high

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

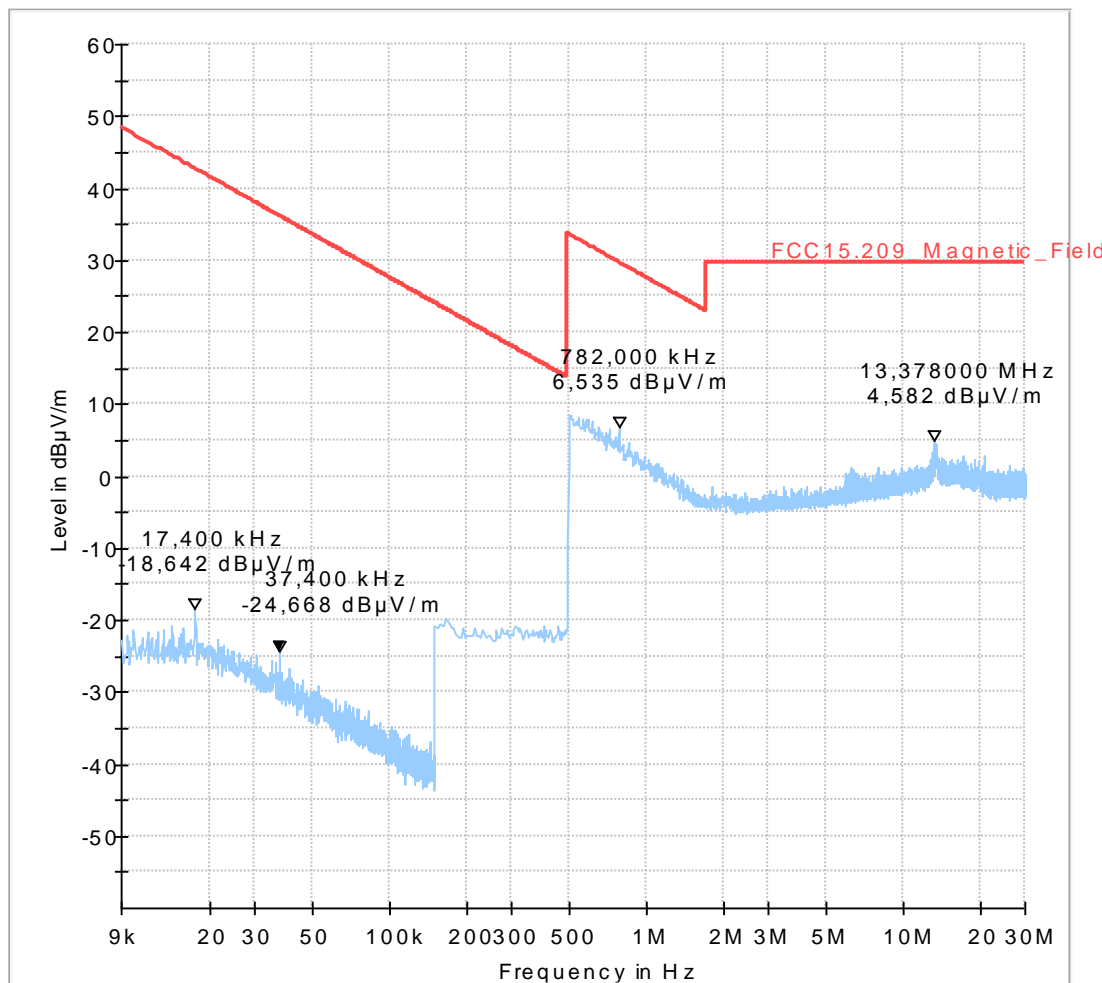


### 1.3. Magnetic field emissions radiated (1900 MHz transmitting mode) 2.10\_RSE\_R\_Ch512\_GPRS

#### Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	Klv
Operating conditions:	TX-on
Power during tests:	12VDC
Comment 1:	Channel 512

#### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

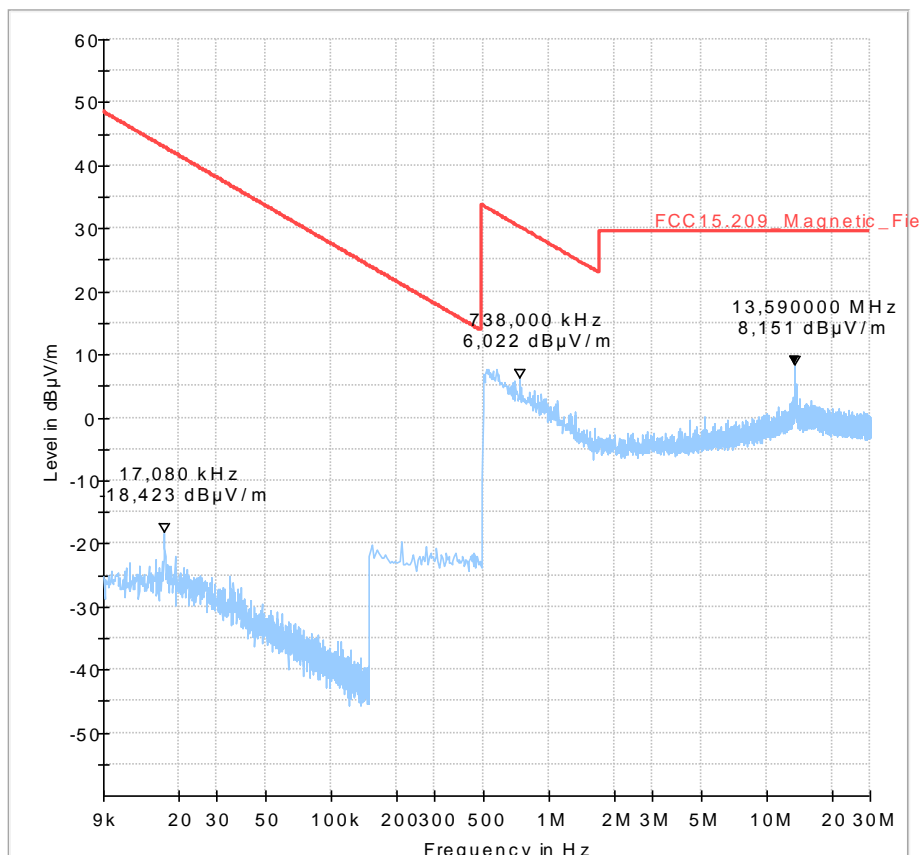


## 2.11\_RSE\_R\_Ch661\_GPRS

### Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	Klv
Operating conditions:	TX-on
Power during tests:	24VDC
Comment 1:	Channel 661

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

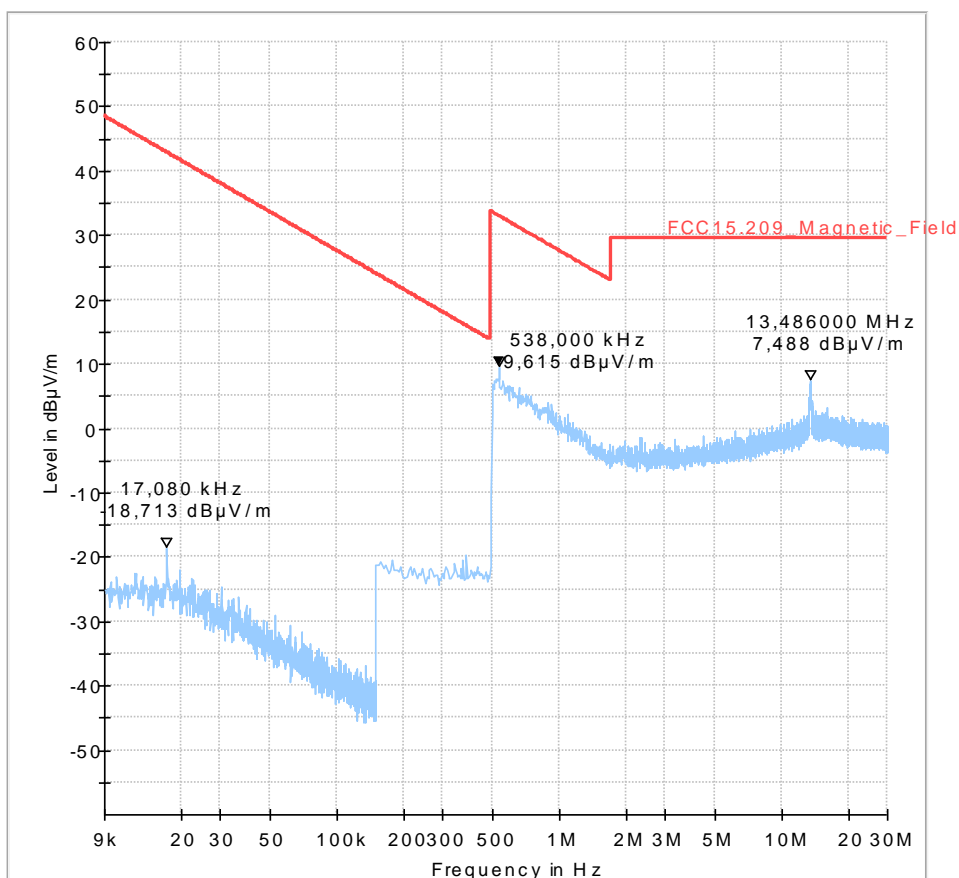


## 2.12\_RSE\_R\_Ch810\_GPRS

### Common Information

Test description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used filter:	bypass
Test specification:	FCC 15.205 § 15.209; RSS-Gen: Issue 4
Operator:	Klv
Operating conditions:	TX-on
Power during tests:	24VDC
Comment 1:	Channel 810

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

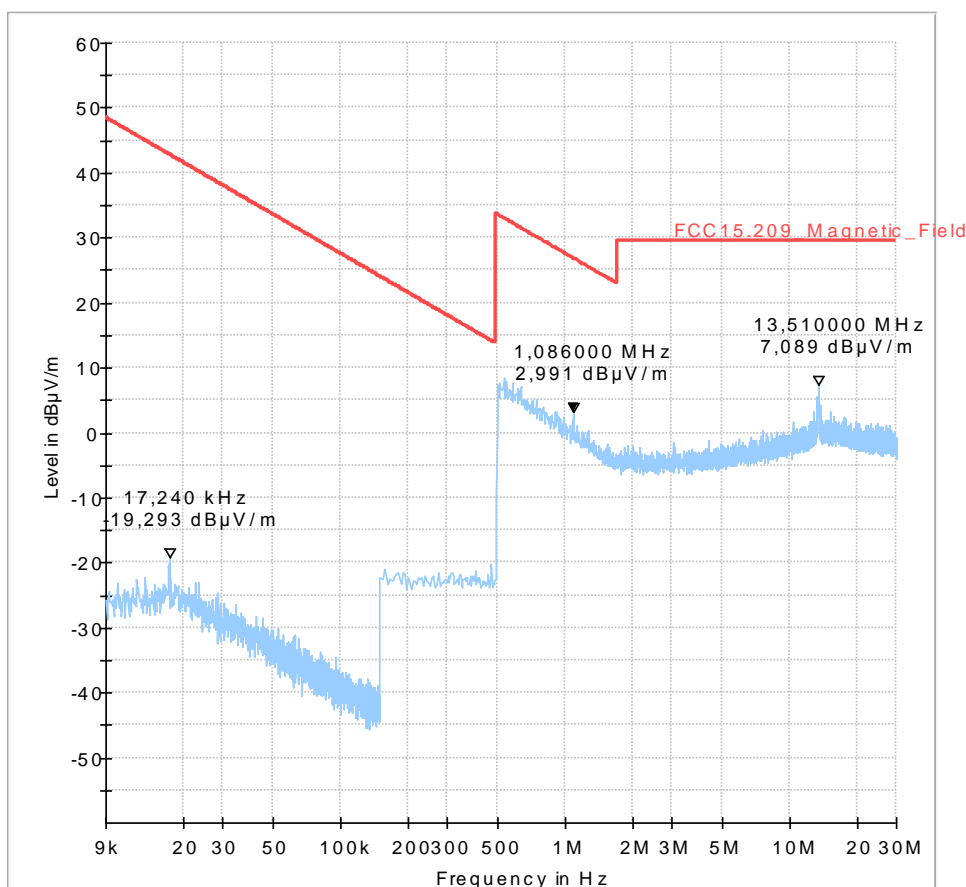



## 1.4. Spurious emissions radiated (850 MHz transmitting mode) 8.01\_RSE\_R\_Ch128\_GPRS


### Common Information

Test Description:	Radiated emission related to 1m
Test Site:	FAR
Test Standard:	FCC FCC Part 24.238 Broadband PCS
Antenna polarisation:	vertical / horizontal
Manufacturer:	Robert Bosch Car Multimedia GmbH
Operating Condition:	Humidity: 48%rH; Temperature: 20°C
Operation mode:	TCH 850 CHANNEL 128
Operator Name:	TFR
Comment:	

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

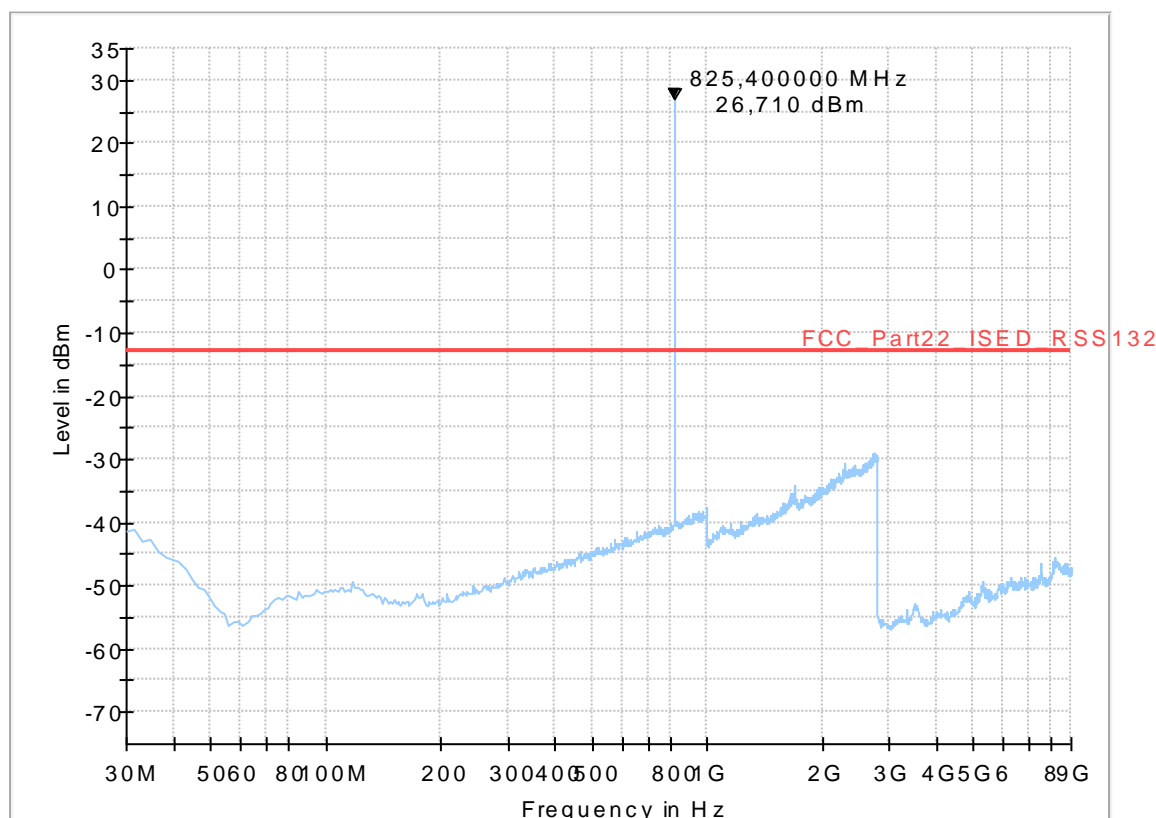

## 8.02-RSE\_R\_Ch192\_GPRS\_\_


### Common Information

Test Description:	Radiated emission related to 1m
Test Site:	FAR
Test Standard:	FCC FCC Part 24.238 Broadband PCS
Antenna polarisation:	vertical / horizontal
Manufacturer:	Robert Bosch Car Multimedia GmbH
Operating Condition:	Humidity: 48%rH; Temperature: 20°C
Operation mode:	TCH 850 CHANNEL 192
Operator Name:	Mah
Comment:	

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	-----
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

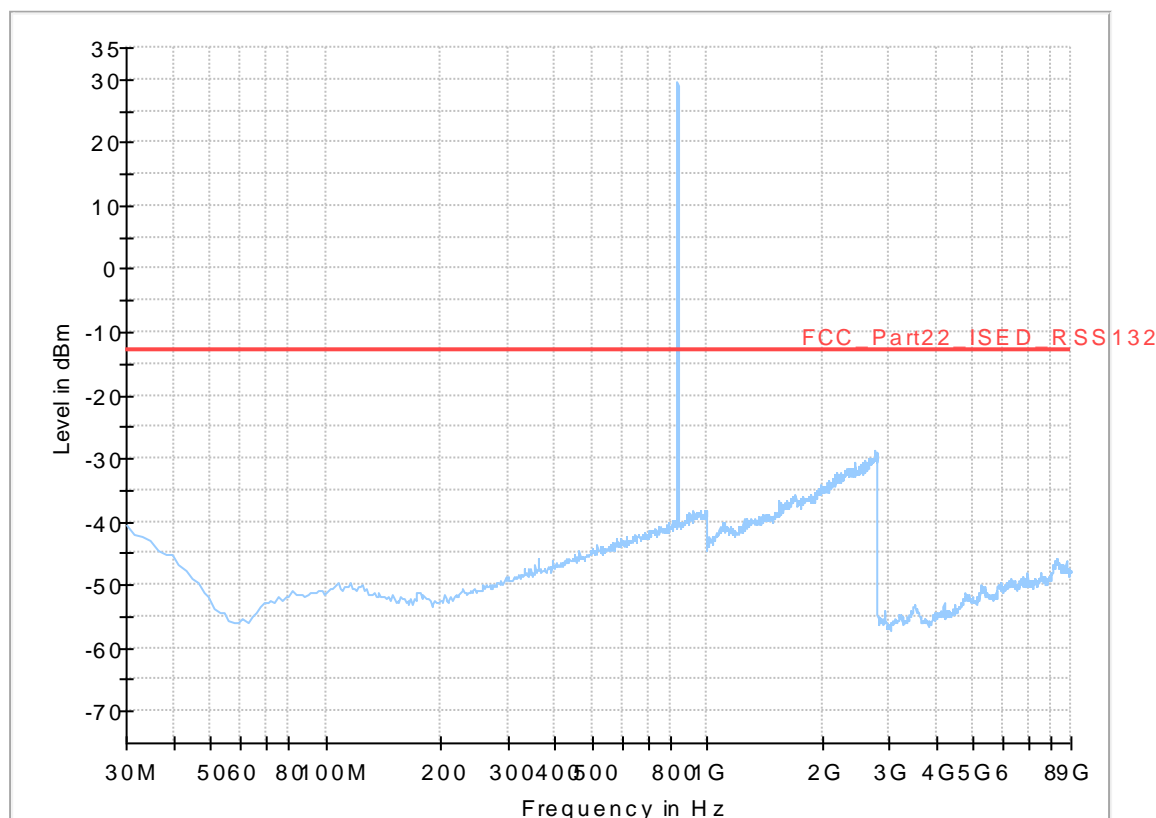

### 8.03-RSE\_R\_Ch251\_GPRS


#### Common Information

Test Description:	Radiated emission related to 1m
Test Site:	FAR
Test Standard:	FCC FCC Part 24.238 Broadband PCS
Antenna polarisation:	vertical / horizontal
Manufacturer:	Robert Bosch Car Multimedia GmbH
Operating Condition:	Humidity: 48%rH; Temperature: 20°C
Operation mode:	TCH 850 CHANNEL 251
Operator Name:	TFR
Comment:	

#### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

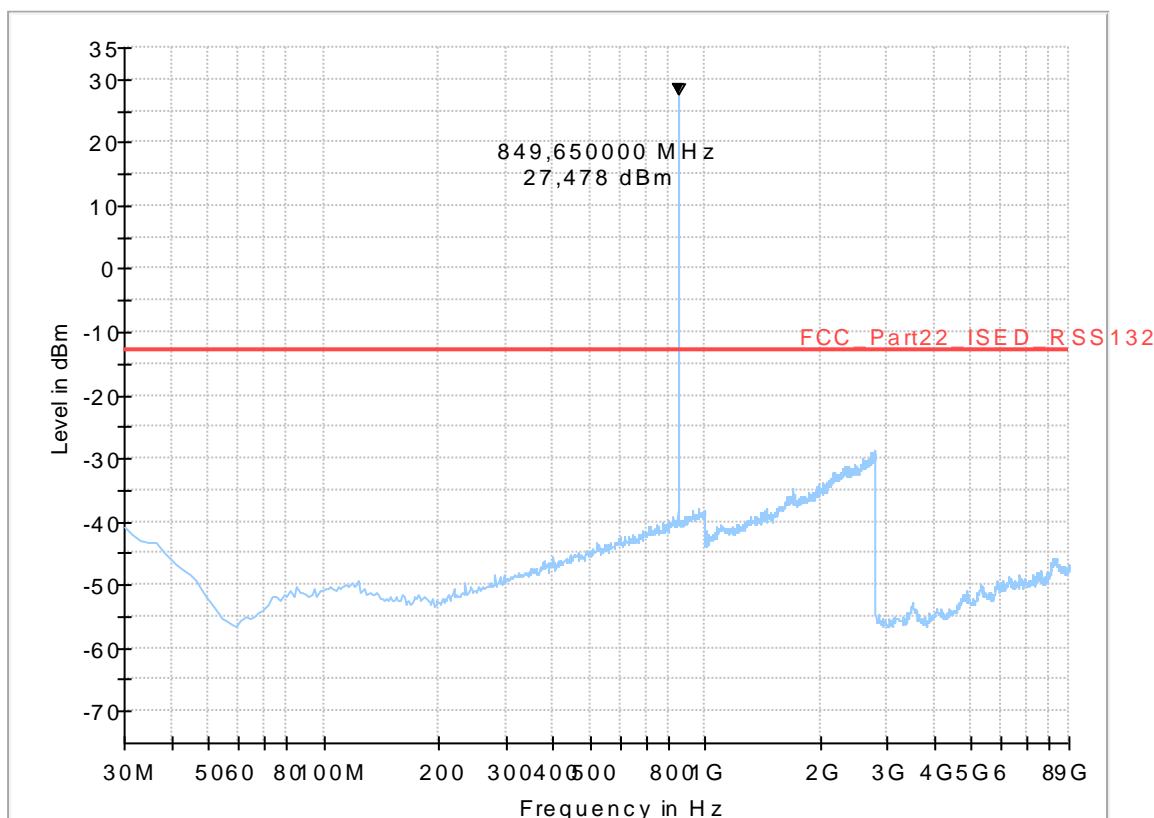

## 1.5. Spurious emissions radiated (1900 MHz transmitting mode)

### 8.10-RSE\_R\_Ch512\_GPRS


#### Common Information

Test Description:	Radiated emission related to 1m
Test Site:	FAR
Test Standard:	FCC FCC Part 24.238 Broadband PCS
Antenna polarisation:	vertical / horizontal
Operation mode:	TCH 1900, CHANNEL 512
Operator Name:	MBe
Conditions:	Humidity: 50%rH; Temperature: 20°C

#### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

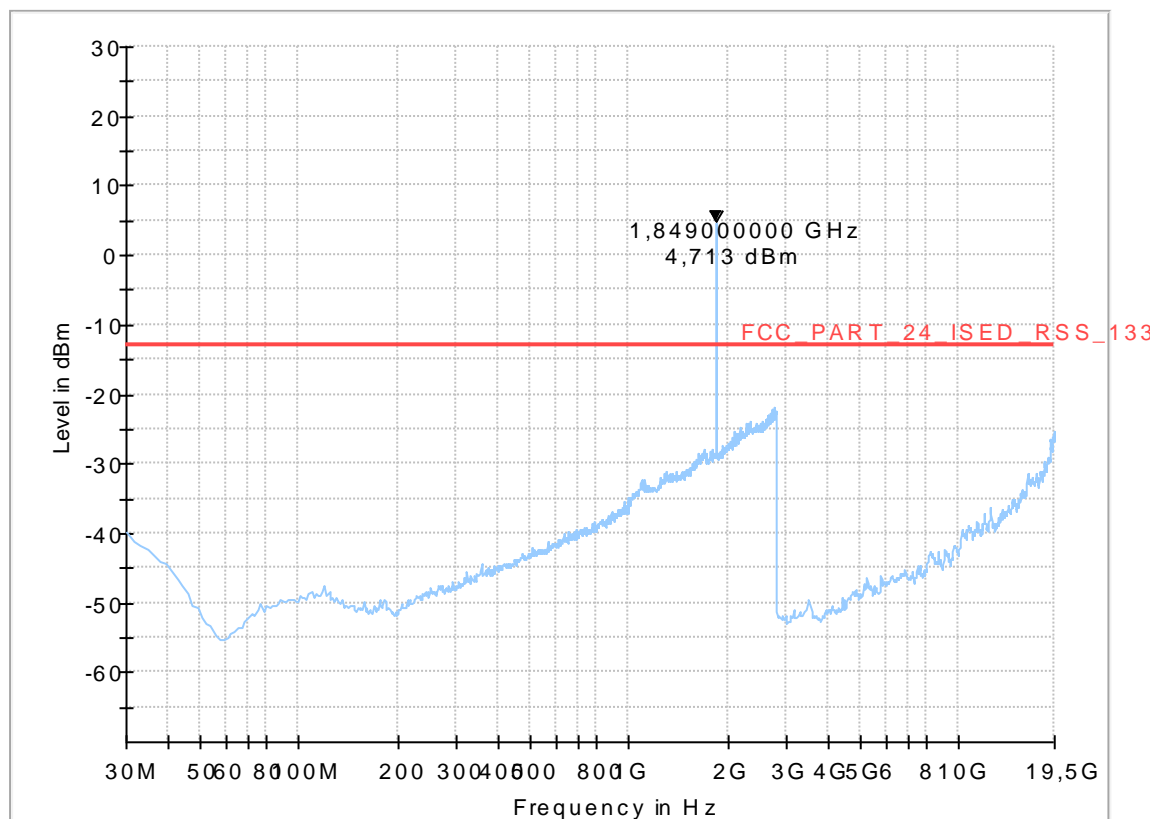

## 8.11-RSE\_R\_Ch661\_GPRS


### Common Information

Test Description:	Radiated emission related to 1m
Test Site:	FAR
Test Standard:	FCC FCC Part 24.238 Broadband PCS
Antenna polarisation:	vertical / horizontal
Operation mode:	TCH 1900, CHANNEL 661
Operator Name:	MBe
Conditions:	Humidity: 50%rH; Temperature: 20°C

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	-----
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

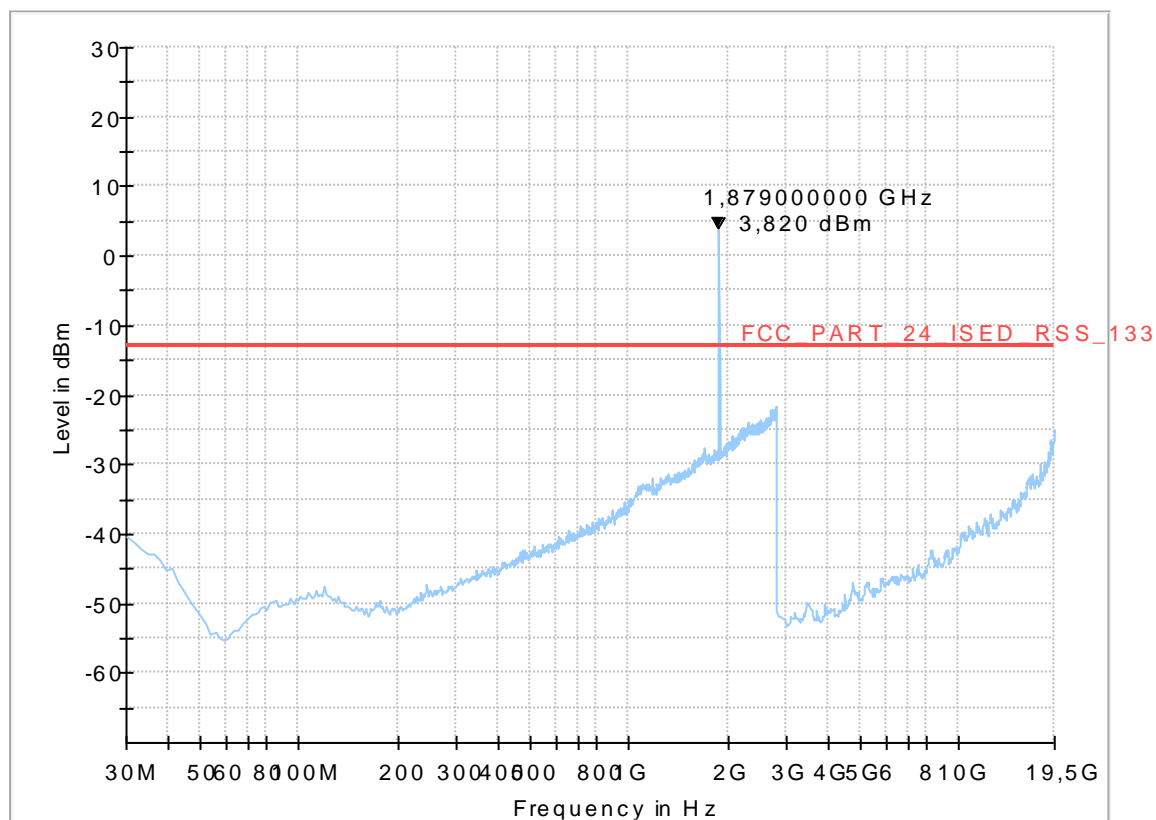

## 8.12-RSE\_R\_Ch810\_GPRS


### Common Information

Test Description:	Radiated emission related to 1m
Test Site:	FAR
Test Standard:	FCC FCC Part 24.238 Broadband PCS
Antenna polarisation:	vertical / horizontal
Operation mode:	TCH 1900, CHANNEL 810
Operator Name:	MBe
Conditions:	Humidity: 50%rH; Temperature: 20°C

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

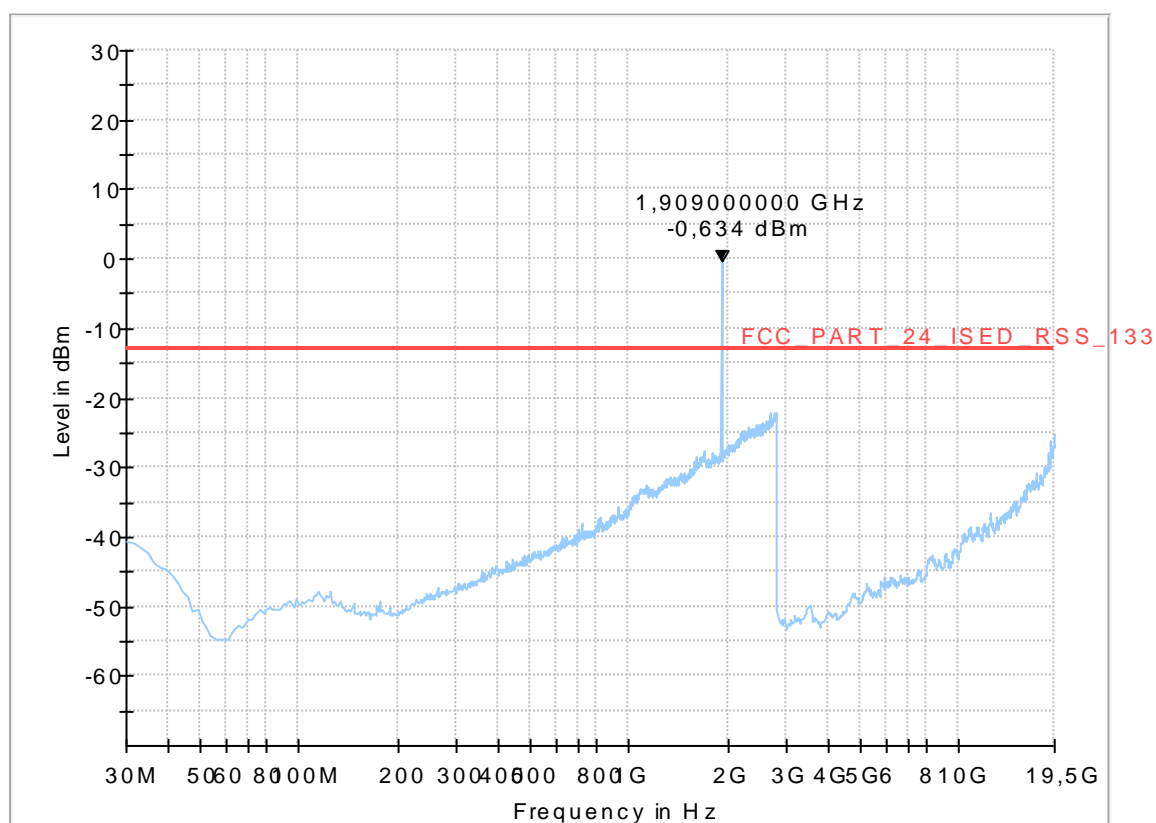

## 1.6. Radiated emissions on 850 MHz transmitting band-edge 9.01-BE\_R\_Ch128\_GPRS

### Common Information


Test Description:	Radiated Band Edge Compliance GSM850
Test Site Location:	CETECOM GmbH Essen
Test Site:	Fully Anechoic Room (FAR)
Test Standard:	FCC Part 22.917
Operating Mode:	MS allocated channel 128 (fc = 824.2MHz), Voice, PCL5 (+33dBm)
Exclusionband:	824 - 849MHz
Environmental Conditions:	Humidity: 50%rH; Temperature: 20°C
Operator:	TFR
Comment:	Channel 128

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001

HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

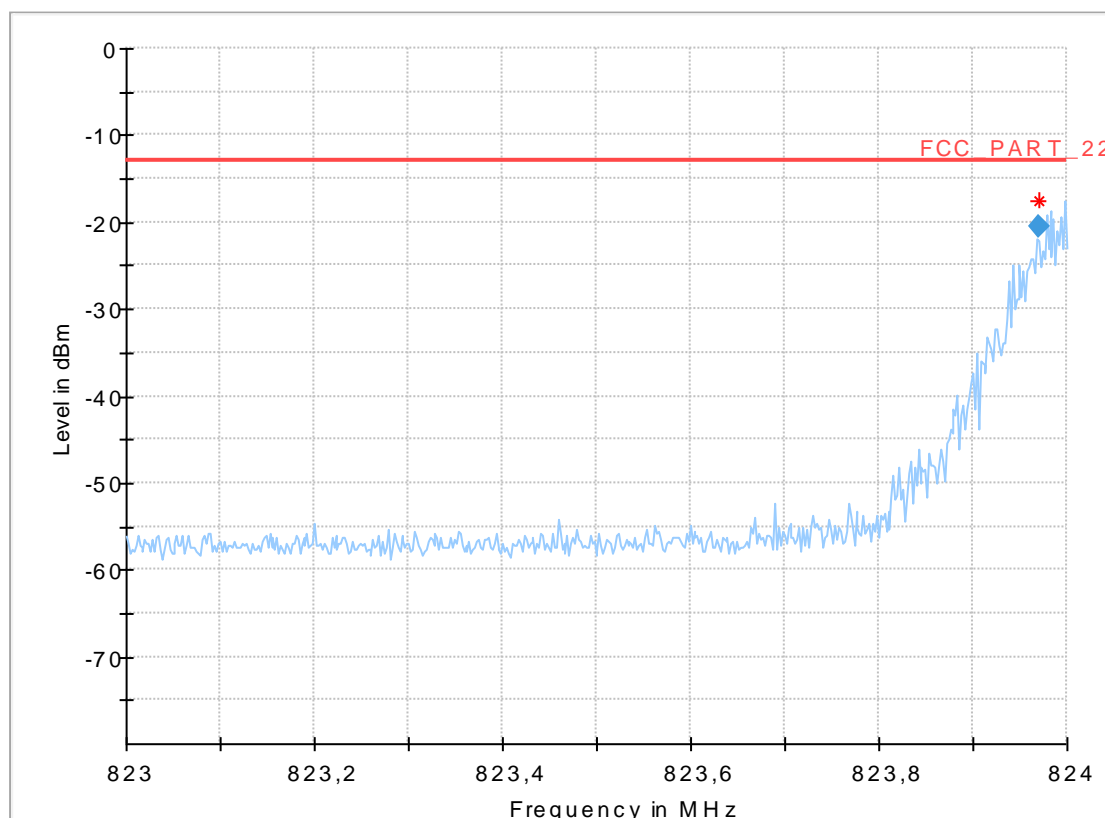

## 9.02-BE\_R\_Ch251\_GPRS


### Common Information

Test Description:	Radiated Band Edge Compliance GSM850
Test Site Location:	CETECOM GmbH Essen
Test Site:	Fully Anechoic Room (FAR)
Test Standard:	FCC Part 22.917
Operating Mode:	MS allocated channel 251 (fc = 848.8MHz), Voice, PCL0 (+33dBm)
Exclusionband:	824 - 849MHz
Environmental Conditions:	Humidity: 50%rH; Temperature: 20°C
Operator:	TFR

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

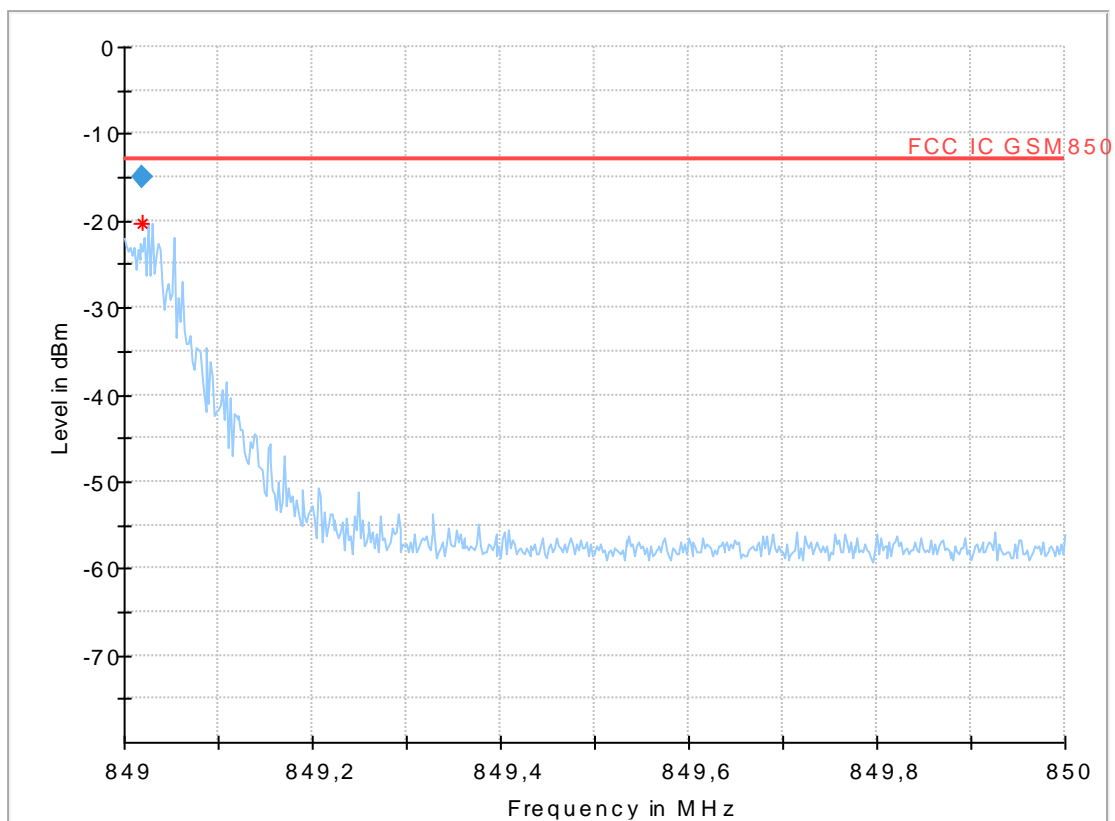



## 1.7. Radiated emissions on 1900 MHz transmitting band-edge

### 9.07-BE\_R\_Ch512\_GPRS


#### Common Information

Test Description:	Radiated Spurious Emissions GSM1900
Test Site Location:	CETECOM GmbH Essen
Test Site:	Fully Anechoic Room (FAR)
Test Standard:	FCC Part 24.238
Comm. Link:	GSM1900
Operating Mode:	MS allocated channel 512 (UL = 1850.2MHz)
Environmental Conditions:	Humidity: 48%rH; Temperature: 20°C
Operator:	MBe

#### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001
-----	
HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

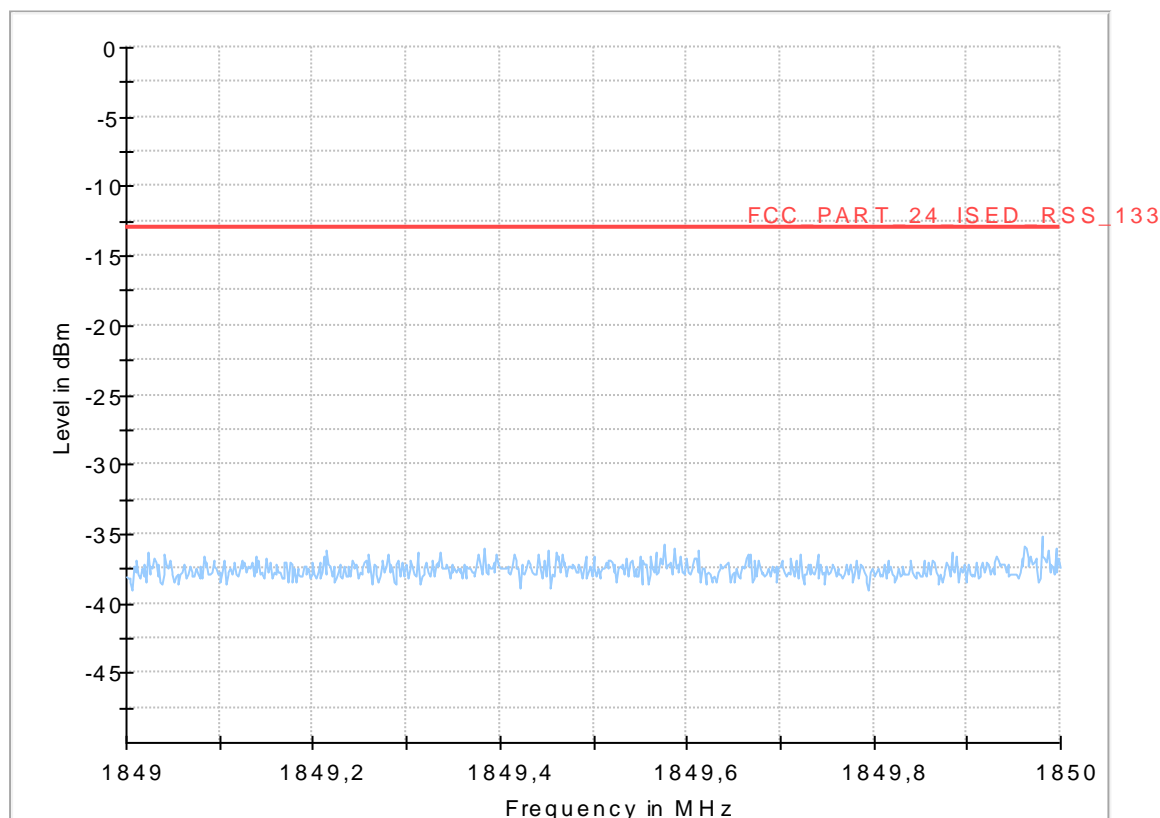

## 9.08-BE\_R\_Ch810\_GPRS

### Common Information

Test Description:	Radiated Spurious Emissions GSM1900
Test Site Location:	CETECOM GmbH Essen
Test Site:	Fully Anechoic Room (FAR)
Test Standard:	FCC Part 24.238
Comm. Link:	GSM1900
Operating Mode:	810 (UL = 1909.8MHz)
Environmental Conditions:	Humidity: 48%rH; Temperature: 20°C
Operator:	MBe

### EUT Information

Manufacturer:	Robert Bosch Car Multimedia GmbH
EuT:	66-10777-001

HW Version:	9134G05
SW Version:	17.02.S.016
Serial Number:	2950006922
Connected Interfaces:	Main wiring + DTNA Antenna
Power Supply:	12 V DC

Full Spectrum

