

Test Report

Report Number:

F200196E4 2nd version

Equipment under Test (EUT):

CTP2019DTNA

Applicant:

Daimler Trucks North America

Manufacturer:

Bosch Car Multimedia Portugal S.A.






Deutsche
Akkreditierungsstelle
D-PL-17186-01-01
D-PL-17186-01-02
D-PL-17186-01-03

References

- [1] **ANSI C63.26: 2015** American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
- [2] **CFR 47 Part 2** Frequency allocations and radio treaty matters; General rules and regulations
- [3] **CFR 47 Part 22** Public mobile services, Subpart H – Cellular Radiotelephone service
- [4] **CFR 47 Part 24** Public mobile services, Subpart E – Broadband PCS
- [5] **CFR 47 Part 27** Miscellaneous wireless communications services
- [6] **RSS-Gen Issue 5** General Requirements for Compliance of Radio Apparatus
- [7] **RSS-130 Issue 2** Equipment Operating in the Frequency Bands 617-652 MHz, 663-698 MHz, 698-756 MHz and 777-787 MHz
- [8] **RSS-132 Issue 3** Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
- [9] **RSS 133 Issue 6, Amendment 1** 2 GHz Personal Communications Services
- [10] **RSS 139 Issue 3** Advanced Wireless Services (AWS) Equipment Operating in the Bands 1710-1780 MHz and 2110-2180 MHz

Test Result

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test. The complete test results are presented in the following.

Tested and written by:	Mohamed Yassine KHALEK Name	 Signature	28.10.2020 Date
Reviewed and approved by:	Bernd STEINER Name 	 Signature	28.10.2020 Date

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:	Page
1 Identification	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Test Laboratory	5
1.4 EUT (Equipment under Test)	6
1.5 Technical Data of Equipment	7
1.6 Dates	9
2 Operational States	10
3 Additional Information	13
4 Overview.....	13
5 Overview.....	14
6 Results of radiated spurious emissions.....	14
6.1 Method of measurement	14
6.2 Radiated spurious emissions results:.....	16
6.2.1 Radiated spurious emissions GSM 850	17
6.2.2 Radiated spurious emissions PCS1900	21
6.2.3 Radiated spurious emissions UMTS Band 2.....	24
6.2.4 Radiated spurious emissions UMTS Band 4.....	28
6.2.5 Radiated spurious emissions UMTS Band 5.....	32
6.2.6 Radiated spurious emissions LTE Band 2	36
6.2.7 Radiated spurious emissions LTE Band 4	40
6.2.8 Radiated spurious emissions LTE Band 5	44
6.2.9 Radiated spurious emissions LTE Band 7	48
6.2.10 Radiated spurious emissions LTE Band 17	52
7 Test Equipment used for Tests	56
8 Test Site Validation	58
9 Report History.....	58
10 List of Annexes	58

1 Identification

1.1 Applicant

Name:	Daimler Trucks North America
Address:	4747 N. Channel Ave., 97217 Portland
Country:	United States of America
Name for contact purposes:	Mr. Austin Shinkle
Phone:	+1 (503) 745-6610
eMail address:	austin.shinkle@daimler.com
Applicant represented during the test by the following person:	none

1.2 Manufacturer

Name:	Bosch Car Multimedia Portugal S.A.
Address:	Rua Max Grundig, 35 – Lomar 4705-820 Braga
Country:	Portugal
Name for contact purposes:	Elisei Vieira
Phone:	+351(253)30-6307
eMail address:	Eliseu.Viera@pt.bosch.com
Applicant represented during the test by the following person:	none

1.3 Test Laboratory

The tests were carried out by: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

Accredited by Deutsche Akkreditierungsstelle GmbH (DAkKS) in compliance with DIN EN ISO/IEC 17025 under Reg. No. D-PL-17186-01-06 and D-PL-17186-01-05, FCC Test Firm Designation Number DE0004, FCC Test Firm Registration Number 469623, CAB Identifier DE0003 and ISED# 3469A.


1.4 EUT (Equipment under Test)

Type of equipment: *	Common Telematic Platform
PMN: *	CTP2019DTNA
HVIN: *	CTP2019DTNA
Order number: *	A0004469060
Serial number: *	3780006039
FCC ID: *	2AKC8CTP13933001
ISED certification number: *	22221-CTP13933001
PCB identifier: *	n.a.
Hardware version: *	2795H04
Software version: *	19.01.D.027

* Declared by the applicant

n.a. not available

Note: PHOENIX TESTLAB GmbH does not take samples. The samples used for tests are provided exclusively by the applicant.

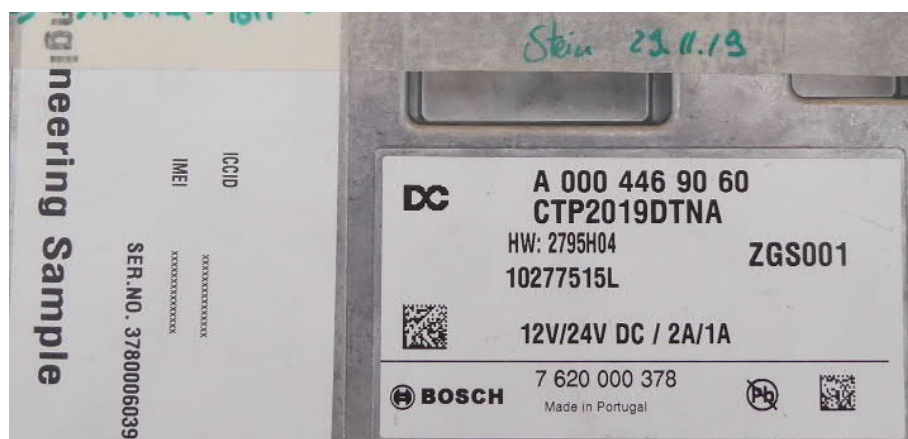

Label of the tested sample

1.5 Technical Data of Equipment

General:

Power supply EUT: *	DC					
Supply voltage EUT: *	U _{nom} =	12 V	U _{min} =	9.6 V	U _{max} =	24 V
Temperature range: *	-40 °C– +80 °C					
Lowest / highest internal clock frequency: *	n.a.					

Cellular module:

Manufacturer:	ublox					
Model name: *	TOBY-L200-03S-01					
Power supply module: *	by host					
Supply voltage module: *	U _{nom} =	n.a.	U _{min} =	n.a.	U _{max} =	n.a.
Serial Number: *	n.a.					
IMEI: *	358661100011292					
Supported bands: *	2G: 850 MHz, 900 MHz, 1800 MHz, 1900 MHz 3G Band support: 1, 2, 4, 5, 8 4G Band support: 2, 4, 5, 7, 17					
Max. output power: *	GSM 850/ E-GSM 900: Power Class 4 (33 dBm) / Power Class E2 (27 dBm) DCS 1800/ PCS 1900: Power Class 1 (30 dBm) / Power Class E2 (26 dBm) UMTS/HSDPA/HSUPA: Power Class 3 (24 dBm) LTE (23 dBm)					
Antenna type: *	Ant. 1: External antenna TX/RX Ant.2: External antenna RX only (diversity)					
Antenna name: *	Ant.1: 66-03942-002 Ant 2: 66-11663-000					
Antenna connector: *	FAKRA					
Antenna gain: *	0 dBi typical					

GNSS module:

Manufacturer: *	ublox				
Model name: *	NEO-M8				
Power supply module: *	by host				
Supply voltage module: *	U _{nom} =	n.a.	U _{min} =	n.a.	U _{max} = n.a.
Supported GNSS: *	GNSS		GNSS Signals		
	BeiDou	<input checked="" type="checkbox"/> B1			
	Galileo	<input checked="" type="checkbox"/> E1	<input type="checkbox"/> E5a	<input type="checkbox"/> E5b	<input type="checkbox"/> E6
	GLONASS	<input checked="" type="checkbox"/> L1	<input type="checkbox"/> G2		
	GPS	<input checked="" type="checkbox"/> L1	<input type="checkbox"/> L2	<input type="checkbox"/> L5	
	SBAS	<input checked="" type="checkbox"/> L1		<input type="checkbox"/> L5	
Antenna type: *	External antenna				
Antenna name: *	66-03942-002				
Antenna connector: *	FAKRA				
Antenna gain: *	Max. + 2 dBi				

Bluetooth / WLAN module:

Manufacturer: *	ALPS				
Model name: *	UGKZ7A1001A				
Power supply module: *	by host				
Supply voltage module: *	U _{nom} =	3.3 V DC	U _{min} =	3.0 V DC	U _{max} = 3.6 V DC
Fulfils BT / WLAN specification: *	BT / BTLE / WLAN IEEE 802.11 b/g/n HT20				
Antenna type: *	External Antenna				
Antenna name: *	A66-12157-000				
Antenna connector: *	FAKRA				
Antenna gain: *	0 dBi				

* Declared by the applicant

Ports / Connectors				
Identification	Connector		Length during test	Shielding (Yes / No)
	EUT	Ancillary		
DC/Data Harness	Customized port	DC Laboratory plug used for power supply/ Other wires left open	3.60 m	No
USB	Micro USB port, type B	USB plug, type A	3.00 m	Yes
WLAN antenna port	FAKRA plug	WLAN antenna	30 cm	Yes
GPS antenna port	FAKRA plug	GPS/cellular antenna	3.60 m	Yes
Cellular antenna ANT 1	FAKRA plug	GPS/cellular antenna	3.60 m	Yes
Cellular antenna ANT 2	FAKRA plug	Cellular antenna	3.60 m	Yes
SIM plug	SIM plug	-	-	-
Ancillary Equipment				
Laptop: *1	Fujitsu Lifebook S26391-K321-V100, S.No.: DSCC039741			

*1 Provided by the laboratory

1.6 Dates

Date of receipt of test sample:	02.03.2020
Start of test:	26.03.2020
End of test:	14.05.2020

2 Operational States

The operation mode of the equipment under test during the emission tests was defined as follows:

GSM850 GPRS data connection

- Downlink channel 189 (881.4 MHz),
- Uplink channel 661 (836.4 MHz),
- BS-Power -70 dBm; Mobile-Power 30 dBm; Packet switched, GPRS.

PCS1900 GPRS data connection

- Downlink channel 661 (1960.0 MHz),
- Uplink channel 661 (1880.0 MHz),
- BS-Power -70 dBm; Mobile-Power 30 dBm; Packet switched, GPRS.

UMTS band 2

- Downlink channel UARFCN 900 (1960.0 MHz),
- Uplink channel UARFCN 18900 (1880.0 MHz),
- BS-Power -70 dBm; Mobile-Power 24 dBm; Mode PRBS9.

UMTS band 4

- Downlink channel UARFCN 1637 (2132.4 MHz),
- Uplink channel UARFCN 1412 (1732.4 MHz),
- BS-Power -85 dBm; Mobile-Power 24 dBm; Mode PRBS9.

UMTS band 5

- Downlink channel UARFCN 4407 (881.4 MHz),
- Uplink channel UARFCN 4182 (836.4 MHz),
- BS-Power -85 dBm; Mobile-Power 24 dBm; Mode PRBS9.

LTE band 2

- Downlink channel UARFCN 900 (1960.0 MHz),
- Uplink channel UARFCN 18900 (1880.0 MHz),
- BS-Power -55 dBm; Mobile-Power 23 dBm; Mode PRBS9.

LTE band 4

- Downlink channel UARFCN 1637 (2132.4 MHz),
- Uplink channel UARFCN 1412 (1732.4 MHz),
- BS-Power -55 dBm; Mobile-Power 23 dBm; Mode PRBS9.

LTE band 5

- Downlink channel UARFCN 2524 (881.6 MHz),
- Uplink channel UARFCN 20524 (836.6 MHz),
- BS-Power -55 dBm; Mobile-Power 23 dBm; Mode PRBS9.

LTE band 7


- Downlink channel UARFCN 3100 (2655.0 MHz),
- Uplink channel UARFCN 21100 (2535.0 MHz),
- BS-Power -55 dBm; Mobile-Power 23 dBm; Mode PRBS9.

LTE band 17

- Downlink channel UARFCN 5790 (740.0 MHz),
- Uplink channel UARFCN 23790 (710.0 MHz),
- BS-Power -55 dBm; Mobile-Power 23 dBm; Mode PRBS9.


The EUT has two RF ports for cellular communication with a characteristic impedance of 50 Ω . The primary antenna port (ANT1) supports both Tx and Rx, providing the main antenna interface, while the secondary antenna port (ANT2) supports Rx only for the LTE MIMO 2x2 and 3G Rx diversity configurations.

The system was set up as follows:

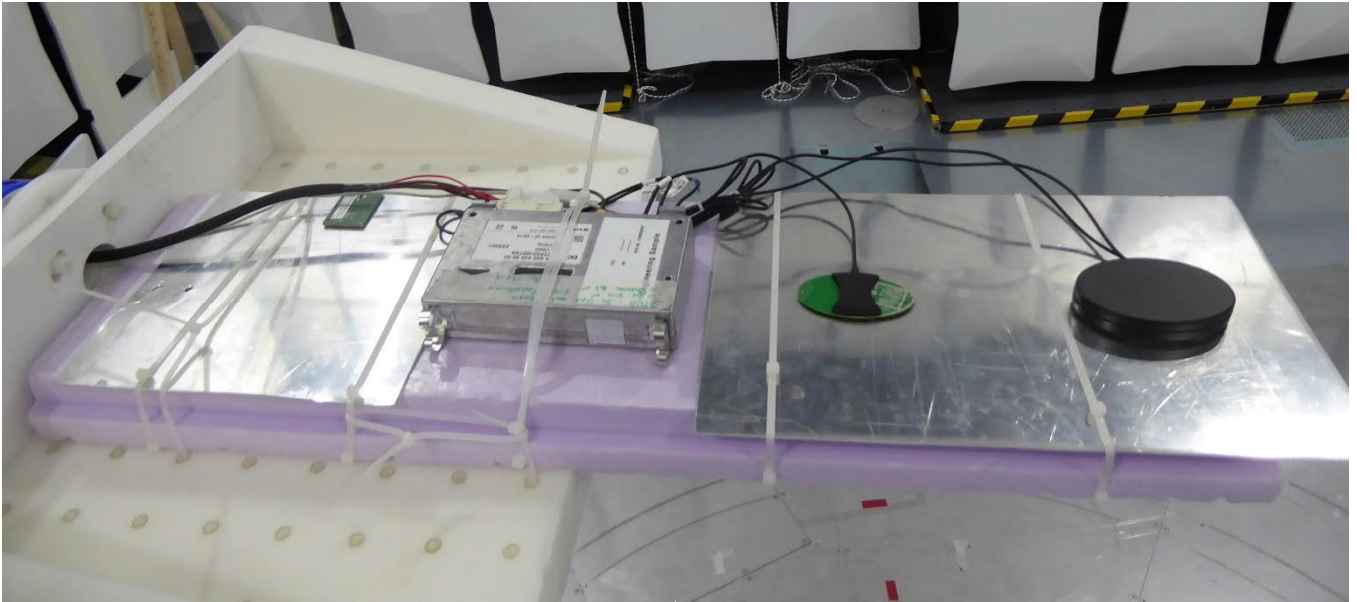

A GSM /LTE connection to the EUT was established by using a Wideband Communication Tester (CMW500). The EUT was connected wireless to the tester via a narrowband antenna.

Additionally, the WIFI module of the EUT was set to transmit in b-mode 11 Mbps on channel 1 with maximum output power to reflect a simultaneous transmission scenario. This has been done by means of a software called "Putty"(Release 0.65) and Labtool (Version 2.0.0.75), provided by the applicant.

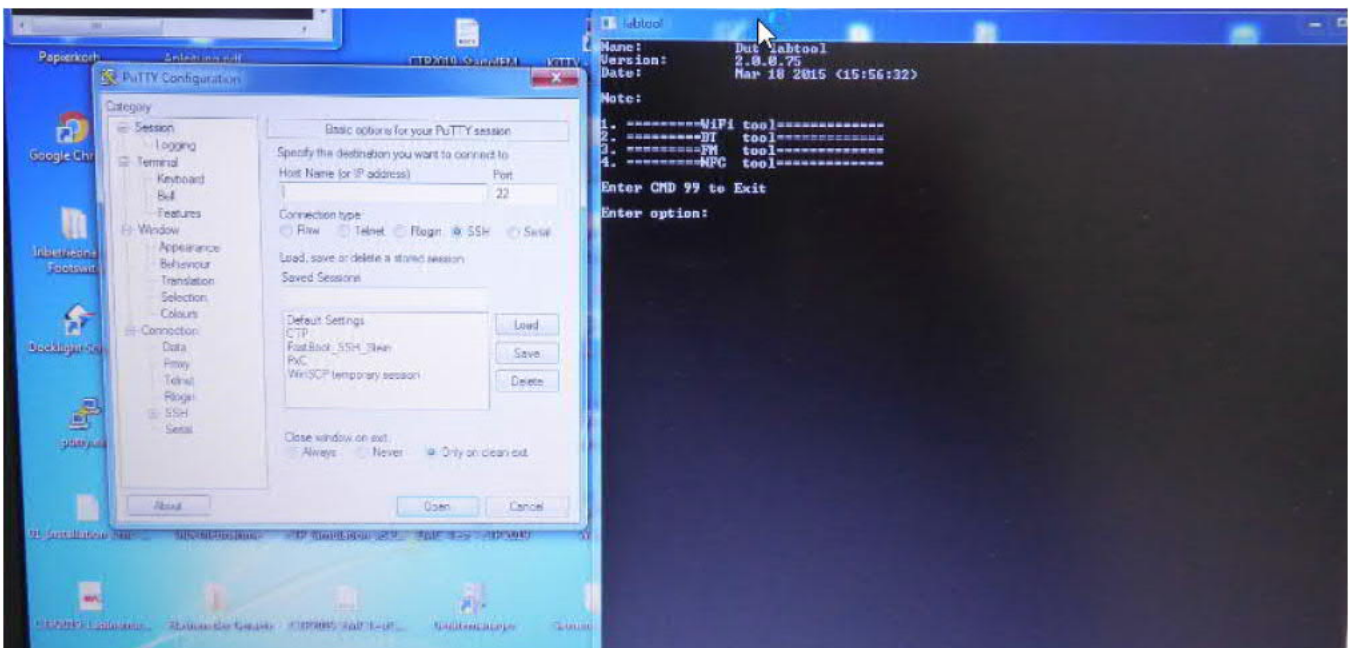

The GPS reception was also active during the measurement.

3 Additional Information

The applicant has applied modifications to the trace design of the cellular RF module and therefore requested retesting of the radiated spurious emissions. The test report includes only worst-case test results for radiated emissions as ordered by the applicant.

4 Overview

Application	Frequency range [MHz]	FCC 47 CFR Part 22 [3], 24 [4], 27 [5] ISED RSSs 130, 132, 133, 139	Status	Refer page
Radiated spurious emissions	30 – 26,500	22.917 (a) (b) 24.238 (a) (b) 27.53 RSS130 §4.7.1 RSS132 §5.5 RSS133 §6.5 RSS 139 §6.6	Passed	17 et seq.

5 Overview

6 Results of radiated spurious emissions

6.1 Method of measurement

The EUT is measured in the frequency range from 30 MHz to 26.5 GHz in a semi anechoic chamber with a metal ground plane, which has been validated to the requirements of ANSI C63.4. It is placed on a 3D-positioner to allow different positions at a distance of 3 meters from the receiving antenna. Both polarizations (vertical and horizontal) have been evaluated and the turn table has been turned to 360° to maximize the emissions. The receiving antenna is raised from 1 to 4m.

The frequency range from 30 MHz to 18 GHz has been tested using the substitution method as described in [1], and the frequency range from 18 to 26.5 GHz has been tested using the field strength method [1]. The measured field strength using the field strength method is then converted to an ERP or EIRP [dBm] using the formula:

$E \text{ [dB}\mu\text{V/m]} = \text{EIRP [dBm]} - 20\log(d) + 104.8$ according to chapter 5.2.7 [1].

→ $\text{EIRP} = E - 95.25$ ($d = 3 \text{ m}$ measuring distance)

$\text{ERP [dBm]} = \text{EIRP} - 2.15 \text{ dB}$

Level (dBm) \triangleq ERP (below 1GHz) or EIRP (above 1 GHz)

Procedure preliminary measurement:

The following procedure is used:

1. Set the measurement antenna to 1 m height.
2. Monitor the frequency range at vertical polarisation and a EUT azimuth of 0°.
3. Rotate the EUT by 360° to maximize the detected signals.
4. Repeat 1) to 2) with the horizontal polarisation of the measuring antenna.
5. Increase the height of the antenna for 0.5 m and repeat steps 2 – 4 until the final height of 4 m is reached.
6. The highest values for each frequency will be saved by the software, including the antenna height, measurement antenna polarization and turntable azimuth for that value.


Procedure final measurement:

The following procedure is used:


1. Select the highest frequency peaks to the limit for the final measurement.
2. The software will determine the exact peak frequencies by doing a partial scan with reduced RBW with +/- 10 times the RBW of the pre-scan of the selected peaks.
3. If the EUT is portable or ceiling mounted, find the worst case EUT position (x,y,z) for the final test.
4. The worst measurement antenna height is found by the measurement software by varying the measurement antenna height by +/- 0.5 m from the value obtained in the preliminary measurement, and to monitor the emission level.
5. The worst azimuth turntable position is found by varying the turntable azimuth by +/- 25° from the value obtained in the preliminary measurement, and to monitor the emission level.
6. The final measurement is performed at the worst-case antenna height and the worst-case turntable azimuth
7. Steps 2 – 6 will be repeated for each frequency peak selected in step 1.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	100 kHz
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 / 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz

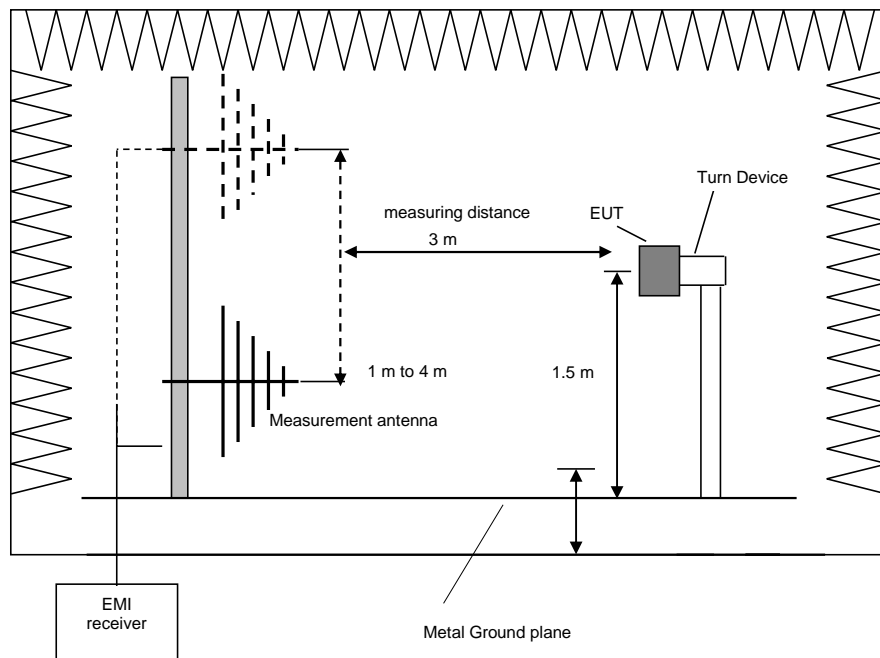

Test setup for measurements below 1 GHz

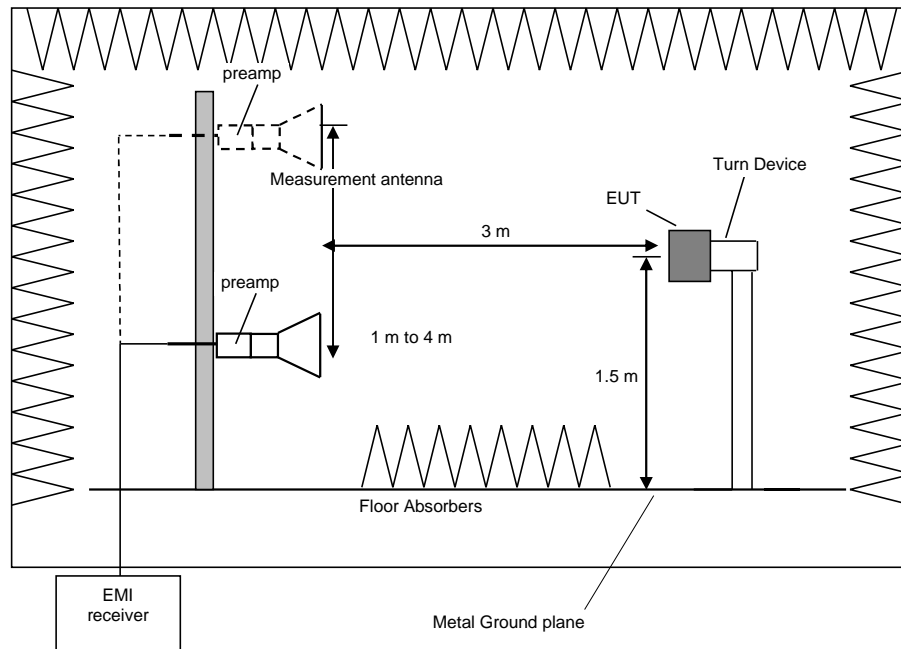

Test setup for measurements above 1 GHz

6.2 Radiated spurious emissions results:

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].

This results into a limit of -13 dBm for all power levels of the UE.

6.2.1 Radiated spurious emissions GSM 850

Ambient temperature:	22 °C
----------------------	-------

Relative humidity:	20 %
--------------------	------

Measurement at uplink channel 189 (uplink channel notched):


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
836.4	Uplink channel, no spurious	
881.4	Downlink channel, no spurious	
2412.0	WLAN Signal, no spurious	
3991.25-	-37.6 (EIRP Noise level)-	-13
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

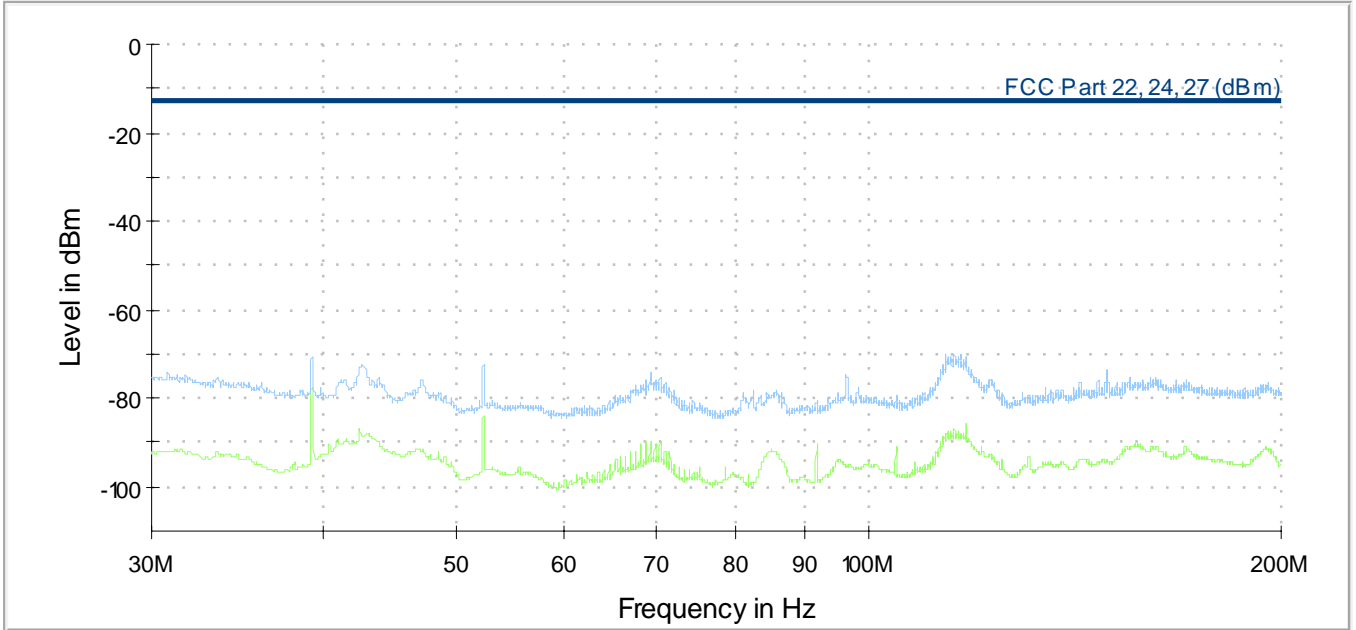


Results 30MHz to 200 MHz

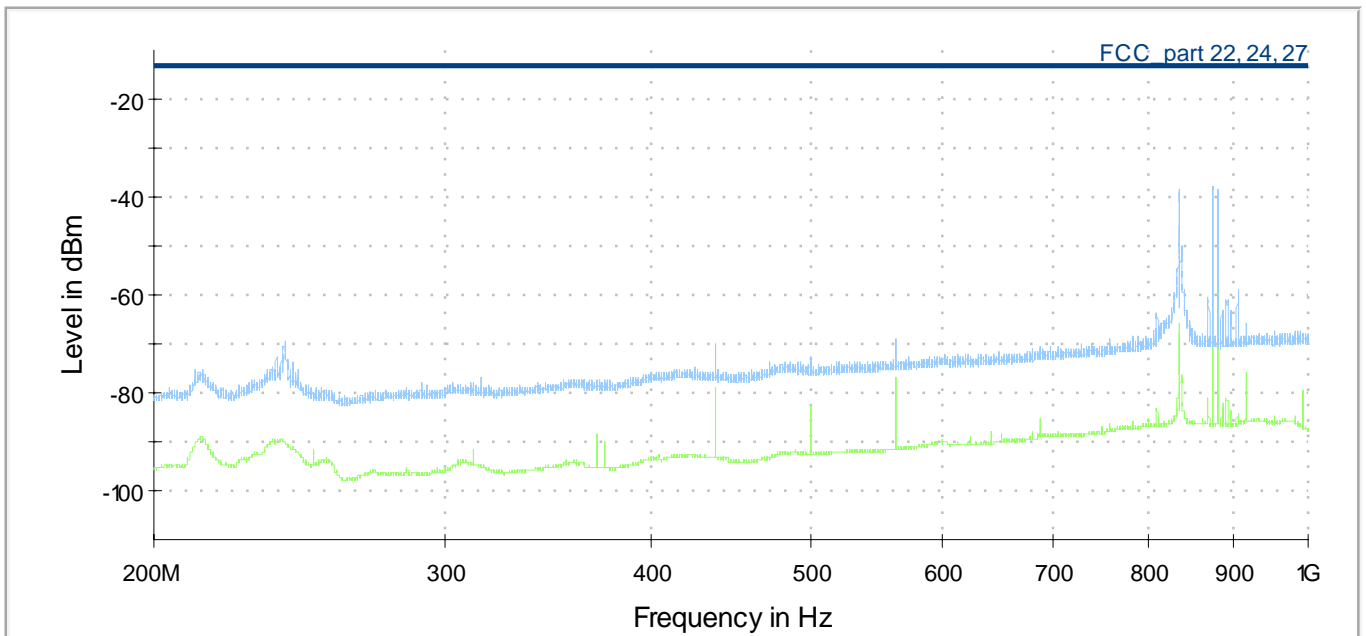


Results 200 MHz to 1 GHz

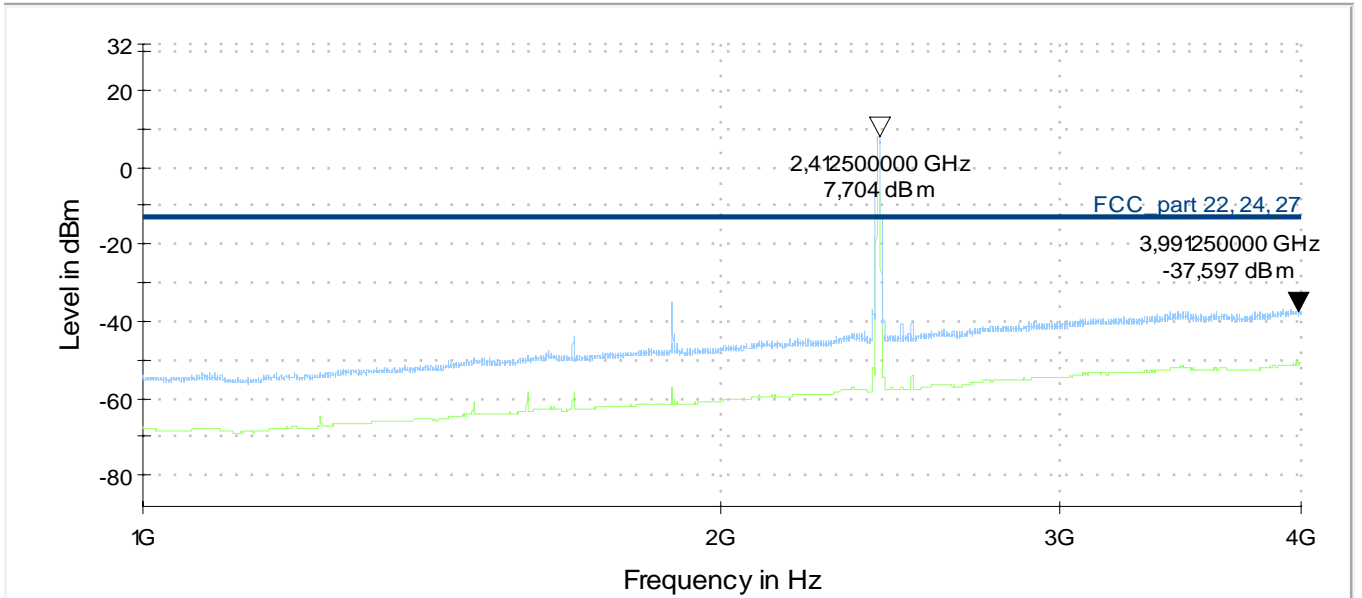

Results 1 to 4 GHz

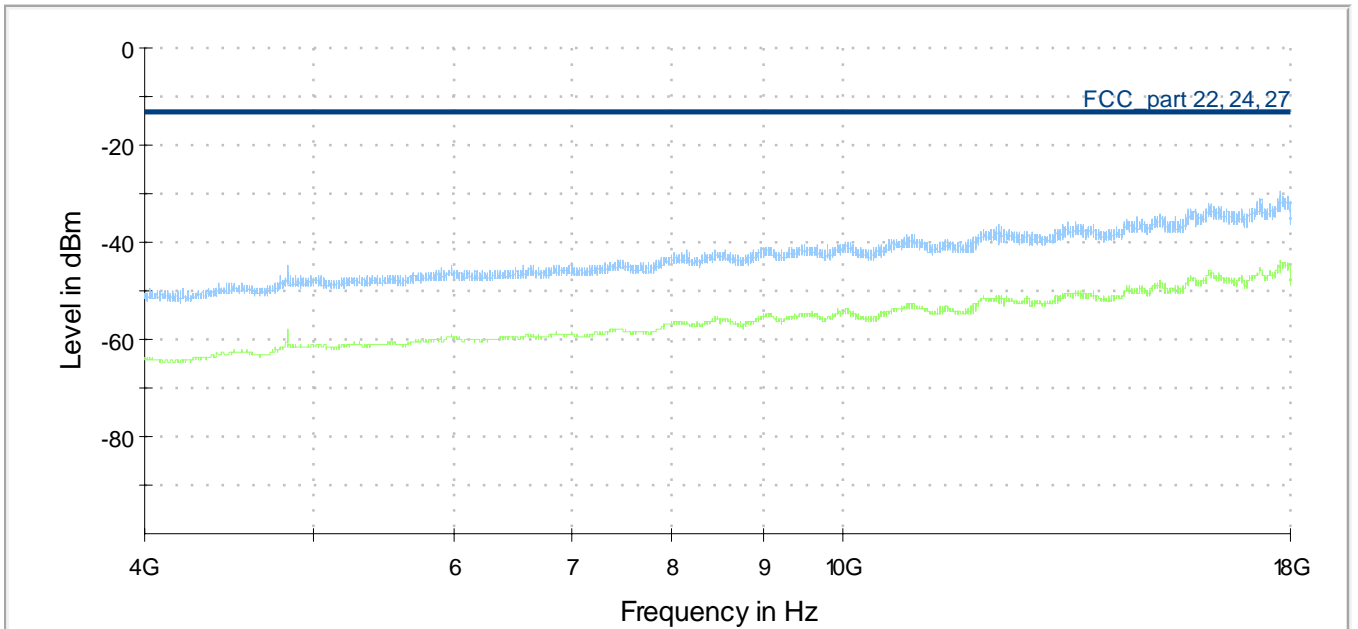

Results 4 to 18 GHz

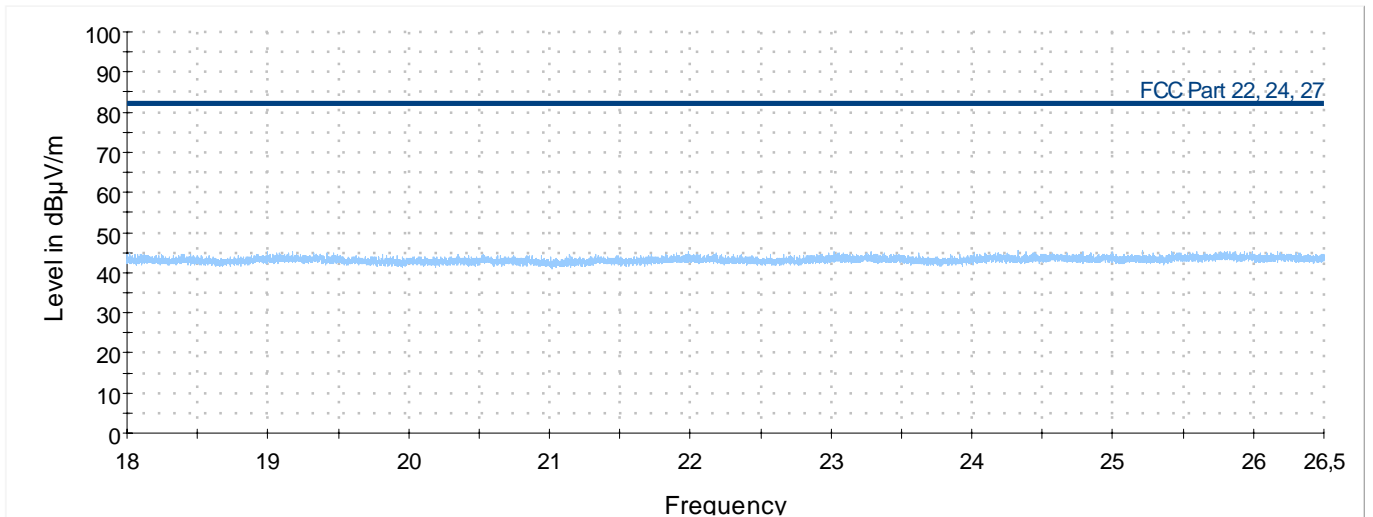

Results 18 to 26.5 GHz

6.2.2 Radiated spurious emissions PCS1900

Ambient temperature:	22 °C
----------------------	-------

Relative humidity:	20%
--------------------	-----

Measurement at uplink channel 661 (uplink channel notched):


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
1880	Uplink channel, no spurious	
1960.0	Downlink channel, no spurious	
2412.0	WLAN Signal, no spurious	
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

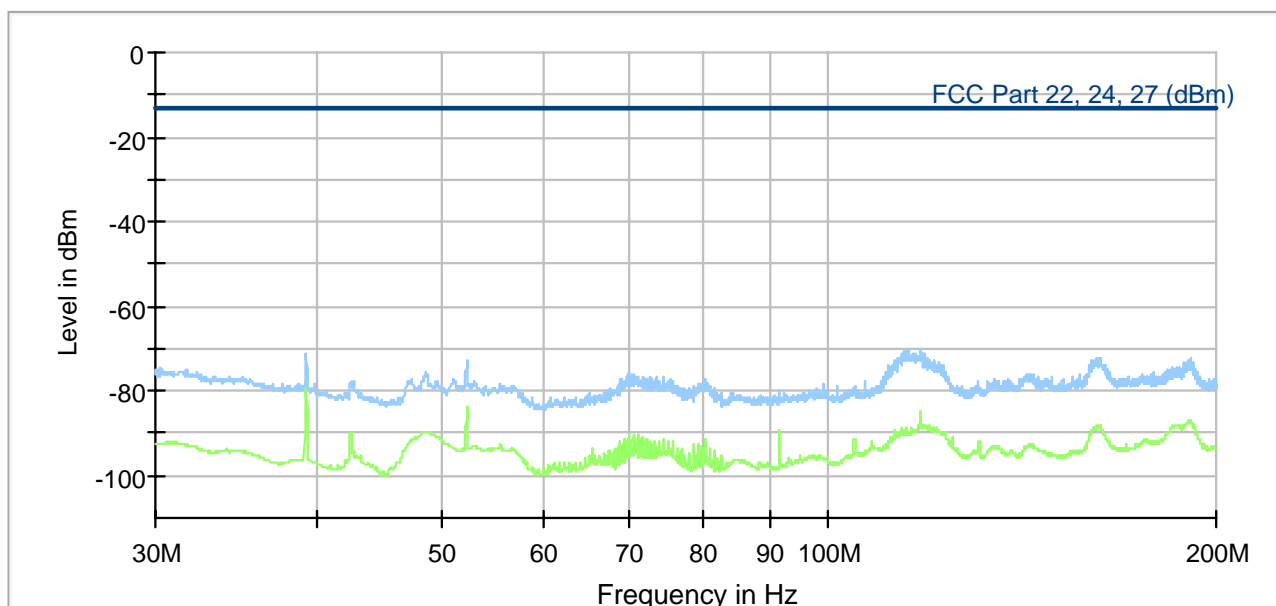


Results 30 MHz to 200 MHz

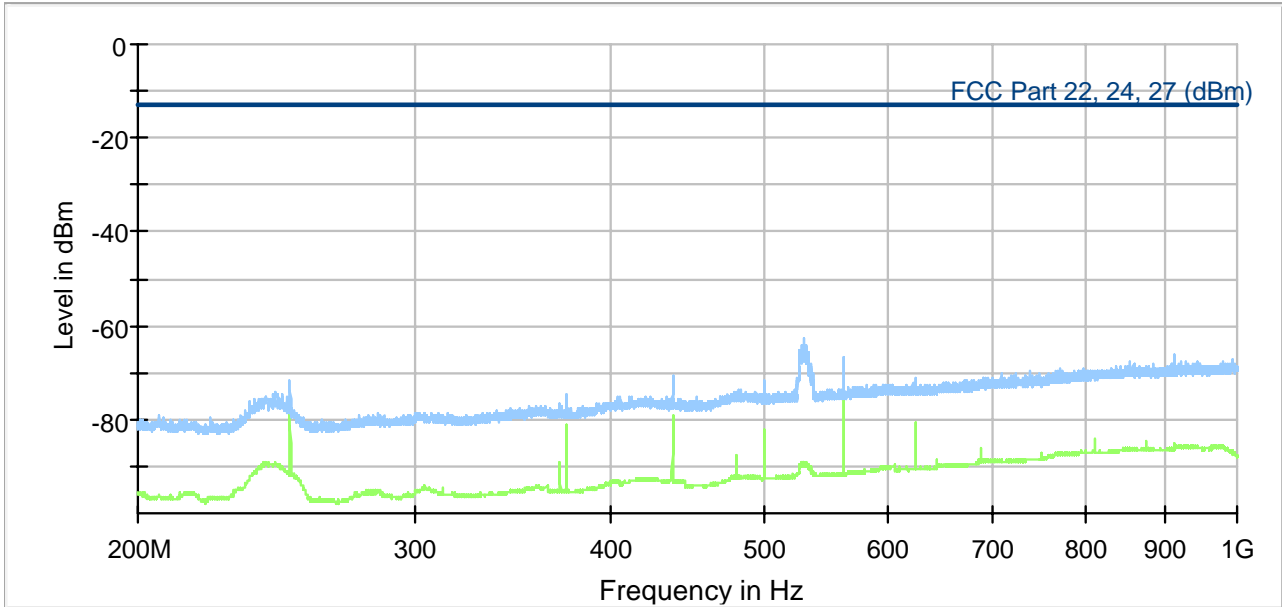


Results 200 MHz to 1 GHz

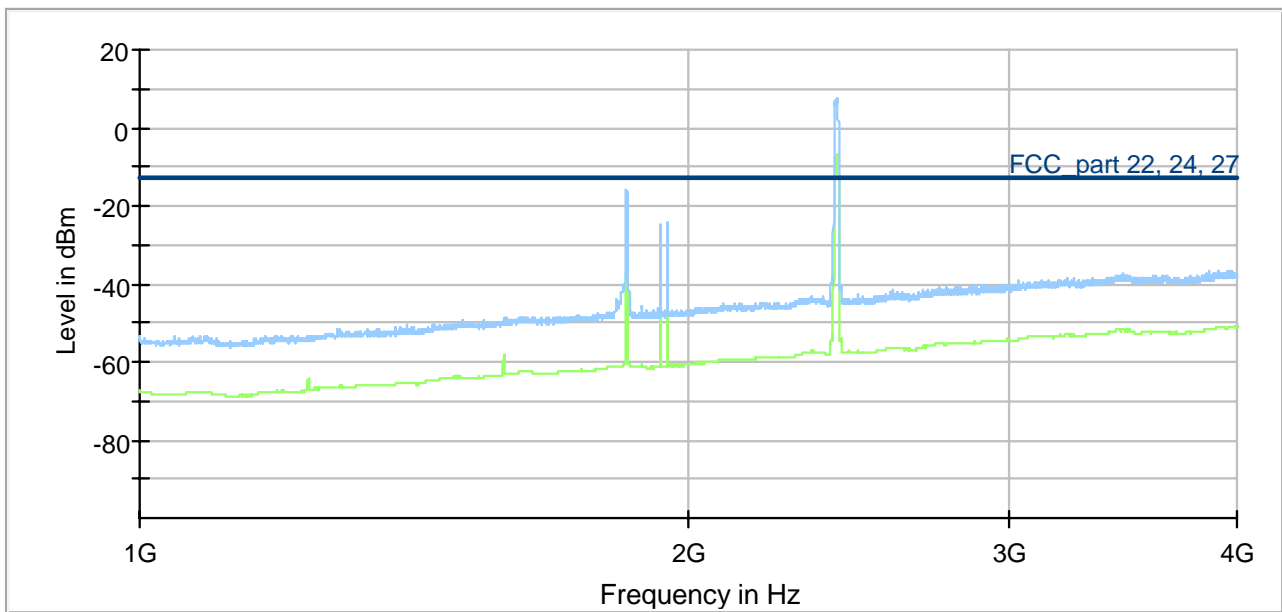

Results 1 to 4 GHz

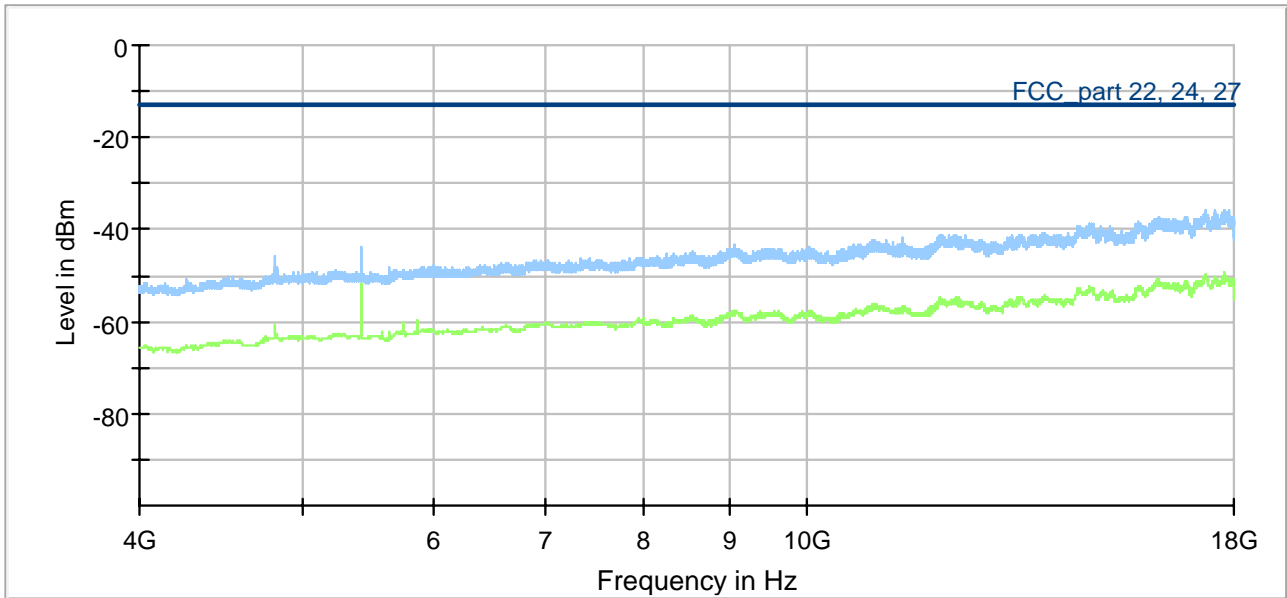

Results 4 to 18 GHz

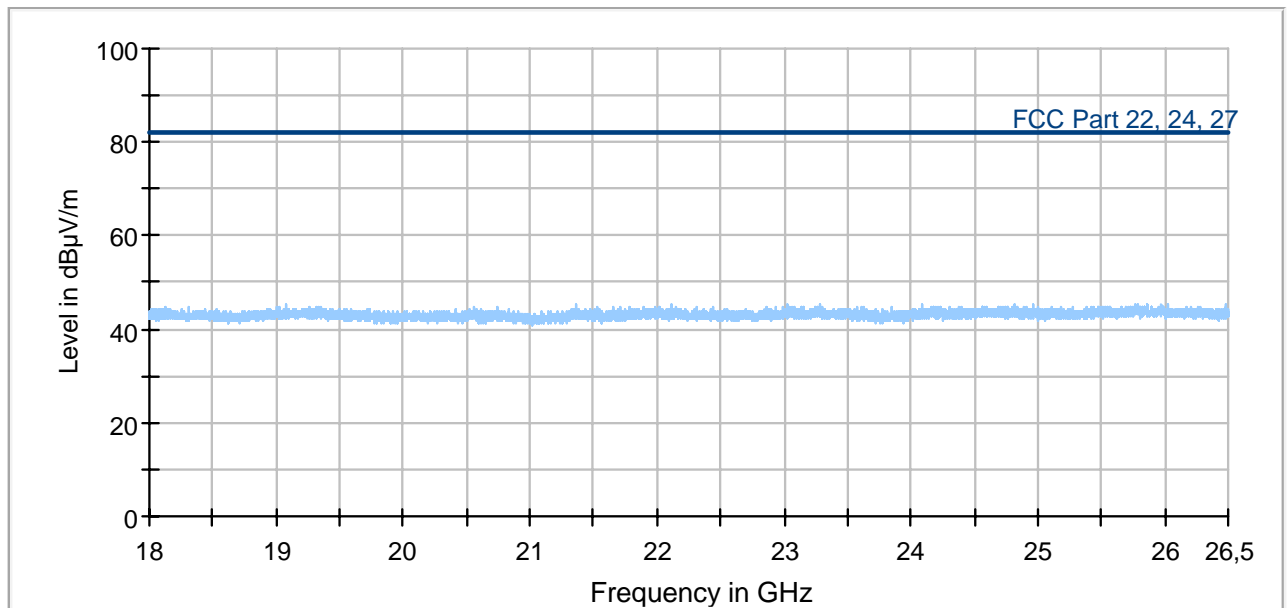

Results 18 to 26.5 GHz

6.2.3 Radiated spurious emissions UMTS Band 2

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 9400 (uplink channel notched):


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
1880.0	Uplink channel, no spurious	
1960.0	Downlink channel, no spurious	
2412.0	WLAN Signal, no spurious	
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

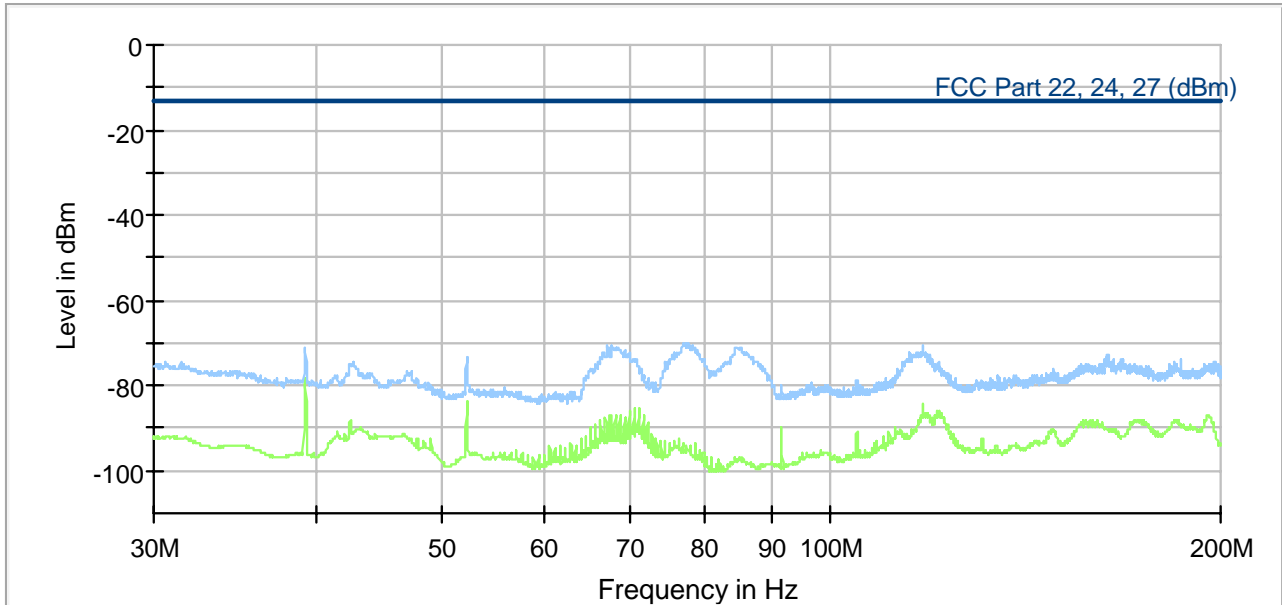


Results 30 MHz to 200 MHz

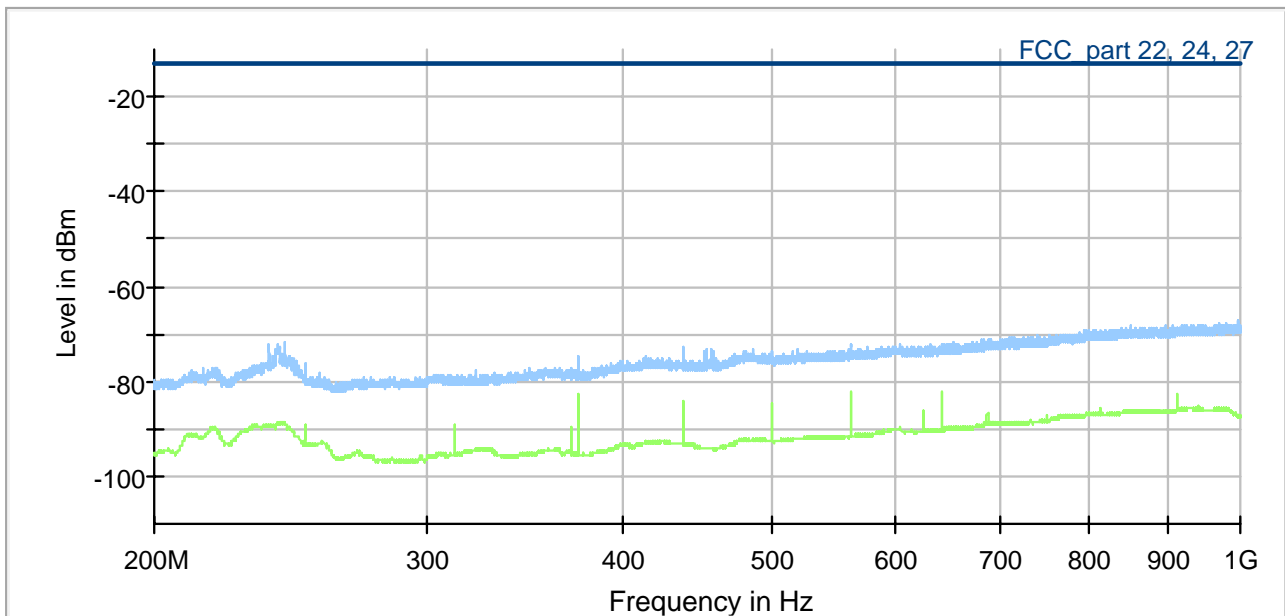


Results 200MHz to 1 GHz

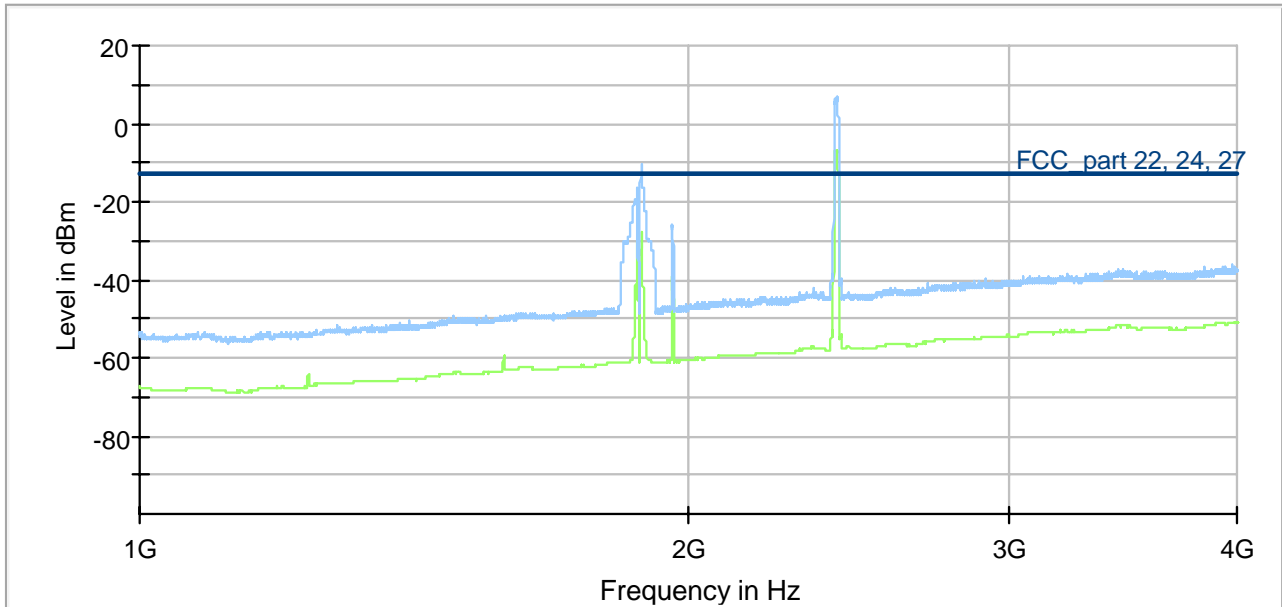

Results 1 to 4 GHz

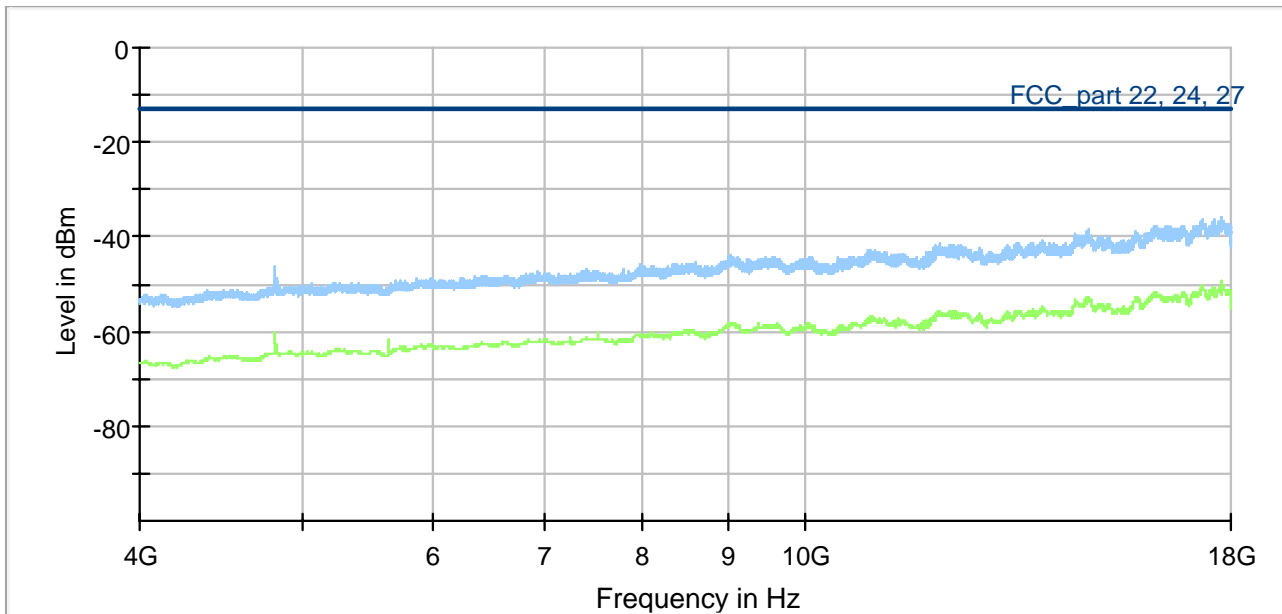

Results 4 to 18 GHz

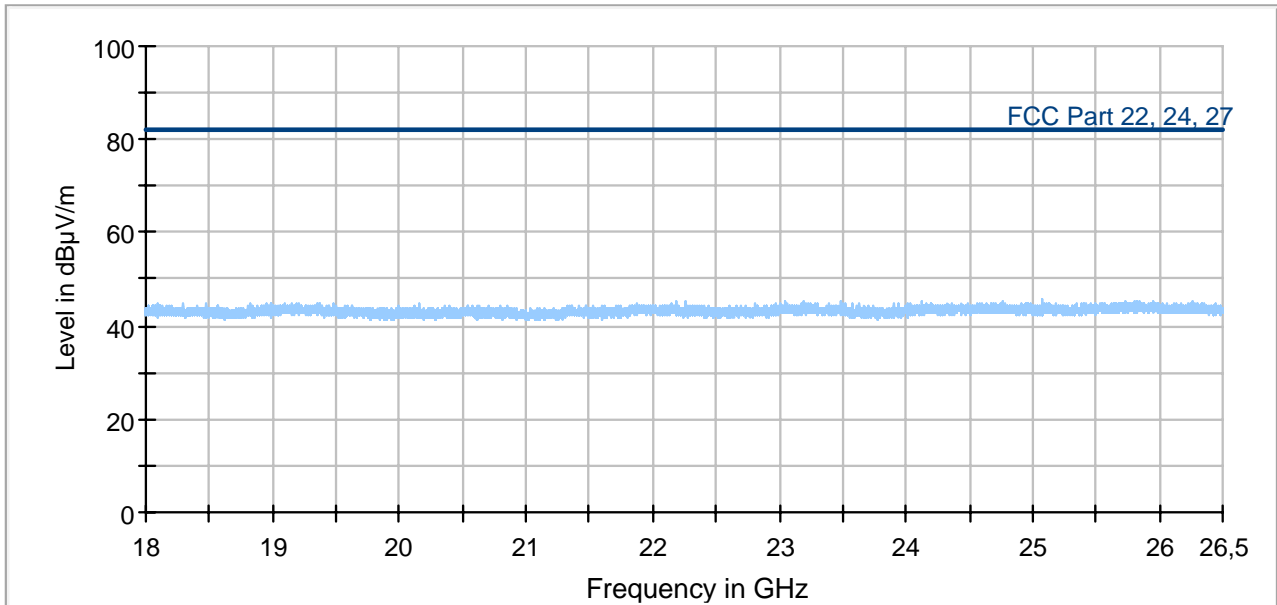

Results 18 GHz to 26.5 GHz

6.2.4 Radiated spurious emissions UMTS Band 4

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 1412 (uplink channel notched):

f (MHz)	Level (dBm)	Limit (dBm)
1732.4	Uplink channel, no spurious	
2132.4	Downlink channel, no spurious	
2412.0	WLAN Signal, no spurious	
Measurement uncertainty: +2.2 dB / -3.6 dB		


Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].

This results into a limit of -13 dBm for all power levels of the UE.


All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.

Test equipment (please refer to chapter 6 for details)
1 - 29


Full Spectrum

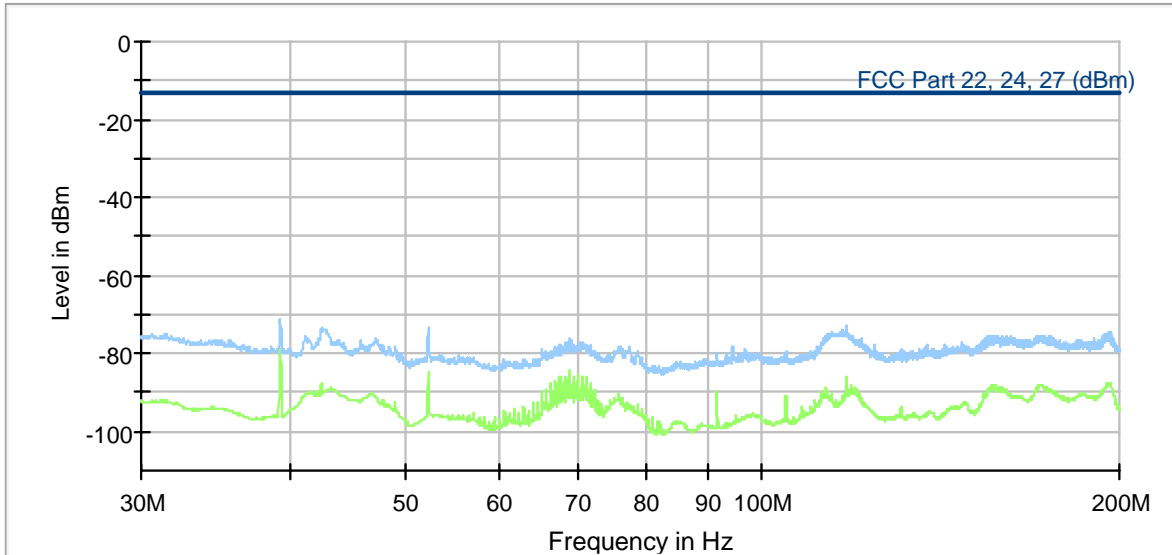


Results 30 MHz to 200 MHz

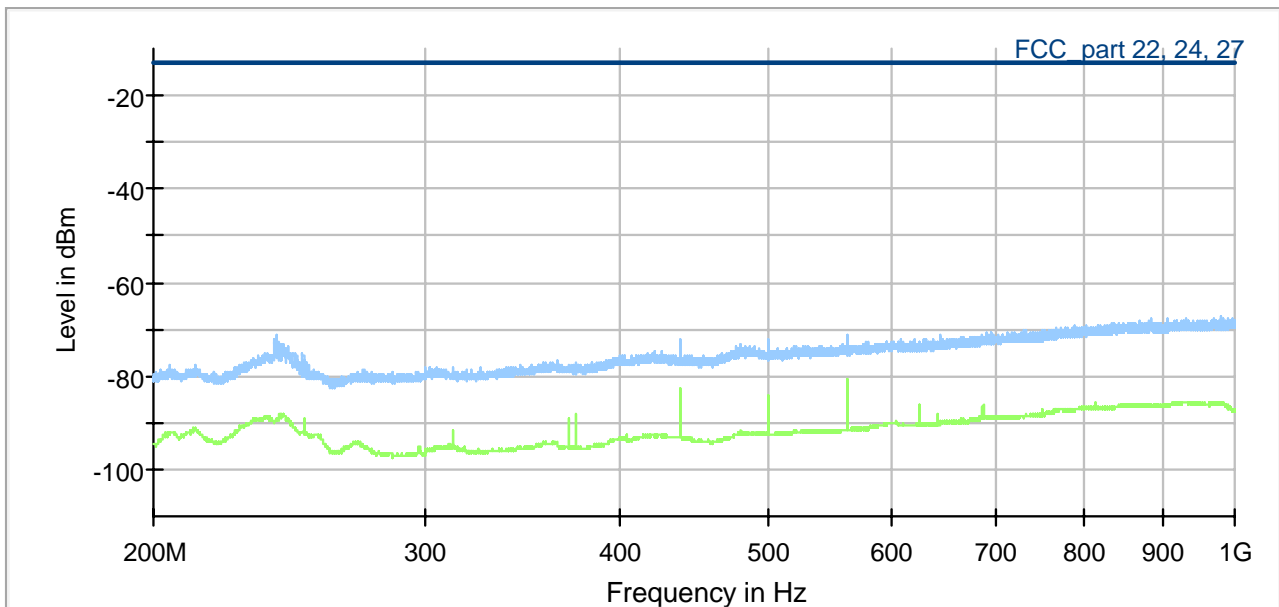


Results 200 MHz to 1 GHz

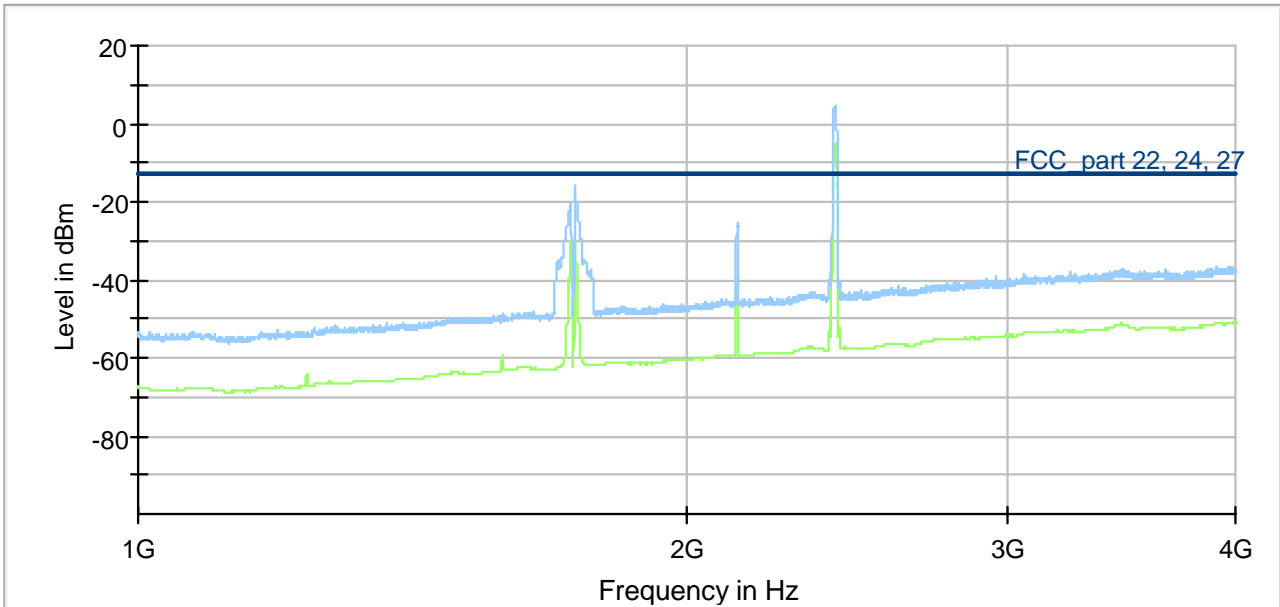

Results 1 to 4 GHz

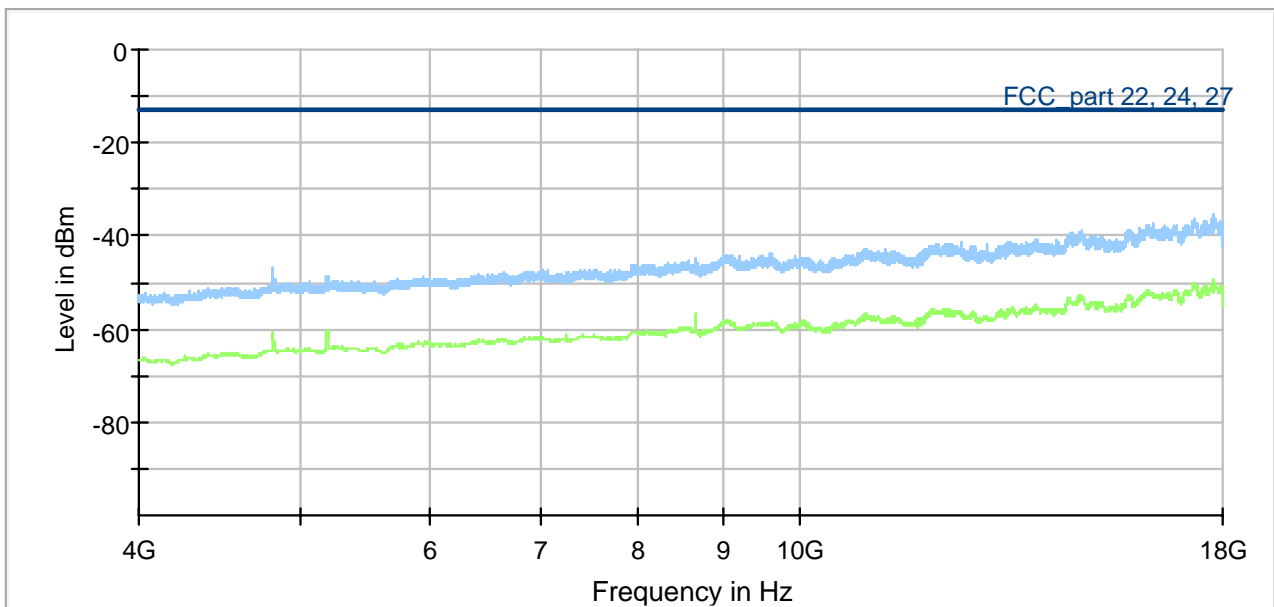

Results 4 to 18 GHz

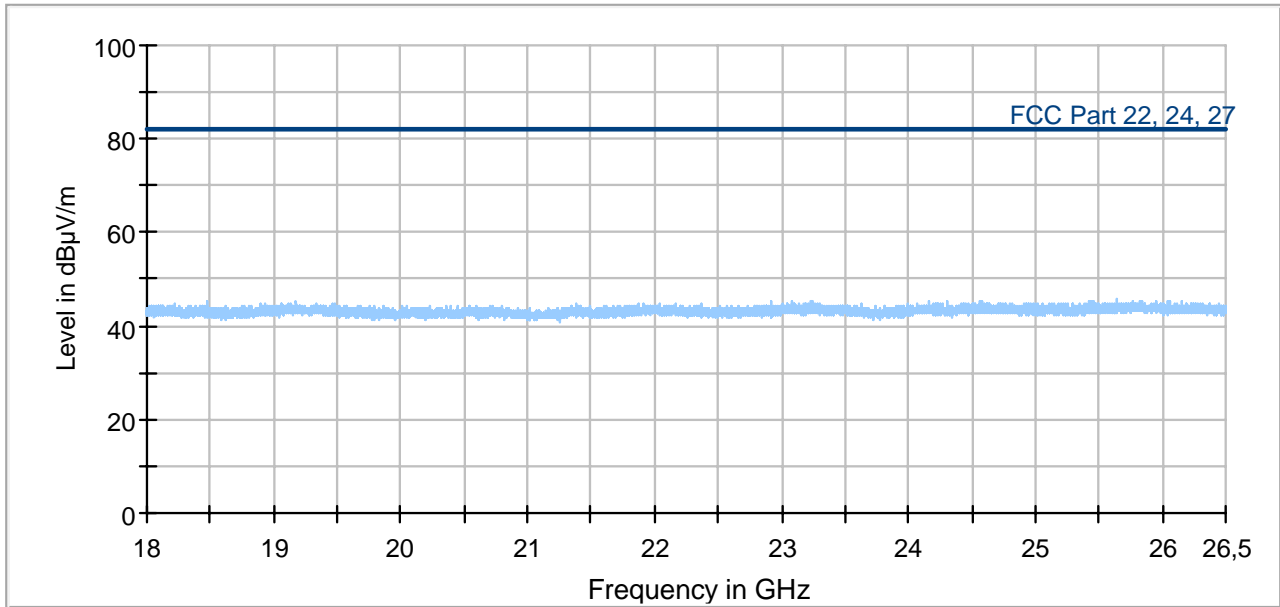

Results 18 GHz to 26.5 GHz

6.2.5 Radiated spurious emissions UMTS Band 5

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 4182 (uplink channel notched):


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
836.4	Uplink channel, no spurious	
881.4	Downlink channel, no spurious	
2412	WLAN Signal, no spurious	
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

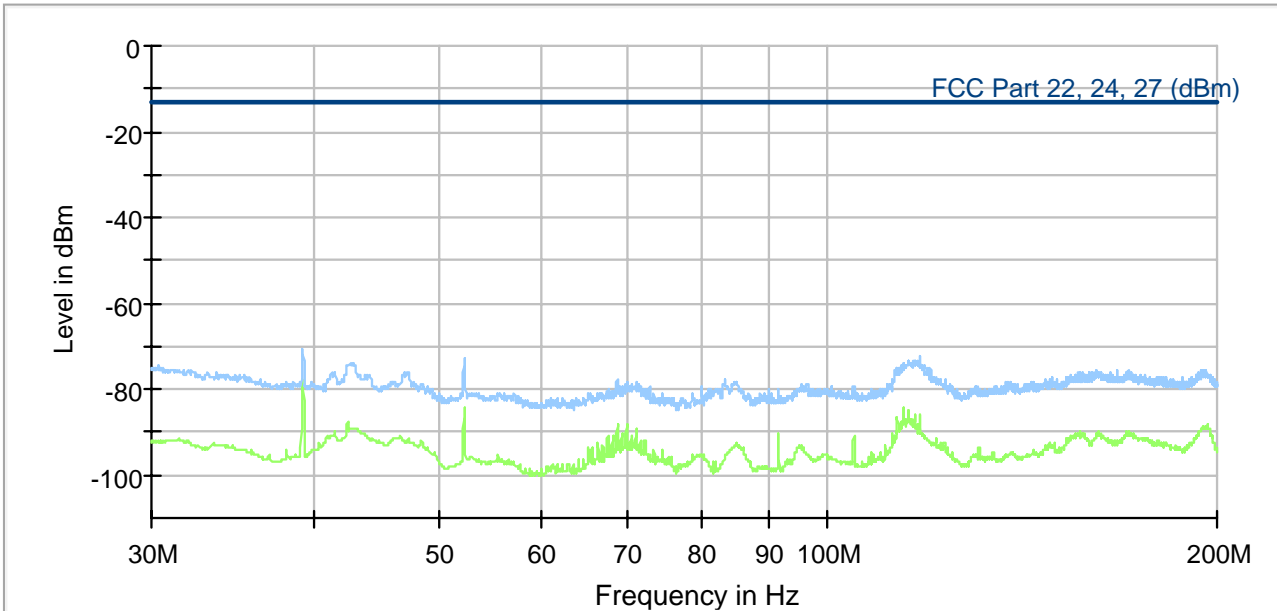


Results 30 MHz to 200 MHz

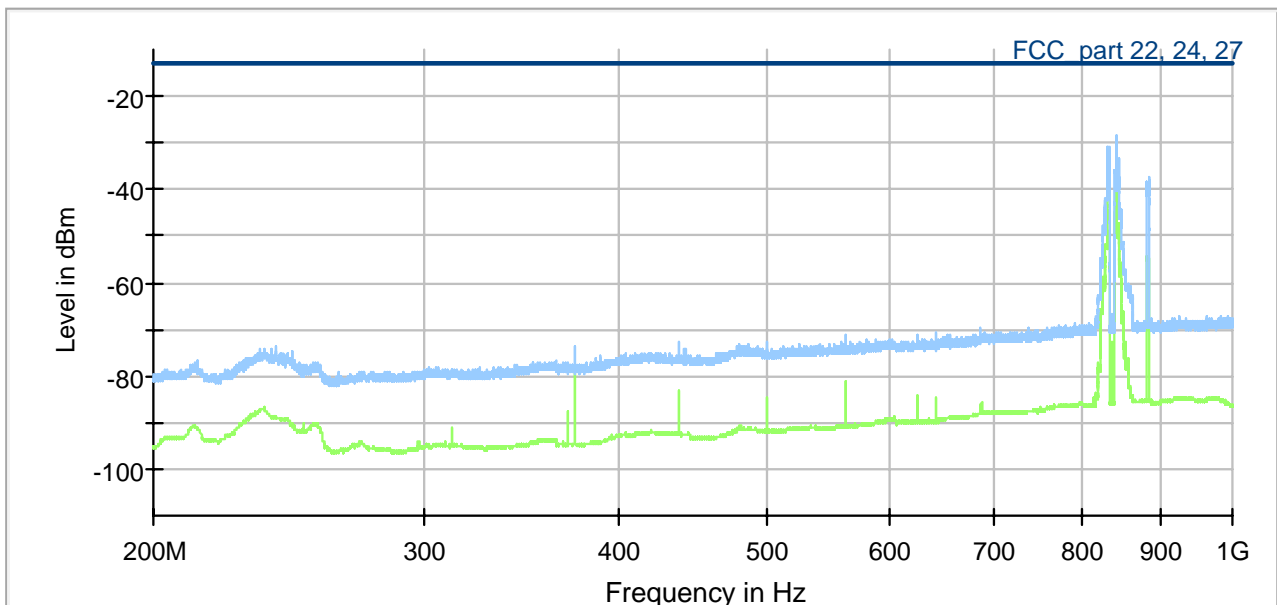


Results 200 MHz to 1 GHz

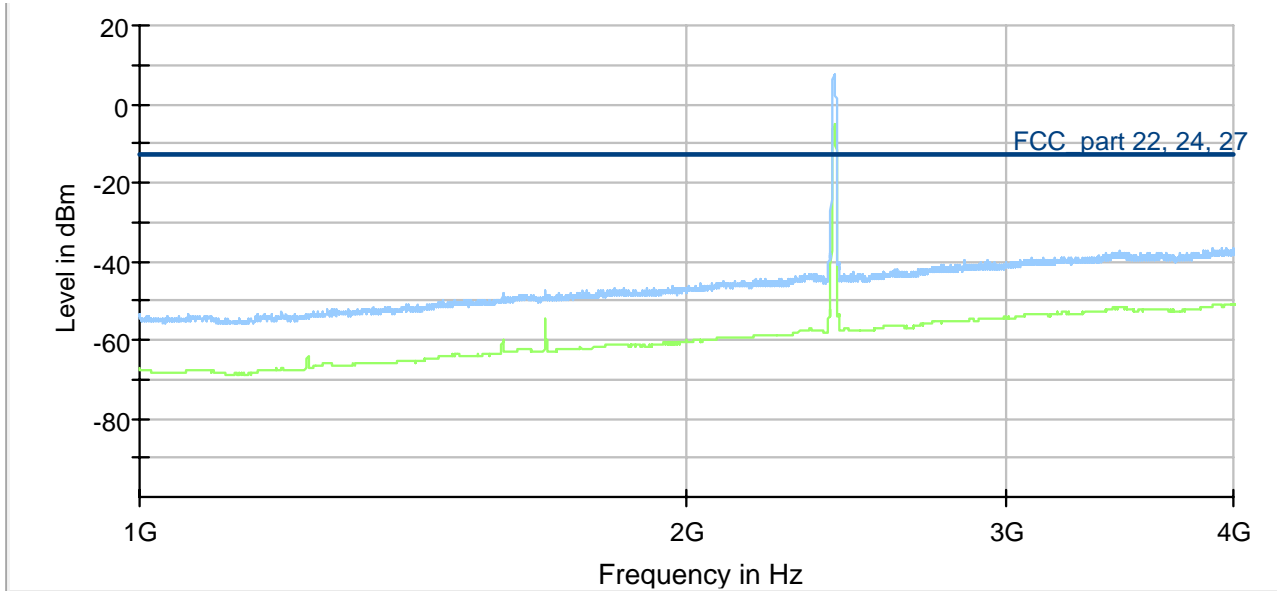

Results 1 to 4 GHz

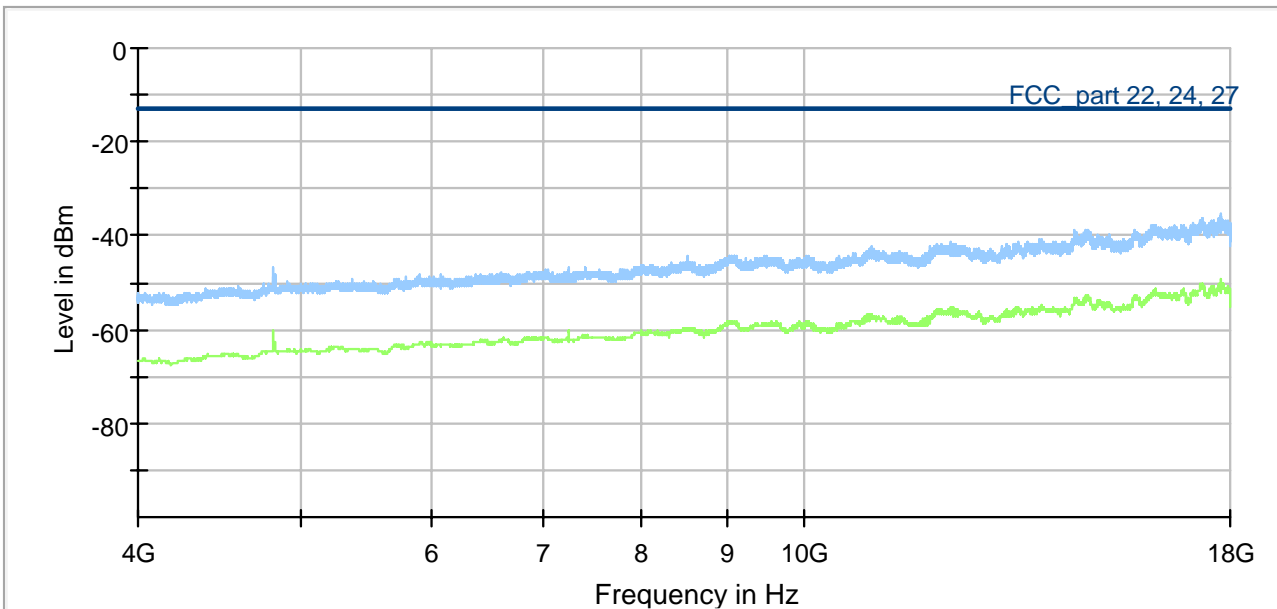

Results 4 to 18 GHz

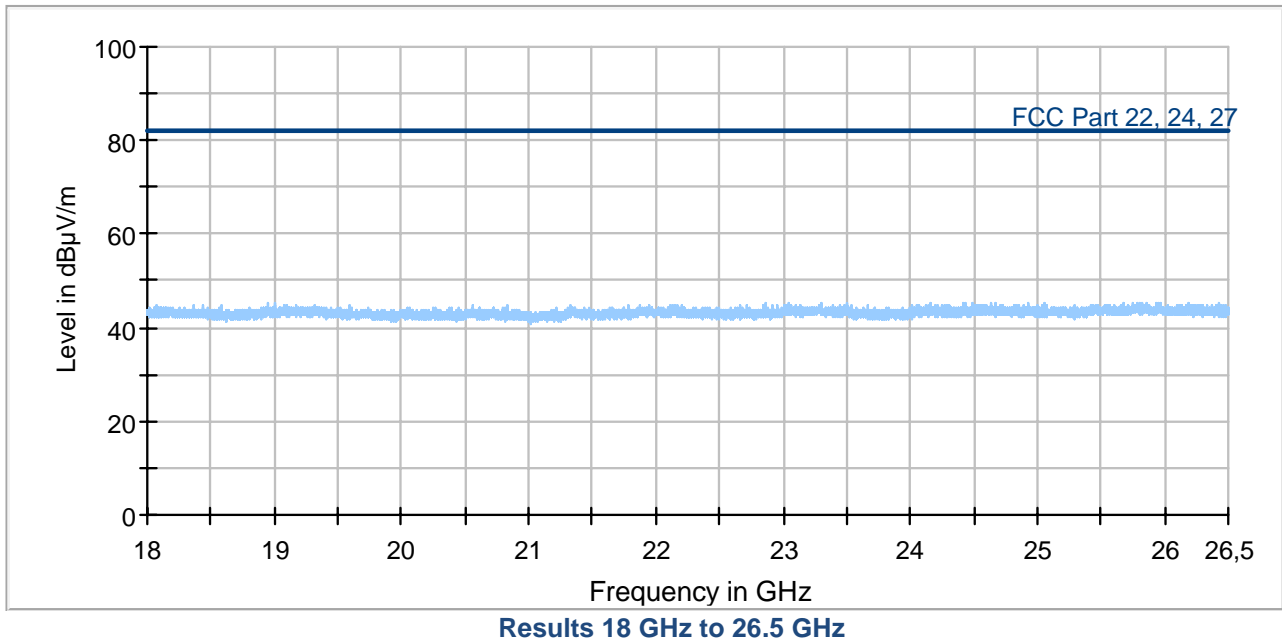

6.2.6 Radiated spurious emissions LTE Band 2

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 18900 (uplink channel notched):


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
1880.0	Uplink channel, no spurious	
1960.0	Downlink channel, no spurious	
2412.0	WLAN Signal, no spurious	
18000	-----	<- 30 (EIRP Noise level)
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

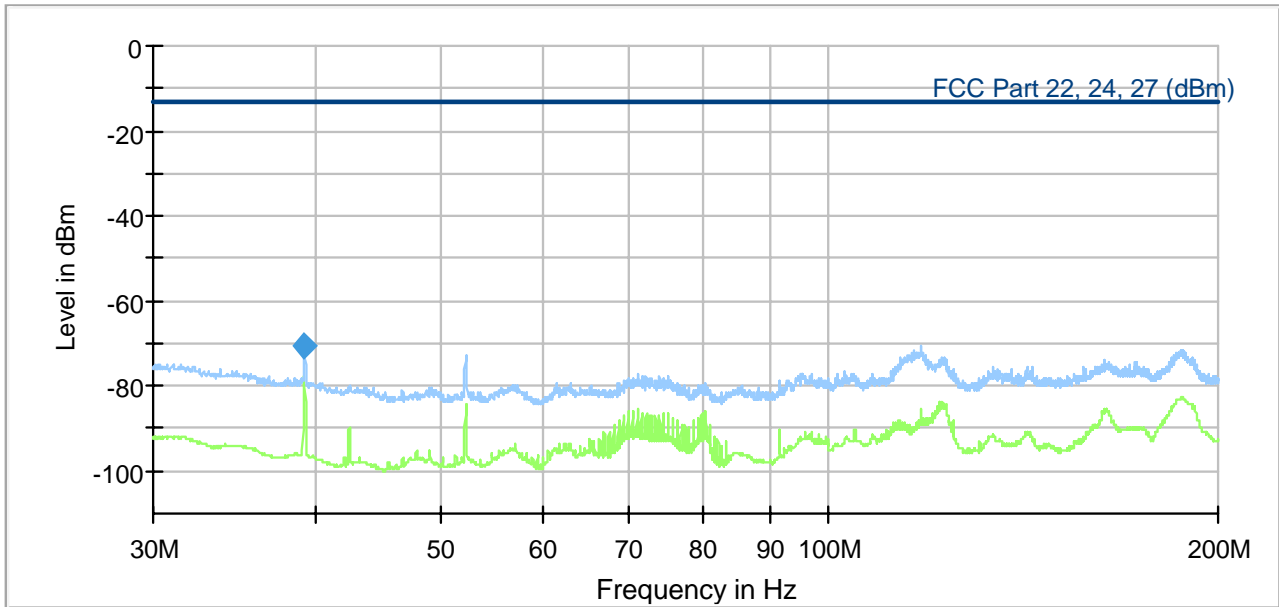


Results 30 MHz to 200 MHz

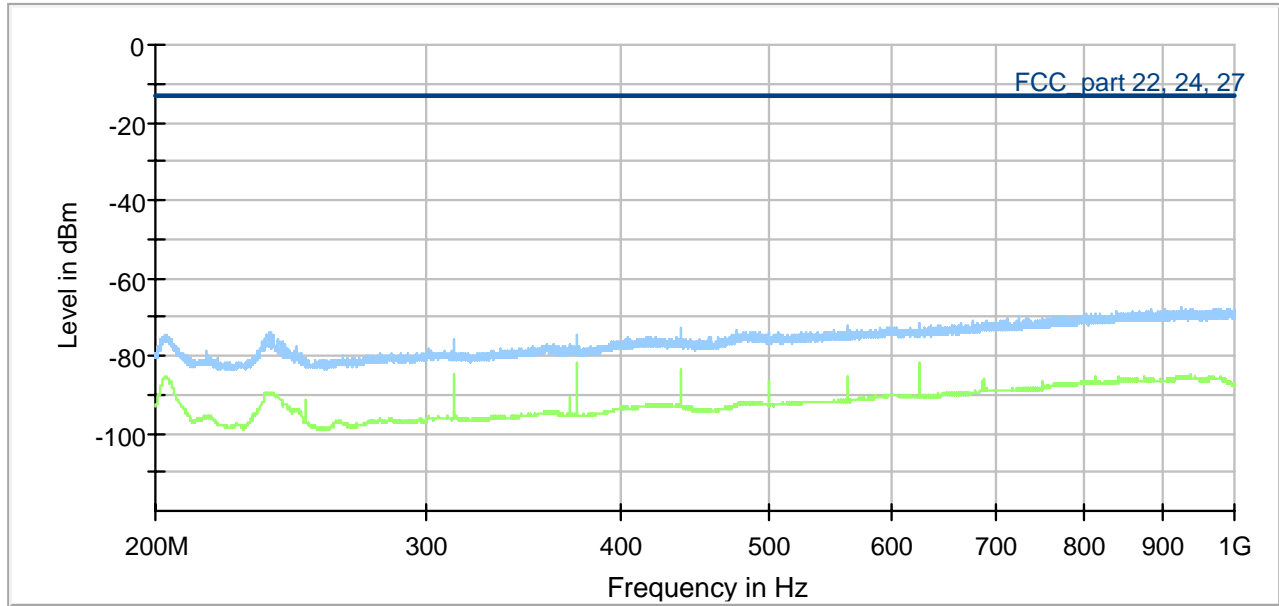


Results 200 MHz to 1 GHz

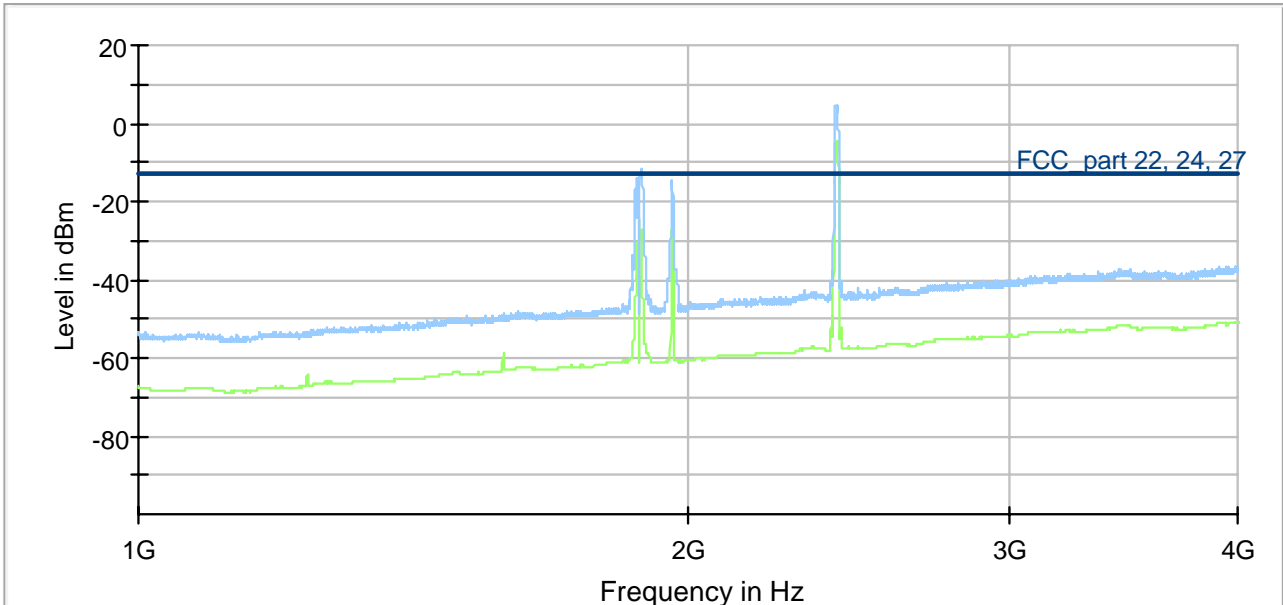

Results 1 GHz to 4 GHz

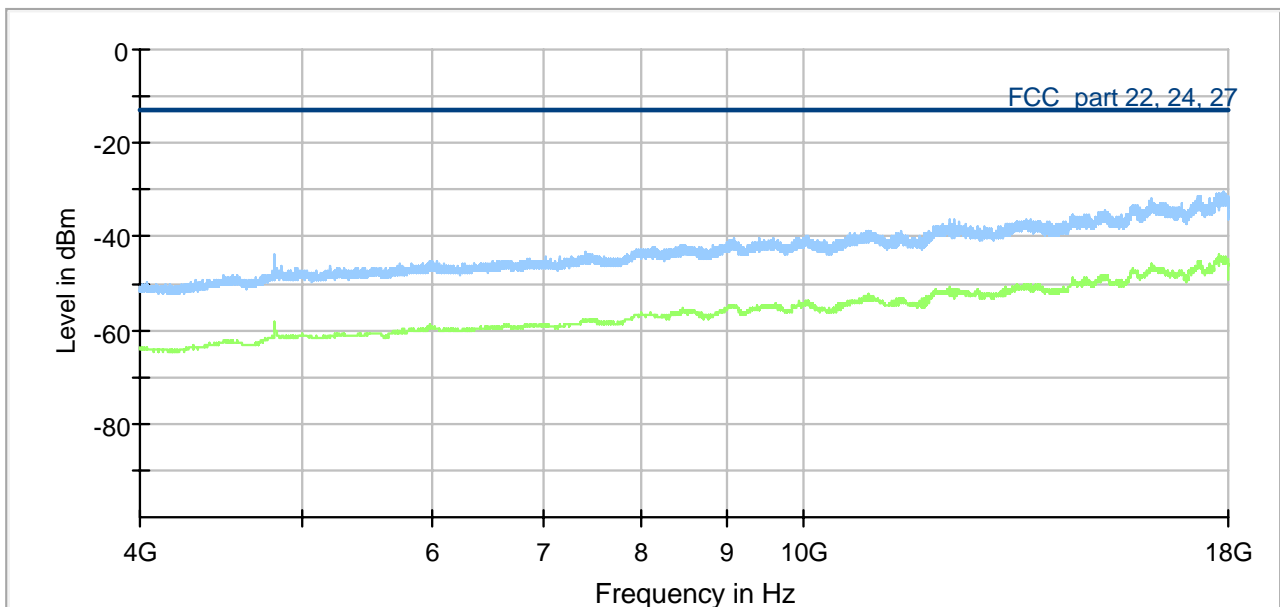

Results 4 GHz to 18 GHz

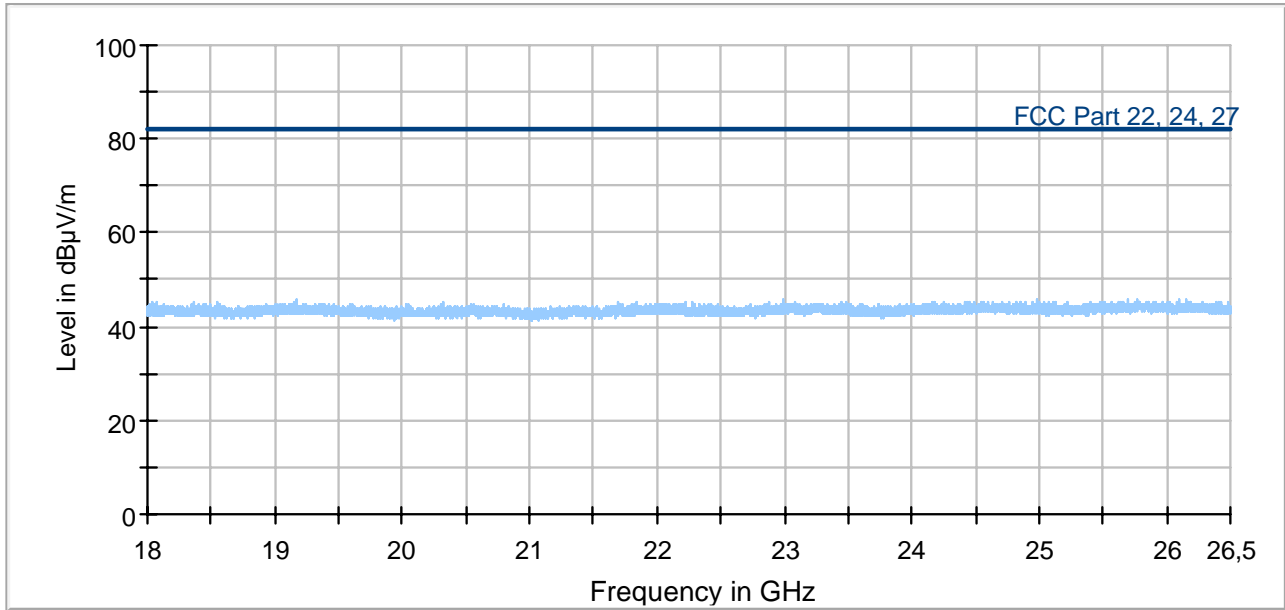

Results 18 GHz to 26.5 GHz

6.2.7 Radiated spurious emissions LTE Band 4

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 4182 (uplink channel notched):


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
1732.4	Uplink channel, no spurious	
2132.4	Downlink channel, no spurious	
2412.0	WLAN Signal, no spurious	
18000	-----	<- 30 (EIRP Noise level)
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

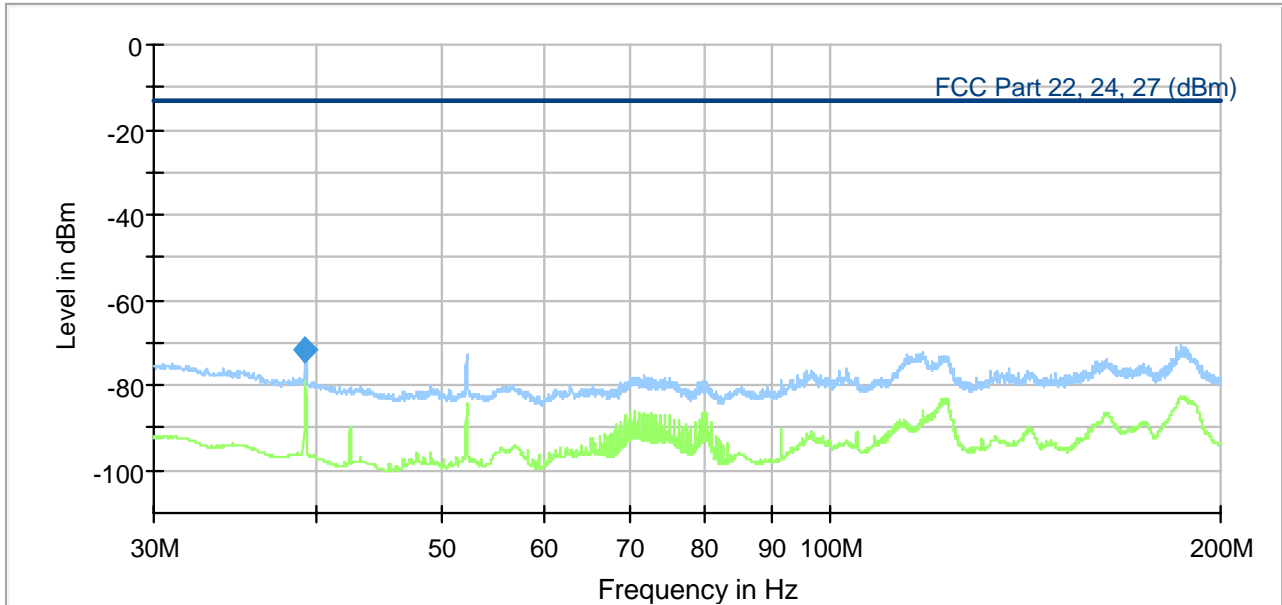


Results 30 MHz to 200 MHz

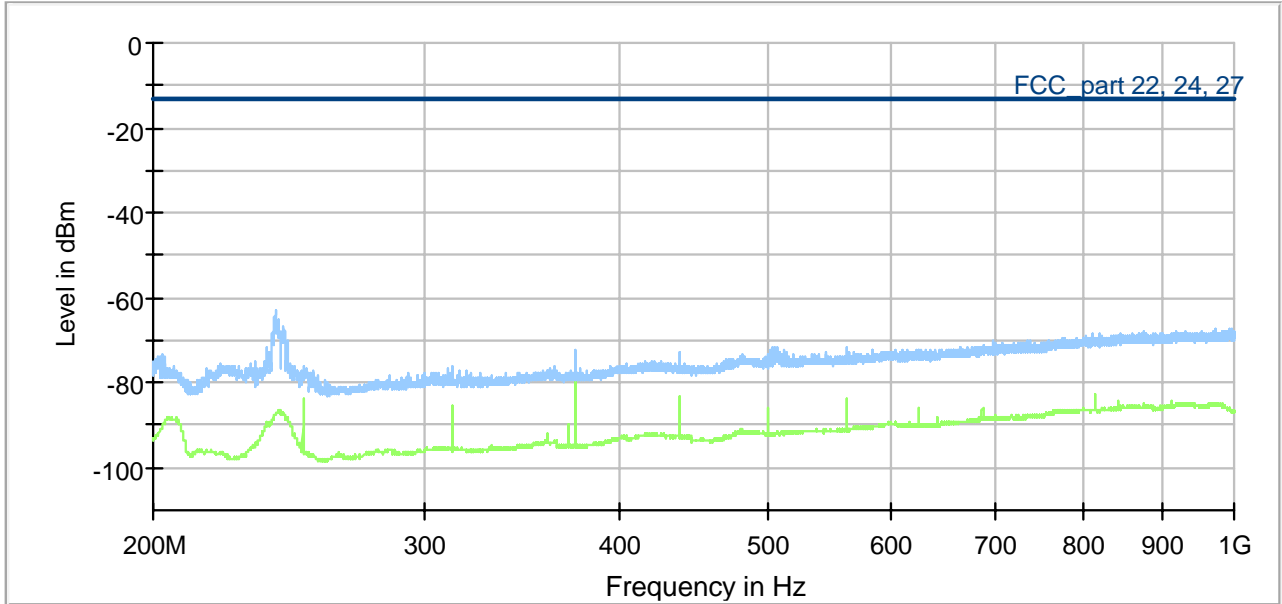


Results 200 MHz to 1 GHz

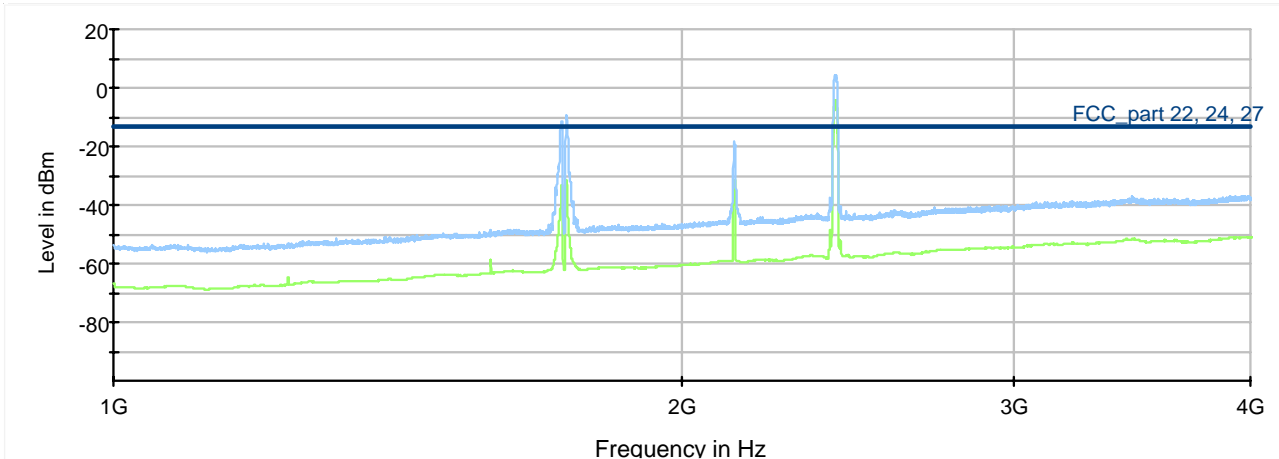

Results 1 GHz to 4 GHz

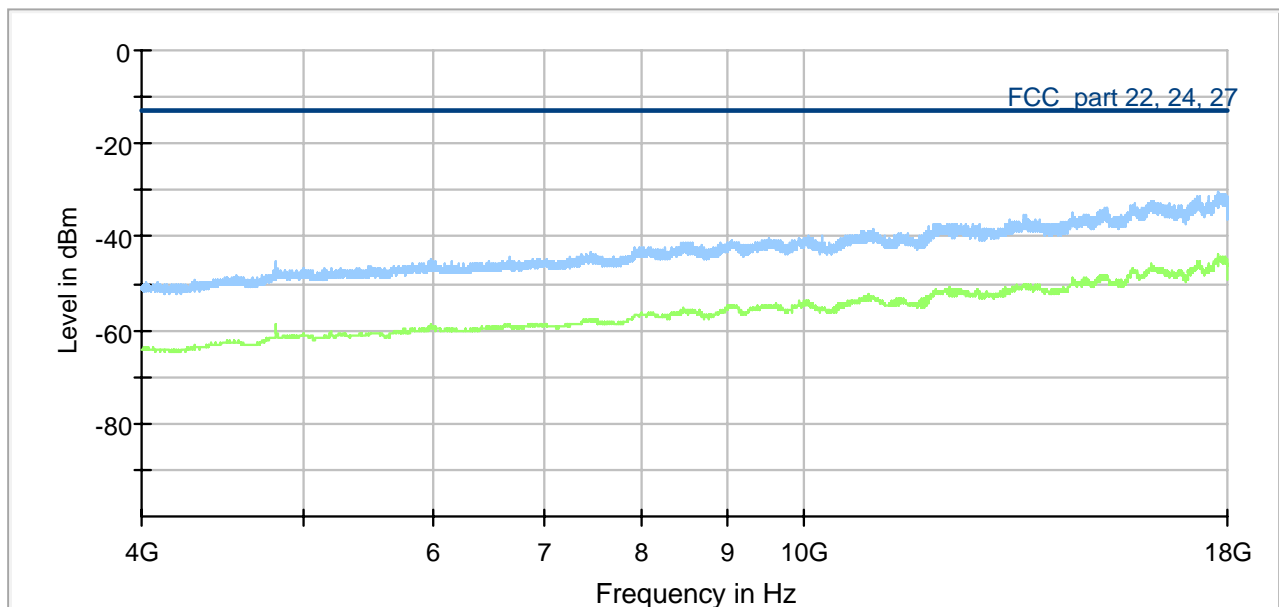

Results 4 GHz to 18 GHz

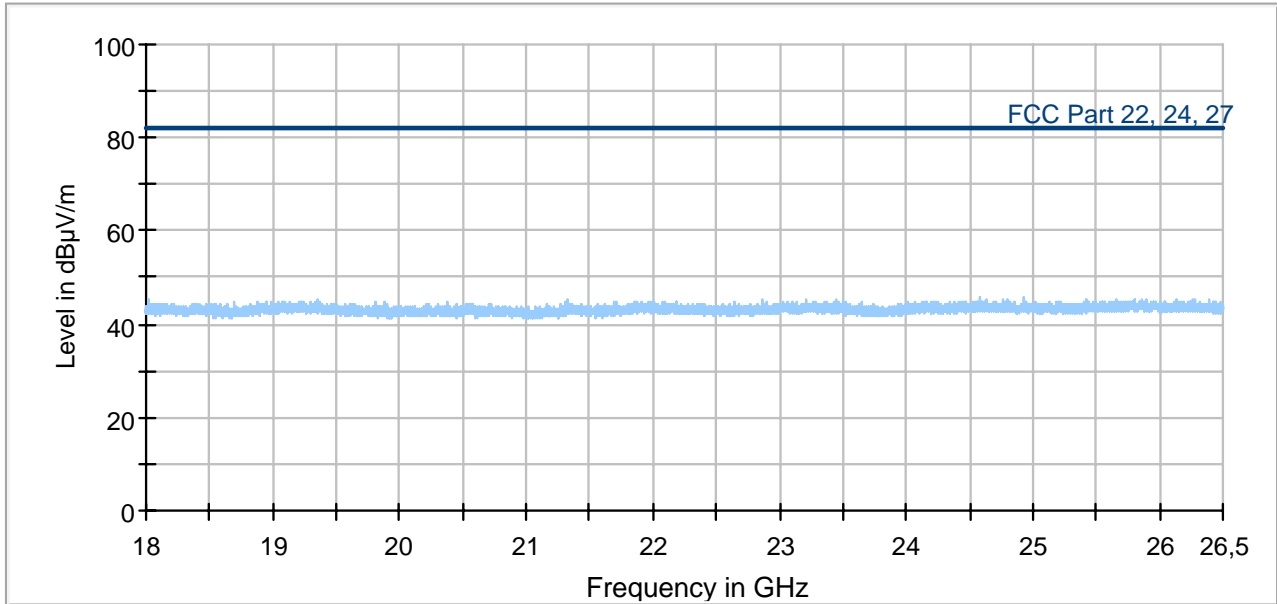

Results 18 GHz to 26.5 GHz

6.2.8 Radiated spurious emissions LTE Band 5

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 20524 (uplink channel notched):


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
836.6	Uplink channel, no spurious	
881.6	Downlink channel, no spurious	
2412.0	WLAN Signal, no spurious	
18000		<- 30 (EIRP Noise level)
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

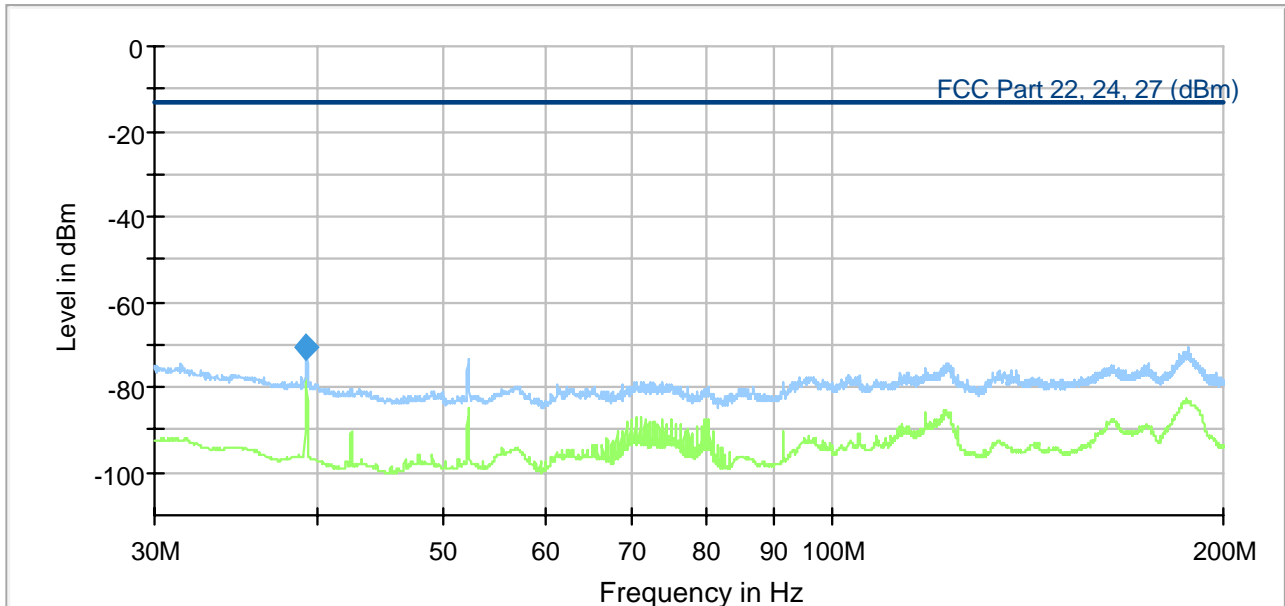


Results 30 MHz to 200 MHz

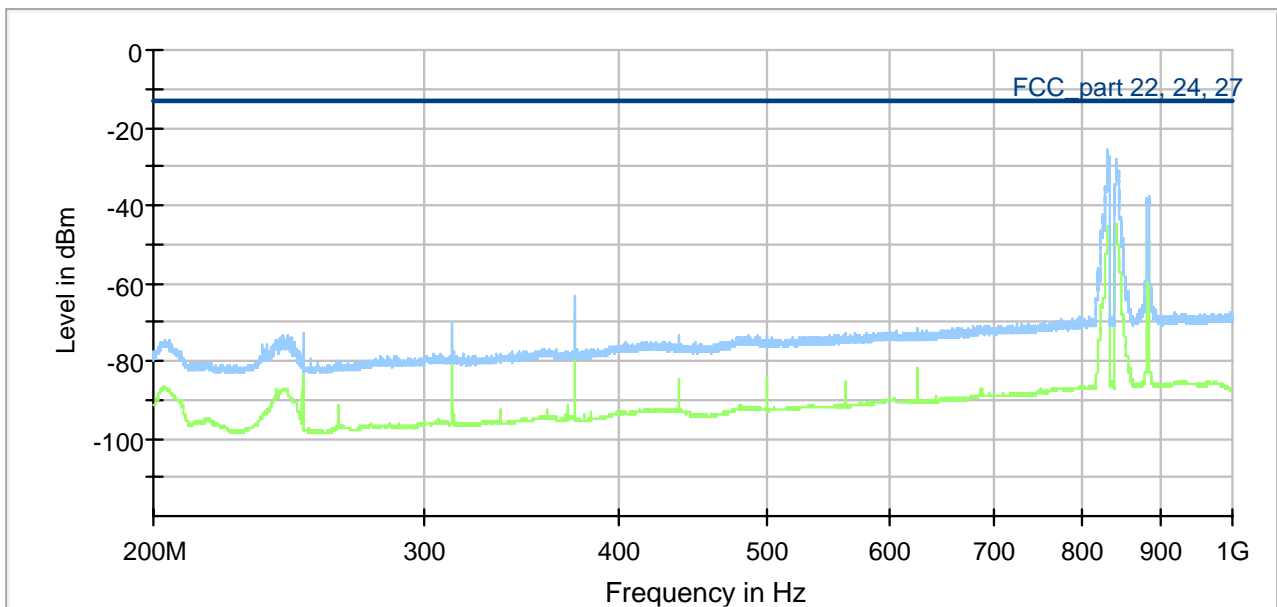


Results 200 MHz to 1 GHz

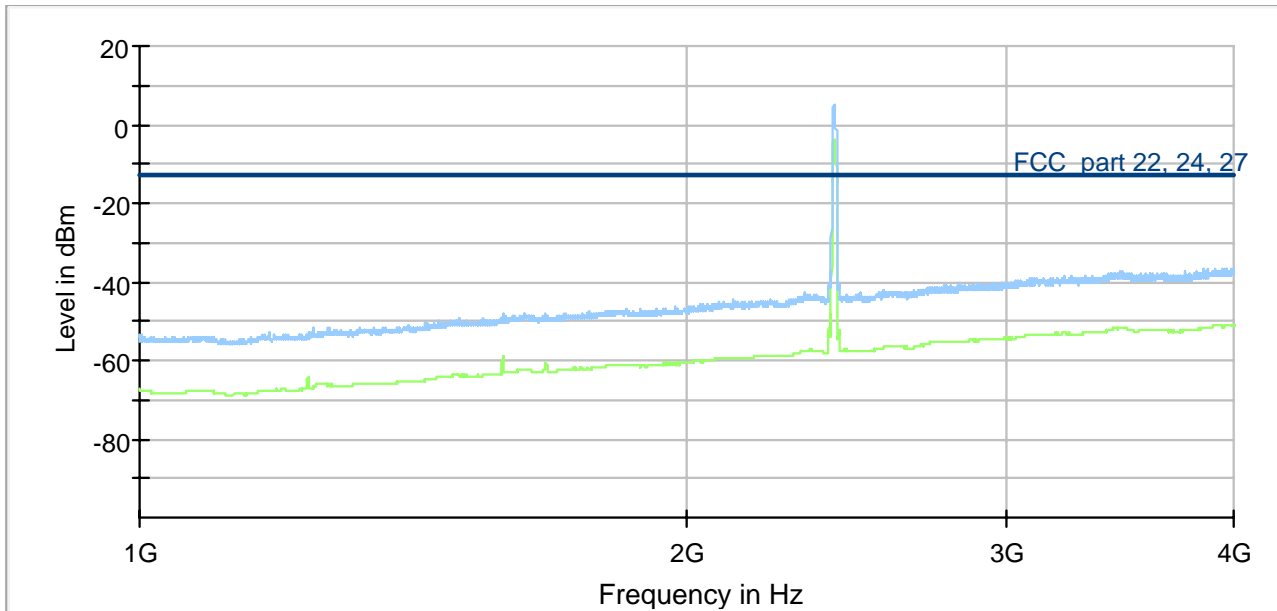

Results 1 to 4 GHz

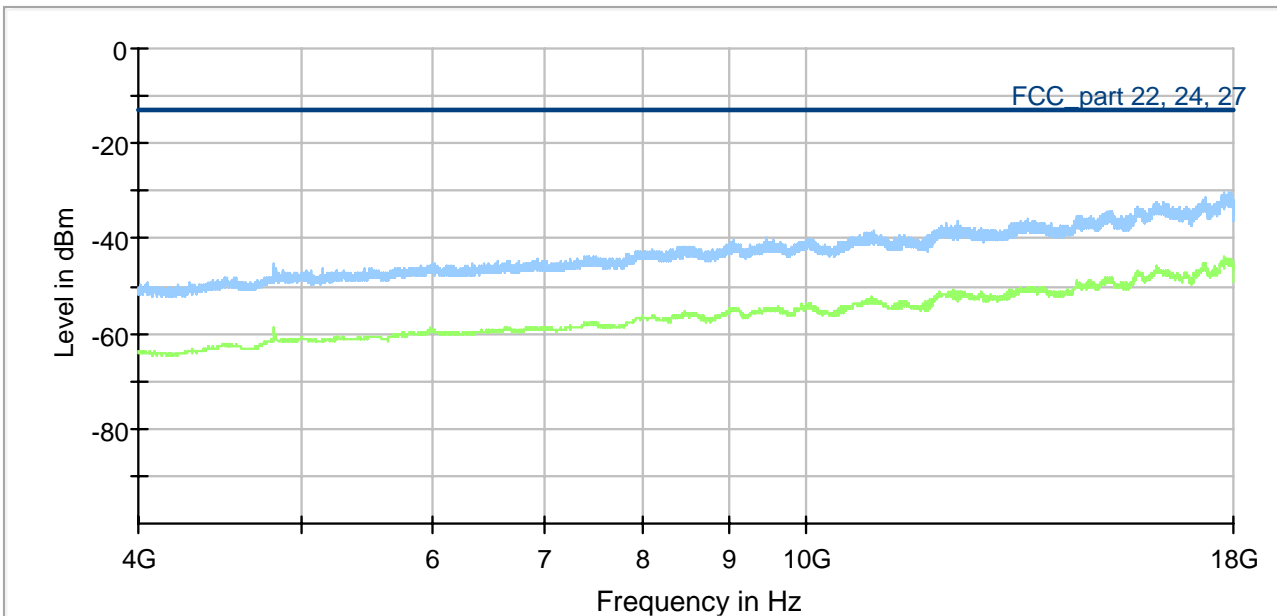

Results 4 to 18 GHz

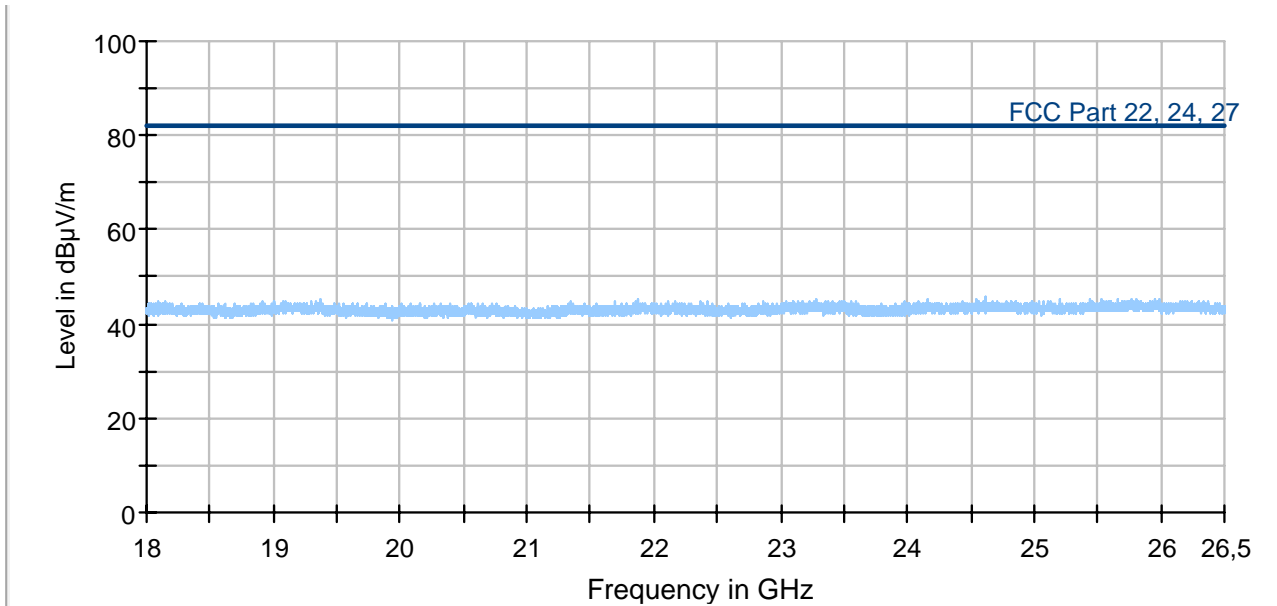

Results 18 GHz to 26.5 GHz

6.2.9 Radiated spurious emissions LTE Band 7

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 21100:


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
2412.0	WLAN Signal, no spurious	
2535.0	Uplink channel, no spurious	
2655.0	Downlink channel, no spurious	
18000.0	-----	<- 30 (EIRP Noise level)
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

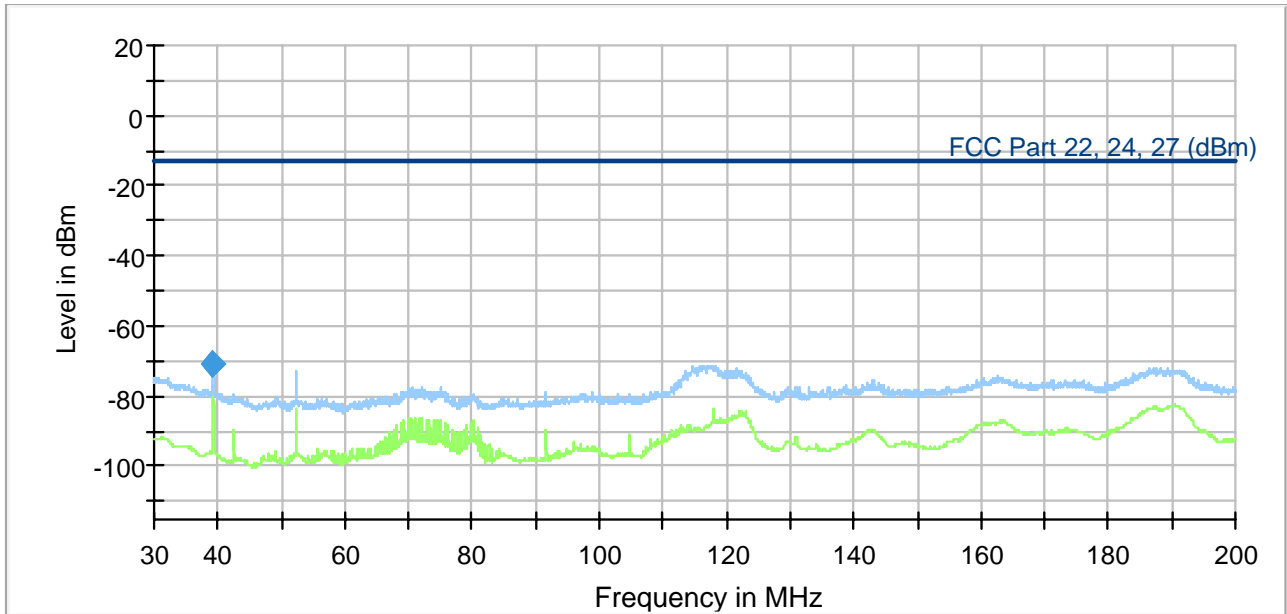


Results 30 MHz to 200 MHz

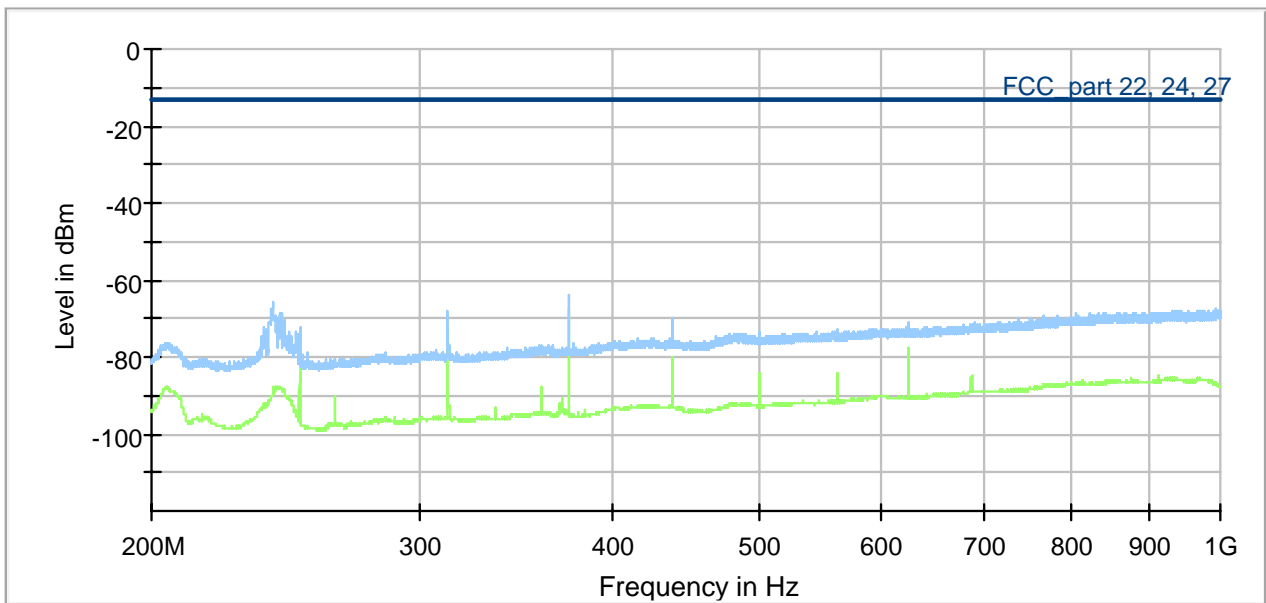


Results 200 MHz to 1 GHz

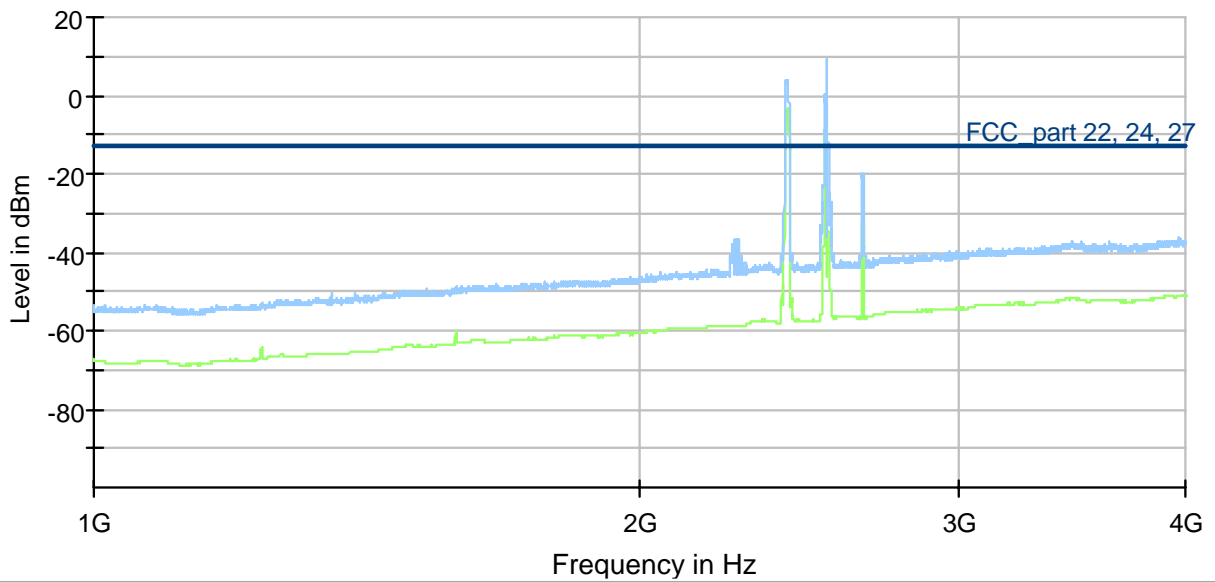

Results 1 to 4 GHz

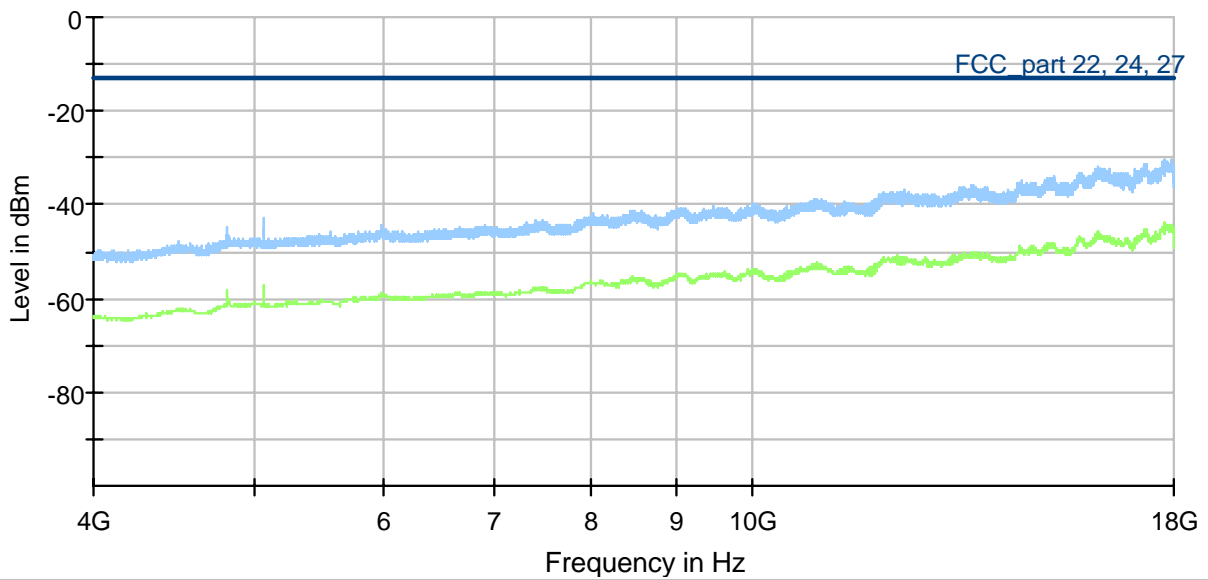

Results 4 to 18 GHz

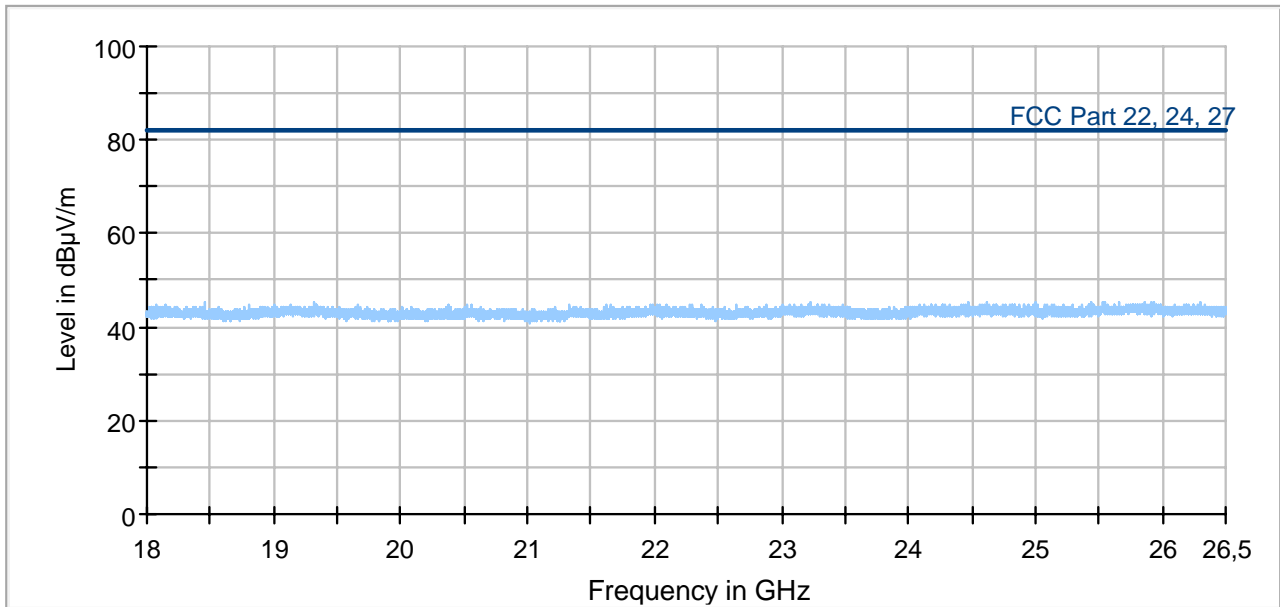

Results 18 GHz to 26.5 GHz

6.2.10 Radiated spurious emissions LTE Band 17

Ambient temperature	22 °C	Relative humidity	20 %
---------------------	-------	-------------------	------

Measurement at uplink channel 23790:


Spurious emissions level		
f (MHz)	Level (dBm)	Limit (dBm)
710.0	Uplink channel, no spurious	
740.0	Downlink channel, no spurious	
1881.5	-28	-13
2412.0	WLAN Signal, no spurious	
Measurement uncertainty: +2.2 dB / -3.6 dB		

Limit: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB [3][4][5].


This results into a limit of -13 dBm for all power levels of the UE.

All emissions show more than 20 dB margin to the limit. Therefore, no final measurement has been performed.


Test equipment (please refer to chapter 6 for details)
1 - 29

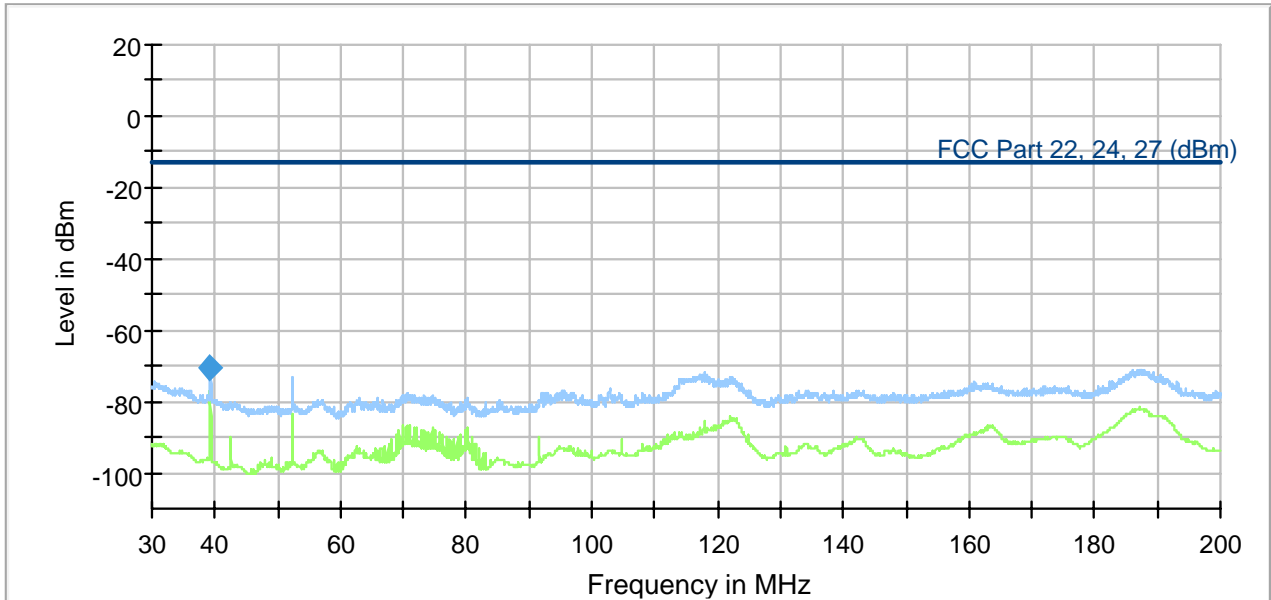


Results 30 MHz to 200 MHz

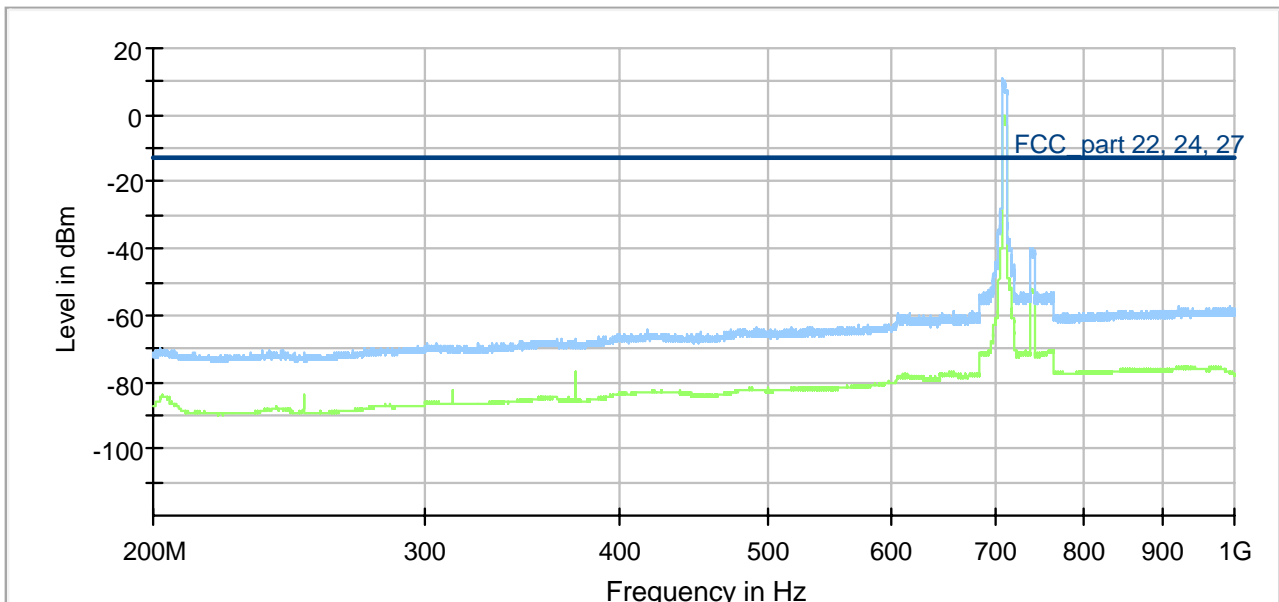


Results 200 MHz to 1 GHz

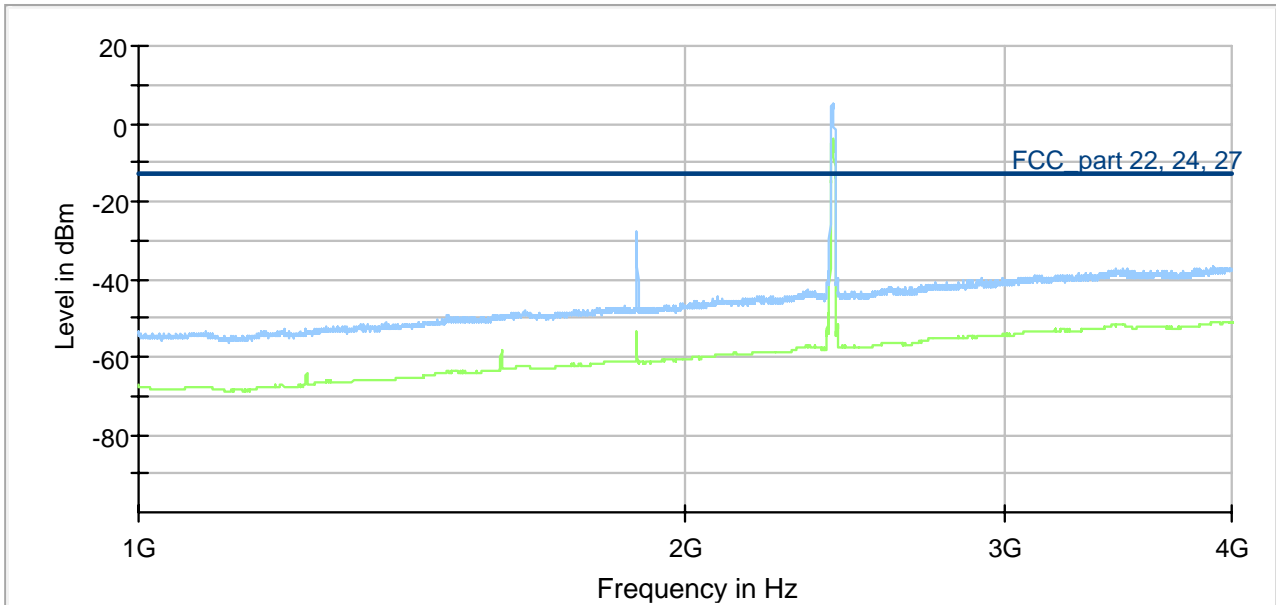

Results 1 to 4 GHz

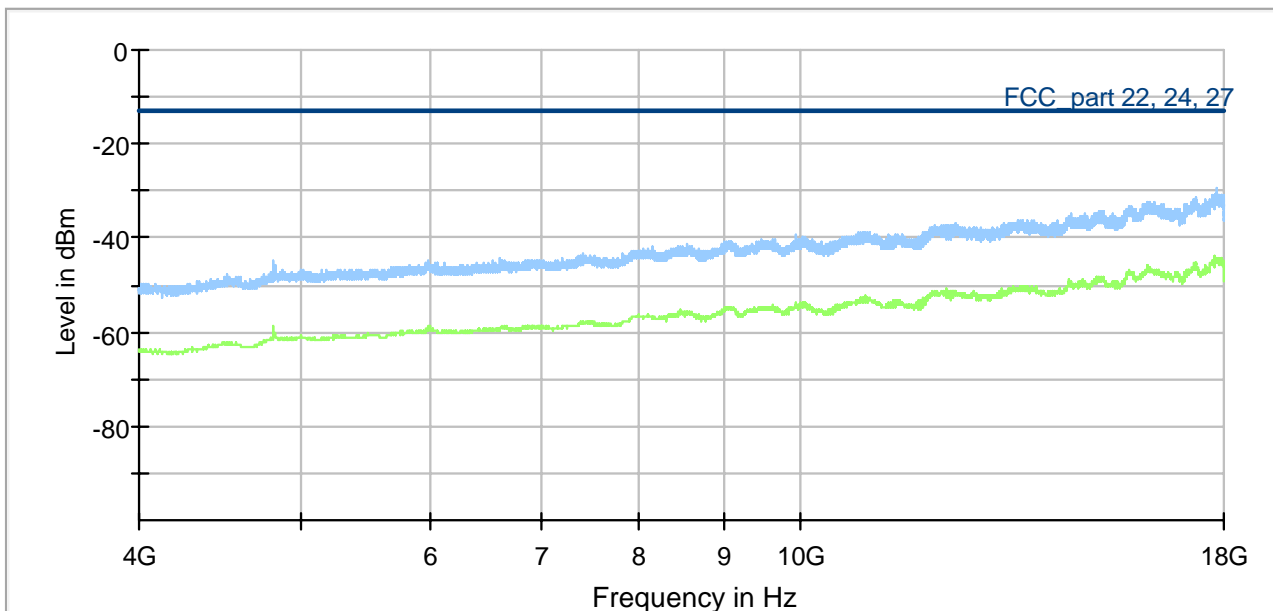

Results 4 to 18 GHz

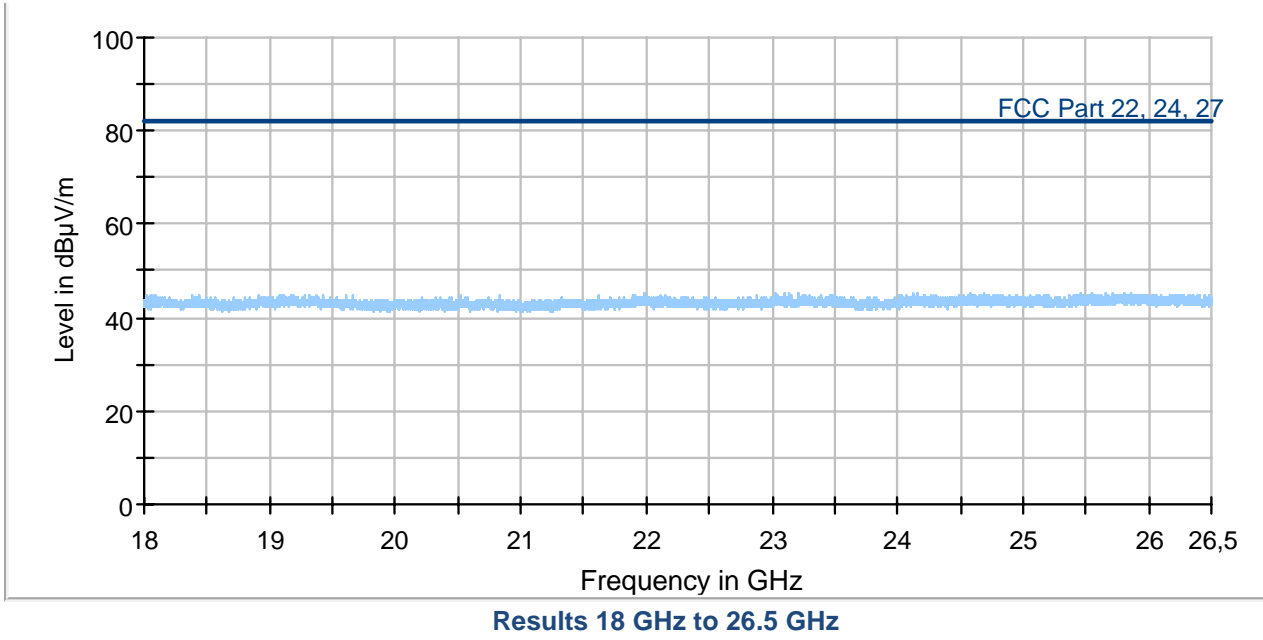

7 Test Equipment used for Tests

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
1	Log Per Antenna	VUSLP 9111B	Schwarzbeck	464	483279	Calibration not necessary	
2	Systemsoftware EMC32 M276	EMC32	Rohde & Schwarz	100970	482972	Calibration not necessary	
3	RF Switch Matrix	OSP220	Rohde & Schwarz		482976	Calibration not necessary	
4	Drehscheibe/Turntable	TT3.0-3t	Maturo	825/2612/.01	483224	Calibration not necessary	
5	Antennasupport	BAM 4.5-P-10kg	Maturo	222/2612.01	483225	Calibration not necessary	
6	Controller	NCD	Maturo	474/2612.01	483226	Calibration not necessary	
7	Anechoic chamber M276	SAC5-2	Albatross Projects	C62128-A540- A138-10-0006	483227	Calibration not necessary	
8	EMI Test receiver ESW	ESW44	Rohde & Schwarz	101828	482979	12.04.2019	04.2021
9	Log Per Antenna	HL050	Rohde & Schwarz	4062.4063.02- 100908	482977	13.08.2019	08.2022
10	Highpass Filter	WHKX4.0/18G- 8SS	Wainwright Instruments GmbH	1	480587	Calibration not necessary	
11	Highpass Filter	WHKX12-935- 1000-15000-40ST	Wainwright Instruments GmbH	1	482908	Calibration not necessary	
12	standard gain horn antenna	20240-20	Flann Microwave	411	480297	Calibration not necessary	
13	Preamplifier 18 GHz - 26 GHz	JS4-18002600- 20-5A	MITEQ Hauppauge N.Y.	658697	480342	10.07.2018	07.2020
14	Wideband Radio Communication Tester	CMW500	Rohde & Schwarz	167339	483023	15.04.2019	04.2021
15	Tuneable Notch Filter	WRCA800/960- 0.2/40-6EEK	Wainwright Instruments	15	480414	Calibration not necessary	
16	Tuneable Notch Filter	WRCD1700/2000- 0.2/40-10EEK	Wainwright Instruments	14	480415	Calibration not necessary	
17	Tunable Band Reject Filter	WRCT2300/2650- 5/40-10EEK	Wainwright Instruments GmbH	1	480446	Calibration not necessary	
18	Tunable Band Reject Filter	WTRCD8-800- 960EEK	Wainwright Instruments GmbH	2	482012	Calibration not necessary	
19	Tunable Band Reject Filter	WRCT1850/2170- 5/40-10EESD		1	480715	Calibration not necessary	
20	Preamplifier	LNA-30- 00101800-25-10P	Narda-Miteq	2110917	482967	Calibration not necessary	
21	Cable	C417	H+S	-	-	Calibration not necessary	
22	Cable	C416	H+S	-	-	Calibration not necessary	
23	Cable	C416.1	H+S	-	-	Calibration not necessary	
24	Cable	C419	H+S	-	-	Calibration not necessary	
25	Biconical antenna	VHA 9103B + VHBB 9124	Schwarzbeck	768	483278	Calibration not necessary	

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal Due
26	Precision dipole	HZ-13	Rohde & Schwarz	831782/02	480062	Calibration not necessary	
27	Precision dipole	HZ-12	Rohde & Schwarz	831781/02	480061	Calibration not necessary	
28	Signal Generator	SMB100B	Rohde & Schwarz	101314	482975	26.02.2020	02.2021
29	Signal generator	SMHU 58	Rohde & Schwarz	844170/017	480266	14.02.2020	02.2022

8 Test Site Validation

Test equipment	PM. No.	Frequency range	Type of validation	According to	Val. Date	Val Due
Semi anechoic chamber M276	483227	30 – 1000 MHz	NSA	ANSI C63.4a-2017	19.09.2019	18.09.2021
Semi anechoic chamber M276	483227	1 -18 GHz	SVSWR	CISPR 16-1-4 + Cor1:2010 + A1:2012 +A2:2017	01.10.2019	30.09.2021

9 Report History

Report Number	Date	Comment
F200196E4	29.05.2020	Initial Test Report
F200196E4 2 nd version	26.10.2020	- Added ISED RSS references -corrected reference of cellular module - Added ISED certification number, HVIN, PMN information - Added missing results in table of results in pages 28 and 52

10 List of Annexes

Annex A	Test Setup Photos	5 pages
Annex B	EUT external Photos	3 pages
Annex C	EUT internal Photos	1 pages