



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM161100945802
Page: 1 of 20

FCC REPORT

Application No. : SZEM1611009458CR
Applicant: ANTON INTERNATIONAL INC.
Manufacturer: ANTON INTERNATIONAL INC.
Factory: ANTON INTERNATIONAL INC.
Product Name: Remote control car
Model No.(EUT): 3688-K12A
Add Model No.: TRC5000, TRB1000, TRM1000, TRO1000, TRD1000, TRT1000,
TRC5002, TRB1002, TRM1002, TRO1002, TRD1002, TRT1002,
TRC6000, TRB2000, TRM2000, TRO2000, TRD2000, TRT2000,
TRC6001, TRC6002, TRC6003, TRC6004, TRC6005, TRC6006,
TRC6007, TRC6008, TRC6009, TRC6010, TRC6011, TRC6012,
TRC6013, TRC6014, TRC6015, TRC6016, TRC6017, TRC6018,
TRC6019, TRC6020, TRC6021, TRC6022, TRC6023, TRC6024,
TRP6001, TRP6002, TRP6003, TRP6004, TRP6005, TRP6006, TRP6007,
TRP6008, TRP6009, TRP6010, TRP6011, TRP6012, TRP6013, TRP6014,
TRP6015, TRP6016, TRP6017, TRP6018, TRP6019, TRP6020, TRP6021,
TRP6022, TRP6023, TRP6024, UD2110A, 300204, 300206, 50100, 999G-
7FA, 2117, 3688-K1, 3688-K11, 3688-K14, XB20, XB63, 12000
FCC ID: 2AKCQATTW0000002749
Standards: 47 CFR Part 15, Subpart C (2015)
Date of Receipt: 2016-11-08
Date of Test: 2016-11-11 to 2016-12-23
Date of Issue: 2016-12-29

Test Result:	PASS *
---------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2016-12-29		Original

Authorized for issue by:			
			
			2016-12-23
Tested By		(Peter Geng) /Project Engineer	Date
			
			2016-12-29
Checked By		(Eric Fu) /Reviewer	Date



3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10 (2013)	PASS
Radiated Emission	47 CFR Part 15, Subpart C Section 15.227	ANSI C63.10 (2013)	PASS
Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215	ANSI C63.10 (2013)	PASS

Remark:

Model No.: 3688-K12A, TRC5000, TRB1000, TRM1000, TRO1000, TRD1000, TRT1000, TRC5002, TRB1002, TRM1002, TRO1002, TRD1002, TRT1002, TRC6000, TRB2000, TRM2000, TRO2000, TRD2000, TRT2000, TRC6001, TRC6002, TRC6003, TRC6004, TRC6005, TRC6006, TRC6007, TRC6008, TRC6009, TRC6010, TRC6011, TRC6012, TRC6013, TRC6014, TRC6015, TRC6016, TRC6017, TRC6018, TRC6019, TRC6020, TRC6021, TRC6022, TRC6023, TRC6024, TRP6001, TRP6002, TRP6003, TRP6004, TRP6005, TRP6006, TRP6007, TRP6008, TRP6009, TRP6010, TRP6011, TRP6012, TRP6013, TRP6014, TRP6015, TRP6016, TRP6017, TRP6018, TRP6019, TRP6020, TRP6021, TRP6022, TRP6023, TRP6024, UD2110A, 300204, 300206, 50100, 999G-7FA, 2117, 3688-K1, 3688-K11, 3688-K14, XB20, XB63, 12000

Only the model 3688-K12A was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models, only different on color, appearance, packaging and model No..



4 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENTS	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST ENVIRONMENT AND MODE	5
5.4 DESCRIPTION OF SUPPORT UNITS	5
5.5 TEST LOCATION	6
5.6 TEST FACILITY	6
5.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
5.9 EQUIPMENT LIST.....	7
6 TEST RESULT & MEASUREMENT DATA.....	8
6.1 ANTENNA REQUIREMENT.....	8
6.2 RADIATED EMISSIONS	9
6.3 OCCUPIED BANDWIDTH	16
7 PHOTOGRAPHS - EUT TEST SETUP	18
7.1 RADIATED EMISSION	18
8 PHOTOGRAPHS - EUT CONSTRUCTION DETAILS.....	18-20



5 General Information

5.1 Client Information

Applicant:	ANTON INTERNATIONAL INC.
Address of Applicant:	1590 S. MILLKEN AVE, UNIT I, ONTARIO CA 91761. USA
Manufacturer:	ANTON INTERNATIONAL INC.
Address of Manufacturer:	1590 S. MILLKEN AVE, UNIT I, ONTARIO CA 91761. USA
Factory:	ANTON INTERNATIONAL INC.
Address of Factory:	1590 S. MILLKEN AVE, UNIT I, ONTARIO CA 91761. USA

5.2 General Description of EUT

Product Name:	Remote control car
Model No.:	3688-K12A
Sample Type:	Portable production
Operation Frequency:	27.145MHz
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	3.0V DC (2 x 1.5V "AA" Size Battery)

5.3 Test Environment and Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1015 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode.

5.4 Description of Support Units

The EUT has been tested independent unit.



5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

None.

5.7 Abnormalities from Standard Conditions

None.

5.8 Other Information Requested by the Customer

None.



5.9 Equipment List


RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2016-10-09	2017-10-09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13

Note: The calibration interval is one year, all the instruments are valid.

6 Test Result & Measurement Data

6.1 Antenna Requirement

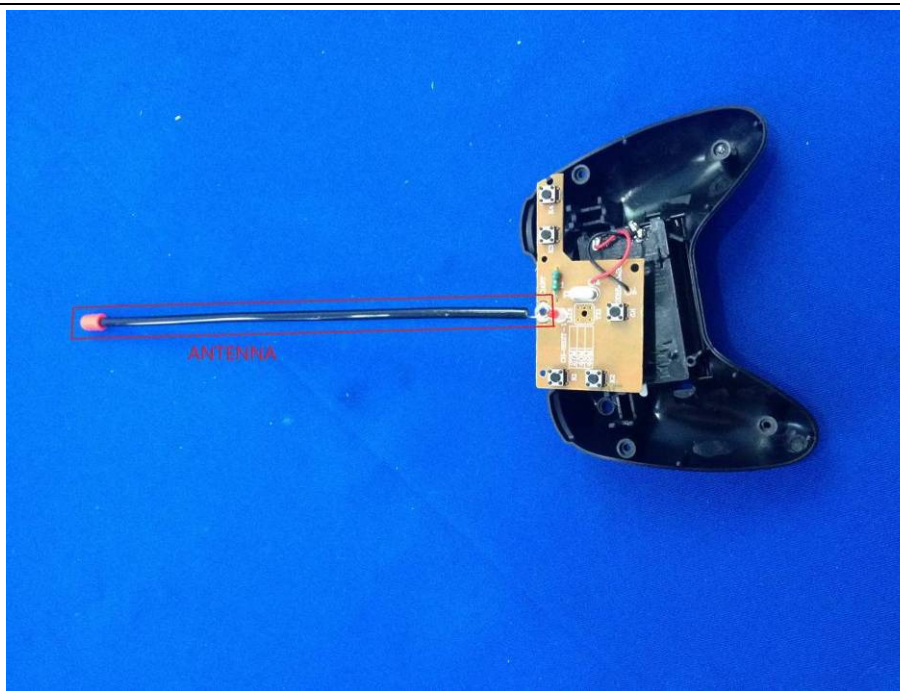Standard Requirement:	47 CFR Part 15C Section 15.203
<p>15.203 Requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
EUT Antenna:	



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM161100945802

Page: 9 of 20

6.2 Radiated Emissions

Test Requirement:	47 CFR Part 15C Section 15.227				
Test Method:	ANSI C63.10: 2013				
Test Site:	3m (Semi-Anechoic Chamber)				
ERP Limit:	Carrier Power will not exceed 80dBuV/m at 3m (Average).				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					
Test Procedure:	<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground for below 1GHz at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p>				

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

	<p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</p>
--	--

Test Setup:

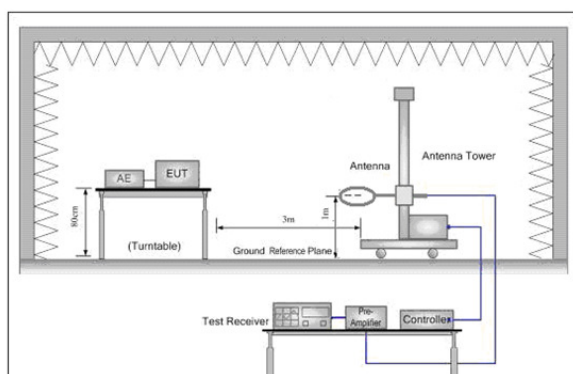


Figure 1. Below 30MHz

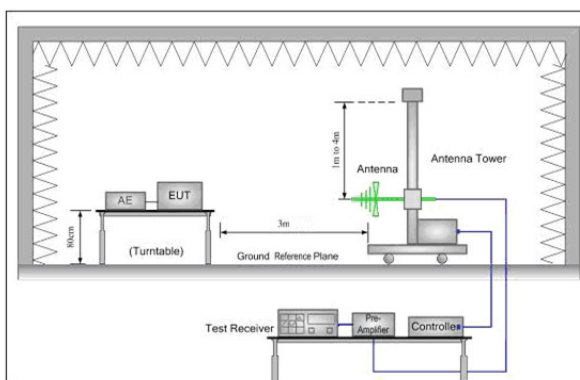


Figure 2. 30MHz to 1GHz

Test Mode:	Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Result:	Pass

27.145MHz Mode

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2013. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Test Result:

Intentional emission

Test Frequency (MHz)	Peak (dBμV/m)		Limits (dBμV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
27.145	78.26	69.45	100.00	21.74	30.55




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM161100945802

Page: 11 of 20

Out of Band Emissions

Vertical

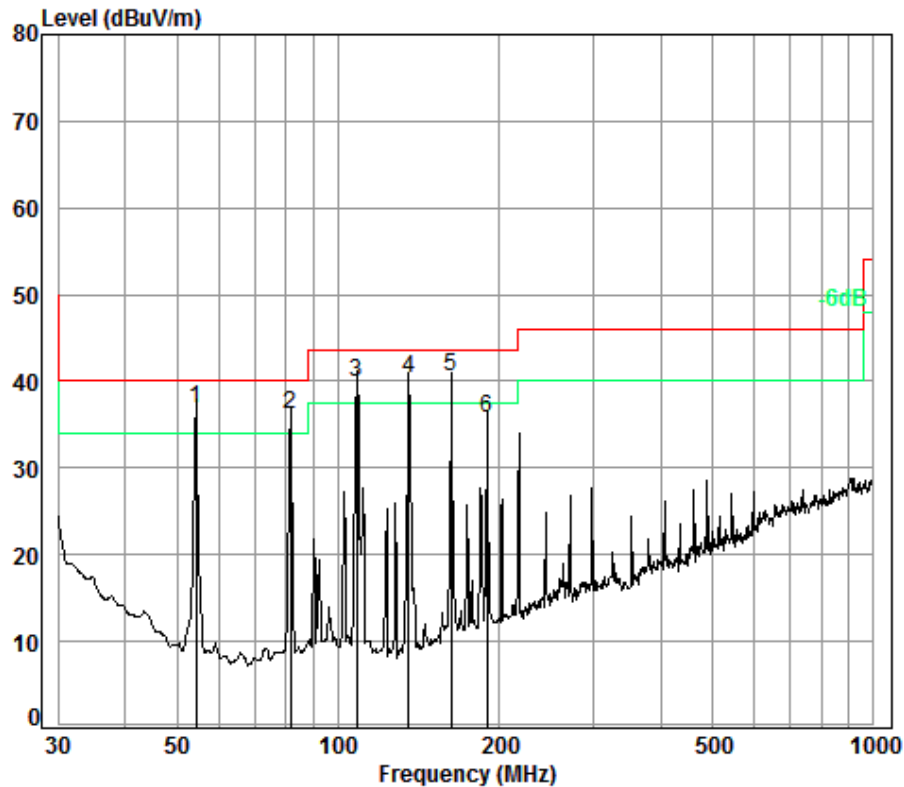

Condition: 3m VERTICAL

Job No. : 9458CR

Test mode: TX

	Freq	Cable	Ant	Preamp	Read	Limit	Over
	MHz	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1	54.26	0.80	8.06	27.28	55.32	36.90	40.00
2	81.50	1.10	7.85	27.23	54.43	36.15	40.00
3	108.27	1.22	8.69	27.14	57.07	39.84	43.50
4	135.51	1.29	7.92	26.98	58.15	40.38	43.50
5 pp	162.61	1.34	9.57	26.85	56.44	40.50	43.50
6	189.74	1.38	10.09	26.74	50.96	35.69	43.50




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM161100945802

Page: 12 of 20

Horizontal

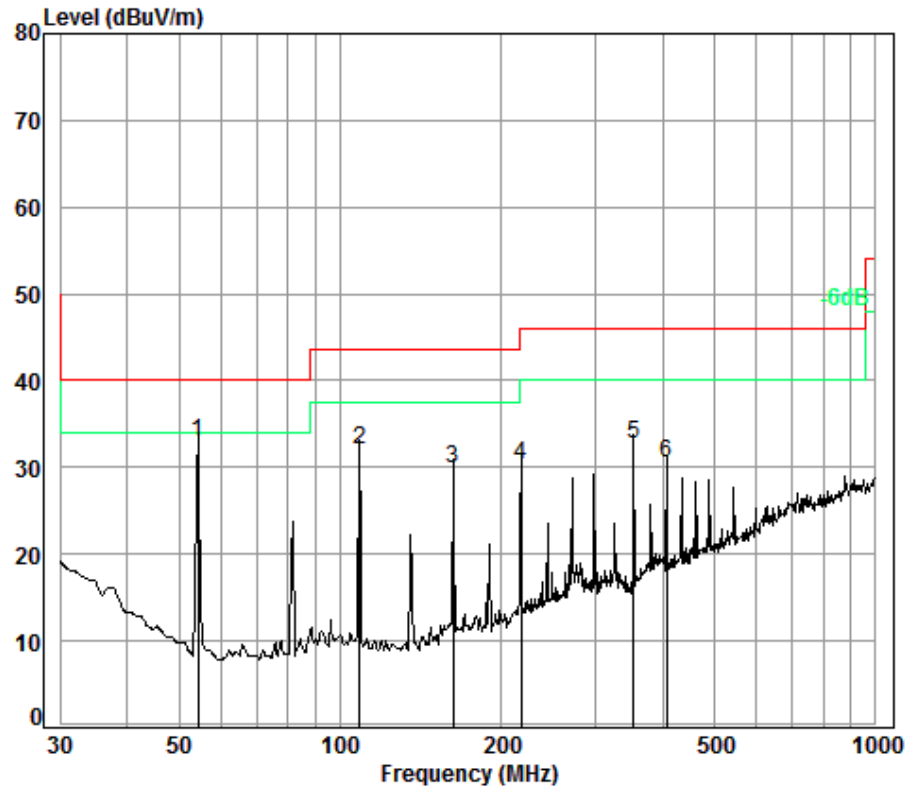

Condition: 3m HORIZONTAL

Job No. : 9458CR

Test mode: TX


	Freq	Cable	Ant	Preamp	Read	Limit	Over
	MHz	Loss	Factor	Factor	Level	Level	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1 pp	54.26	0.80	8.06	27.28	51.32	32.90	40.00
2	108.65	1.22	8.67	27.14	49.37	32.12	43.50
3	162.61	1.34	9.57	26.85	45.83	29.89	43.50
4	217.54	1.50	11.11	26.63	44.33	30.31	46.00
5	352.94	2.07	14.15	26.81	43.33	32.74	46.00
6	407.51	2.23	16.33	27.17	39.10	30.49	46.00



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM161100945802
Page: 13 of 20

Vertical

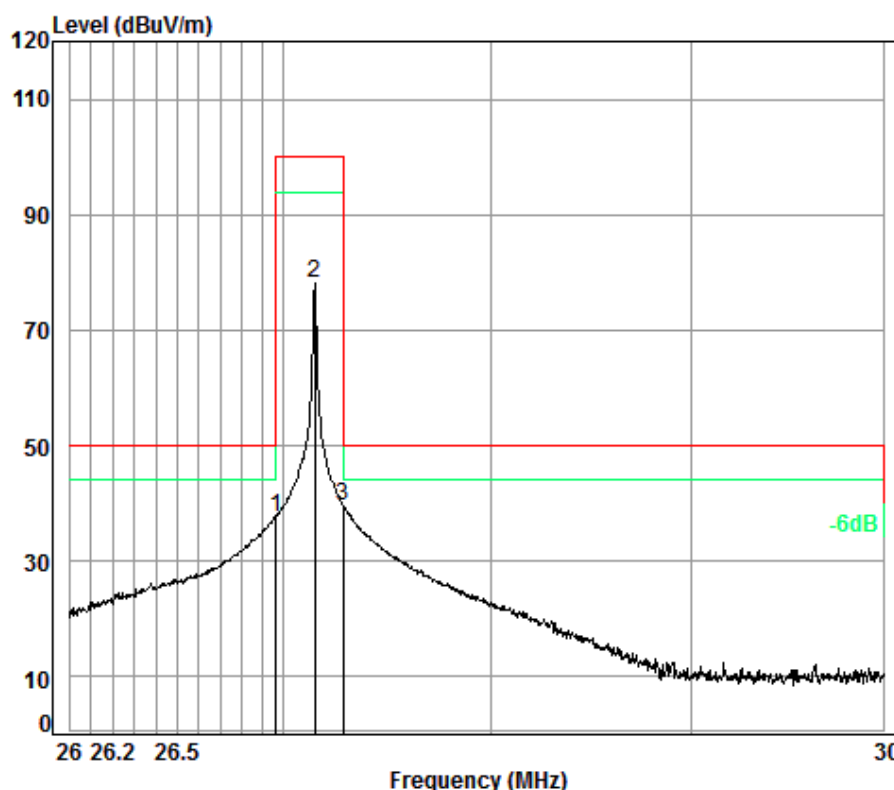

Condition: 3m VERTICAL

Job No. : 9458CR

Test mode: TX

	Freq	Cable	Ant	Preamp	Read	Limit	Over
	MHz	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m
1	26.96	0.60	20.68	27.37	43.75	37.66	50.00
2	27.14	0.60	20.56	27.37	84.47	78.26	100.00
3 pp	27.28	0.60	20.47	27.37	46.02	39.72	50.00




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM161100945802

Page: 14 of 20

Horizontal

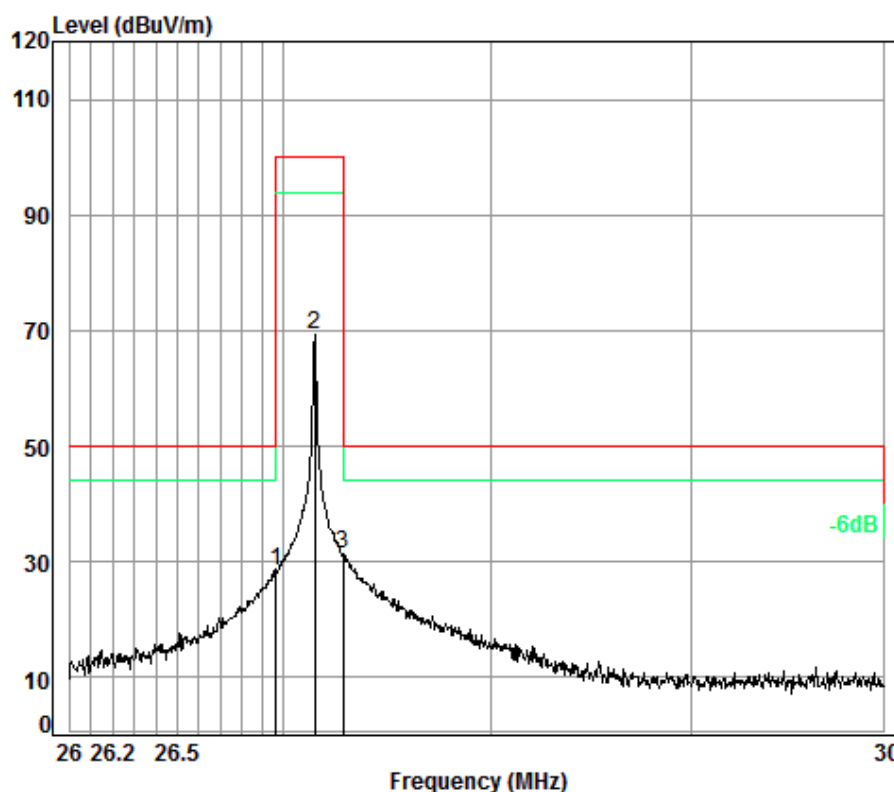

Condition: 3m HORIZONTAL

Job No. : 9458CR

Test mode: TX

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	26.96	0.60	20.68	27.37	34.58	28.49	50.00	-21.51
2	27.14	0.60	20.56	27.37	75.66	69.45	100.00	-30.55
3 pp	27.28	0.60	20.47	27.37	37.57	31.27	50.00	-18.73



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch


Report No.: SZEM161100945802

Page: 15 of 20

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

6.3 Occupied Bandwidth

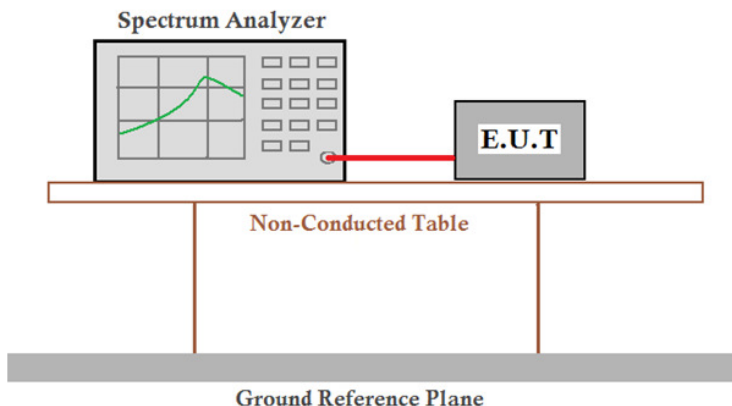Test Requirement:	47 CFR Part 15C Section 15.215 (C)
Test Method:	ANSI C63.10: 2013
Limit:	Operation within the band 26.960 – 27.280 MHz
Requirement :	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Mode:	Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Result:	Pass




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM161100945802

Page: 17 of 20


Test Result:

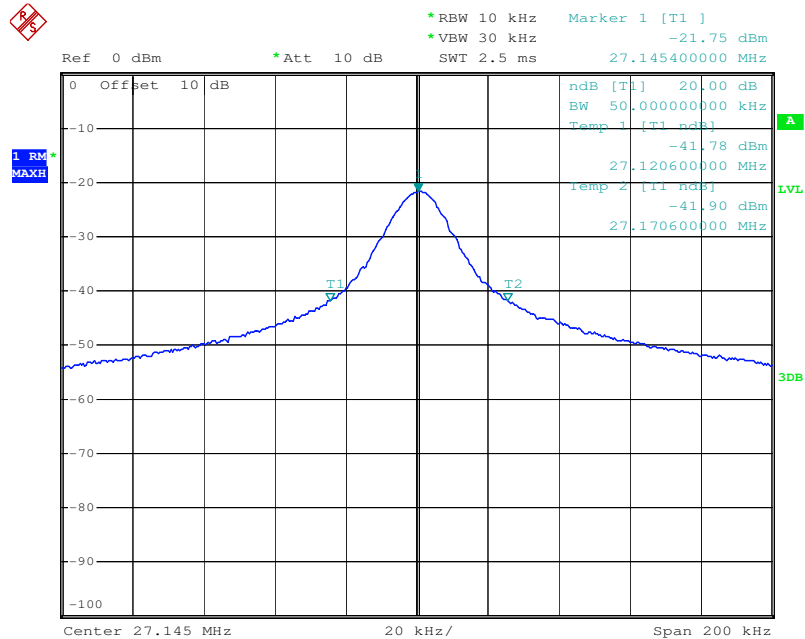

7 Photographs - EUT Test Setup

Test model No.: 3688-K12A

7.1 Radiated Emission

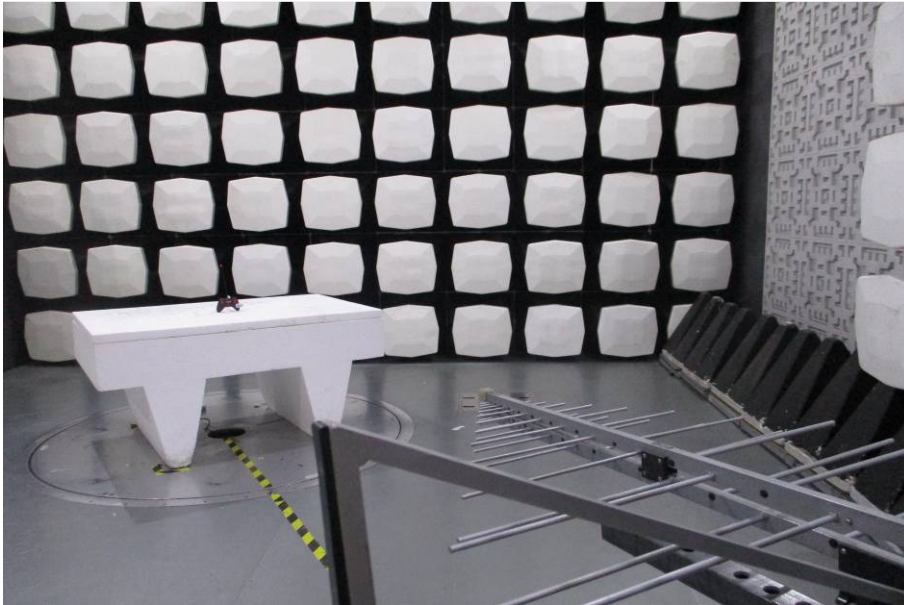

8 Photographs - EUT Construction Details





**SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch**

Report No.: SZEM161100945802

Page: 19 of 20

