

## FCC Test Report

**Report No.:** RF200717C08-3

**FCC ID:** 2AKCZ-101

**Test Model:** APL57-0F2, APL57-101 (refer to item 3.1 for more details)

**Received Date:** Jul. 17, 2020

**Test Date:** Nov. 02, 2021 (for beamforming power)  
Mar. 11, 2022 (for radiated emissions & band edge measurement)

**Issued Date:** Mar. 14, 2022

**Applicant:** SonicWall Inc.

**Address:** 1033 McCarthy Blvd., Milpitas, CA 95035, USA

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record .....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT .....	6
3.2 Description of Test Modes.....	9
3.2.1 Test Mode Applicability and Tested Channel Detail.....	10
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards and References .....	13
<b>4 Test Types and Results</b> .....	<b>14</b>
4.1 Radiated Emission and Bandedge Measurement .....	14
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	14
4.1.2 Test Instruments .....	16
4.1.3 Test Procedures.....	18
4.1.4 Deviation from Test Standard .....	18
4.1.5 Test Setup.....	19
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results .....	20
4.2 Transmit Power Measurement.....	32
4.2.1 Limits of Transmit Power Measurement .....	32
4.2.2 Test Setup.....	32
4.2.3 Test Instruments .....	33
4.2.4 Test Procedure .....	33
4.2.5 Deviation from Test Standard .....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results .....	34
<b>5 Pictures of Test Arrangements</b> .....	<b>35</b>
<b>Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)</b> .....	<b>36</b>
<b>Annex B- Band Edge Measurement</b> .....	<b>38</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>41</b>

### Release Control Record

Issue No.	Description	Date Issued
RF200717C08-3	Original Release	Mar. 14, 2022



## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	N/A	Refer to Note 1 as below
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -1.0 dB at 17235.00 MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	N/A	Refer to Note 1 as below
15.407(a)(1/2/3)	Peak Power Spectral Density	N/A	Refer to Note 1 as below
15.407(e)	6 dB Bandwidth	N/A	Refer to Note 1 as below
15.407(g)	Frequency Stability	N/A	Refer to Note 1 as below
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note:

1. Only beamforming power, radiated emissions above 1GHz tests, and band edge measurement were performed for this addendum. Please refer to BV CPS report no.: RF200717C08-1 for other testing data.
2. For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.
3. For U-NII-1 band compliance with rule 15.407(b) of the band-edge items, the test plots were recorded in Annex B. Test Procedures refer to report 4.1.3
4. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Wireless Network Security Appliance
<b>Brand</b>	SONICWALL
<b>Test Model</b>	APL57-0F2, APL57-101
<b>Model Difference</b>	Refer to note for more details
<b>Status of EUT</b>	Engineering Sample
<b>Power Supply Rating</b>	12 Vdc (adapter)
<b>Modulation Type</b>	256QAM, 64QAM, 16QAM, QPSK, BPSK
<b>Modulation Technology</b>	OFDM
<b>Transfer Rate</b>	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0 Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
<b>Operating Frequency</b>	5180 ~ 5240 MHz, 5745 ~ 5825 MHz
<b>Number of Channel</b>	5180 ~ 5240 MHz: 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) 5745 ~ 5825 MHz: 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
<b>Output Power</b>	Beamforming Mode: 5180 ~ 5240MHz: 138.845mW 5745 ~ 5825MHz: 244.733mW
<b>Antenna Type</b>	Refer to Note as below
<b>Antenna Connector</b>	Refer to Note as below
<b>Accessory Device</b>	Refer to Note as below
<b>Data Cable Supplied</b>	Refer to Note as below

**Note:**

1. This report is issued as a supplementary report to BV CPS report no.: RF200717C08-1. The difference compared with the original report is updating beamforming power. Therefore, only beamforming power, radiated emissions above 1GHz tests, and band edge measurement were verified and recorded in the report.
2. The following models are provided to this EUT. The model 'APL57-0F2' was chosen for final tests.
  - (a) The EUT using the same PCB Layout.
  - (b) Due to series models, the parts are different as below:

Model	APL57-0F2	APL57-101
PSE Out	N/A	N/A
Copper Ports	x8 GbE	x8 GbE
SFP Ports	x2 SFP (Max: 2.5Gbps)	NO
mPCIe WiFi Module	2x2 11ac Wave 2 (Module)	2x2 11ac Wave 2 (Module)
WiFi SPEC	2.4G+5G 11ac+abgn support Beamforming	2.4G+5G 11ac+abgn support Beamforming
ANT for WiFi	x2 ANT's (EXT)	x2 ANT's (EXT)
Console (RJ45)	YES	YES
USB Port	3.0 x2	3.0 x2
FAN(s)	YES	YES
Outer covering	Metal	Metal
CPU	1.4GHz	1.2GHz

3. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	TX Function	Beamforming Mode
802.11a	2TX	Not Support
802.11n (HT20)	2TX	Support
802.11n (HT40)	2TX	Support
802.11ac (VHT20)	2TX	Support
802.11ac (VHT40)	2TX	Support
802.11ac (VHT80)	2TX	Support

\* The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 802.11ac mode for VHT20 / VHT40, therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

\* For 802.11n and 802.11ac, CDD mode and Beamforming mode are presented in power output test item. For other test items, CDD mode is the worst case for final tests after pretesting.

4. The EUT uses following antennas.

Ant. Type	Dipole					
Ant. Connector	RP-SMA					
Frequency (MHz)	2400	2450	2500	5150	5550	5850
Peak Gain (dBi)	3.19	3.10	3.05	5.85	5.73	5.03

\* The max. gain was chosen for final tests.

5. The EUT consumes power from the following adapters.

Product	Brand	Model	Description
Adapter 1	Sunny COMPUTER TECHNOLOGY CO.,LTD.	SYS1546-3612-T3	I/P: 100-240 Vac, 50-60 Hz, 1.5 A O/P: 12 Vdc, 3 A 1.85m power cable with 1 core
Adapter 2 (Support unit only)	BILLION	BA040-120300MAX	I/P: 100-240 Vac, 50/60 Hz, 1 A O/P: 12 Vdc, 3 A 1.46m power cable without core

\* After the pretesting, the adapter 1 was chosen for final test.

6. WLAN 2.4GHz & WLAN 5GHz technology cannot transmit at same time.
7. Spurious emission of the simultaneous operation (2.4GHz and 5GHz) has been evaluated and no non-compliance was found.
8. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.
9. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.



### 3.2 Description of Test Modes

#### For 5180 ~ 5240 MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency (MHz)
42	5210

#### For 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency (MHz)
155	5775

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To		Description
	RE $\geq$ 1G	APCM	
-	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz

**APCM**: Antenna Port Conducted Measurement

**Note**: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

#### Radiated Emission Test (Above 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Frequency Band (MHz)	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	5180-5240	802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
-		802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5
-		802.11ac (VHT80)	42	42	OFDM	BPSK	29.3
-	5745-5825	802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
-		802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
-		802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

#### Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Frequency Band (MHz)	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	5180-5240	802.11n (HT20)	36 to 48	36, 40, 48	OFDM	BPSK	6.5
-		802.11n (HT40)	38 to 46	38, 46	OFDM	BPSK	13.5
-		802.11ac (VHT80)	42	42	OFDM	BPSK	29.3
-	5745-5825	802.11n (HT20)	149 to 165	149, 157, 165	OFDM	BPSK	6.5
-		802.11n (HT40)	151 to 159	151, 159	OFDM	BPSK	13.5
-		802.11ac (VHT80)	155	155	OFDM	BPSK	29.3

#### Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 66 % RH	120 Vac, 60 Hz	Titan Hsu
APCM	25 deg. C, 60 % RH	120 Vac, 60 Hz	Ivan Tseng

### 3.3 Duty Cycle of Test Signal


#### MODULATION TYPE: BPSK

Duty cycle of test signal is < 98 %, duty factor is required.

**802.11n (HT20):** Duty cycle = 4.975/5.088 = 0.978, Duty factor =  $10 \cdot \log(1/0.978) = 0.10$

**802.11n (HT40):** Duty cycle = 2.4/2.53 = 0.949, Duty factor =  $10 \cdot \log(1/0.949) = 0.23$

**802.11ac (VHT80):** Duty cycle = 3.325/3.835 = 0.867, Duty factor =  $10 \cdot \log(1/0.867) = 0.62$

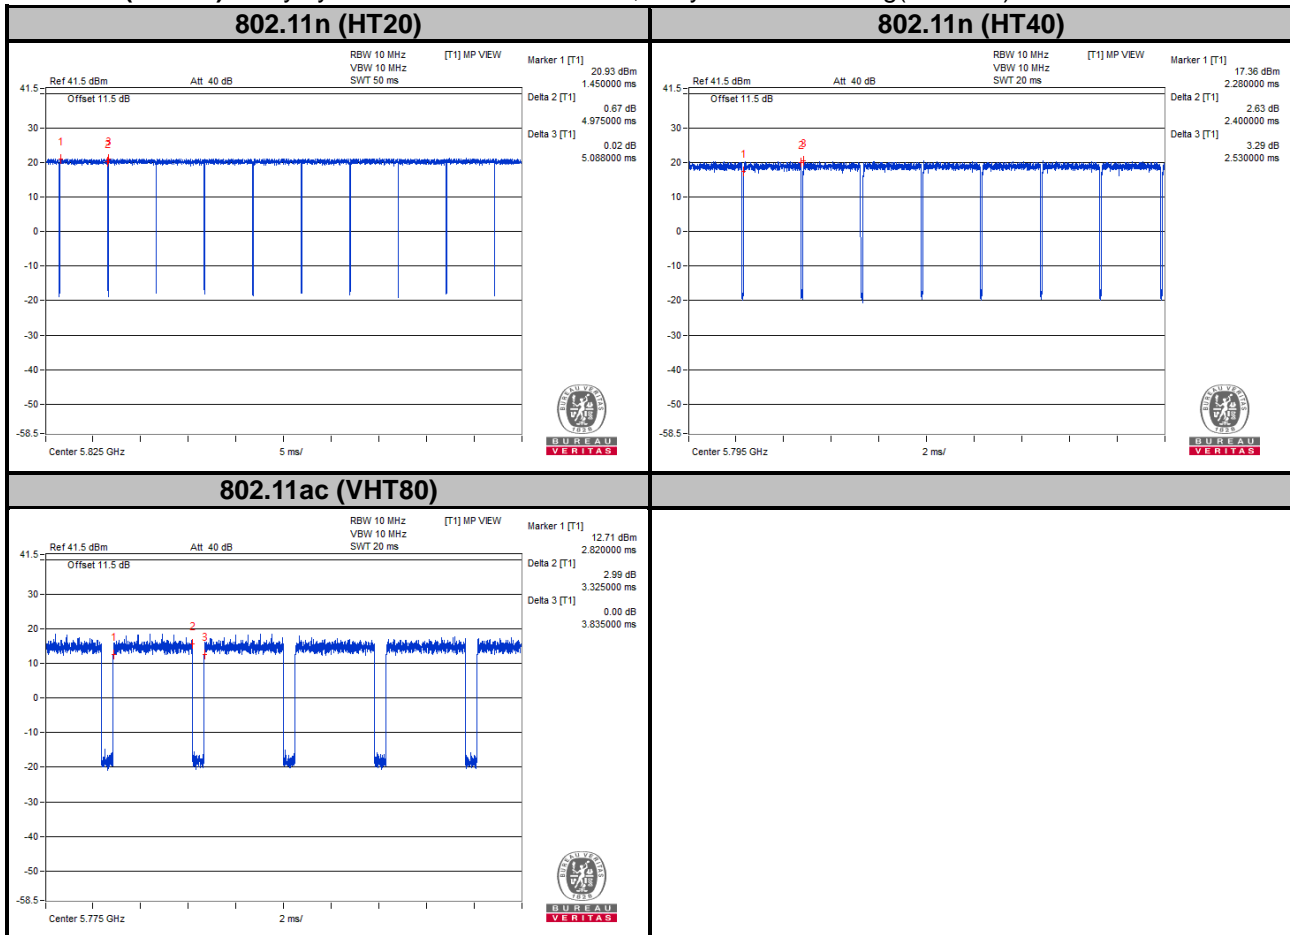

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
1.	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved	-
2.	Flash	HP	v250W	05	NA	-
	Flash	HP	v250W	03	NA	-
3.	Load*2	NA	NA	NA	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Console cable	1	1.15	N	0	Accessory of EUT
2.	Fiber cable	1	3	N	0	Provided by client
3.	LAN cable	1	6	N	0	RJ45, Cat5e
4.	Power cord	1	0.9	N	0	Accessory of EUT
5.	LAN cable	7	1.5	N	0	RJ45, Cat5e

#### 3.4.1 Configuration of System under Test

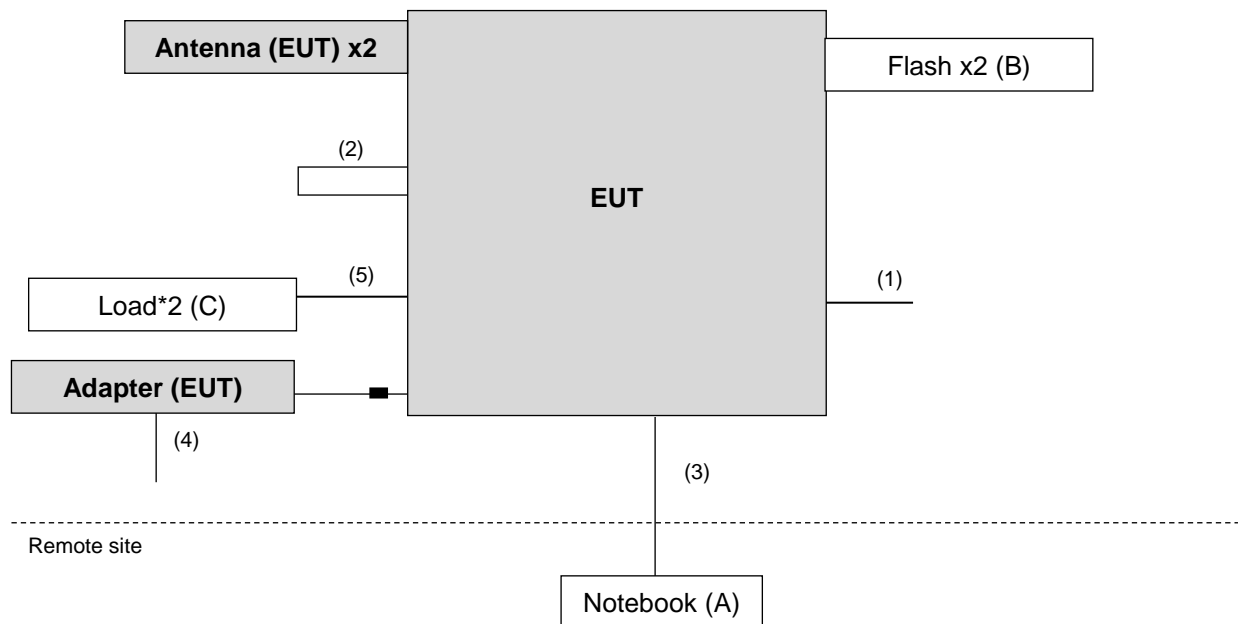

### 3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

#### Test Standard:

**FCC Part 15, Subpart E (15.407)**

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

#### References Test Guidance:

**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of Unwanted Emission Out of the Restricted Bands

Applicable To		Limit	
789033 D02 General UNII Test Procedures New Rules v02r01		Field Strength at 3 m	
		PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
5150~5250 MHz	15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i)	PK:-27 (dBm/MHz) <sup>*1</sup> PK:10 (dBm/MHz) <sup>*2</sup> PK:15.6 (dBm/MHz) <sup>*3</sup> PK:27 (dBm/MHz) <sup>*4</sup>	PK: 68.2 (dBµV/m) <sup>*1</sup> PK:105.2 (dBµV/m) <sup>*2</sup> PK: 110.8 (dBµV/m) <sup>*3</sup> PK:122.2 (dBµV/m) <sup>*4</sup>
	<input type="checkbox"/> 15.407(b)(4)(ii)	Emission limits in section 15.247(d)	

<sup>\*1</sup> beyond 75 MHz or more above of the band edge.

<sup>\*2</sup> below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

<sup>\*3</sup> below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

<sup>\*4</sup> from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

**Note:**

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts).}$$

#### 4.1.2 Test Instruments

<For radiated emissions & band edge measurement>

Test Date: Mar. 11, 2022

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESR3	102579	Jul. 05, 2021	Jul. 04, 2022
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 07, 2021	Jun. 06, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-171	Oct. 29, 2021	Oct. 28, 2022
HORN Antenna SCHWARZBECK	9120D	9120D-408	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Oct. 26, 2021	Oct. 25, 2022
Loop Antenna EMCI	EM-6879	269	Sep. 16, 2021	Sep. 15, 2022
Preamplifier Agilent (Below 1GHz)	8447D	2944A10738	Jul. 24, 2021	Jul. 23, 2022
Preamplifier Agilent (Above 1GHz)	8449B	3008A02465	Mar. 22, 2021	Mar. 21, 2022
RF Coaxial Cable WOKEN With 5dB PAD	8D-FB	Cable-CH3-01	Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH3-03 (223653/4)	Jul. 24, 2021	Jul. 23, 2022
RF signal cable HUBER+SUHNER& EMCI	SUCOFLEX 104&EMC104-SM- SM-8000	Cable-CH3-03 (309224+170907)	Jul. 24, 2021	Jul. 23, 2022
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021702	NA	NA
Turn Table BV ADT	TT100	TT93021702	NA	NA
Turn Table Controller BV ADT	SC100	SC93021702	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Pre-amplifier (18GHz-40GHz) EMC	EMC184045B	980175	Sep. 04, 2021	Sep. 03, 2022
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55 190004/MY551900 07/MY55210005	Jul. 12, 2021	Jul. 11, 2022

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Chamber 3.



<For beamforming power>

Test Date: Nov. 02, 2021

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 07, 2021	Jun. 06, 2022
USB Wideband Power Sensor KEYSIGHT	U2021XA	MY55050005/MY55 190004/MY551900 07/MY55210005	Jul. 12, 2021	Jul. 11, 2022

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.1.3 Test Procedures

##### **For Radiated Emission above 30 MHz**

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq 98$  %) for Average detection (AV) at frequency above 1 GHz.  
(11n (HT20): RBW = 1 MHz, VBW = 1 kHz ; 11n (HT40): RBW = 1 MHz, VBW = 1 kHz ;  
11ac (VHT80): RBW = 1 MHz, VBW = 1 kHz)
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard

No deviation.

#### 4.1.5 Test Setup

##### <Radiated Emission above 1 GHz>

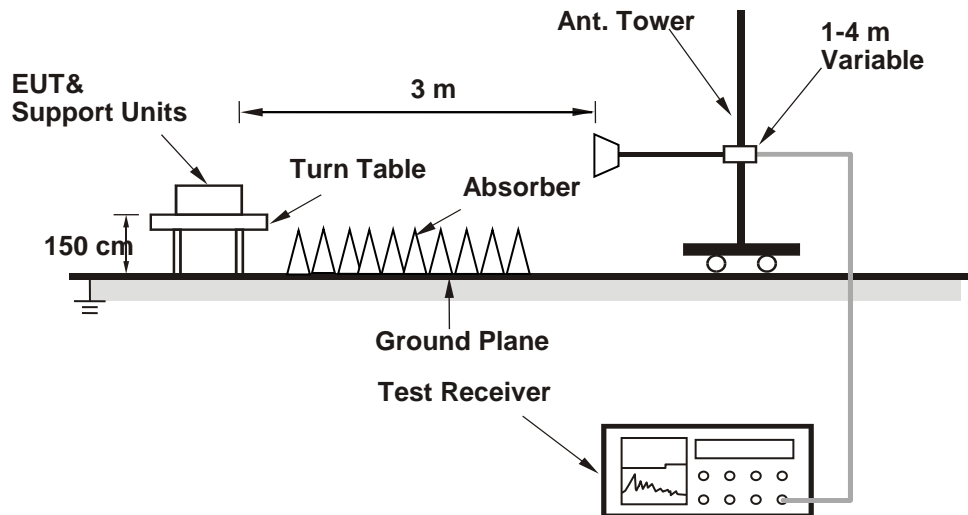

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

##### Above 1 GHz Data :

RF Mode	TX 802.11n (HT20)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

##### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.77 H	335	44.6	12.9
2	5150.00	44.2 AV	54.0	-9.8	1.77 H	335	31.3	12.9
3	*5180.00	104.2 PK			1.71 H	336	61.8	42.4
4	*5180.00	93.5 AV			1.71 H	336	51.1	42.4
5	#10360.00	57.2 PK	68.2	-11.0	2.25 H	305	34.6	22.6

##### Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	65.5 PK	74.0	-8.5	1.66 V	102	52.6	12.9
2	5150.00	52.1 AV	54.0	-1.9	1.66 V	102	39.2	12.9
3	*5180.00	118.5 PK			1.77 V	115	76.1	42.4
4	*5180.00	108.0 AV			1.77 V	115	65.6	42.4
5	#10360.00	58.0 PK	68.2	-10.2	1.66 V	205	35.4	22.6

##### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT20)	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	105.4 PK			1.22 H	335	63.2	42.2
2	*5200.00	94.0 AV			1.22 H	335	51.8	42.2
3	#10400.00	58.2 PK	68.2	-10.0	2.25 H	308	35.4	22.8
4	15600.00	69.0 PK	74.0	-5.0	1.22 H	99	44.1	24.9
5	15600.00	52.4 AV	54.0	-1.6	1.22 H	99	27.5	24.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	119.2 PK			1.88 V	115	77.0	42.2
2	*5200.00	108.5 AV			1.88 V	115	66.3	42.2
3	#10400.00	59.0 PK	68.2	-9.2	1.75 V	225	36.2	22.8
4	15600.00	60.5 PK	74.0	-13.5	1.61 V	181	35.6	24.9
5	15600.00	47.6 AV	54.0	-6.4	1.61 V	181	22.7	24.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT20)	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	103.0 PK			1.32 H	332	60.8	42.2
2	*5240.00	92.3 AV			1.32 H	332	50.1	42.2
3	5350.00	57.0 PK	74.0	-17.0	1.35 H	328	44.0	13.0
4	5350.00	44.2 AV	54.0	-9.8	1.35 H	328	31.2	13.0
5	#10480.00	59.0 PK	68.2	-9.2	2.28 H	328	36.2	22.8
6	15720.00	68.0 PK	74.0	-6.0	1.18 H	98	43.7	24.3
7	15720.00	52.1 AV	54.0	-1.9	1.18 H	98	27.8	24.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	119.2 PK			1.88 V	112	77.0	42.2
2	*5240.00	108.3 AV			1.88 V	112	66.1	42.2
3	5350.00	57.0 PK	74.0	-17.0	1.66 V	122	44.0	13.0
4	5350.00	44.0 AV	54.0	-10.0	1.66 V	122	31.0	13.0
5	#10480.00	59.0 PK	68.2	-9.2	1.72 V	205	36.2	22.8
6	15720.00	60.2 PK	74.0	-13.8	1.52 V	175	35.9	24.3
7	15720.00	47.0 AV	54.0	-7.0	1.52 V	175	22.7	24.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT20)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	104.8 PK			1.48 H	128	61.3	43.5
2	*5745.00	94.2 AV			1.48 H	128	50.7	43.5
3	11490.00	59.8 PK	74.0	-14.2	2.18 H	322	34.6	25.2
4	11490.00	46.5 AV	54.0	-7.5	2.18 H	322	21.3	25.2
5	#17235.00	67.2 PK	68.2	-1.0	1.18 H	61	38.8	28.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	120.2 PK			1.89 V	128	76.7	43.5
2	*5745.00	109.0 AV			1.89 V	128	65.5	43.5
3	11490.00	59.8 PK	74.0	-14.2	1.99 V	235	34.6	25.2
4	11490.00	46.1 AV	54.0	-7.9	1.99 V	235	20.9	25.2
5	#17235.00	64.0 PK	68.2	-4.2	1.92 V	198	35.6	28.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT20)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	103.5 PK			1.19 H	132	89.4	14.1
2	*5785.00	92.5 AV			1.19 H	132	78.4	14.1
3	11570.00	59.2 PK	74.0	-14.8	2.18 H	325	34.3	24.9
4	11570.00	46.0 AV	54.0	-8.0	2.18 H	325	21.1	24.9
5	#17355.00	67.0 PK	68.2	-1.2	1.12 H	82	38.2	28.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	118.2 PK			1.99 V	128	74.5	43.7
2	*5785.00	107.2 AV			1.99 V	128	63.5	43.7
3	11570.00	59.2 PK	74.0	-14.8	1.95 V	244	34.3	24.9
4	11570.00	46.0 AV	54.0	-8.0	1.95 V	244	21.1	24.9
5	#17355.00	65.2 PK	68.2	-3.0	1.88 V	198	36.4	28.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.



RF Mode	TX 802.11n (HT20)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	102.0 PK			1.21 H	135	58.2	43.8
2	*5825.00	91.2 AV			1.21 H	135	47.4	43.8
3	11650.00	58.5 PK	74.0	-15.5	2.05 H	318	33.9	24.6
4	11650.00	45.8 AV	54.0	-8.2	2.05 H	318	21.2	24.6
5	#17475.00	67.0 PK	68.2	-1.2	1.05 H	88	37.7	29.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	115.7 PK			1.85 V	128	71.9	43.8
2	*5825.00	104.8 AV			1.85 V	128	61.0	43.8
3	11650.00	59.0 PK	74.0	-15.0	1.95 V	248	34.4	24.6
4	11650.00	46.0 AV	54.0	-8.0	1.95 V	248	21.4	24.6
5	#17475.00	66.0 PK	68.2	-2.2	1.95 V	193	36.7	29.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT40)	Channel	CH 38 : 5190 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.75 H	338	44.6	12.9
2	5150.00	44.5 AV	54.0	-9.5	1.75 H	338	31.6	12.9
3	*5190.00	98.5 PK			1.66 H	338	56.2	42.3
4	*5190.00	88.5 AV			1.66 H	338	46.2	42.3
5	#10380.00	58.0 PK	68.2	-10.2	2.28 H	325	35.3	22.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	68.0 PK	74.0	-6.0	1.68 V	118	55.1	12.9
2	5150.00	52.1 AV	54.0	-1.9	1.68 V	118	39.2	12.9
3	*5190.00	113.2 PK			1.65 V	118	70.9	42.3
4	*5190.00	103.2 AV			1.65 V	118	60.9	42.3
5	#10380.00	58.2 PK	68.2	-10.0	1.88 V	228	35.5	22.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT40)	Channel	CH 46 : 5230 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.5 PK	74.0	-16.5	1.65 H	322	14.9	42.6
2	5150.00	44.5 AV	54.0	-9.5	1.65 H	322	1.9	42.6
3	*5230.00	101.0 PK			1.66 H	335	88.5	12.5
4	*5230.00	91.0 AV			1.66 H	335	78.5	12.5
5	#10460.00	58.5 PK	68.2	-9.7	2.28 H	316	35.6	22.9
6	15690.00	66.2 PK	74.0	-7.8	1.12 H	99	41.8	24.4
7	15690.00	52.1 AV	54.0	-1.9	1.12 H	99	27.7	24.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.6 PK	74.0	-12.4	1.66 V	118	48.7	12.9
2	5150.00	49.0 AV	54.0	-5.0	1.66 V	118	36.1	12.9
3	*5230.00	117.2 PK			1.75 V	118	75.0	42.2
4	*5230.00	106.5 AV			1.75 V	118	64.3	42.2
5	#10460.00	59.2 PK	68.2	-9.0	1.88 V	207	36.3	22.9
6	15690.00	59.9 PK	74.0	-14.1	1.58 V	175	35.5	24.4
7	15690.00	47.0 AV	54.0	-7.0	1.58 V	175	22.6	24.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT40)	Channel	CH 151 : 5755 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	57.0 PK	68.2	-11.2	2.02 H	138	43.7	13.3
2	*5755.00	102.0 PK			1.99 H	135	58.5	43.5
3	*5755.00	92.0 AV			1.99 H	135	48.5	43.5
4	11510.00	59.1 PK	74.0	-14.9	2.02 H	58	34.0	25.1
5	11510.00	46.0 AV	54.0	-8.0	2.02 H	58	20.9	25.1
6	#17265.00	65.8 PK	68.2	-2.4	1.08 H	62	37.5	28.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	66.1 PK	68.2	-2.1	1.95 V	145	52.8	13.3
2	*5755.00	116.8 PK			1.85 V	128	73.3	43.5
3	*5755.00	106.1 AV			1.85 V	128	62.6	43.5
4	11510.00	59.5 PK	74.0	-14.5	1.88 V	235	34.4	25.1
5	11510.00	46.2 AV	54.0	-7.8	1.88 V	235	21.1	25.1
6	#17265.00	64.5 PK	68.2	-3.7	1.75 V	198	36.2	28.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11n (HT40)	Channel	CH 159 : 5795 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	101.5 PK			1.52 H	128	57.7	43.8
2	*5795.00	90.6 AV			1.52 H	128	46.8	43.8
3	#5925.00	57.6 PK	68.2	-10.6	1.69 H	128	43.5	14.1
4	11590.00	59.0 PK	74.0	-15.0	2.25 H	311	34.3	24.7
5	11590.00	46.1 AV	54.0	-7.9	2.25 H	311	21.4	24.7
6	#17385.00	67.0 PK	68.2	-1.2	1.18 H	82	38.1	28.9

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5795.00	114.8 PK			1.85 V	105	71.0	43.8
2	*5795.00	104.5 AV			1.85 V	105	60.7	43.8
3	#5925.00	60.5 PK	68.2	-7.7	1.88 V	112	46.4	14.1
4	11590.00	59.2 PK	74.0	-14.8	1.82 V	228	34.5	24.7
5	11590.00	46.0 AV	54.0	-8.0	1.82 V	228	21.3	24.7
6	#17385.00	65.2 PK	68.2	-3.0	1.68 V	192	36.3	28.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ac (VHT80)	Channel	CH 42 : 5210 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.77 H	322	44.3	12.9
2	5150.00	44.2 AV	54.0	-9.8	1.77 H	322	31.3	12.9
3	*5210.00	93.5 PK			1.65 H	338	51.3	42.2
4	*5210.00	83.1 AV			1.65 H	338	40.9	42.2
5	5350.00	57.0 PK	74.0	-17.0	1.66 H	322	44.0	13.0
6	5350.00	44.1 AV	54.0	-9.9	1.66 H	322	31.1	13.0
7	#10420.00	58.2 PK	68.2	-10.0	2.33 H	318	35.3	22.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.2 PK	74.0	-3.8	1.66 V	118	57.3	12.9
2	5150.00	52.2 AV	54.0	-1.8	1.66 V	118	39.3	12.9
3	*5210.00	108.2 PK			1.66 V	118	66.0	42.2
4	*5210.00	98.1 AV			1.66 V	118	55.9	42.2
5	5350.00	57.8 PK	74.0	-16.2	1.55 V	118	44.8	13.0
6	5350.00	44.3 AV	54.0	-9.7	1.55 V	118	31.3	13.0
7	#10420.00	59.0 PK	68.2	-9.2	1.77 V	218	36.1	22.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ac (VHT80)	Channel	CH 155 : 5775 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	57.0 PK	68.2	-11.2	1.63 H	128	43.7	13.3
2	*5775.00	94.0 PK			1.55 H	125	50.4	43.6
3	*5775.00	84.5 AV			1.55 H	125	40.9	43.6
4	#5925.00	57.6 PK	68.2	-10.6	1.61 H	122	43.5	14.1
5	11550.00	59.1 PK	74.0	-14.9	2.02 H	322	34.1	25.0
6	11550.00	46.0 AV	54.0	-8.0	2.02 H	322	21.0	25.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	66.3 PK	68.2	-1.9	1.85 V	121	53.0	13.3
2	*5775.00	109.0 PK			1.85 V	128	65.4	43.6
3	*5775.00	99.5 AV			1.85 V	128	55.9	43.6
4	#5925.00	61.5 PK	68.2	-6.7	1.95 V	102	47.4	14.1
5	11550.00	59.2 PK	74.0	-14.8	1.77 V	238	34.2	25.0
6	11550.00	46.0 AV	54.0	-8.0	1.77 V	238	21.0	25.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

## 4.2 Transmit Power Measurement

### 4.2.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125 mW (21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250 mW (24 dBm)
U-NII-2A	-		250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-2C	-		250 mW (24 dBm) or 11 dBm + 10 log B*
U-NII-3	√		1 Watt (30 dBm)

\*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;


Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less for 20 MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 4.2.2 Test Setup

#### <Power Output Measurement>

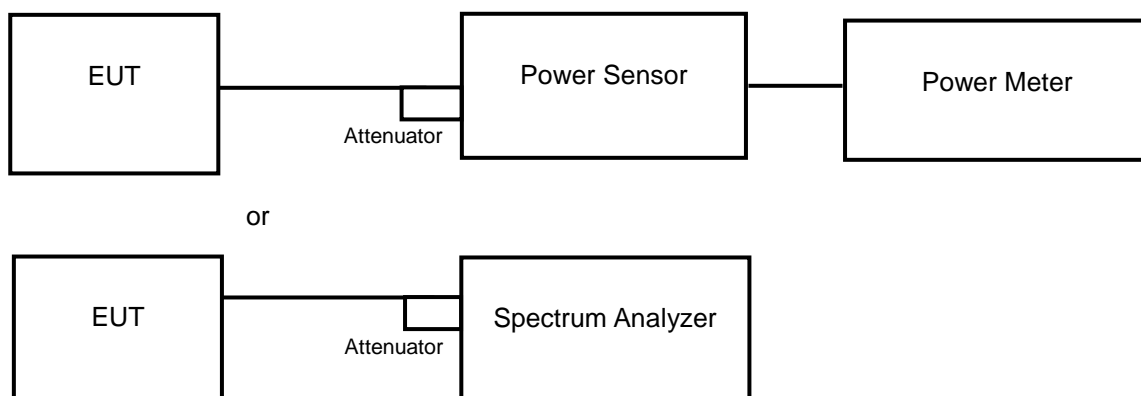



#### 4.2.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.2.4 Test Procedure

##### **Average Power Measurement**

<802.11n (HT20), 802.11n (HT40)>

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

<802.11ac (VHT80)>

- a. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99 % occupied bandwidth) of the signal.
- b. Set sweep trigger to “free run”.
- c. Set RBW = 1 MHz.
- d. Set VBW  $\geq$  3 MHz
- e. Number of points in sweep  $\geq$  2 Span / RBW.
- f. Sweep time  $\leq$  (number of points in sweep) \* T
- g. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- h. Detector = RMS.
- i. Trace mode = max hold.
- j. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
- k. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum

#### 4.2.5 Deviation from Test Standard

No deviation.

#### 4.2.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.2.7 Test Results

##### Power Output:

##### Beamforming Mode

##### 802.11n (HT20)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	17.21	17.02	102.952	20.13	27.14	Pass
40	5200	18.42	18.41	<b>138.845</b>	<b>21.43</b>	27.14	Pass
48	5240	17.43	17.57	112.483	20.51	27.14	Pass
149	5745	21.11	20.63	<b>244.733</b>	<b>23.89</b>	27.14	Pass
157	5785	19.15	18.85	158.96	22.01	27.14	Pass
165	5825	17.40	17.56	111.971	20.49	27.14	Pass

Note: Beamforming Gain =  $5.85 + 10\log(2) = 8.86\text{dBi} > 6\text{dBi}$ , so the limit shall be reduced to  $30 - (8.86 - 6) = 27.14\text{dBm}$ .

##### 802.11n (HT40)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	15.56	15.25	69.471	18.42	27.14	Pass
46	5230	17.96	18.12	127.381	21.05	27.14	Pass
151	5755	19.96	19.05	179.436	22.54	27.14	Pass
159	5795	19.52	19.04	169.704	22.30	27.14	Pass

Note: Beamforming Gain =  $5.85 + 10\log(2) = 8.86\text{dBi} > 6\text{dBi}$ , so the limit shall be reduced to  $30 - (8.86 - 6) = 27.14\text{dBm}$ .

##### 802.11ac (VHT80)

Channel	Frequency (MHz)	Maximum Conducted Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	13.69	13.55	46.035	16.63	27.14	Pass
155	5775	16.67	16.56	91.741	19.63	27.14	Pass


Note: Beamforming Gain =  $5.85 + 10\log(2) = 8.86\text{dBi} > 6\text{dBi}$ , so the limit shall be reduced to  $30 - (8.86 - 6) = 27.14\text{dBm}$ .

## 5 Pictures of Test Arrangements



Please refer to the attached file (Test Setup Photo).

## Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


### 802.11n (HT20)

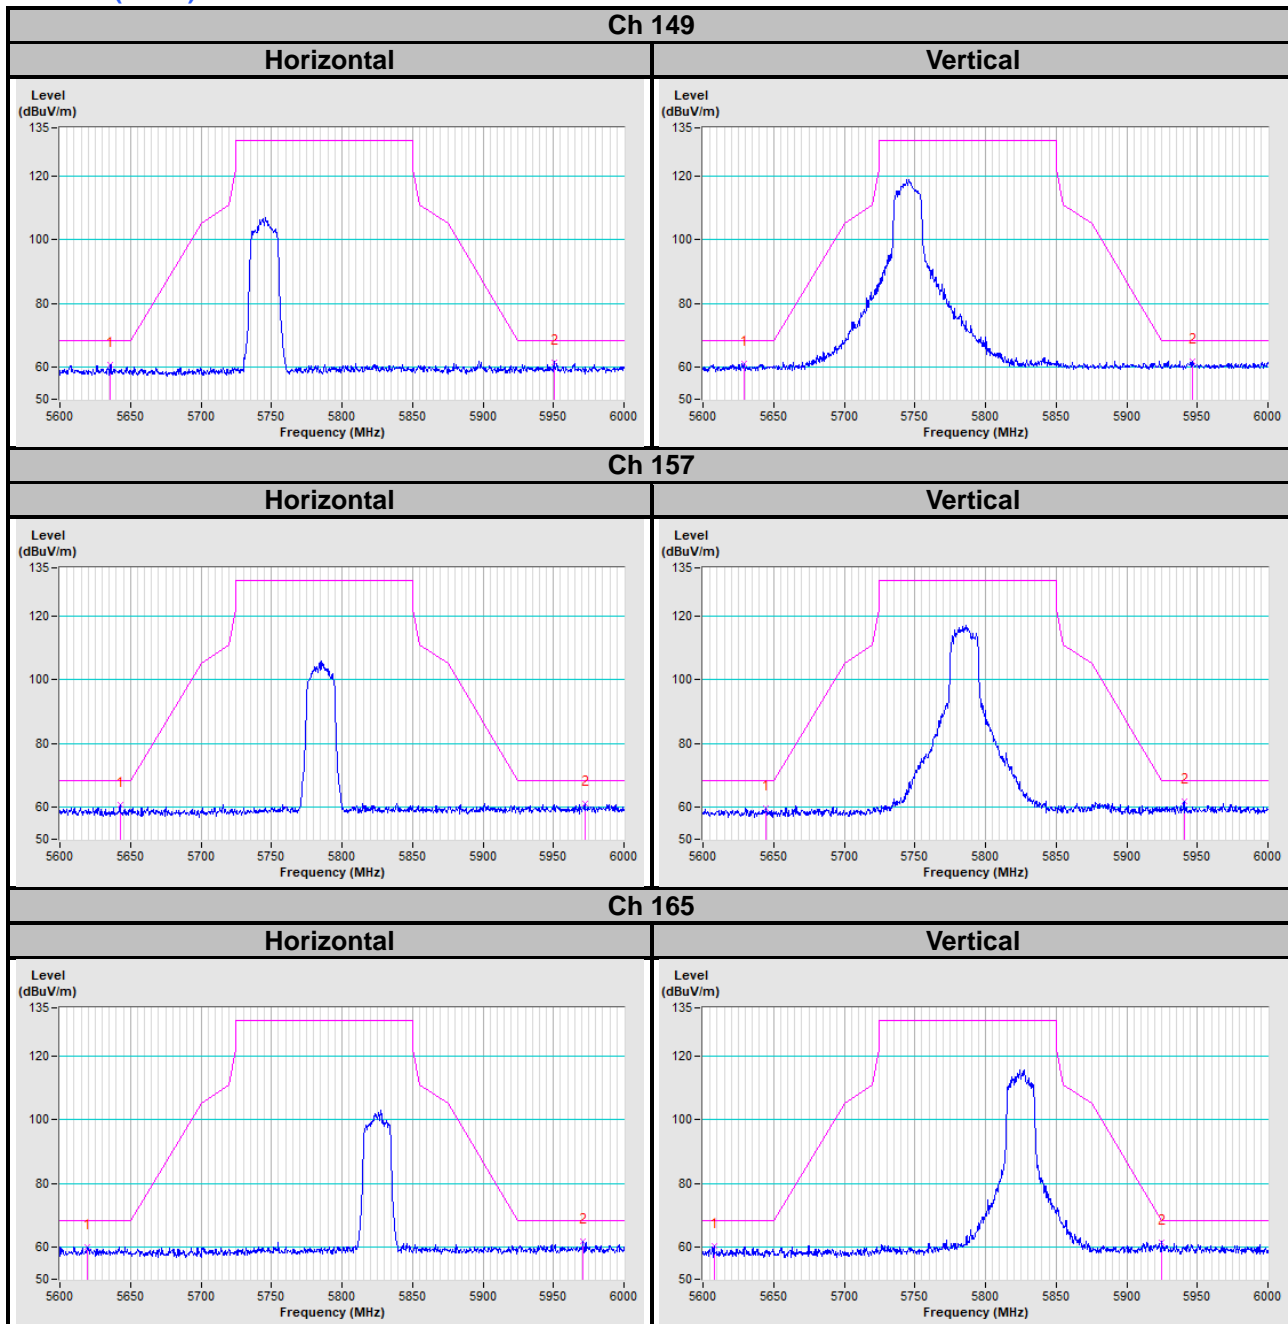


### 802.11n (HT40)

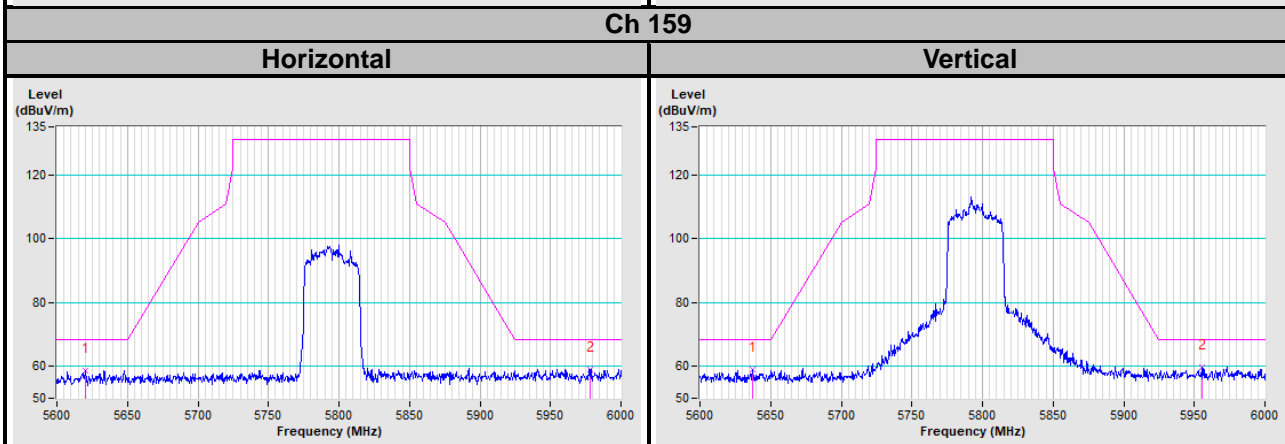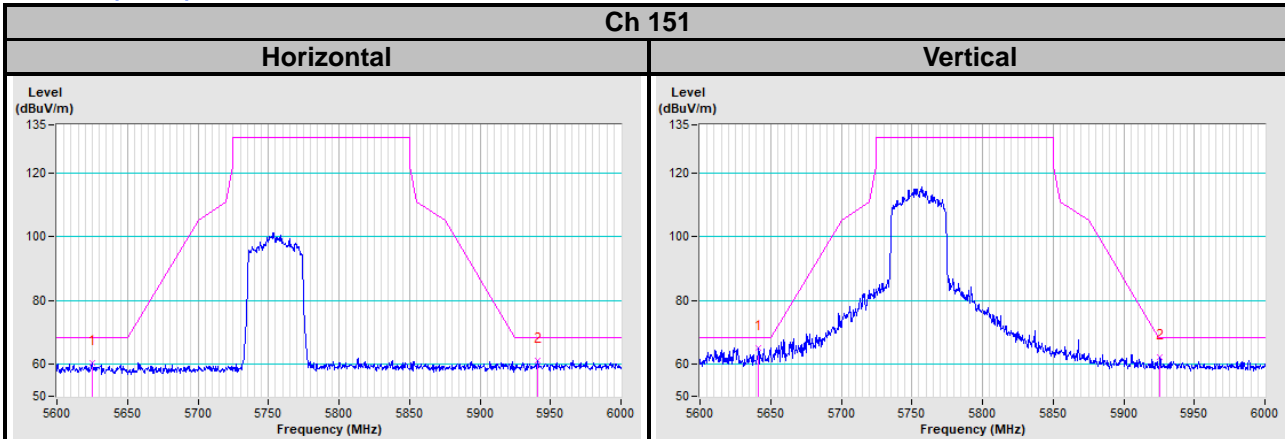

### 802.11ac (VHT80)

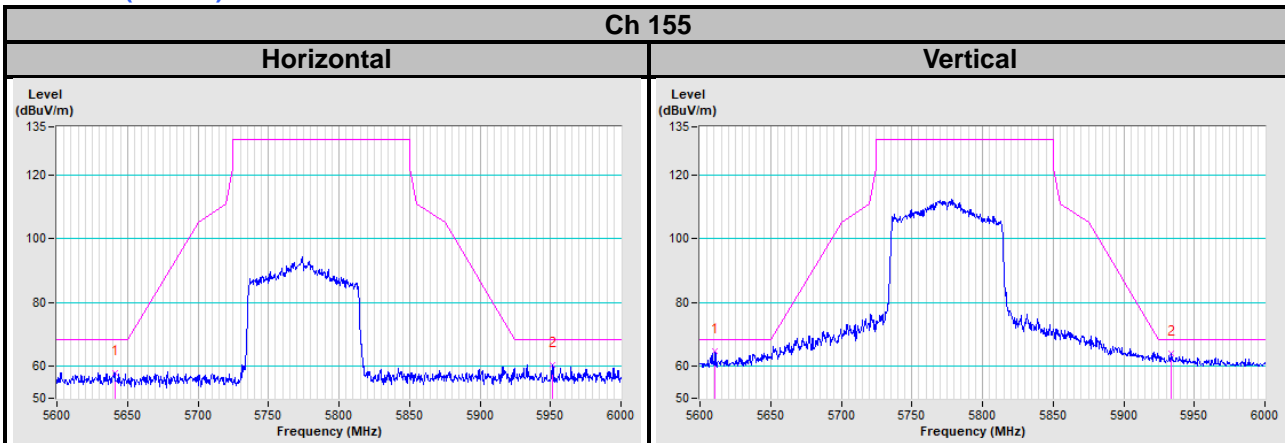


### Annex B- Band Edge Measurement

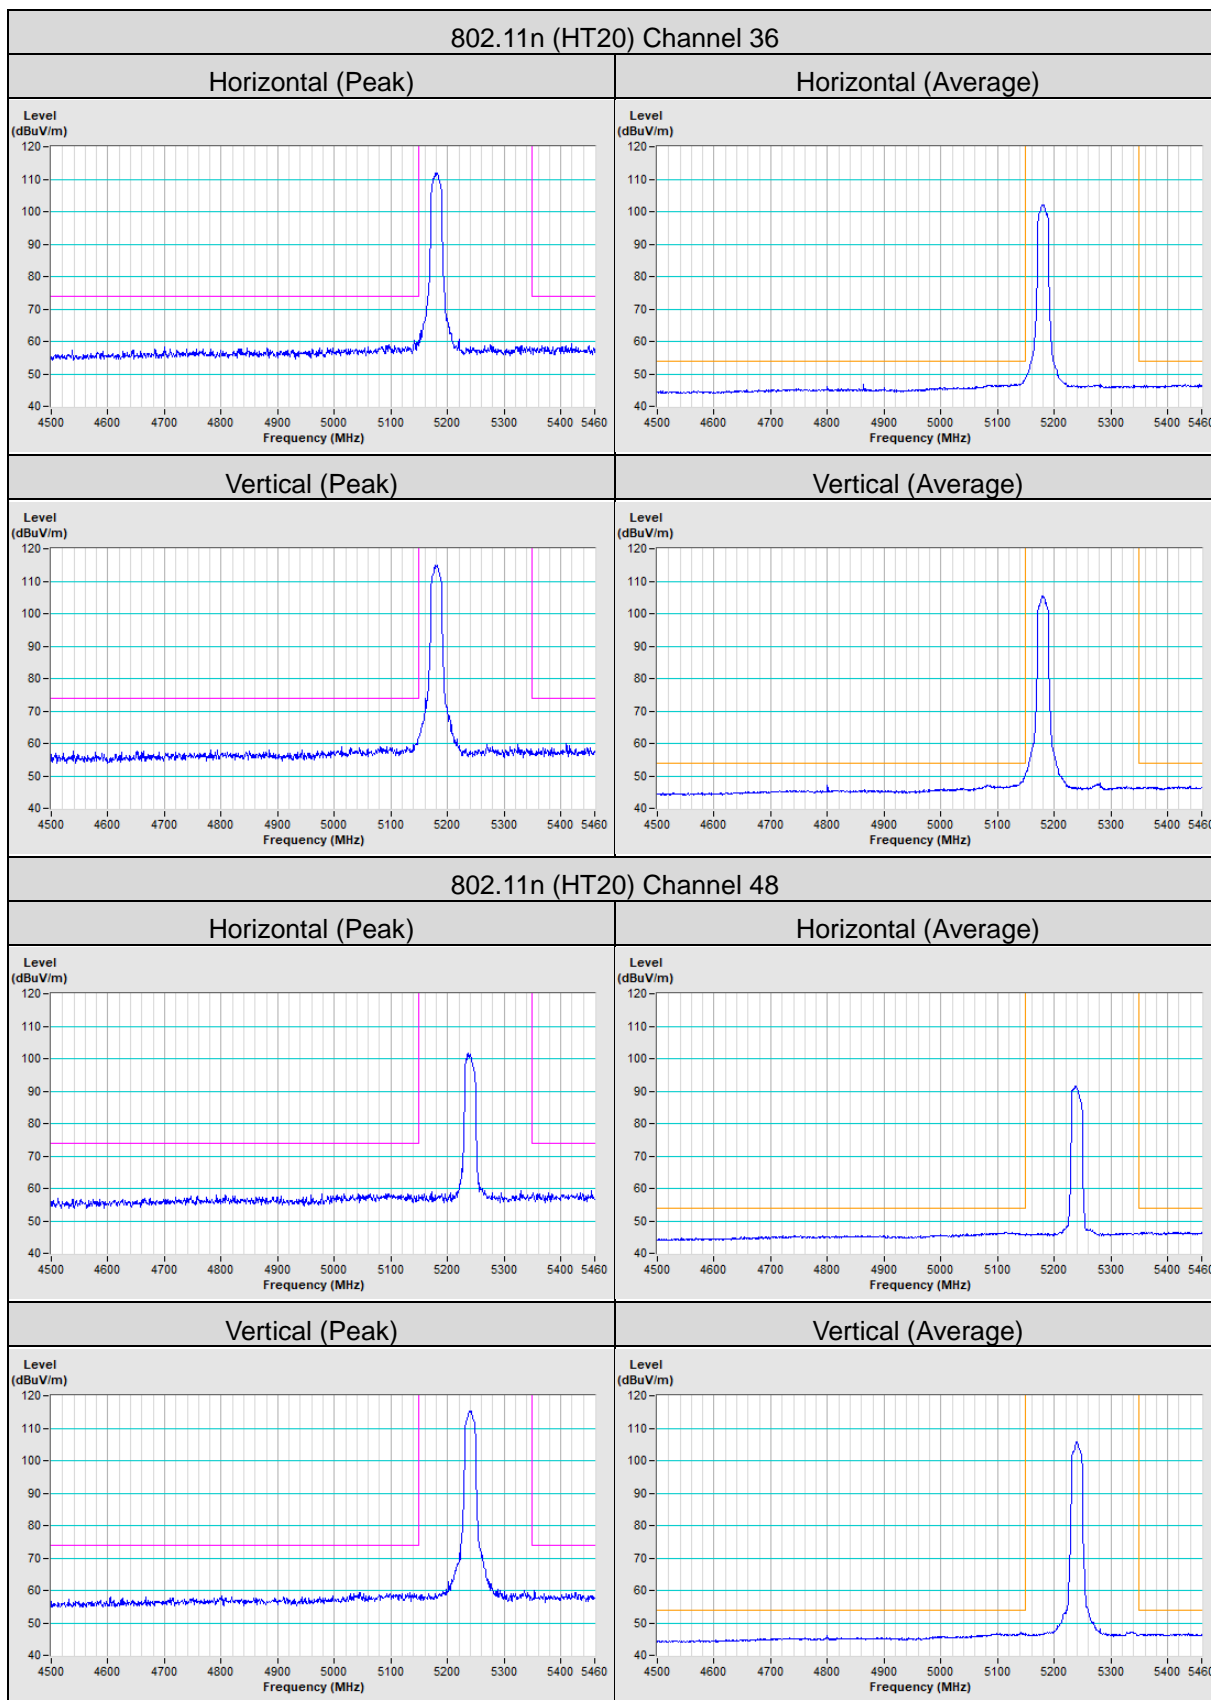


### 802.11n (HT40) Channel 38


Horizontal (Peak)

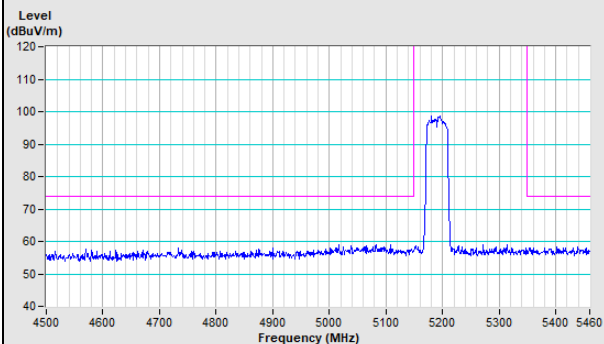


Horizontal (Average)

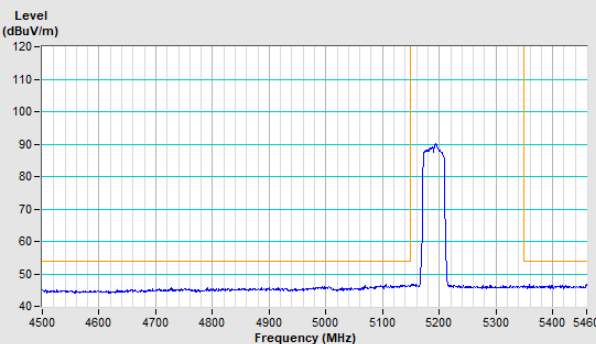

Vertical (Peak)

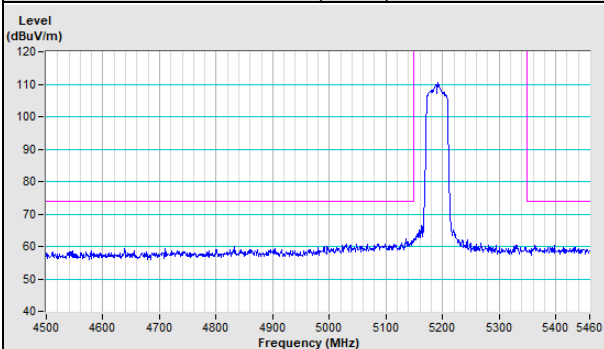


Vertical (Average)

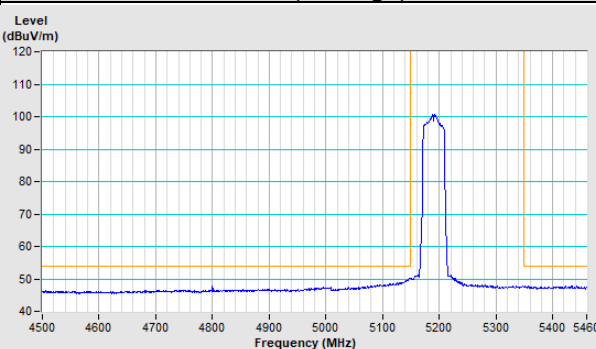


### 802.11n (HT40) Channel 46


Horizontal (Peak)

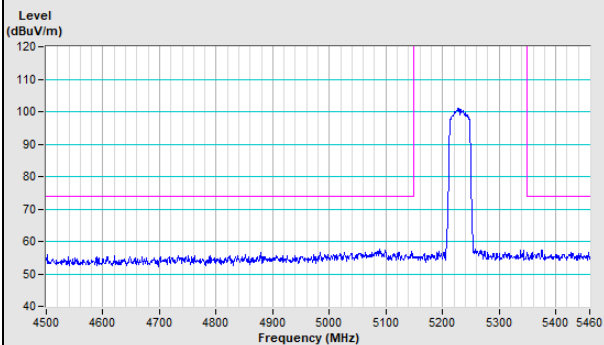


Horizontal (Average)

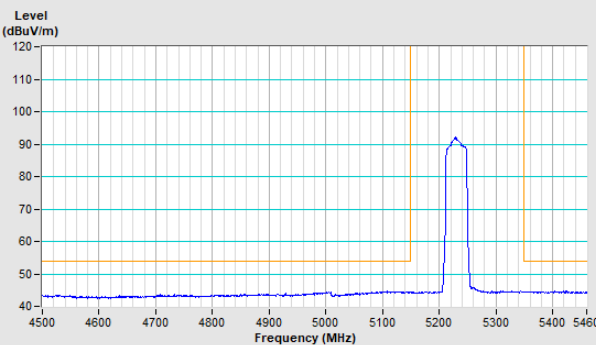

Vertical (Peak)

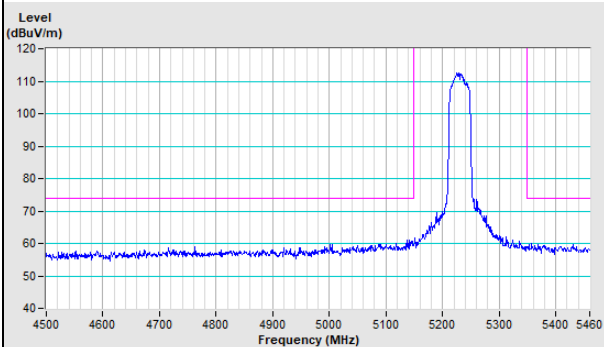


Vertical (Average)

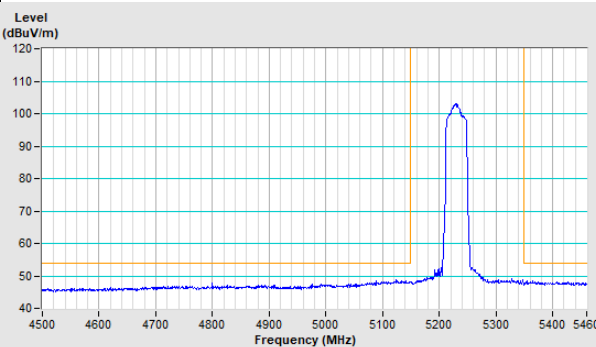


802.11ac (VHT80) Channel 42


Horizontal (Peak)

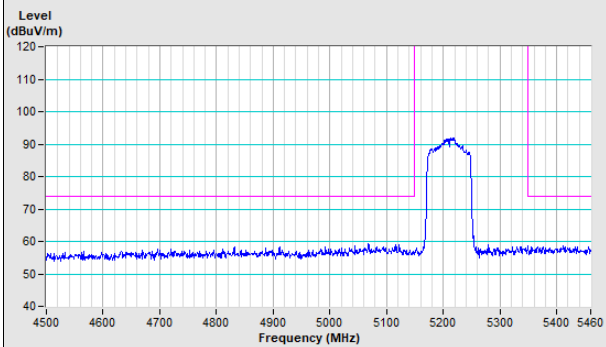


Horizontal (Average)

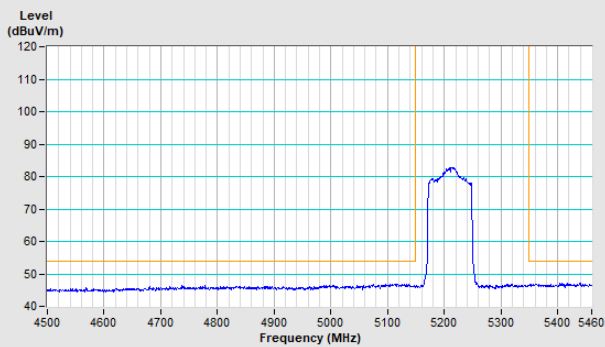

Vertical (Peak)

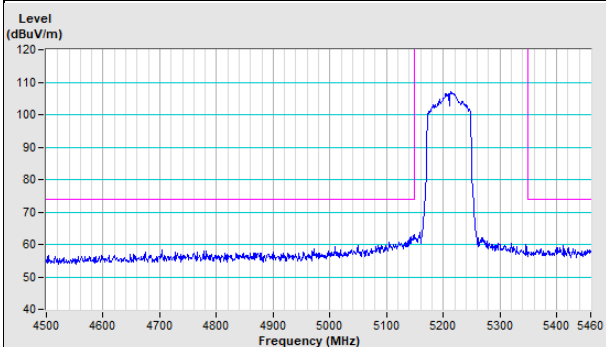

Vertical (Average)

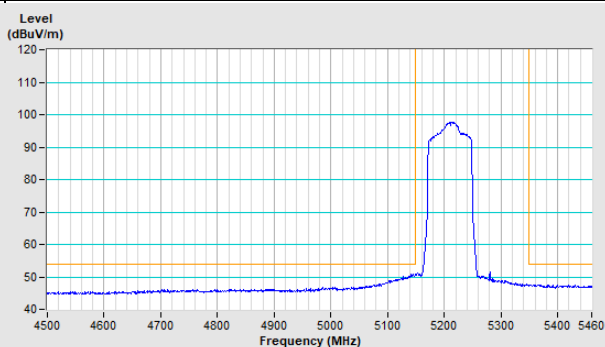



## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---