



**SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch**

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663
Telephone: +86 (0) 20 821 55555
Fax: +86 (0) 20 820 75059
Email: ee.guangzhou@sgs.com

Report No.: GZEM161100778301
Page: 1 of 48
FCC ID: 2AKDL-N1

TEST REPORT

The following sample(s) was/were submitted and identified on behalf of the client as:

| | |
|-----------------------------|---|
| Application No.: | GZEM1611007783HS |
| Applicant: | Guangzhou Yishanshuchen biotechnology Co., Ltd. |
| Manufacturer: | Guangzhou Yishanshuchen biotechnology Co., Ltd. |
| FCC ID: | 2AKDL-N1 |
| Product Description: | SOMNOVA |
| Model No.: | N1 |
| Standards: | CFR 47 FCC PART 15 Subpart C: 2015 section 15.247 |
| Date of Receipt: | 2016-11-16 |
| Date of Test: | 2016-11-29 |
| Date of Issue: | 2016-12-02 |
| Test Result : | Pass* |

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



2 Version

| Revision Record | | | | |
|-----------------|---------|------------|----------|-----------------|
| Version | Chapter | Date | Modifier | Remark |
| 00 | | 2016-12-02 | | Original Report |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| | | | |
|--------------------------|---|--|--------------------|
| Authorized for issue by: | | | |
| Tested By |  | | 2016-11-29 Date |
| | (Lily Kuang) / Project Engineer | | |
| Prepared By |  | | 2016-12-01 Date |
| | (Sandy Zheng) / Clerk | | |
| Checked By |  | | 2016-12-02 Date |
| | (Ricky Liu) / Reviewer | | |



3 Test Summary

| Test | Test Requirement | Test method | Result |
|---|---|---|--------|
| Antenna Requirement | FCC PART 15 C section 15.247 (c) and Section 15.203 | FCC PART 15 C section 15.247 (c) and Section 15.203 | PASS |
| 6 dB Bandwidth | FCC PART 15 C section 15.247 (a)(2) | ANSI C63.10: Clause 11.8 | PASS |
| Maximum Peak Output Power | FCC PART 15 C section 15.247(b)(3) | ANSI C63.10: Clause 11.9 | PASS |
| Peak Power Spectral Density | FCC PART 15 C section 15.247(e) | ANSI C63.10: Clause 11.10 | PASS |
| Conducted Spurious Emission | FCC PART 15 C section 15.209 &15.247(d) | ANSI C63.10: Clause 11.11 | PASS |
| Radiated Spurious Emission | FCC PART 15 C section 15.209 &15.247(d) | ANSI C63.10: Clause 11.12,6.3,6.5 and 6.6 | PASS |
| Band Edges Measurement | FCC PART 15 C section 15.247 (d) &15.205 | ANSI C63.10: Clause 11.13 | PASS |
| Conducted Emissions at Mains Terminals | FCC PART 15 C section 15.207 | ANSI C63.10: Clause 6.2 | PASS |
| Remark1: EUT: In this whole report EUT means Equipment Under Test. N/A: not applicable. Refer to the relative section for the details. EUT: In this whole report EUT means Equipment Under Test. Tx: In this whole report Tx (or tx) means Transmitter. Rx: In this whole report Rx (or rx) means Receiver. RF: In this whole report RF means Radio Frequency. ANSI C63.10: the detail version is ANSI C63.10:2013 in the whole report. | | | |



4 Contents

| | | |
|----------|--|-----------|
| 1 | Cover Page | 1 |
| 2 | Version | 2 |
| 3 | Test Summary | 3 |
| 4 | Contents | 4 |
| 5 | General Information | 5 |
| 5.1 | Client Information | 5 |
| 5.2 | General Description of E.U.T. | 5 |
| 5.3 | Details of E.U.T. | 5 |
| 5.4 | Description of Support Units | 5 |
| 5.5 | Deviation from Standards | 5 |
| 5.6 | Abnormalities from Standard Conditions | 5 |
| 5.7 | Other Information Requested by the Customer | 6 |
| 5.8 | Test Location | 6 |
| 5.9 | Test Facility | 7 |
| 6 | Equipment List | 8 |
| 7 | Test Results | 10 |
| 7.1 | E.U.T. test conditions | 10 |
| 7.2 | Antenna Requirement | 13 |
| 7.3 | 6 dB Bandwidth | 14 |
| 7.4 | Maximum Peak Output Power | 18 |
| 7.5 | Peak Power Spectral Density | 22 |
| 7.6 | Conducted Spurious Emissions | 26 |
| 7.7 | Radiated Emissions which fall in the restricted bands | 32 |
| 7.8 | Band Edges Requirement | 42 |
| 7.9 | Conducted Emissions at Mains Terminals 150 kHz to 30 MHz | 45 |

5 General Information

5.1 Client Information

Applicant: Guangzhou Yishanshuchen biotechnology Co., Ltd.
Address of Applicant: No.34, Longkoudong Road, Tianhe District, Guangzhou, China
Manufacturer: Guangzhou Yishanshuchen biotechnology Co., Ltd.
Address of Manufacturer: No.34, Longkoudong Road, Tianhe District, Guangzhou, China

5.2 General Description of E.U.T.

Product Description: SOMNOVA
Model No.: N1

5.3 Details of E.U.T.

Operating Frequency: 2402 MHz to 2480 MHz
Type of Modulation: GFSK
DSSS with Adaptive
Equipment types: (Only one adaptive mode is implemented and could not operate in a non-adaptive mode.)
Number of Channels: 40 Channels
Channel Separation: 2 MHz
Duty Cycle: Continuous operation possible for testing purposes
Antenna Type: Integral antenna
Antenna gain: 0dBi
Speciality: Bluetooth 4.0 Smart (BLE mode)
Power Supply: AC 100-240V
Adapter Information: Model: SK03T1-1200200U
Input: AC 100-240V, 50/60Hz 0.6A
Output: DC 12V, 2A

5.4 Description of Support Units

The EUT has been tested independently.

5.5 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

5.6 Abnormalities from Standard Conditions

None.



5.7 Other Information Requested by the Customer

None.

5.8 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Scientech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

5.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co. Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

6 Equipment List

| RE in Chamber | | | | | | |
|---------------|--|-----------------------------------|-------------|------------|--------------|---------------|
| No. | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. date | Cal. Due date |
| | | | | | (YYYY-MM-DD) | (YYYY-MM-DD) |
| EMC0525 | Compact Semi-Anechoic Chamber | ChangZhou ZhongYu | N/A | N/A | 2014-12-05 | 2016-12-04 |
| EMC0522 | EMI Test Receiver | Rohde & Schwarz | ESIB26 | 100283 | 2016-02-01 | 2017-01-31 |
| EMC0056 | EMI Test Receiver | Rohde & Schwarz | ESCI | 100236 | 2016-02-01 | 2017-01-31 |
| EMC0528 | RI High frequency Cable | SGS | 20 m | N/A | 2016-04-19 | 2018-04-18 |
| EMC2025 | Trilog Broadband Antenna 30-1000MHz | SCHWARZBECK MESS-ELEKTRONIK | VULB 9160 | 9160-3372 | 2016-09-08 | 2019-09-07 |
| SEM003-18 | Trilog Broadband Antenna 25-2000MHz | SCHWARZBECK MESS-ELEKTRONIK | VULB 9168 | 665 | 2016-06-29 | 2019-06-28 |
| EMC0524 | Bi-log Type Antenna | Schaffner -Chase | CBL6112B | 2966 | 2016-09-08 | 2019-09-07 |
| EMC0519 | Bilog Type Antenna | Schaffner -Chase | CBL6143 | 5070 | 2014-05-04 | 2017-05-03 |
| EMC2026 | Horn Antenna 1-18GHz | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120D | 9120D-841 | 2016-09-09 | 2019-09-08 |
| EMC0521 | 1-26.5 GHz Pre-Amplifier | Agilent | 8449B | 3008A01649 | 2016-01-25 | 2017-01-24 |
| EMC2065 | Amplifier | HP | 8447F | N/A | 2016-07-04 | 2017-07-03 |
| EMC2086 | PRE AMPLIFIER MH648A | ANRITSU CORP | MH648A | N/A | 2015-12-19 | 2016-12-18 |
| EMC2063 | Pre-amplifier 1GHz-26GHz | Compliance Direction Systems Lnc. | PAP-1G26-48 | 6279.628 | 2016-01-06 | 2017-01-05 |
| EMC0523 | Active Loop Antenna | EMCO | 6502 | 42963 | 2016-02-27 | 2018-02-26 |
| EMC2041 | Broad-Band Horn Antenna (14)15-26.5(40)GHz | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9170 | 9170-375 | 2014-05-26 | 2017-05-25 |
| EMC2079 | High Pass Filter(915MHz) | FSY MICROWAVE | HM1465-9SS | 009 | 2016-01-25 | 2017-01-24 |
| EMC2069 | 2.4GHz Filter | Micro-Tronics | BRM 50702 | 149 | 2016-01-25 | 2017-01-24 |
| EMC0530 | 10m Semi-Anechoic Chamber | ETS | N/A | N/A | 2016-04-30 | 2018-04-29 |



| General used equipment | | | | | | |
|------------------------|----------------|--------------|-----------|------------|--------------|---------------|
| No. | Test Equipment | Manufacturer | Model No. | Serial No. | Cal. date | Cal. Due date |
| | | | | | (YYYY-MM-DD) | (YYYY-MM-DD) |
| EMC0006 | DMM | Fluke | 73 | 70681569 | 2016-09-01 | 2017-08-31 |
| EMC0007 | DMM | Fluke | 73 | 70671122 | 2016-08-22 | 2017-08-21 |

7 Test Results

7.1 E.U.T. test conditions

| | |
|------------------------------|-----------------|
| Test Voltage: | AC 100-240V |
| Temperature: | 20.0 -25.0 °C |
| Humidity: | 38-50 % RH |
| Atmospheric Pressure: | 1000 -1010 mbar |

Requirements: **15.31(e):** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

15.32: Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.

Test frequencies and frequency range: According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

| Frequency range in which device operates | Number of frequencies | Location in frequency range of operation |
|--|-----------------------|---|
| 1 MHz or less | 1 | Middle |
| 1 MHz to 10 MHz | 2 | 1 near top and 1 near bottom |
| More than 10 MHz | 3 | 1 near top, 1 near middle and 1 near bottom |

Frequency range of radiated emission measurements

| Lowest frequency generated in the device | Upper frequency range of measurement |
|--|---|
| 9 kHz to below 10 GHz | 10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower |
| At or above 10 GHz to below 30 GHz | 5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower |
| At or above 30 GHz | 5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified |

EUT channels and frequencies list:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0 | 2402 | 27 | 2456 |
| 1 | 2404 | 28 | 2458 |
| 2 | 2406 | 29 | 2460 |
| 3 | 2408 | 30 | 2462 |
| 4 | 2410 | 31 | 2464 |
| 5 | 2412 | 32 | 2466 |
| 6 | 2414 | 33 | 2468 |
| 7 | 2416 | 34 | 2470 |
| 8 | 2418 | 35 | 2472 |
| 9 | 2420 | 36 | 2474 |
| 10 | 2422 | 37 | 2476 |
| 11 | 2424 | 38 | 2478 |
| 12 | 2426 | 39 | 2480 |
| 13 | 2428 | 40 | / |
| 14 | 2430 | 41 | / |
| 15 | 2432 | 42 | / |
| 16 | 2434 | 43 | / |
| 17 | 2436 | 44 | / |
| 18 | 2438 | 45 | / |
| 19 | 2440 | 46 | / |
| 20 | 2442 | 47 | / |
| 21 | 2444 | 48 | / |
| 22 | 2446 | 49 | / |
| 23 | 2448 | 50 | / |
| 24 | 2450 | 51 | / |
| 25 | 2452 | 52 | / |
| 26 | 2454 | 53 | / |

Using the special software and development board we can enter the product for engineer mode then we can control the EUT to select the wanted channel for test as above list.

Test frequencies are the lowest channel: 0 channel(2402MHz), middle channel: 20 channel(2442 MHz) and highest channel: 39 channel(2480 MHz)

7.2 Antenna Requirement

Standard requirement

15.203 requirement:


For intentional device. According to 15.203. an intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna


The antenna is PCB Layout antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

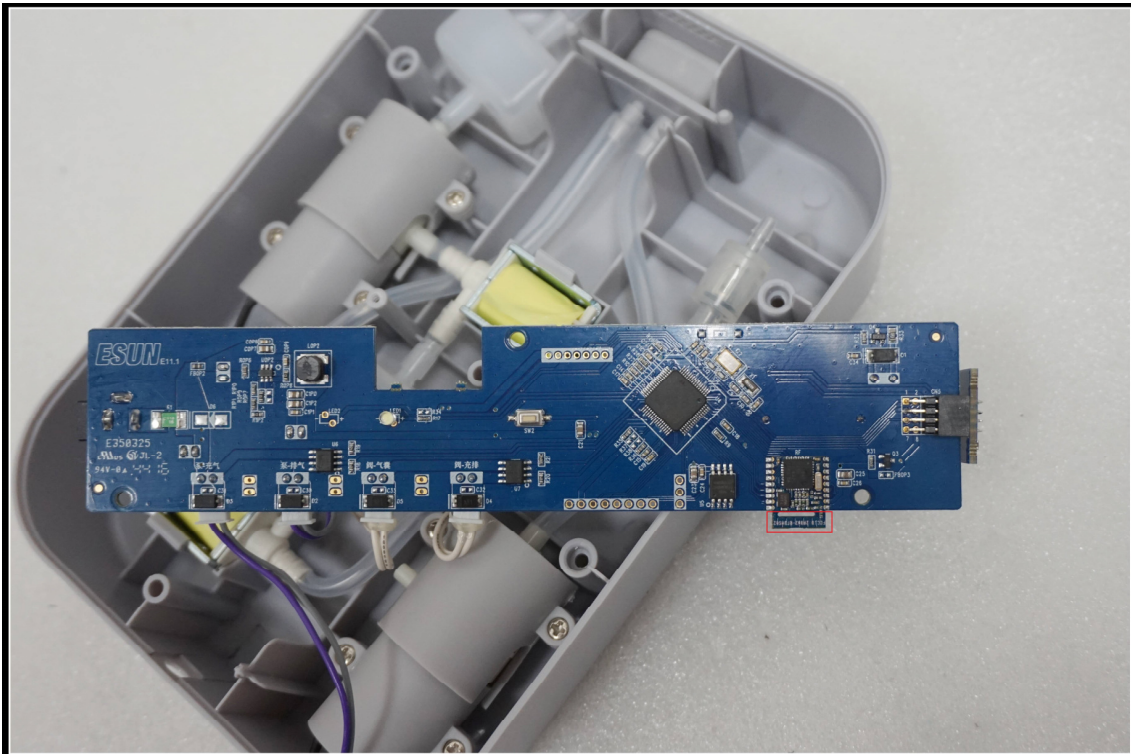

Test result: The unit does meet the FCC requirements.

7.3 6 dB Bandwidth

- Test Requirement: FCC Part 15 C section 15.247
 (a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
- Test Method: ANSI C63.10: Clause 11.8
- Test Status: Enter test mode for the product. Test in Channel lowest (2402MHz), middle (2442MHz) and highest (2480MHz), keep in continuously transmitting status.
- Test Configuration:

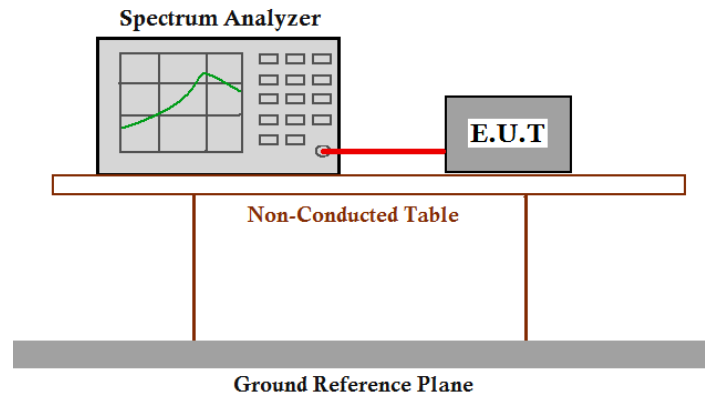

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.5dB) from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW=50 kHz. VBW = 200 kHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worse case.




| | | | | | |
|----|------|------|------------|---------|------|
| 0 | 2402 | GFSK | 721.443KHz | ≥500KHz | Pass |
| 20 | 2442 | | 671.343KHz | | Pass |
| 39 | 2480 | | 711.423KHz | | Pass |

Test result: The unit does meet the FCC requirements.




Result plot as follows:


Channel 0:2.402GHz:

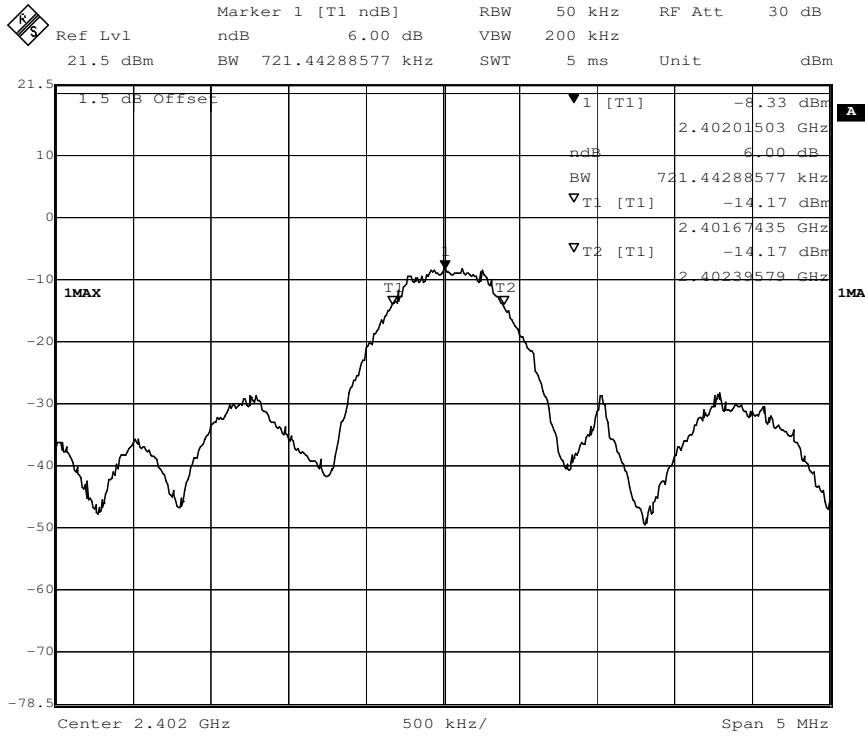

Channel 20:2.442GHz:

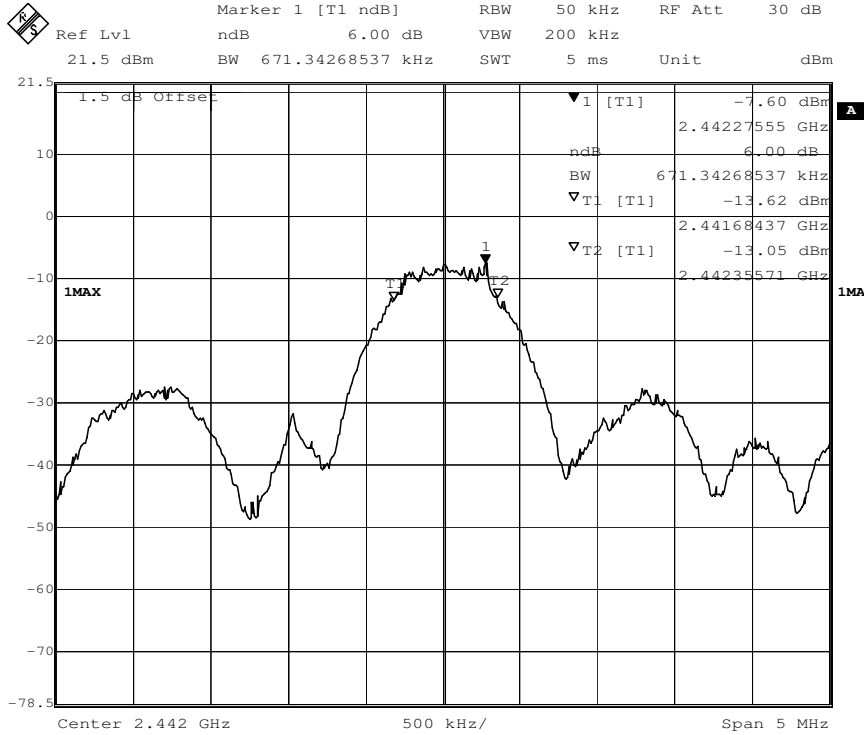

Channel 39:2.480GHz:

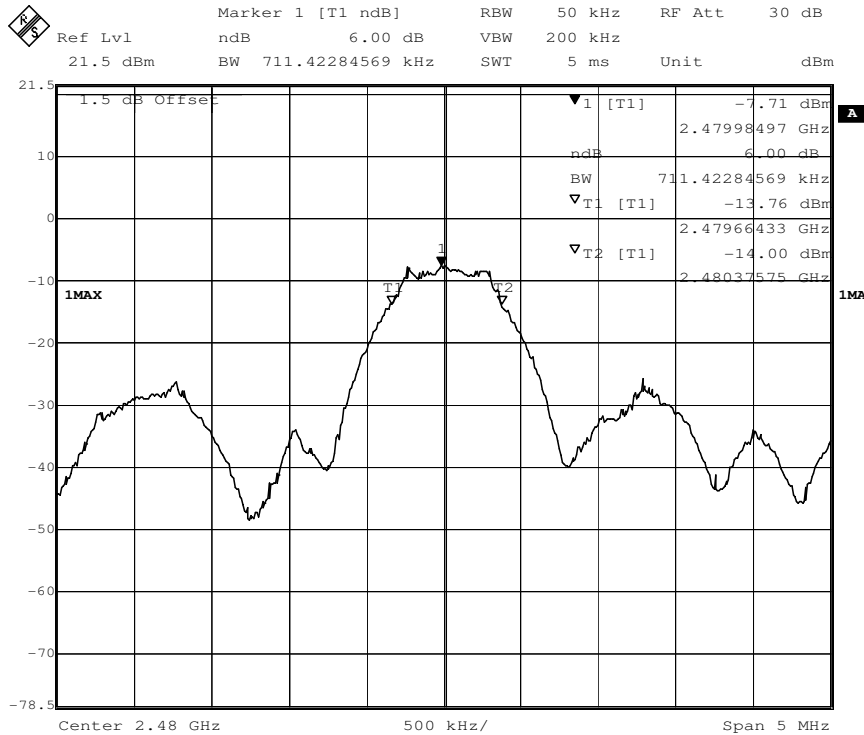


7.4 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247
 (b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.
 Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10: Clause 11.9

Test Status: Enter test mode for the product. Test in Channel lowest (2402MHz), middle (2442MHz) and highest (2480MHz), keep in continuously transmitting status.

Test Configuration:

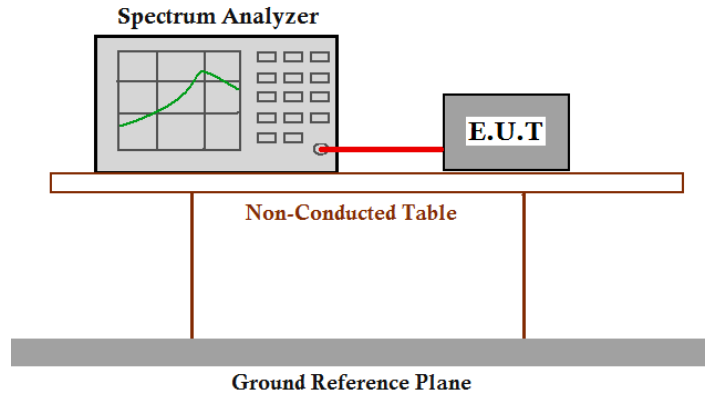



Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable
(Cable loss =1.5dB) from the antenna port to the spectrum.
2. Set the RBW = 1 MHz.
3. Set the VBW $\geq 3 \times$ RBW
4. Set the span $\geq 1.5 \times$ DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

10. Measure the channel power of the test frequency with special test status.
11. Repeat until all the test status is investigated.

Report the worse case.

Test result:


| Channel No. | Frequency (MHz) | Mode | Data Rate | Measured Channel Power (dBm) | Limit | Result |
|-------------|--------------------|------|-----------|---------------------------------|-----------|--------|
| 0 | 2402 | GFSK | 1Mbps | -6.34 | 1W(30dBm) | Pass |
| 20 | 2442 | | 1Mbps | -6.17 | | Pass |
| 39 | 2480 | | 1Mbps | -6.52 | | Pass |

Remark: Level = Read Level + Cable Loss + Antenna Gain


The unit does meet the FCC requirements.

Result plot as follows:

Channel 0:2.402GHz:

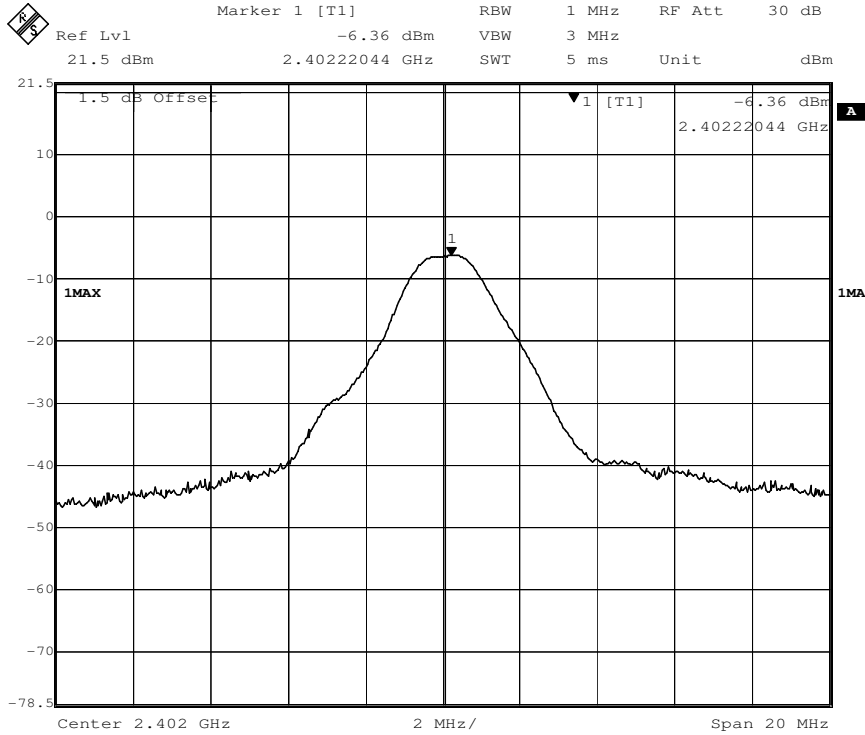


Channel 20:2.442GHz:

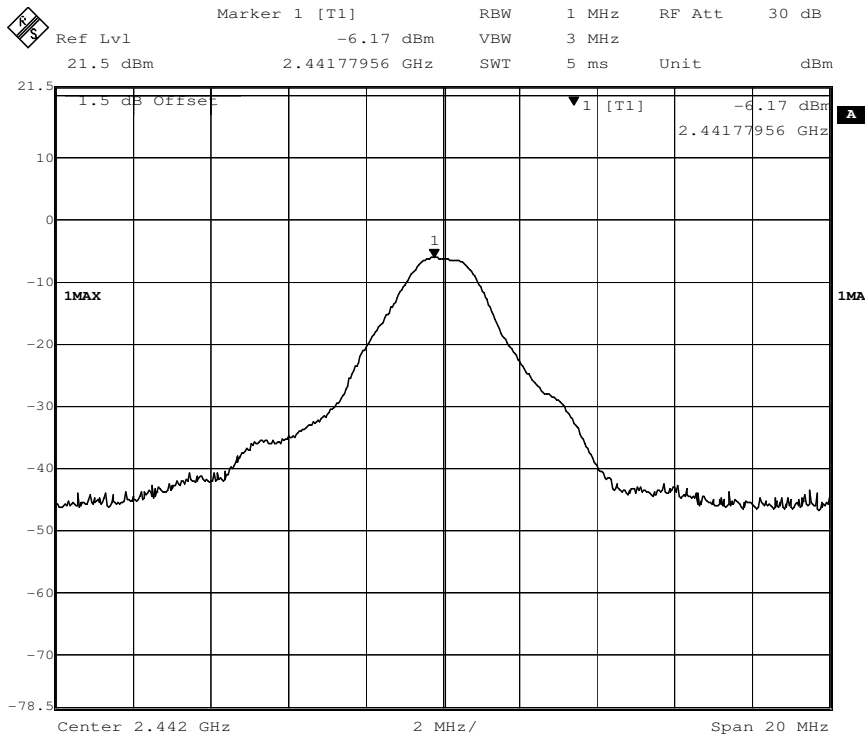




Channel 39:2.480GHz:

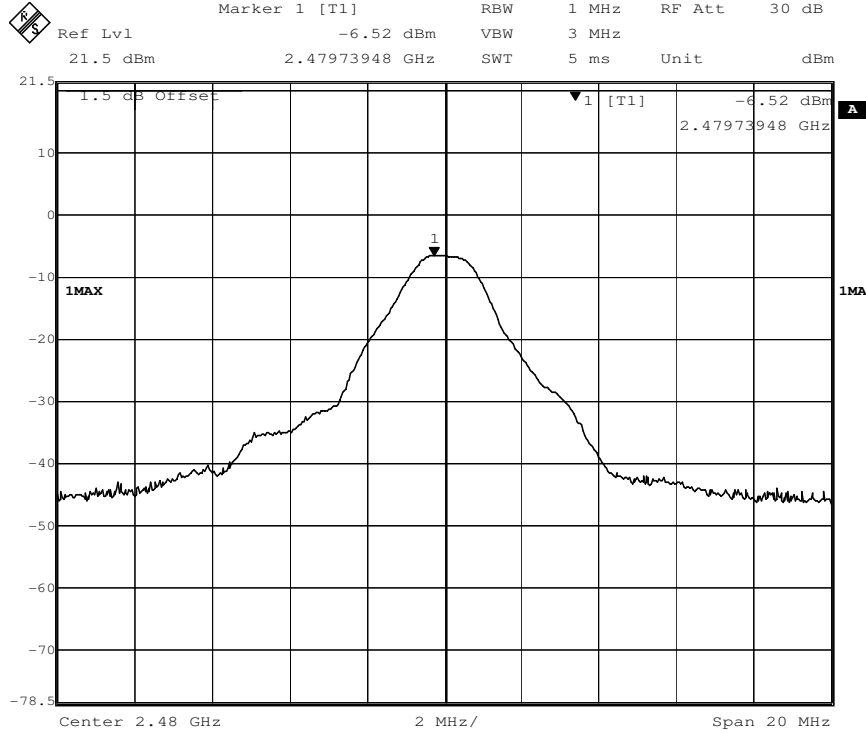

7.5 Peak Power Spectral Density

- Test Requirement:** FCC Part 15 C section 15.247
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
- Test Method:** ANSI C63.10: Clause 11.10
- Test Status:** Enter test mode for the product. Test in lowest Channel 2402MHz, middle Channel 2442MHz and highest Channel 2480MHz, keep in continuously transmitting status.
- Test Configuration:**

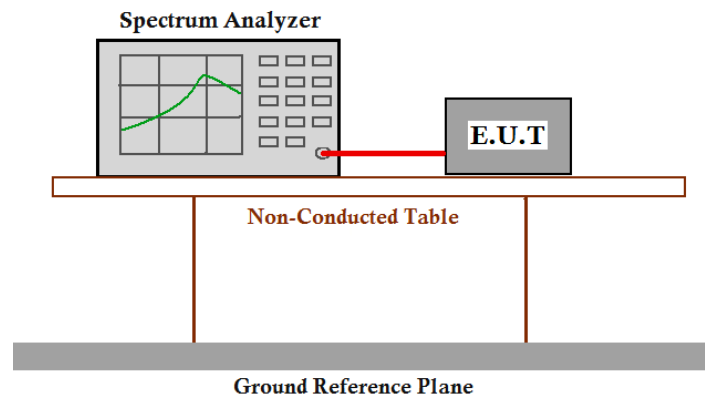

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (cable loss =1.5dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=3 kHz. VBW = 30 kHz. sweep= (SPAN/3 kHz); Detector Function = Peak. Trace = Max Hold, Centre = the Peak Power of the signal.
3. Measure the Power Spectral Density of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse case.




| Channel No. | Frequency (MHz) | Mode | Data Rate | Measured Peak Power Spectral Density (dBm/3KHz) | Limit | Result |
|-------------|-----------------|------|-----------|---|-----------|--------|
| 0 | 2402 | GFSK | 1 Mbps | -18.58 | 8dBm/3KHz | Pass |
| 20 | 2442 | | 1 Mbps | -19.22 | | Pass |
| 39 | 2480 | | 1 Mbps | -17.65 | | Pass |


Test result: Level = Read Level + Cable Loss.
The unit does meet the FCC requirements.

Result plot as follows:

Channel 0:2.402 GHz:

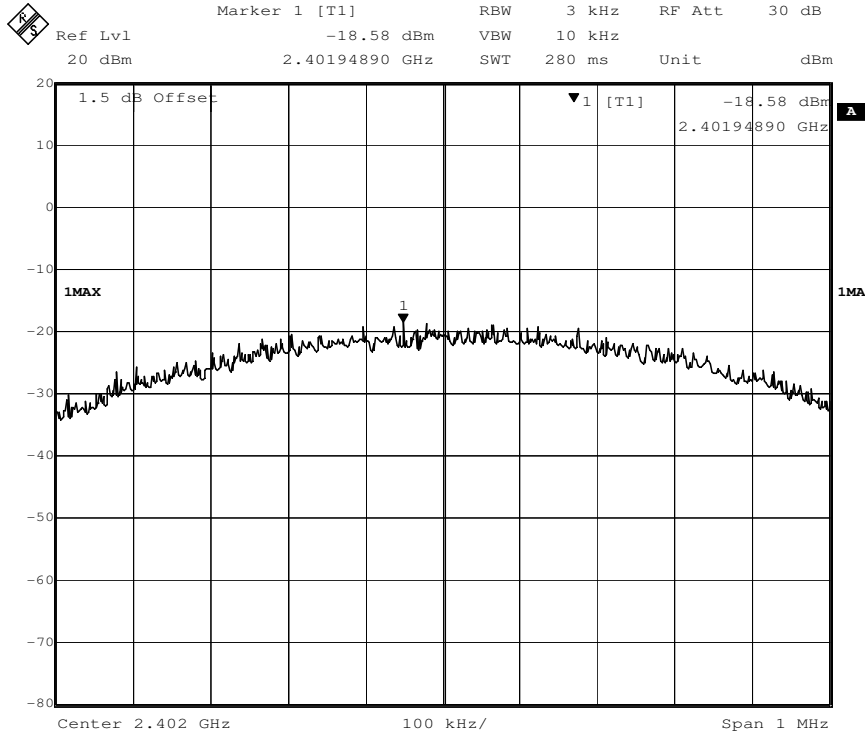


Channel 20:2.442 GHz:

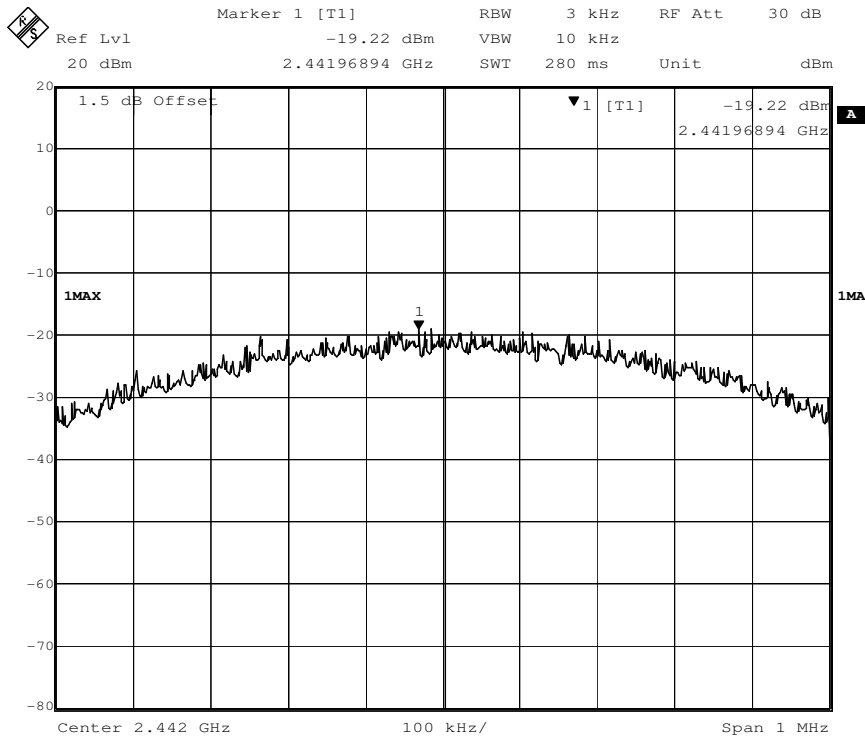



Channel 39:2.480 GHz:

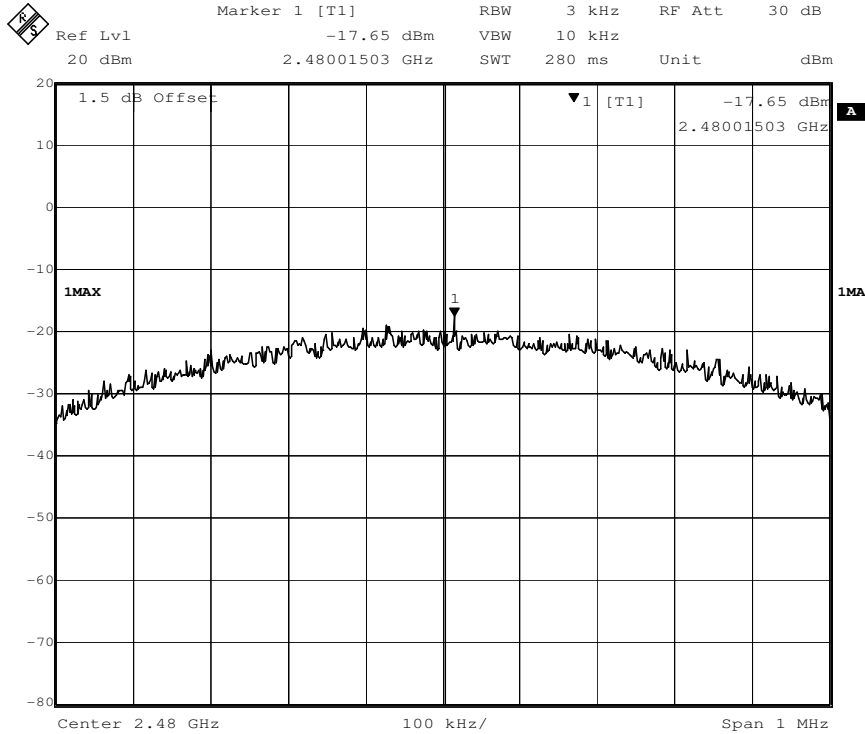

7.6 Conducted Spurious Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10: Clause 11.11

Test Status: Enter test mode for the product. Test in lowest Channel 2402MHz, middle Channel 2442MHz and highest Channel 2480MHz, keep in continuously transmitting status.

Test Configuration:

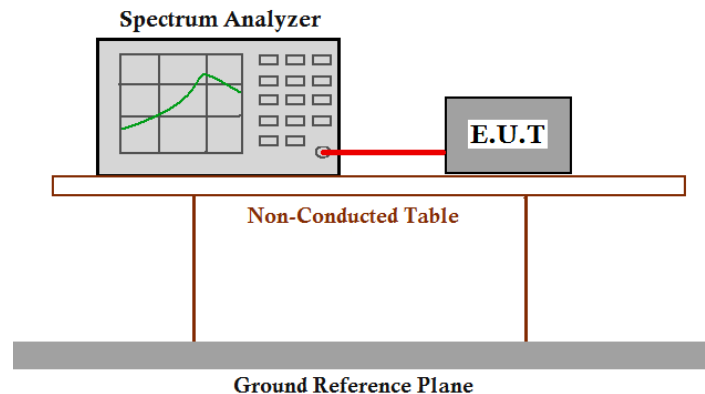


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 KHz, VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted Spurious Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse case.


Result plot as follows:

Channel 0: 2.402 GHz

30 MHz to 1GHz

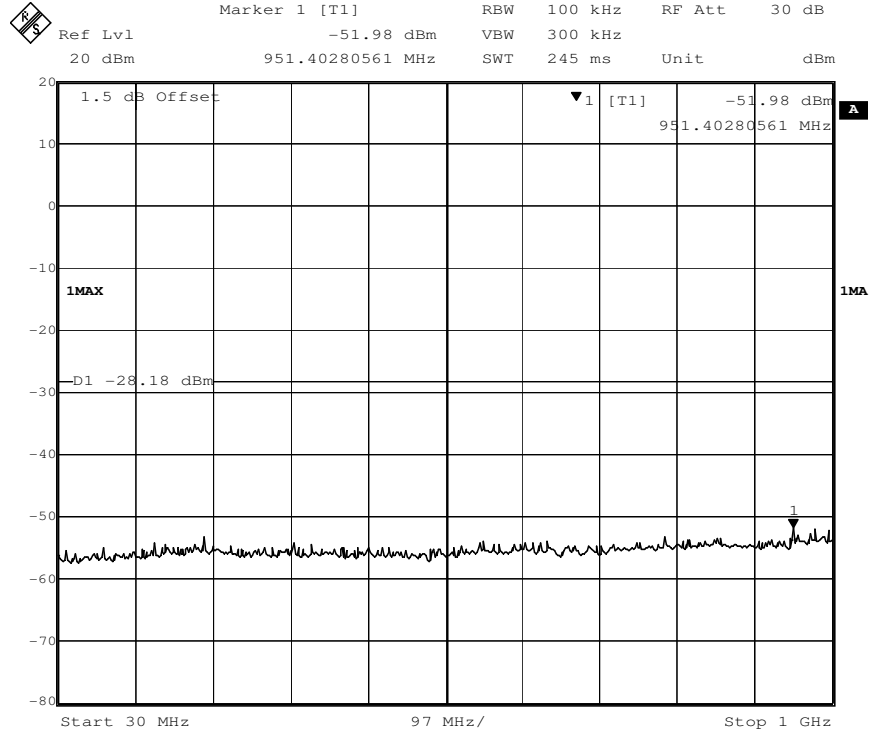


1GHz to 5GHz

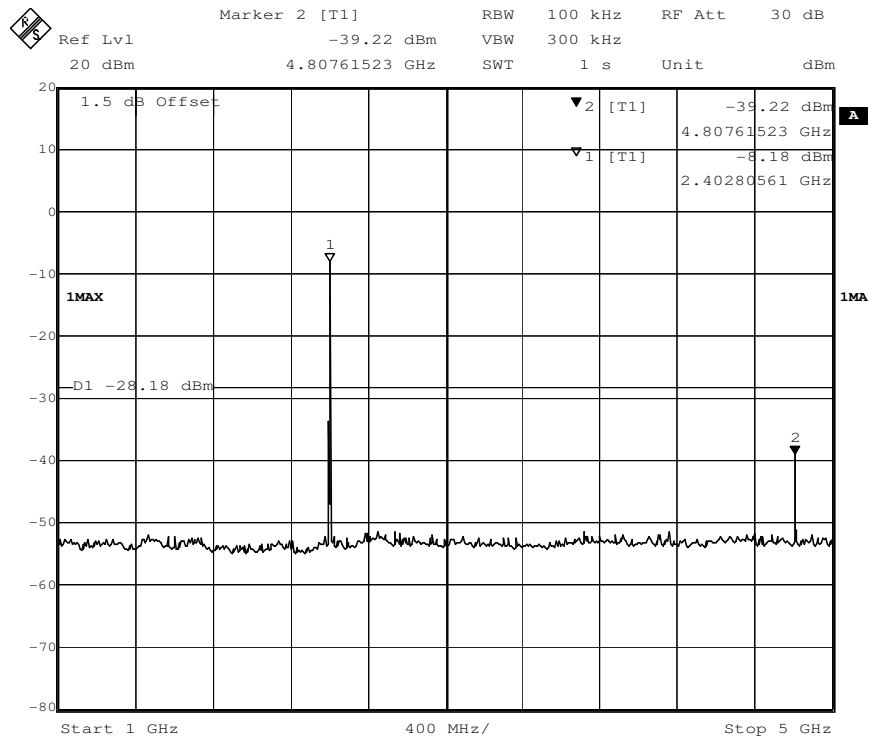




5GHz to 25GHz

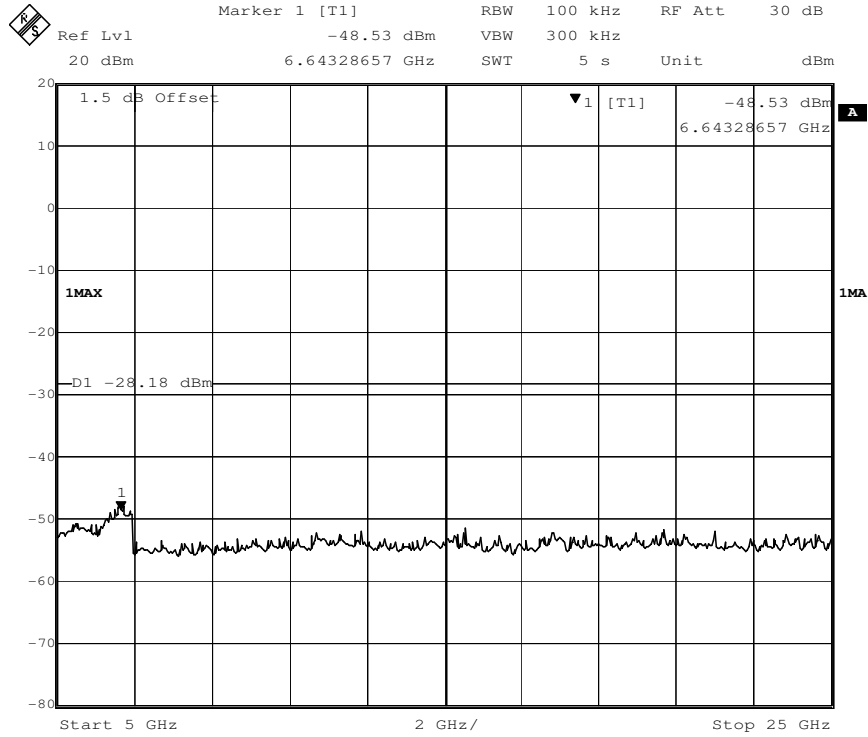


Channel 20:2.442GHz

30 MHz to 1GHz

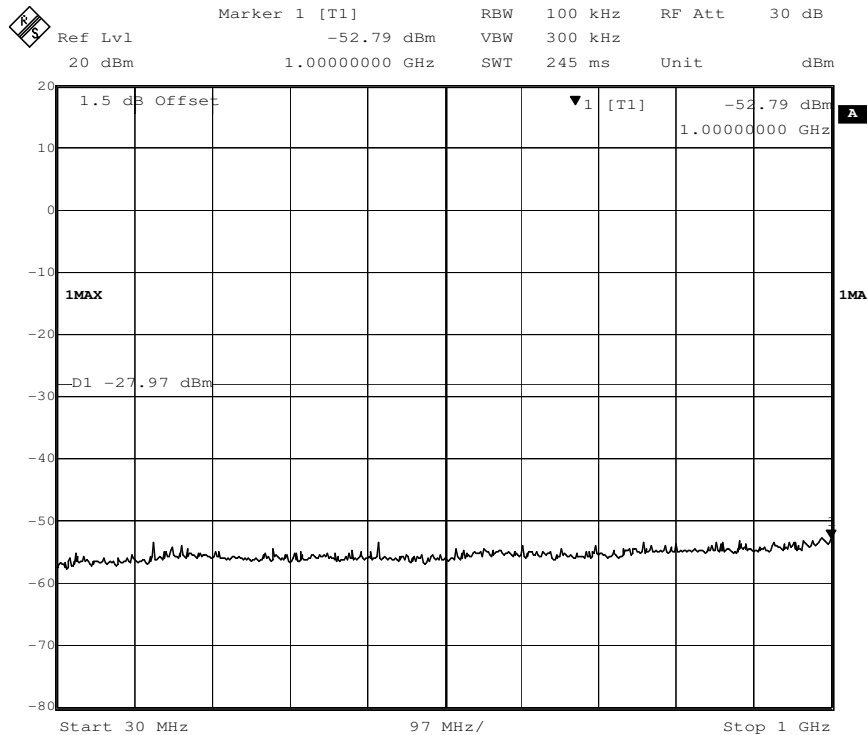




1GHz to 5GHz

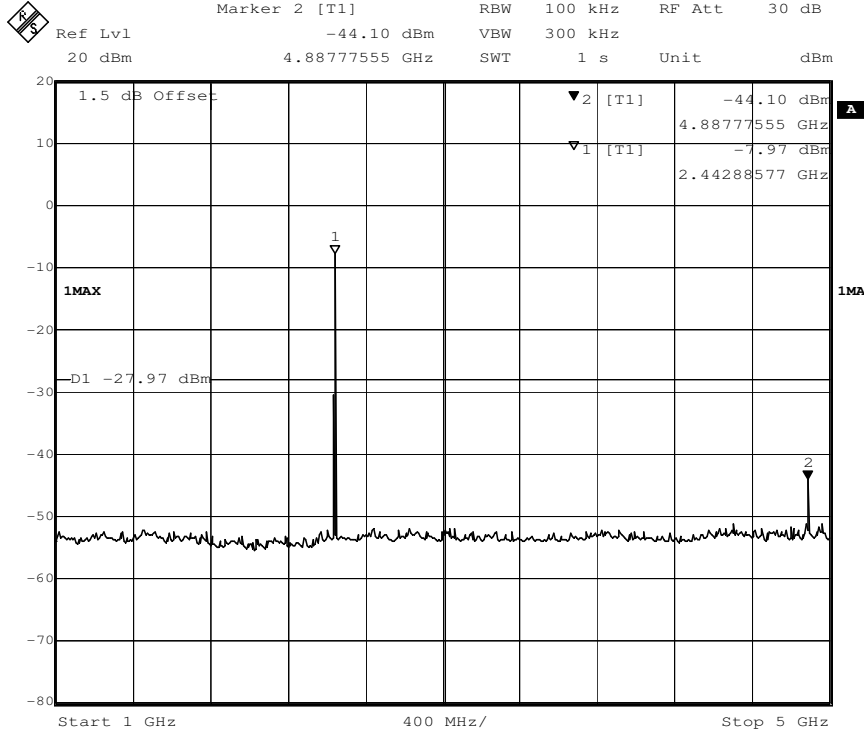


5GHz to 25GHz

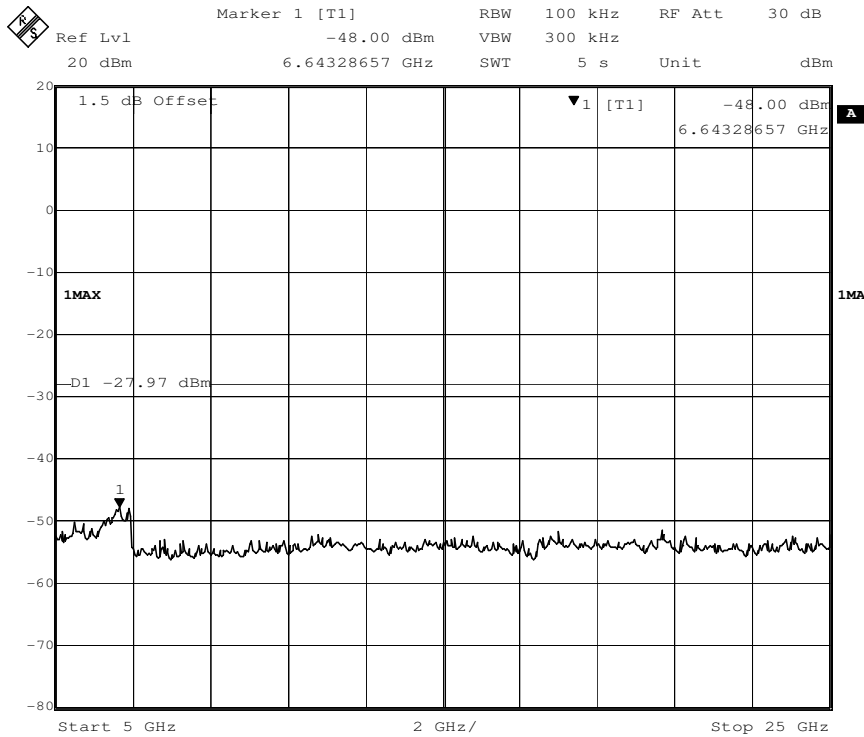


Channel 39:2.480GHz

30 MHz to 1GHz

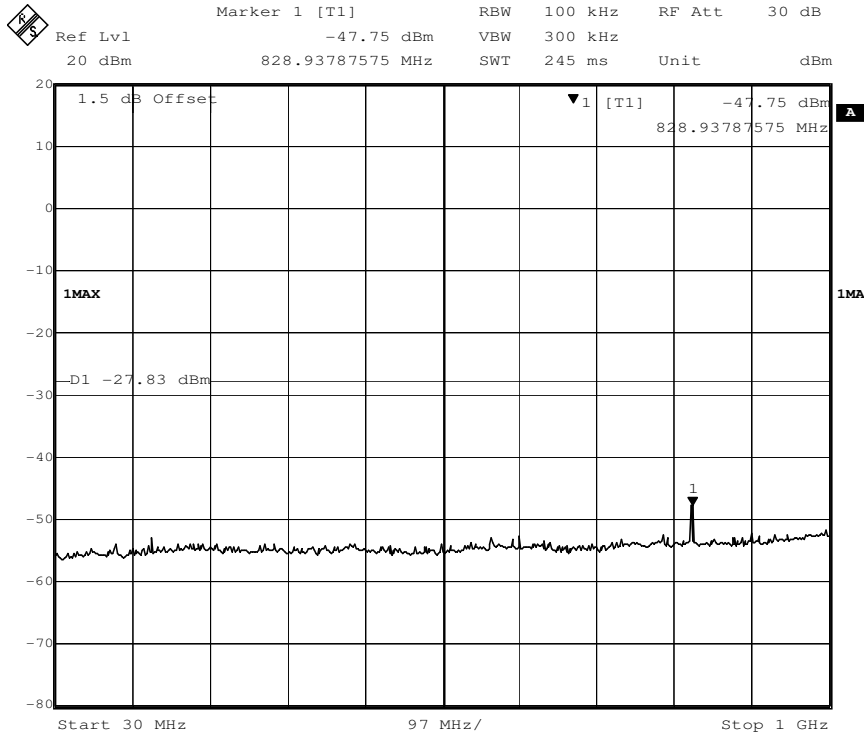


1GHz to 5GHz

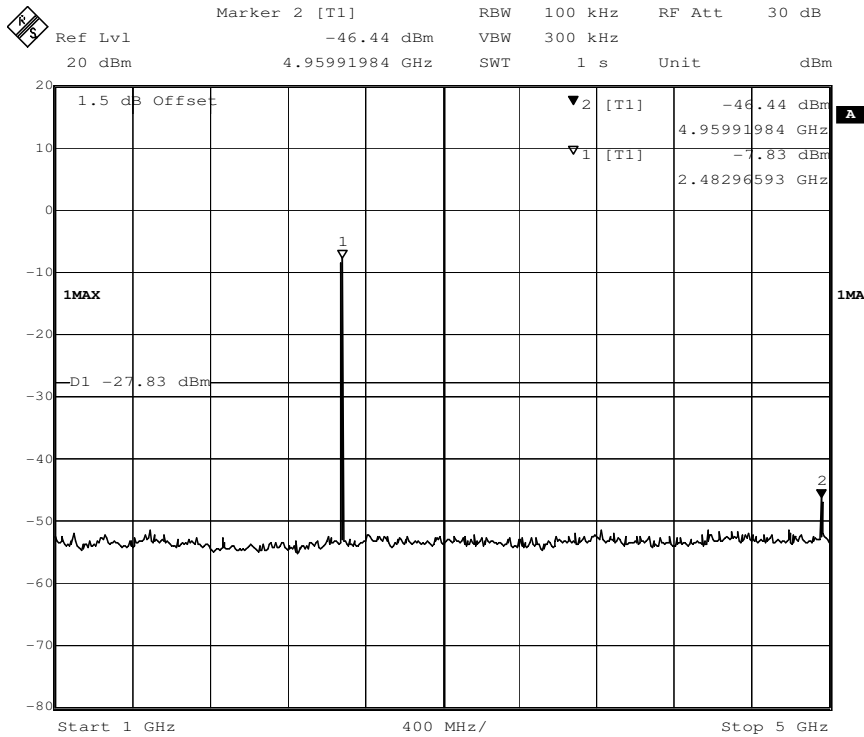



5GHz to 25GHz

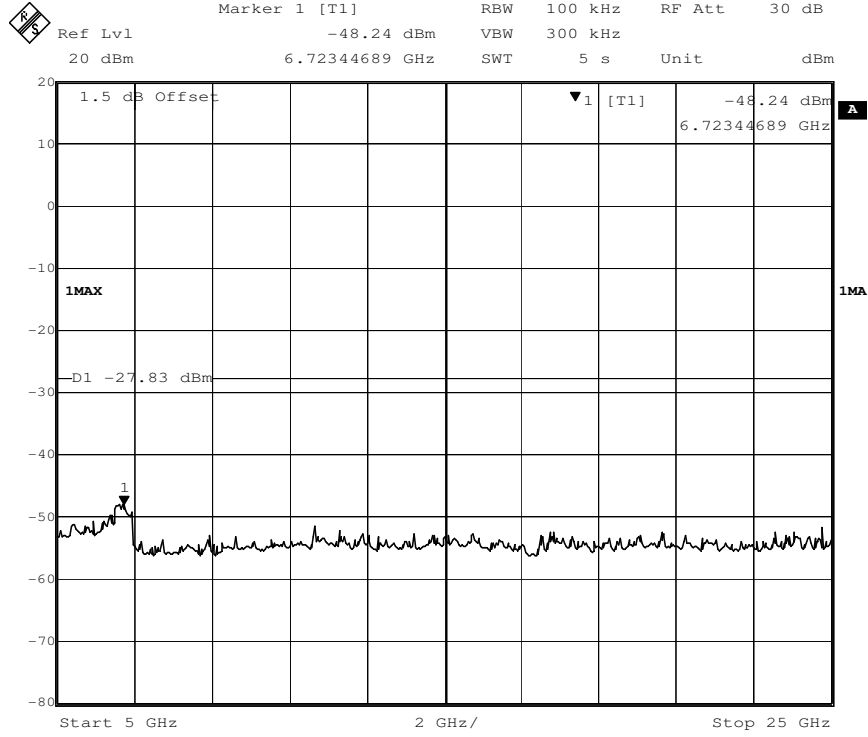


7.7 Radiated Emissions which fall in the restricted bands


| | |
|-----------------------------|---|
| Test Requirement: | FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)). |
| Test Method: | ANSI C63.10: Clause 11.12, 6.3, 6.5 and 6.6 |
| Test Status: | Enter test mode for the product. Test in lowest channel 2402 MHz and highest channel 2480 MHz, keep in continuously transmitting status with GFSK modulation. |
| Test site: | Measurement Distance: 3m (Semi-Anechoic Chamber) |
| Limit: | 40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz. |
| Detector: | For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW =10Hz Sweep = auto Detector function = peak Trace = max hold |
| Test Frequency Range | 9kHz~26GHz |

Test Configuration:


- 1) 9K to 30MHz emissions:

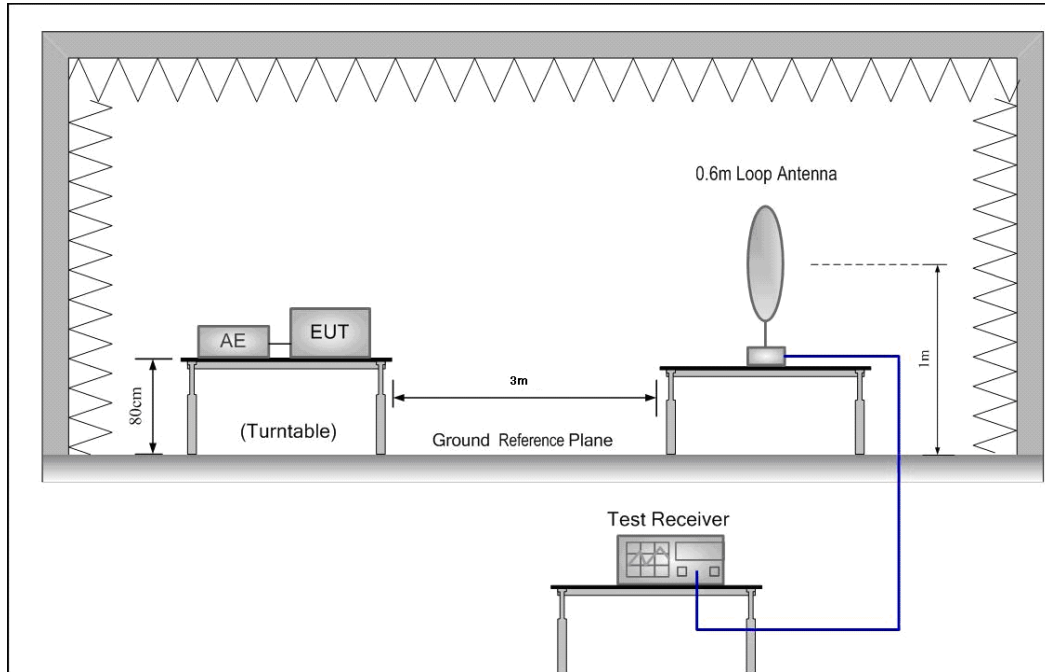

- 2). 30 MHz to 1 GHz emissions:

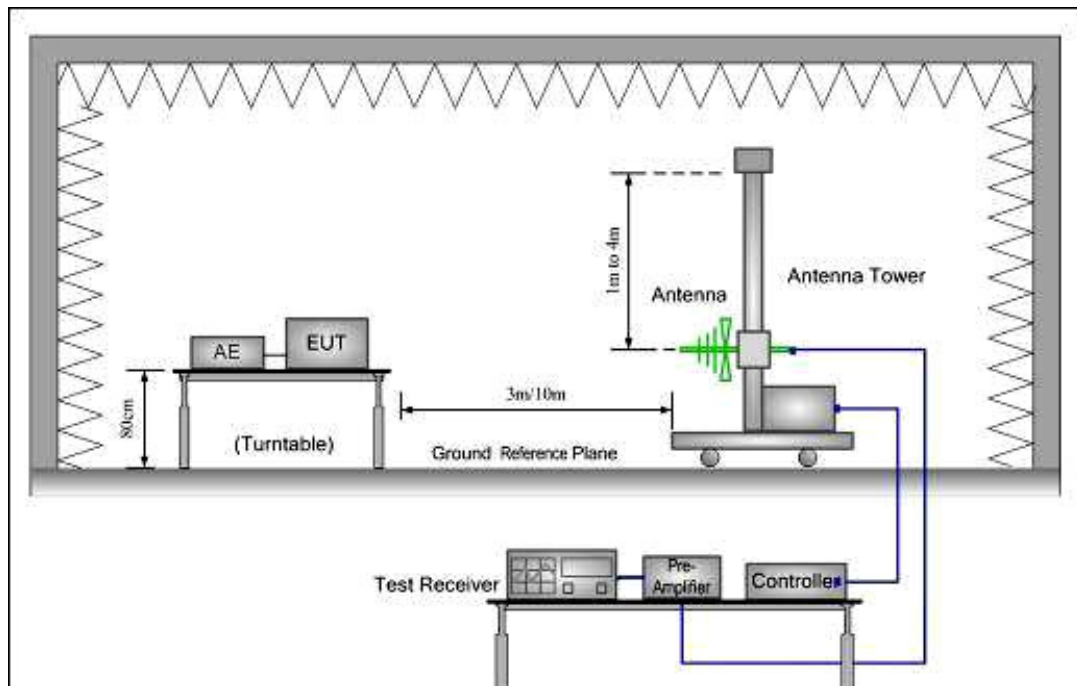

- 3). 1 GHz to 40 GHz emissions:

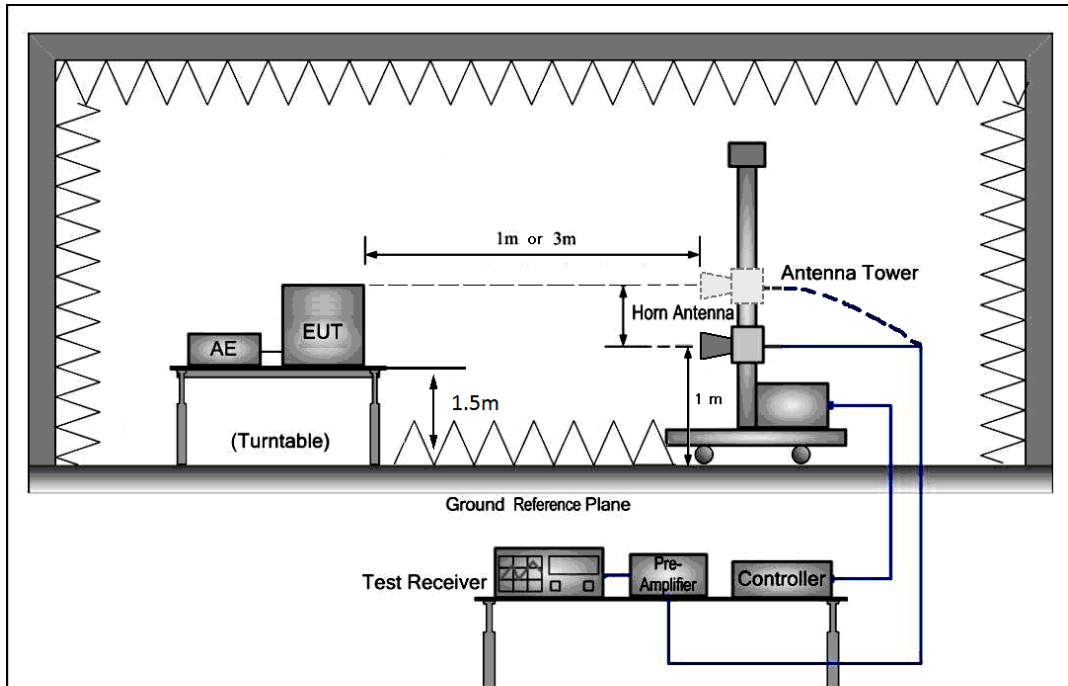

Test Procedure:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2010 was used to perform radiated emission test above 1 GHz.

The receiver scanned from the lowest frequency generated within the EUT to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

From 30MHz to 1GHz, read the Quasi-Peak field strength of the emissions with receiver QP detector RBW=120KHz.

Above 1GHz, read the Peak field strength and Average field strength.

Read the Peak field strength through RBW=1MHz,VBW=3MHz in spectrum analyzer setting;

Read the Average field strength through RBW=1MHz,VBW=10Hz in spectrum analyzer setting;

While maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the average field strength reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any of the frequency bands listed below:

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|---------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | |
| 13.36 - 13.41 | 322 - 335.4 | | |

Test Result:

Test at lowest Channel (2.402 GHz) in transmitting status

9KHz~1000 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with Loop and Log antennas were greater than 20dB below the limit, so the test data were not recorded in the test report.

Peak Measurement:

| Frequency (MHz) | Antenna factors (dB/m) | Cable loss (dB) | Preamp factor (dB) | Reading Level (dB μ V) | Emission Level (dB μ V/m) | Limit (dB μ V/m) | Antenna polarization |
|-----------------|------------------------|-----------------|--------------------|----------------------------|-------------------------------|----------------------|----------------------|
| 1390.276 | 24.91 | 5.26 | 38.90 | 42.81 | 34.08 | 74.00 | Vertical |
| 2310.000 | 26.25 | 6.80 | 39.07 | 53.81 | 47.79 | 74.00 | V |
| 2390.000 | 26.43 | 6.87 | 39.10 | 52.32 | 46.52 | 74.00 | V |
| 2471.157 | 26.56 | 7.04 | 39.13 | 42.83 | 37.30 | 74.00 | V |
| 2483.500 | 26.58 | 7.07 | 39.14 | 50.72 | 45.23 | 74.00 | V |
| 2500.000 | 26.60 | 7.10 | 39.14 | 47.84 | 42.40 | 74.00 | V |
| 4254.921 | 29.83 | 9.33 | 40.12 | 41.56 | 40.60 | 74.00 | V |
| 5813.812 | 32.17 | 10.91 | 39.98 | 41.15 | 44.25 | 74.00 | V |
| 6954.852 | 35.06 | 12.46 | 39.32 | 40.54 | 48.74 | 74.00 | V |
| 10453.970 | 38.90 | 14.76 | 37.87 | 33.39 | 49.18 | 74.00 | V |
| 1989.550 | 25.20 | 6.30 | 38.98 | 42.74 | 35.26 | 74.00 | Horizontal |
| 2310.000 | 26.25 | 6.80 | 39.07 | 46.04 | 40.02 | 74.00 | H |
| 2390.000 | 26.43 | 6.87 | 39.10 | 52.21 | 46.41 | 74.00 | H |
| 2483.500 | 26.58 | 7.07 | 39.14 | 46.49 | 41.00 | 74.00 | H |
| 2500.000 | 26.60 | 7.10 | 39.14 | 50.35 | 44.91 | 74.00 | H |
| 3223.928 | 27.90 | 8.00 | 39.68 | 42.79 | 39.01 | 74.00 | H |
| 4508.136 | 30.12 | 9.61 | 40.17 | 42.43 | 41.99 | 74.00 | H |
| 6124.292 | 32.69 | 11.22 | 39.83 | 40.66 | 44.74 | 74.00 | H |
| 7368.741 | 35.82 | 12.98 | 39.21 | 38.81 | 48.40 | 74.00 | H |
| 10885.670 | 39.79 | 14.96 | 37.94 | 33.00 | 49.81 | 74.00 | H |



Average Measurement:

| Frequency (MHz) | Antenna factors (dB/m) | Cable loss (dB) | Preamp factor (dB) | Reading Level (dB μ V) | Emission Level (dB μ V/m) | Limit (dB μ V/m) | Antenna polarization |
|-----------------|------------------------|-----------------|--------------------|----------------------------|-------------------------------|----------------------|----------------------|
| 1390.276 | 24.91 | 5.26 | 38.90 | 33.66 | 24.93 | 54.00 | Vertical |
| 2310.000 | 26.25 | 6.80 | 39.07 | 42.75 | 36.73 | 54.00 | V |
| 2390.000 | 26.43 | 6.87 | 39.10 | 40.41 | 34.61 | 54.00 | V |
| 2471.157 | 26.56 | 7.04 | 39.13 | 31.52 | 25.99 | 54.00 | V |
| 2483.500 | 26.58 | 7.07 | 39.14 | 39.69 | 34.20 | 54.00 | V |
| 2500.000 | 26.60 | 7.10 | 39.14 | 37.23 | 31.79 | 54.00 | V |
| 4254.921 | 29.83 | 9.33 | 40.12 | 32.61 | 31.65 | 54.00 | V |
| 5813.812 | 32.17 | 10.91 | 39.98 | 31.43 | 34.53 | 54.00 | V |
| 6954.852 | 35.06 | 12.46 | 39.32 | 32.61 | 40.81 | 54.00 | V |
| 10453.970 | 38.90 | 14.76 | 37.87 | 23.44 | 39.23 | 54.00 | V |
| 1989.550 | 25.20 | 6.30 | 38.98 | 33.63 | 26.15 | 54.00 | Horizontal |
| 2310.000 | 26.25 | 6.80 | 39.07 | 36.13 | 30.11 | 54.00 | H |
| 2390.000 | 26.43 | 6.87 | 39.10 | 41.14 | 35.34 | 54.00 | H |
| 2483.500 | 26.58 | 7.07 | 39.14 | 36.26 | 30.77 | 54.00 | H |
| 2500.000 | 26.60 | 7.10 | 39.14 | 40.13 | 34.69 | 54.00 | H |
| 3223.928 | 27.90 | 8.00 | 39.68 | 32.07 | 28.29 | 54.00 | H |
| 4508.136 | 30.12 | 9.61 | 40.17 | 35.48 | 35.04 | 54.00 | H |
| 6124.292 | 32.69 | 11.22 | 39.83 | 31.26 | 35.34 | 54.00 | H |
| 7368.741 | 35.82 | 12.98 | 39.21 | 30.12 | 39.71 | 54.00 | H |
| 10885.670 | 39.79 | 14.96 | 37.94 | 26.45 | 43.26 | 54.00 | H |

Test at middle Channel(2.442 GHz) in transmitting status

9kHz~1000 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with Loop and Log antennas were greater than 20dB below the limit, so the test data were not recorded in the test report.

Peak Measurement:

| Frequency (MHz) | Antenna factors (dB/m) | Cable loss (dB) | Preamp factor (dB) | Reading Level (dB μ V) | Emission Level (dB μ V/m) | Limit (dB μ V/m) | Antenna polarization |
|-----------------|------------------------|-----------------|--------------------|----------------------------|-------------------------------|----------------------|----------------------|
| 1498.781 | 25.00 | 5.50 | 38.93 | 43.45 | 35.02 | 74.00 | Vertical |
| 2310.000 | 26.25 | 6.80 | 39.07 | 50.31 | 44.29 | 74.00 | V |
| 2390.000 | 26.43 | 6.87 | 39.10 | 52.32 | 46.52 | 74.00 | V |
| 2483.500 | 26.58 | 7.07 | 39.14 | 50.28 | 44.79 | 74.00 | V |
| 2500.000 | 26.60 | 7.10 | 39.14 | 49.60 | 44.16 | 74.00 | V |
| 3007.868 | 27.90 | 7.71 | 39.42 | 42.22 | 38.41 | 74.00 | V |
| 4279.589 | 29.87 | 9.37 | 40.13 | 42.11 | 41.22 | 74.00 | V |
| 6124.292 | 32.69 | 11.22 | 39.83 | 41.63 | 45.71 | 74.00 | V |
| 7200.309 | 35.45 | 12.73 | 39.26 | 39.69 | 48.61 | 74.00 | V |
| 10156.140 | 38.24 | 14.50 | 37.84 | 33.43 | 48.33 | 74.00 | V |
| 1374.295 | 24.90 | 5.18 | 38.90 | 43.77 | 34.95 | 74.00 | Horizontal |
| 2310.000 | 26.25 | 6.80 | 39.07 | 48.04 | 42.02 | 74.00 | H |
| 2390.000 | 26.43 | 6.87 | 39.10 | 49.21 | 43.41 | 74.00 | H |
| 2483.500 | 26.58 | 7.07 | 39.14 | 53.49 | 48.00 | 74.00 | H |
| 2500.000 | 26.60 | 7.10 | 39.14 | 50.24 | 44.80 | 74.00 | H |
| 2838.921 | 27.63 | 7.48 | 39.31 | 41.97 | 37.77 | 74.00 | H |
| 4015.929 | 29.51 | 9.01 | 40.07 | 41.57 | 40.02 | 74.00 | H |
| 6340.436 | 33.76 | 11.54 | 39.63 | 40.77 | 46.44 | 74.00 | H |
| 6874.906 | 34.95 | 12.35 | 39.35 | 40.03 | 47.98 | 74.00 | H |
| 9585.684 | 37.48 | 14.49 | 37.97 | 35.02 | 49.02 | 74.00 | H |



Average Measurement:

| Frequency (MHz) | Antenna factors (dB/m) | Cable loss (dB) | Preamp factor (dB) | Reading Level (dB μ V) | Emission Level (dB μ V/m) | Limit (dB μ V/m) | Antenna polarization |
|-----------------|------------------------|-----------------|--------------------|----------------------------|-------------------------------|----------------------|----------------------|
| 1498.781 | 25.00 | 5.50 | 38.93 | 33.56 | 25.13 | 54.00 | Vertical |
| 2310.000 | 26.25 | 6.80 | 39.07 | 41.75 | 35.73 | 54.00 | V |
| 2390.000 | 26.43 | 6.87 | 39.10 | 42.41 | 36.61 | 54.00 | V |
| 2483.500 | 26.58 | 7.07 | 39.14 | 40.72 | 35.23 | 54.00 | V |
| 2500.000 | 26.60 | 7.10 | 39.14 | 40.38 | 34.94 | 54.00 | V |
| 3007.868 | 27.90 | 7.71 | 39.42 | 33.55 | 29.74 | 54.00 | V |
| 4279.589 | 29.87 | 9.37 | 40.13 | 32.63 | 31.74 | 54.00 | V |
| 6124.292 | 32.69 | 11.22 | 39.83 | 31.27 | 35.35 | 54.00 | V |
| 7200.309 | 35.45 | 12.73 | 39.26 | 28.64 | 37.56 | 54.00 | V |
| 10156.140 | 38.24 | 14.50 | 37.84 | 25.63 | 40.53 | 54.00 | V |
| 1374.295 | 24.90 | 5.18 | 38.90 | 32.83 | 24.01 | 54.00 | Horizontal |
| 2310.000 | 26.25 | 6.80 | 39.07 | 39.32 | 33.30 | 54.00 | H |
| 2390.000 | 26.43 | 6.87 | 39.10 | 40.14 | 34.34 | 54.00 | H |
| 2483.500 | 26.58 | 7.07 | 39.14 | 42.56 | 37.07 | 54.00 | H |
| 2500.000 | 26.60 | 7.10 | 39.14 | 41.11 | 35.67 | 54.00 | H |
| 2838.921 | 27.63 | 7.48 | 39.31 | 30.38 | 26.18 | 54.00 | H |
| 4015.929 | 29.51 | 9.01 | 40.07 | 30.62 | 29.07 | 54.00 | H |
| 6340.436 | 33.76 | 11.54 | 39.63 | 31.26 | 36.93 | 54.00 | H |
| 6874.906 | 34.95 | 12.35 | 39.35 | 30.66 | 38.61 | 54.00 | H |
| 9585.684 | 37.48 | 14.49 | 37.97 | 25.69 | 39.69 | 54.00 | H |

Test at highest Channel (2.480 GHz) in transmitting status

9KHz~1000 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

The measurements with Loop and Log antennas were greater than 20dB below the limit, so the test data were not recorded in the test report.

Peak Measurement:

| Frequency (MHz) | Antenna factors (dB/m) | Cable loss (dB) | Preamp factor (dB) | Reading Level (dB μ V) | Emission Level (dB μ V/m) | Limit (dB μ V/m) | Antenna polarization |
|-----------------|------------------------|-----------------|--------------------|----------------------------|-------------------------------|----------------------|----------------------|
| 1625.121 | 25.04 | 5.65 | 38.95 | 42.93 | 34.67 | 74.00 | Vertical |
| 2163.504 | 25.57 | 6.50 | 39.03 | 43.76 | 36.80 | 74.00 | V |
| 2310.000 | 26.25 | 6.80 | 39.07 | 49.94 | 43.92 | 74.00 | V |
| 2390.000 | 26.43 | 6.87 | 39.10 | 50.05 | 44.25 | 74.00 | V |
| 2483.500 | 26.58 | 7.07 | 39.14 | 66.25 | 60.76 | 74.00 | V |
| 2500.000 | 26.60 | 7.10 | 39.14 | 47.10 | 41.66 | 74.00 | V |
| 3078.229 | 27.90 | 7.86 | 39.49 | 42.35 | 38.62 | 74.00 | V |
| 4405.090 | 30.03 | 9.53 | 40.15 | 41.25 | 40.66 | 74.00 | V |
| 6640.542 | 34.49 | 11.89 | 39.45 | 41.39 | 48.32 | 74.00 | V |
| 9866.789 | 37.86 | 14.42 | 37.86 | 34.87 | 49.29 | 74.00 | V |
| 1731.816 | 25.10 | 5.86 | 38.96 | 43.33 | 35.33 | 74.00 | Horizontal |
| 2310.000 | 26.25 | 6.80 | 39.07 | 48.04 | 42.02 | 74.00 | H |
| 2390.000 | 26.43 | 6.87 | 39.10 | 48.51 | 42.71 | 74.00 | H |
| 2483.500 | 26.58 | 7.07 | 39.14 | 63.86 | 58.37 | 74.00 | H |
| 2500.000 | 26.60 | 7.10 | 39.14 | 48.92 | 43.48 | 74.00 | H |
| 3060.486 | 27.90 | 7.82 | 39.47 | 42.15 | 38.40 | 74.00 | H |
| 3856.668 | 29.19 | 8.82 | 40.03 | 43.08 | 41.06 | 74.00 | H |
| 5915.516 | 32.25 | 11.03 | 39.94 | 41.43 | 44.77 | 74.00 | H |
| 7717.518 | 36.22 | 13.27 | 39.14 | 37.46 | 47.81 | 74.00 | H |
| 10393.710 | 38.79 | 14.71 | 37.86 | 35.04 | 50.68 | 74.00 | H |



Average Measurement:


| Frequency (MHz) | Antenna factors (dB/m) | Cable loss (dB) | Preamp factor (dB) | Reading Level (dB μ V) | Emission Level (dB μ V/m) | Limit (dB μ V/m) | Antenna polarization |
|-----------------|------------------------|-----------------|--------------------|----------------------------|-------------------------------|----------------------|----------------------|
| 1625.121 | 25.04 | 5.65 | 38.95 | 33.23 | 24.97 | 54.00 | Vertical |
| 2163.504 | 25.57 | 6.50 | 39.03 | 32.85 | 25.89 | 54.00 | V |
| 2310.000 | 26.25 | 6.80 | 39.07 | 39.13 | 33.11 | 54.00 | V |
| 2390.000 | 26.43 | 6.87 | 39.10 | 41.89 | 36.09 | 54.00 | V |
| 2483.500 | 26.58 | 7.07 | 39.14 | 56.53 | 51.04 | 54.00 | V |
| 2500.000 | 26.60 | 7.10 | 39.14 | 38.52 | 33.08 | 54.00 | V |
| 3078.229 | 27.90 | 7.86 | 39.49 | 33.87 | 30.14 | 54.00 | V |
| 4405.090 | 30.03 | 9.53 | 40.15 | 33.62 | 33.03 | 54.00 | V |
| 6640.542 | 34.49 | 11.89 | 39.45 | 31.88 | 38.81 | 54.00 | V |
| 9866.789 | 37.86 | 14.42 | 37.86 | 26.86 | 41.28 | 54.00 | V |
| 1731.816 | 25.10 | 5.86 | 38.96 | 33.69 | 25.69 | 54.00 | Horizontal |
| 2310.000 | 26.25 | 6.80 | 39.07 | 39.73 | 33.71 | 54.00 | H |
| 2390.000 | 26.43 | 6.87 | 39.10 | 40.11 | 34.31 | 54.00 | H |
| 2483.500 | 26.58 | 7.07 | 39.14 | 53.24 | 47.75 | 54.00 | H |
| 2500.000 | 26.60 | 7.10 | 39.14 | 39.23 | 33.79 | 54.00 | H |
| 3060.486 | 27.90 | 7.82 | 39.47 | 30.27 | 26.52 | 54.00 | H |
| 3856.668 | 29.19 | 8.82 | 40.03 | 30.65 | 28.63 | 54.00 | H |
| 5915.516 | 32.25 | 11.03 | 39.94 | 30.33 | 33.67 | 54.00 | H |
| 7717.518 | 36.22 | 13.27 | 39.14 | 28.63 | 38.98 | 54.00 | H |
| 10393.710 | 38.79 | 14.71 | 37.86 | 36.60 | 41.36 | 54.00 | H |

Remark: above table only record the worse data of emissions in restricted frequency bands.

Test result: The unit does meet the FCC requirements.

7.8 Band Edges Requirement

| | |
|---------------------|---|
| Test Requirement: | FCC Part 15 C section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits. |
| Frequency Band: | 2400 MHz to 2483.5 MHz |
| Test Method: | ANSI C63.10: Clause 11.13 |
| Test Status: | Enter test mode for the product. Test in lowest channel 2402 MHz and highest channel 2480 MHz, keep in continuously transmitting status with GFSK modulation. |
| Test Configuration: | |

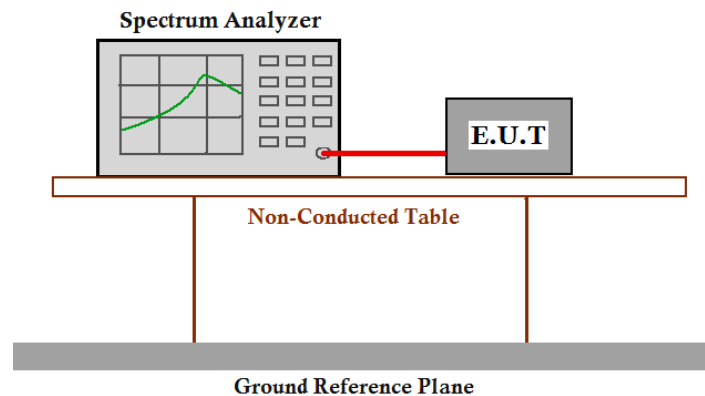

Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
3. Set span to 2MHz,
4. RBW=100kHz,
5. VBW \geq 3 \times RBW
6. Detector=peak
7. Sweep time =auto,
8. Trace mode=max hold.
9. Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)
10. Compute the power by integrating the spectrum over 1MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency ($f_{\text{emission}} \pm 0.5\text{MHz}$). If the instrument does not have a band power function, the sum the amplitude levels (in power units) at 100kHz intervals extending across the 1MHz spectrum defined by $f_{\text{emission}} \pm 0.5\text{MHz}$.

Test result with plots as follows:


Compare with the output power of the lowest frequency, the Lower Edges attenuated more than 20dB
 Compare with the output power of the highest frequency, the Upper Edges attenuated more than 20dB.

Result plot as follows:

Channel 0: 2.402 GHz

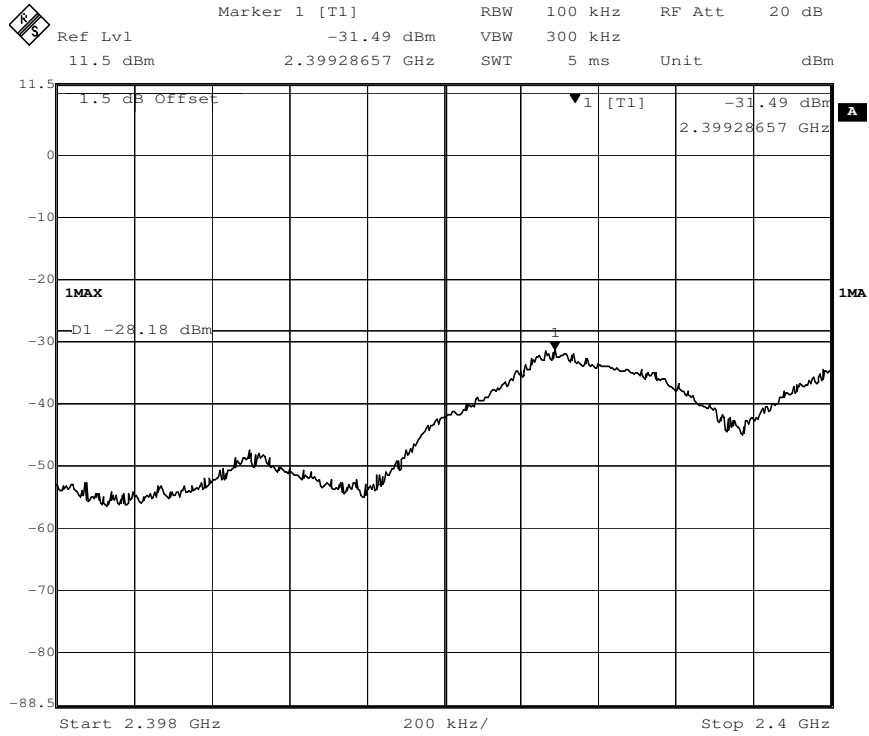

Channel 39: 2.480GHz

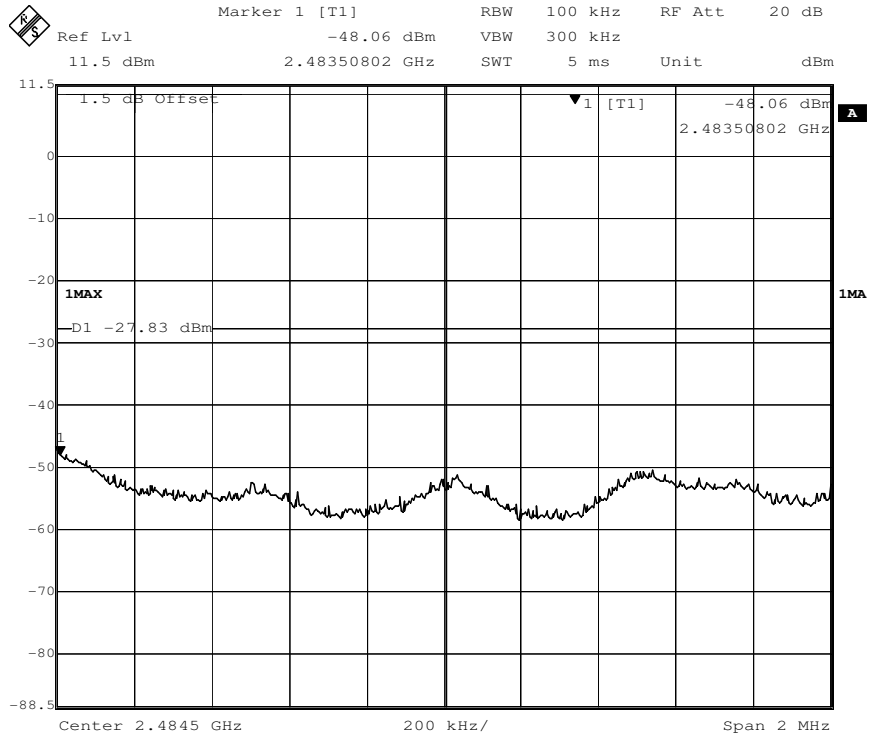

7.9 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz

Test Requirement: FCC Part 15 C section 15.207
Test Method: ANSI C63.10: Clause 6.2
Frequency Range: 150 kHz to 30 MHz
Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)
Test Limit

Limits for conducted disturbance at the mains ports of class B


| Frequency Range (MHz) | Class B Limit dB(μV) | |
|--------------------------|----------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation: Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Test Configuration:

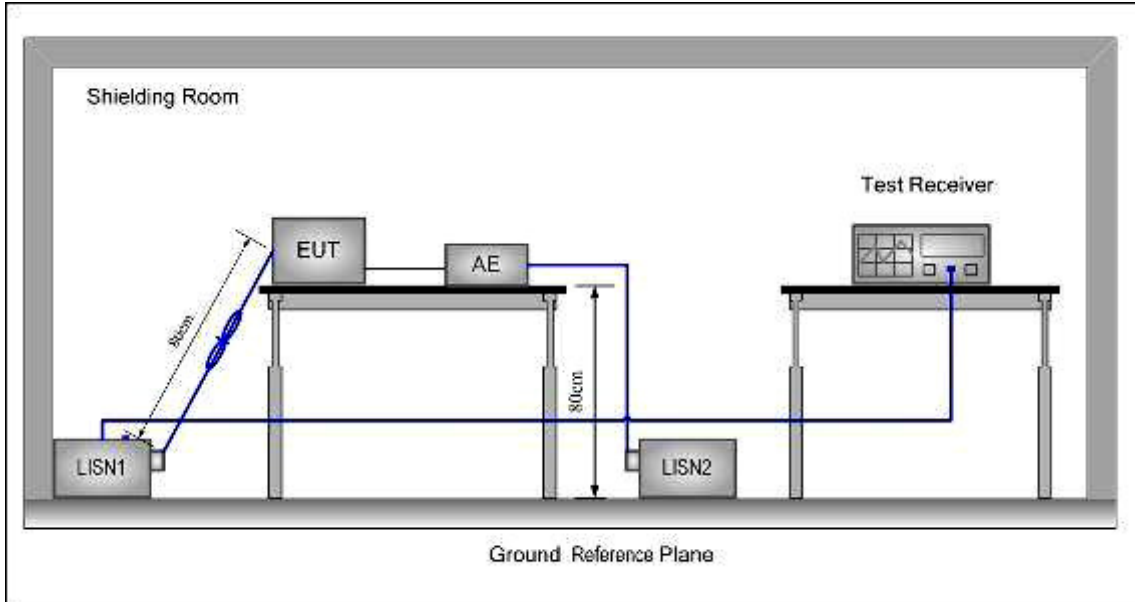

Test procedure:

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


7.9.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT:

Live Line:

Level(dBμV)

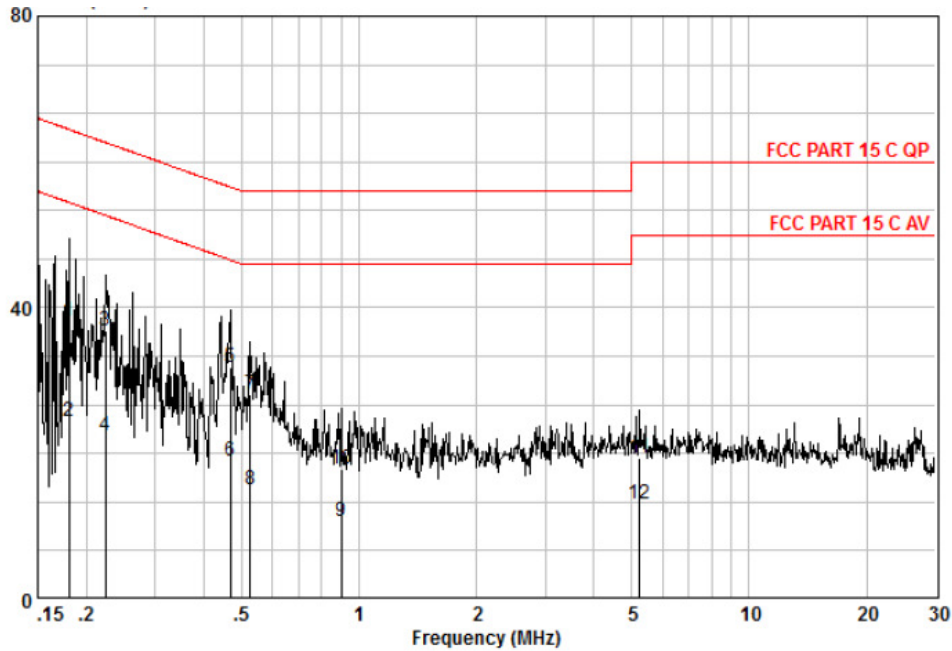


Measure data:

| Frequency MHz | read level dBμV | Cable Loss dB | LISN Factor dB | Measured level dBμV | Limit Line dBμV | Over limit dB | Remark |
|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 0,181 | 28,33 | 0,10 | 9,69 | 38,12 | 64,46 | -26,34 | QP |
| 0,181 | 14,62 | 0,10 | 9,69 | 24,41 | 54,46 | -30,05 | AVERAGE |
| 0,223 | 27,01 | 0,11 | 9,70 | 36,82 | 62,70 | -25,88 | QP |
| 0,223 | 12,60 | 0,11 | 9,70 | 22,41 | 52,70 | -30,29 | AVERAGE |
| 0,469 | 21,98 | 0,19 | 9,71 | 31,88 | 56,54 | -24,66 | QP |
| 0,469 | 9,15 | 0,19 | 9,71 | 19,05 | 46,54 | -27,49 | AVERAGE |
| 0,527 | 18,19 | 0,21 | 9,71 | 28,11 | 56,00 | -27,89 | QP |
| 0,527 | 5,16 | 0,21 | 9,71 | 15,08 | 46,00 | -30,92 | AVERAGE |
| 0,899 | 0,60 | 0,28 | 9,70 | 10,58 | 46,00 | -35,42 | AVERAGE |
| 0,899 | 7,95 | 0,28 | 9,70 | 17,93 | 56,00 | -38,07 | QP |
| 5,249 | 9,04 | 0,69 | 9,76 | 19,50 | 60,00 | -40,50 | QP |
| 5,249 | 2,64 | 0,69 | 9,76 | 13,10 | 50,00 | -36,90 | AVERAGE |

Neutral Line:

Level(dBμV)

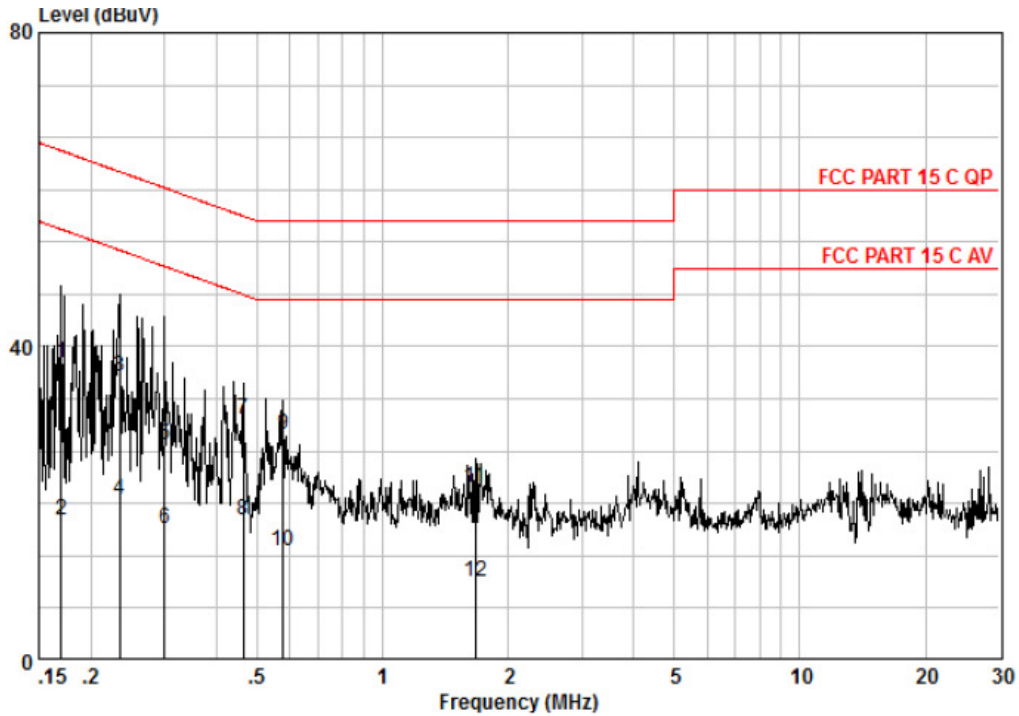

Measure data:

| Frequency MHz | read level dBuV | Cable Loss dB | LISN Factor dB | Measured level dBuV | Limit Line dBuV | Over limit dB | Remark |
|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 0.169 | 28.26 | 0.10 | 9.55 | 37.91 | 64.99 | -27.08 | QP |
| 0.169 | 8.16 | 0.10 | 9.55 | 17.81 | 54.99 | -37.18 | AVERAGE |
| 0.234 | 26.45 | 0.12 | 9.56 | 36.12 | 62.30 | -26.18 | QP |
| 0.234 | 10.92 | 0.12 | 9.56 | 20.59 | 52.30 | -31.71 | AVERAGE |
| 0.300 | 17.66 | 0.14 | 9.56 | 27.36 | 60.24 | -32.87 | QP |
| 0.300 | 6.99 | 0.14 | 9.56 | 16.69 | 50.24 | -33.54 | AVERAGE |
| 0.464 | 20.95 | 0.19 | 9.55 | 30.69 | 56.63 | -25.94 | QP |
| 0.464 | 8.09 | 0.19 | 9.55 | 17.83 | 46.63 | -28.80 | AVERAGE |
| 0.576 | 18.97 | 0.22 | 9.54 | 28.73 | 56.00 | -27.27 | QP |
| 0.576 | 4.27 | 0.22 | 9.54 | 14.03 | 46.00 | -31.97 | AVERAGE |
| 1.671 | 12.01 | 0.34 | 9.56 | 21.91 | 56.00 | -34.09 | QP |
| 1.671 | 0.17 | 0.34 | 9.56 | 10.07 | 46.00 | -35.93 | AVERAGE |

--End of Report--