

# RF TEST REPORT

ISSUED BY  
Shenzhen BALUN Technology Co., Ltd.



FOR  
**Graphic Drawing Tablet**

ISSUED TO  
XPPEN Technology CO.

4020 N Palm Street, Suite 206/207 Fullerton, California 92835 United States of America



Tested by: *Yu Yingyuan*  
Yu Yingyuan

Date: *Jun. 30, 2021*

Approved by: *[Signature]*

Wei Yanquan  
(Chief Engineer)

Date: *Jun. 30, 2021*

Report No.: BL-SZ2140519-601

EUT Name: Graphic Drawing Tablet

Model Name: MT1160B, MT0960B (refer section 2.4)

Brand Name: XP-PEN

Test Standard: 47 CFR Part 15 Subpart C

FCC ID: 2AKDT-MT1160B

Test Conclusion: Pass

Test Date: May 22, 2021 ~ May 27, 2021

Date of Issue: Jun. 30, 2021

*NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.*

**Revision History**

<u>Version</u>	<u>Issue Date</u>	<u>Revisions Content</u>
<u>Rev. 01</u>	<u>Jun. 30, 2021</u>	<u>Initial Issue</u>

**TABLE OF CONTENTS**

1	ADMINISTRATIVE DATA (GENERAL INFORMATION) .....	5
1.1	Identification of the Testing Laboratory .....	5
1.2	Identification of the Responsible Testing Location .....	5
1.3	Laboratory Condition .....	5
1.4	Announce .....	5
2	PRODUCT INFORMATION .....	6
2.1	Applicant Information .....	6
2.2	Manufacturer Information .....	6
2.3	Factory Information .....	6
2.4	General Description for Equipment under Test (EUT) .....	6
2.5	Technical Information .....	7
2.6	Additional Instructions .....	8
3	SUMMARY OF TEST RESULTS .....	9
3.1	Test Standards .....	9
3.2	Verdict .....	10
4	GENERAL TEST CONFIGURATIONS .....	11
4.1	Test Environments .....	11
4.2	Test Equipment List .....	11
4.3	Measurement Uncertainty .....	11
4.4	Description of Test Setup .....	12
4.4.1	For Antenna Port Test .....	12
4.4.2	For AC Power Supply Port Test .....	12
4.4.3	For Radiated Test (Below 30 MHz) .....	13
4.4.4	For Radiated Test (30 MHz-1 GHz) .....	13
4.4.5	For Radiated Test (Above 1 GHz) .....	14
4.5	Measurement Results Explanation Example .....	15
4.5.1	For conducted test items: .....	15

4.5.2	For radiated band edges and spurious emission test:.....	15
5	TEST ITEMS .....	16
5.1	Antenna Requirements .....	16
5.1.1	Relevant Standards .....	16
5.1.2	Antenna Anti-Replacement Construction .....	16
5.1.3	Antenna Gain .....	16
5.2	Output Power .....	17
5.2.1	Test Limit.....	17
5.2.2	Test Setup.....	17
5.2.3	Test Procedure .....	17
5.2.4	Test Result .....	18
5.3	Occupied Bandwidth.....	19
5.3.1	Limit.....	19
5.3.2	Test Setup.....	19
5.3.3	Test Procedure .....	19
5.3.4	Test Result .....	19
5.4	Conducted Spurious Emission.....	20
5.4.1	Limit.....	20
5.4.2	Test Setup.....	20
5.4.3	Test Procedure .....	20
5.4.4	Test Result .....	21
5.5	Band Edge (Authorized-band band-edge).....	22
5.5.1	Limit.....	22
5.5.2	Test Setup.....	22
5.5.3	Test Procedure .....	22
5.5.4	Test Result .....	22
5.6	Conducted Emission.....	23
5.6.1	Limit.....	23
5.6.2	Test Setup.....	23
5.6.3	Test Procedure .....	23
5.6.4	Test Result .....	23
5.7	Radiated Spurious Emission.....	24
5.7.1	Limit.....	24

5.7.2	Test Setup .....	24
5.7.3	Test Procedure .....	24
5.7.4	Test Result .....	27
5.8	Band Edge (Restricted-band band-edge) .....	28
5.8.1	Limit.....	28
5.8.2	Test Setup .....	28
5.8.3	Test Procedure .....	28
1.1.1	Test Result .....	28
5.9	Power Spectral density (PSD) .....	29
5.9.1	Limit.....	29
5.9.2	Test Setup .....	29
5.9.3	Test Procedure .....	29
5.9.4	Test Result .....	29
ANNEX A	TEST RESULT .....	30
A.1	Output Power, Duty Cycle .....	30
A.2	Occupied Bandwidth.....	33
A.3	Conducted Spurious Emissions .....	36
A.4	Band Edge (Authorized-band band-edge).....	41
A.5	Conducted Emissions .....	45
A.6	Radiated Spurious Emission.....	49
A.7	Band Edge (Restricted-band band-edge) .....	77
A.8	Power Spectral Density (PSD).....	81
ANNEX B	TEST SETUP PHOTOS .....	83
ANNEX C	EUT EXTERNAL PHOTOS .....	83
ANNEX D	EUT INTERNAL PHOTOS.....	83

# 1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

## 1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

## 1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

## 1.4 Announce

- (1) The test report reference to the report template version v6.9.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	XPPEN Technology CO.
Address	4020 N Palm Street, Suite 206/207 Fullerton, California 92835 United States of America

### 2.2 Manufacturer Information

Manufacturer	Hanvon Ugee Technology Co., Ltd.
Address	2/F, West of 3/F, 4/F, No.4 Building, Fulongte Industrial Park, Huaxing Road, Langkou Community, Dalang Street, Longhua District, Shenzhen

### 2.3 Factory Information

Factory	Hanvon Ugee Technology Co., Ltd.
Address	2/F, West of 3/F, 4/F, No.4 Building, Fulongte Industrial Park, Huaxing Road, Langkou Community, Dalang Street, Longhua District, Shenzhen

### 2.4 General Description for Equipment under Test (EUT)

EUT Name	Graphic Drawing Tablet
Model Name Under Test	MT1160B, MT0960B
Series Model Name	MT0960B, MT0960B-E, MT1060B, MT1060B-E, MT1160B, MT1160B-E, MT1400B, MT1400B-E, MT1600B, MT1600B-E, MT0961B, MT0961B-E, MT1061B, MT1061B-E, MT1161B, MT1161B-E, MT1401B, MT1401B-E, MT1601B, MT1601B-E
Description of Model name differentiation	The EUT has two sizes, and in this report we do MT1160B & MT0960B. There is no difference between software and hardware of RF, except screen size. Based on these differences, we tested both sizes for Conducted Emission, Radiated Spurious Emission & Band Edge.
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth BLE
-----------------------------------	---------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS
Modulation Type	GFSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	1 Mbps, 2 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	40 (at intervals of 2 MHz)
Tested Channel	0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz)
Antenna Type	PIFA Antenna
Antenna Gain	3.64 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna Impedance	50Ω
Antenna System (MIMO Smart Antenna)	N/A

## 2.6 Additional Instructions


EUT Software Settings:

Mode	<input checked="" type="checkbox"/> Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing. Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	Direct Test Mode Tool		
Support Units (Software installation media)	Description	Manufacturer	Model
		Notebook	Lenovo
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH0	2402	Power parameter Settings is 0.
	CH19	2440	
	CH39	2480	

Run Software

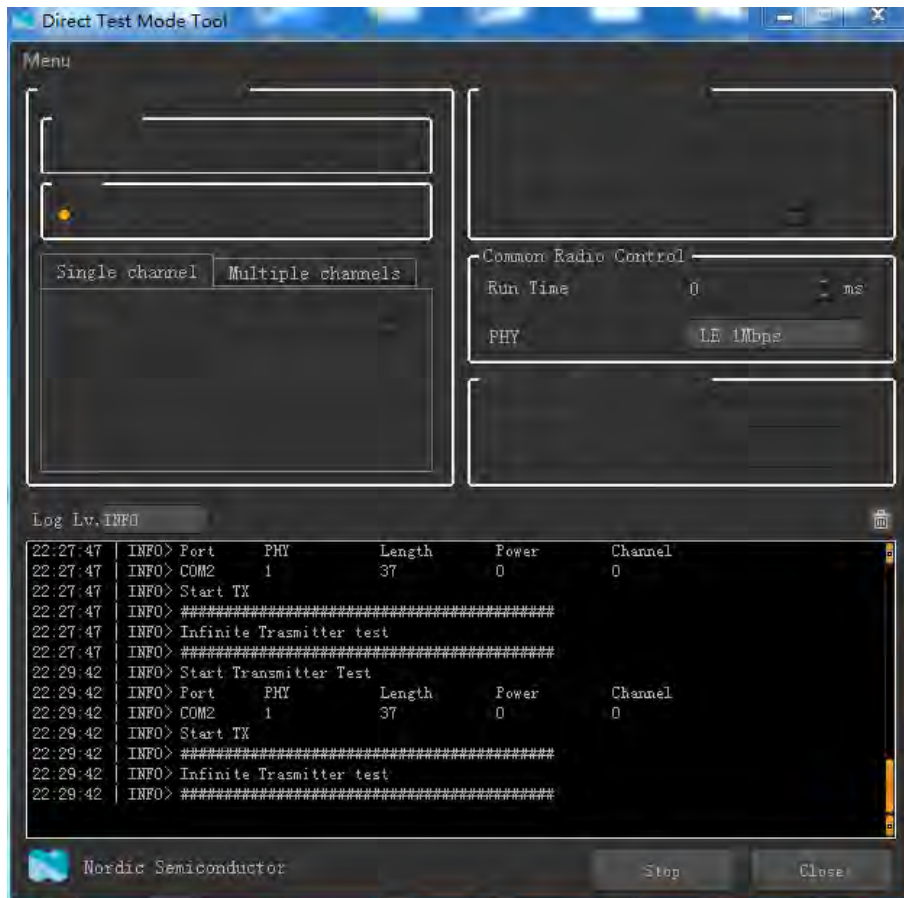



### 3 SUMMARY OF TEST RESULTS

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C (10-1-17 Edition)	Miscellaneous Wireless Communications Services
2	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### 3.2 Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-247, 5.4 (f)	N/A	--	Pass <sup>Note1</sup>
2	Output Power	15.247(b)	RSS-247, 5.4 (d)	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.7; RSS-247, 5.2 (a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-247, 5.5;	Low/ High	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 5.5	Low/Middle/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (b)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	RSS-Gen, 7.4	--	N/A	N/A <sup>Note2</sup>

Note <sup>1</sup>: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note <sup>2</sup>: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

## 4 GENERAL TEST CONFIGURATIONS

### 4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% to 55%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.7 V

### 4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2021.04.01	2022.03.31
Bluetooth Signaling Unit	ROHDE&SCHWARZ	CMW500	142028	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--

### 4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


Measurement	Value
Occupied Channel Bandwidth	±4%
RF output power, conducted	±1.21 dB
Power Spectral Density, conducted	±1.25 dB
Unwanted Emissions, conducted	±1.26 dB
All emissions, radiated	±3.86 dB
Temperature	±1°C
Humidity	±4%

### 4.4 Description of Test Setup

#### 4.4.1 For Antenna Port Test


Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable loss is 0.5dB, then the conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

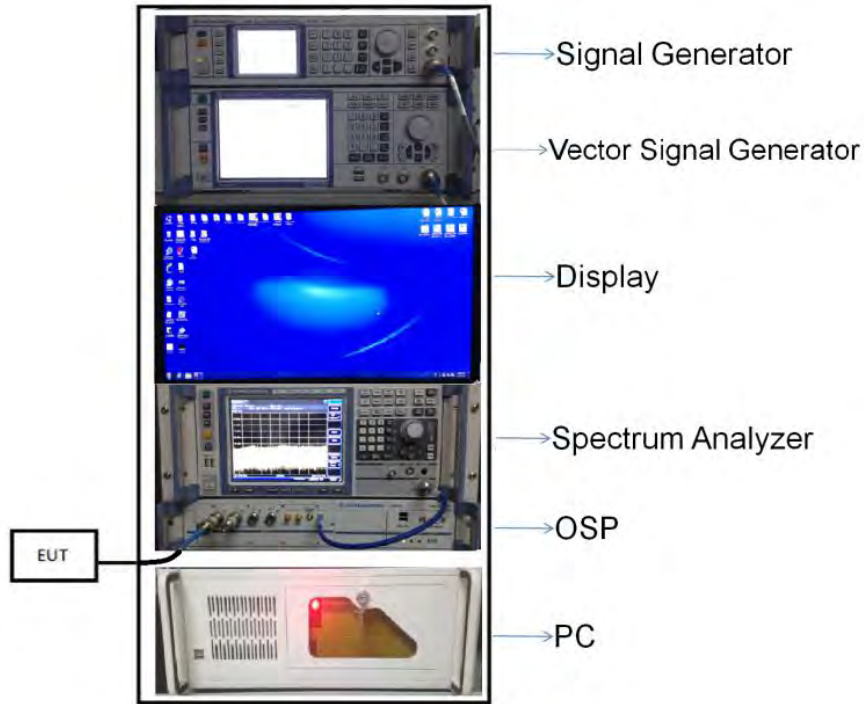


(Diagram 1)

#### 4.4.2 For AC Power Supply Port Test

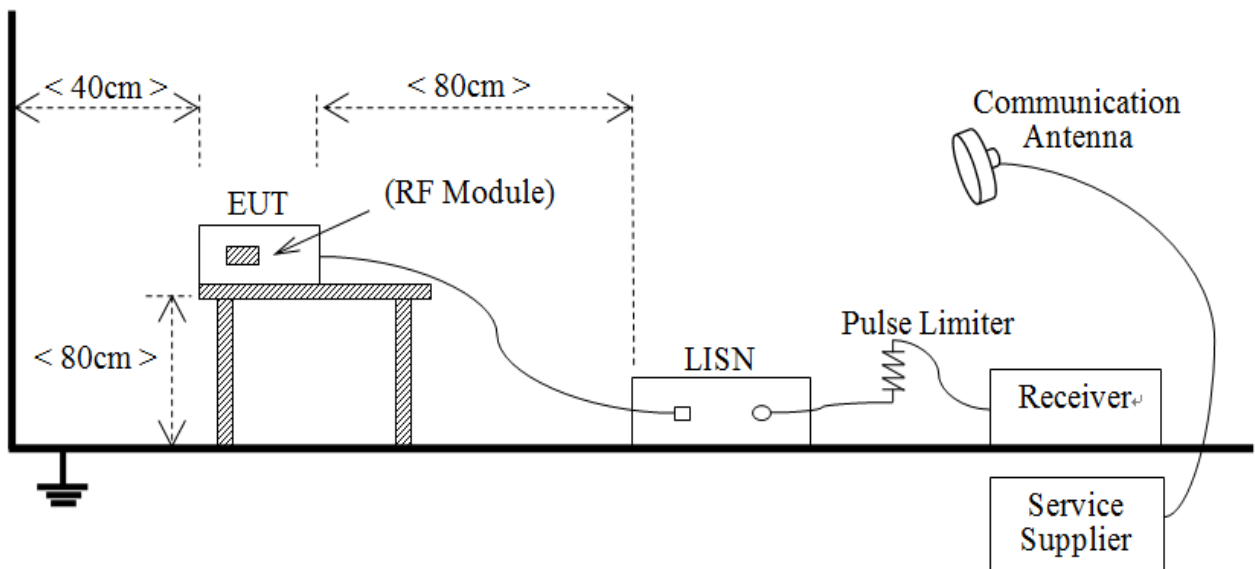


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

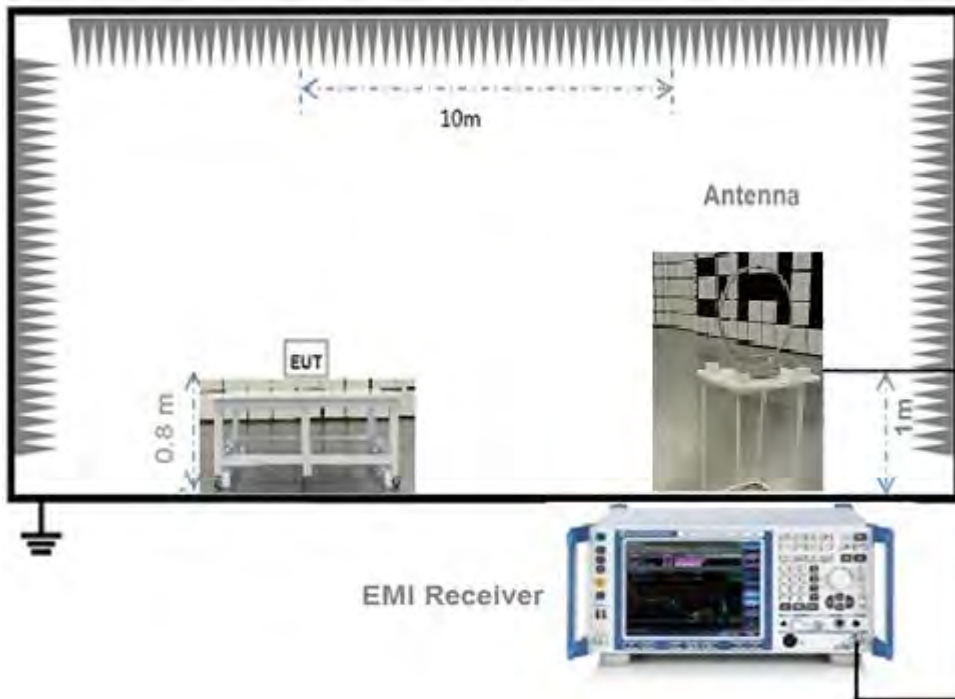


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

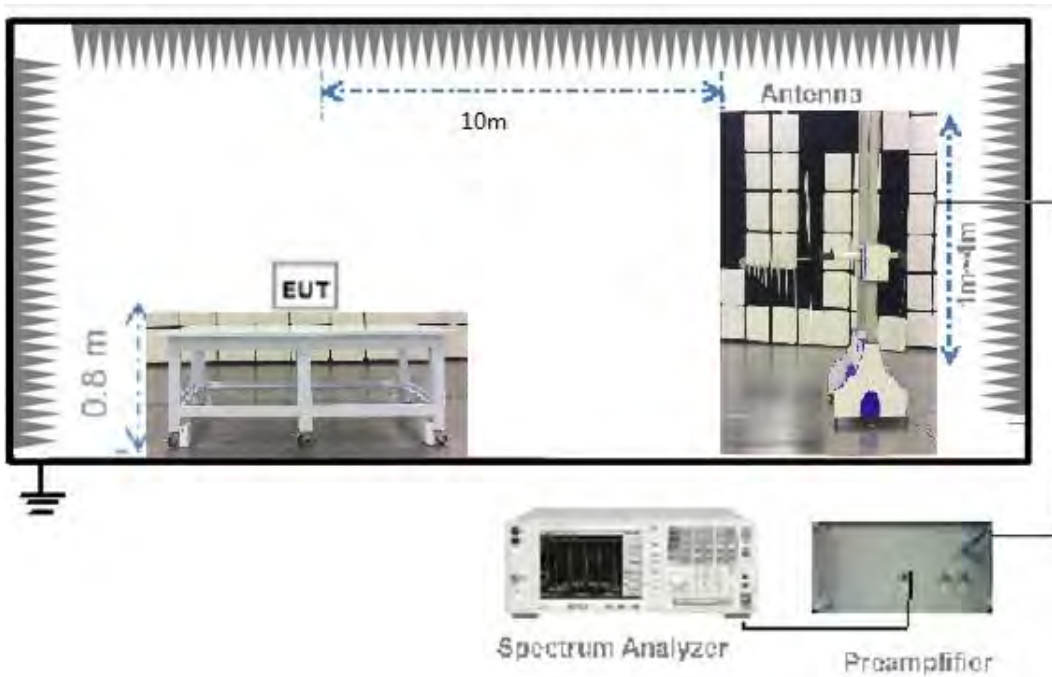

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

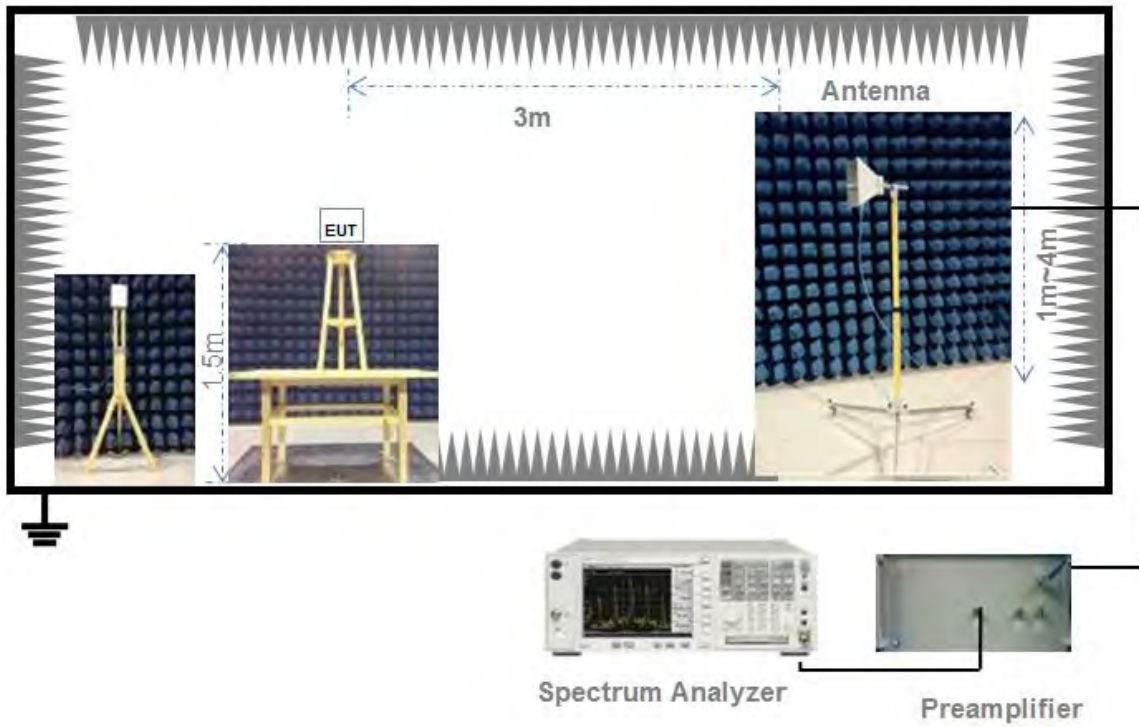

(Diagram 5)

## 4.5 Measurement Results Explanation Example

### 4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

### 4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

## 5 TEST ITEMS

### 5.1 Antenna Requirements

#### 5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

#### 5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

#### 5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 5.2 Output Power

### 5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 5.4 (d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

### 5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.2.3 Test Procedure

#### a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW  $\geq$  DTS bandwidth.

Set VBW  $\geq 3 \times$  RBW.

Set span  $\geq 3 \times$  RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

#### b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW  $\geq$  OBW if possible; otherwise, set RBW to the largest available value.

Set VBW  $\geq$  RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

#### 5.2.4 Test Result

Please refer to ANNEX A.1.

## 5.3 Occupied Bandwidth

### 5.3.1 Limit

FCC §15.247(a); RSS-247, 5.2 (a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

### 5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW)  $\geq 3$  RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 5.3.4 Test Result

Please refer to ANNEX A.2.

## 5.4 Conducted Spurious Emission

### 5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to  $\geq 1.5$  times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

#### 5.4.4 Test Result

Please refer to ANNEX A.3.

## 5.5 Band Edge (Authorized-band band-edge)

### 5.5.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle  $\geq 98\%$ ). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW  $\geq 3 \times$  RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission)  $\pm 0.5$  MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission  $\pm 0.5$  MHz.

### 5.5.4 Test Result

Please refer to ANNEX A.4.

## 5.6 Conducted Emission

### 5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

### 5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

### 5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

### 5.6.4 Test Result

Please refer to ANNEX A.5.

## 5.7 Radiated Spurious Emission

### 5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ ) =  $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$ .
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics:  $54\text{dB}\mu\text{V}/\text{m}@3\text{m}$  (AV) and  $74\text{dB}\mu\text{V}/\text{m}@3\text{m}$  (PK).

### 5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.



General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

#### Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.
- b) VBW  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle  $\geq$  98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than  $\pm$  2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle,  $x$ , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW  $\geq$  3 x RBW.
- e) Detector = RMS, if span/(# of points in sweep)  $\leq$  (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
  - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
  - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle.
  - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq$  98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

#### 5.7.4 Test Result

Please refer to ANNEX A.6.

## 5.8 Band Edge (Restricted-band band-edge)

### 5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.10; RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

### 5.8.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

### 1.1.1 Test Result

Please refer to ANNEX A.7.

## 5.9 Power Spectral density (PSD)

### 5.9.1 Limit

FCC §15.247(e); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 5.9.2 Test Setup

See section 4.4.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

### 5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .

Set the VBW  $\geq 3 \text{ RBW}$ .

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.9.4 Test Result

Please refer to ANNEX A.7.

# ANNEX A TEST RESULT

## A.1 Output Power, Duty Cycle

### Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low	-0.266	0.94	30	1000	Pass
Middle	-0.403	0.91			Pass
High	-0.648	0.86			Pass

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low	-0.180	0.96	30	1000	Pass
Middle	-0.307	0.93			Pass
High	-0.512	0.89			Pass

### Test plots


GFSK (BLE 1Mbps) LOW CHANNEL



GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL

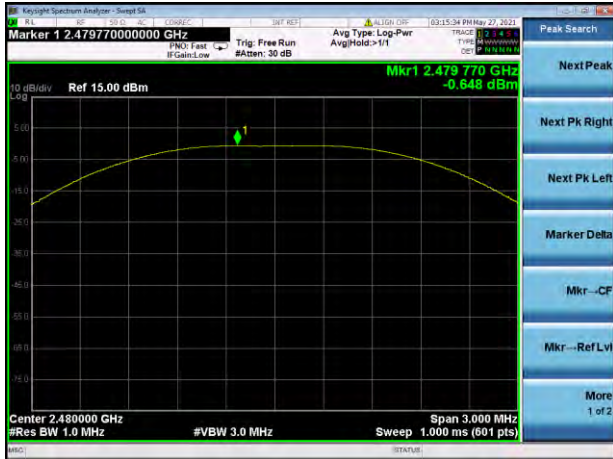

GFSK (BLE 2Mbps) LOW CHANNEL



GFSK (BLE 2Mbps) MIDDLE CHANNEL



GFSK (BLE 2Mbps) HIGH CHANNEL




**Duty Cycle Test Data**


Band	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
GFSK (BLE 1Mbps)	0.3920	0.6244	62.78%
GFSK (BLE 2Mbps)	0.2044	0.6244	32.74%

**Test plots**

GFSK (BLE 1Mbps)

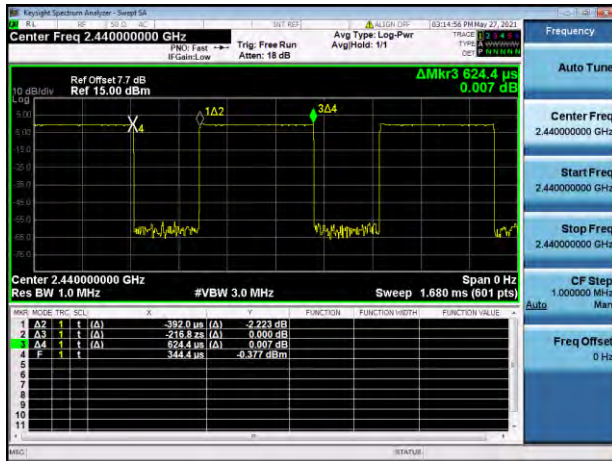

GFSK (BLE 2Mbps)

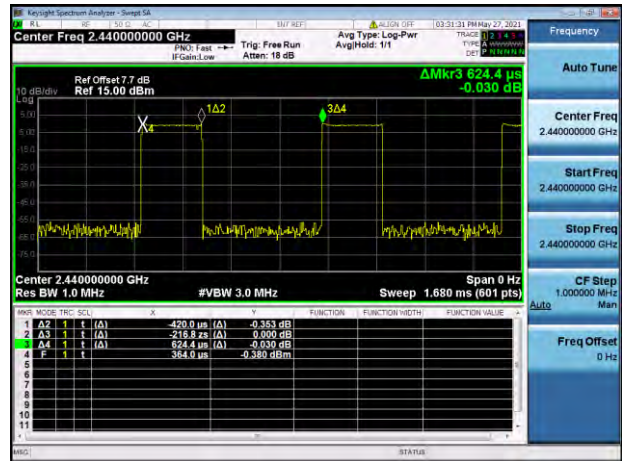



## A.2 Occupied Bandwidth

### Test Data


Test Mode	GFSK (BLE 1Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	690.000	1055.700	≥500
Middle Channel	695.000	1048.000	≥500
High Channel	685.000	1044.900	≥500

Test Mode	GFSK (BLE 2Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1140.000	2049.200	≥500
Middle Channel	1150.000	2055.200	≥500
High Channel	1160.000	2055.400	≥500

### Test plots

#### 6 dB Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL

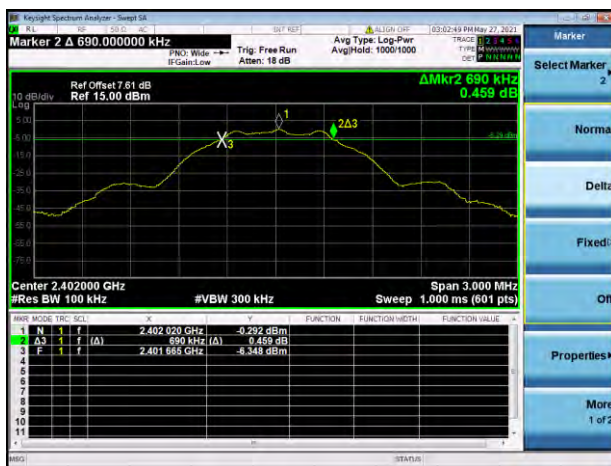

GFSK (BLE 1Mbps) MIDDLE CHANNEL



GFSK (BLE 1Mbps) HIGH CHANNEL



## GFSK (BLE 2Mbps) LOW CHANNEL

## GFSK (BLE 2Mbps) MIDDLE CHANNEL




## GFSK (BLE 2Mbps) HIGH CHANNEL



## 99% Bandwidth

## GFSK (BLE 1Mbps) LOW CHANNEL

## GFSK (BLE 1Mbps) MIDDLE CHANNEL

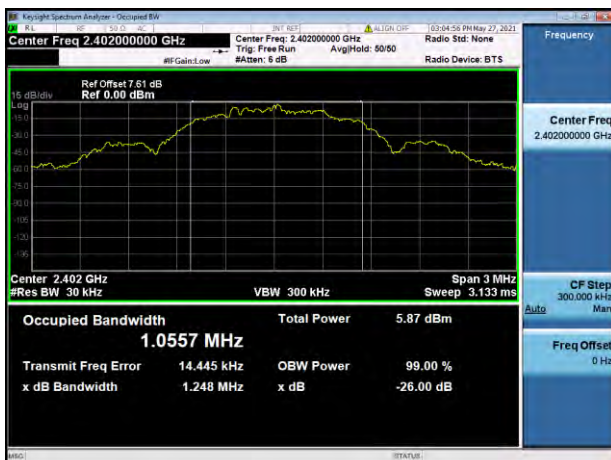

## GFSK (BLE 1Mbps) HIGH CHANNEL



## GFSK (BLE 2Mbps) LOW CHANNEL



## GFSK (BLE 2Mbps) MIDDLE CHANNEL



## GFSK (BLE 2Mbps) HIGH CHANNEL



### A.3 Conducted Spurious Emissions

#### Test Data



GFSK (BLE 1Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-39.226	-0.344	-20.344	Pass
Middle	-37.214	-0.486	-20.486	Pass
High	-38.565	-0.716	-20.716	Pass



GFSK (BLE 2Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-38.623	-0.338	-20.338	Pass
Middle	-38.491	-0.452	-20.452	Pass
High	-38.729	-0.720	-20.720	Pass

#### Test Plots


##### GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL

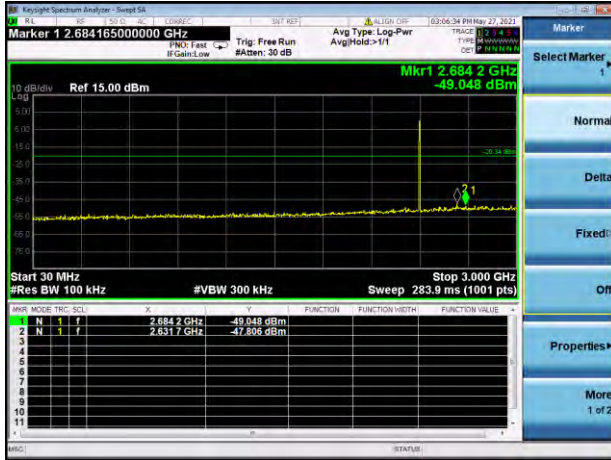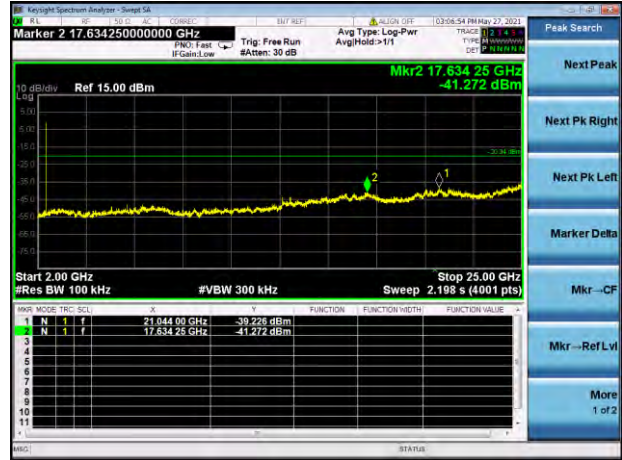


GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS  
 30 MHz ~ 3 GHz

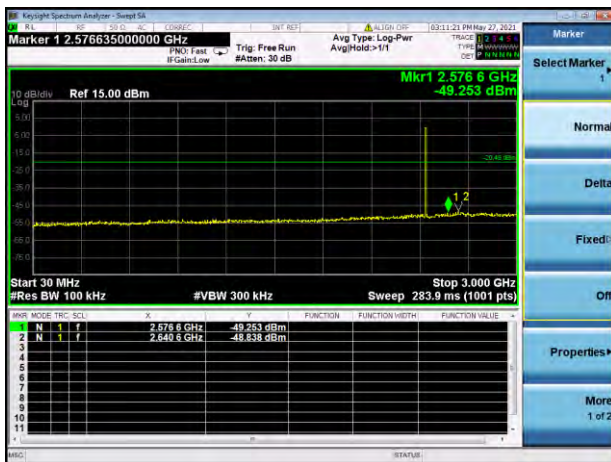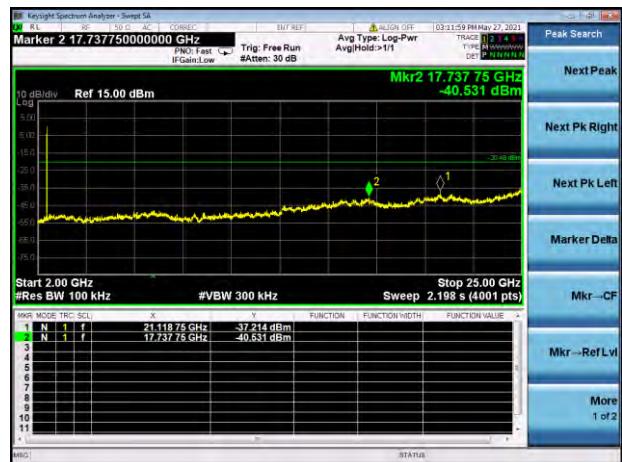 GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS  
 2 GHz ~ 25 GHz

 GFSK (BLE 1Mbps) MIDDLE CHANNEL,  
 CARRIER LEVEL

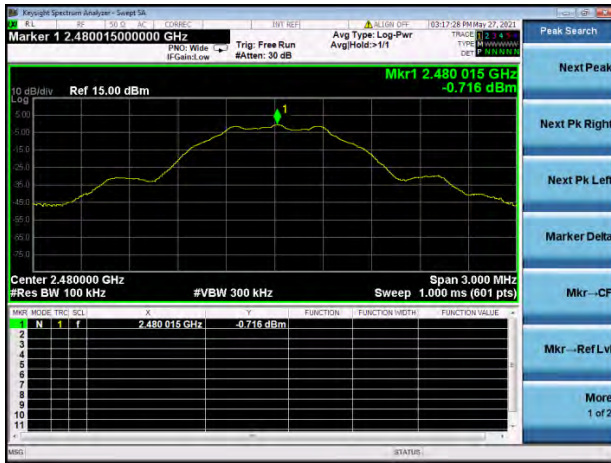 GFSK (BLE 1Mbps) MIDDLE CHANNEL,  
 SPURIOUS 30 MHz ~ 3 GHz

 GFSK (BLE 1Mbps) MIDDLE CHANNEL,  
 SPURIOUS 2 GHz ~ 25 GHz

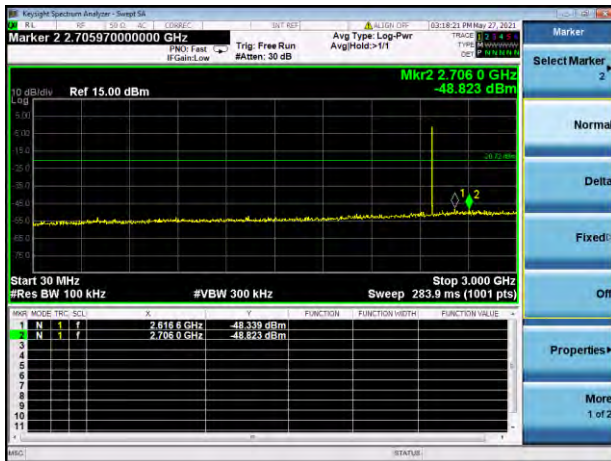
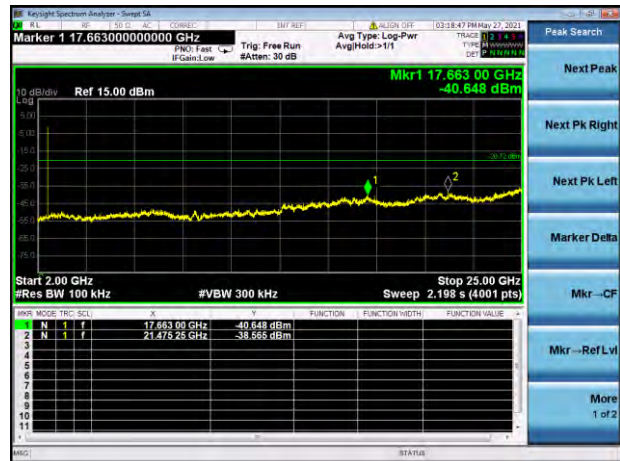
### GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL




### GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz








### GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz




### GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL

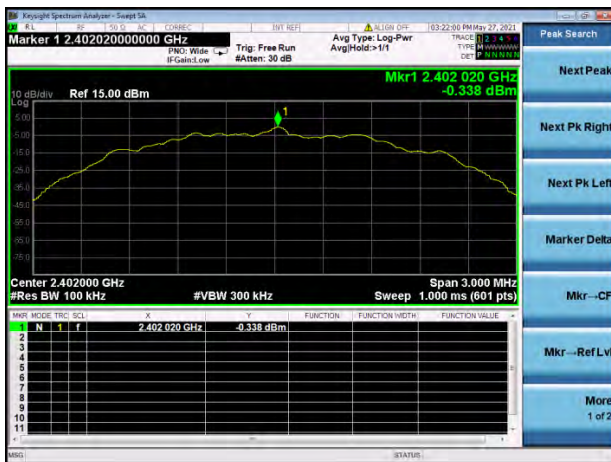


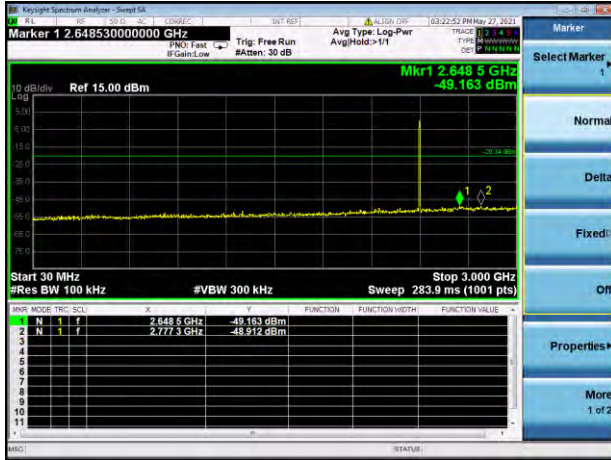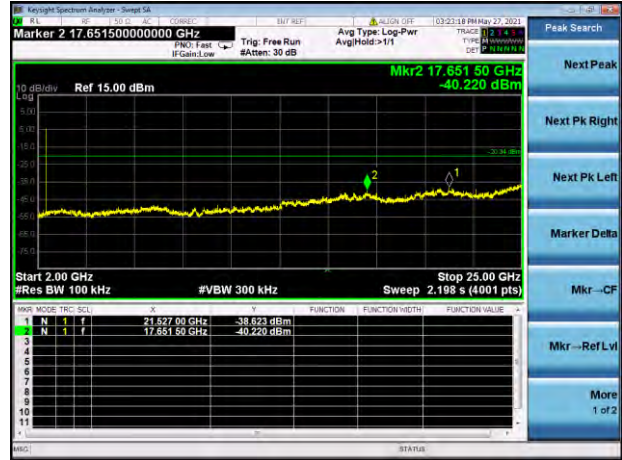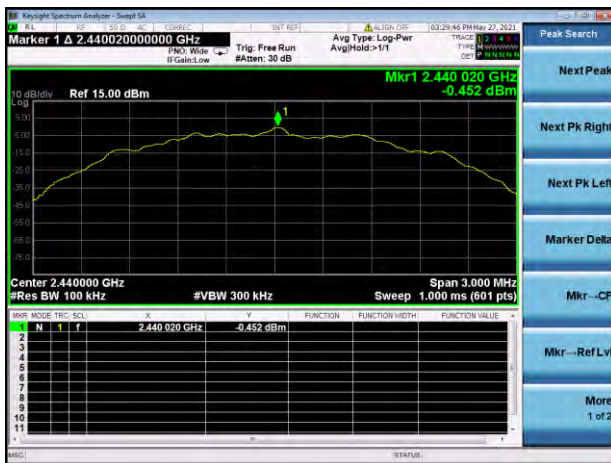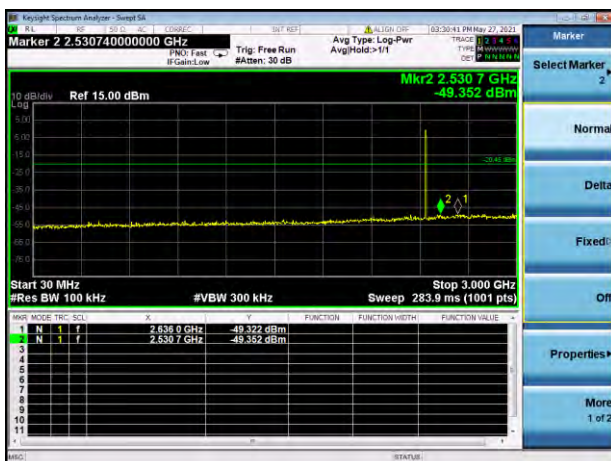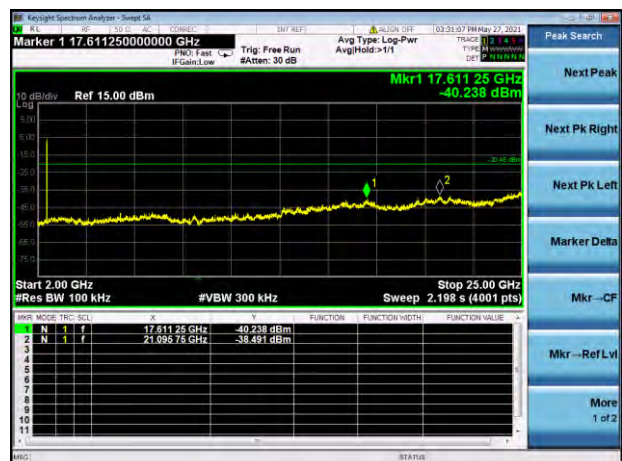GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS  
 30 MHz ~ 3 GHz

 GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS  
 2 GHz ~ 25 GHz

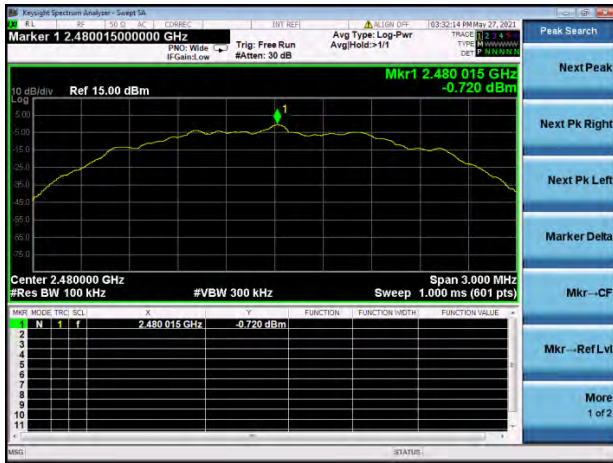 GFSK (BLE 2Mbps) MIDDLE CHANNEL,  
 CARRIER LEVEL

 GFSK (BLE 2Mbps) MIDDLE CHANNEL,  
 SPURIOUS 30 MHz ~ 3 GHz

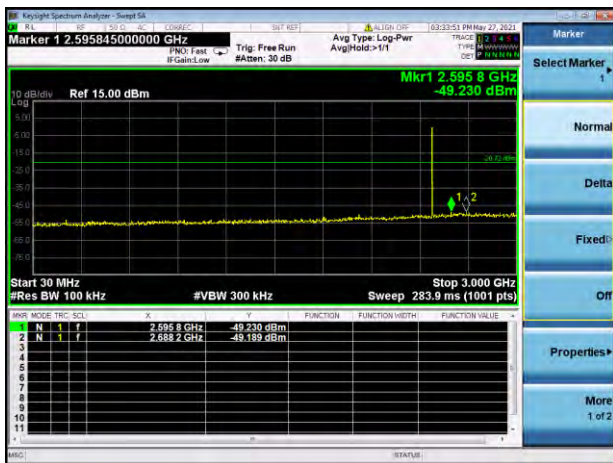 GFSK (BLE 2Mbps) MIDDLE CHANNEL,  
 SPURIOUS 2 GHz ~ 25 GHz


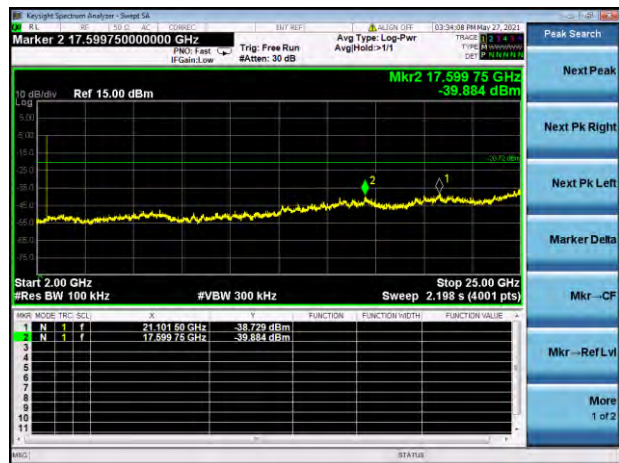
## GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER LEVEL



## GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz



## GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz





## A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

### BLE 1Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-52.475	-0.344	-20.344	Pass
High Channel	-58.771	-0.716	-20.716	Pass


### BLE 2Mbps

Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-43.904	-0.338	-20.338	Pass
High Channel	-58.567	-0.720	-20.720	Pass


### Test Plots

#### BLE 1Mbps


#### LOW CHANNEL, Carrier level

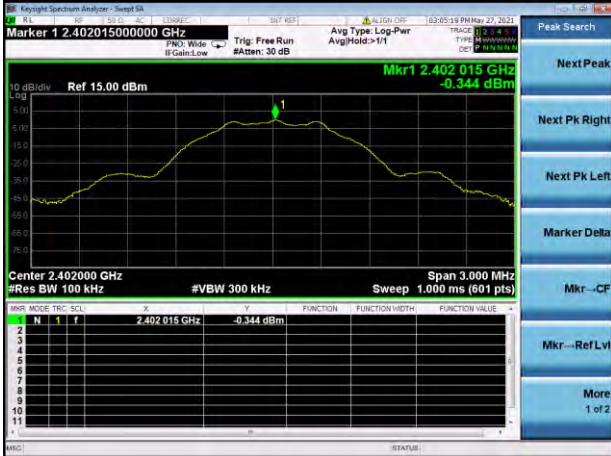


## LOW CHANNEL, Reference level

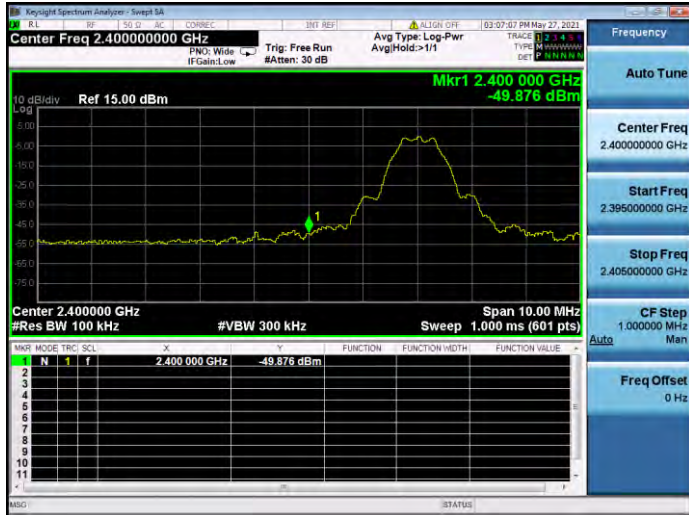


## LOW CHANNEL, Band Edge

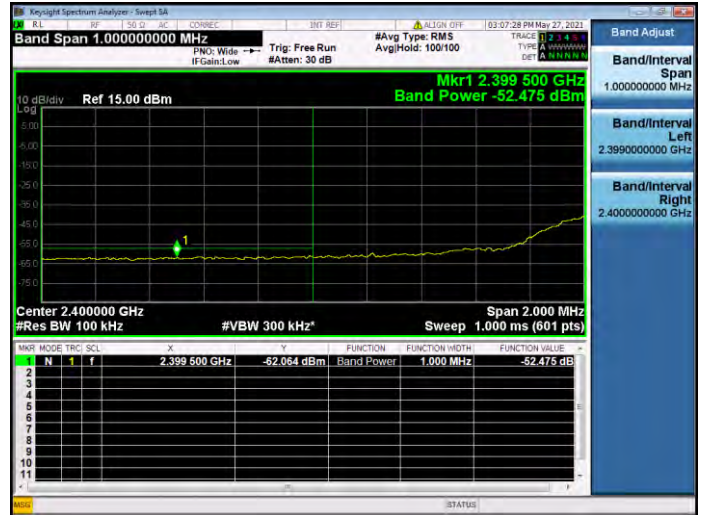


## High CHANNEL, Carrier level

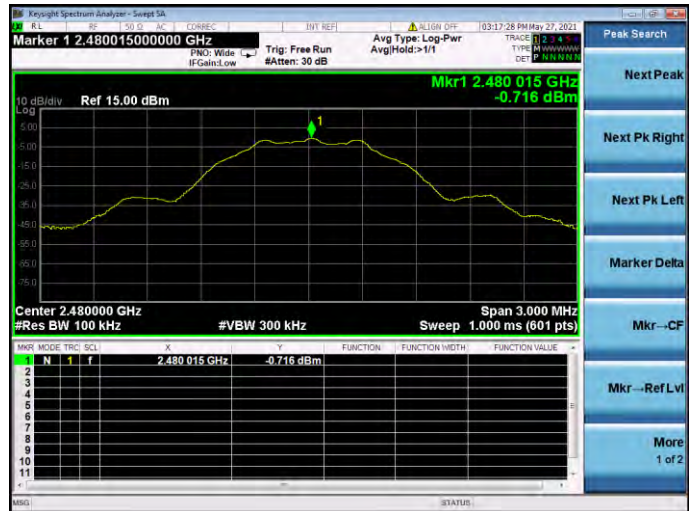

## HIGH CHANNEL, Reference level

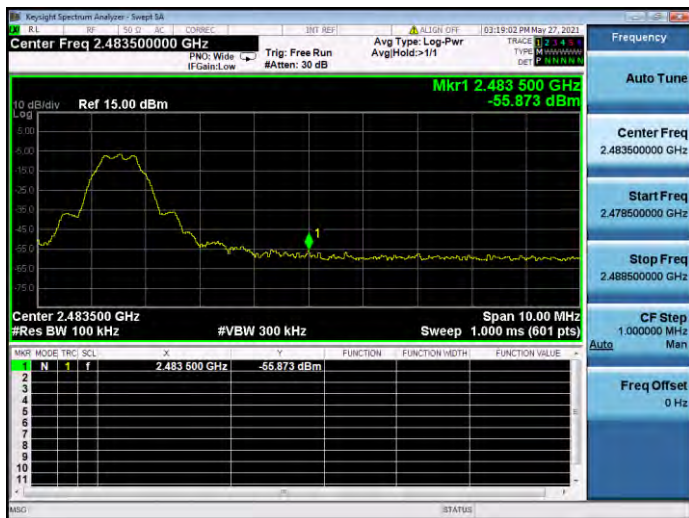


## HIGH CHANNEL, Band Edge

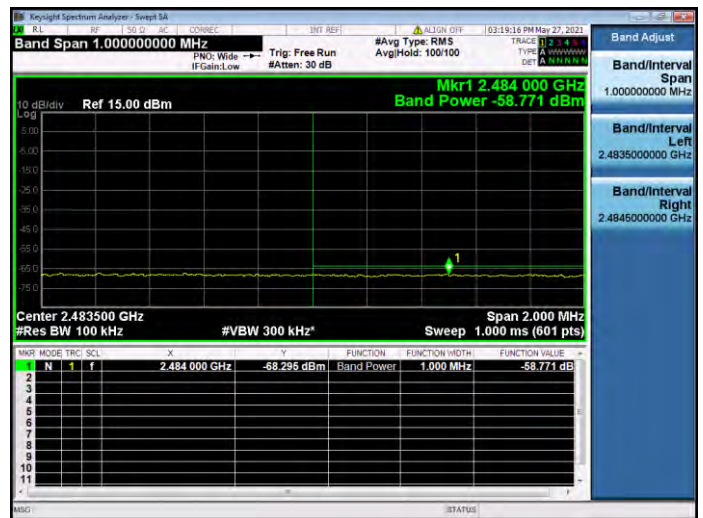

BLE 2Mbps


LOW CHANNEL, Carrier level

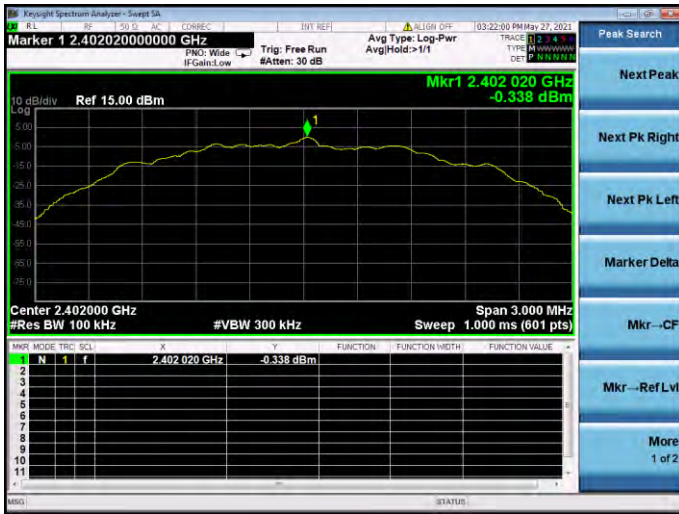


LOW CHANNEL, Band Edge



LOW CHANNEL, Reference dB

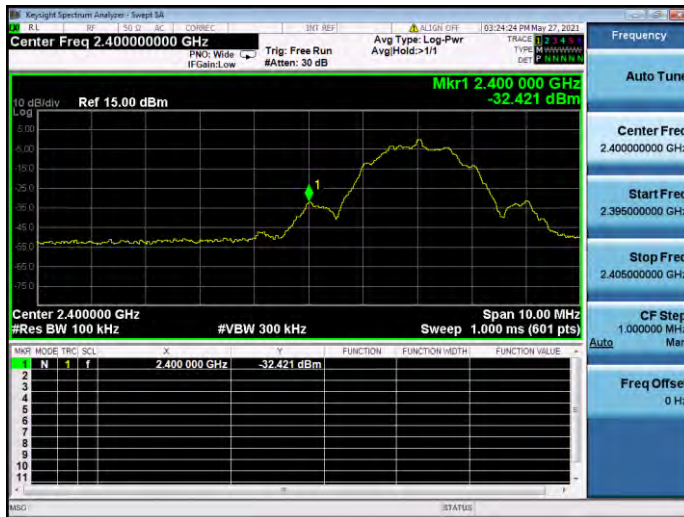


High CHANNEL, Carrier level

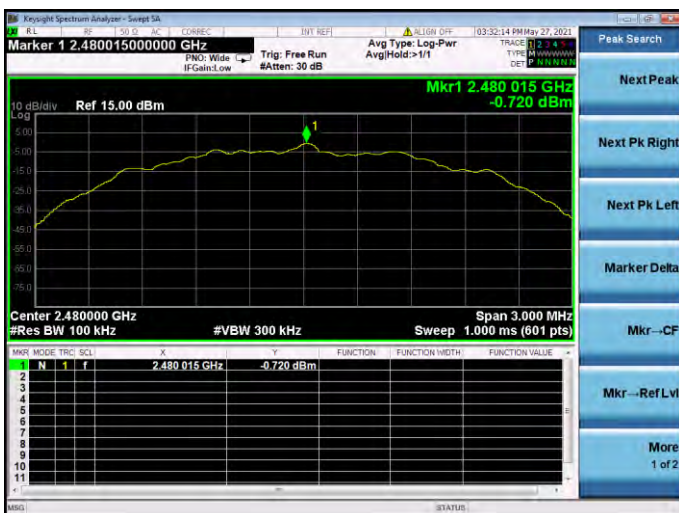

HIGH CHANNEL, Reference level



HIGH CHANNEL, Band Edge

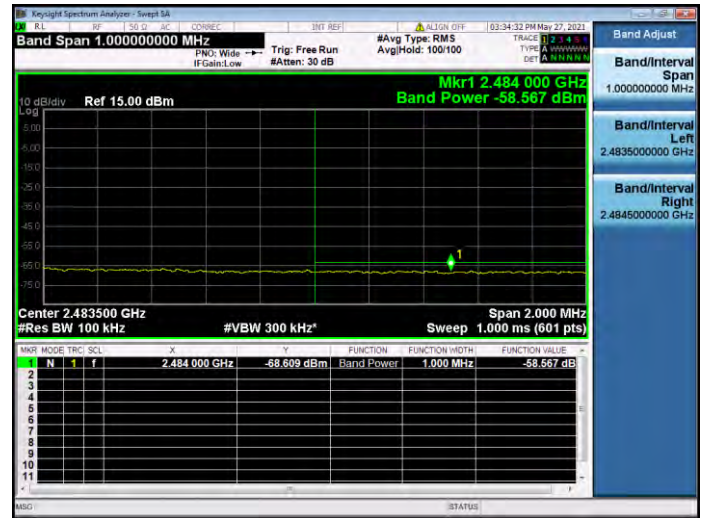

## A.5 Conducted Emissions

Note 1: The EUT is working in the Normal link mode.

Note 2: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz ) shown here.


Note 3: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

### Test Data and Plots

#### MT1160B

##### PHASE L


CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

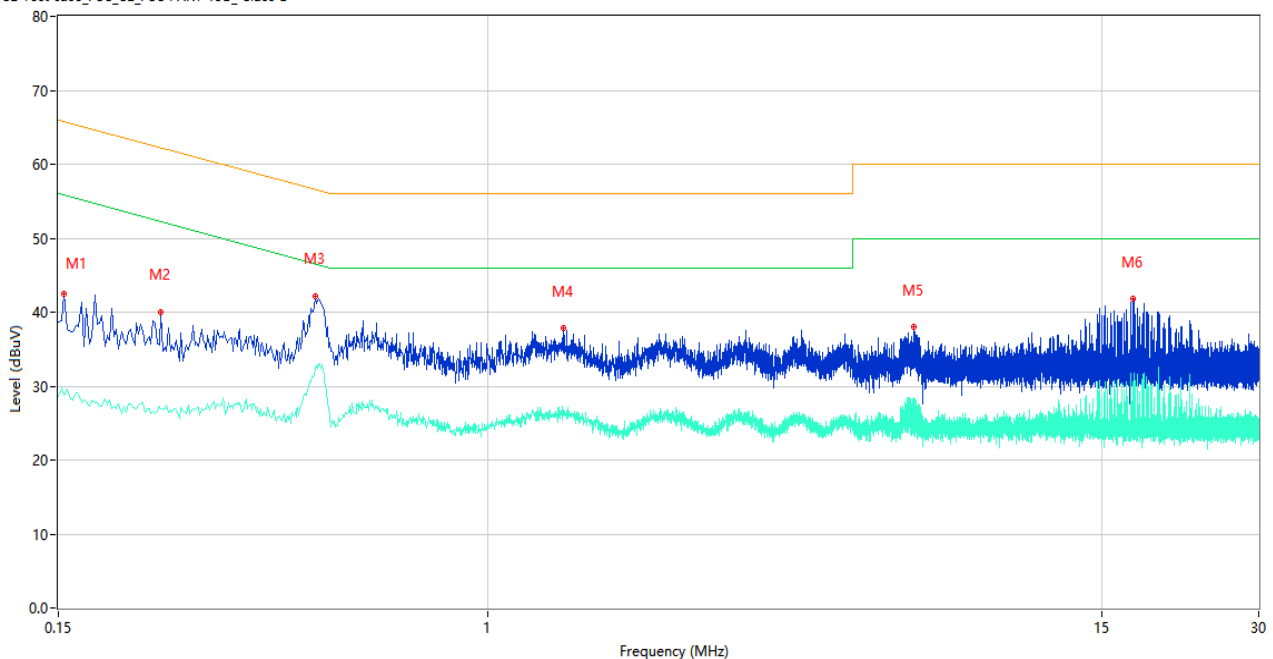

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.154	42.47	10.41	65.78	-23.31	Peak	L	Pass
1**	0.154	28.72	10.41	55.78	-27.06	AV	L	Pass
2	0.236	40.01	10.35	62.24	-22.23	Peak	L	Pass
2**	0.236	26.94	10.35	52.24	-25.30	AV	L	Pass
3	0.466	42.19	10.30	56.58	-14.39	Peak	L	Pass
3**	0.466	32.56	10.30	46.58	-14.02	AV	L	Pass
4	1.394	37.90	10.25	56.00	-18.10	Peak	L	Pass
4**	1.394	26.01	10.25	46.00	-19.99	AV	L	Pass
5	6.562	38.02	10.34	60.00	-21.98	Peak	L	Pass
5**	6.562	26.91	10.34	50.00	-23.09	AV	L	Pass
6	17.240	41.78	10.47	60.00	-18.22	Peak	L	Pass
6**	17.240	30.35	10.47	50.00	-19.65	AV	L	Pass

## PHASE N

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

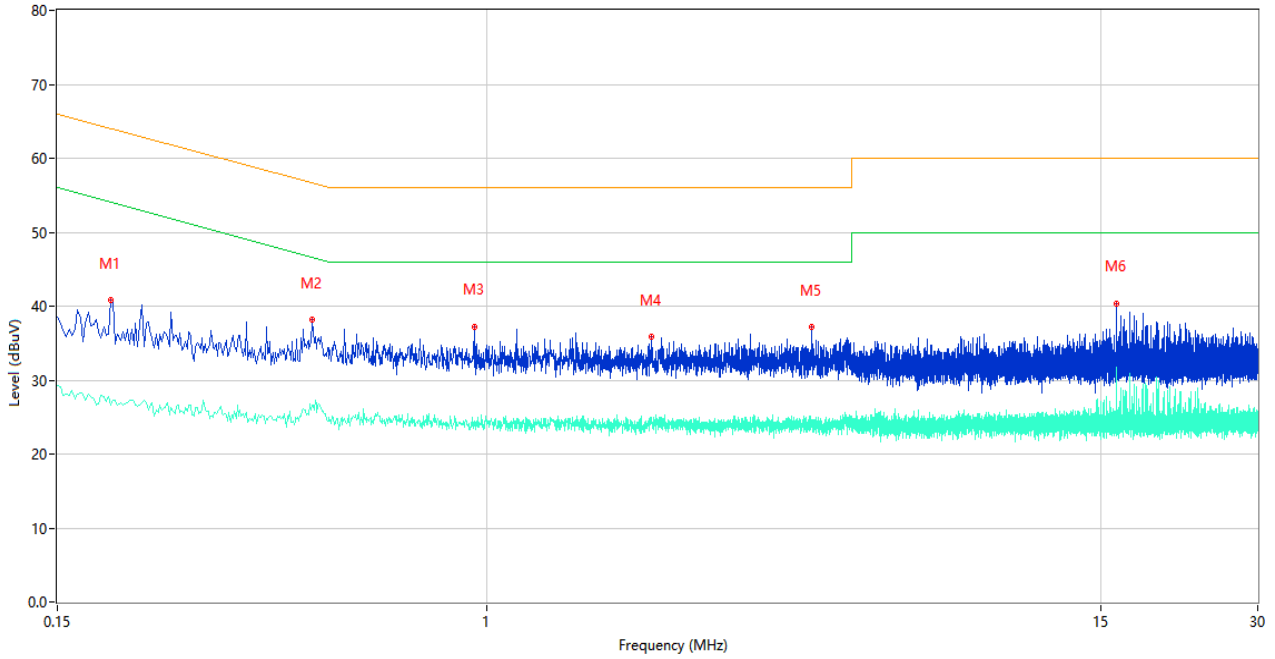


No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.190	40.78	10.38	64.04	-23.26	Peak	N	Pass
1**	0.190	26.66	10.38	54.04	-27.38	AV	N	Pass
2	0.462	38.14	10.30	56.66	-18.52	Peak	N	Pass
2**	0.462	26.56	10.30	46.66	-20.10	AV	N	Pass
3	0.944	37.22	10.24	56.00	-18.78	Peak	N	Pass
3**	0.944	24.45	10.24	46.00	-21.55	AV	N	Pass
4	2.064	35.80	10.26	56.00	-20.20	Peak	N	Pass
4**	2.064	24.94	10.26	46.00	-21.06	AV	N	Pass
5	4.196	37.12	10.31	56.00	-18.88	Peak	N	Pass
5**	4.196	24.35	10.31	46.00	-21.65	AV	N	Pass
6	16.054	40.33	10.43	60.00	-19.67	Peak	N	Pass
6**	16.054	28.37	10.43	50.00	-21.63	AV	N	Pass

## MT0960B

## PHASE L


CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

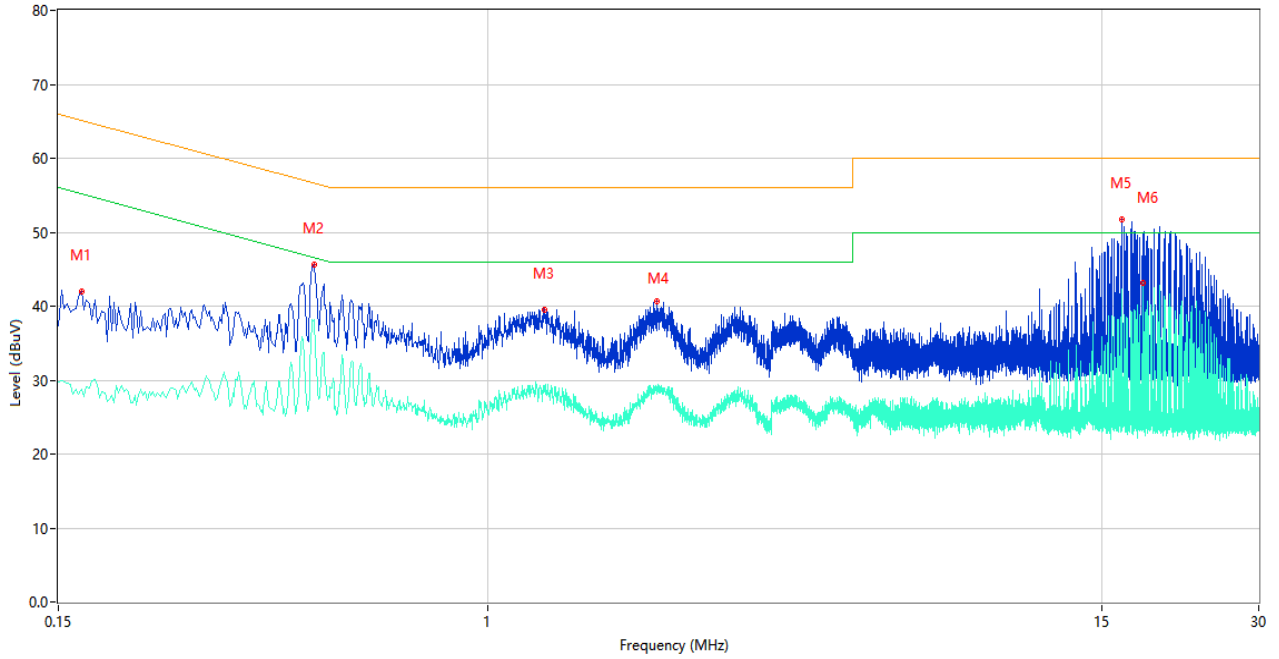

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.166	41.98	10.40	65.16	-23.18	Peak	L	Pass
1**	0.166	28.73	10.40	55.16	-26.43	AV	L	Pass
2	0.464	45.60	10.30	56.62	-11.02	Peak	L	Pass
2**	0.464	38.16	10.30	46.62	-8.46	AV	L	Pass
3	1.284	39.43	10.25	56.00	-16.57	Peak	L	Pass
3**	1.284	28.39	10.25	46.00	-17.61	AV	L	Pass
4	2.102	40.64	10.26	56.00	-15.36	Peak	L	Pass
4**	2.102	28.46	10.26	46.00	-17.54	AV	L	Pass
5	16.386	51.69	10.45	60.00	-8.31	Peak	L	Pass
5**	16.386	24.88	10.45	50.00	-25.12	AV	L	Pass
6	18.002	49.81	10.49	60.00	-10.19	Peak	L	Pass
6**	18.002	43.07	10.49	50.00	-6.93	AV	L	Pass

## PHASE N

CE Test case\_FCC\_CE\_FCC PART 15B\_Class B

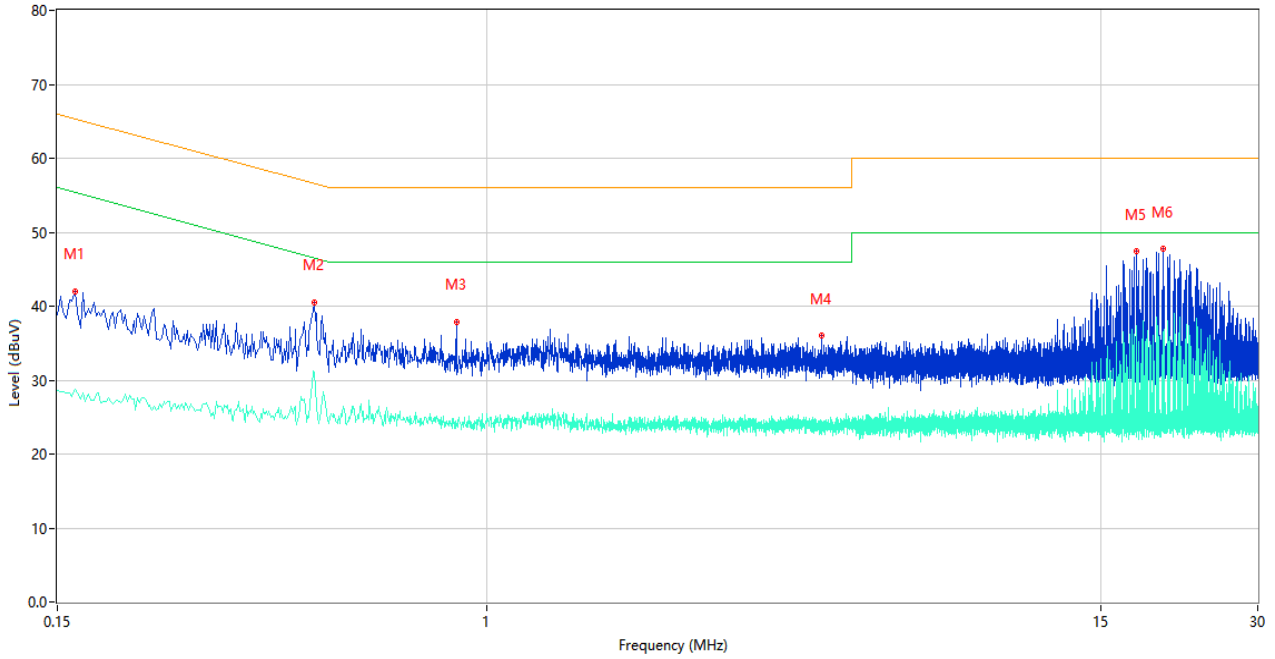

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.162	42.07	10.40	65.36	-23.29	Peak	N	Pass
1**	0.162	28.75	10.40	55.36	-26.61	AV	N	Pass
2	0.466	40.57	10.30	56.58	-16.01	Peak	N	Pass
2**	0.466	31.03	10.30	46.58	-15.55	AV	N	Pass
3	0.874	37.92	10.25	56.00	-18.08	Peak	N	Pass
3**	0.874	24.01	10.25	46.00	-21.99	AV	N	Pass
4	4.376	36.06	10.31	56.00	-19.94	Peak	N	Pass
4**	4.376	24.19	10.31	46.00	-21.81	AV	N	Pass
5	17.598	47.51	10.48	60.00	-12.49	Peak	N	Pass
5**	17.598	32.41	10.48	50.00	-17.59	AV	N	Pass
6	19.736	47.83	10.54	60.00	-12.17	Peak	N	Pass
6**	19.736	34.68	10.54	50.00	-15.32	AV	N	Pass



## A.6 Radiated Spurious Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and BLE 2M-Low channel mode is the worst.

Note 5: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

### Test Data and Plots


#### MT1160B

#### 30 MHz to 1 GHz, ANT H

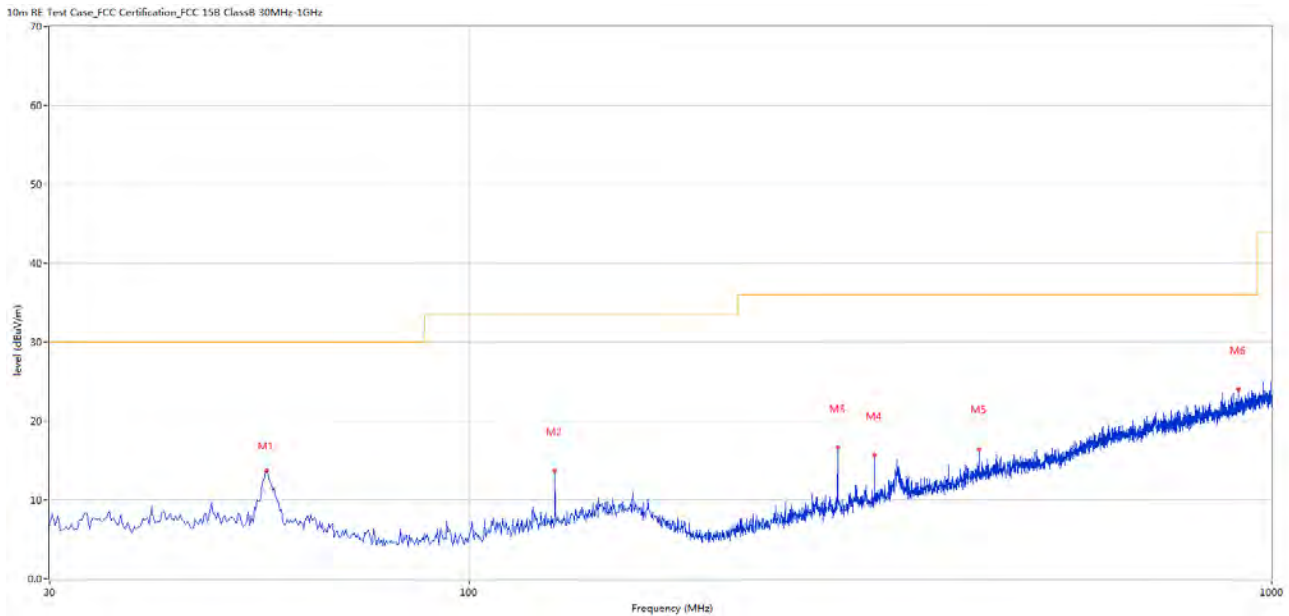

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.941	13.67	-27.51	30.0	-16.33	Peak	95.00	100	Horizontal	Pass
2	127.946	13.69	-27.34	33.5	-19.81	Peak	360.00	200	Horizontal	Pass
3	287.956	16.61	-26.09	36.0	-19.39	Peak	105.00	300	Horizontal	Pass
4	319.958	15.67	-25.31	36.0	-20.33	Peak	360.00	200	Horizontal	Pass
5	431.965	16.40	-21.99	36.0	-19.60	Peak	236.00	300	Horizontal	Pass
6	908.843	23.97	-12.22	36.0	-12.03	Peak	12.00	200	Horizontal	Pass


## 30 MHz to 1 GHz, ANT V

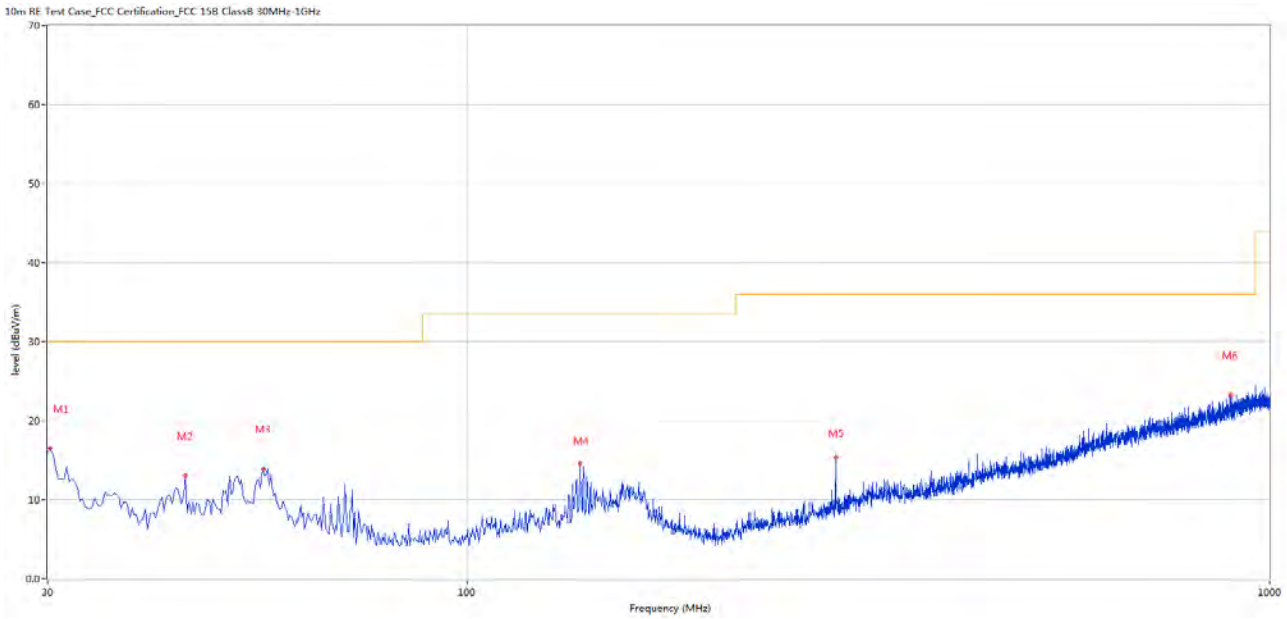

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	15.90	-27.47	30.0	-14.10	Peak	60.00	100	Vertical	Pass
2	44.546	13.03	-27.10	30.0	-16.97	Peak	211.00	100	Vertical	Pass
3	55.699	13.90	-27.47	30.0	-16.10	Peak	110.00	100	Vertical	Pass
4	138.128	14.67	-26.50	33.5	-18.83	Peak	347.00	100	Vertical	Pass
5	287.956	15.40	-26.09	36.0	-20.60	Peak	359.00	100	Vertical	Pass
6	893.327	23.26	-12.60	36.0	-12.74	Peak	360.00	200	Vertical	Pass


MT0960B

30 MHz to 1 GHz, ANT H

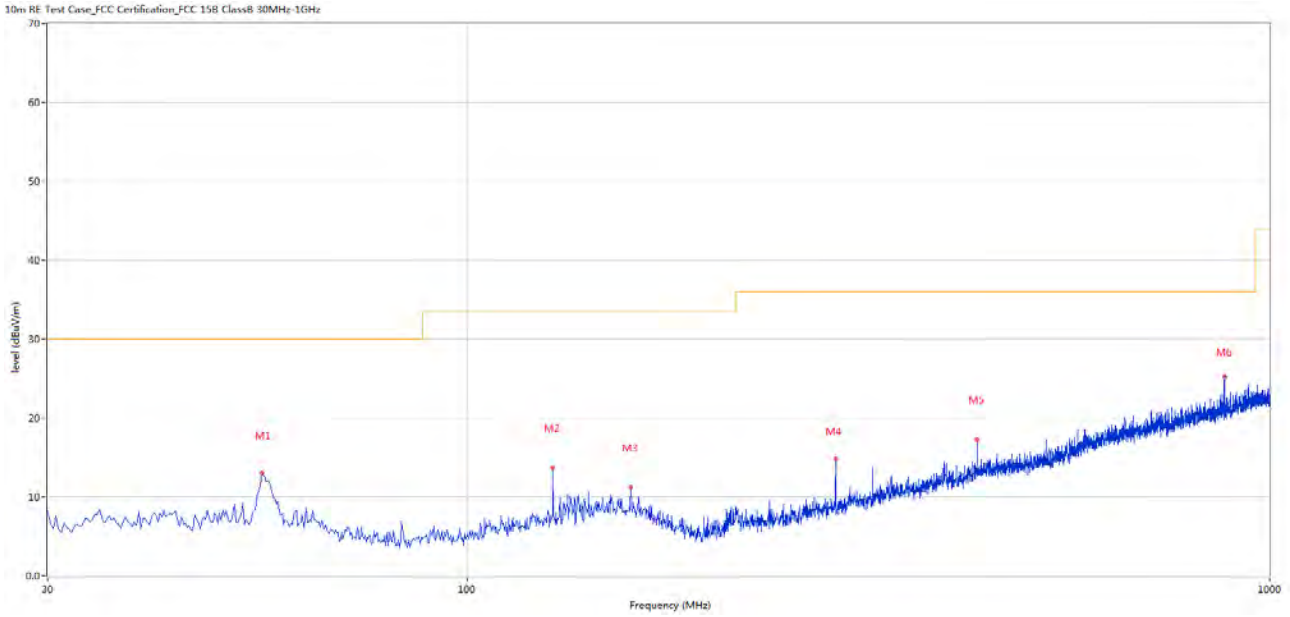

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	55.456	13.08	-27.45	30.0	-16.92	Peak	360.00	200	Horizontal	Pass
2	127.946	13.69	-27.34	33.5	-19.81	Peak	201.00	100	Horizontal	Pass
3	159.948	11.22	-25.82	33.5	-22.28	Peak	360.00	200	Horizontal	Pass
4	287.956	14.81	-26.09	36.0	-21.19	Peak	114.00	200	Horizontal	Pass
5	431.965	17.30	-21.99	36.0	-18.70	Peak	360.00	200	Horizontal	Pass
6	878.780	25.24	-12.90	36.0	-10.76	Peak	0.00	200	Horizontal	Pass

## 30 MHz to 1 GHz, ANT V

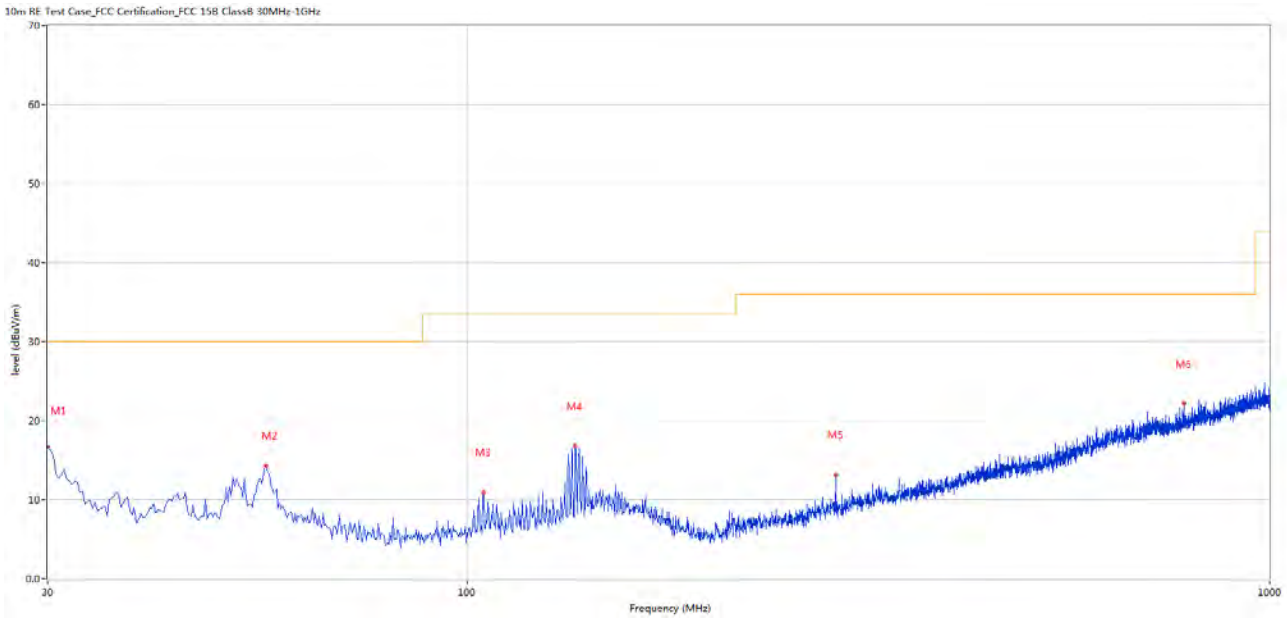

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.000	16.79	-27.47	30.0	-13.21	Peak	100.00	100	Vertical	Pass
2	56.183	14.33	-27.55	30.0	-15.67	Peak	360.00	200	Vertical	Pass
3	104.914	10.99	-29.67	33.5	-22.51	Peak	260.00	200	Vertical	Pass
4	136.431	16.79	-26.93	33.5	-16.71	Peak	251.00	100	Vertical	Pass
5	287.956	13.16	-26.09	36.0	-22.84	Peak	251.00	100	Vertical	Pass
6	782.774	22.21	-14.40	36.0	-13.79	Peak	342.00	100	Vertical	Pass


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

**MT1160B**

**GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H**


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

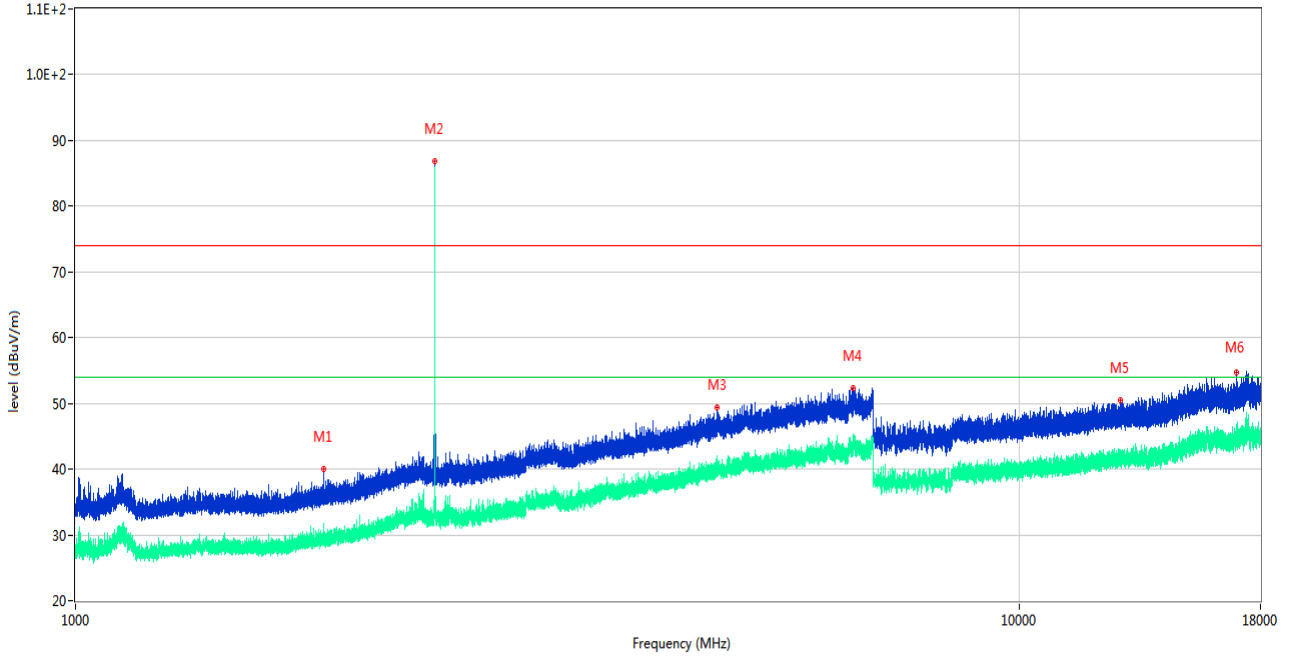

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1832.300	39.96	-16.61	74.0	-34.04	Peak	101.00	150	Horizontal	Pass
1**	1832.300	28.53	-16.61	54.0	-25.47	AV	101.00	150	Horizontal	Pass
2	2401.600	86.84	-12.26	74.0	12.84	Peak	1.00	150	Horizontal	N/A
2**	2401.600	84.07	-12.26	54.0	30.07	AV	1.00	150	Horizontal	N/A
3	4780.600	49.43	-2.88	74.0	-24.57	Peak	236.00	150	Horizontal	Pass
3**	4780.600	39.63	-2.88	54.0	-14.37	AV	236.00	150	Horizontal	Pass
4	6671.200	52.31	-0.76	74.0	-21.69	Peak	16.00	150	Horizontal	Pass
4**	6671.200	45.39	-0.76	54.0	-8.61	AV	16.00	150	Horizontal	Pass
5	12784.912	50.40	1.25	74.0	-23.60	Peak	239.00	150	Horizontal	Pass
5**	12784.912	41.48	1.25	54.0	-12.52	AV	239.00	150	Horizontal	Pass
6	16964.963	54.73	1.96	74.0	-19.27	Peak	264.00	150	Horizontal	Pass
6**	16964.963	44.78	1.96	54.0	-9.22	AV	264.00	150	Horizontal	Pass

## GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

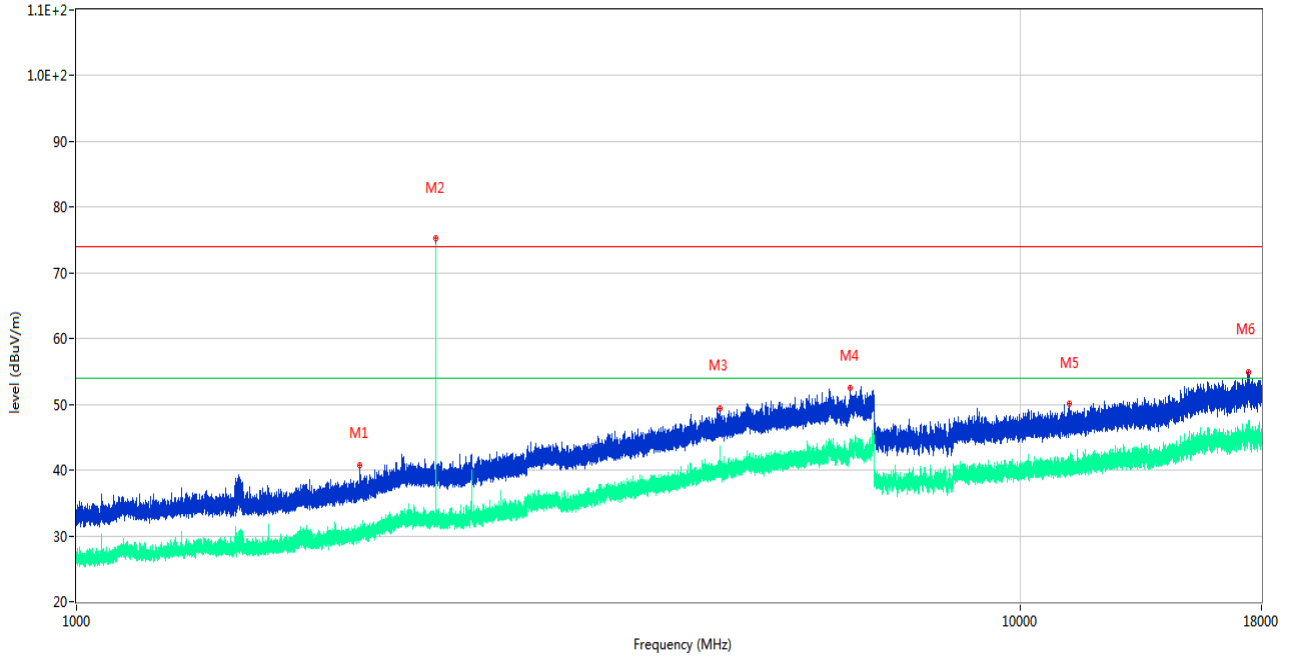

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1994.100	40.69	-15.61	74.0	-33.31	Peak	48.00	150	Vertical	Pass
1**	1994.100	29.70	-15.61	54.0	-24.30	AV	48.00	150	Vertical	Pass
2	2401.500	75.24	-12.26	74.0	1.24	Peak	116.00	150	Vertical	N/A
2**	2401.500	72.59	-12.26	54.0	18.59	AV	116.00	150	Vertical	N/A
3	4804.400	49.42	-2.78	74.0	-24.58	Peak	57.00	150	Vertical	Pass
3**	4804.400	42.28	-2.78	54.0	-11.72	AV	57.00	150	Vertical	Pass
4	6600.600	52.53	-0.39	74.0	-21.47	Peak	231.00	150	Vertical	Pass
4**	6600.600	42.84	-0.39	54.0	-11.16	AV	231.00	150	Vertical	Pass
5	11263.912	50.04	-0.39	74.0	-23.96	Peak	77.00	150	Vertical	Pass
5**	11263.912	39.89	-0.39	54.0	-14.11	AV	77.00	150	Vertical	Pass
6	17421.449	54.95	3.72	74.0	-19.05	Peak	282.00	150	Vertical	Pass
6**	17421.449	45.93	3.72	54.0	-8.07	AV	282.00	150	Vertical	Pass

## GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

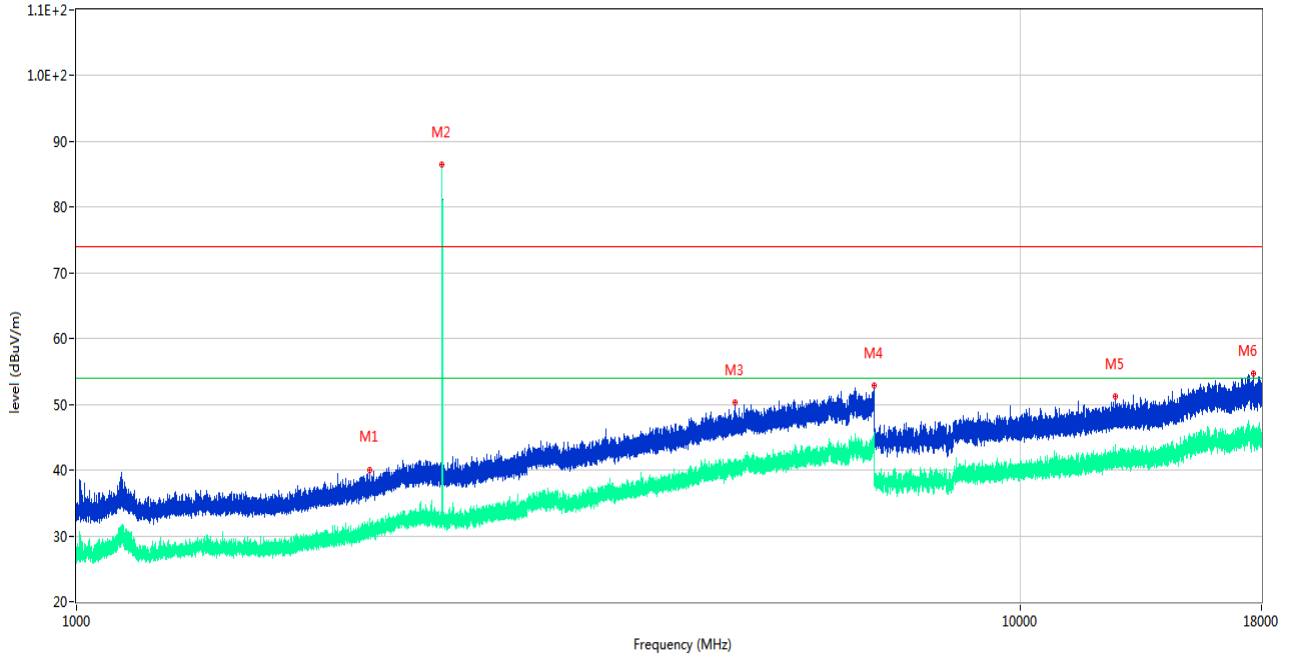

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2042.600	40.10	-15.13	74.0	-33.90	Peak	245.00	150	Horizontal	Pass
1**	2042.600	30.62	-15.13	54.0	-23.38	AV	245.00	150	Horizontal	Pass
2	2439.700	86.43	-12.64	74.0	12.43	Peak	121.00	150	Horizontal	N/A
2**	2439.700	85.24	-12.64	54.0	31.24	AV	121.00	150	Horizontal	N/A
3	4984.200	50.28	-2.90	74.0	-23.72	Peak	25.00	150	Horizontal	Pass
3**	4984.200	39.98	-2.90	54.0	-14.02	AV	25.00	150	Horizontal	Pass
4	6999.600	52.83	0.25	74.0	-21.17	Peak	195.00	150	Horizontal	Pass
4**	6999.600	44.28	0.25	54.0	-9.72	AV	195.00	150	Horizontal	Pass
5	12604.812	51.16	1.92	74.0	-22.84	Peak	360.00	150	Horizontal	Pass
5**	12604.812	42.79	1.92	54.0	-11.21	AV	360.00	150	Horizontal	Pass
6	17649.562	54.63	2.00	74.0	-19.37	Peak	360.00	150	Horizontal	Pass
6**	17649.562	44.19	2.00	54.0	-9.81	AV	360.00	150	Horizontal	Pass

## GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

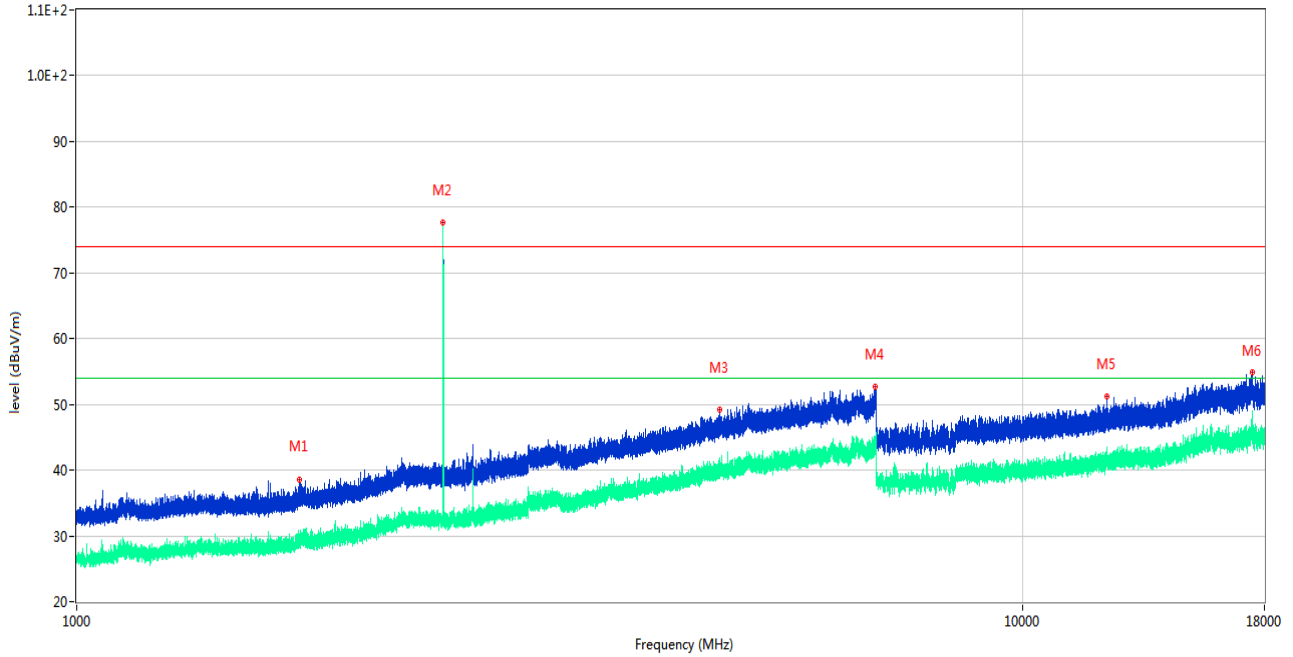


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1719.300	38.61	-17.22	74.0	-35.39	Peak	64.00	150	Vertical	Pass
1**	1719.300	29.69	-17.22	54.0	-24.31	AV	64.00	150	Vertical	Pass
2	2439.600	77.65	-12.64	74.0	3.65	Peak	158.00	150	Vertical	N/A
2**	2439.600	75.98	-12.64	54.0	21.98	AV	158.00	150	Vertical	N/A
3	4785.200	49.29	-2.78	74.0	-24.71	Peak	251.00	150	Vertical	Pass
3**	4785.200	39.56	-2.78	54.0	-14.44	AV	251.00	150	Vertical	Pass
4	6987.600	52.62	0.39	74.0	-21.38	Peak	359.00	150	Vertical	Pass
4**	6987.600	43.02	0.39	54.0	-10.98	AV	359.00	150	Vertical	Pass
5	12269.300	51.28	1.43	74.0	-22.72	Peak	267.00	150	Vertical	Pass
5**	12269.300	41.73	1.43	54.0	-12.27	AV	267.00	150	Vertical	Pass
6	17468.699	54.83	2.90	74.0	-19.17	Peak	100.00	150	Vertical	Pass
6**	17468.699	46.43	2.90	54.0	-7.57	AV	100.00	150	Vertical	Pass



## GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

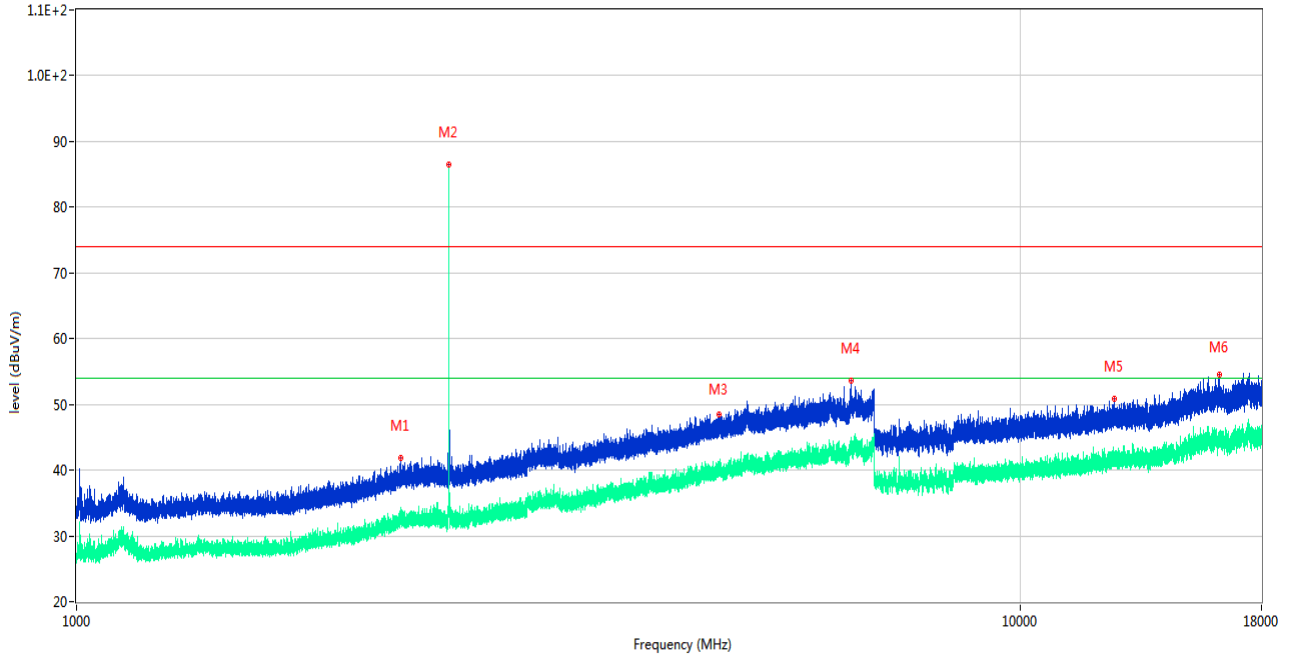

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2203.900	41.80	-13.11	74.0	-32.20	Peak	325.00	150	Horizontal	Pass
1**	2203.900	34.36	-13.11	54.0	-19.64	AV	325.00	150	Horizontal	Pass
2	2479.600	86.46	-12.44	74.0	12.46	Peak	117.00	150	Horizontal	N/A
2**	2479.600	84.42	-12.44	54.0	30.42	AV	117.00	150	Horizontal	N/A
3	4798.000	48.46	-2.57	74.0	-25.54	Peak	87.00	150	Horizontal	Pass
3**	4798.000	40.78	-2.57	54.0	-13.22	AV	87.00	150	Horizontal	Pass
4	6623.000	53.61	-0.30	74.0	-20.39	Peak	302.00	150	Horizontal	Pass
4**	6623.000	43.16	-0.30	54.0	-10.84	AV	302.00	150	Horizontal	Pass
5	12580.662	50.81	1.64	74.0	-23.19	Peak	152.00	150	Horizontal	Pass
5**	12580.662	40.93	1.64	54.0	-13.07	AV	152.00	150	Horizontal	Pass
6	16233.638	54.44	1.33	74.0	-19.56	Peak	165.00	150	Horizontal	Pass
6**	16233.638	45.39	1.33	54.0	-8.61	AV	165.00	150	Horizontal	Pass

## GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

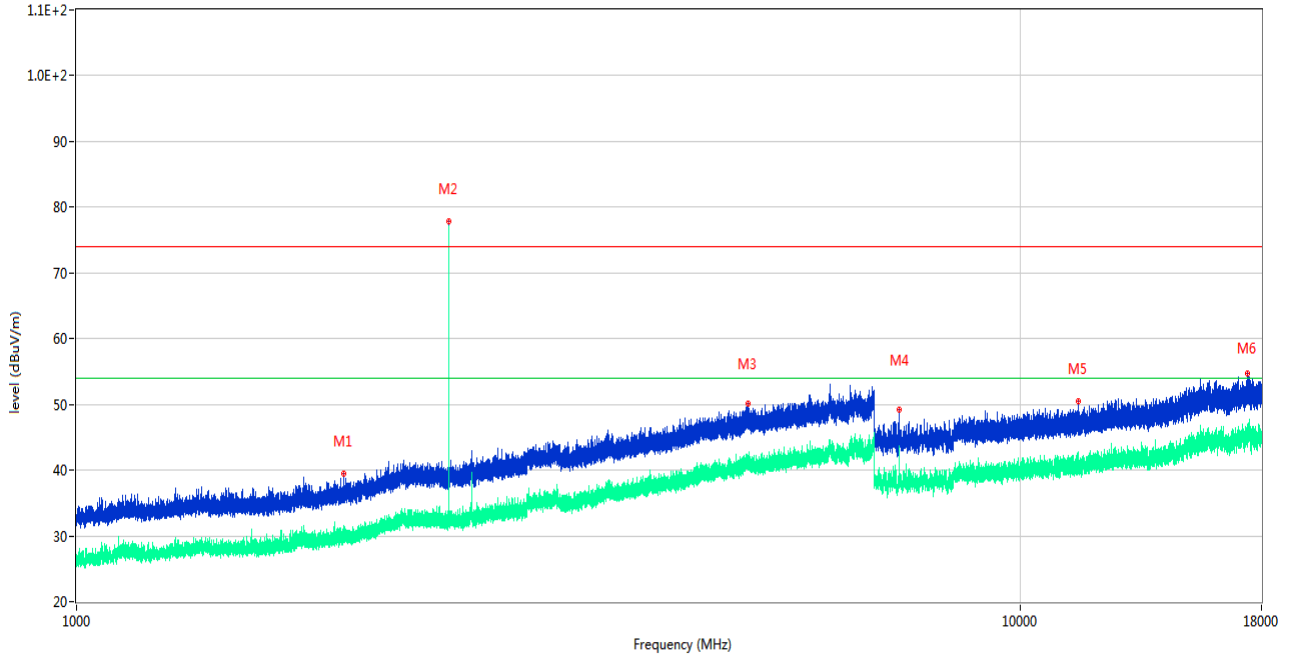

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1920.800	39.39	-15.92	74.0	-34.61	Peak	66.00	150	Vertical	Pass
1**	1920.800	28.95	-15.92	54.0	-25.05	AV	66.00	150	Vertical	Pass
2	2479.700	77.84	-12.43	74.0	3.84	Peak	66.00	150	Vertical	N/A
2**	2479.700	75.06	-12.43	54.0	21.06	AV	66.00	150	Vertical	N/A
3	5140.000	50.16	-2.42	74.0	-23.84	Peak	55.00	150	Vertical	Pass
3**	5140.000	41.55	-2.42	54.0	-12.45	AV	55.00	150	Vertical	Pass
4	7440.450	49.14	-4.34	74.0	-24.86	Peak	23.00	150	Vertical	Pass
4**	7440.450	42.24	-4.34	54.0	-11.76	AV	23.00	150	Vertical	Pass
5	11507.713	50.44	-0.16	74.0	-23.56	Peak	215.00	150	Vertical	Pass
5**	11507.713	40.94	-0.16	54.0	-13.06	AV	215.00	150	Vertical	Pass
6	17415.938	54.66	3.66	74.0	-19.34	Peak	215.00	150	Vertical	Pass
6**	17415.938	47.00	3.66	54.0	-7.00	AV	215.00	150	Vertical	Pass

## GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

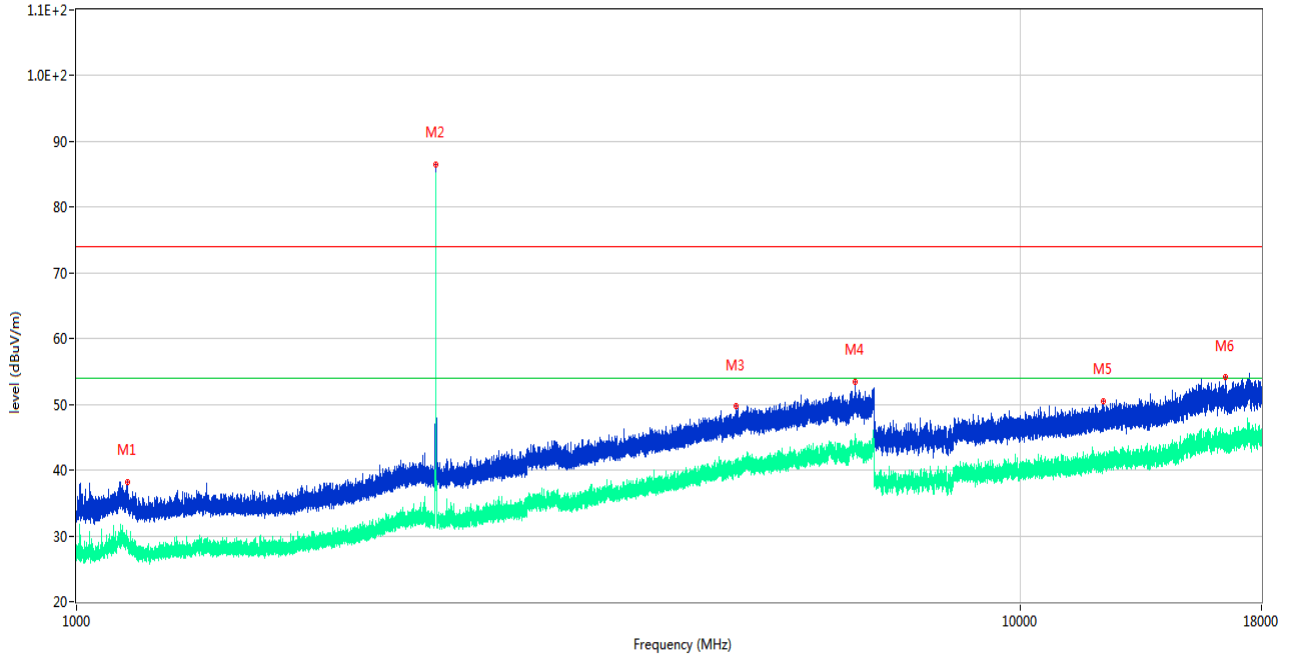

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1132.600	38.10	-18.36	74.0	-35.90	Peak	133.00	150	Horizontal	Pass
1**	1132.600	29.10	-18.36	54.0	-24.90	AV	133.00	150	Horizontal	Pass
2	2402.400	86.55	-12.27	74.0	12.55	Peak	2.00	150	Horizontal	N/A
2**	2402.400	83.22	-12.27	54.0	29.22	AV	2.00	150	Horizontal	N/A
3	4999.400	49.72	-2.94	74.0	-24.28	Peak	0.00	150	Horizontal	Pass
3**	4999.400	40.18	-2.94	54.0	-13.82	AV	0.00	150	Horizontal	Pass
4	6686.800	53.41	-0.22	74.0	-20.59	Peak	292.00	150	Horizontal	Pass
4**	6686.800	44.77	-0.22	54.0	-9.23	AV	292.00	150	Horizontal	Pass
5	12233.938	50.46	1.19	74.0	-23.54	Peak	0.00	150	Horizontal	Pass
5**	12233.938	40.74	1.19	54.0	-13.26	AV	0.00	150	Horizontal	Pass
6	16478.551	54.09	1.04	74.0	-19.91	Peak	293.00	150	Horizontal	Pass
6**	16478.551	44.59	1.04	54.0	-9.41	AV	293.00	150	Horizontal	Pass

## GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

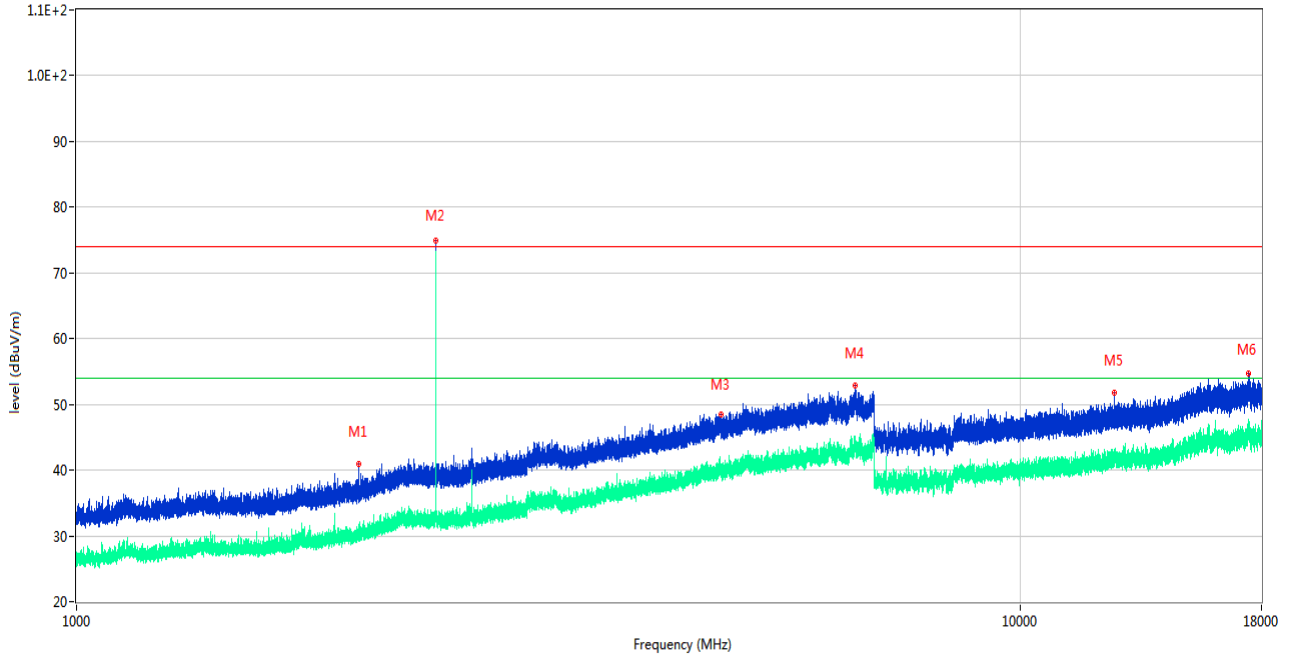

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1992.100	40.92	-15.55	74.0	-33.08	Peak	48.00	150	Vertical	Pass
1**	1992.100	29.81	-15.55	54.0	-24.19	AV	48.00	150	Vertical	Pass
2	2402.500	74.90	-12.27	74.0	0.90	Peak	122.00	150	Vertical	N/A
2**	2402.500	70.34	-12.27	54.0	16.34	AV	122.00	150	Vertical	N/A
3	4821.600	48.54	-3.44	74.0	-25.46	Peak	25.00	150	Vertical	Pass
3**	4821.600	39.80	-3.44	54.0	-14.20	AV	25.00	150	Vertical	Pass
4	6688.000	52.81	-0.24	74.0	-21.19	Peak	299.00	150	Vertical	Pass
4**	6688.000	43.29	-0.24	54.0	-10.71	AV	299.00	150	Vertical	Pass
5	12558.525	51.75	1.66	74.0	-22.25	Peak	320.00	150	Vertical	Pass
5**	12558.525	42.31	1.66	54.0	-11.69	AV	320.00	150	Vertical	Pass
6	17421.449	54.63	3.72	74.0	-19.37	Peak	69.00	150	Vertical	Pass
6**	17421.449	46.26	3.72	54.0	-7.74	AV	69.00	150	Vertical	Pass

## GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

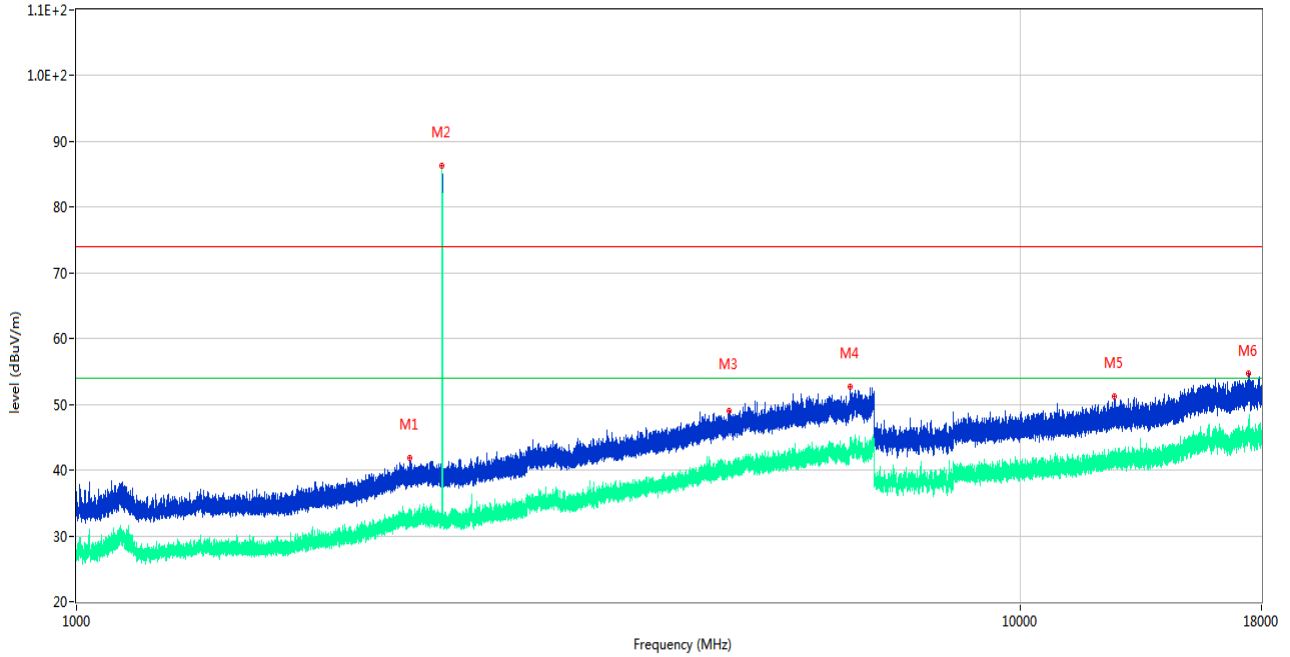

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2256.800	41.83	-12.62	74.0	-32.17	Peak	211.00	150	Horizontal	Pass
1**	2256.800	32.57	-12.62	54.0	-21.43	AV	211.00	150	Horizontal	Pass
2	2439.900	86.33	-12.67	74.0	12.33	Peak	6.00	150	Horizontal	N/A
2**	2439.900	84.28	-12.67	54.0	30.28	AV	6.00	150	Horizontal	N/A
3	4911.600	49.05	-2.39	74.0	-24.95	Peak	0.00	150	Horizontal	Pass
3**	4911.600	40.29	-2.39	54.0	-13.71	AV	0.00	150	Horizontal	Pass
4	6605.200	52.66	0.06	74.0	-21.34	Peak	94.00	150	Horizontal	Pass
4**	6605.200	43.54	0.06	54.0	-10.46	AV	94.00	150	Horizontal	Pass
5	12563.987	51.16	1.70	74.0	-22.84	Peak	231.00	150	Horizontal	Pass
5**	12563.987	41.18	1.70	54.0	-12.82	AV	231.00	150	Horizontal	Pass
6	17423.813	54.66	3.65	74.0	-19.34	Peak	30.00	150	Horizontal	Pass
6**	17423.813	46.11	3.65	54.0	-7.89	AV	30.00	150	Horizontal	Pass

## GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

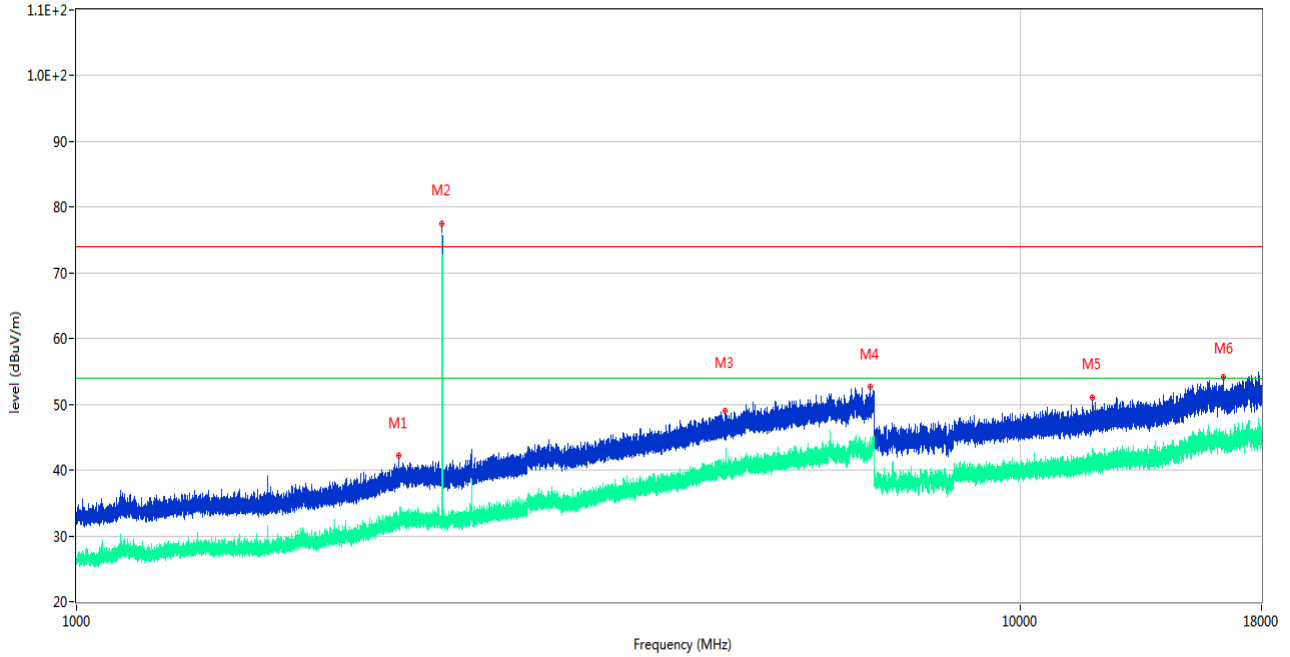

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2194.300	42.28	-13.26	74.0	-31.72	Peak	246.00	150	Vertical	Pass
1**	2194.300	32.82	-13.26	54.0	-21.18	AV	246.00	150	Vertical	Pass
2	2439.400	77.54	-12.64	74.0	3.54	Peak	154.00	150	Vertical	N/A
2**	2439.400	72.56	-12.64	54.0	18.56	AV	154.00	150	Vertical	N/A
3	4859.200	48.93	-3.29	74.0	-25.07	Peak	224.00	150	Vertical	Pass
3**	4859.200	39.13	-3.29	54.0	-14.87	AV	224.00	150	Vertical	Pass
4	6927.400	52.69	-0.36	74.0	-21.31	Peak	70.00	150	Vertical	Pass
4**	6927.400	45.06	-0.36	54.0	-8.94	AV	70.00	150	Vertical	Pass
5	11922.862	51.04	1.51	74.0	-22.96	Peak	60.00	150	Vertical	Pass
5**	11922.862	40.79	1.51	54.0	-13.21	AV	60.00	150	Vertical	Pass
6	16394.812	54.11	1.49	74.0	-19.89	Peak	205.00	150	Vertical	Pass
6**	16394.812	44.77	1.49	54.0	-9.23	AV	205.00	150	Vertical	Pass

## GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

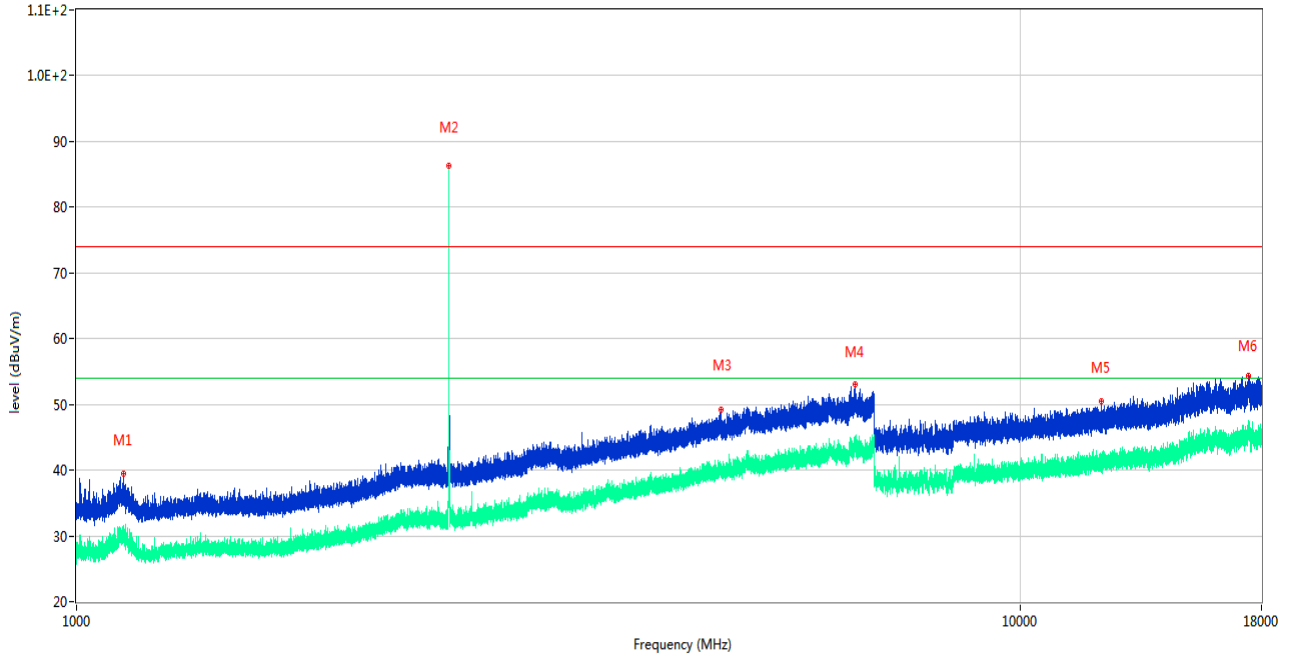

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1120.800	39.50	-18.50	74.0	-34.50	Peak	174.00	150	Horizontal	Pass
1**	1120.800	31.65	-18.50	54.0	-22.35	AV	174.00	150	Horizontal	Pass
2	2479.900	86.23	-12.43	74.0	12.23	Peak	118.00	150	Horizontal	N/A
2**	2479.900	85.51	-12.43	54.0	31.51	AV	118.00	150	Horizontal	N/A
3	4821.200	49.28	-3.42	74.0	-24.72	Peak	208.00	150	Horizontal	Pass
3**	4821.200	40.64	-3.42	54.0	-13.36	AV	208.00	150	Horizontal	Pass
4	6687.800	53.00	-0.24	74.0	-21.00	Peak	360.00	150	Horizontal	Pass
4**	6687.800	44.06	-0.24	54.0	-9.94	AV	360.00	150	Horizontal	Pass
5	12169.538	50.51	0.64	74.0	-23.49	Peak	174.00	150	Horizontal	Pass
5**	12169.538	40.63	0.64	54.0	-13.37	AV	174.00	150	Horizontal	Pass
6	17419.088	54.38	3.74	74.0	-19.62	Peak	154.00	150	Horizontal	Pass
6**	17419.088	45.95	3.74	54.0	-8.05	AV	154.00	150	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

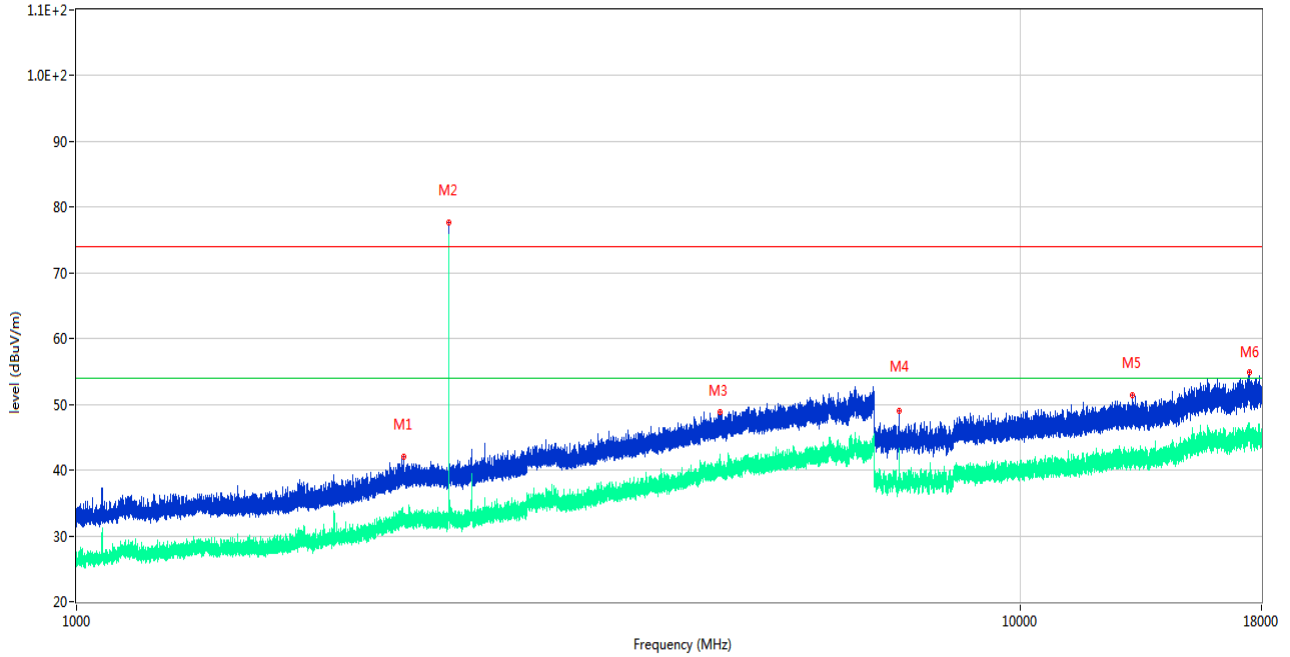


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2219.700	41.98	-12.83	74.0	-32.02	Peak	210.00	150	Vertical	Pass
1**	2219.700	33.12	-12.83	54.0	-20.88	AV	210.00	150	Vertical	Pass
2	2479.300	77.61	-12.44	74.0	3.61	Peak	72.00	150	Vertical	N/A
2**	2479.300	71.40	-12.44	54.0	17.40	AV	72.00	150	Vertical	N/A
3	4805.000	48.85	-2.84	74.0	-25.15	Peak	340.00	150	Vertical	Pass
3**	4805.000	41.34	-2.84	54.0	-12.66	AV	340.00	150	Vertical	Pass
4	7438.150	48.95	-4.33	74.0	-25.05	Peak	318.00	150	Vertical	Pass
4**	7438.150	41.87	-4.33	54.0	-12.13	AV	318.00	150	Vertical	Pass
5	13137.450	51.40	1.05	74.0	-22.60	Peak	174.00	150	Vertical	Pass
5**	13137.450	41.50	1.05	54.0	-12.50	AV	174.00	150	Vertical	Pass
6	17494.688	54.97	2.03	74.0	-19.03	Peak	345.00	150	Vertical	Pass
6**	17494.688	46.14	2.03	54.0	-7.86	AV	345.00	150	Vertical	Pass



MT0960B

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

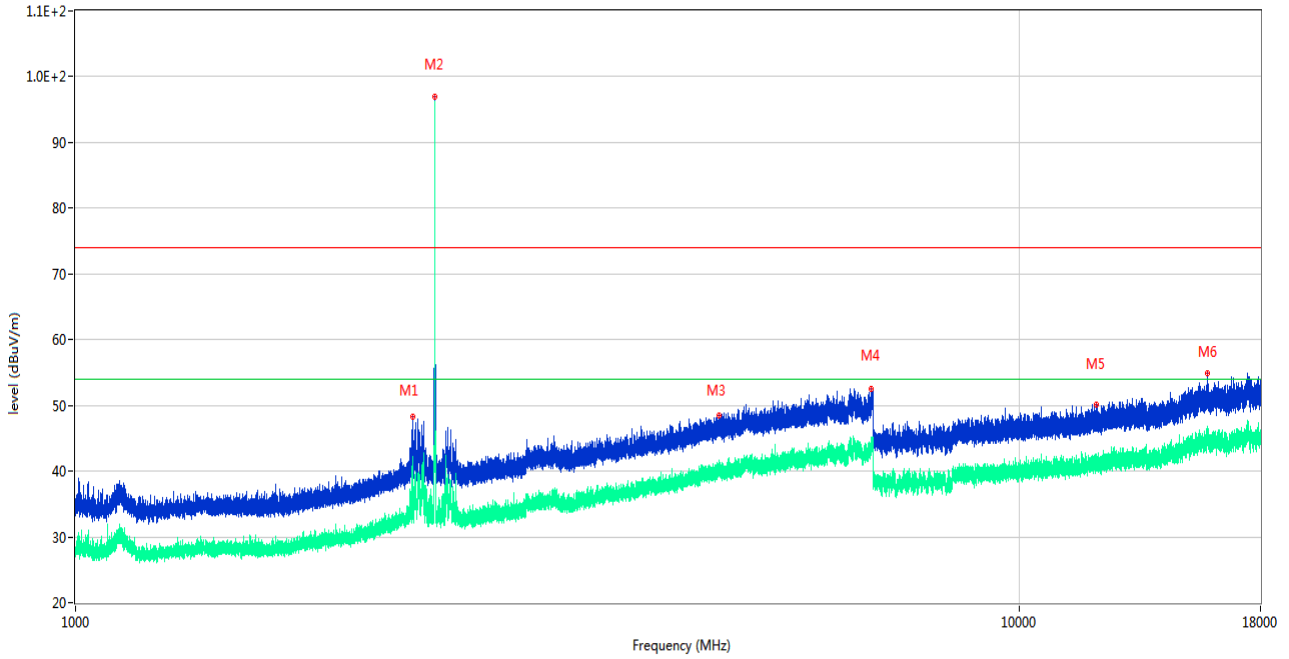

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2274.000	48.21	-13.01	74.0	-25.79	Peak	121.00	150	Horizontal	Pass
1**	2274.000	41.28	-13.01	54.0	-12.72	AV	121.00	150	Horizontal	Pass
2	2402.200	96.87	-12.26	74.0	22.87	Peak	112.00	150	Horizontal	N/A
2**	2402.200	95.62	-12.26	54.0	41.62	AV	112.00	150	Horizontal	N/A
3	4804.800	48.40	-2.82	74.0	-25.60	Peak	52.00	150	Horizontal	Pass
3**	4804.800	41.59	-2.82	54.0	-12.41	AV	52.00	150	Horizontal	Pass
4	6969.200	52.48	0.58	74.0	-21.52	Peak	305.00	150	Horizontal	Pass
4**	6969.200	43.04	0.58	54.0	-10.96	AV	305.00	150	Horizontal	Pass
5	12062.875	50.09	0.90	74.0	-23.91	Peak	82.00	150	Horizontal	Pass
5**	12062.875	41.38	0.90	54.0	-12.62	AV	82.00	150	Horizontal	Pass
6	15801.825	54.91	2.31	74.0	-19.09	Peak	273.00	150	Horizontal	Pass
6**	15801.825	45.13	2.31	54.0	-8.87	AV	273.00	150	Horizontal	Pass

## GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

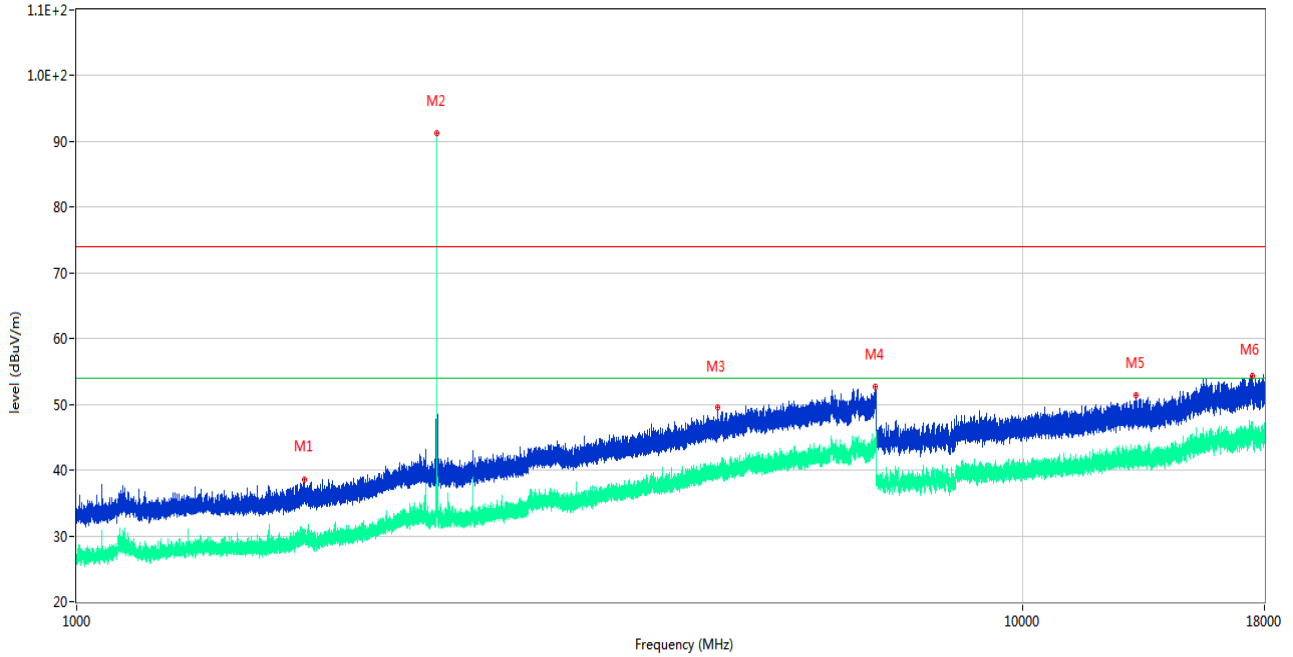

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1738.400	38.56	-17.00	74.0	-35.44	Peak	52.00	150	Vertical	Pass
1**	1738.400	29.59	-17.00	54.0	-24.41	AV	52.00	150	Vertical	Pass
2	2401.700	91.28	-12.26	74.0	17.28	Peak	43.00	150	Vertical	N/A
2**	2401.700	89.69	-12.26	54.0	35.69	AV	43.00	150	Vertical	N/A
3	4758.400	49.58	-3.46	74.0	-24.42	Peak	42.00	150	Vertical	Pass
3**	4758.400	38.83	-3.46	54.0	-15.17	AV	42.00	150	Vertical	Pass
4	6972.800	52.71	0.78	74.0	-21.29	Peak	360.00	150	Vertical	Pass
4**	6972.800	43.65	0.78	54.0	-10.35	AV	360.00	150	Vertical	Pass
5	13185.225	51.35	1.88	74.0	-22.65	Peak	272.00	150	Vertical	Pass
5**	13185.225	41.34	1.88	54.0	-12.66	AV	272.00	150	Vertical	Pass
6	17478.937	54.28	2.76	74.0	-19.72	Peak	342.00	150	Vertical	Pass
6**	17478.937	45.18	2.76	54.0	-8.82	AV	342.00	150	Vertical	Pass

## GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

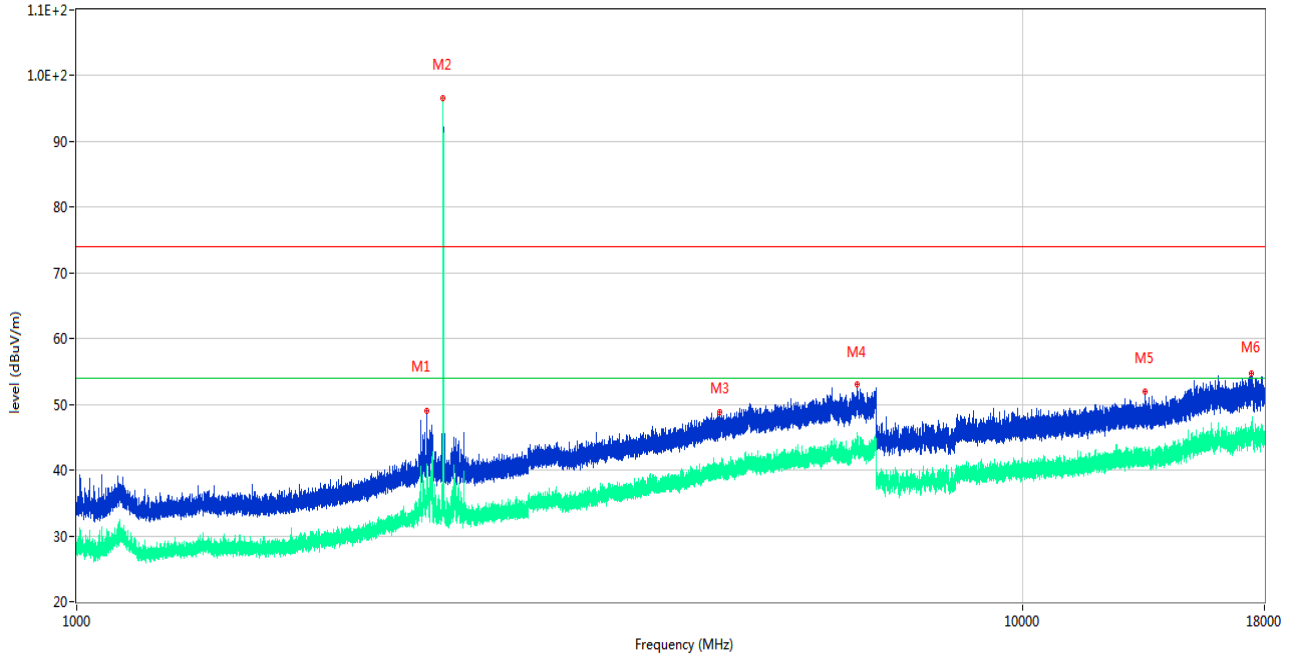

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2343.500	49.05	-12.74	74.0	-24.95	Peak	103.00	150	Horizontal	Pass
1**	2343.500	38.13	-12.74	54.0	-15.87	AV	103.00	150	Horizontal	Pass
2	2439.600	96.73	-12.64	74.0	22.73	Peak	141.00	150	Horizontal	N/A
2**	2439.600	95.01	-12.64	54.0	41.01	AV	141.00	150	Horizontal	N/A
3	4778.600	48.84	-2.94	74.0	-25.16	Peak	0.00	150	Horizontal	Pass
3**	4778.600	39.29	-2.94	54.0	-14.71	AV	0.00	150	Horizontal	Pass
4	6684.800	53.11	-0.23	74.0	-20.89	Peak	39.00	150	Horizontal	Pass
4**	6684.800	43.45	-0.23	54.0	-10.55	AV	39.00	150	Horizontal	Pass
5	13475.550	51.92	0.58	74.0	-22.08	Peak	144.00	150	Horizontal	Pass
5**	13475.550	40.84	0.58	54.0	-13.16	AV	144.00	150	Horizontal	Pass
6	17457.150	54.65	2.84	74.0	-19.35	Peak	285.00	150	Horizontal	Pass
6**	17457.150	46.37	2.84	54.0	-7.63	AV	285.00	150	Horizontal	Pass

## GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

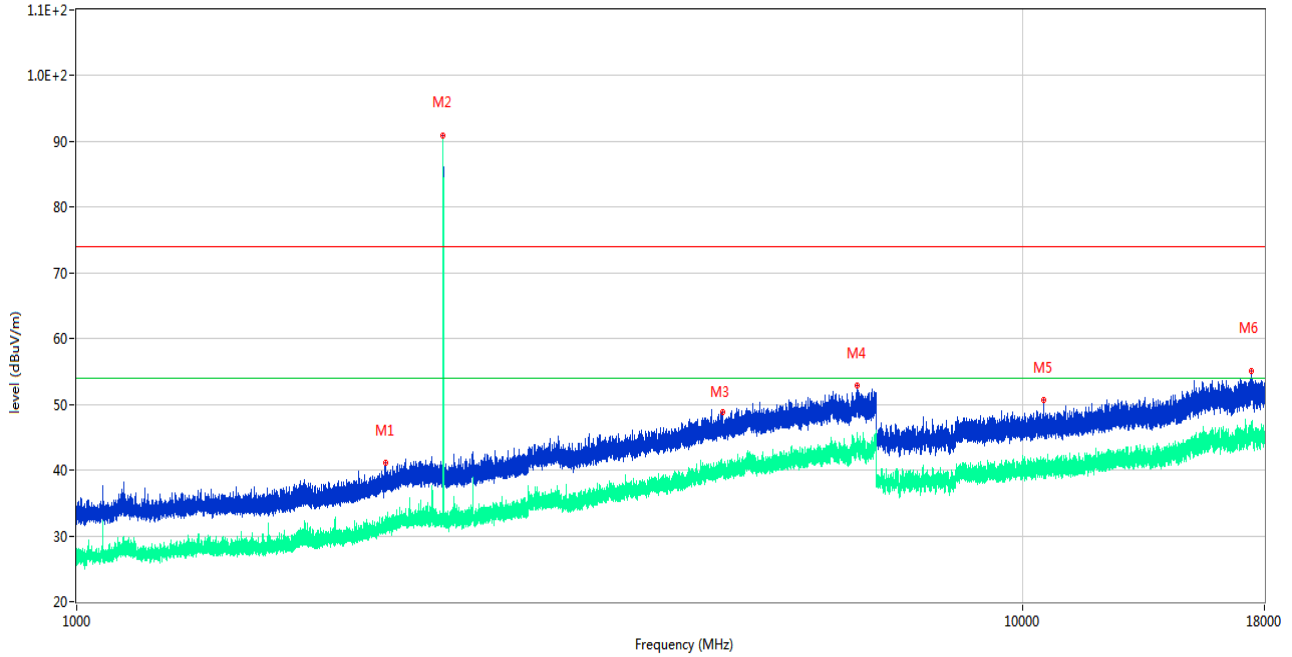

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2123.400	41.20	-14.26	74.0	-32.80	Peak	286.00	150	Vertical	Pass
1**	2123.400	31.30	-14.26	54.0	-22.70	AV	286.00	150	Vertical	Pass
2	2439.700	90.98	-12.64	74.0	16.98	Peak	43.00	150	Vertical	N/A
2**	2439.700	88.44	-12.64	54.0	34.44	AV	43.00	150	Vertical	N/A
3	4812.600	48.77	-3.05	74.0	-25.23	Peak	256.00	150	Vertical	Pass
3**	4812.600	39.75	-3.05	54.0	-14.25	AV	256.00	150	Vertical	Pass
4	6679.000	52.89	-0.54	74.0	-21.11	Peak	322.00	150	Vertical	Pass
4**	6679.000	45.16	-0.54	54.0	-8.84	AV	322.00	150	Vertical	Pass
5	10530.213	50.60	-0.70	74.0	-23.40	Peak	233.00	150	Vertical	Pass
5**	10530.213	41.14	-0.70	54.0	-12.86	AV	233.00	150	Vertical	Pass
6	17421.713	55.02	3.71	74.0	-18.98	Peak	305.00	150	Vertical	Pass
6**	17421.713	47.32	3.71	54.0	-6.68	AV	305.00	150	Vertical	Pass

## GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

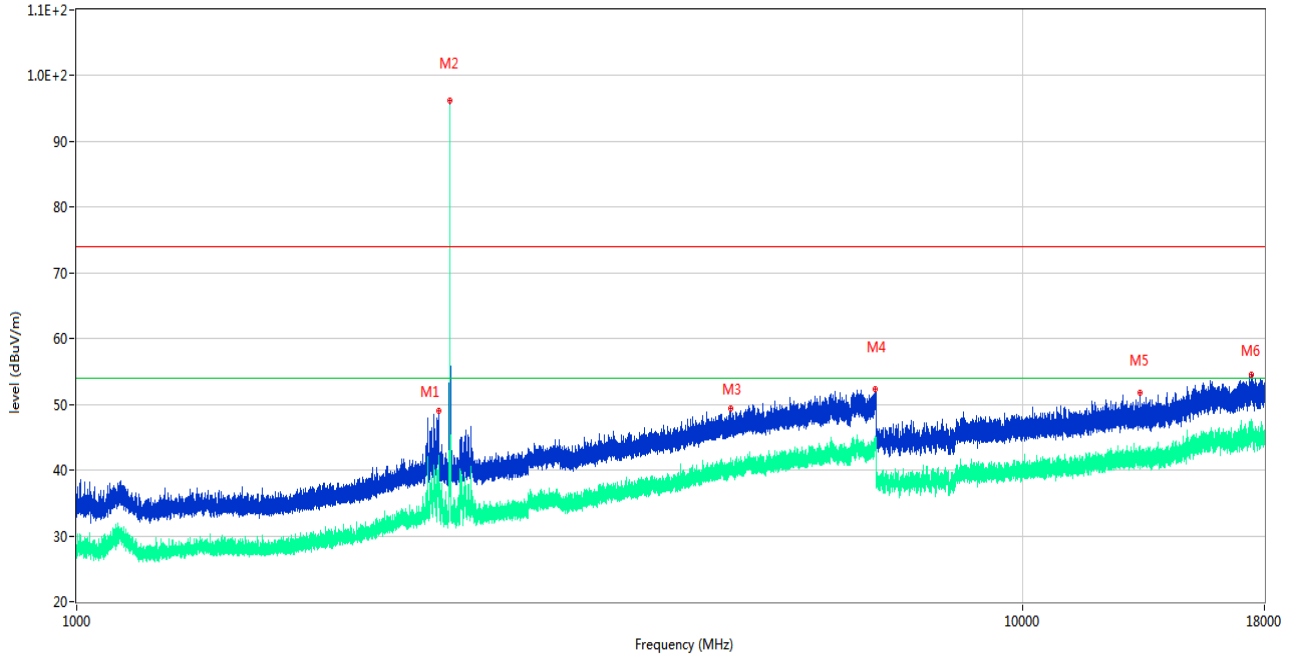

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2415.700	49.07	-12.25	74.0	-24.93	Peak	119.00	150	Horizontal	Pass
1**	2415.700	41.73	-12.25	54.0	-12.27	AV	119.00	150	Horizontal	Pass
2	2479.600	96.14	-12.44	74.0	22.14	Peak	119.00	150	Horizontal	N/A
2**	2479.600	94.50	-12.44	54.0	40.50	AV	119.00	150	Horizontal	N/A
3	4917.200	49.46	-2.24	74.0	-24.54	Peak	166.00	150	Horizontal	Pass
3**	4917.200	39.46	-2.24	54.0	-14.54	AV	166.00	150	Horizontal	Pass
4	6978.200	52.26	0.91	74.0	-21.74	Peak	350.00	150	Horizontal	Pass
4**	6978.200	44.53	0.91	54.0	-9.47	AV	350.00	150	Horizontal	Pass
5	13304.925	51.69	0.87	74.0	-22.31	Peak	132.00	150	Horizontal	Pass
5**	13304.925	43.17	0.87	54.0	-10.83	AV	132.00	150	Horizontal	Pass
6	17419.874	54.45	3.75	74.0	-19.55	Peak	83.00	150	Horizontal	Pass
6**	17419.874	46.08	3.75	54.0	-7.92	AV	83.00	150	Horizontal	Pass

## GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

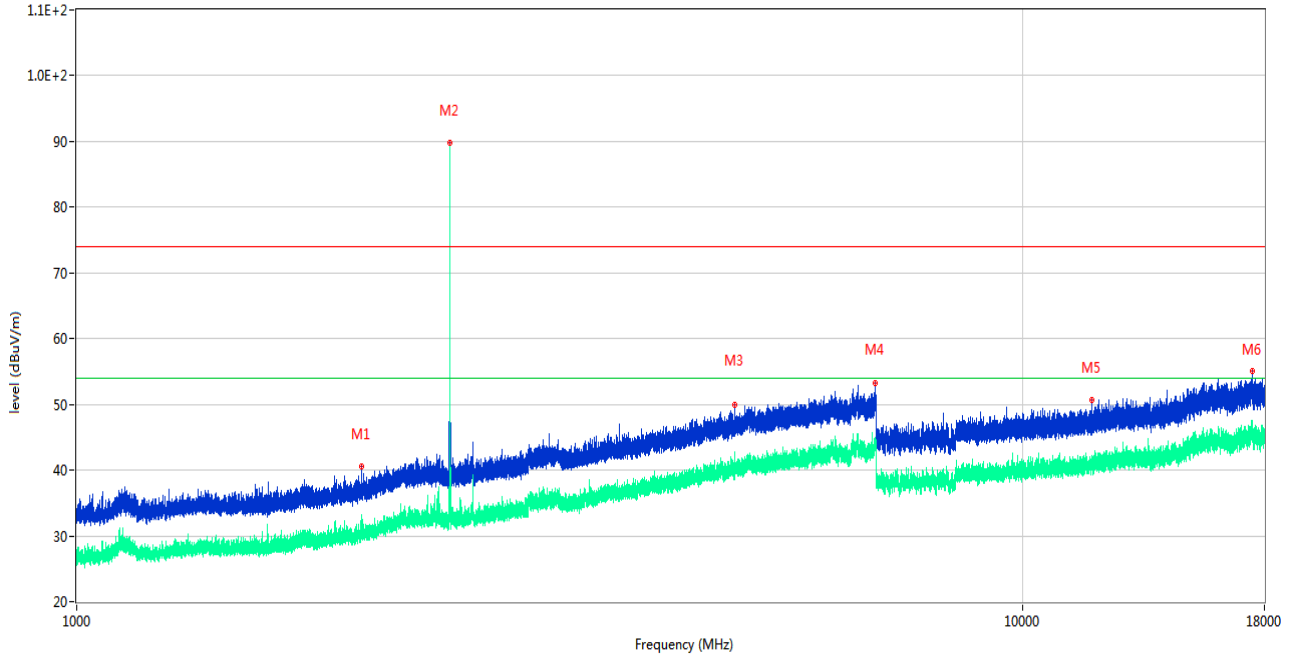

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1999.600	40.58	-15.50	74.0	-33.42	Peak	27.00	150	Vertical	Pass
1**	1999.600	29.81	-15.50	54.0	-24.19	AV	27.00	150	Vertical	Pass
2	2479.600	89.81	-12.44	74.0	15.81	Peak	44.00	150	Vertical	N/A
2**	2479.600	86.07	-12.44	54.0	32.07	AV	44.00	150	Vertical	N/A
3	4959.400	49.85	-3.29	74.0	-24.15	Peak	83.00	150	Vertical	Pass
3**	4959.400	39.95	-3.29	54.0	-14.05	AV	83.00	150	Vertical	Pass
4	6987.800	53.31	0.36	74.0	-20.69	Peak	39.00	150	Vertical	Pass
4**	6987.800	43.91	0.36	54.0	-10.09	AV	39.00	150	Vertical	Pass
5	11821.375	50.71	1.06	74.0	-23.29	Peak	0.00	150	Vertical	Pass
5**	11821.375	41.01	1.06	54.0	-12.99	AV	0.00	150	Vertical	Pass
6	17462.925	55.05	2.87	74.0	-18.95	Peak	360.00	150	Vertical	Pass
6**	17462.925	46.18	2.87	54.0	-7.82	AV	360.00	150	Vertical	Pass

## GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

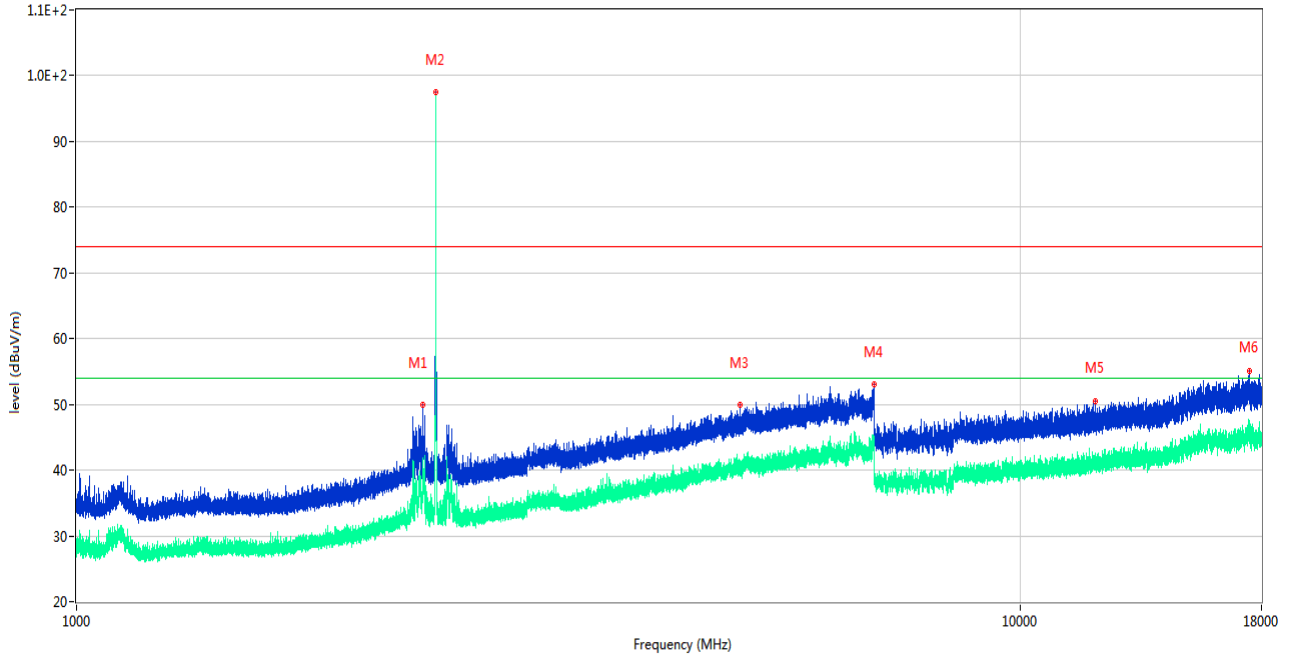

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2325.600	49.94	-12.71	74.0	-24.06	Peak	104.00	150	Horizontal	Pass
1**	2325.600	36.91	-12.71	54.0	-17.09	AV	104.00	150	Horizontal	Pass
2	2401.900	97.52	-12.26	74.0	23.52	Peak	49.00	150	Horizontal	N/A
2**	2401.900	94.90	-12.26	54.0	40.90	AV	49.00	150	Horizontal	N/A
3	5050.000	49.85	-2.81	74.0	-24.15	Peak	95.00	150	Horizontal	Pass
3**	5050.000	40.45	-2.81	54.0	-13.55	AV	95.00	150	Horizontal	Pass
4	6993.200	53.15	0.29	74.0	-20.85	Peak	180.00	150	Horizontal	Pass
4**	6993.200	43.42	0.29	54.0	-10.58	AV	180.00	150	Horizontal	Pass
5	11998.188	50.52	1.25	74.0	-23.48	Peak	0.00	150	Horizontal	Pass
5**	11998.188	40.99	1.25	54.0	-13.01	AV	0.00	150	Horizontal	Pass
6	17475.525	55.06	2.81	74.0	-18.94	Peak	360.00	150	Horizontal	Pass
6**	17475.525	45.92	2.81	54.0	-8.08	AV	360.00	150	Horizontal	Pass

## GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

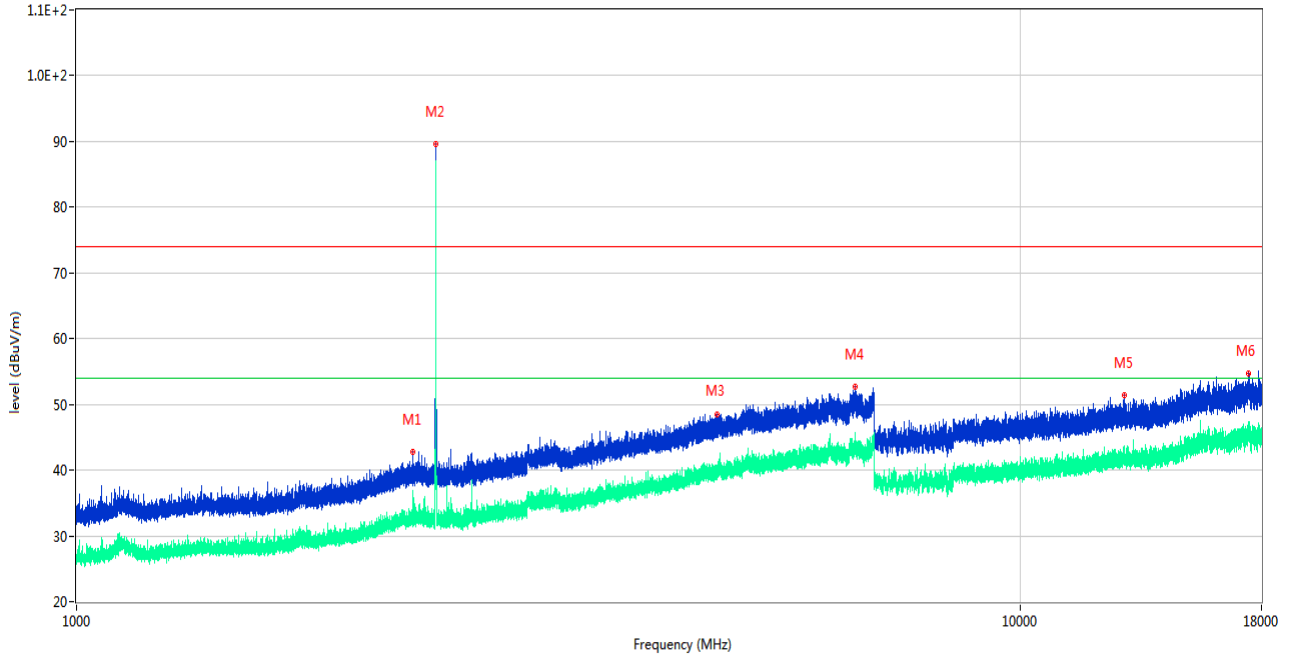


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2273.500	42.78	-13.01	74.0	-31.22	Peak	44.00	150	Vertical	Pass
1**	2273.500	32.44	-13.01	54.0	-21.56	AV	44.00	150	Vertical	Pass
2	2402.500	89.66	-12.27	74.0	15.66	Peak	44.00	150	Vertical	N/A
2**	2402.500	83.81	-12.27	54.0	29.81	AV	44.00	150	Vertical	N/A
3	4772.200	48.46	-3.01	74.0	-25.54	Peak	82.00	150	Vertical	Pass
3**	4772.200	39.71	-3.01	54.0	-14.29	AV	82.00	150	Vertical	Pass
4	6686.400	52.74	-0.21	74.0	-21.26	Peak	110.00	150	Vertical	Pass
4**	6686.400	44.07	-0.21	54.0	-9.93	AV	110.00	150	Vertical	Pass
5	12879.412	51.49	1.56	74.0	-22.51	Peak	330.00	150	Vertical	Pass
5**	12879.412	41.97	1.56	54.0	-12.03	AV	330.00	150	Vertical	Pass
6	17436.676	54.63	3.18	74.0	-19.37	Peak	131.00	150	Vertical	Pass
6**	17436.676	45.66	3.18	54.0	-8.34	AV	131.00	150	Vertical	Pass



## GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

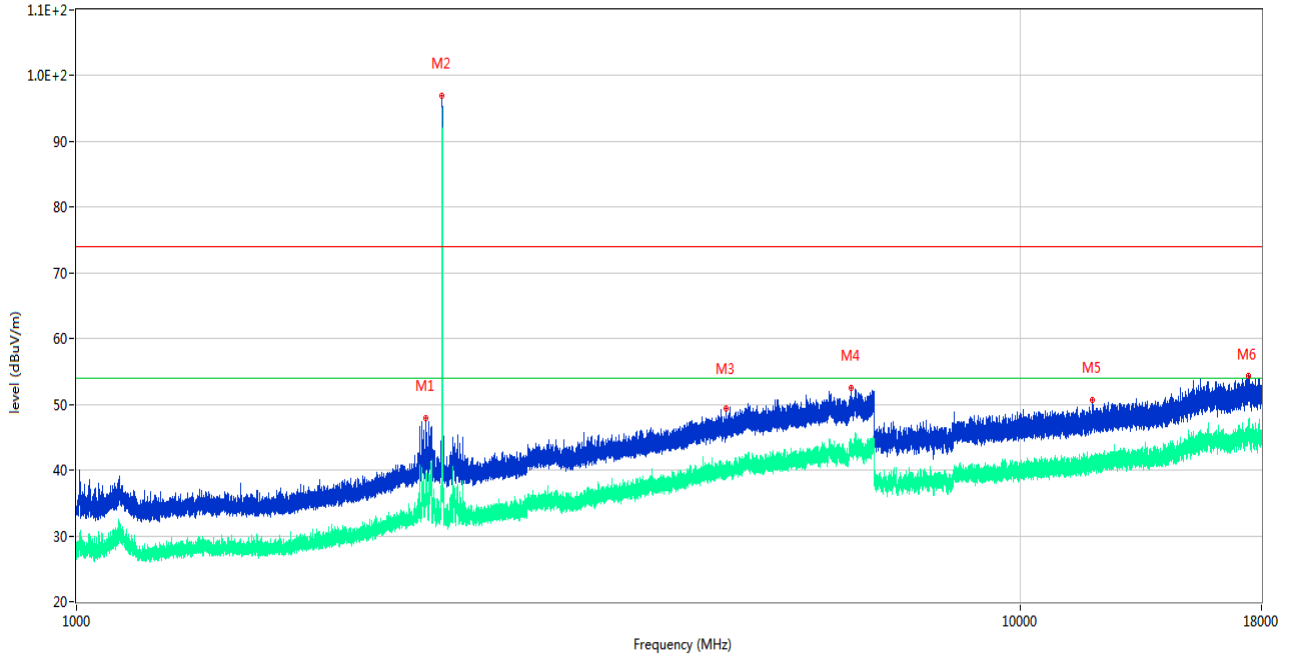

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2344.700	47.94	-12.69	74.0	-26.06	Peak	106.00	150	Horizontal	Pass
1**	2344.700	39.57	-12.69	54.0	-14.43	AV	106.00	150	Horizontal	Pass
2	2440.000	96.97	-12.68	74.0	22.97	Peak	55.00	150	Horizontal	N/A
2**	2440.000	94.13	-12.68	54.0	40.13	AV	55.00	150	Horizontal	N/A
3	4872.200	49.45	-3.32	74.0	-24.55	Peak	133.00	150	Horizontal	Pass
3**	4872.200	40.22	-3.32	54.0	-13.78	AV	133.00	150	Horizontal	Pass
4	6613.200	52.55	0.19	74.0	-21.45	Peak	217.00	150	Horizontal	Pass
4**	6613.200	43.71	0.19	54.0	-10.29	AV	217.00	150	Horizontal	Pass
5	11910.787	50.76	1.52	74.0	-23.24	Peak	309.00	150	Horizontal	Pass
5**	11910.787	41.62	1.52	54.0	-12.38	AV	309.00	150	Horizontal	Pass
6	17454.787	54.35	2.84	74.0	-19.65	Peak	112.00	150	Horizontal	Pass
6**	17454.787	45.89	2.84	54.0	-8.11	AV	112.00	150	Horizontal	Pass

## GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

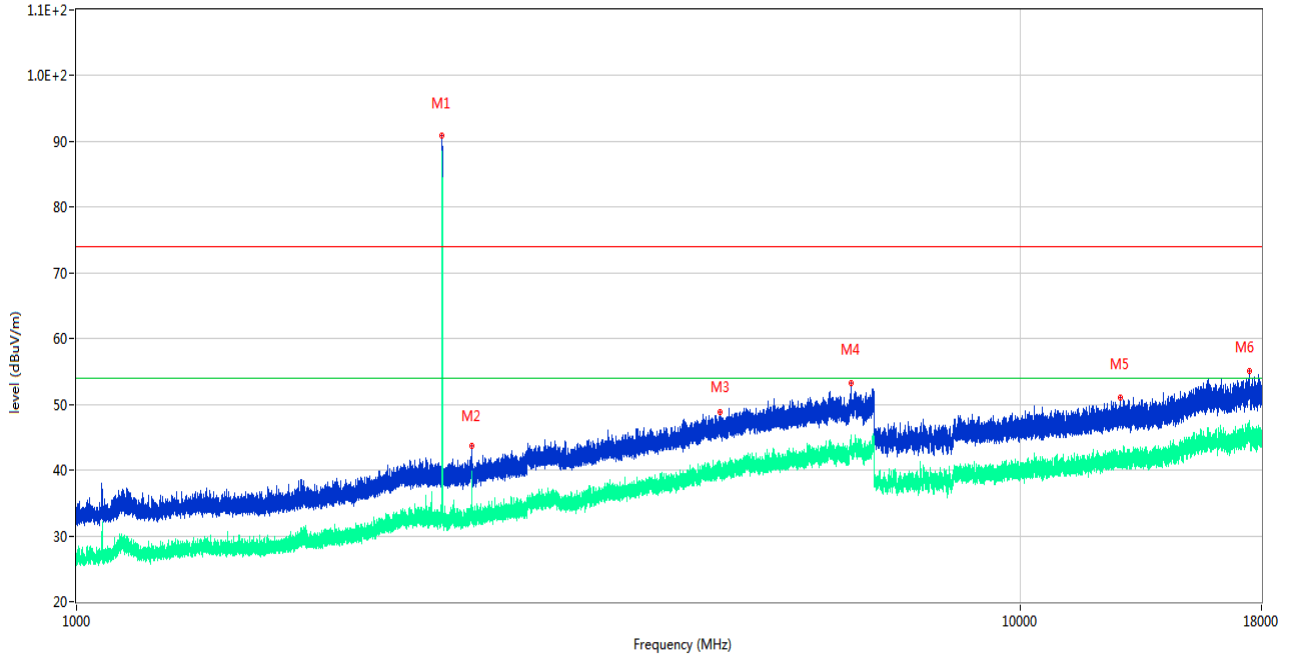

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2439.500	90.90	-12.64	74.0	16.90	Peak	46.00	150	Vertical	N/A
1**	2439.500	87.55	-12.64	54.0	33.55	AV	46.00	150	Vertical	N/A
2	2624.800	43.73	-11.52	74.0	-30.27	Peak	15.00	150	Vertical	Pass
2**	2624.800	36.62	-11.52	54.0	-17.38	AV	15.00	150	Vertical	Pass
3	4803.400	48.78	-2.69	74.0	-25.22	Peak	341.00	150	Vertical	Pass
3**	4803.400	40.83	-2.69	54.0	-13.17	AV	341.00	150	Vertical	Pass
4	6608.600	53.27	0.14	74.0	-20.73	Peak	203.00	150	Vertical	Pass
4**	6608.600	44.87	0.14	54.0	-9.13	AV	203.00	150	Vertical	Pass
5	12771.262	51.04	1.08	74.0	-22.96	Peak	140.00	150	Vertical	Pass
5**	12771.262	41.70	1.08	54.0	-12.30	AV	140.00	150	Vertical	Pass
6	17478.412	55.00	2.77	74.0	-19.00	Peak	53.00	150	Vertical	Pass
6**	17478.412	46.09	2.77	54.0	-7.91	AV	53.00	150	Vertical	Pass

## GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

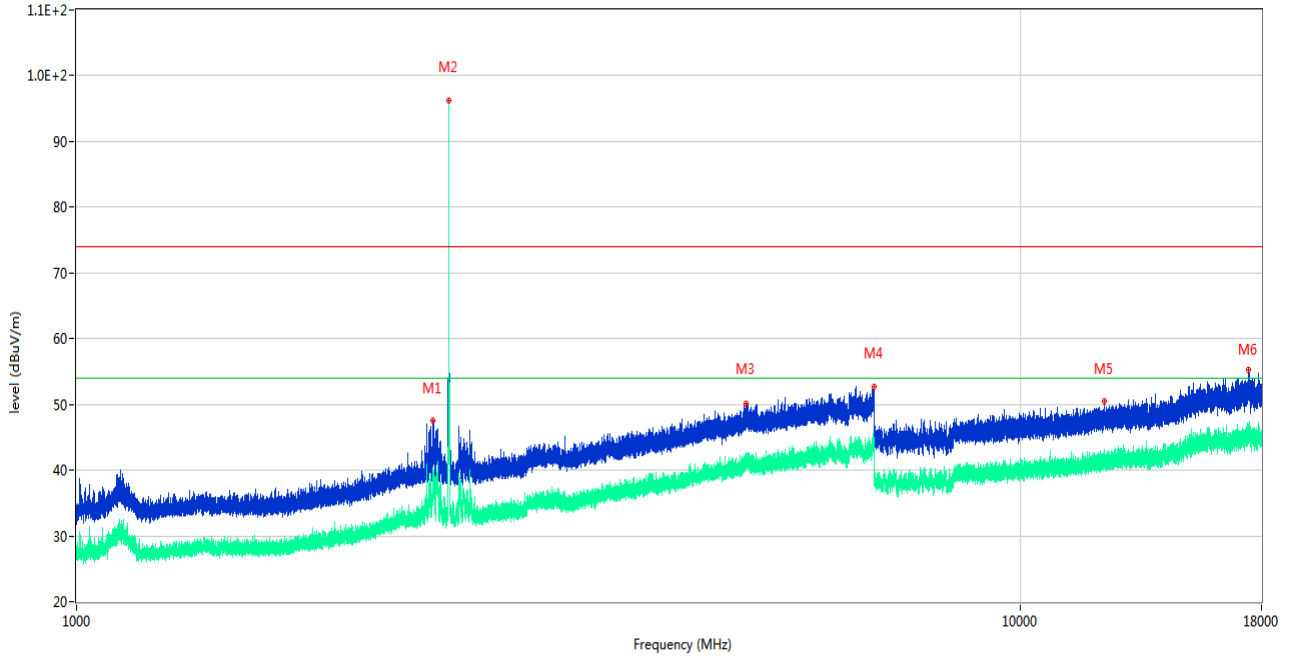

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2383.800	47.55	-12.65	74.0	-26.45	Peak	112.00	150	Horizontal	Pass
1**	2383.800	37.89	-12.65	54.0	-16.11	AV	112.00	150	Horizontal	Pass
2	2479.400	96.30	-12.44	74.0	22.30	Peak	37.00	150	Horizontal	N/A
2**	2479.400	93.87	-12.44	54.0	39.87	AV	37.00	150	Horizontal	N/A
3	5116.000	50.04	-2.33	74.0	-23.96	Peak	360.00	150	Horizontal	Pass
3**	5116.000	40.69	-2.33	54.0	-13.31	AV	360.00	150	Horizontal	Pass
4	6994.400	52.72	0.24	74.0	-21.28	Peak	99.00	150	Horizontal	Pass
4**	6994.400	43.69	0.24	54.0	-10.31	AV	99.00	150	Horizontal	Pass
5	12267.862	50.40	1.38	74.0	-23.60	Peak	0.00	150	Horizontal	Pass
5**	12267.862	41.57	1.38	54.0	-12.43	AV	0.00	150	Horizontal	Pass
6	17420.925	55.20	3.73	74.0	-18.80	Peak	87.00	150	Horizontal	Pass
6**	17420.925	46.20	3.73	54.0	-7.80	AV	87.00	150	Horizontal	Pass

## GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case\_FCC Part 15C\_FCC 15.247(2.4G)\_1GHz-18GHz

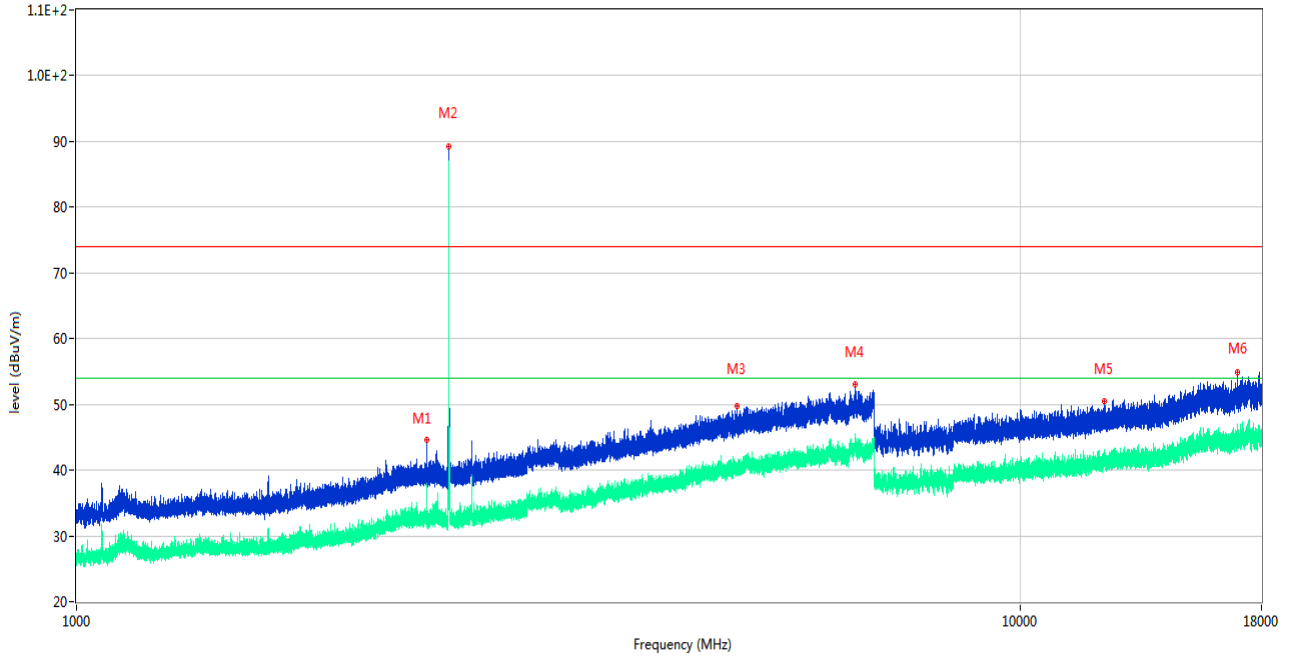

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2351.900	44.70	-12.66	74.0	-29.30	Peak	38.00	150	Vertical	Pass
1**	2351.900	33.97	-12.66	54.0	-20.03	AV	38.00	150	Vertical	Pass
2	2480.500	89.31	-12.42	74.0	15.31	Peak	38.00	150	Vertical	N/A
2**	2480.500	85.62	-12.42	54.0	31.62	AV	38.00	150	Vertical	N/A
3	5006.800	49.71	-3.04	74.0	-24.29	Peak	238.00	150	Vertical	Pass
3**	5006.800	40.43	-3.04	54.0	-13.57	AV	238.00	150	Vertical	Pass
4	6676.400	53.04	-0.60	74.0	-20.96	Peak	316.00	150	Vertical	Pass
4**	6676.400	43.15	-0.60	54.0	-10.85	AV	316.00	150	Vertical	Pass
5	12265.562	50.53	1.31	74.0	-23.47	Peak	342.00	150	Vertical	Pass
5**	12265.562	42.19	1.31	54.0	-11.81	AV	342.00	150	Vertical	Pass
6	16957.613	54.95	1.92	74.0	-19.05	Peak	76.00	150	Vertical	Pass
6**	16957.613	44.67	1.92	54.0	-9.33	AV	76.00	150	Vertical	Pass

## A.7 Band Edge (Restricted-band band-edge)

Note<sup>1</sup>: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note<sup>2</sup>: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note<sup>3</sup>: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.






Note<sup>4</sup>: The Level (dBuV/m) has been corrected by factor.

### MT1160B


Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK (BLE 1Mbps)	Low	2390.0	54.851	32.610	74	19.149	PEAK	Pass
		2390.0	44.632	32.610	54	9.368	AVERAGE	Pass
GFSK (BLE 1Mbps)	HIGH	2483.5	54.997	32.540	74	19.003	PEAK	Pass
		2483.5	44.645	32.540	54	9.355	AVERAGE	Pass
GFSK (BLE 2Mbps)	Low	2390.0	53.910	32.610	74	20.090	PEAK	Pass
		2390.0	N/A	N/A	54	N/A	AVERAGE	Pass
GFSK (BLE 2Mbps)	HIGH	2483.5	54.582	32.540	74	19.418	PEAK	Pass
		2483.5	44.669	32.540	54	9.331	AVERAGE	Pass

### MT0960B

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
GFSK (BLE 1Mbps)	Low	2390.0	55.254	32.610	74	18.746	PEAK	Pass
		2390.0	44.884	32.610	54	9.116	AVERAGE	Pass
GFSK (BLE 1Mbps)	HIGH	2483.5	57.376	32.540	74	16.624	PEAK	Pass
		2483.5	44.938	32.540	54	9.062	AVERAGE	Pass
GFSK (BLE 2Mbps)	Low	2390.0	54.563	32.610	74	19.437	PEAK	Pass
		2390.0	44.698	32.610	54	9.302	AVERAGE	Pass
GFSK (BLE 2Mbps)	HIGH	2483.5	58.432	32.540	74	15.568	PEAK	Pass
		2483.5	45.596	32.540	54	8.404	AVERAGE	Pass

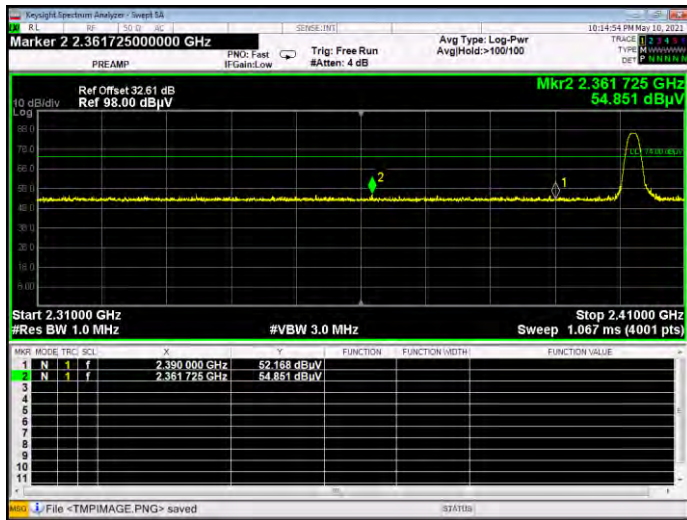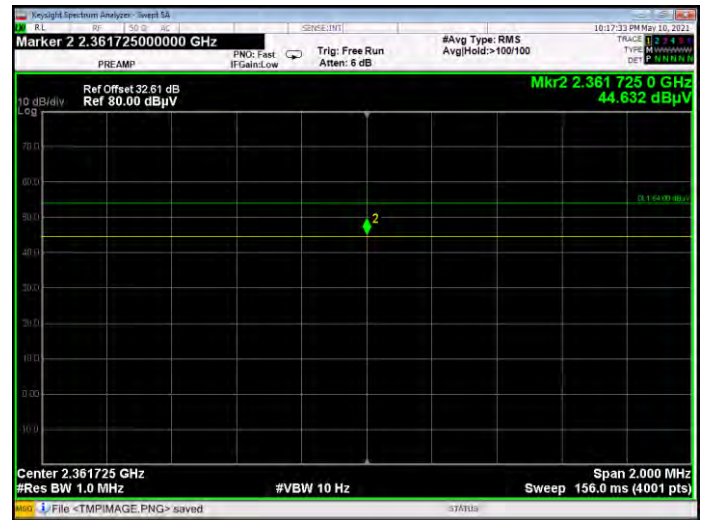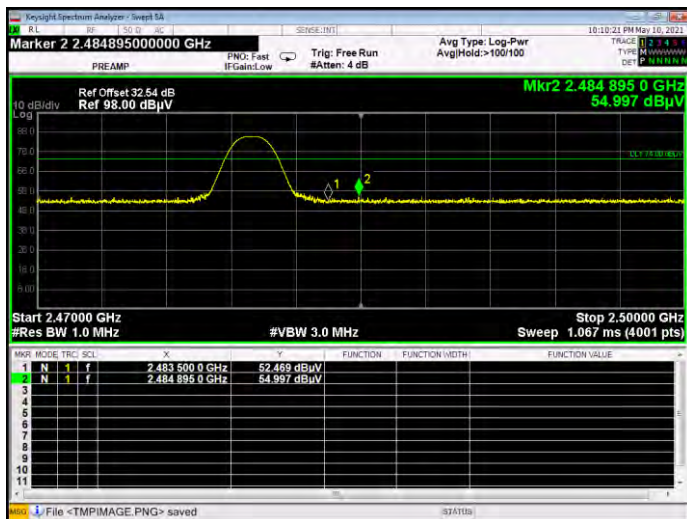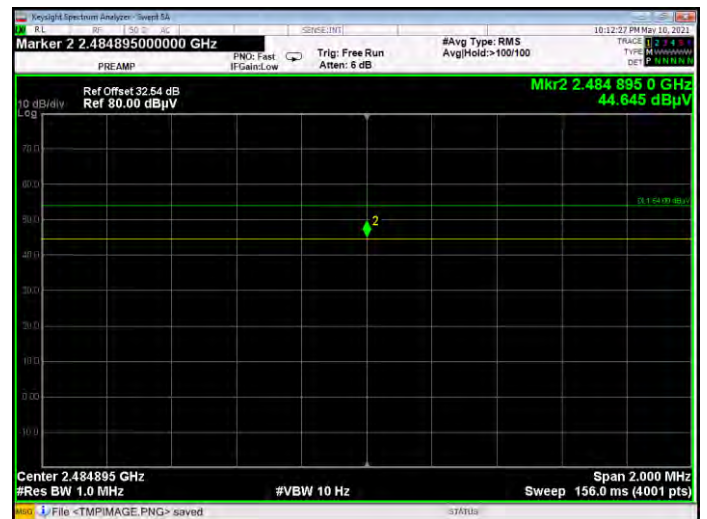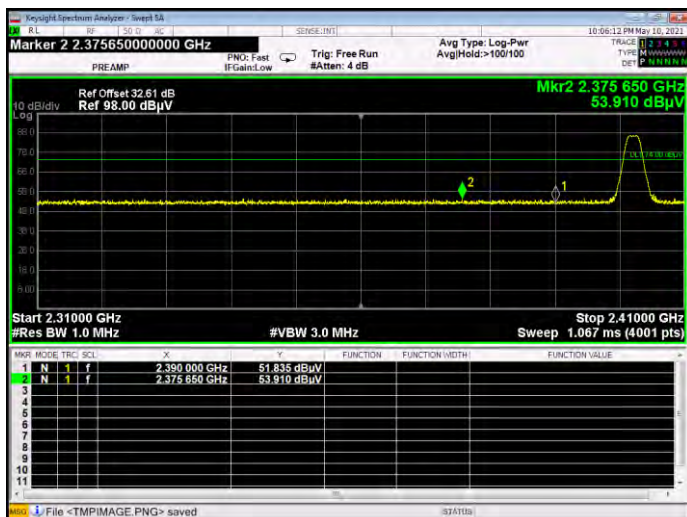**BLE 1Mbps**
**MT1160B**
**LOW CHANNEL, PEAK**

**LOW CHANNEL, AV**

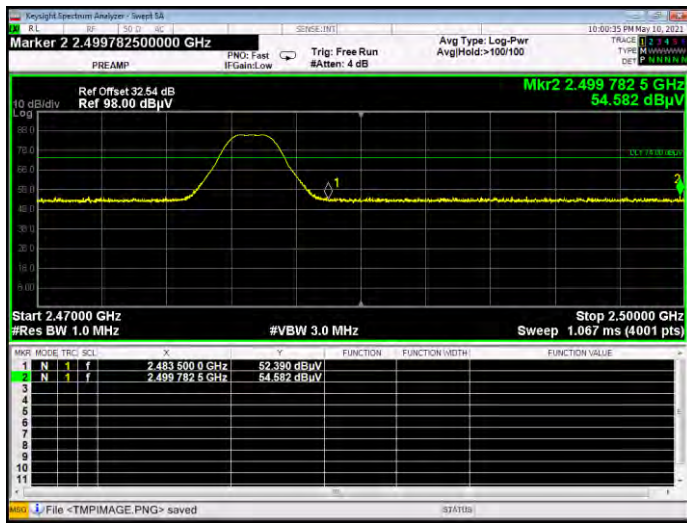**HIGH CHANNEL, PEAK**

**HIGH CHANNEL, AV**

**BLE 2Mbps**
**LOW CHANNEL, PEAK**


## HIGH CHANNEL, PEAK




## HIGH CHANNEL, AV




BLE 1Mbps

MT0960B


## LOW CHANNEL, PEAK

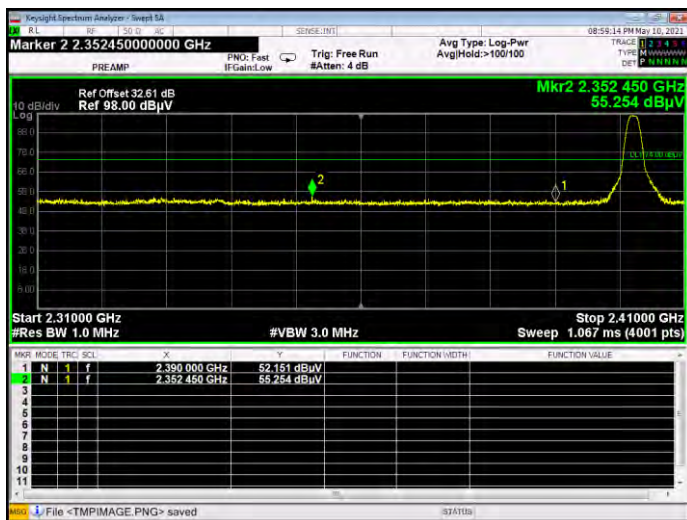


## Low CHANNEL, AV

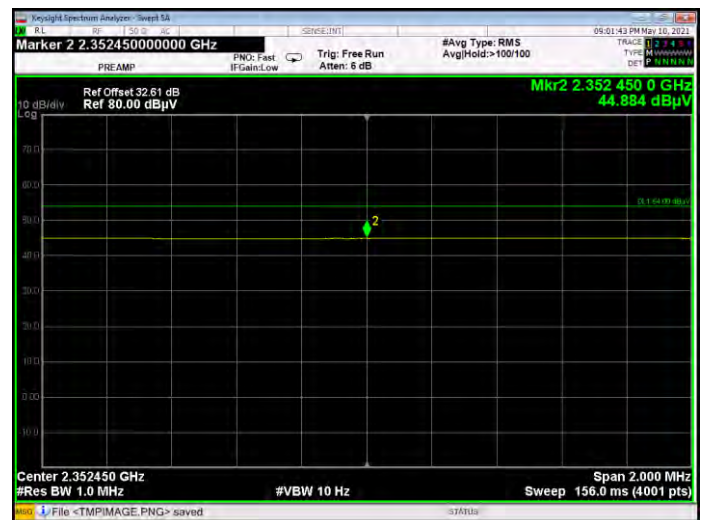

## HIGH CHANNEL, PEAK

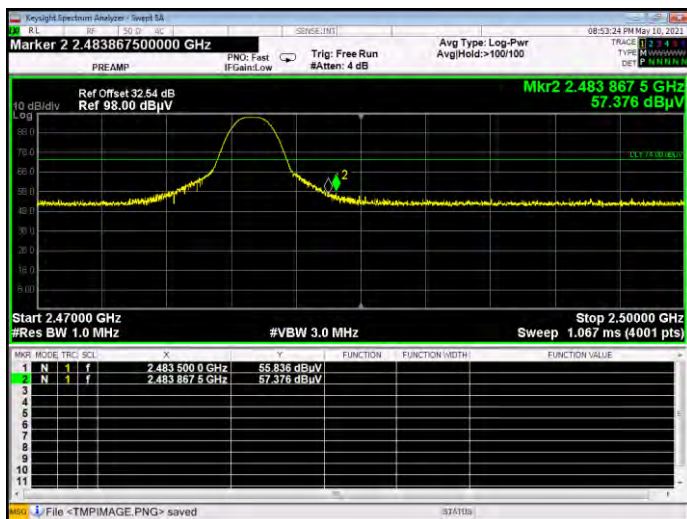

## HIGH CHANNEL, AV1

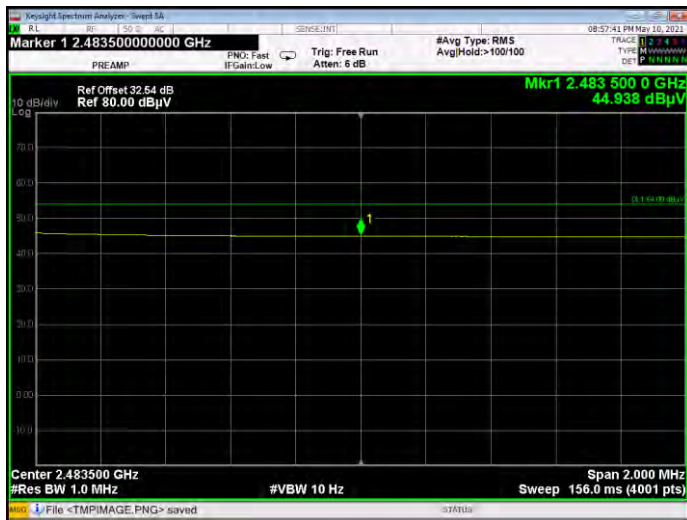


## HIGH CHANNEL, AV2



## BLE 2Mbps

## LOW CHANNEL, PEAK

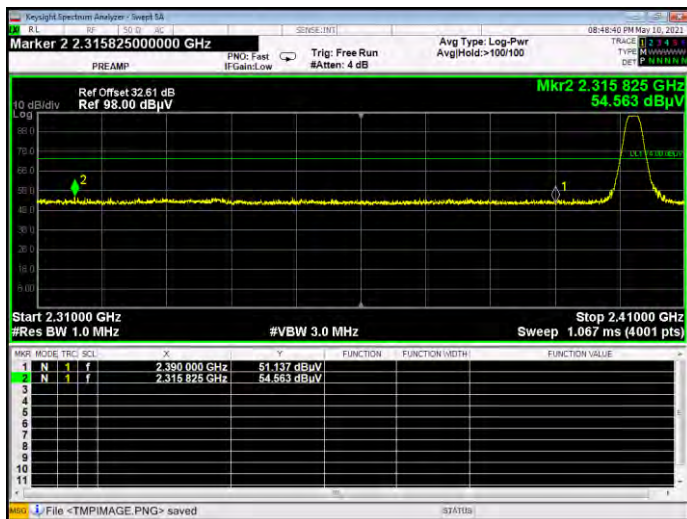


## Low CHANNEL, AV



## HIGH CHANNEL, PEAK



## HIGH CHANNEL, AV

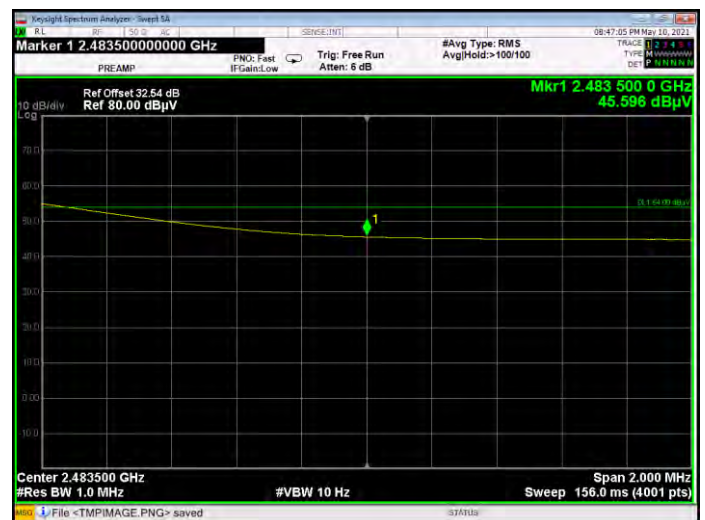



## A.8 Power Spectral Density (PSD)

### Test Data

#### BLE 1Mbps

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-15.727	8	Pass
Middle Channel	-16.023	8	Pass
High Channel	-16.073	8	Pass

#### BLE 2Mbps


Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-19.845	8	Pass
Middle Channel	-19.950	8	Pass
High Channel	-20.227	8	Pass

### Test plots


#### BLE 1Mbps

GFSK (BLE) LOW CHANNEL

GFSK (BLE) MIDDLE CHANNEL

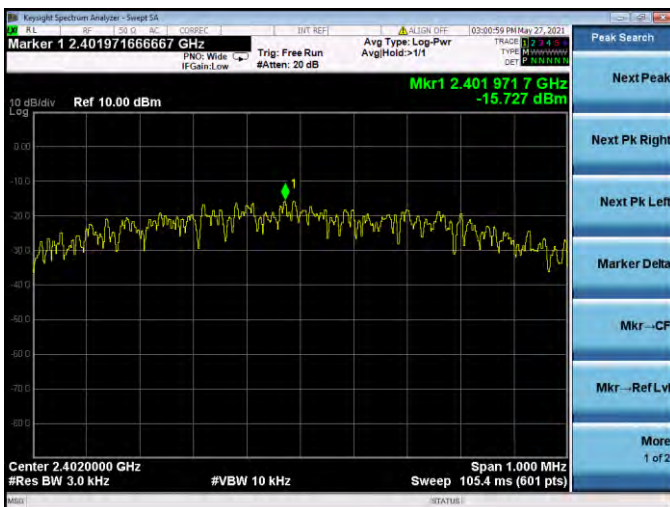

GFSK (BLE) HIGH CHANNEL

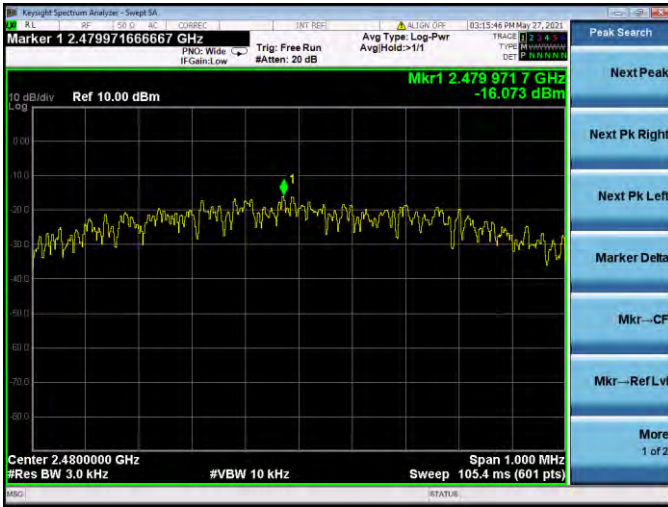

BLE 2Mbps


GFSK (BLE) LOW CHANNEL



GFSK (BLE) MIDDLE CHANNEL



GFSK (BLE) HIGH CHANNEL

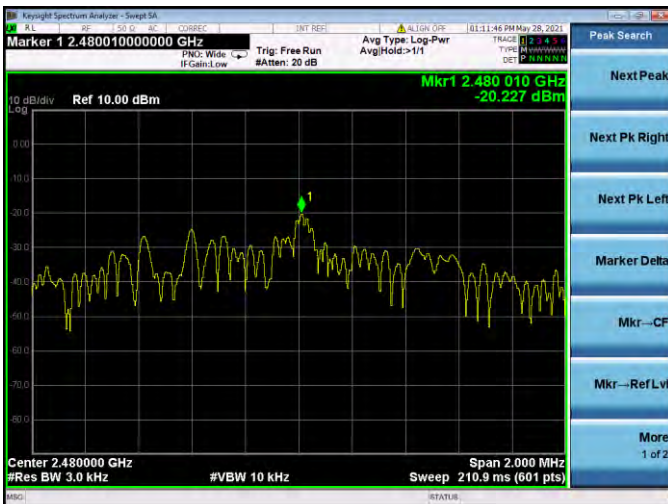

## **ANNEX B TEST SETUP PHOTOS**

Please refer the document "BL-SZ2140519-AR.PDF".

## **ANNEX C EUT EXTERNAL PHOTOS**

Please refer the document "BL-SZ2140519-AW.PDF".

## **ANNEX D EUT INTERNAL PHOTOS**

Please refer the document "BL-SZ2140519-AI.PDF".

--END OF REPORT--