

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-199-RWD-043

AGR No. : A195A-069

Applicant : BBB Inc.

Address : 28, Yatap-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

Manufacturer : BBB Inc.

Address : 28, Yatap-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea

Type of Equipment : Immunoassay Analyzer

FCC ID. : 2AKGP-MB100

Model Name : MB-100

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 33 pages (including this page)

Date of Incoming : May 13, 2019

Date of issue : September 24, 2019

SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Ha-Ram Lee / Assistant Manager
ONETECH Corp.

Approved by:



Jae-Ho Lee / Chief Engineer
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	8
5. SYSTEM TEST CONFIGURATION	9
5.1 JUSTIFICATION.....	9
5.2 PERIPHERAL EQUIPMENT	9
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	10
5.5 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MIMIMUM 6 DB BANDWIDTH	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST EQUIPMENT USED.....	11
7.4 TEST DATA.....	12
8. MAXIMUM PEAK OUTPUT POWER.....	14
8.1 OPERATING ENVIRONMENT	14
8.2 TEST SET-UP	14
8.3 TEST EQUIPMENT USED.....	14
8.4 TEST DATA.....	15
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	17

9.1 OPERATING ENVIRONMENT	17
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	17
9.4 TEST EQUIPMENT USED	17
9.5 TEST DATA FOR CONDUCTED EMISSION	18
9.6 TEST DATA FOR RADIATED EMISSION.....	23
9.6.1 Radiated Emission which fall in the Restricted Band.....	23
9.6.2 Spurious & Harmonic Radiated Emission.....	24
10. PEAK POWER SPECTRAL DENSITY	25
10.1 OPERATING ENVIRONMENT	25
10.2 TEST SET-UP	25
10.3 TEST EQUIPMENT USED	25
10.4 TEST DATA.....	26
11. RADIATED EMISSION TEST	28
11.1 OPERATING ENVIRONMENT	28
11.2 TEST SET-UP	28
11.3 TEST EQUIPMENT USED	28
11.4 TEST DATA FOR TRANSMITTING MODE	29
11.4.1 Test data for 30 MHz ~ 1 GHz	29
11.4.2 Test data for Below 30 MHz	30
11.4.3 Test data for above 1 GHz	30
12. CONDUCTED EMISSION TEST.....	31
12.1 OPERATING ENVIRONMENT	31
12.2 TEST SET-UP	31
12.3 TEST EQUIPMENT USED	31
12.4 TEST DATA.....	32

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-199-RWD-043	September 24, 2019	Initial Issue	All

1. VERIFICATION OF COMPLIANCE

Applicant : BBB Inc.
Address : 28, Yatap-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea
Contact Person : Jaekyu Choi / CEO
Telephone No. : +82-2-565-9653
FCC ID : 2AKGP-MB100
Model Name : MB-100
Brand Name : N/A
Serial Number : N/A
Date : September 24, 2019

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
KIND OF EQUIPMENT	Immunoassay Analyzer
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

-. Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The BBB Inc., Model MB-100 (referred to as the EUT in this report) is an Immunoassay Analyzer. The product specification described herein was obtained from product data sheet or user's manual.

Device Type	Immunoassay Analyzer	
Operating Frequency	Bluetooth LE	2 402 MHz ~ 2 480 MHz
	WLAN	2 412 MHz ~ 2 462 MHz (802.11b/g/n(HT20))
	2.4 GHz Band	2 422 MHz ~ 2 452 MHz (802.11n(HT40))
	NFC	13.56 MHz
RF Output Power	Bluetooth LE	-6.78 dBm
	WLAN	802.11b (13.13 dBm)
	2.4 GHz Band	802.11g (10.67 dBm)
		802.11n(HT20) (11.01 dBm)
		802.11n(HT40) (10.81 dBm)
Number of Channel	Bluetooth LE	40 Channels
	WLAN	11 Channels
	2.4 GHz Band	
	NFC	1 Channel
Modulation Type	Bluetooth LE	DSSS Modulation(GFSK)
	WLAN	DSSS Modulation(DBPSK/DQPSK/CCK)
	2.4 GHz Band	OFDM Modulation(BPSK/QPSK/16QAM/64QAM)
	NFC	ASK
Antenna Type	Bluetooth LE	FPC Antenna
	WLAN	
	2.4 GHz Band	
	NFC	PCB Antenna
Antenna Gain	Bluetooth LE	1.74 dBi
	WLAN	
	2.4 GHz Band	
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32.768kHz	
Rated Supply Voltage	DC 3.8 V	

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	-
Sub Board	N/A	N/A	-
NFC Board	N/A	N/A	
Module Board	N/A	N/A	-
Display	N/A	N/A	
Main Battery	N/A	N/A	
Sub Battery	N/A	N/A	-

5.2 Peripheral equipment

-None

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

5.4 Configuration of Test System

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is an FPC Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Charging mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

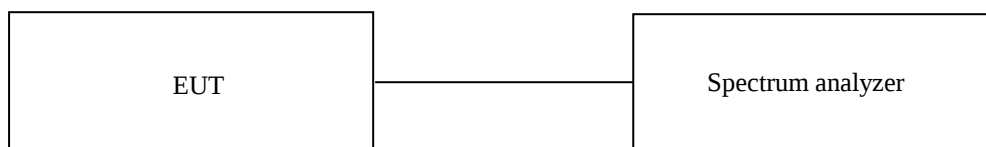

7.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

7.4 Test data

-. Test Date : August 30, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	704.30	500	204.30
Middle	2 440.00	704.30	500	204.30
High	2 480.00	709.30	500	209.30

Remark. Margin = Measured Value - Limit




Tested by: Yu-Seog Sim / Assistant Manager

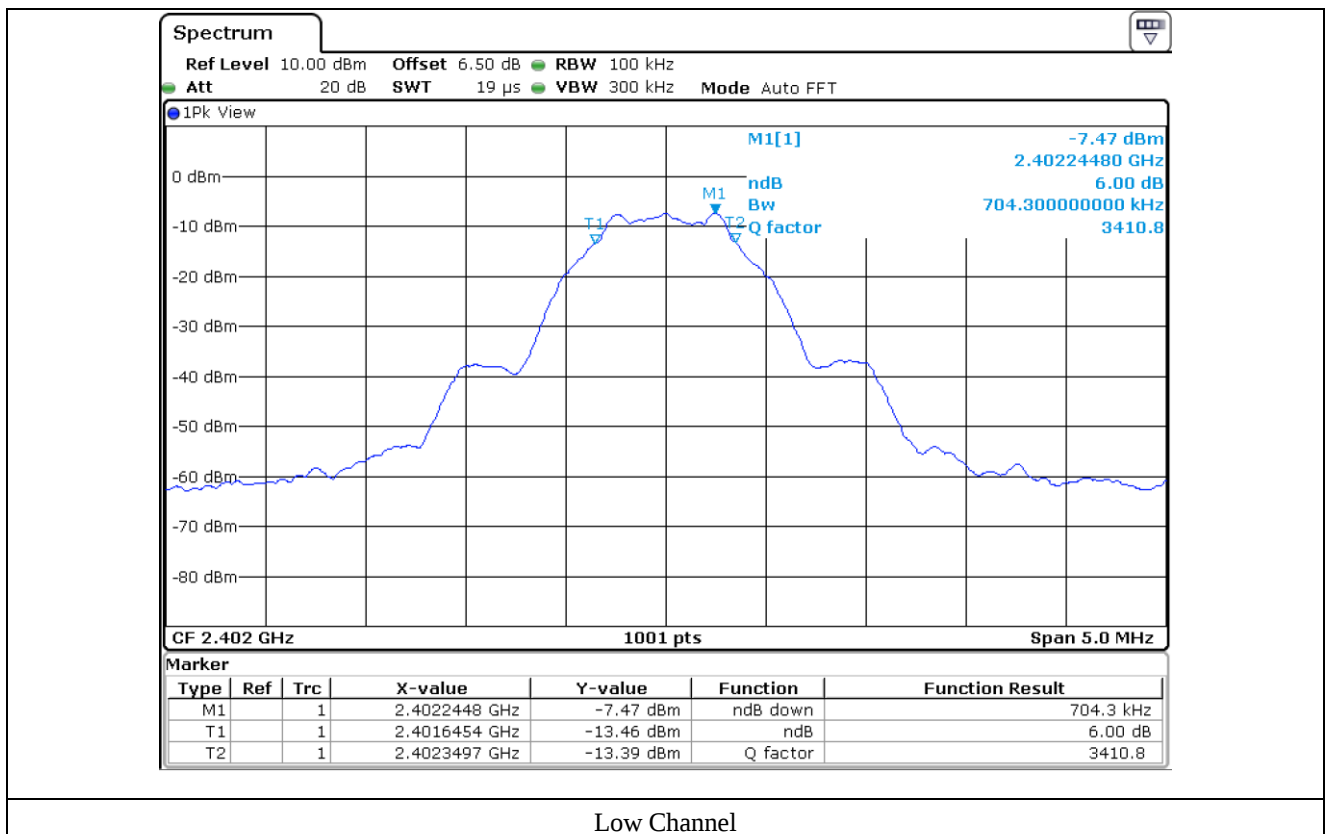

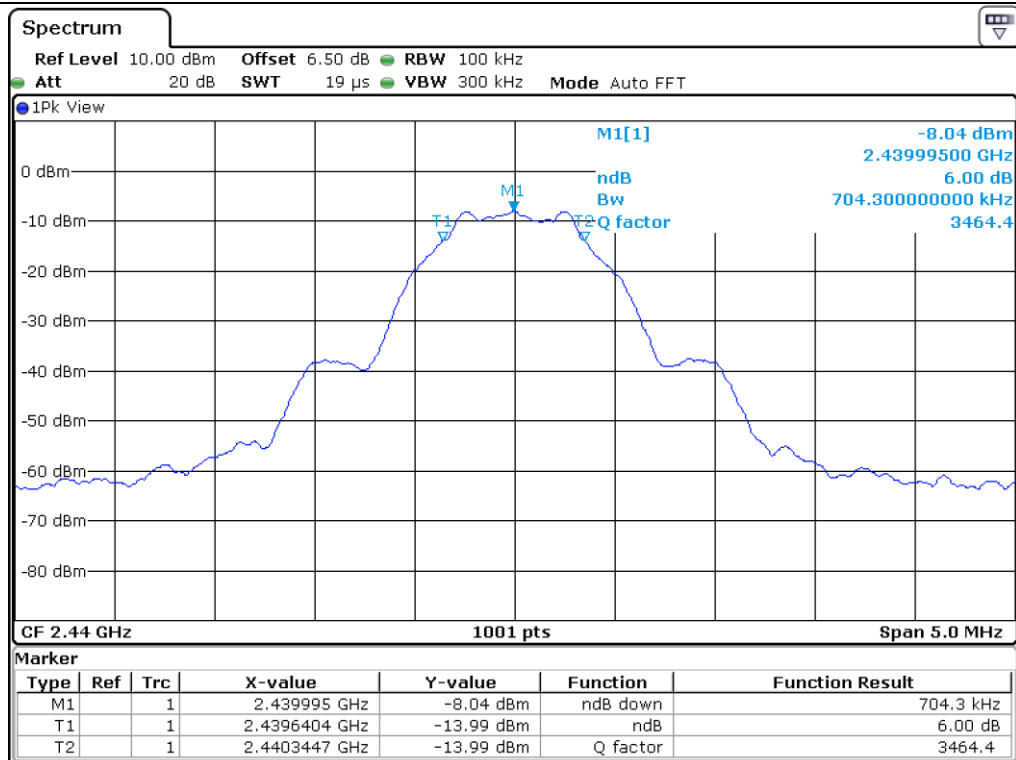

Middle Channel

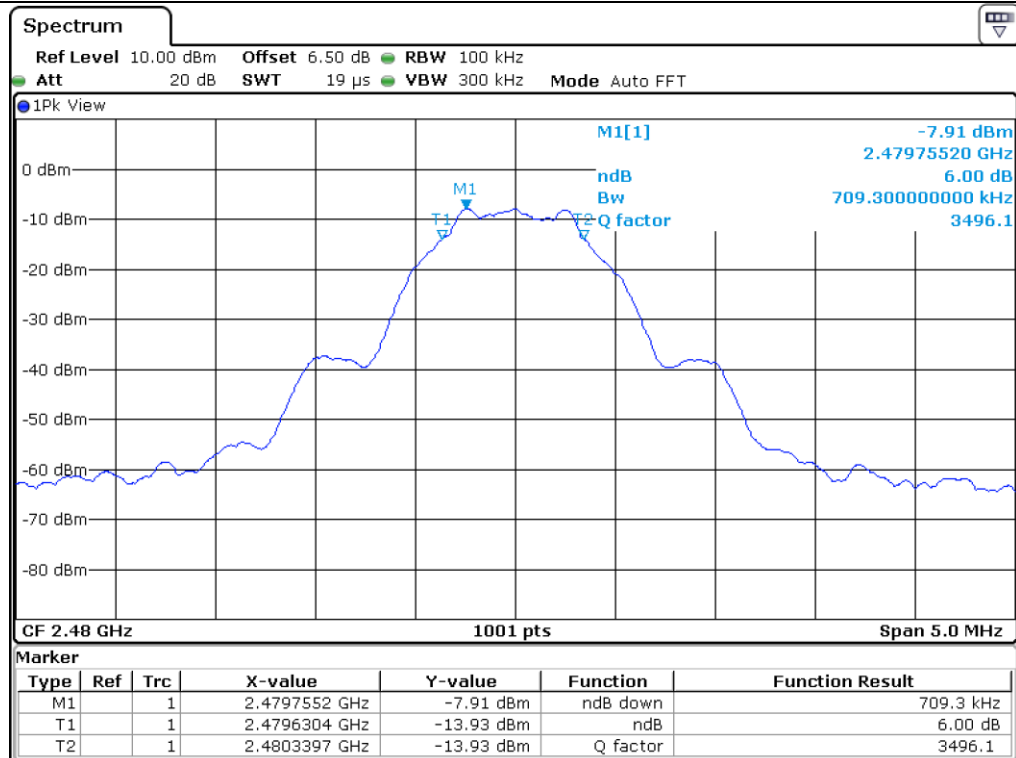

High Channel

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

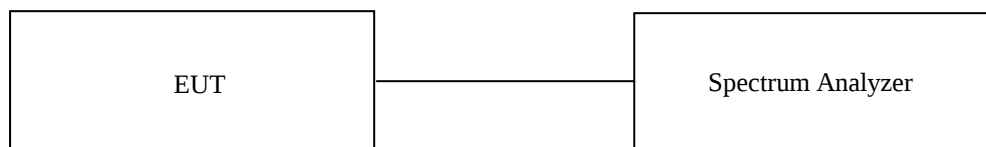

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

8.4 Test data

-. Test Date : August 30, 2019


-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-6.78	30.00	36.78
MIDDLE	2 440.00	-7.42	30.00	37.42
HIGH	2 480.00	-7.31	30.00	37.31

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Yu-Seog Sim / Assistant Manager

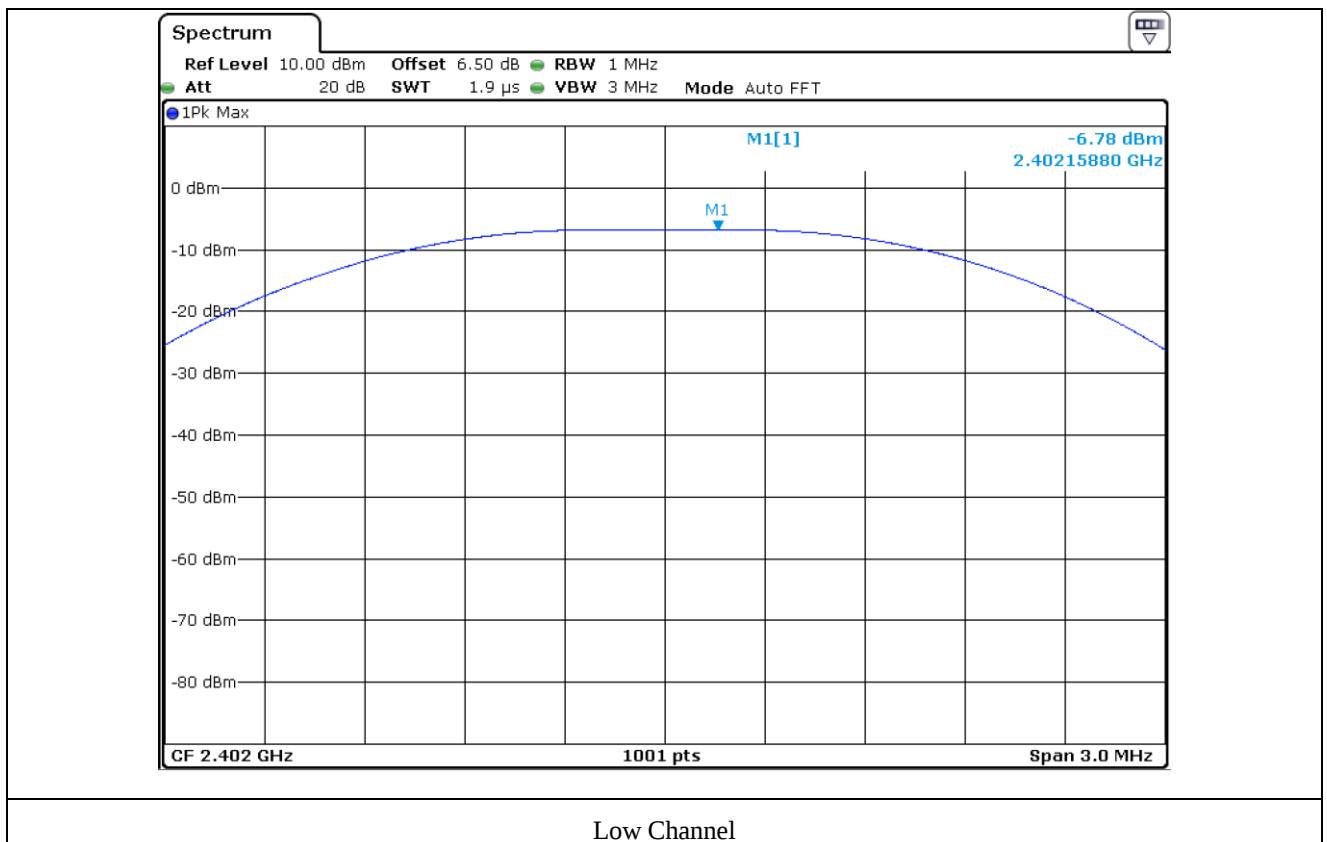

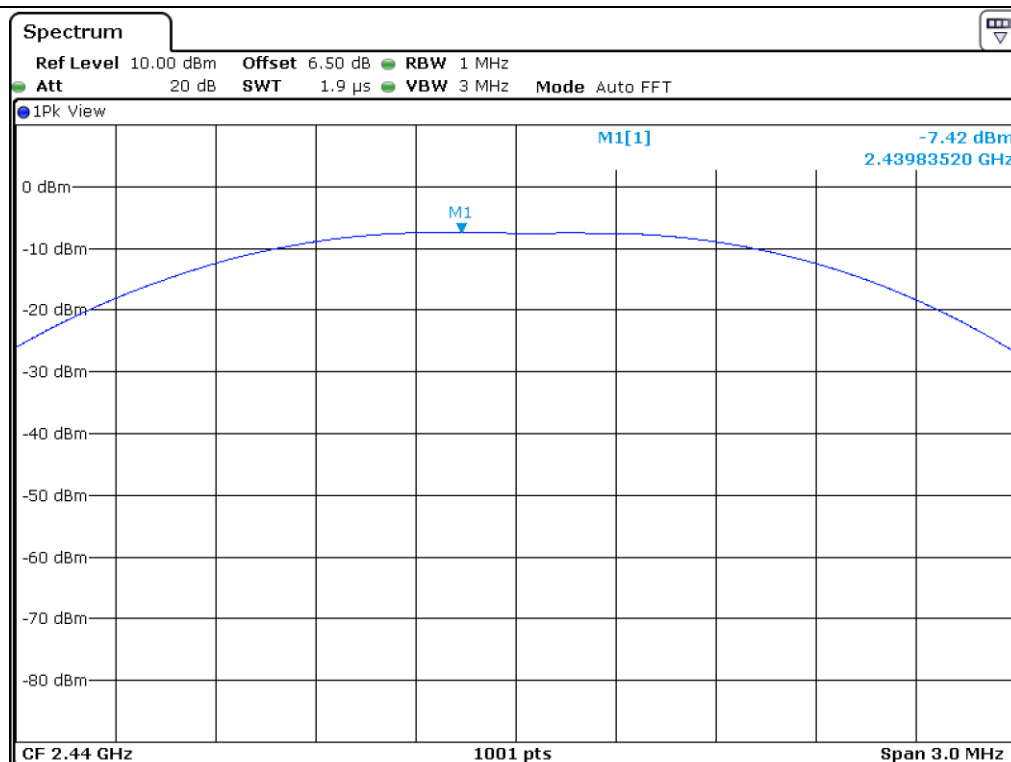

Middle Channel

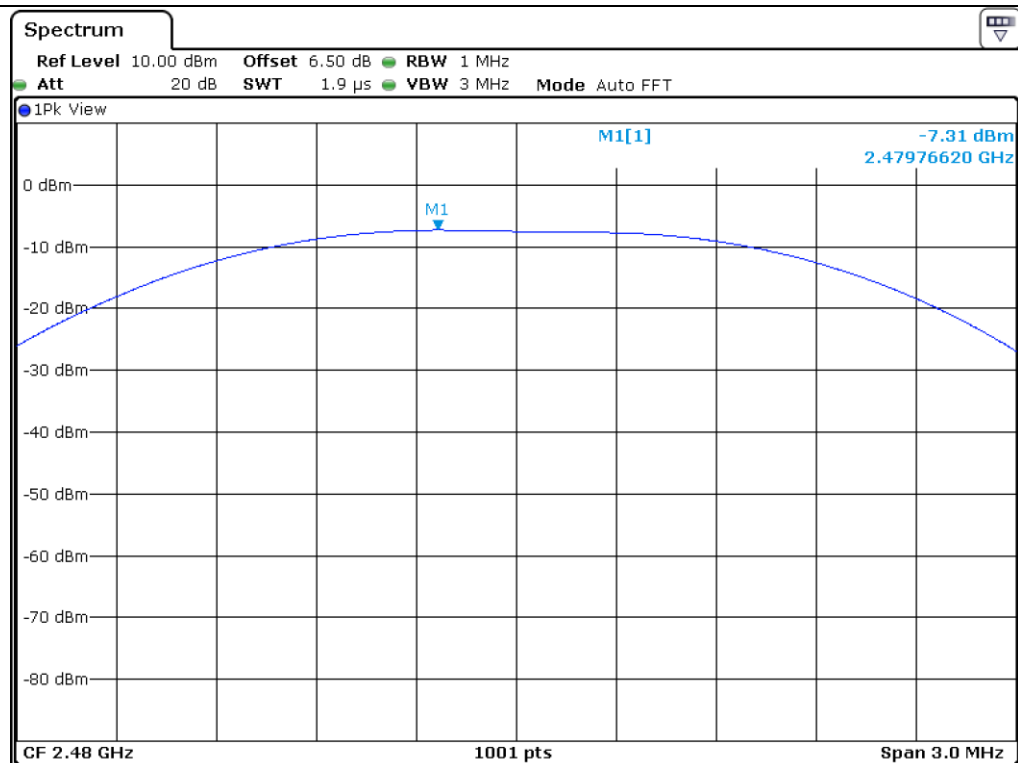

High Channel

9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.



9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


9.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2018 (1Y)
■ -	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 18, 2019 (1Y)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)
■ -	BBV 9718 B	Schwarzbeck	Broadband Preamplifier	009	Mar. 20, 2019 (1Y)
■ -	MA-4000XPET	Innco Systems GmbH	Antenna Master	MA4000/509	N/A
□ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DT3000-3t	Innco Systems GmbH	Turn Table	N/A	N/A
□ -	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-419	Aug. 09, 2018 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Jul. 16, 2019 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Dec. 04, 2017 (2Y)
■ -	SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


9.5 Test data for conducted emission

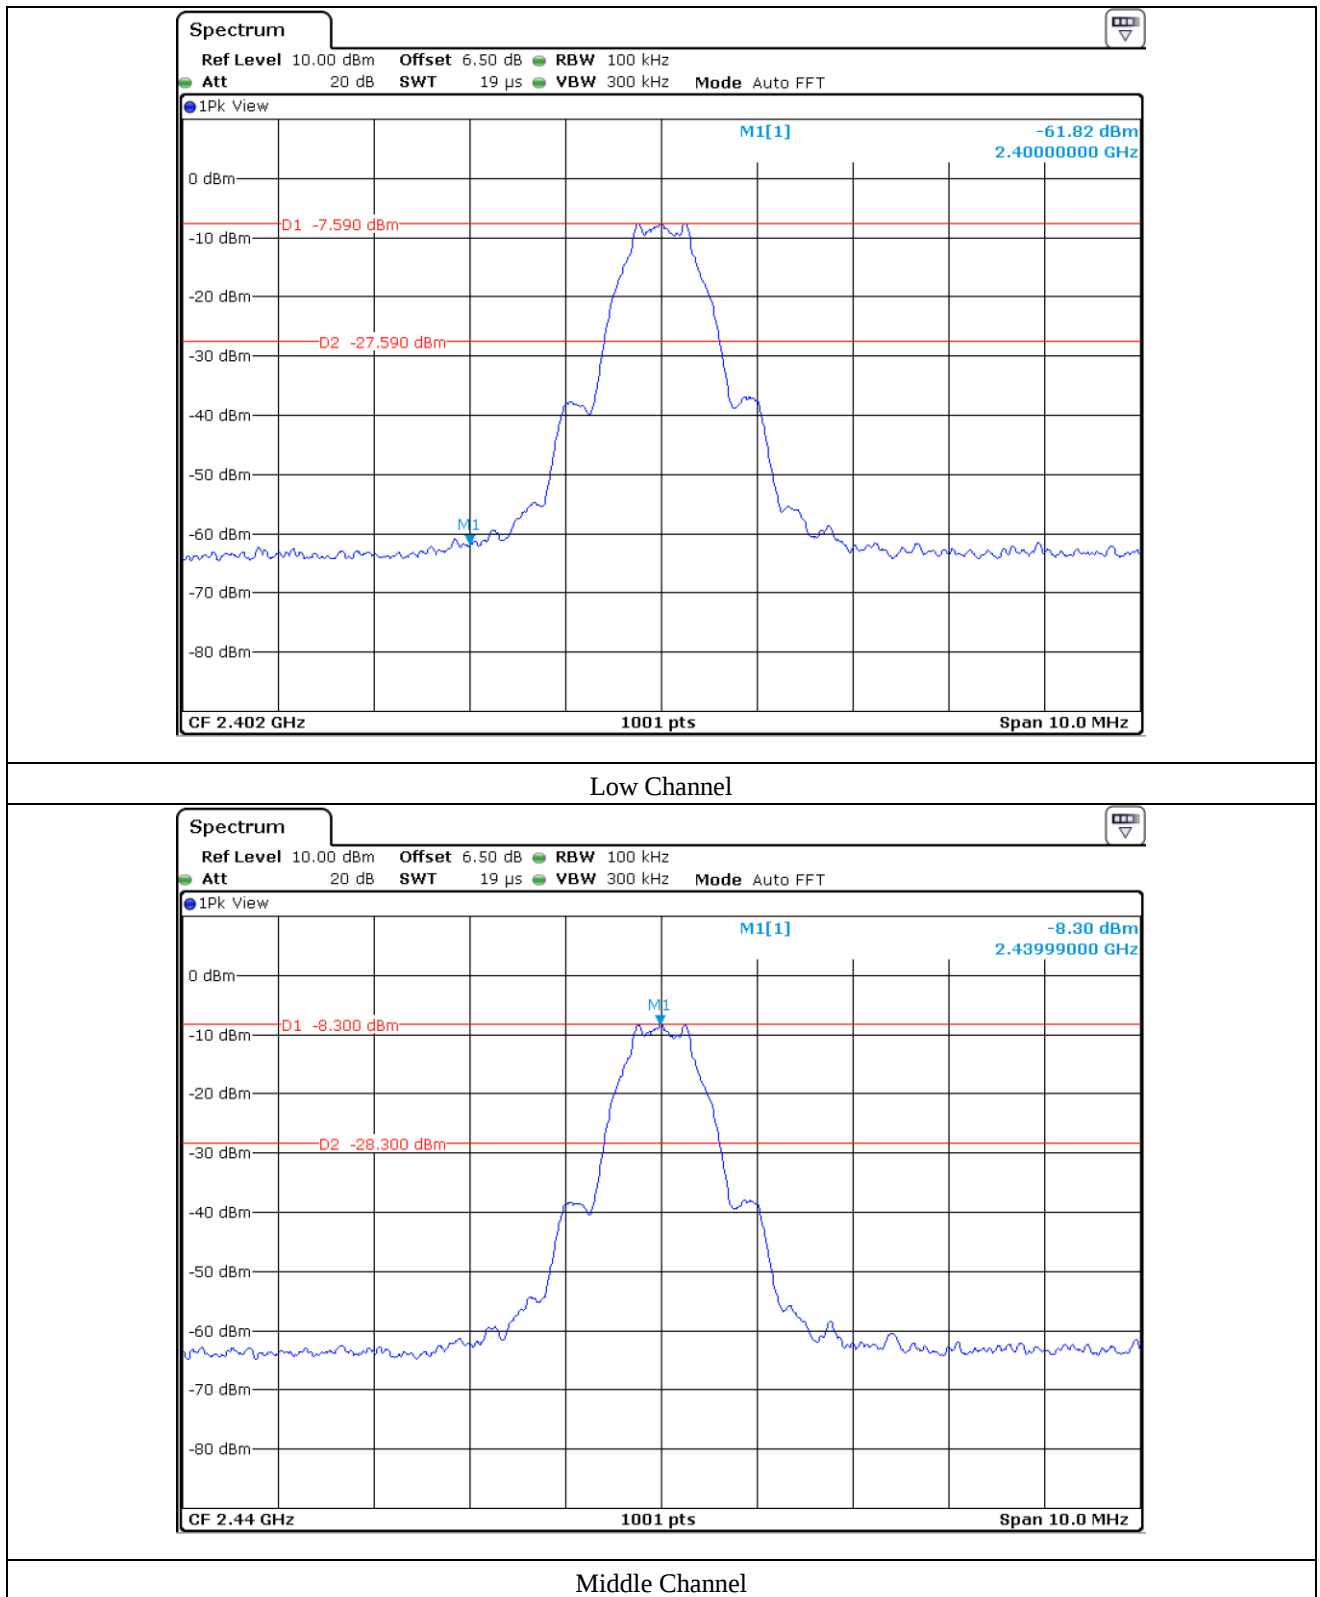

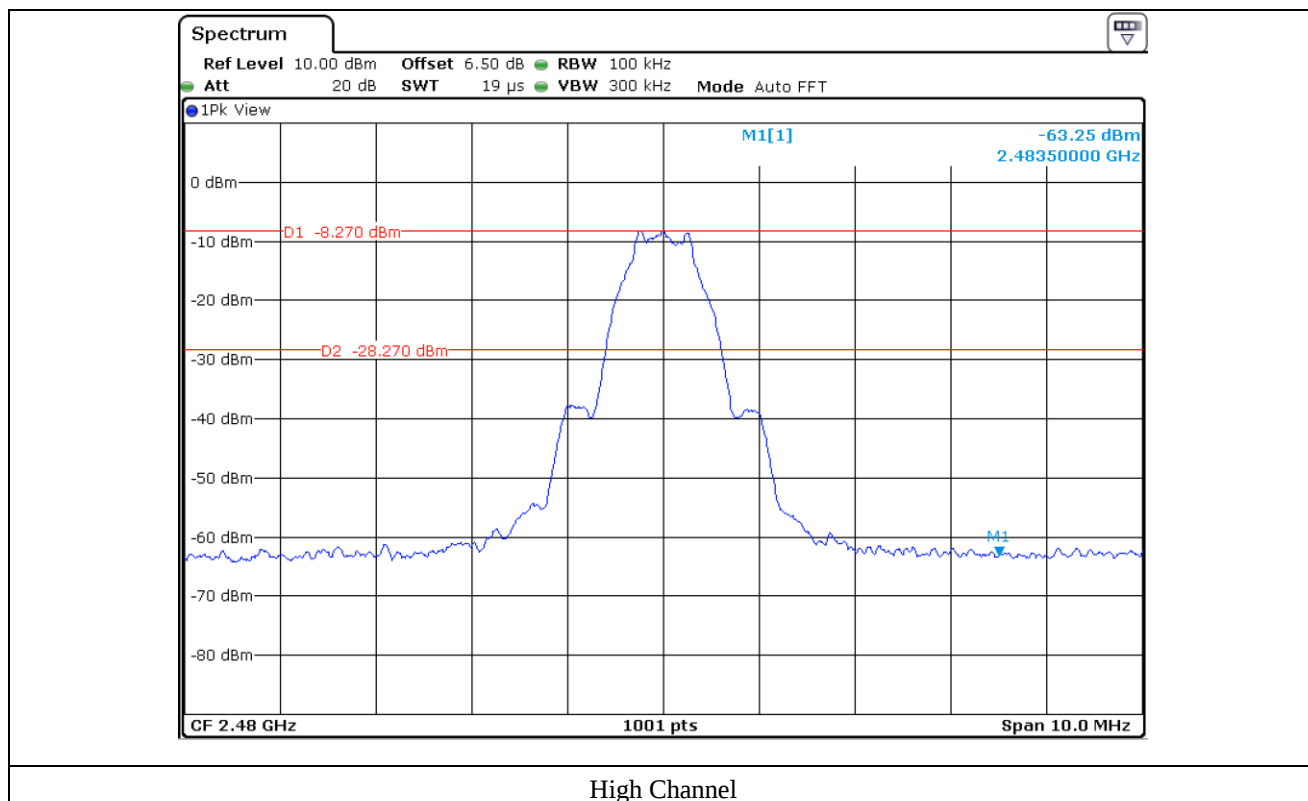


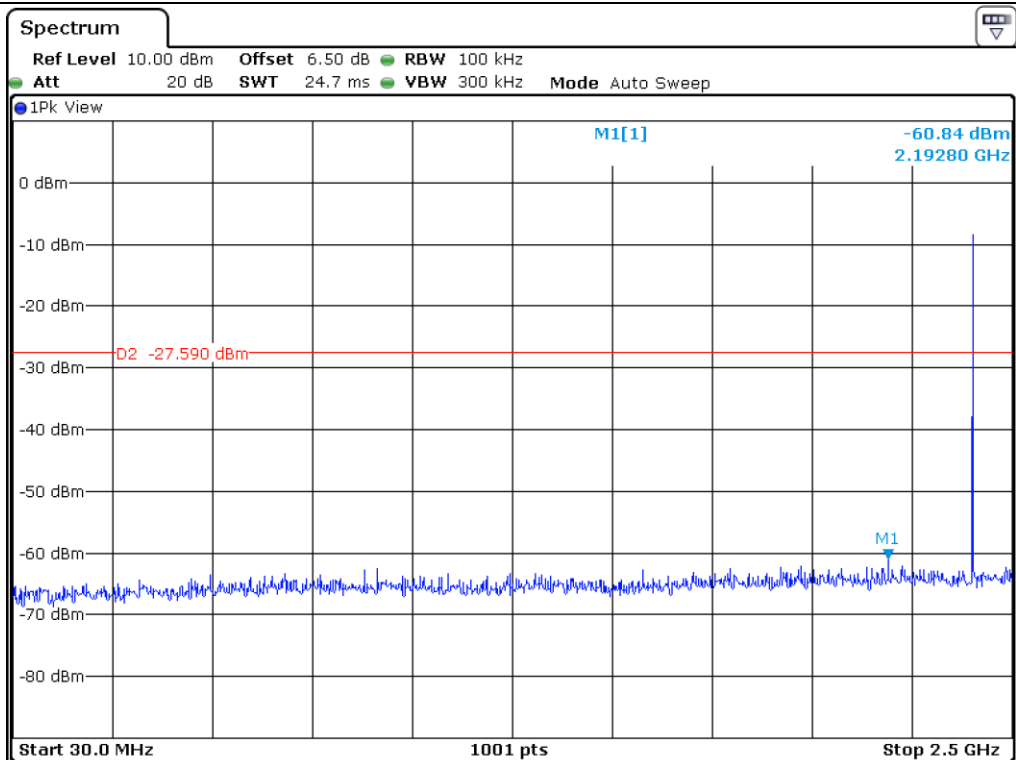


Low Channel

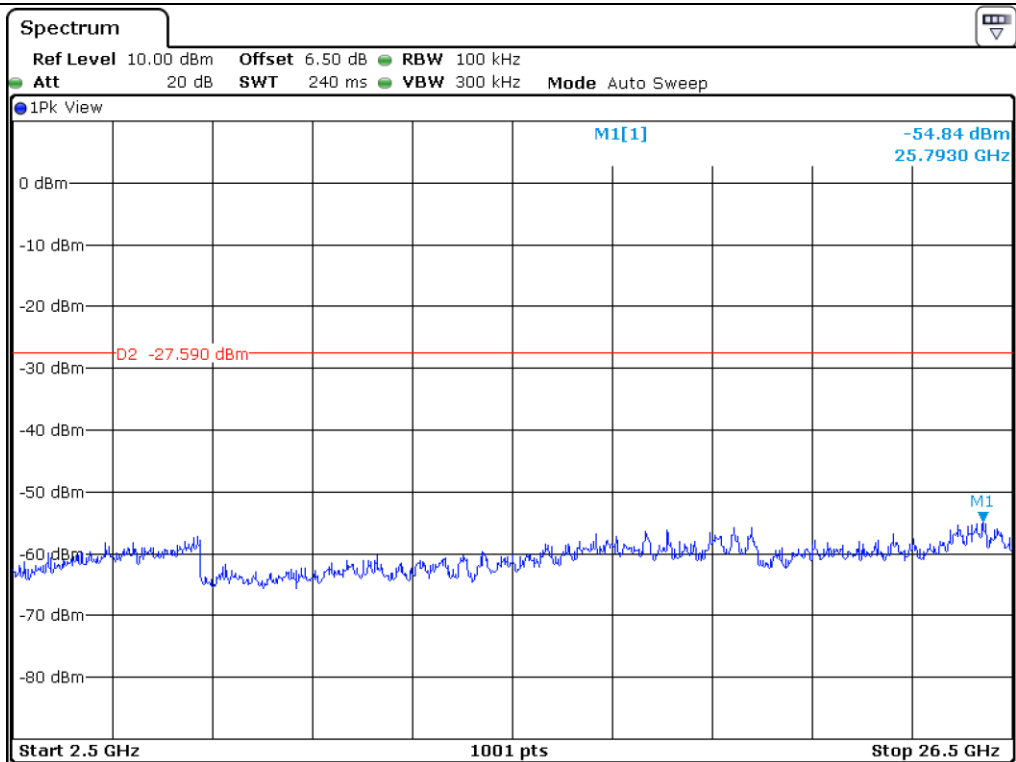


Low Channel

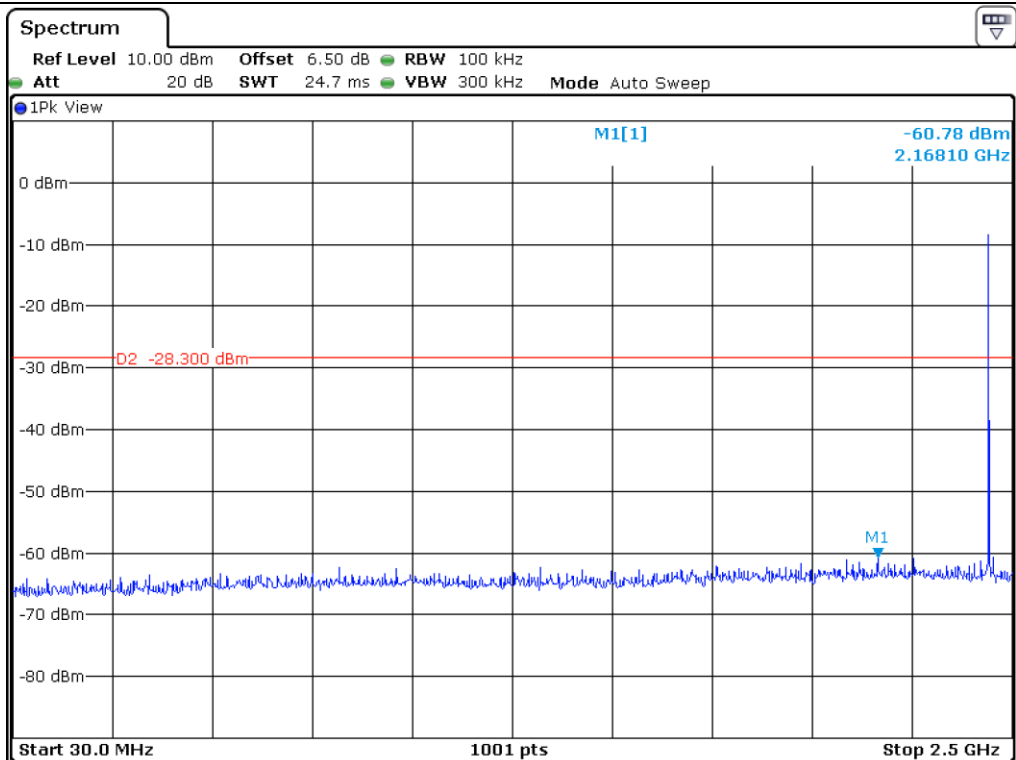


Middle Channel

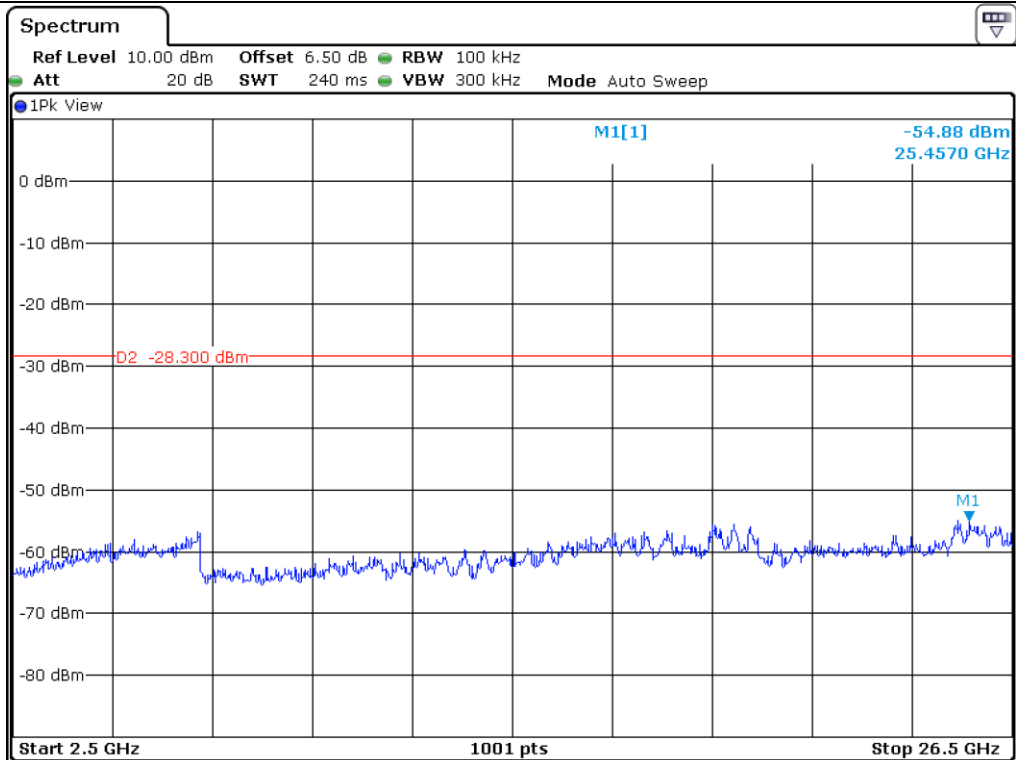

Middle Channel

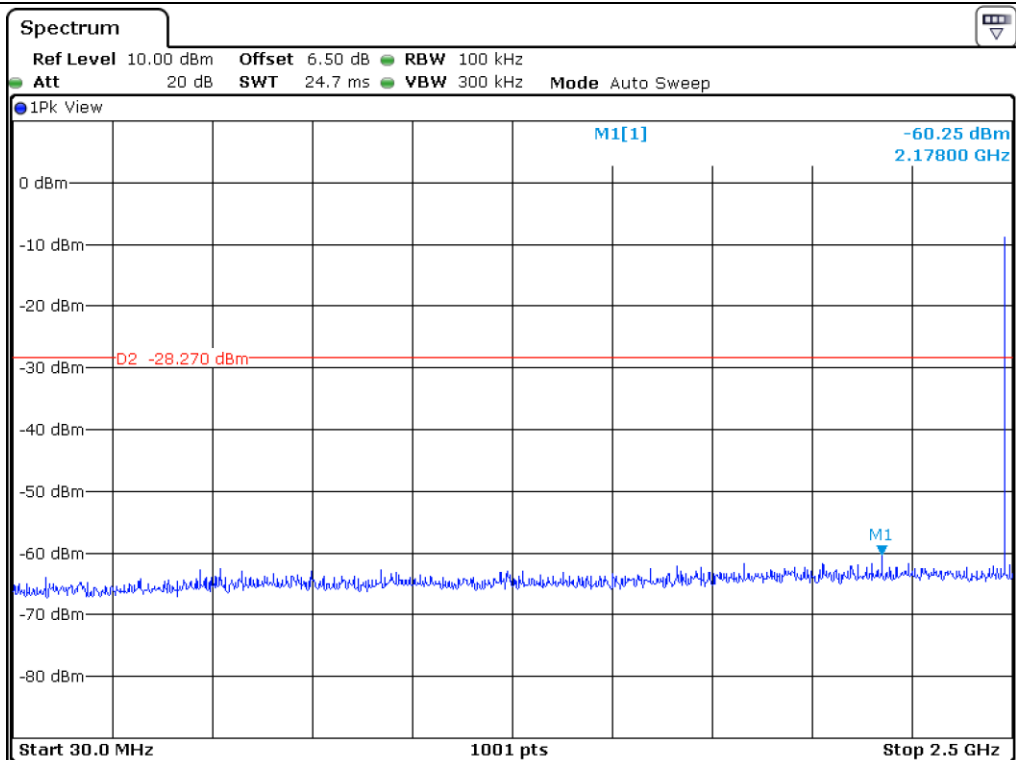

High Channel

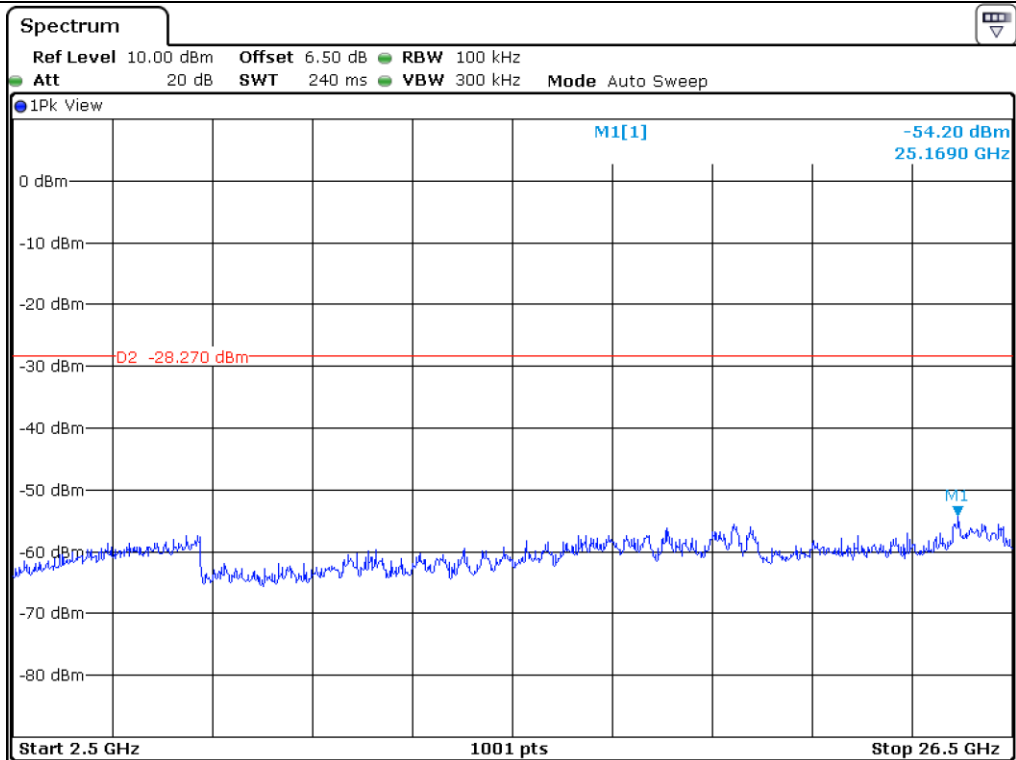

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- . Test Date : August 30, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Detector : Peak Mode(Peak), Average Mode(RMS)
- . Measurement distance : 3 m
- . Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
2 379.99	38.31	Peak	H	27.60	11.40	34.76	42.55	74.00	31.45
2 339.58	26.16	Average	H				30.40	54.00	23.60
2 350.46	38.23	Peak	V				42.47	74.00	31.53
2 341.55	25.54	Average	V				29.78	54.00	24.22
Test Data for High Channel									
2 484.40	37.58	Peak	H	27.80	11.40	35.47	41.31	74.00	32.69
2 497.86	25.41	Average	H				29.14	54.00	24.86
2 492.90	37.99	Peak	V				41.72	74.00	32.28
2 492.94	25.66	Average	V				29.39	54.00	24.61

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-Amplifier Gain}$$



Tested by: Yu-Seog Sim / Assistant Manager

9.6.2 Spurious & Harmonic Radiated Emission

- Test Date : August 30, 2019
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel									
4 804.00	38.34	Peak	H	31.00	16.10	35.84	49.60	74.00	24.40
	24.37	Average	H				35.63	54.00	18.37
	38.04	Peak	V				49.30	74.00	24.70
	21.62	Average	V				32.88	54.00	21.12
Test Data for Middle Channel									
4 880.00	34.68	Peak	H	31.10	16.10	35.92	45.96	74.00	28.04
	21.62	Average	H				32.90	54.00	21.10
	34.77	Peak	V				46.05	74.00	27.95
	21.25	Average	V				32.53	54.00	21.47
Test Data for High Channel									
4 960.00	37.58	Peak	H	31.20	16.10	36.01	48.87	74.00	25.13
	25.41	Average	H				36.70	54.00	17.30
	37.99	Peak	V				49.28	74.00	24.72
	25.66	Average	V				36.95	54.00	17.05

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss – Pre-Amplifier Gain



Tested by: Yu-Seog Sim / Assistant Manager

10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.



10.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

10.4 Test data

-. Test Date : August 30, 2019


-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-22.58	8.00	30.58
Middle	2 440.00	-23.20	8.00	31.20
High	2 480.00	-23.21	8.00	31.21


Remark. Margin = Limit – Measured value

Tested by: Yu-Seog Sim / Assistant Manager

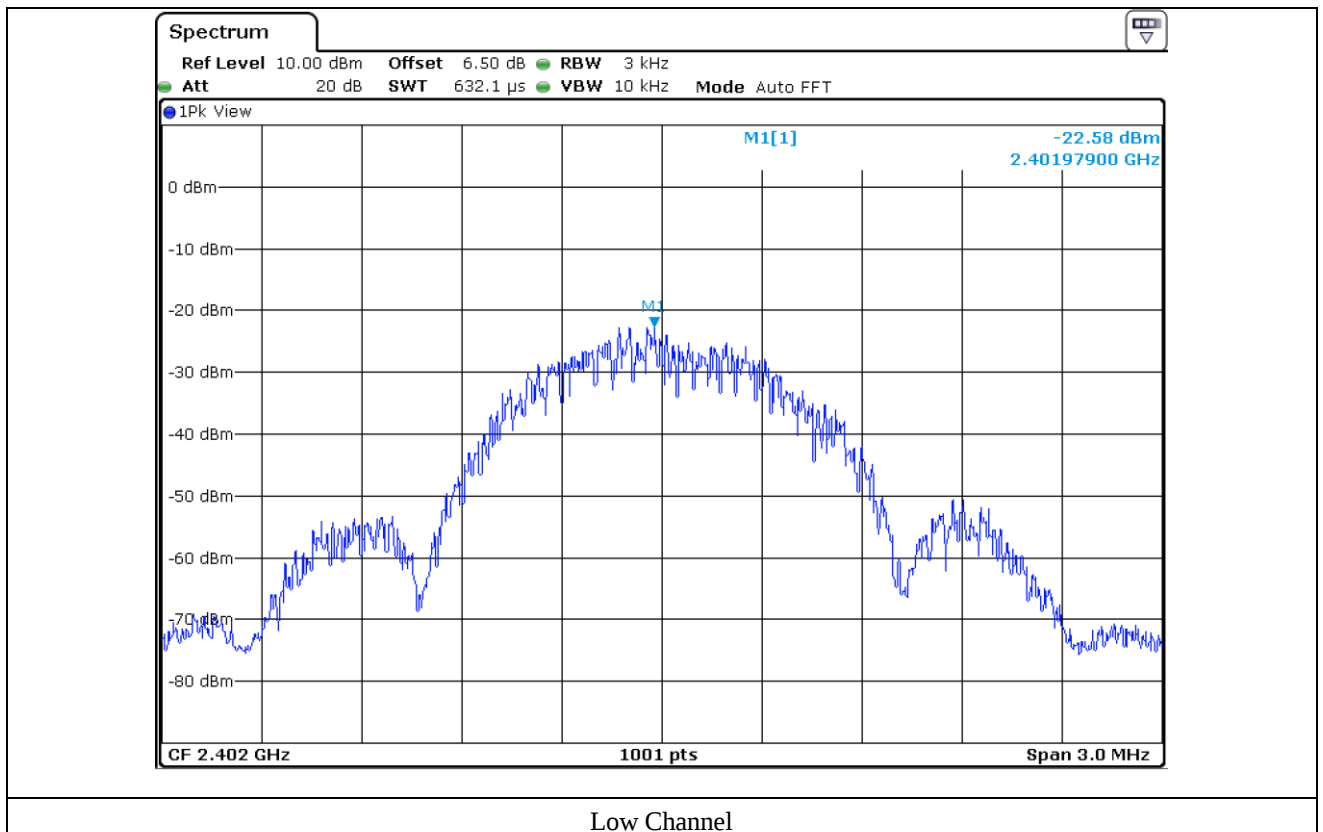

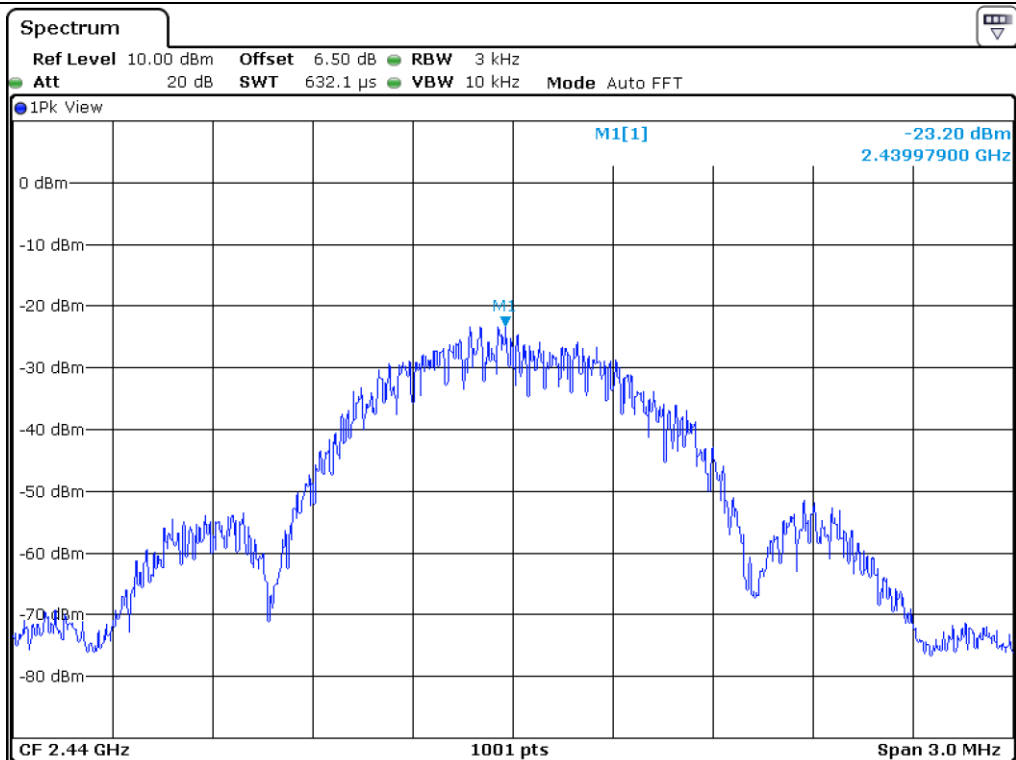

Middle Channel

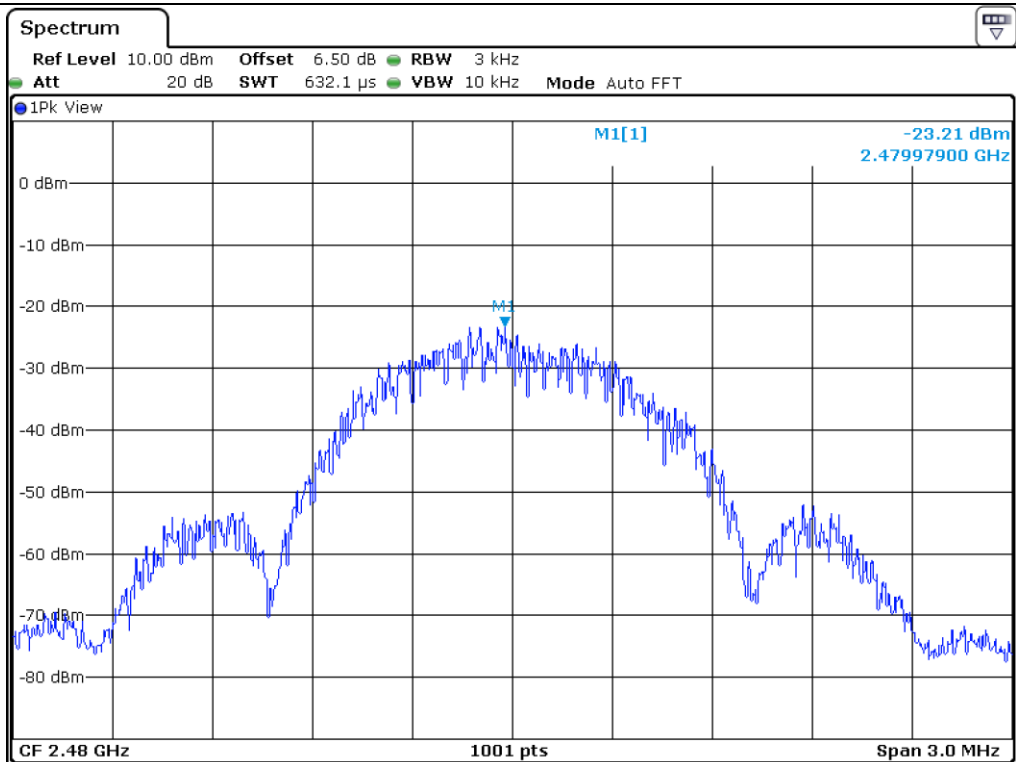

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H.

11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

11.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 22, 2018 (1Y)
■ -	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 18, 2019 (1Y)
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Jul. 24, 2019 (1Y)
■ -	BBV 9718 B	Schwarzbeck	Broadband Preamplifier	009	Mar. 20, 2019 (1Y)
■ -	MA-4000XPET	Innco Systems GmbH	Antenna Master	MA4000/509	N/A
□ -	HD100	HD GmbH	Position Controller	N/A	N/A
■ -	DT3000-3t	Innco Systems GmbH	Turn Table	N/A	N/A
□ -	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
■ -	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-419	Aug. 09, 2018 (2Y)
■ -	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Jul. 16, 2019 (2Y)
■ -	BBHA9170	Schwarzbeck	Horn Antenna	BBHA91700179	Jan. 16, 2019 (1Y)
■ -	SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Mar. 11, 2019 (1Y)

All test equipment used is calibrated on a regular basis.

11.4 Test data for Transmitting Mode

11.4.1 Test data for 30 MHz ~ 1 GHz

Humidity Level : 47 % R.H.

Temperature: 24 °C


Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Immunoassay Analyzer

Date: September 09, 2019

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

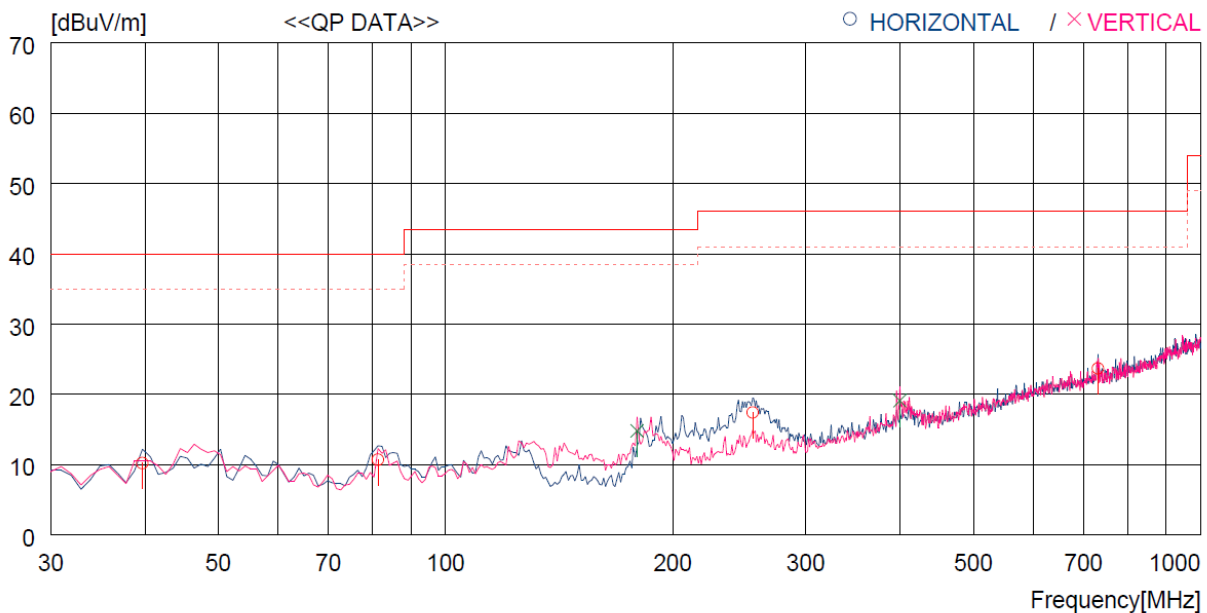

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	39.700	27.5	14.1	1.7	33.1	10.2	40.0	29.8	100	359
2	81.410	33.3	8.1	2.3	33.0	10.7	40.0	29.3	400	30
3	255.040	33.6	12.7	4.2	33.1	17.4	46.0	28.6	100	250
4	731.304	29.5	20.4	7.2	33.4	23.7	46.0	22.3	200	155
----- Vertical -----										
5	179.380	34.7	9.7	3.5	33.1	14.8	43.5	28.7	100	0
6	399.570	31.2	15.9	5.2	33.2	19.1	46.0	26.9	100	0

Tested by: Yu-Seog Sim / Assistant Manager

11.4.2 Test data for Below 30 MHz

- . Test Date : September 09, 2019
- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									

11.4.3 Test data for above 1 GHz

- . Test Date : September 09, 2019
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
All emissions observed were 20dB below the limit.									



Tested by: Yu-Seog Sim / Assistant Manager

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 24 °C
Relative humidity : 47 % R.H

12.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.


12.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ -	ESCI	Rohde & Schwarz	Test Receiver	101420	Mar. 28, 2019 (1Y)
■ -	3825/2	EMCO	AMN	9109-1867	Mar. 27, 2019 (1Y)
■ -	NSLK8126	Schwarzbeck	LISN	8126-480	Oct. 22, 2018 (1Y)
■ -	11947A	Hewlett Packard	Transient Limiter	3107A02762	Mar. 28, 2019 (1Y)

All test equipment used is calibrated on a regular basis.


12.4 Test data

- Test Date : September 03, 2019
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

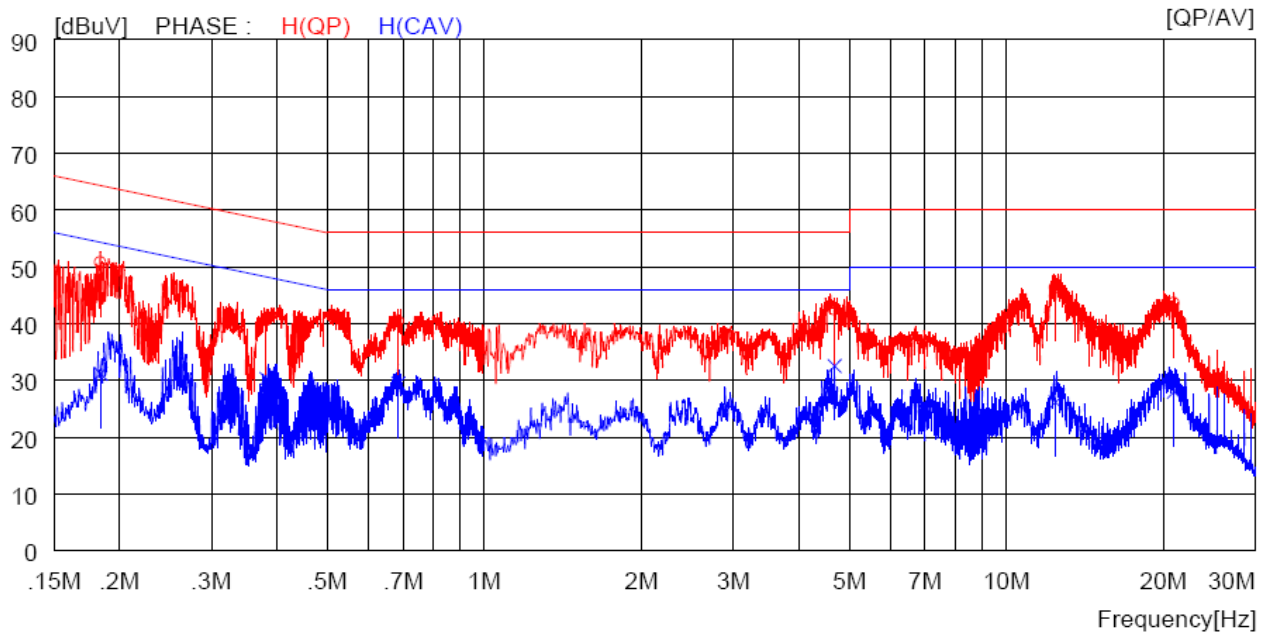

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.18400	40.7	----	10.1	50.8	----	64.3	----	13.5	----	H (QP)
2	0.38200	30.5	----	10.1	40.6	----	58.2	----	17.6	----	H (QP)
3	0.68400	30.4	----	10.1	40.5	----	56.0	----	15.5	----	H (QP)
4	4.68800	32.4	----	10.1	42.5	----	56.0	----	13.5	----	H (QP)
5	12.43000	36.1	----	10.3	46.4	----	60.0	----	13.6	----	H (QP)
6	20.96000	33.2	----	10.4	43.6	----	60.0	----	16.4	----	H (QP)
7	0.18400	----	21.1	10.1	----	31.2	----	54.3	----	23.1	H (CAV)
8	0.38200	----	20.2	10.1	----	30.3	----	48.2	----	17.9	H (CAV)
9	0.68400	----	19.4	10.1	----	29.5	----	46.0	----	16.5	H (CAV)
10	4.68800	----	22.5	10.1	----	32.6	----	46.0	----	13.4	H (CAV)
11	12.43000	----	15.9	10.3	----	26.2	----	50.0	----	23.8	H (CAV)
12	20.96000	----	17.6	10.4	----	28.0	----	50.0	----	22.0	H (CAV)

-. Tested Line : NEUTRAL LINE

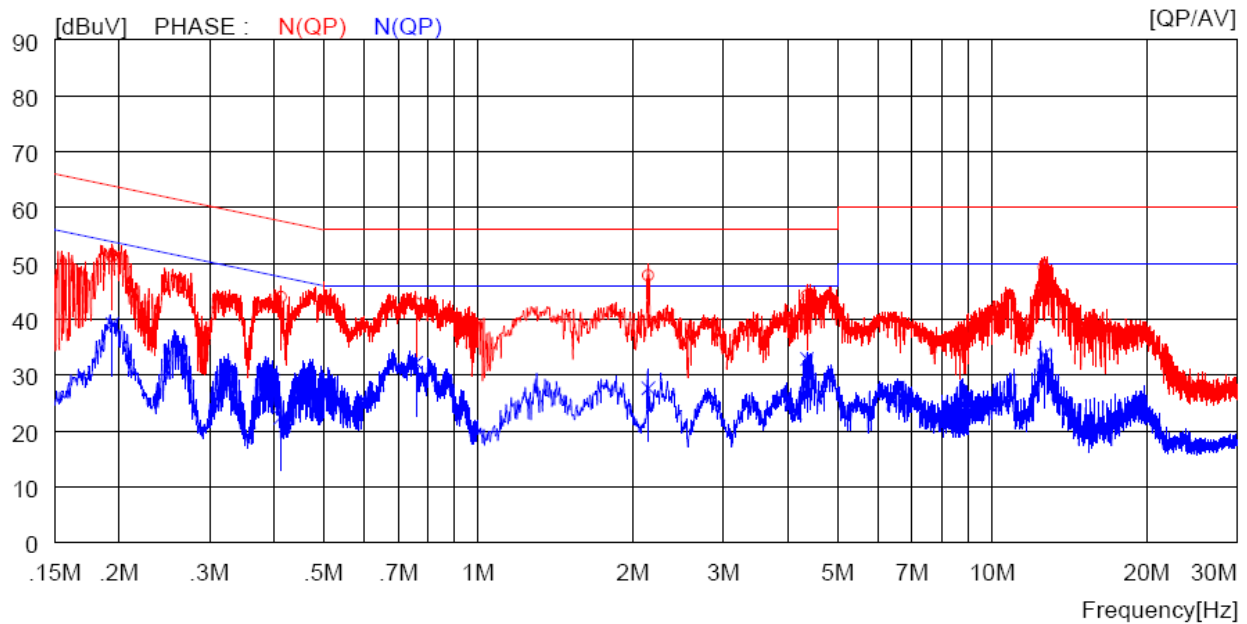

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.19400	41.2	----	10.1	51.3	----	63.9	----	12.6	----	N(QP)
2	0.41300	33.9	----	10.1	44.0	----	57.6	----	13.6	----	N(QP)
3	0.75700	32.8	----	10.1	42.9	----	56.0	----	13.1	----	N(QP)
4	2.14400	37.8	----	10.1	47.9	----	56.0	----	8.1	----	N(QP)
5	4.36400	34.1	----	10.1	44.2	----	56.0	----	11.8	----	N(QP)
6	12.63000	39.0	----	10.3	49.3	----	60.0	----	10.7	----	N(QP)
7	0.19400	----	29.1	10.1	----	39.2	----	53.9	----	14.7	N(CAV)
8	0.41300	----	12.3	10.1	----	22.4	----	47.6	----	25.2	N(CAV)
9	0.75700	----	22.1	10.1	----	32.2	----	46.0	----	13.8	N(CAV)
10	2.14400	----	17.6	10.1	----	27.7	----	46.0	----	18.3	N(CAV)
11	4.36400	----	22.8	10.1	----	32.9	----	46.0	----	13.1	N(CAV)
12	12.63000	----	23.4	10.3	----	33.7	----	50.0	----	16.3	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Yu-Seog Sim / Assistant Manager