


A

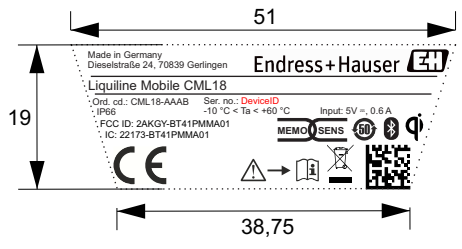

B

Variables:

DeviceID serial number e.g.: LC026B05LC0

 Data Matrix Code including serial number




C

General font: ARIAL 3,5 pt, not printed in bold!
 Exception: Product name ,Liquiline Mobile CML 18': ARIAL, 5 pt, not printed in bold!

D

E

ISO 13715 GPS-FUNDAMENTALS ISO 8015
 ISO 1101 GPS-DIMENSIONAL TOLERANCING ISO 14405
 ISO 1302 GPS-DRAWING INDICATIONS ISO 10135

 Endress+Hauser Endress+Hauser Conducta GmbH & Co. KG Gerlingen, Germany	Refer to protection notice ISO 16016 Classification Confidential		Scale 1:1	Tolerance -----
	Title Typenschild Liquiline Mobile CML18 Nameplate Liquiline Mobile CML18	Notif. no. -----	Designed 12.09.19 Zipf	Drawing chng. -----
		Number of changes -----	Welding contr.	Approval contr.
	Status in development		Pressure contr.	Released -----
	Project CML18	No. of document 201987	Version A	Doc. part 000
	Material -----	Weight -----	Volume -----	Format A4
	SAP material no. 71453547	Page 1 of 1		

F

Made in Germany
Dieselstraße 24, 70639 Gerlingen

Endress+Hauser 

Liquiline Mobile CML18

Ord. cd.: CML18-AA**
IP66

Ser. no.: PB005E05MH0
-10 °C < Ta < +60 °C

Input: 5V =, 0.6 A

FCC ID: 2AKGY-BT41PMMA01
IC: 22173-BT41PMMA01

MEMO SENS

