



Test Mode: TX / IEEE 802.11g (CH High)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 3, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1738.000	56.33	-6.40	49.93	74.00	-24.07	V	Peak
1945.000	51.71	-5.35	46.36	74.00	-27.64	V	Peak
2467.000	50.07	-2.44	47.63	74.00	-26.37	V	Peak
3403.000	43.33	-0.68	42.65	74.00	-31.35	V	Peak
3970.000	43.12	1.46	44.58	74.00	-29.42	V	Peak
4924.000	48.36	4.73	53.09	74.00	-20.91	V	Peak
4924.000	34.93	4.73	39.66	54.00	-14.34	V	AVG
1711.000	50.66	-6.46	44.20	74.00	-29.80	H	Peak
2485.000	47.00	-2.34	44.66	74.00	-29.34	H	Peak
3205.000	43.95	-1.02	42.93	74.00	-31.07	H	Peak
3709.000	42.63	0.36	42.99	74.00	-31.01	H	Peak
4312.000	42.99	2.69	45.68	74.00	-28.32	H	Peak
4870.000	43.54	4.56	48.10	74.00	-25.90	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Combine with Antenna 1 and Antenna 2**

**Test Mode:** TX / IEEE 802.11n HT20 MHz (CH Low)

**Tested by:** Sam Zeng

**Ambient temperature:** 24°C      **Relative humidity:** 52% RH

**Date:** June 3, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1990.000	49.75	-5.06	44.69	74.00	-29.31	V	Peak
2224.000	48.15	-3.77	44.38	74.00	-29.62	V	Peak
2494.000	45.84	-2.29	43.55	74.00	-30.45	V	Peak
3484.000	44.15	-0.55	43.60	74.00	-30.40	V	Peak
4132.000	42.01	2.05	44.06	74.00	-29.94	V	Peak
4825.000	55.25	4.41	59.66	74.00	-14.34	V	Peak
4825.000	40.04	4.41	44.45	54.00	-9.55	V	AVG
1504.000	47.67	-6.87	40.80	74.00	-33.20	H	Peak
2233.000	51.41	-3.72	47.69	74.00	-26.31	H	Peak
2503.000	46.63	-2.25	44.38	74.00	-29.62	H	Peak
3043.000	44.21	-1.29	42.92	74.00	-31.08	H	Peak
3979.000	42.60	1.50	44.10	74.00	-29.90	H	Peak
4825.000	46.44	4.41	50.85	74.00	-23.15	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Test Mode: TX / IEEE 802.11n HT20 MHz (CH Mid)Tested by: Sam ZengAmbient temperature: 24°C Relative humidity: 52% RHDate: June 3, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1756.000	49.79	-6.36	43.43	74.00	-30.57	V	Peak
2503.000	47.35	-2.25	45.10	74.00	-28.90	V	Peak
2926.000	44.21	-1.49	42.72	74.00	-31.28	V	Peak
3790.000	43.34	0.70	44.04	74.00	-29.96	V	Peak
4879.000	50.90	4.59	55.49	74.00	-18.51	V	Peak
4879.000	44.66	4.59	49.25	54.00	-4.75	V	AVG
6049.000	40.74	6.16	46.90	74.00	-27.10	V	Peak
2215.000	51.54	-3.82	47.72	74.00	-26.28	H	Peak
2512.000	46.80	-2.24	44.56	74.00	-29.44	H	Peak
3088.000	44.51	-1.21	43.30	74.00	-30.70	H	Peak
4114.000	41.35	1.99	43.34	74.00	-30.66	H	Peak
4879.000	45.89	4.59	50.48	74.00	-23.52	H	Peak
5878.000	40.66	6.03	46.69	74.00	-27.31	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / EEE 802.11n HT20 MHz (CH High)

Tested by: Sam Zeng

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 3, 2017

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1999.000	49.88	-5.01	44.87	74.00	-29.13	V	Peak
2458.000	48.04	-2.49	45.55	74.00	-28.45	V	Peak
4249.000	41.62	2.47	44.09	74.00	-29.91	V	Peak
4915.000	54.50	4.70	59.20	74.00	-14.80	V	Peak
4915.000	36.53	4.70	41.23	54.00	-12.77	V	AVG
6094.000	40.87	6.23	47.10	74.00	-26.90	V	Peak
7390.000	44.94	8.46	53.40	74.00	-20.60	V	Peak
1765.000	51.76	-6.35	45.41	74.00	-28.59	H	Peak
2215.000	48.36	-3.82	44.54	74.00	-29.46	H	Peak
2467.000	47.74	-2.44	45.30	74.00	-28.70	H	Peak
3340.000	43.34	-0.79	42.55	74.00	-31.45	H	Peak
4429.000	41.38	3.10	44.48	74.00	-29.52	H	Peak
4924.000	46.09	4.73	50.82	74.00	-23.18	H	Peak

**REMARKS:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



### 7.3. 6dB BANDWIDTH MEASUREMENT

#### 7.3.1. LIMITS

According to §15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 7.3.2. TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

#### 7.3.3. TEST PROCEDURES (please refer to measurement standard)

##### 8.1 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

#### 7.3.4. TEST SETUP

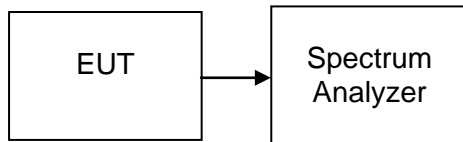



### 7.3.5. TEST RESULTS

No non-compliance noted

#### Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		Antenna 1	Antenna 2		
Low	2412	10060	10080	>500	PASS
Mid	2437	10100	10140		PASS
High	2462	10120	10100		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		Antenna 1	Antenna 2		
Low	2412	16380	16360	>500	PASS
Mid	2437	16370	16360		PASS
High	2462	16370	16360		PASS

Test mode: IEEE 802.11n HT20 MHz


Channel	Frequency (MHz)	Bandwidth (kHz)		Limit (kHz)	Test Result
		Antenna 1	Antenna 2		
Low	2412	17580	17570	>500	PASS
Mid	2437	17590	17590		PASS
High	2462	17590	17350		PASS




### Test Plot



#### IEEE 802.11b mode (Antenna 1)

#### 6dB Bandwidth (CH Low)


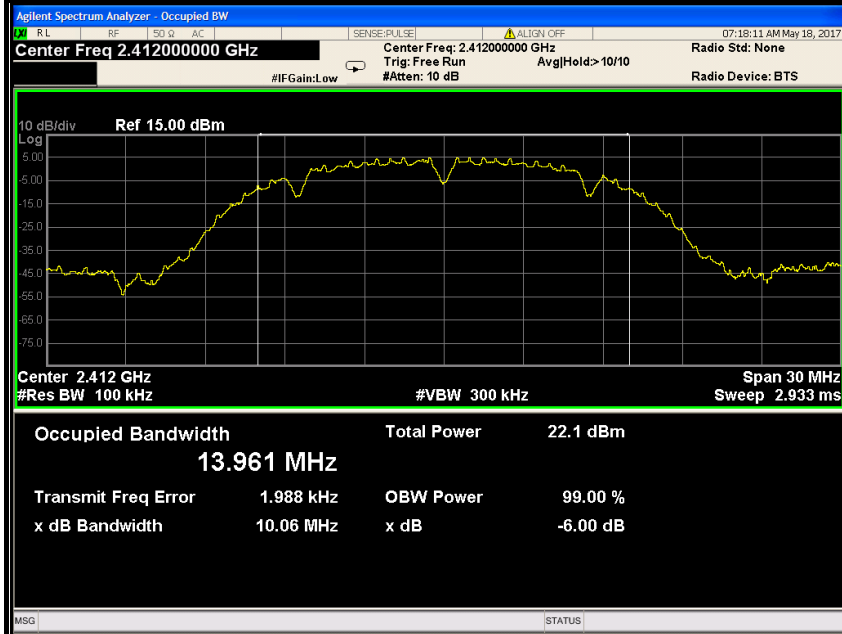



#### 6dB Bandwidth (CH Mid)

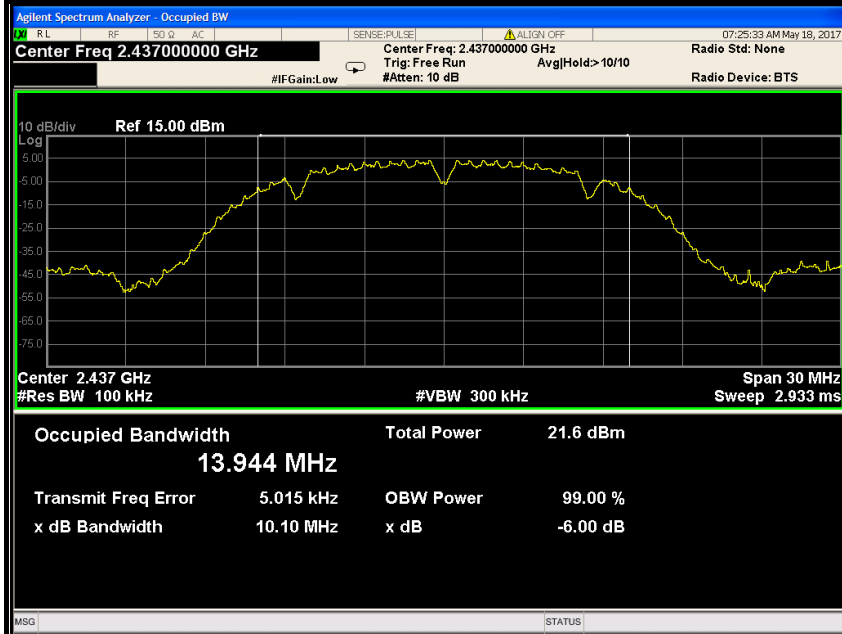


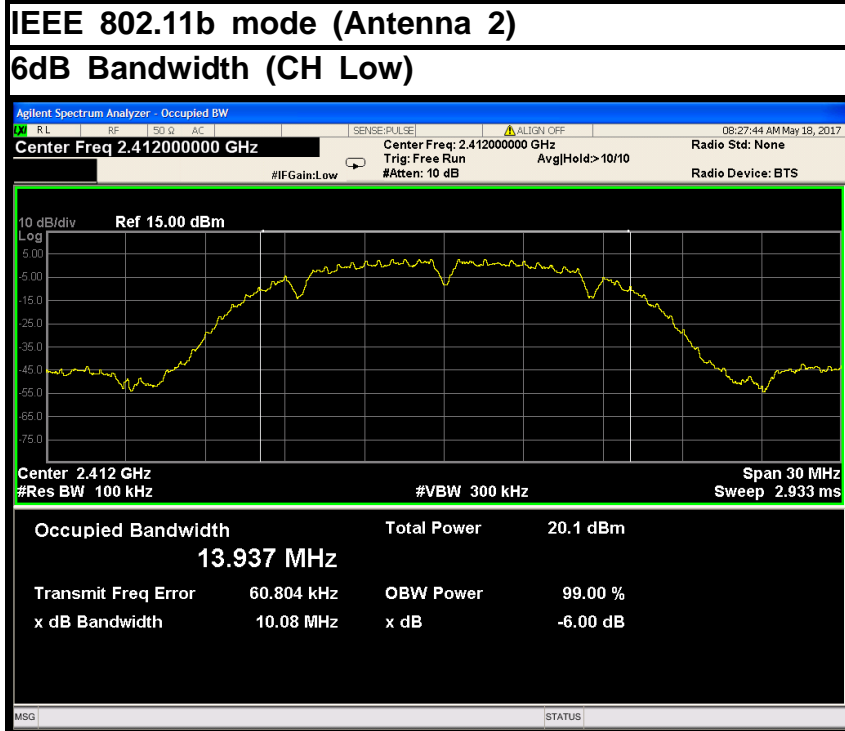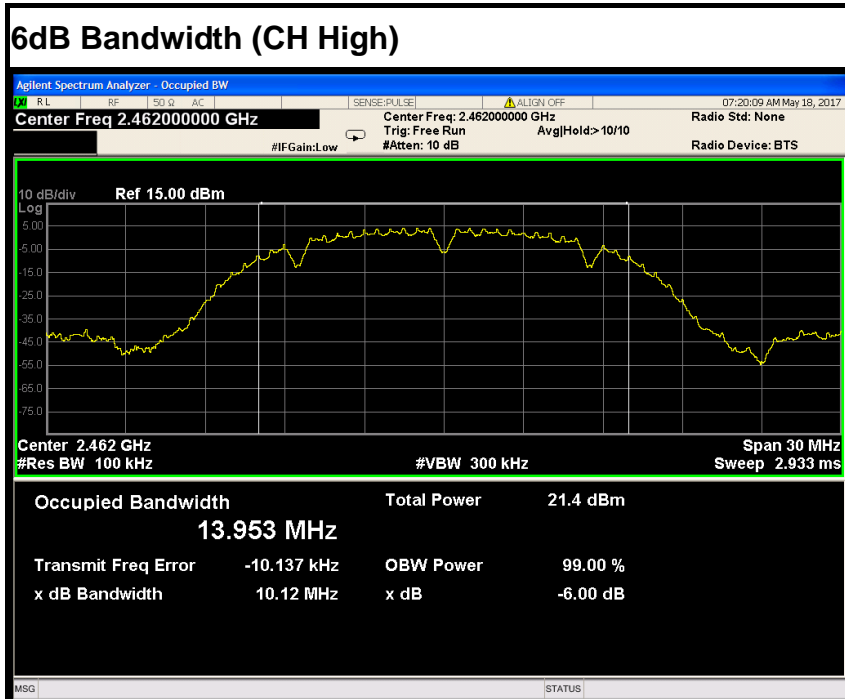




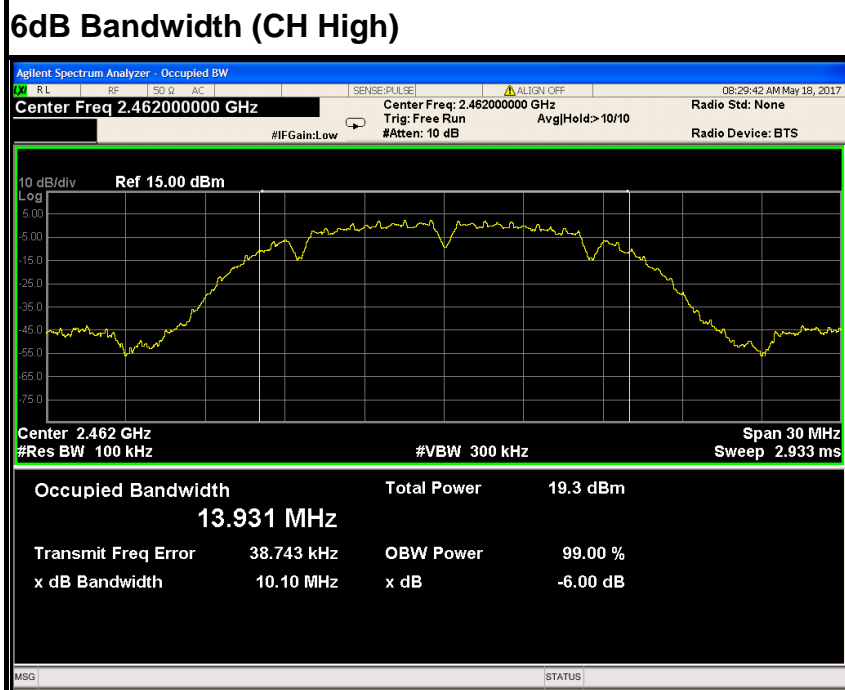
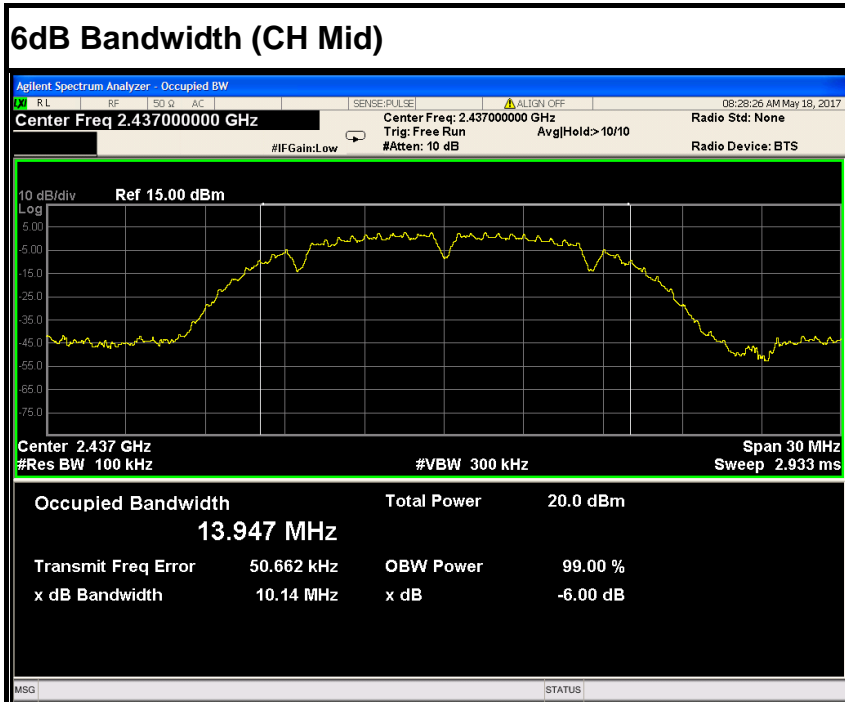



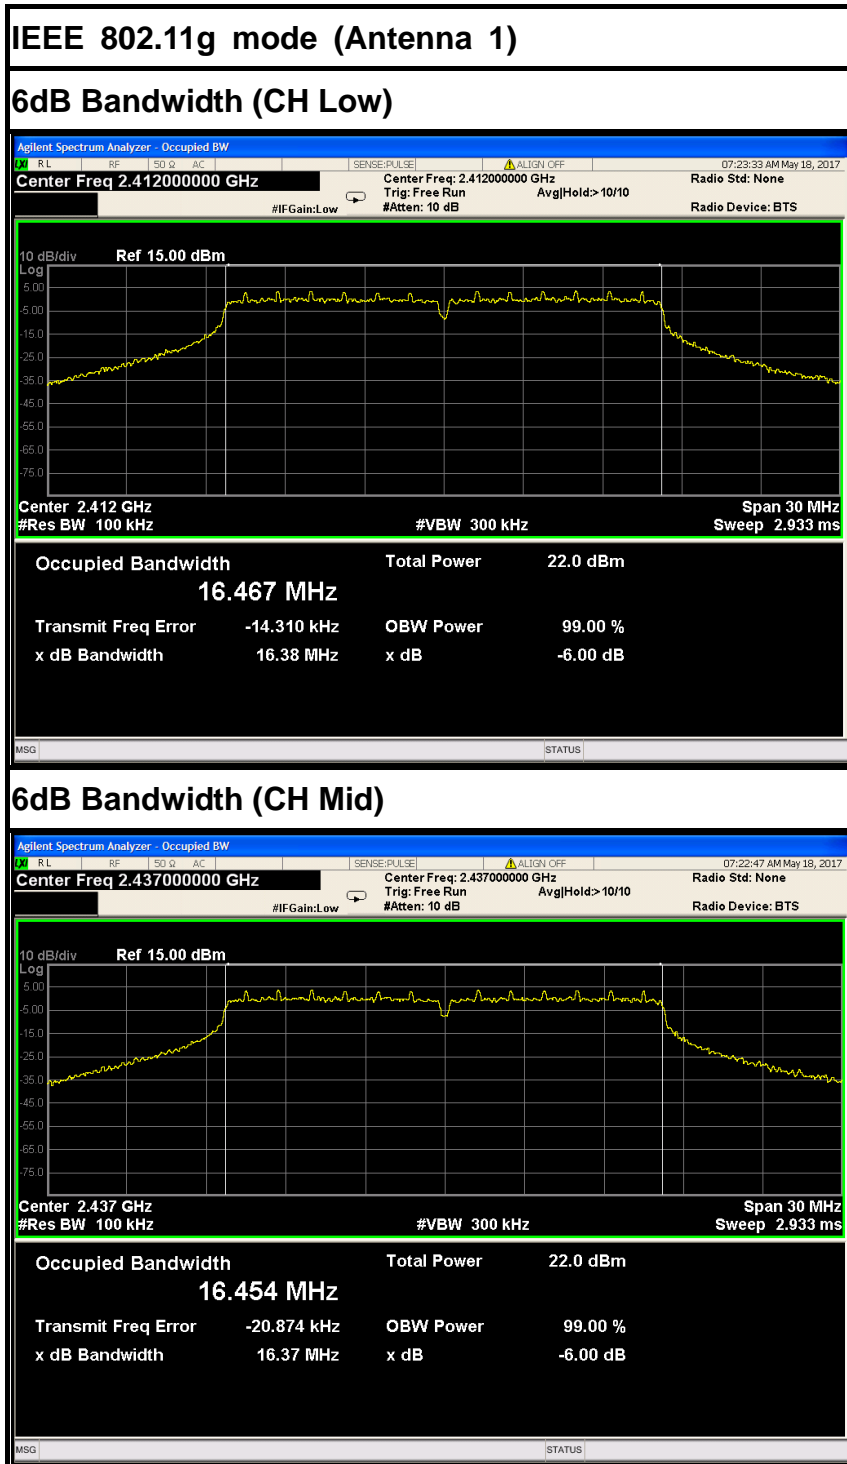


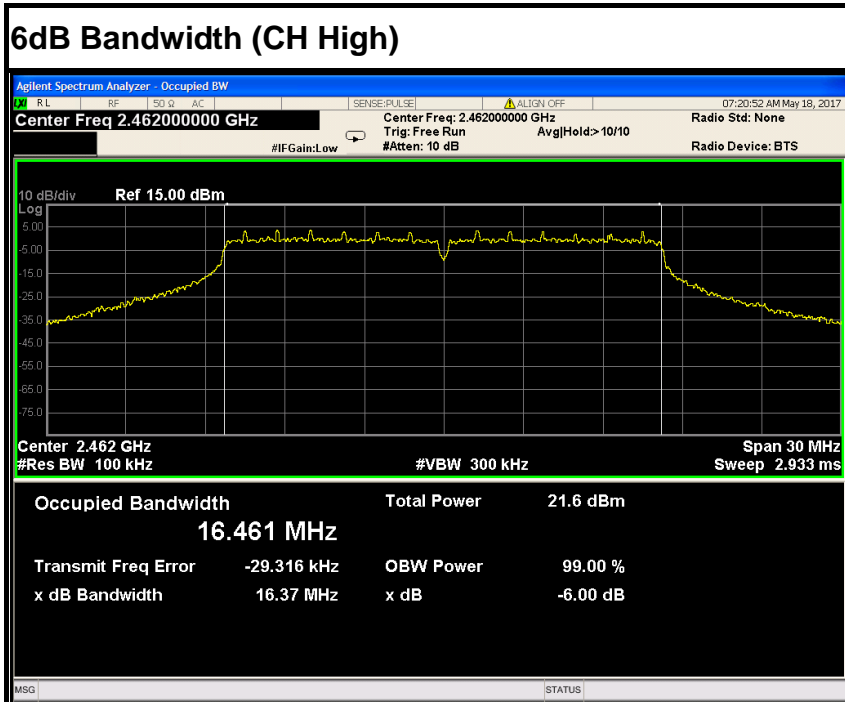


### IEEE 802.11g mode (Antenna 2)

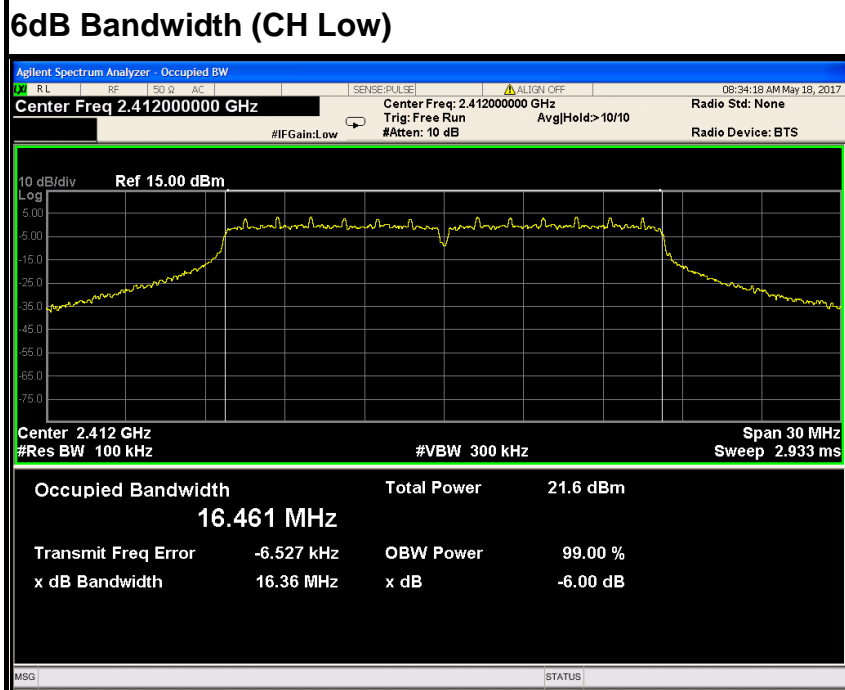


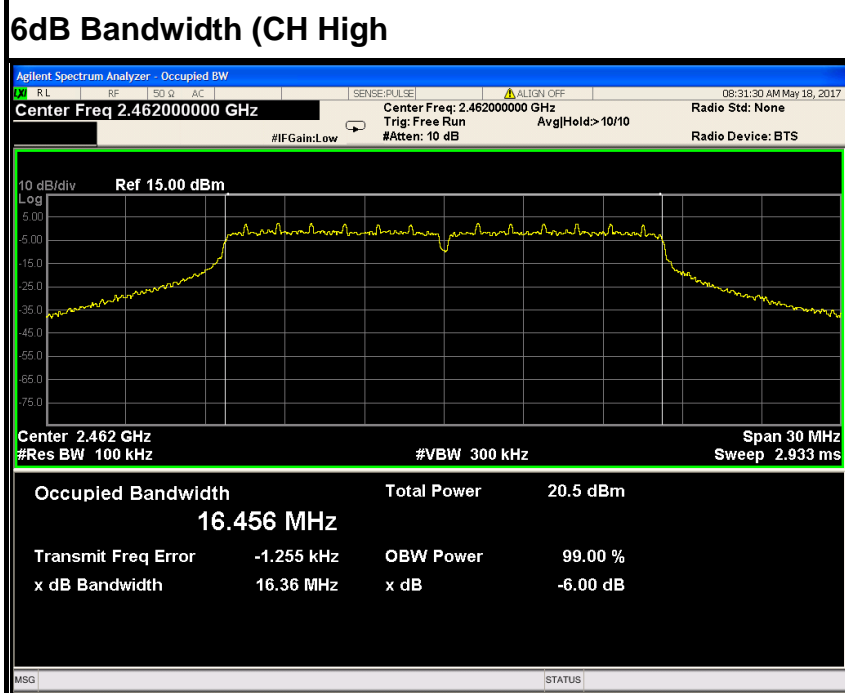
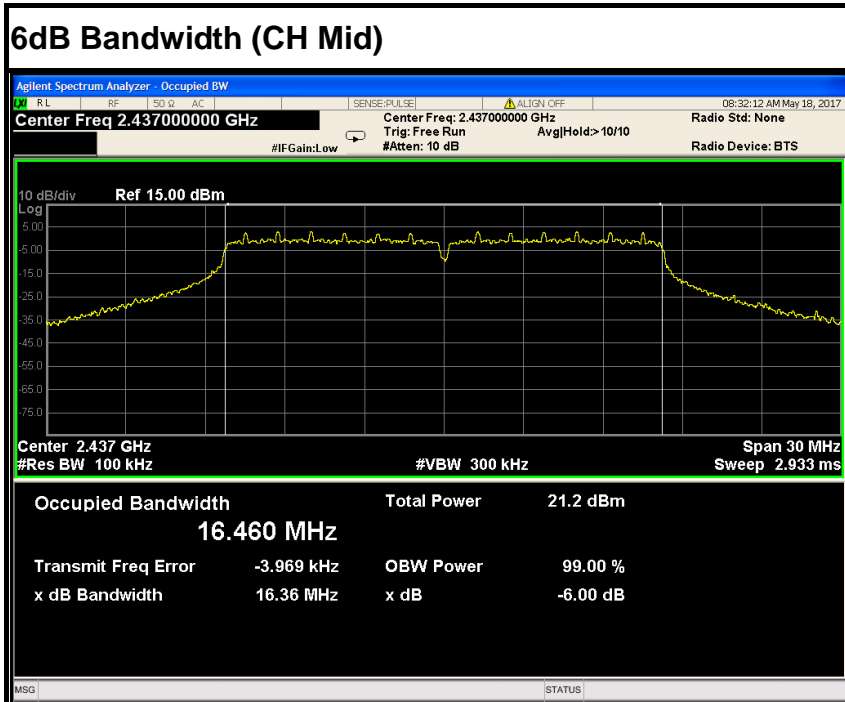


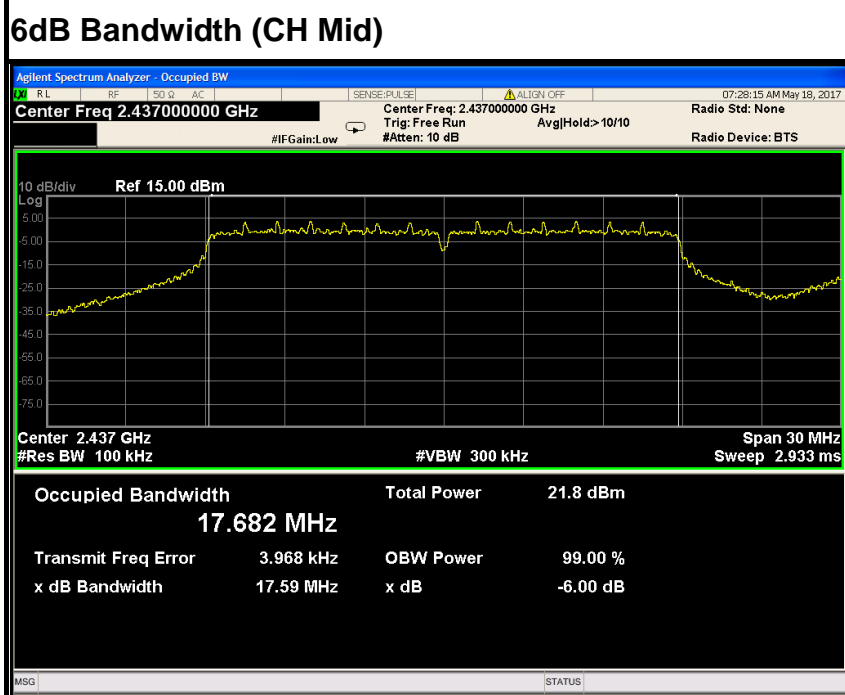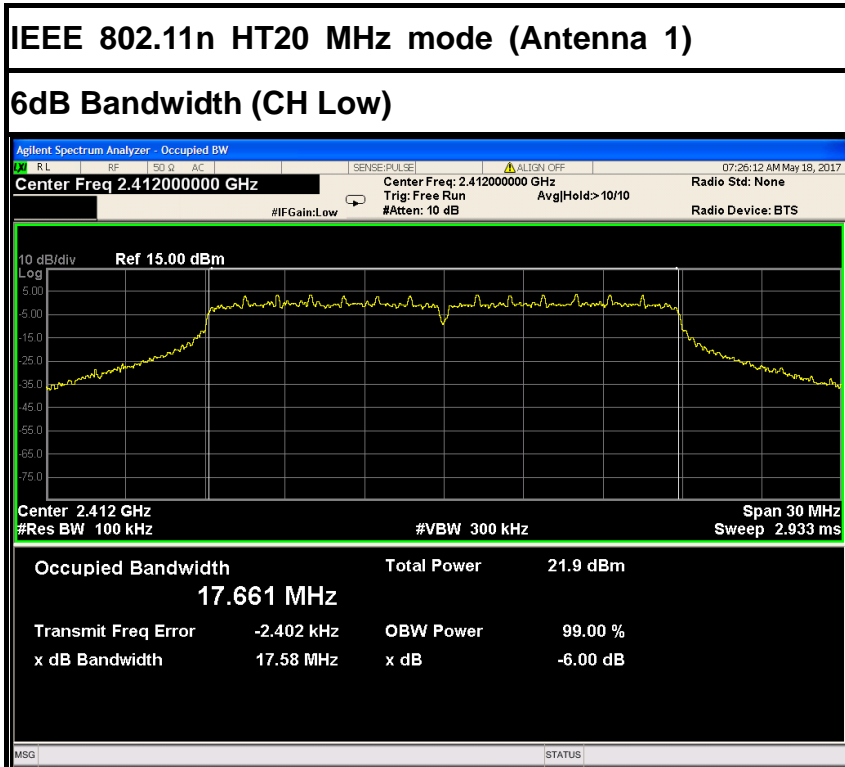

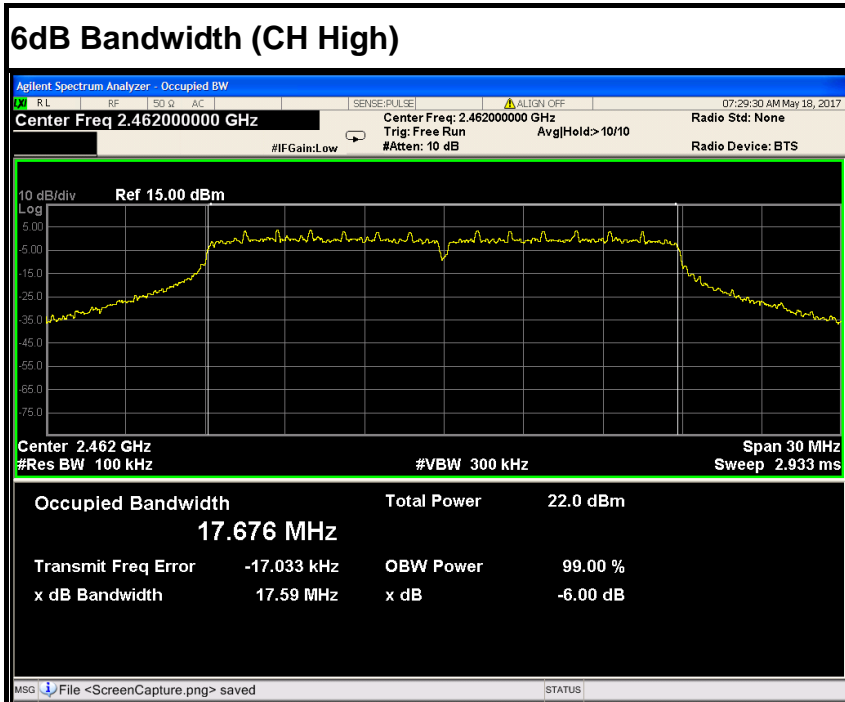

### IEEE 802.11n HT20 MHz mode (Antenna 2)

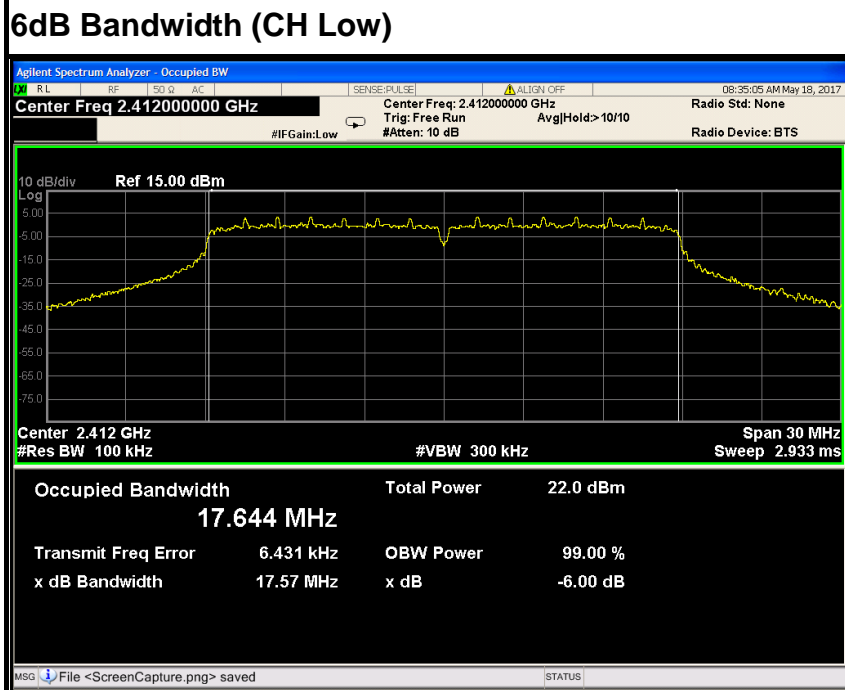

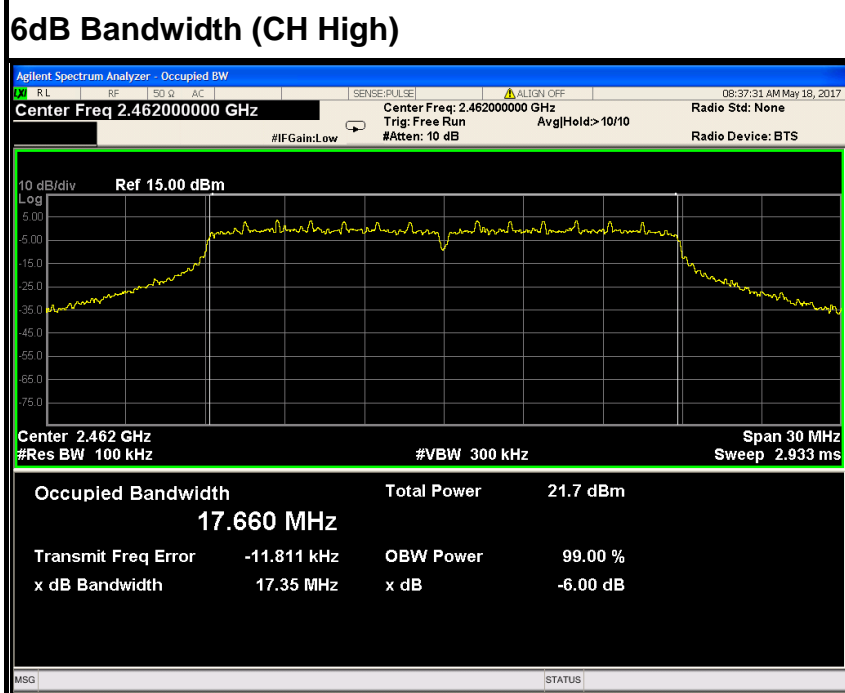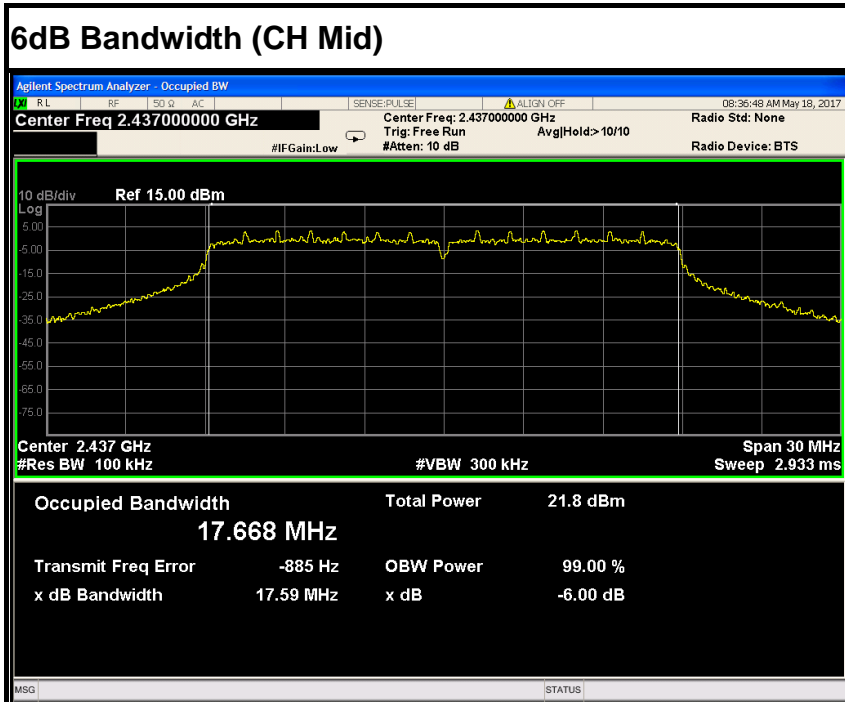



## 7.4. ANTENNA GAIN

### MEASUREMENT

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

### MEASUREMENT PARAMETERS

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz
Trace-Mode	Max hold

### LIMITS

FCC	IC
Antenna Gain	
6 dBi	





## **TEST RESULTS**

### **Test mode: IEEE 802.11b (Antenna 1)**

<b>T<sub>nom</sub></b>	<b>V<sub>nom</sub></b>	<b>Lowest channel 2412MHz</b>	<b>Middle channel 2437MHz</b>	<b>Highest channel 2462MHz</b>
Conducted power [dBm/MHz] Measured with DSSS modulation		6.15	6.26	5.95
Radiated power [dBm/MHz] Measured with DSSS modulation		7.24	7.80	8.36
Gain [dBi] Calculated		1.09	1.54	2.41
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		

### **Test mode: IEEE 802.11b (Antenna 2)**

<b>T<sub>nom</sub></b>	<b>V<sub>nom</sub></b>	<b>Lowest channel 2412MHz</b>	<b>Middle channel 2437MHz</b>	<b>Highest channel 2462MHz</b>
Conducted power [dBm/MHz] Measured with DSSS modulation		5.76	5.86	5.66
Radiated power [dBm/MHz] Measured with DSSS modulation		7.57	7.22	6.87
Gain [dBi] Calculated		1.81	1.36	1.21
Measurement uncertainty		± 1.5 dB (cond.) / ± 3 dB (rad.)		



## 7.5. PEAK OUTPUT POWER

### 7.5.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 7.5.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2017	02/20/2018
Power Sensor	Anritsu	MA2411B	1126150	02/21/2017	02/20/2018

### 7.5.3. TEST PROCEDURES (please refer to measurement standard)

#### 9.1.1 RBW $\geq$ DTS bandwidth


This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW  $\geq$  *DTS bandwidth*.
- b) Set VBW  $\geq$  3 RBW.
- c) Set span  $\geq$  3 x RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

#### 9.1.2 PKPM1 Peak power meter method

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

### 7.5.4. TEST SETUP

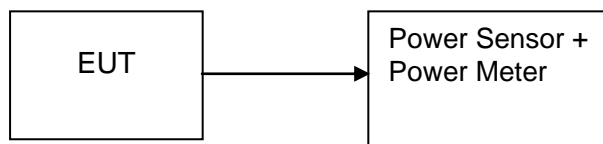



7.5.5. TEST RESULTS

No non-compliance noted

**Test Data**

**Test mode: IEEE 802.11b (Antenna 1)**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	17.60	0.05754	Peak	1	PASS
Mid	2437	17.70	0.05888			PASS
High	2462	17.40	0.05495			PASS
Low	2412	15.00	0.03162	AVG	1	PASS
Mid	2437	15.10	0.03236			PASS
High	2462	14.90	0.03090			PASS

**Test mode: IEEE 802.11b (Antenna 2)**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	17.20	0.05248	Peak	1	PASS
Mid	2437	17.30	0.05370			PASS
High	2462	17.10	0.05129			PASS
Low	2412	14.70	0.02951	AVG	1	PASS
Mid	2437	14.80	0.03020			PASS
High	2462	14.50	0.02818			PASS

**Test mode: IEEE 802.11g (Antenna 1)**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	24.50	0.28184	Peak	1	PASS
Mid	2437	24.80	0.30200			PASS
High	2462	24.40	0.27542			PASS
Low	2412	15.30	0.03388	AVG	1	PASS
Mid	2437	15.40	0.03467			PASS
High	2462	15.30	0.03388			PASS



**Test mode: IEEE 802.11g (Antenna 2)**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Peak / AVG	Limit (W)	Result
Low	2412	24.00	0.25119	Peak	1	PASS
Mid	2437	24.40	0.27542			PASS
High	2462	24.20	0.26303			PASS
Low	2412	14.90	0.03090	AVG	1	PASS
Mid	2437	14.90	0.03090			PASS
High	2462	14.90	0.03090			PASS

**Test mode: IEEE 802.11n HT20 MHz(Combine with Antenna 1 and Antenna 2)**

Channel	Frequency (MHz)	Output Power (dBm)			Output Power (W)	Peak / AVG	Limit (W)	Result
		Antenna 0	Antenna 1	Total				
Low	2412	24.20	23.80	27.01	0.50291	Peak	1	PASS
Mid	2437	24.40	23.70	27.07	0.50985			PASS
High	2462	24.00	23.80	26.91	0.49107			PASS
Low	2412	15.20	14.80	18.01	0.06331	AVG	1	PASS
Mid	2437	15.50	14.80	18.17	0.06568			PASS
High	2462	15.10	14.70	17.91	0.06187			PASS



## 7.6. BAND EDGES MEASUREMENT

### 7.6.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### 7.6.2. TEST INSTRUMENTS

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	02/21/2017	02/20/2018
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/28/2017	02/27/2018
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/28/2017	02/27/2018
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			


- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The FCC Site Registration number is 101879.
  3. N.C.R = No Calibration Required.



### 7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO / Detector=PEAK
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

### 7.6.4. TEST SETUP

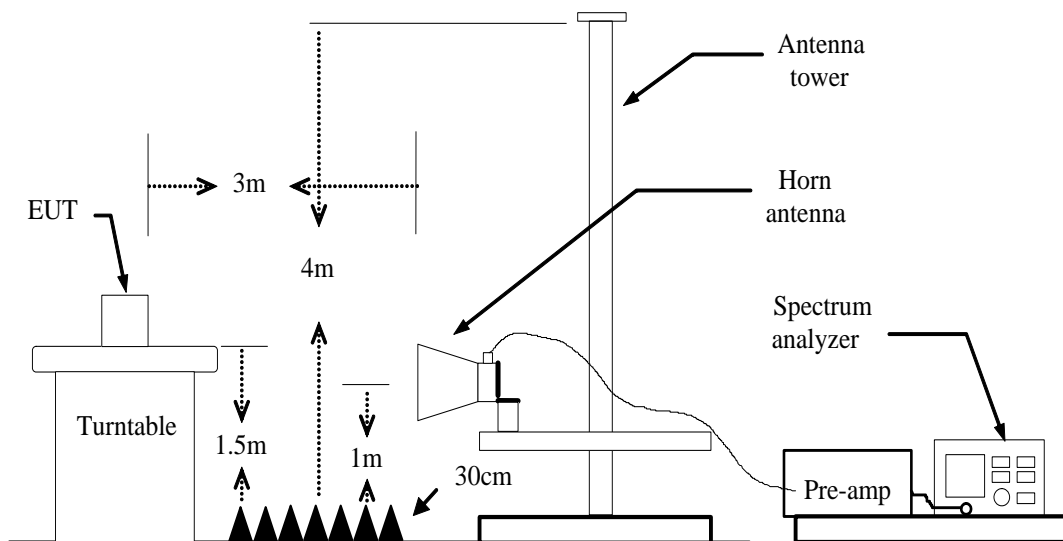





7.6.5. TEST RESULTS



Test Plot

IEEE 802.11b mode (Antenna 1)

Band Edges (CH Low)

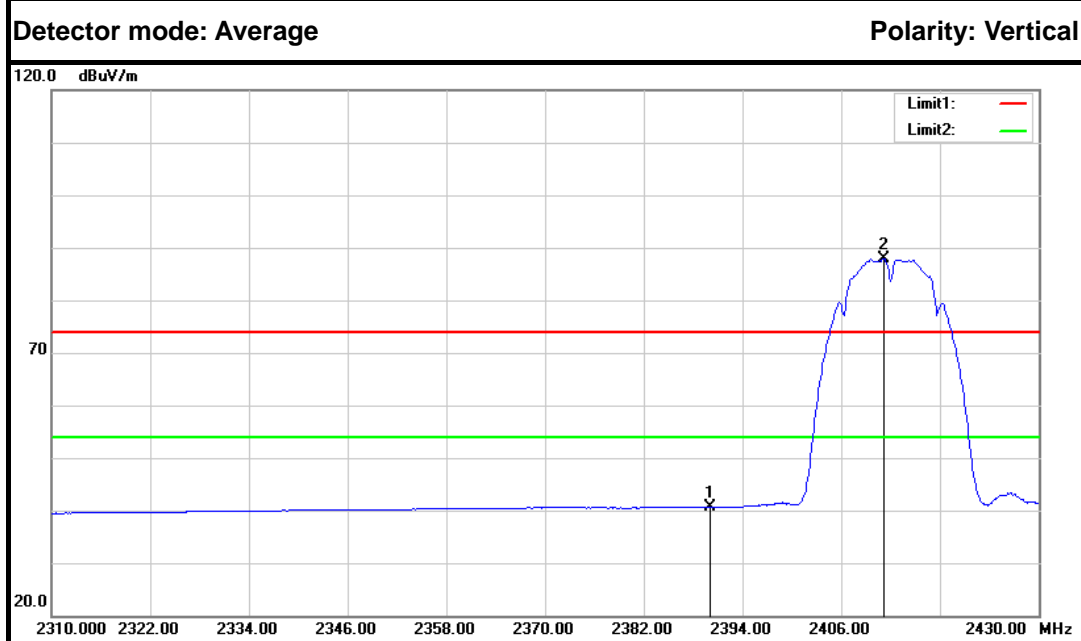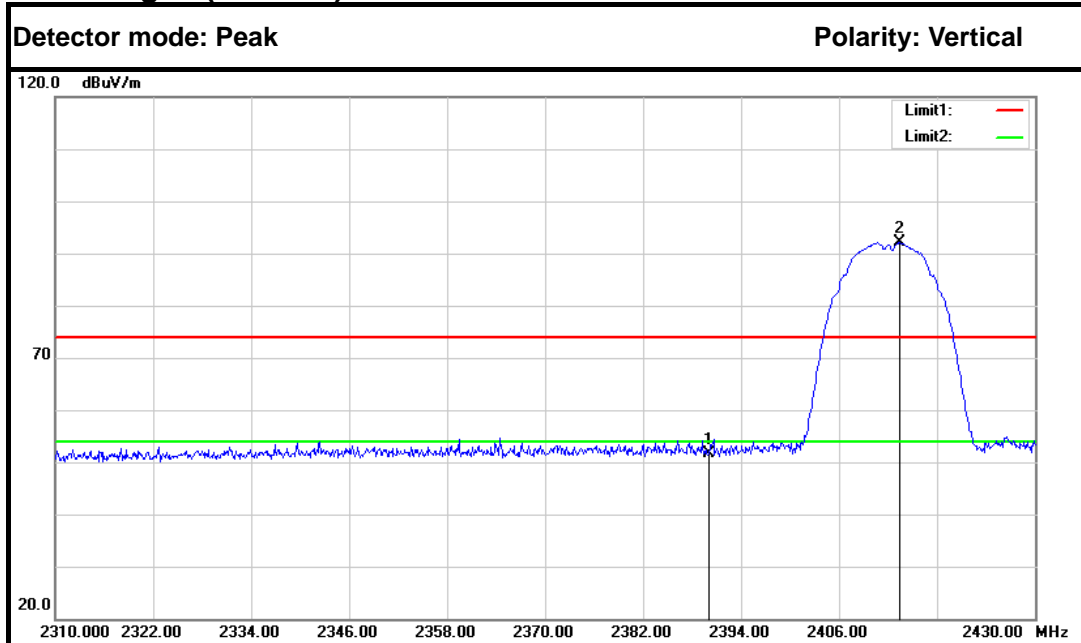

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	54.53	-2.86	51.67	74.00	-22.33	Peak	Vertical
2.	2413.440	94.78	-2.73	92.05	---	---	Peak	Vertical
1.	2390.000	43.53	-2.86	40.67	54.00	-13.33	Average	Vertical
2.	2411.160	90.60	-2.75	87.85	---	---	Average	Vertical

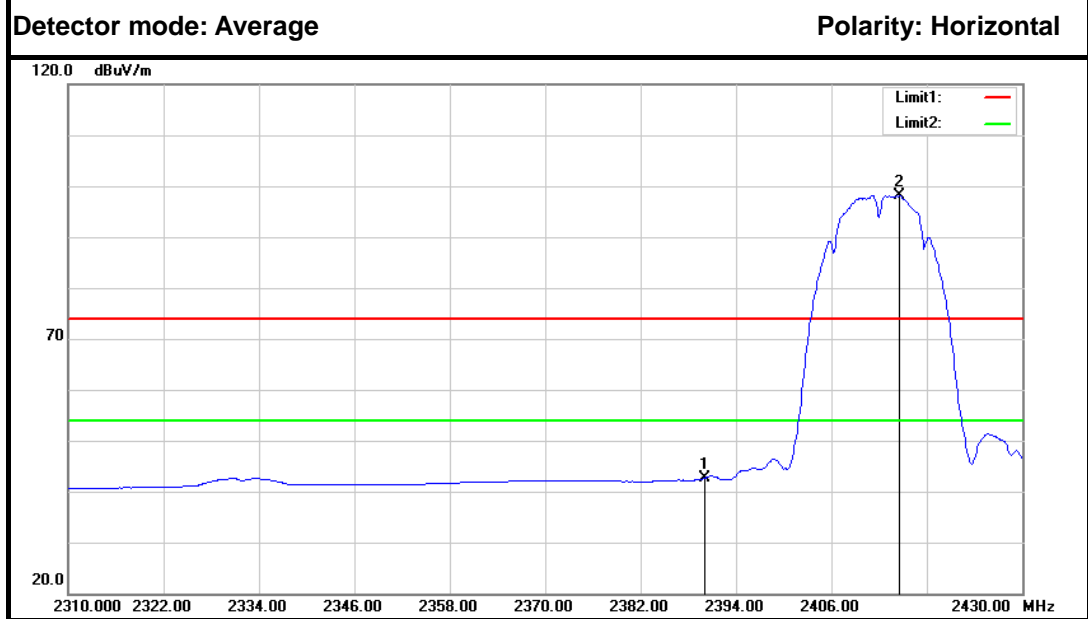
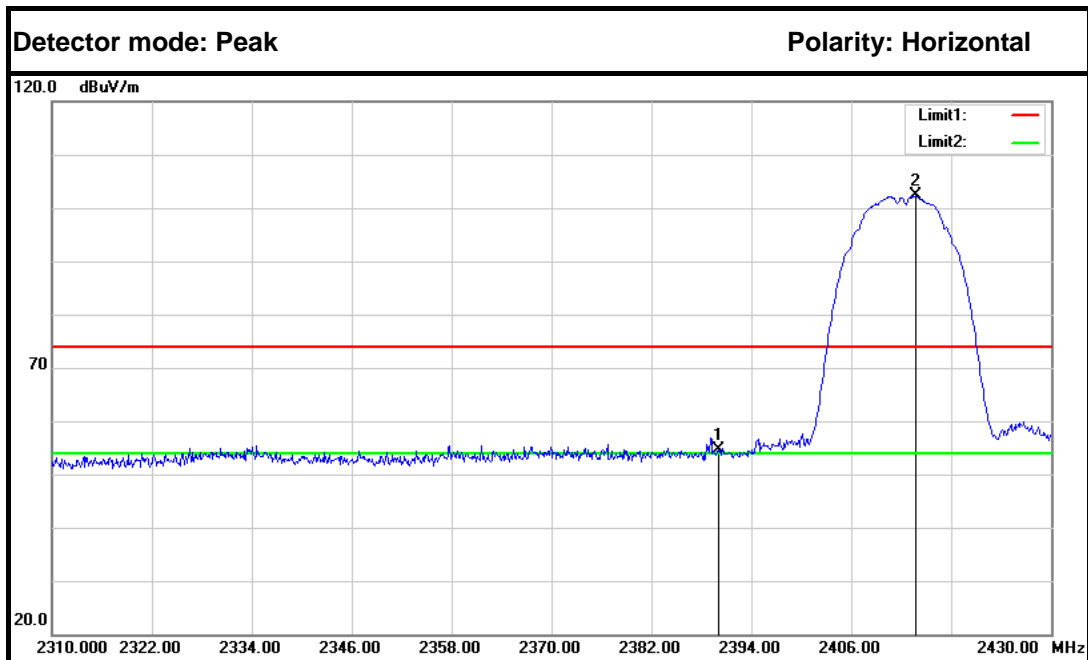


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.53	-2.86	54.67	74.00	-19.33	Peak	Horizontal
2.	2413.680	104.99	-2.73	102.26	---	---	Peak	Horizontal
1.	2390.000	45.49	-2.86	42.63	54.00	-11.37	Average	Horizontal
2.	2414.520	100.91	-2.73	98.18	---	---	Average	Horizontal







**Band Edges (CH High)**

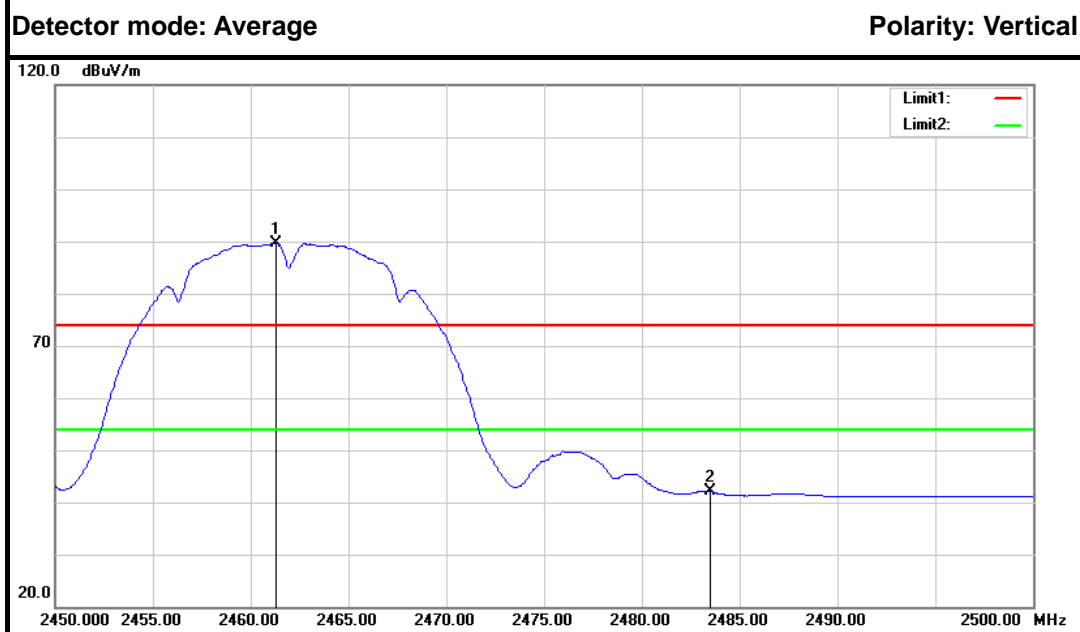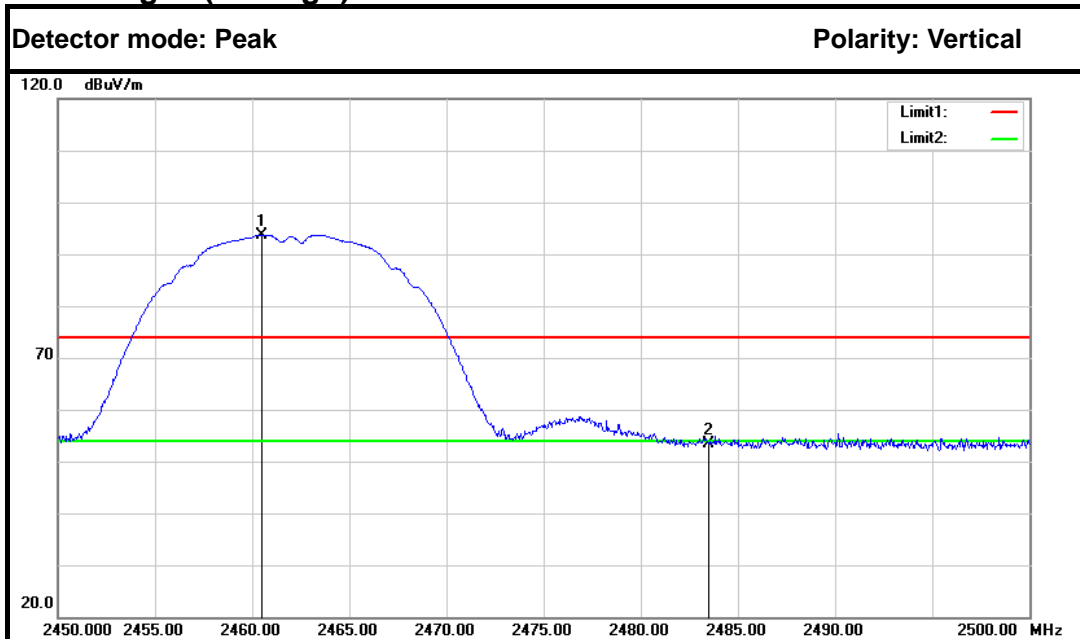



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.500	96.17	-2.48	93.69	---	---	Peak	Vertical
2.	2483.500	55.68	-2.35	53.33	74.00	-20.67	Peak	Vertical
1.	2461.300	92.20	-2.47	89.73	---	---	Average	Vertical
2.	2483.500	44.41	-2.35	42.06	54.00	-11.94	Average	Vertical

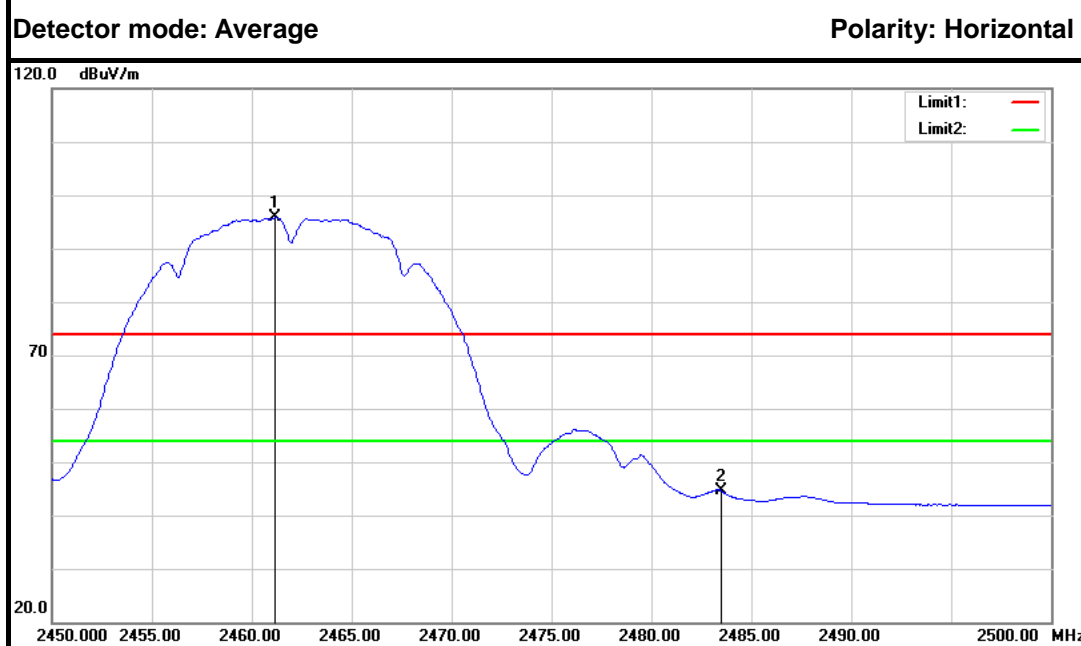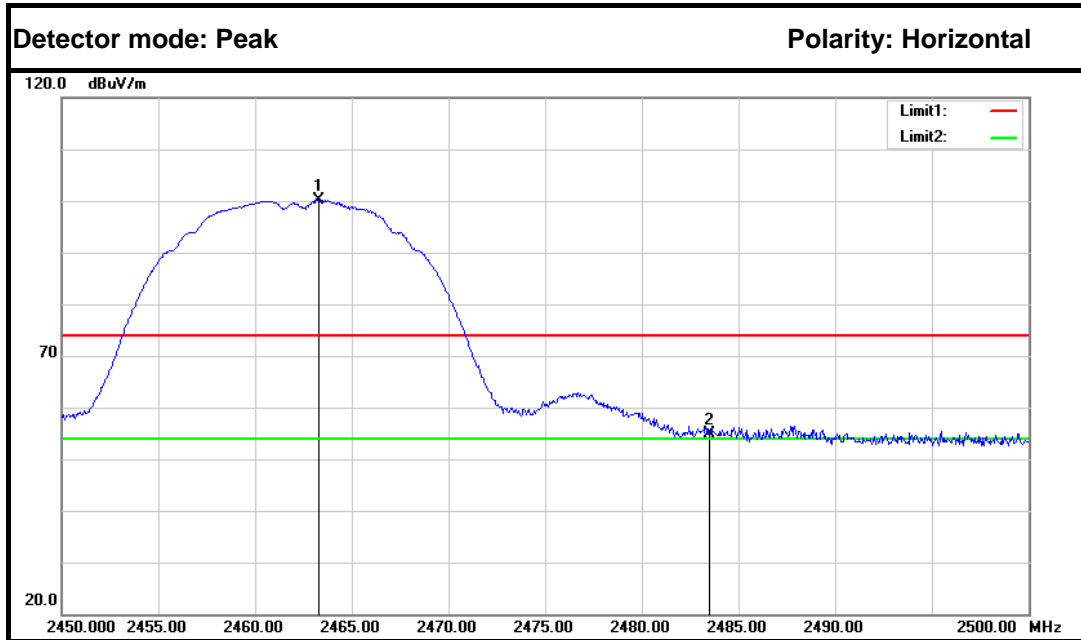



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.300	102.66	-2.46	100.20	---	---	Peak	Horizontal
2.	2483.500	57.22	-2.35	54.87	74.00	-19.13	Peak	Horizontal
1.	2461.150	98.27	-2.47	95.80	---	---	Average	Horizontal
2.	2483.500	46.91	-2.35	44.56	54.00	-9.44	Average	Horizontal



IEEE 802.11b mode (Antenna 2)  
Band Edges (CH Low)

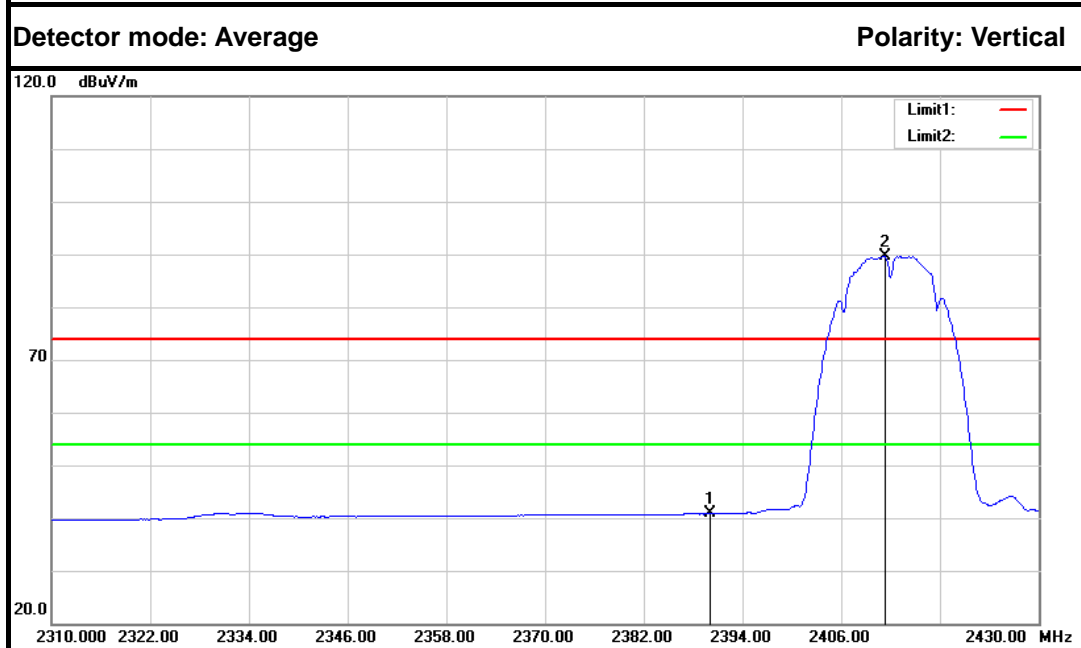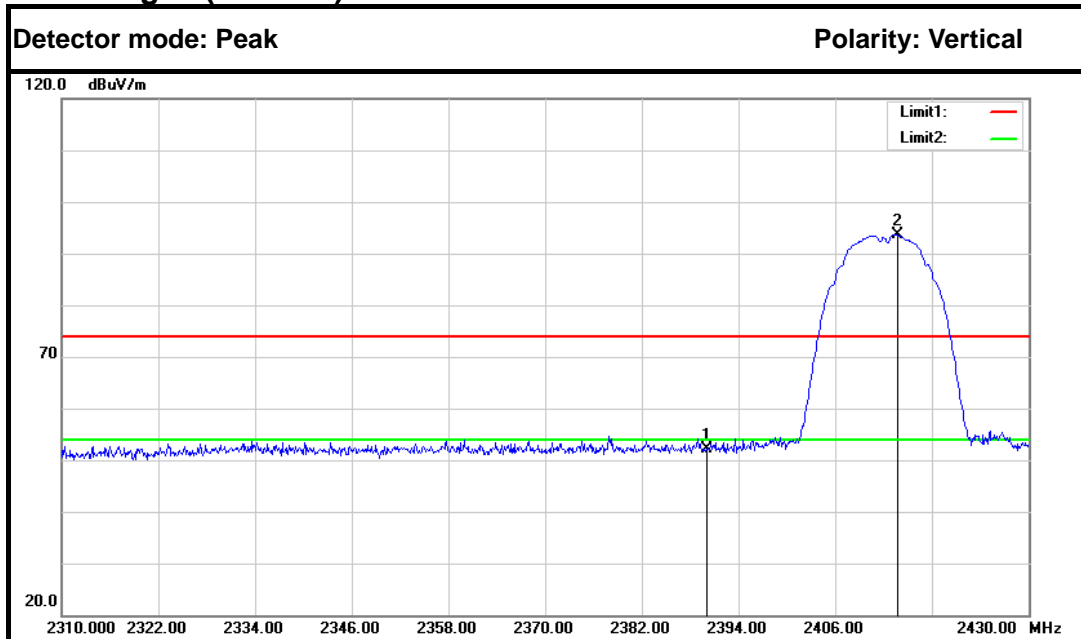



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	55.04	-2.86	52.18	74.00	-21.82	Peak	Vertical
2.	2413.680	96.32	-2.73	93.59	---	---	Peak	Vertical
1.	2390.000	43.68	-2.86	40.82	54.00	-13.18	Average	Vertical
2.	2411.280	92.46	-2.75	89.71	---	---	Average	Vertical

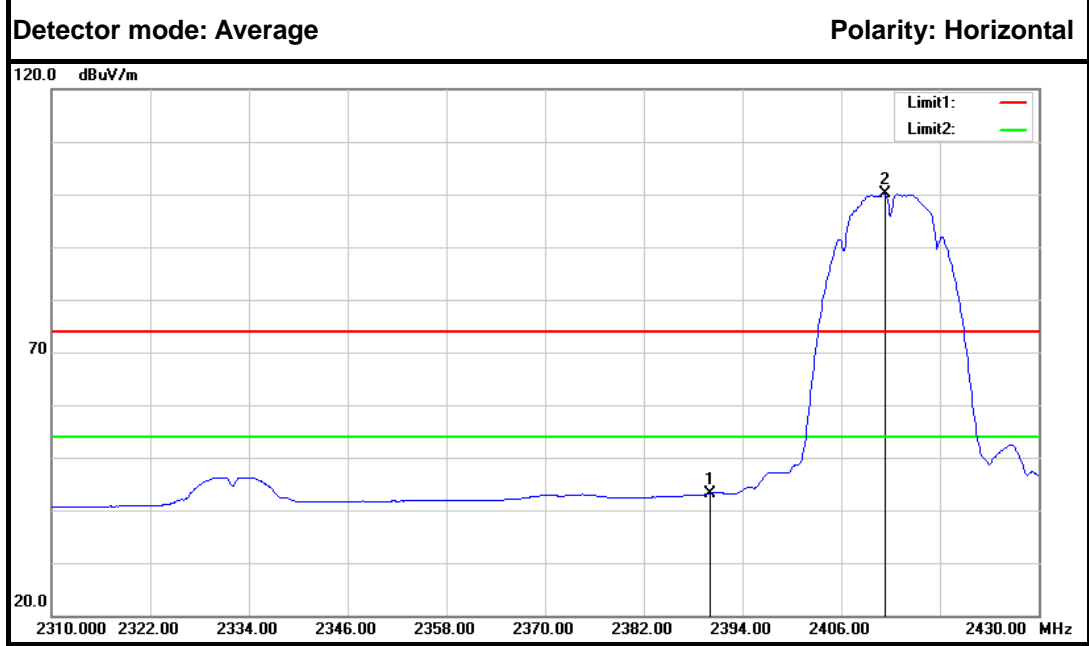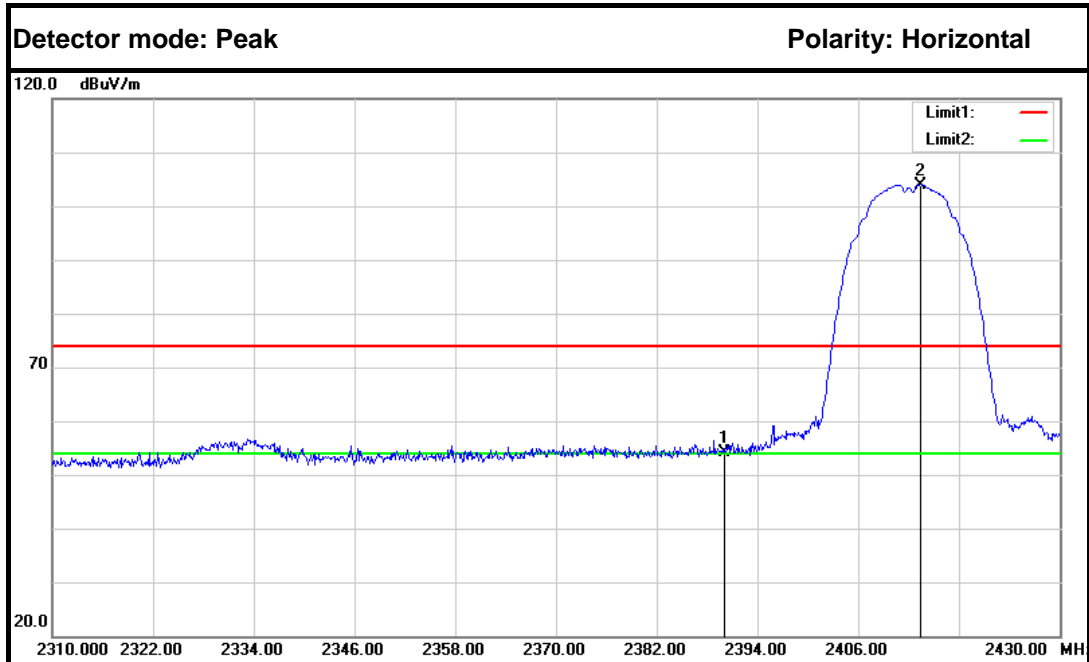



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	57.09	-2.86	54.23	74.00	-19.77	Peak	Horizontal
2.	2413.440	106.73	-2.73	104.00	---	---	Peak	Horizontal
1.	2390.000	46.03	-2.86	43.17	54.00	-10.83	Average	Horizontal
2.	2411.280	102.98	-2.75	100.23	---	---	Average	Horizontal



**Band Edges (CH High)**

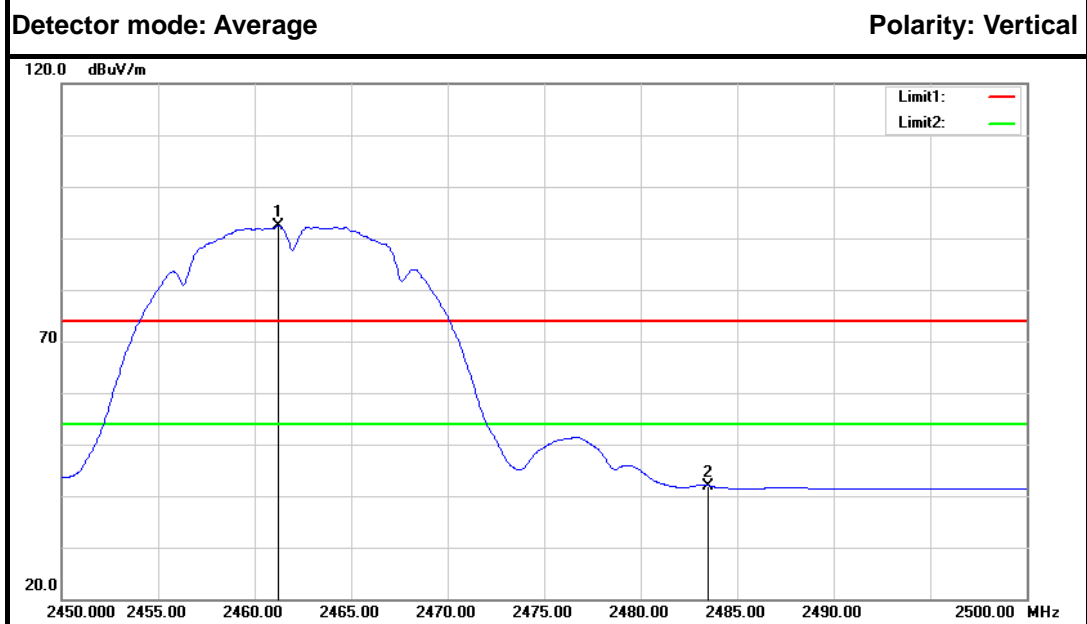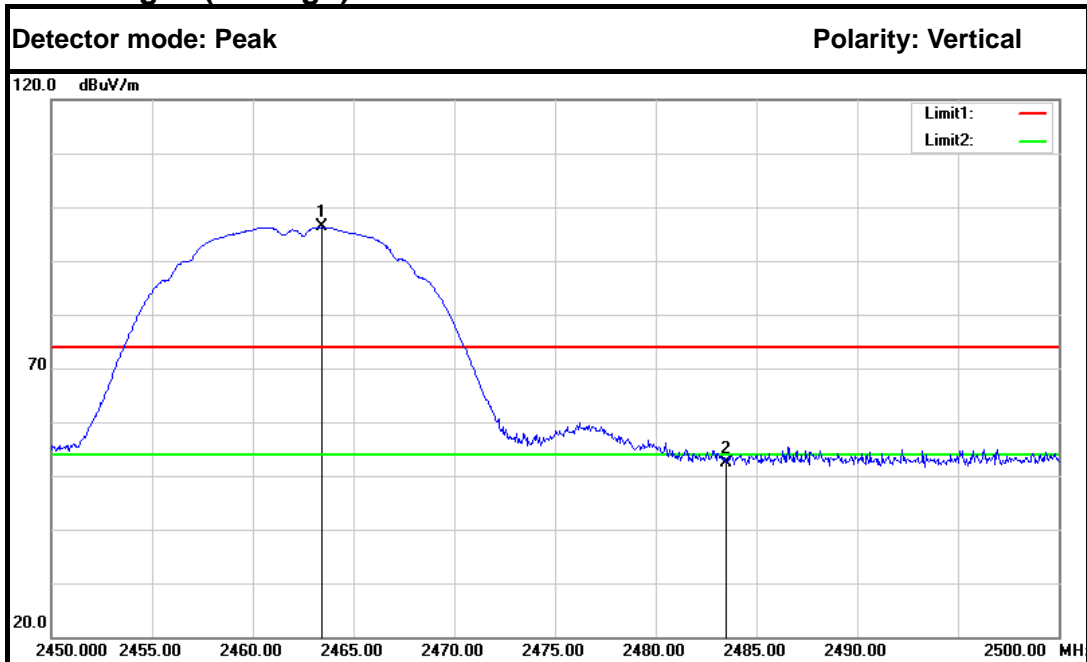



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.400	98.76	-2.46	96.30	---	---	Peak	Vertical
2.	2483.500	54.76	-2.35	52.41	74.00	-21.59	Peak	Vertical
1.	2461.200	94.83	-2.47	92.36	---	---	Average	Vertical
2.	2483.500	44.35	-2.35	42.00	54.00	-12.00	Average	Vertical

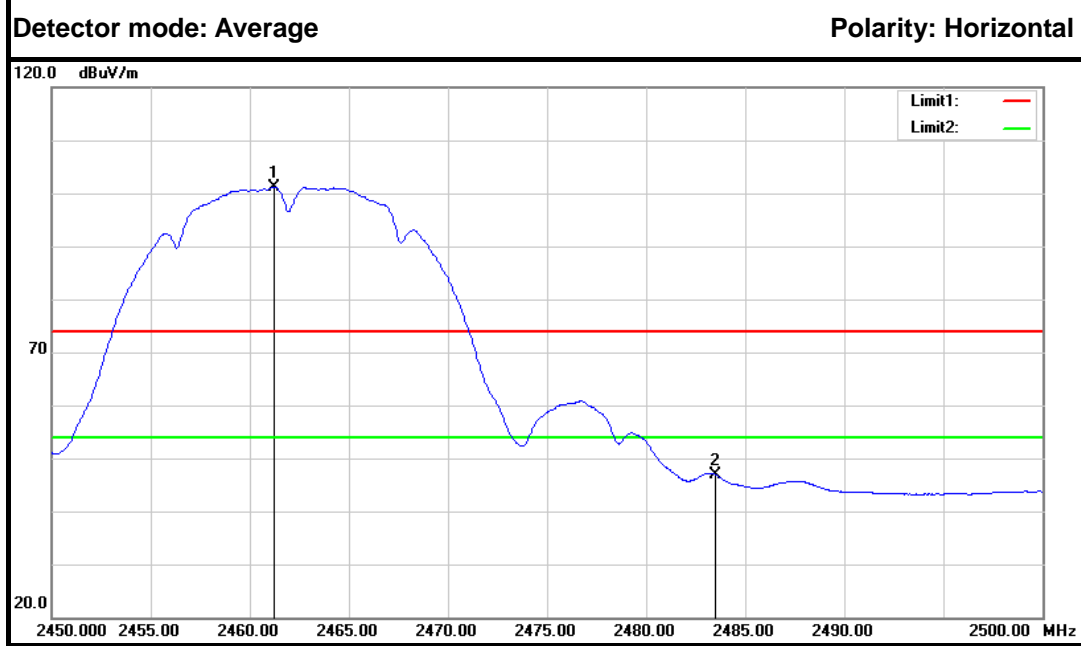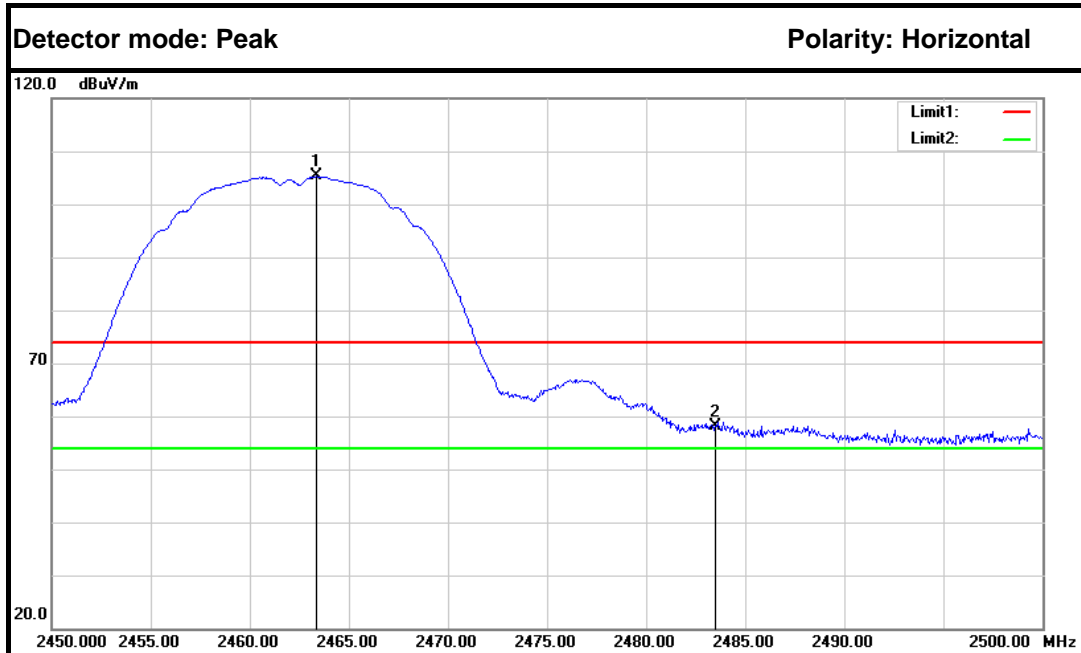



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.350	107.72	-2.46	105.26	---	---	Peak	Horizontal
2.	2483.500	60.41	-2.35	58.06	74.00	-15.94	Peak	Horizontal
1.	2461.200	103.64	-2.47	101.17	---	---	Average	Horizontal
2.	2483.500	49.27	-2.35	46.92	54.00	-7.08	Average	Horizontal



**IEEE 802.11g mode (Antenna 1)  
Band Edges (CH Low)**

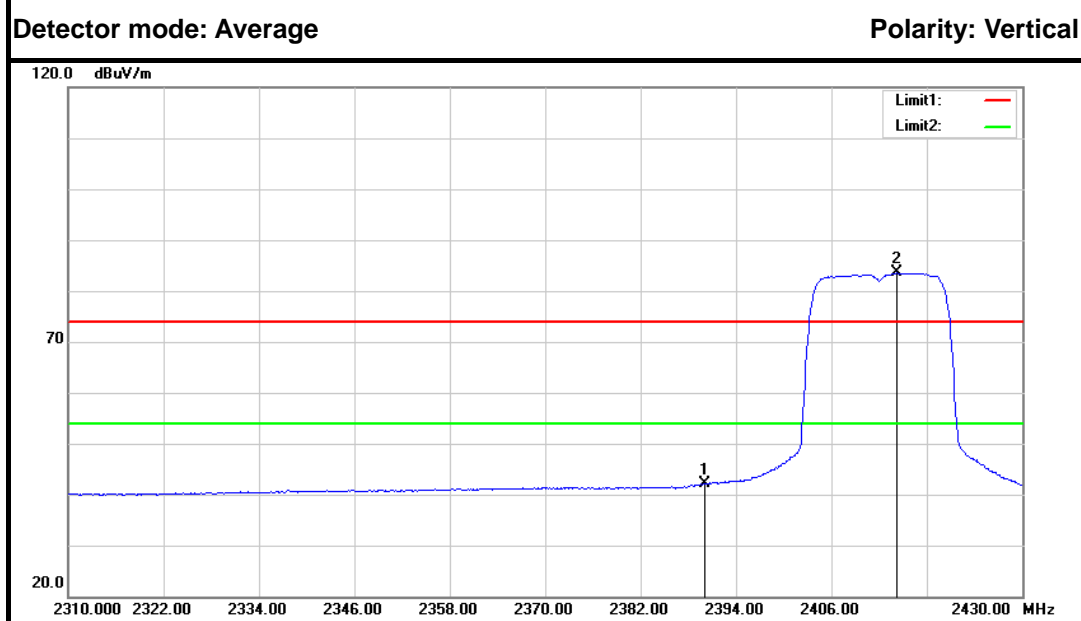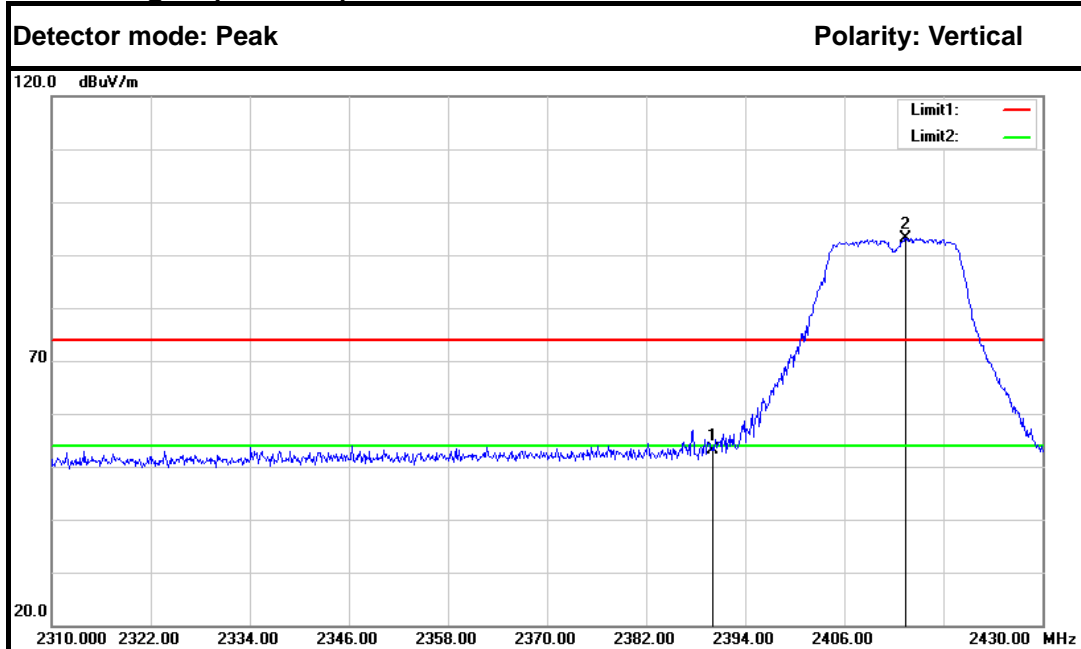

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	55.93	-2.86	53.07	74.00	-20.93	Peak	Vertical
2.	2413.440	95.90	-2.73	93.17	---	---	Peak	Vertical
1.	2390.000	45.04	-2.86	42.18	54.00	-11.82	Average	Vertical
2.	2414.280	86.25	-2.73	83.52	---	---	Average	Vertical

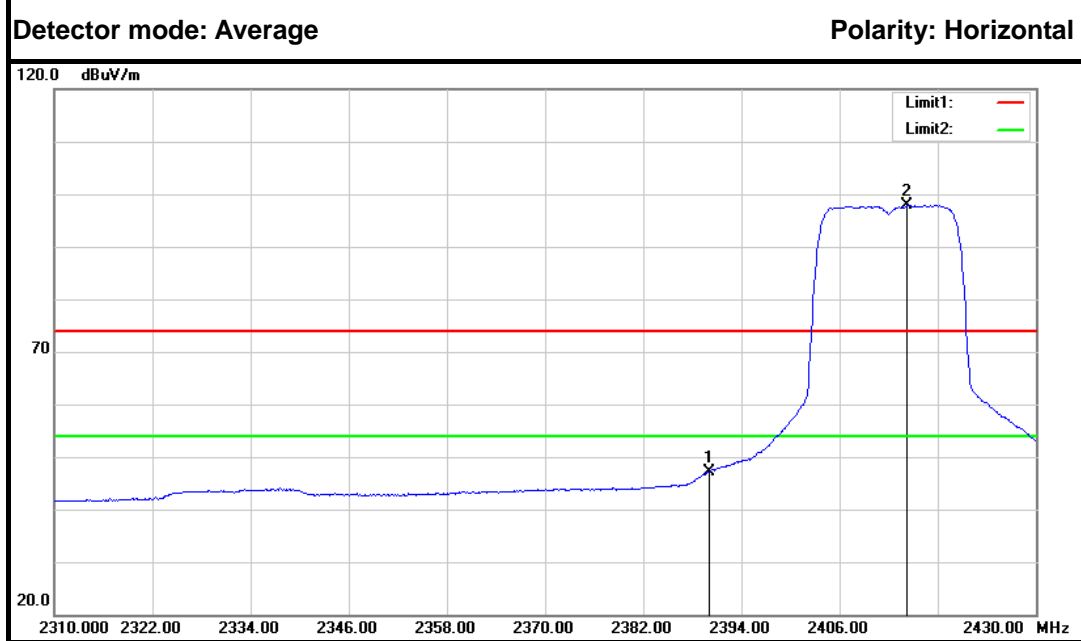
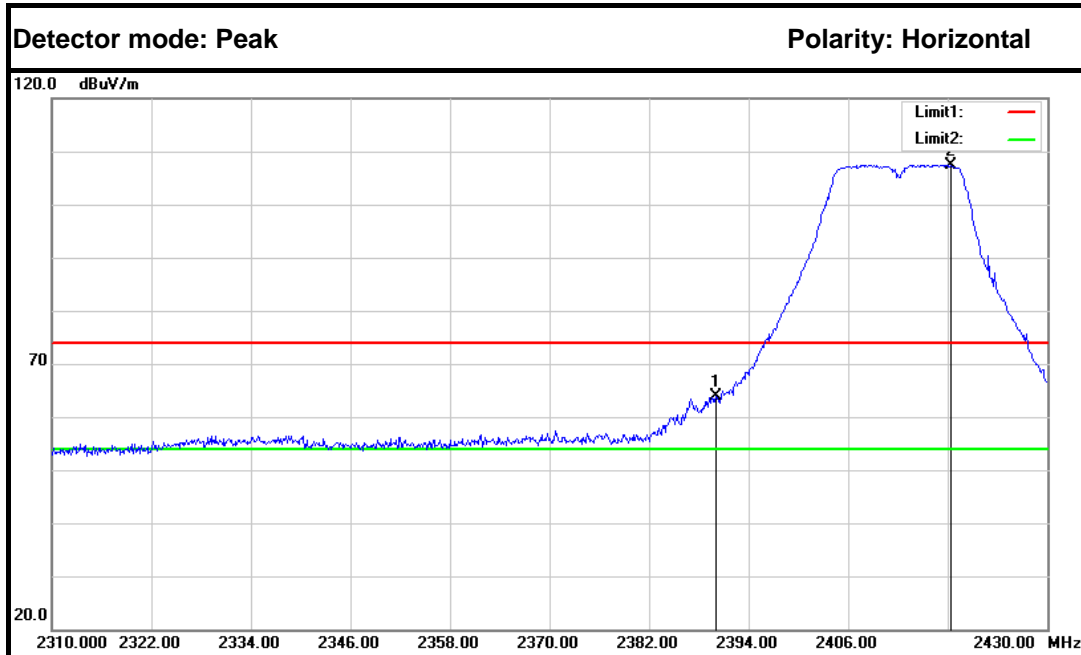


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	66.73	-2.86	63.87	74.00	-10.13	Peak	Horizontal
2.	2418.360	110.10	-2.71	107.39	---	---	Peak	Horizontal
1.	2390.000	50.02	-2.86	47.16	54.00	-6.84	Average	Horizontal
2.	2414.280	100.63	-2.73	97.90	---	---	Average	Horizontal







**Band Edges (CH High)**

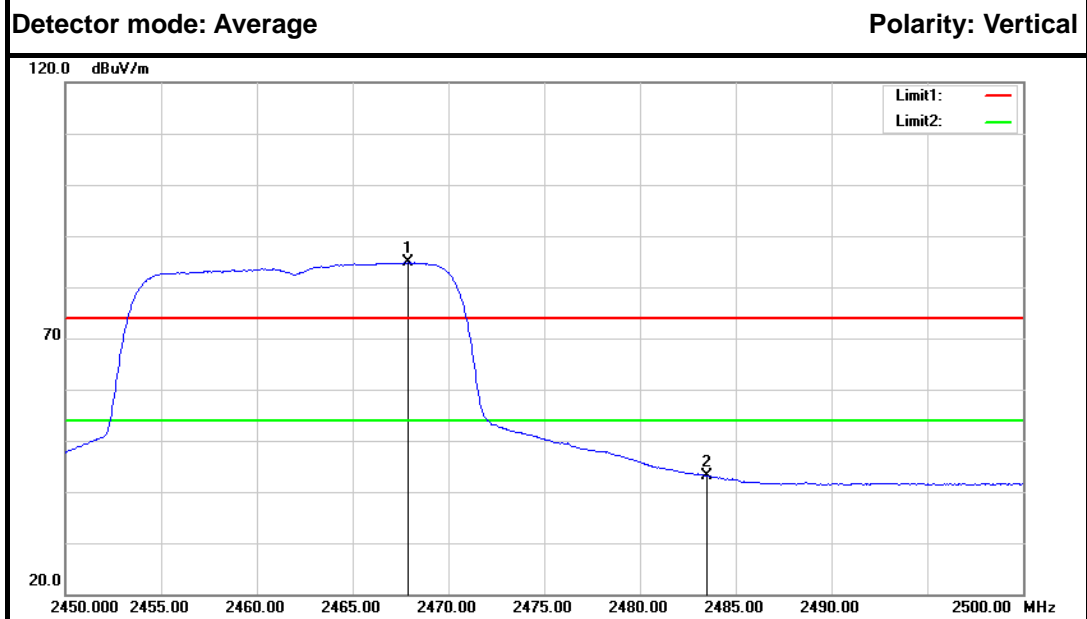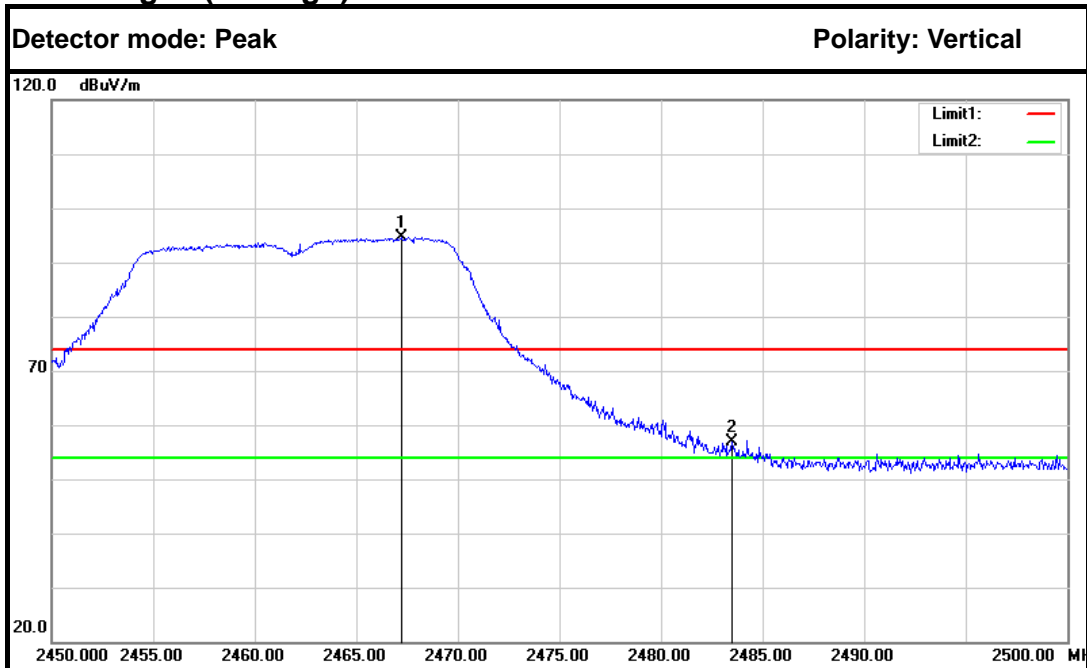



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2467.250	97.07	-2.44	94.63	---	---	Peak	Vertical
2.	2483.500	59.27	-2.35	56.92	74.00	-17.08	Peak	Vertical
1.	2467.900	87.23	-2.44	84.79	---	---	Average	Vertical
2.	2483.500	45.48	-2.35	43.13	54.00	-10.87	Average	Vertical

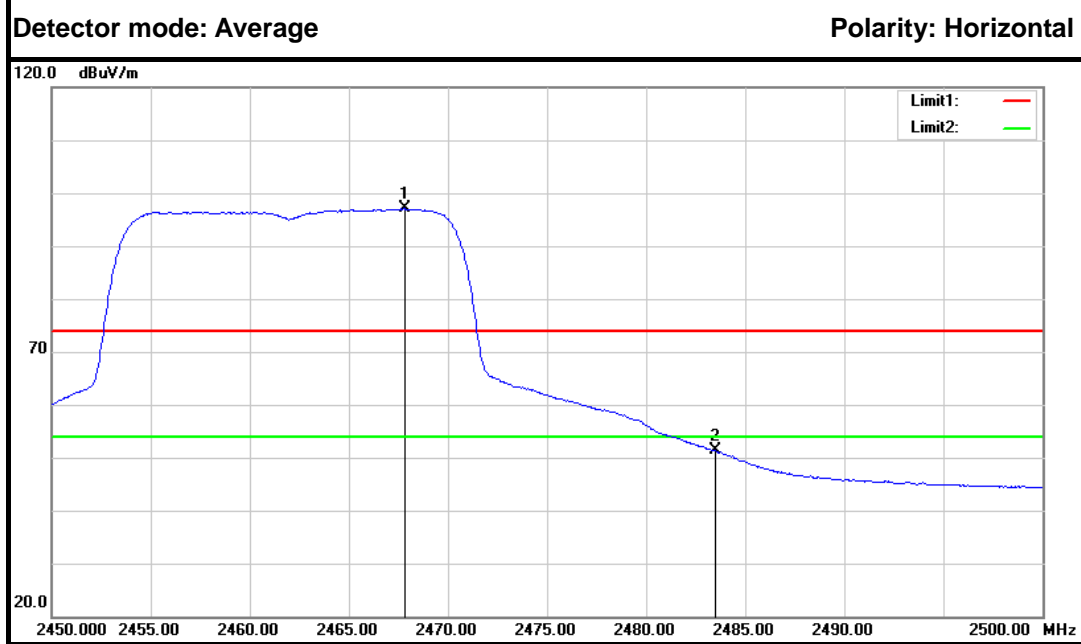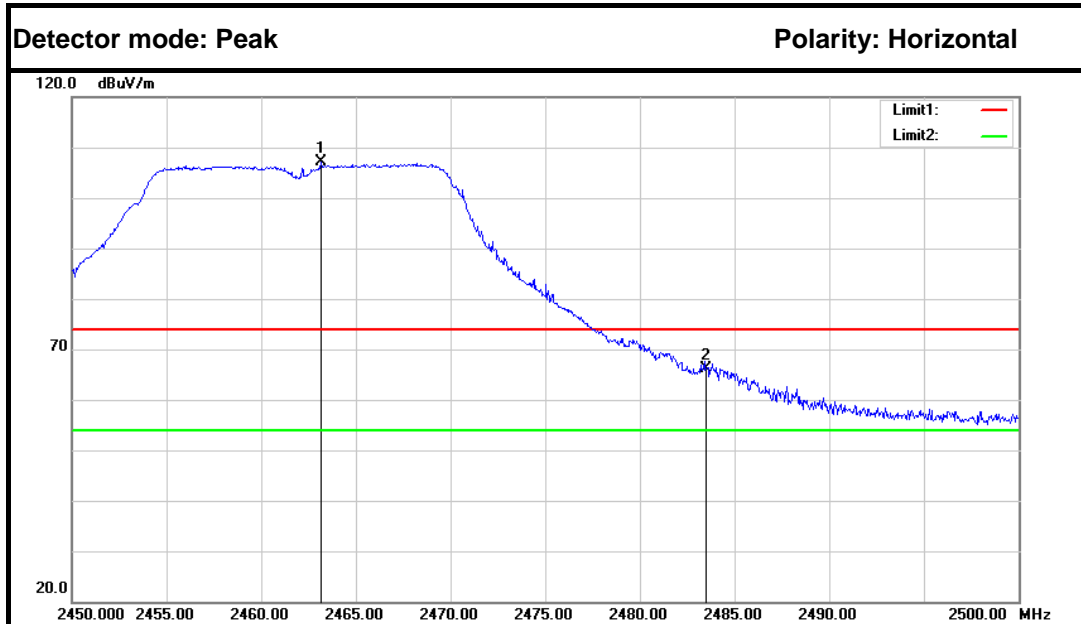



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2463.150	109.47	-2.46	107.01	---	---	Peak	Horizontal
2.	2483.500	68.39	-2.35	66.04	74.00	-7.96	Peak	Horizontal
1.	2467.850	99.46	-2.44	97.02	---	---	Average	Horizontal
2.	2483.500	53.66	-2.35	51.31	54.00	-2.69	Average	Horizontal



**IEEE 802.11g mode (Antenna 2)  
Band Edges (CH Low)**

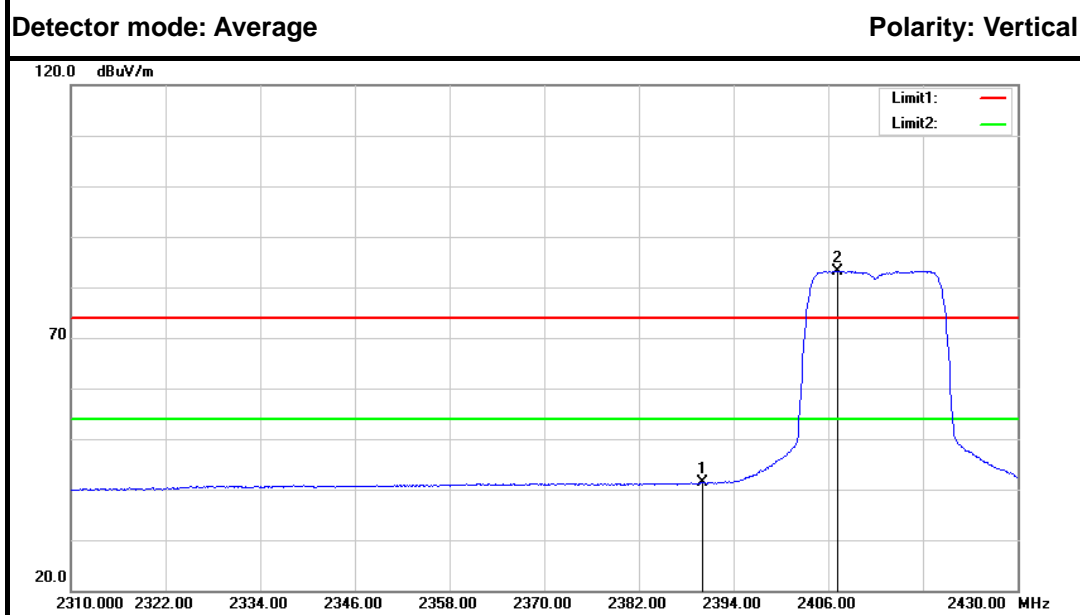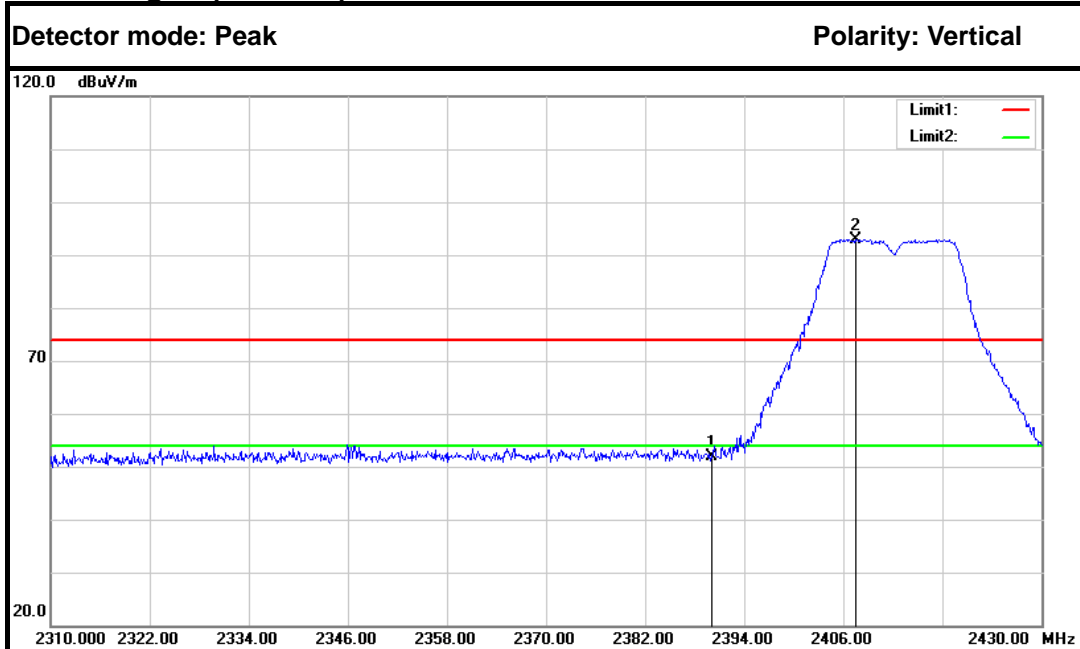



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	54.70	-2.86	51.84	74.00	-22.16	Peak	Vertical
2.	2407.440	95.69	-2.77	92.92	---	---	Peak	Vertical
1.	2390.000	44.20	-2.86	41.34	54.00	-12.66	Average	Vertical
2.	2407.200	86.00	-2.77	83.23	---	---	Average	Vertical

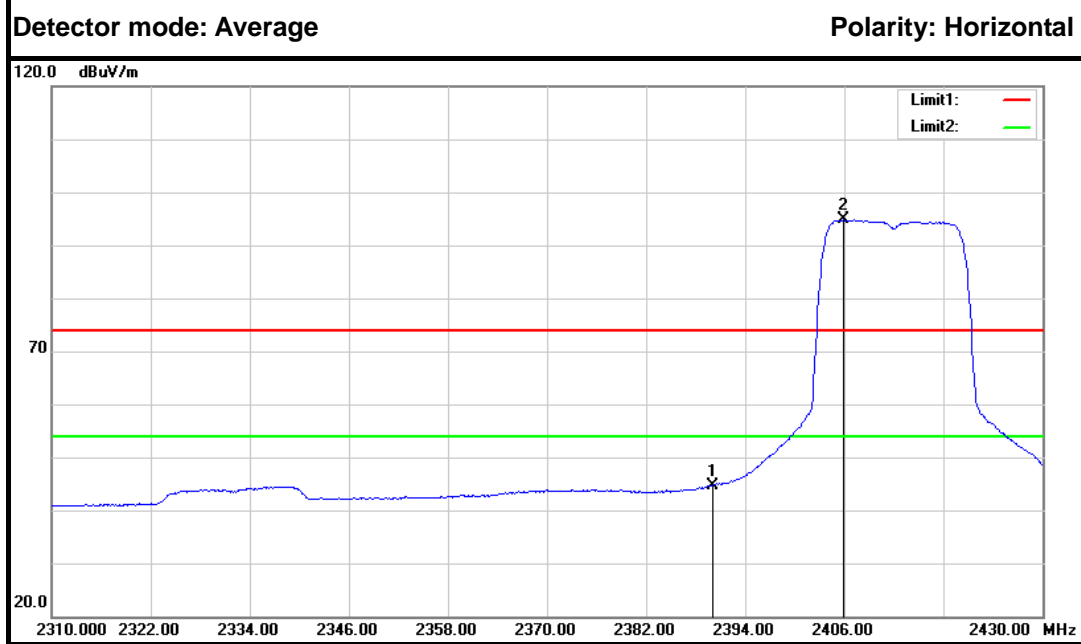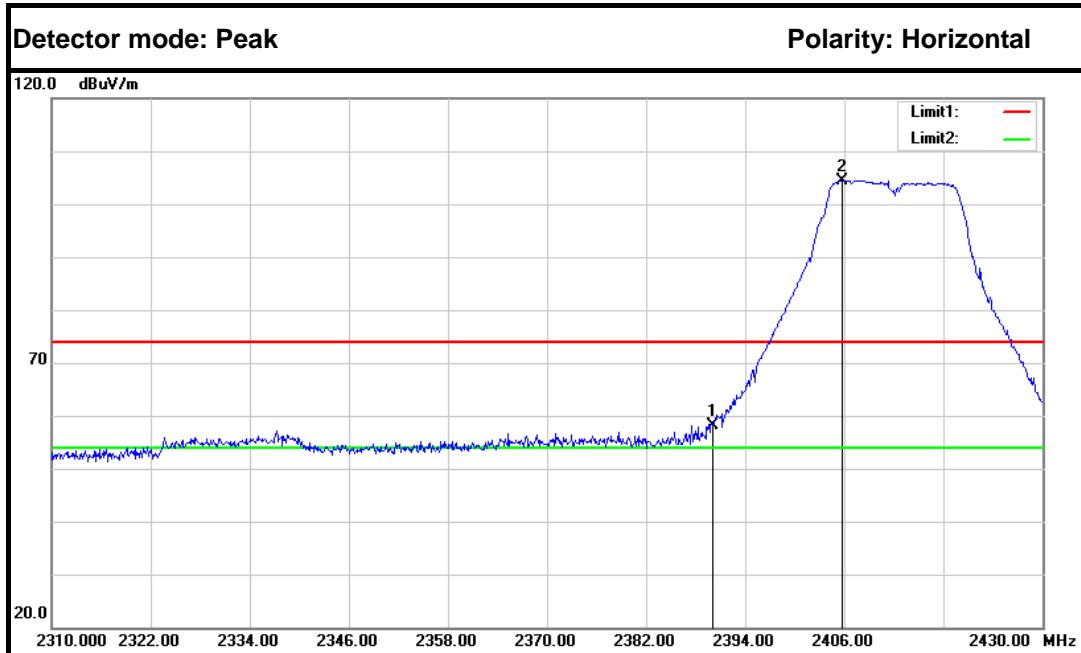



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	60.99	-2.86	58.13	74.00	-15.87	Peak	Horizontal
2.	2405.760	107.26	-2.78	104.48	---	---	Peak	Horizontal
1.	2390.000	47.59	-2.86	44.73	54.00	-9.27	Average	Horizontal
2.	2405.880	97.54	-2.78	94.76	---	---	Average	Horizontal



**Band Edges (CH High)**

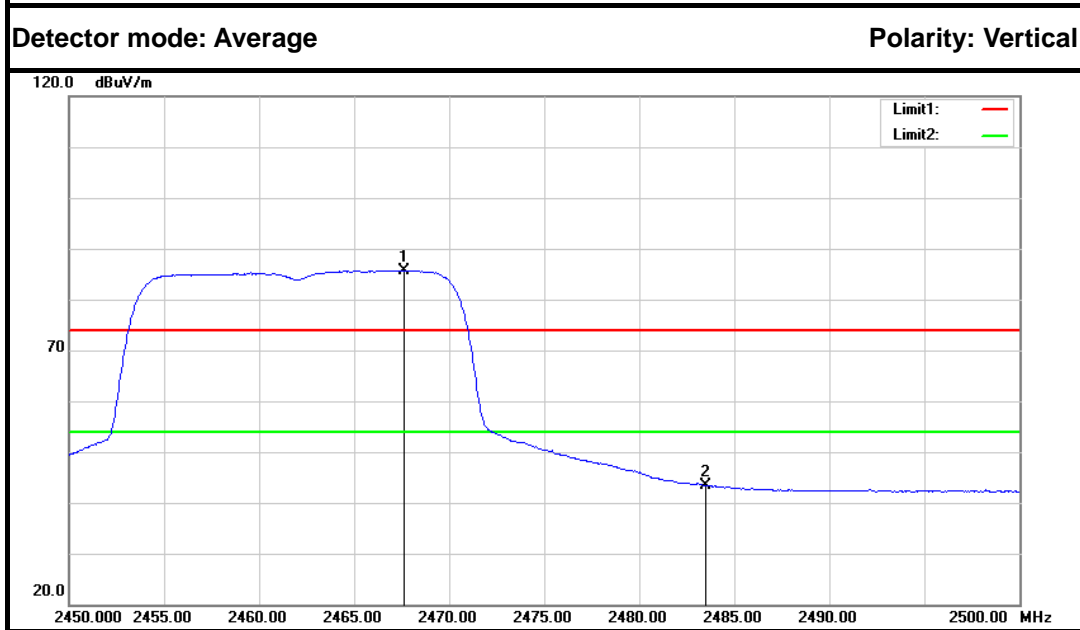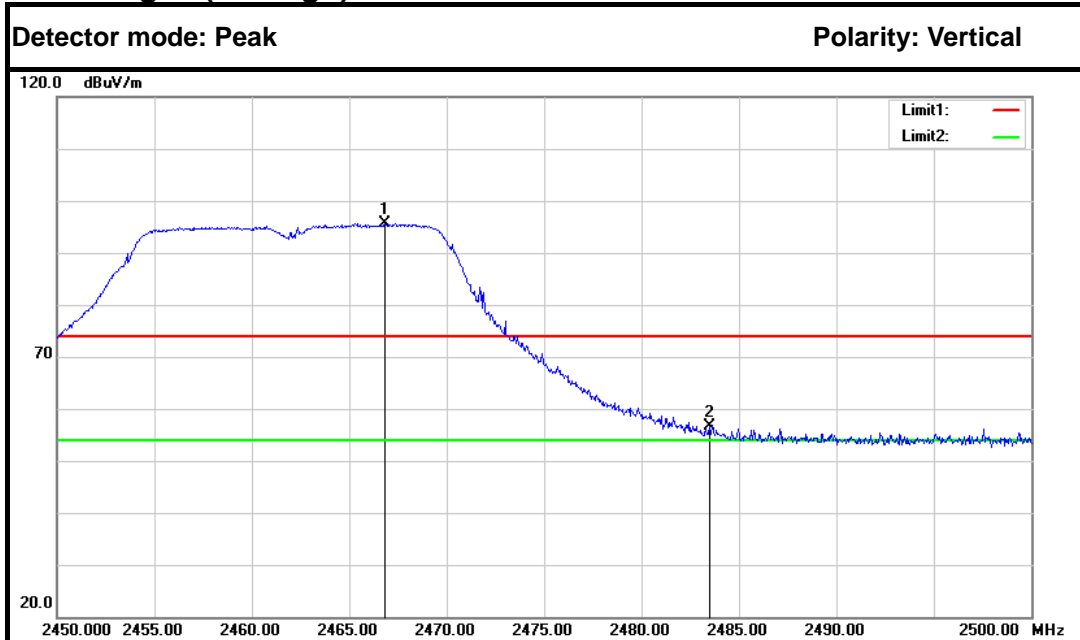



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2466.800	97.98	-2.44	95.54	---	---	Peak	Vertical
2.	2483.500	58.97	-2.35	56.62	74.00	-17.38	Peak	Vertical
1.	2467.650	88.12	-2.44	85.68	---	---	Average	Vertical
2.	2483.500	45.82	-2.35	43.47	54.00	-10.53	Average	Vertical

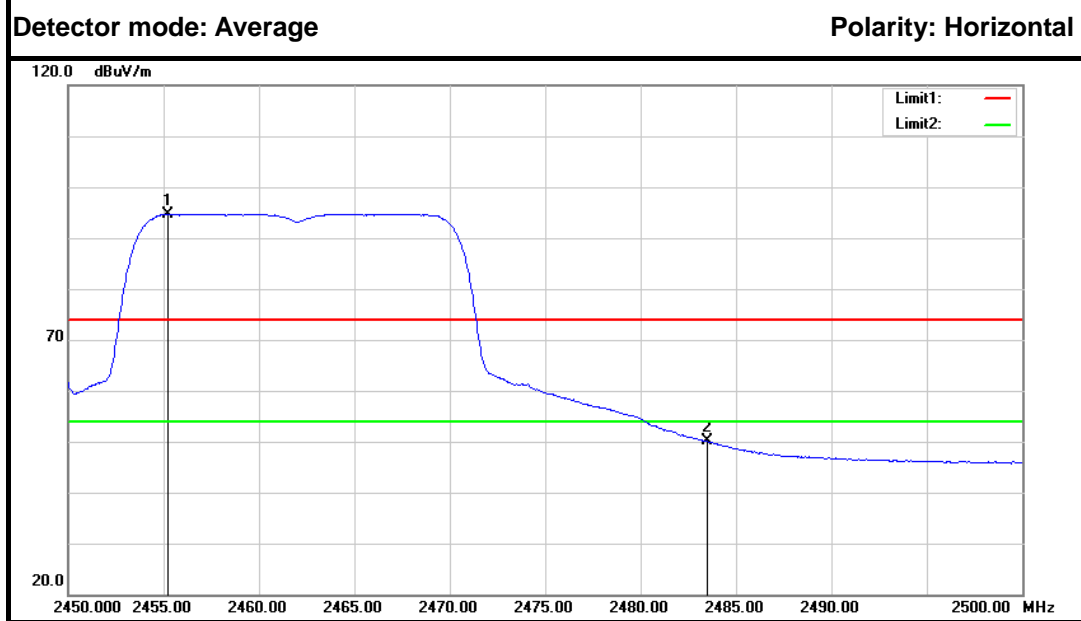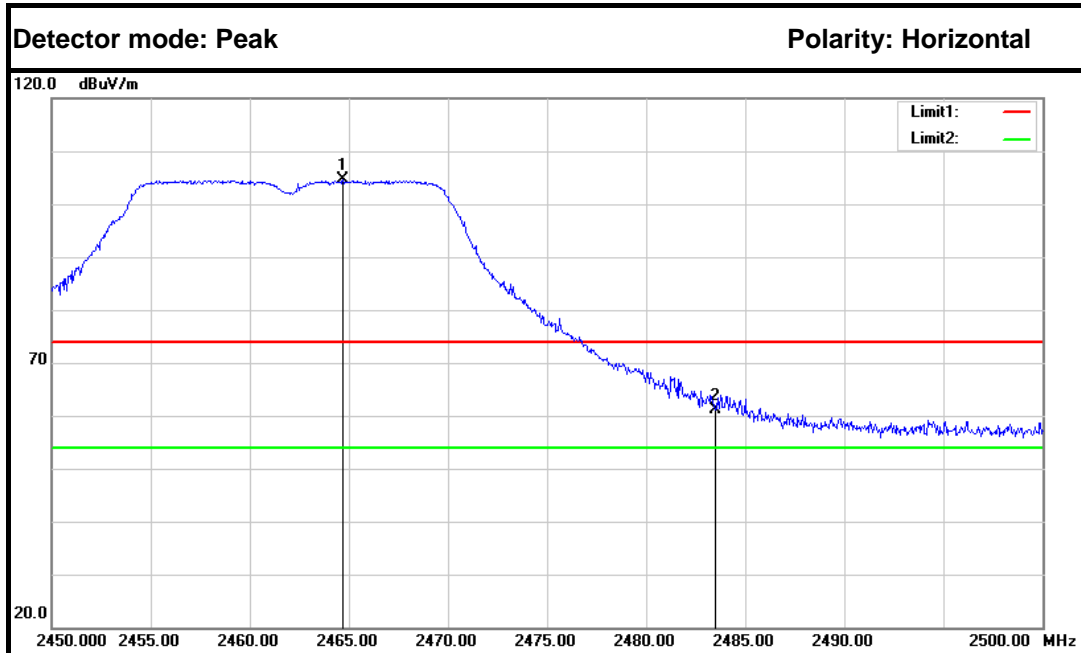



No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2464.700	106.96	-2.45	104.51	---	---	Peak	Horizontal
2.	2483.500	63.36	-2.35	61.01	74.00	-12.99	Peak	Horizontal
1.	2455.200	97.26	-2.51	94.75	---	---	Average	Horizontal
2.	2483.500	52.45	-2.35	50.10	54.00	-3.90	Average	Horizontal



**IEEE 802.11n HT20 MHz mode (Combine with Antenna 1 and Antenna 2)  
Band Edges (CH Low)**

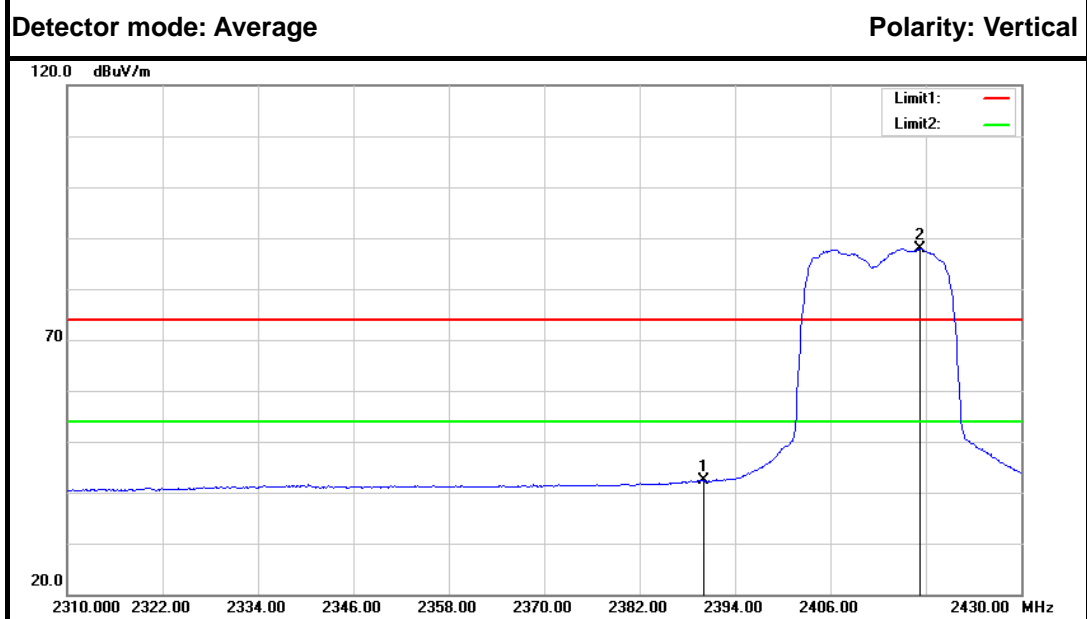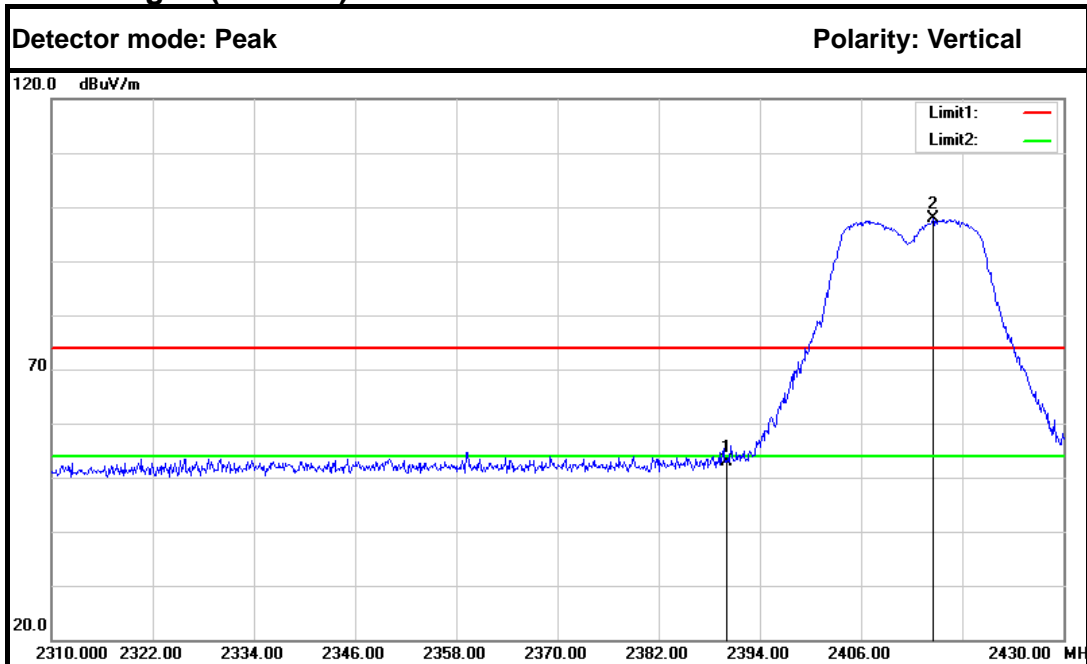

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	55.83	-2.86	52.97	74.00	-21.03	Peak	Vertical
2.	2414.520	100.52	-2.73	97.79	---	---	Peak	Vertical
1.	2390.000	45.32	-2.86	42.46	54.00	-11.54	Average	Vertical
2.	2417.280	90.70	-2.71	87.99	---	---	Average	Vertical

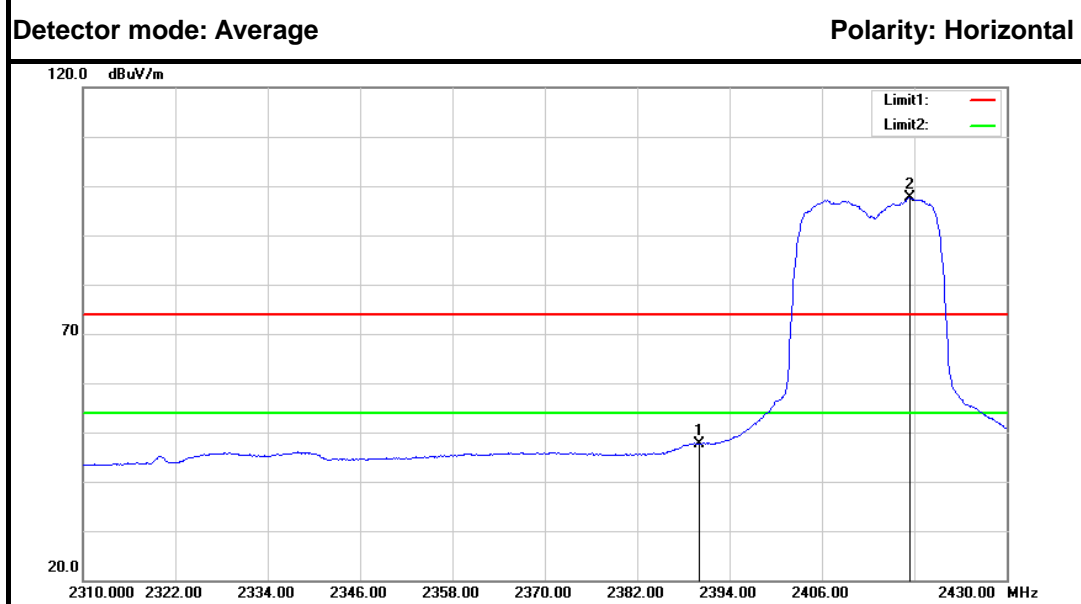
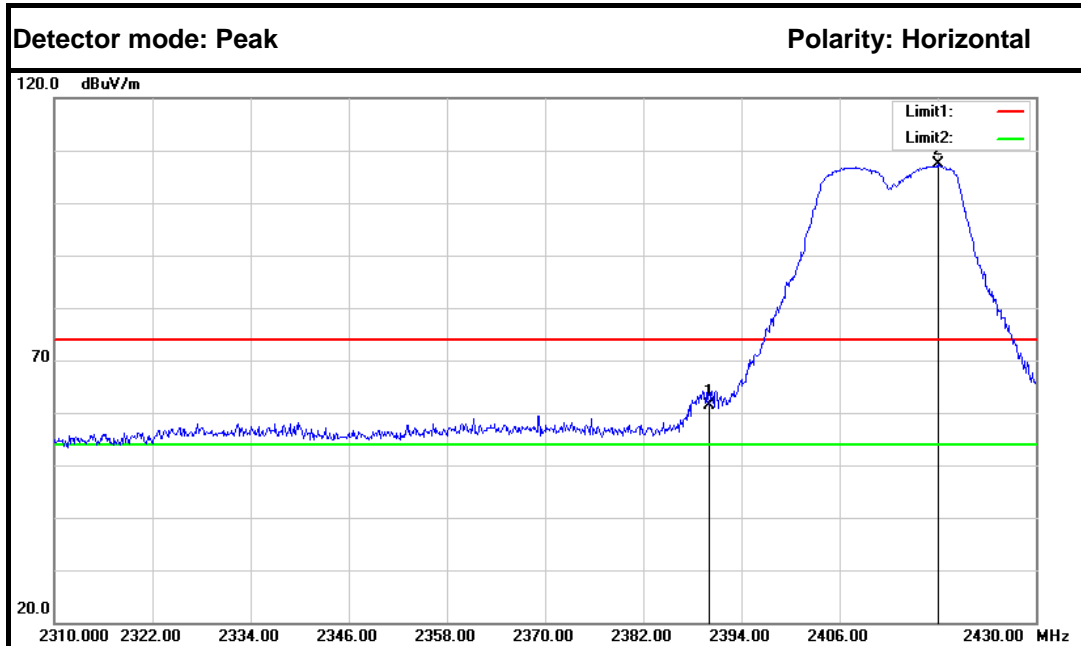


No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2390.000	64.12	-2.86	61.26	74.00	-12.74	Peak	Horizontal
2.	2418.000	110.04	-2.71	107.33	---	---	Peak	Horizontal
1.	2390.000	50.39	-2.86	47.53	54.00	-6.47	Average	Horizontal
2.	2417.400	100.27	-2.71	97.56	---	---	Average	Horizontal







**Band Edges (CH High)**

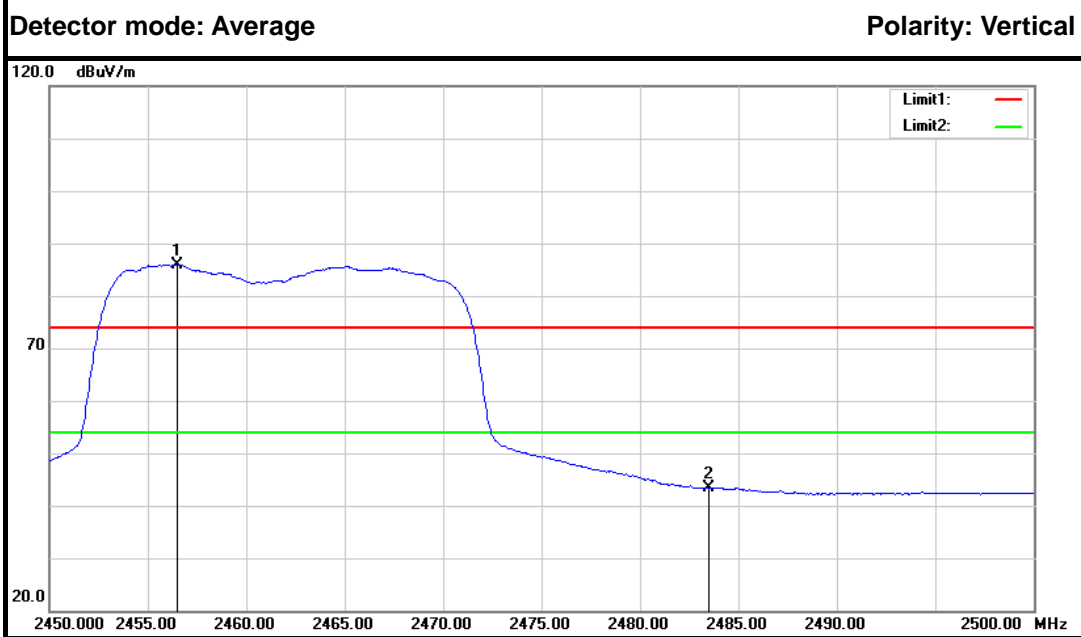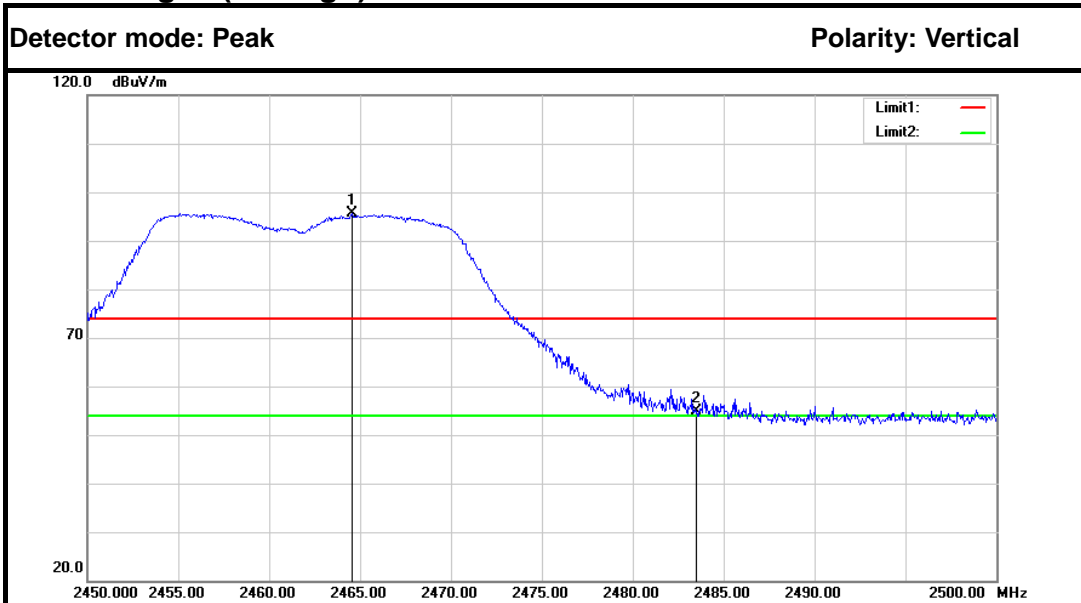

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2464.550	98.07	-2.45	95.62	---	---	Peak	Vertical
2.	2483.500	57.34	-2.35	54.99	74.00	-19.01	Peak	Vertical
1.	2456.500	88.43	-2.50	85.93	---	---	Average	Vertical
2.	2483.500	45.69	-2.35	43.34	54.00	-10.66	Average	Vertical

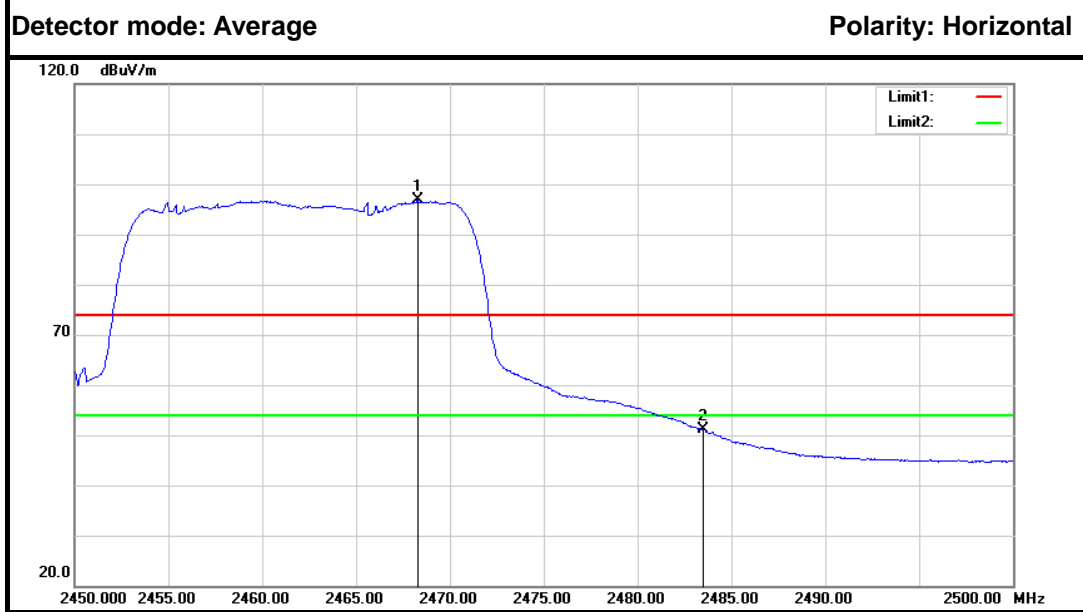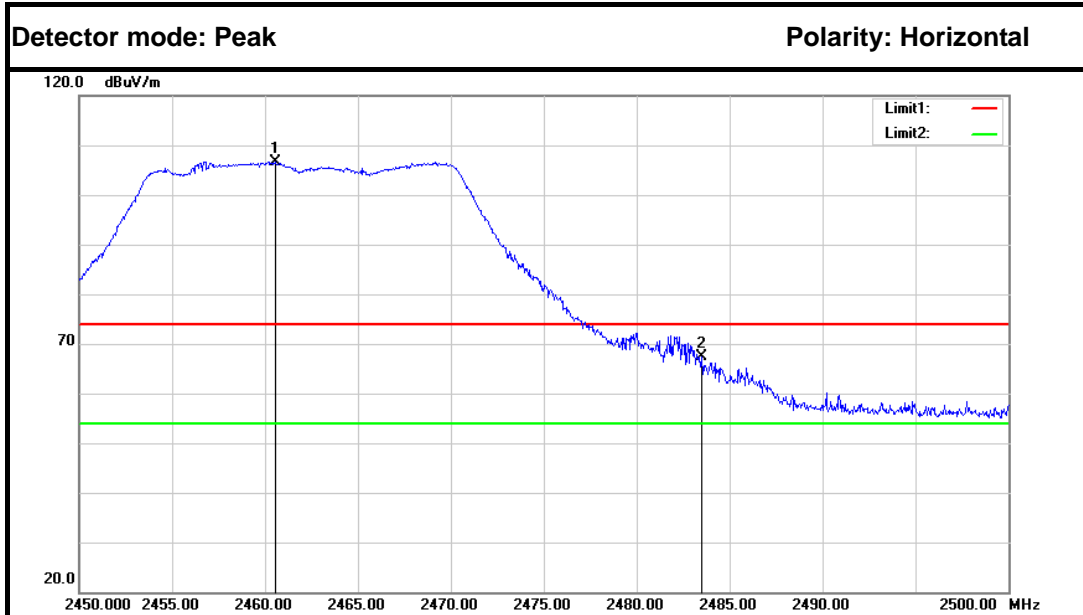

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1.	2460.550	109.07	-2.48	106.59	---	---	Peak	Horizontal
2.	2483.500	69.61	-2.35	67.26	74.00	-6.74	Peak	Horizontal
1.	2468.300	99.25	-2.43	96.82	---	---	Average	Horizontal
2.	2483.500	53.44	-2.35	51.09	54.00	-2.91	Average	Horizontal



## 7.7. PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 7.7.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 7.7.2. TEST INSTRUMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018


### 7.7.3. TEST PROCEDURES (please refer to measurement standard)

§15.247(e) specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission. The same method as used to determine the conducted output power shall be used to determine the power spectral density (i.e., if peak-detected fundamental power was measured then use the peak PSD procedure and if average fundamental power was measured then use the average PSD procedure).

### 10.2 Method PKPSD (peak PSD)

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 7.7.4. TEST SETUP

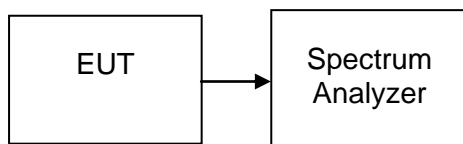



**7.7.5. TEST RESULTS**

*No non-compliance noted*

**Test Data**

**Test mode: IEEE 802.11b (Antenna 1)**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-9.47	8	PASS
Mid	2437	-8.62		PASS
High	2462	-10.25		PASS

**Test mode: IEEE 802.11b (Antenna 2)**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-11.77	8	PASS
Mid	2437	-11.91		PASS
High	2462	-12.36		PASS

**Test mode: IEEE 802.11g (Antenna 1)**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-12.20	8	PASS
Mid	2437	-12.17		PASS
High	2462	-12.65		PASS

**Test mode: IEEE 802.11g (Antenna 2)**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-12.75	8	PASS
Mid	2437	-13.22		PASS
High	2462	-14.35		PASS



**Test mode: IEEE 802.11n HT20 MHz (Combine with Antenna 1 and Antenna 2)**

Channel	Frequency (MHz)	PPSD (dBm)			Limit (dBm)	Test Result
		Antenna 0	Antenna 1	Total		
Low	2412	-12.76	-13.22	-9.97	8	PASS
Mid	2437	-12.63	-11.85	-9.21		PASS
High	2462	-12.73	-12.33	-9.51		PASS



**Test Plot**


**IEEE 802.11b mode (Antenna 1)**

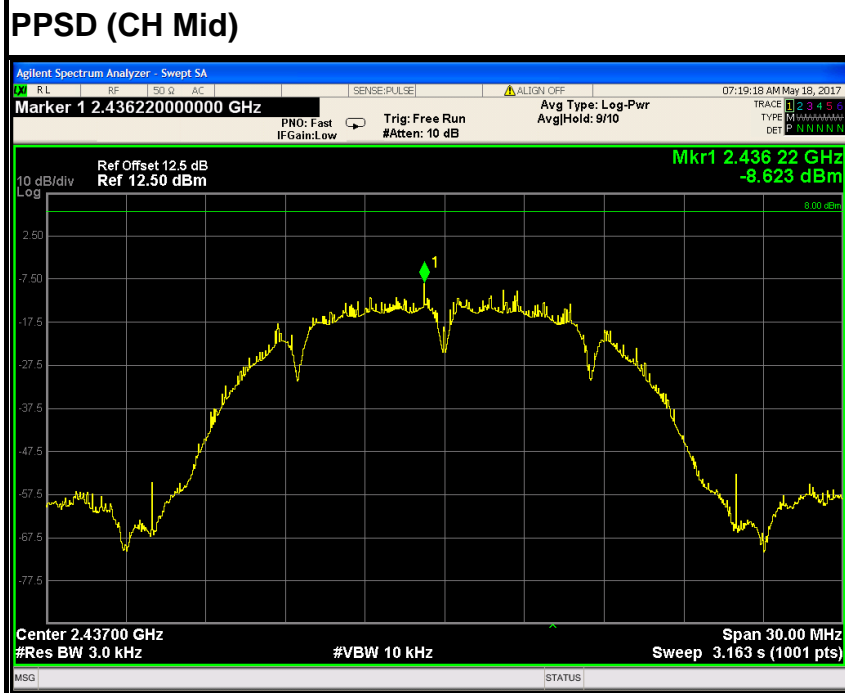
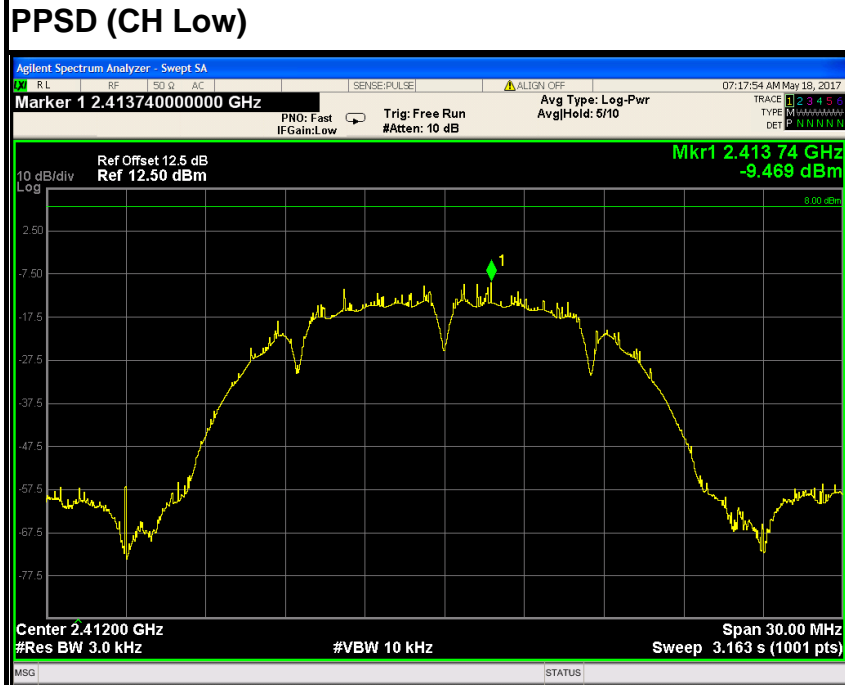




### IEEE 802.11b mode (Antenna 2)



### PPSD (CH Low)

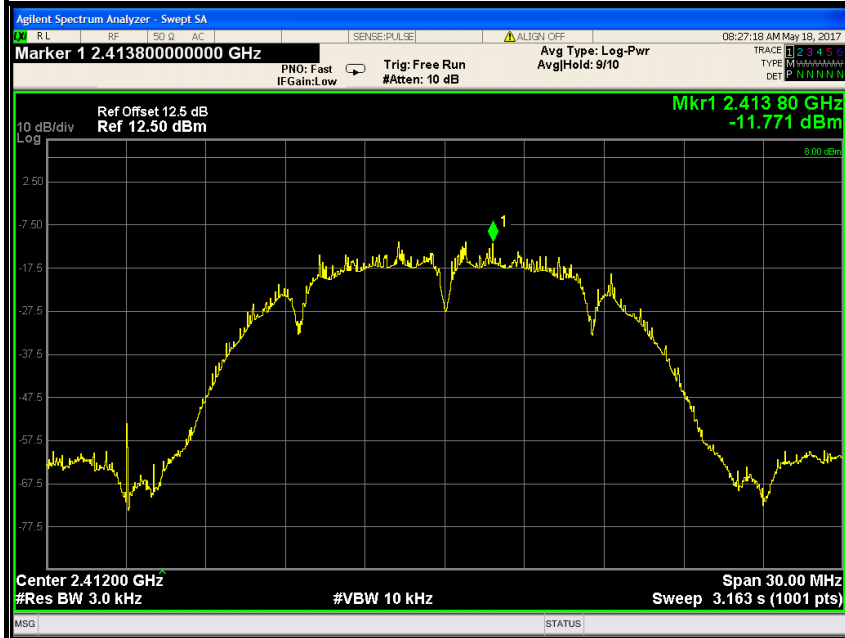

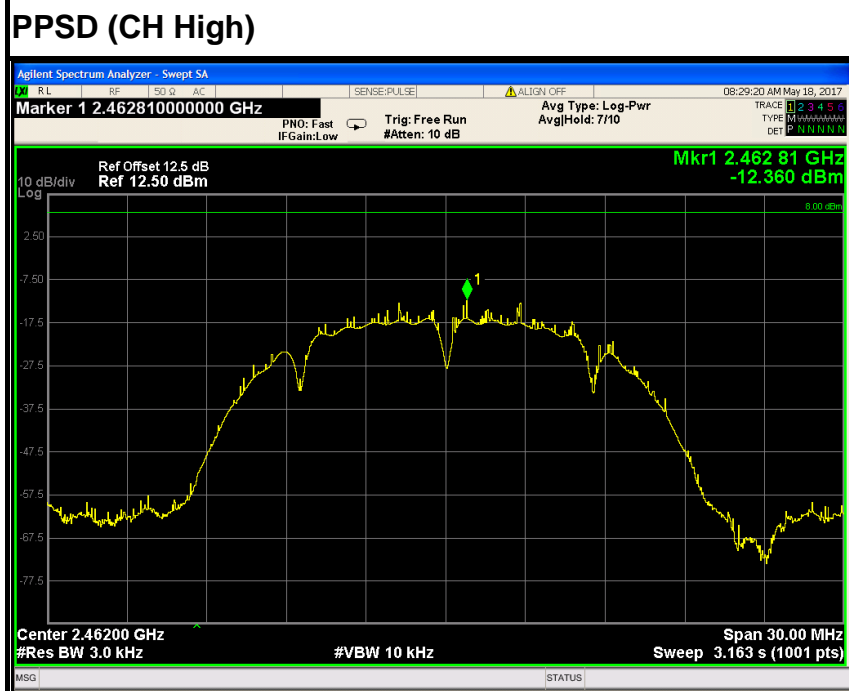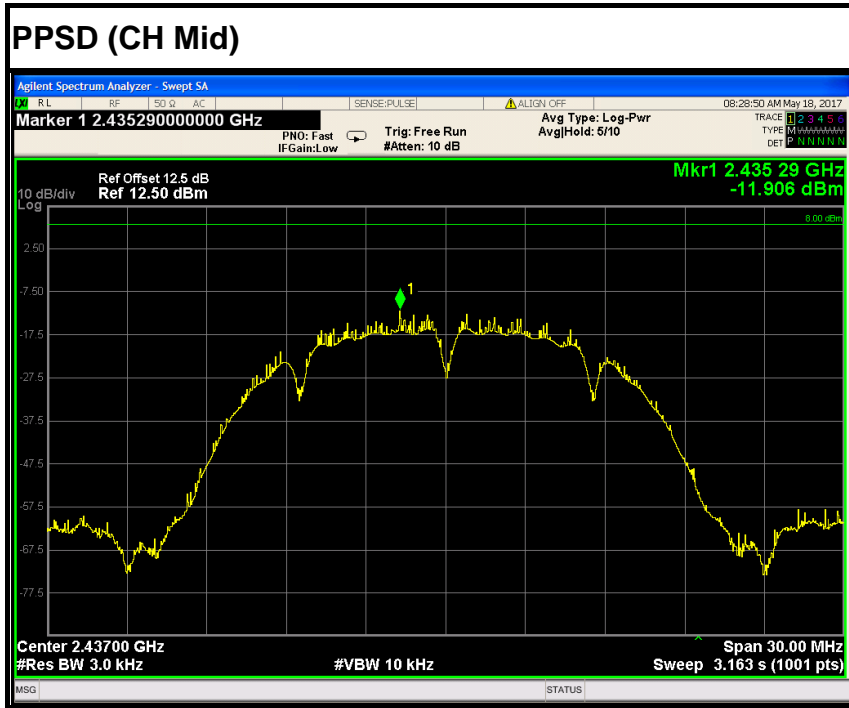





### IEEE 802.11g mode (Antenna 1)

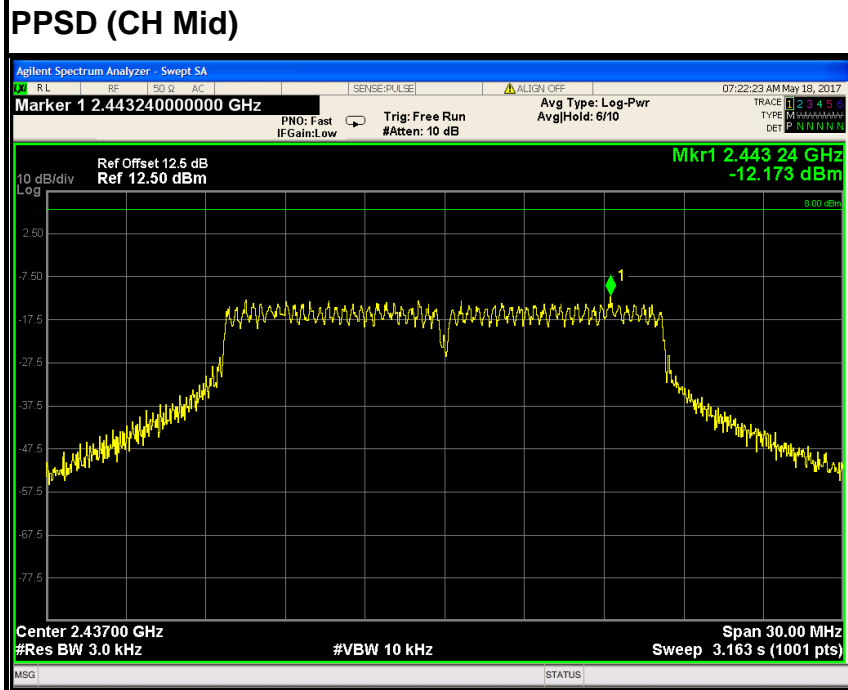
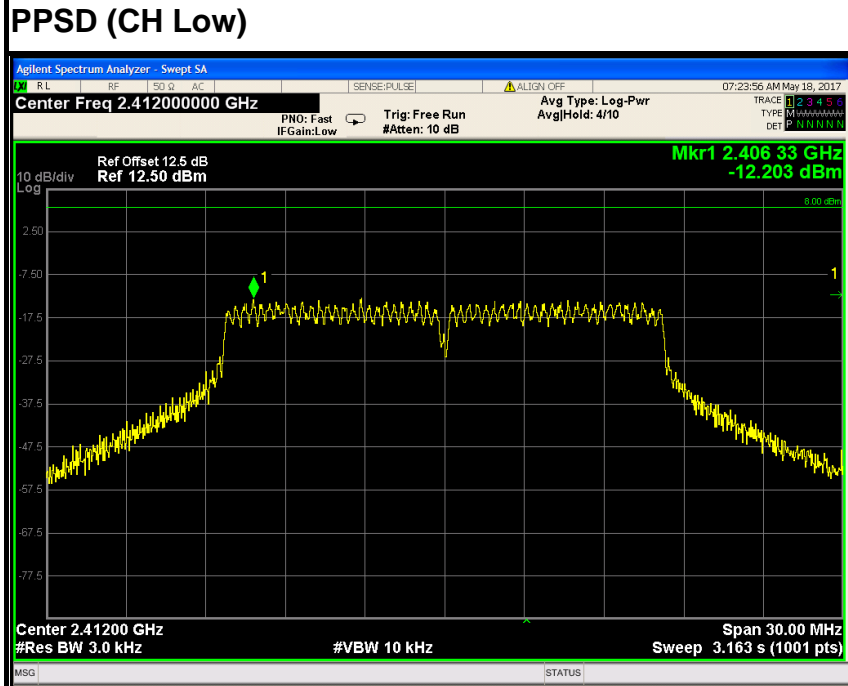




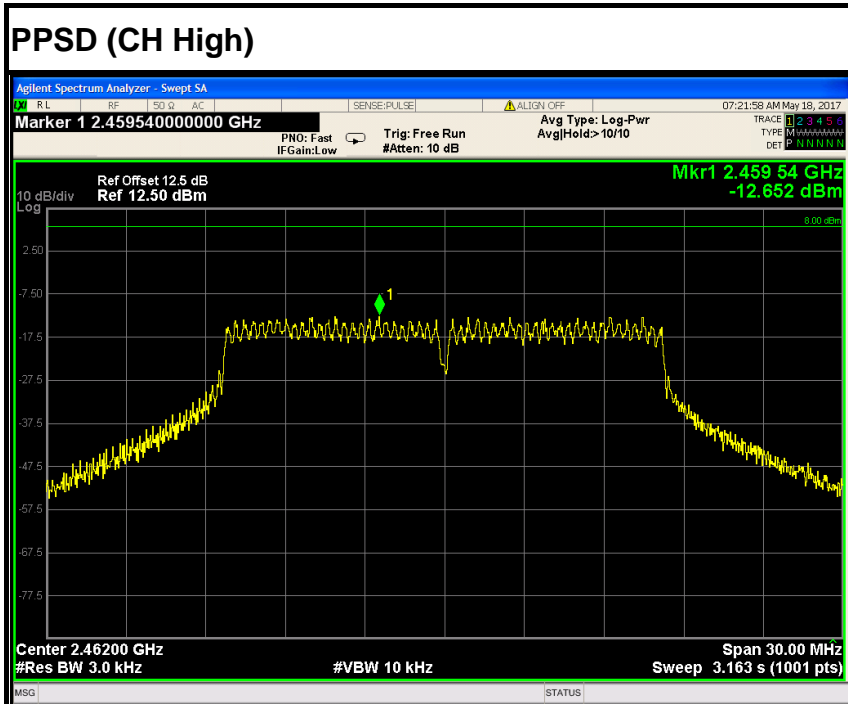

### IEEE 802.11g mode (Antenna 2)

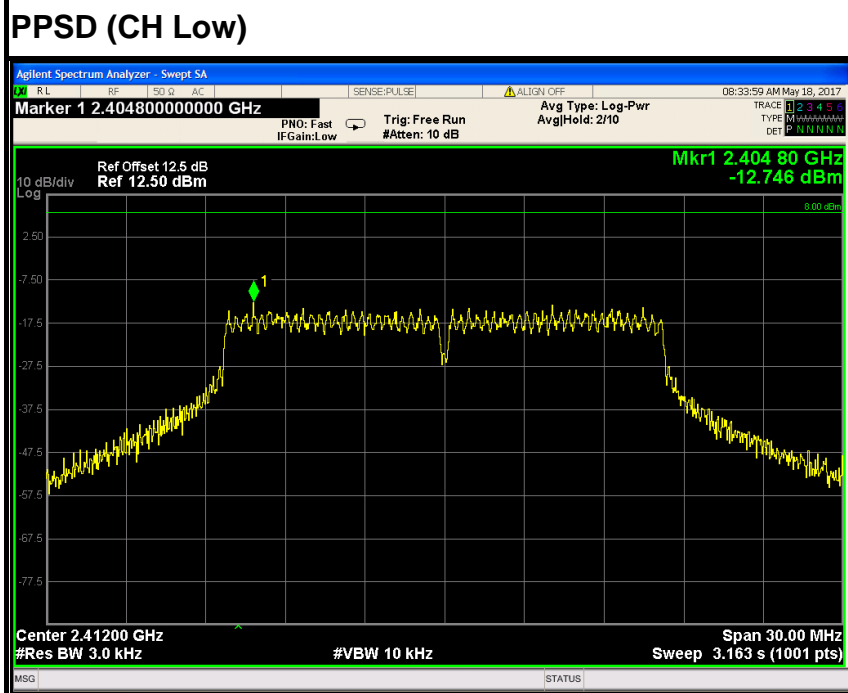

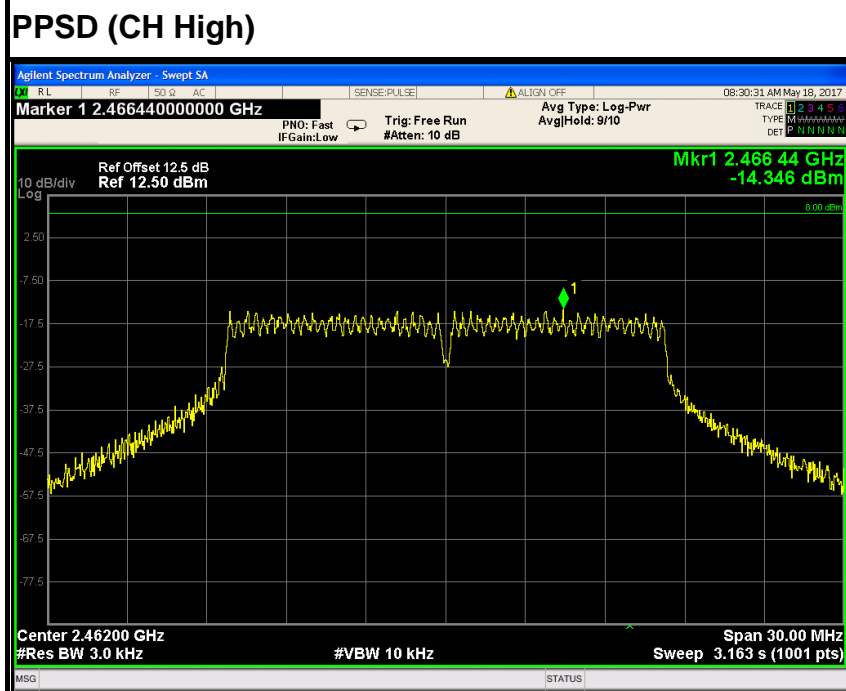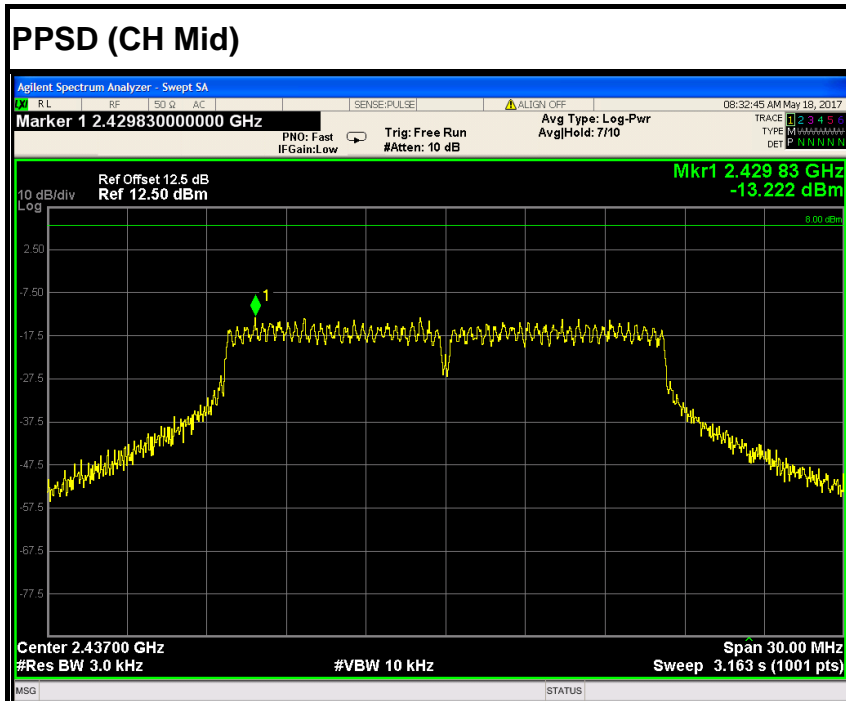



### IEEE 802.11n HT20 MHz mode (Antenna 1)

