




IEEE 802.11ax HE40_Ant1_2422MHz_0~Reference



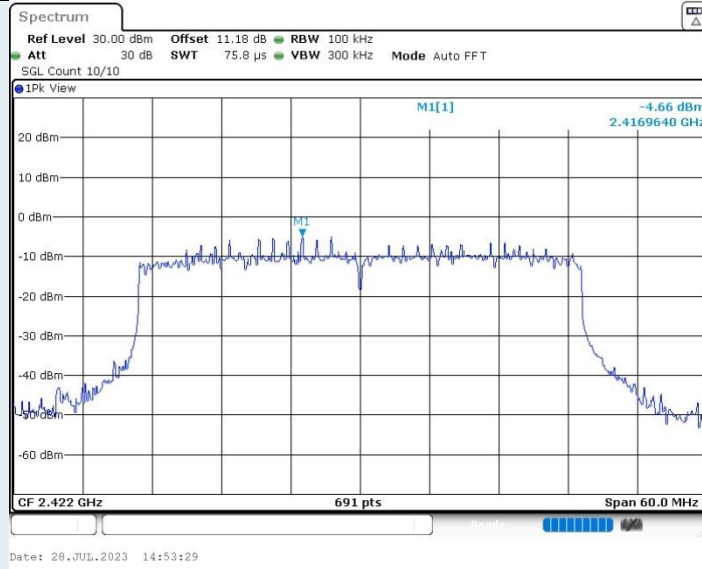


IEEE 802.11ax HE40_Ant1_2422MHz_30MHz~1000MHz

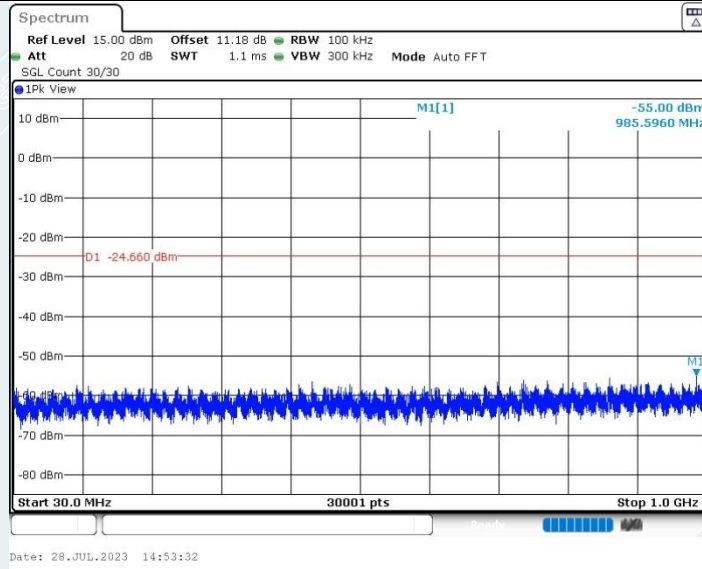


IEEE 802.11ax HE40_Ant1_2422MHz_1000MHz~26500MHz

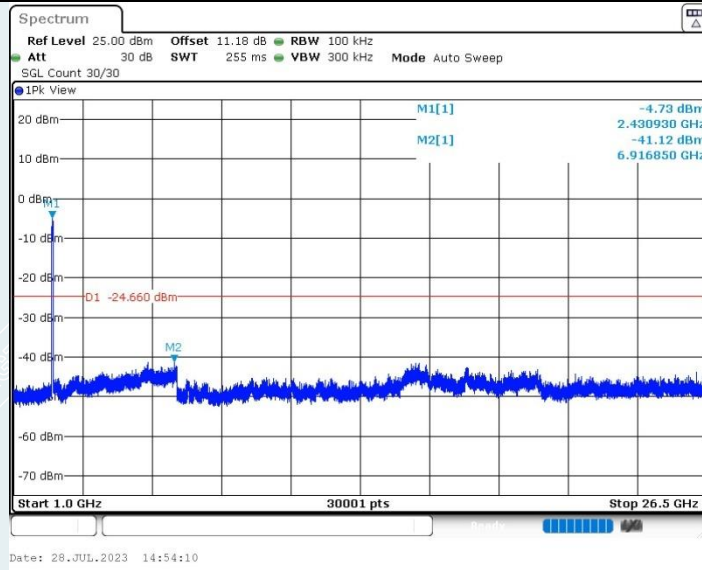


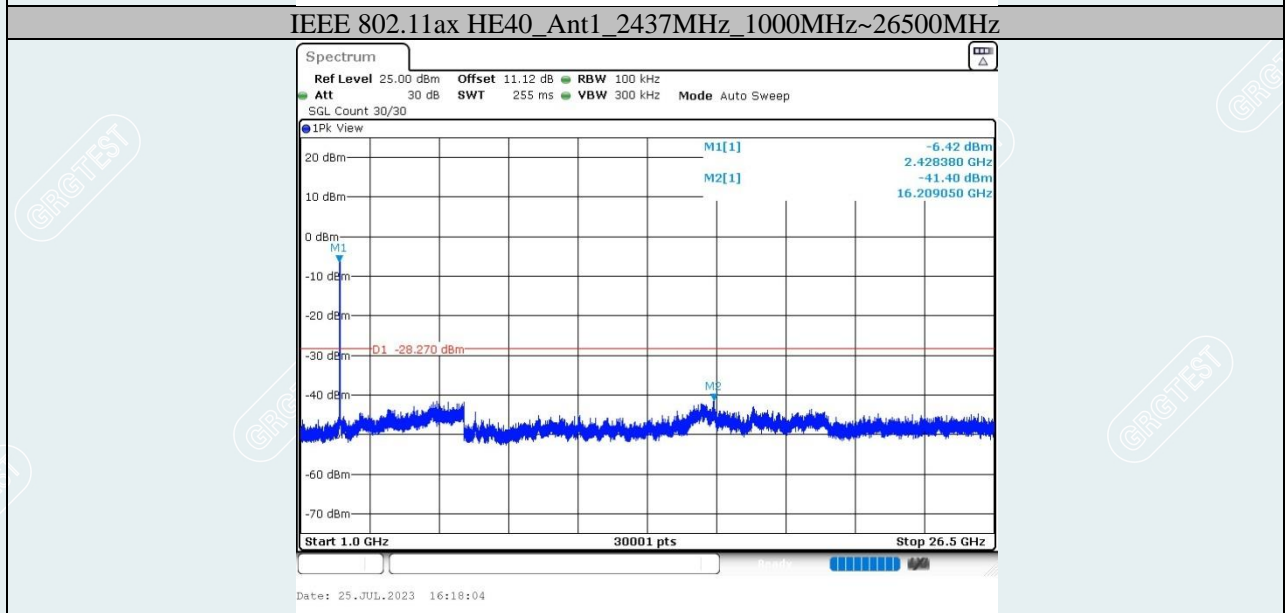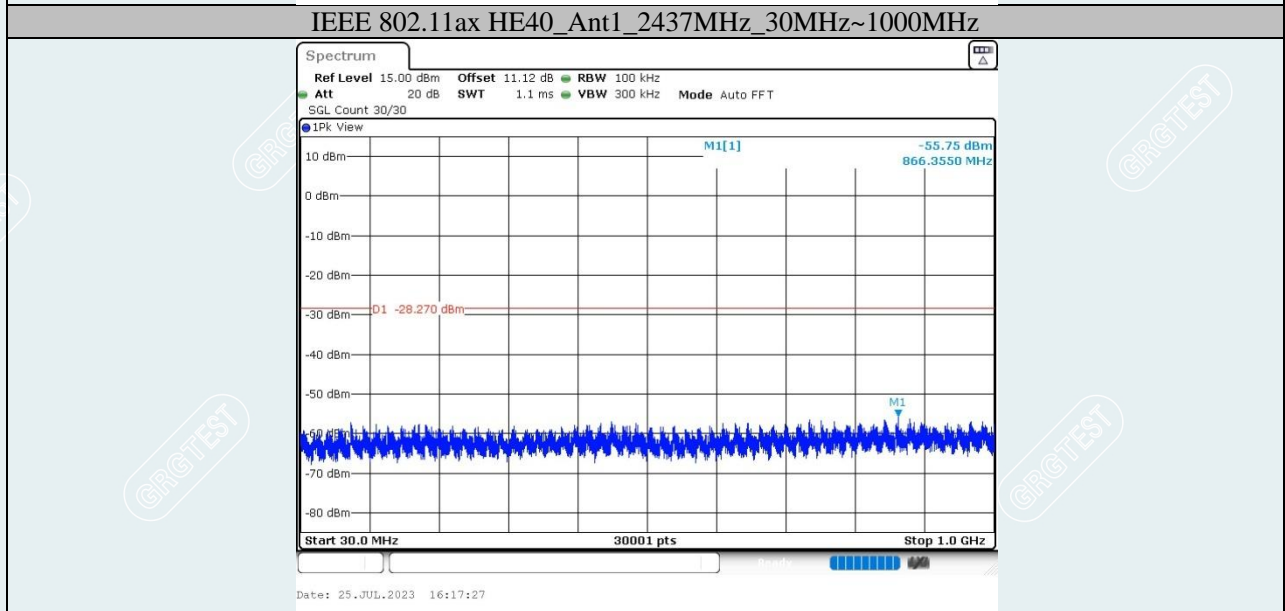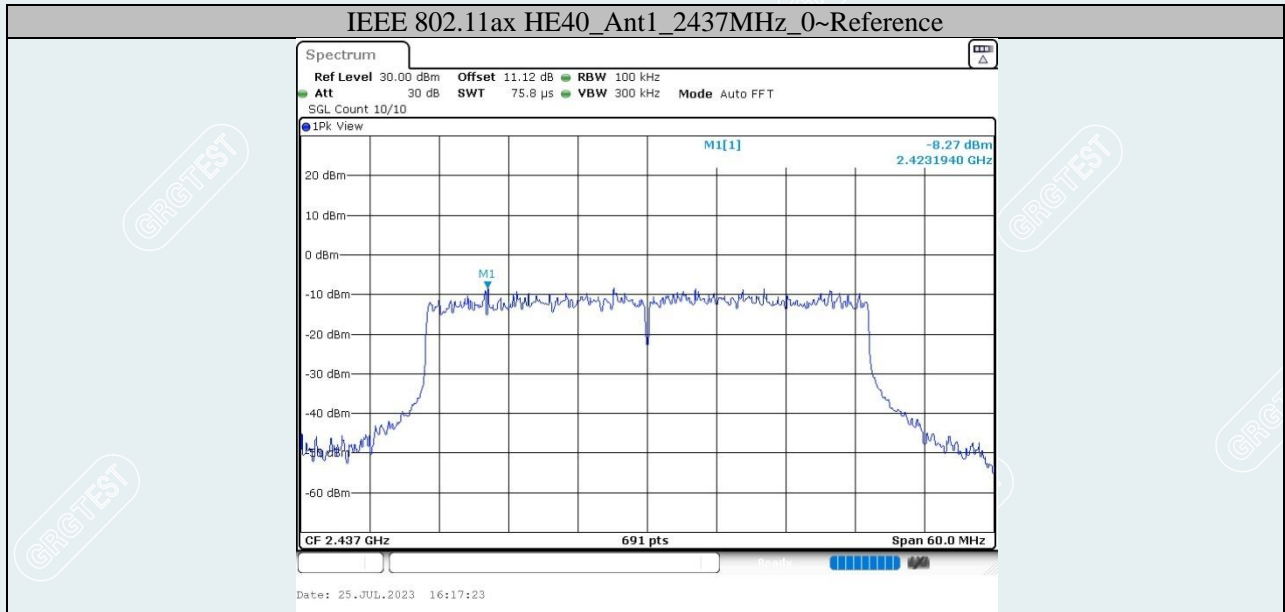


IEEE 802.11ax HE40_Ant1_2452MHz_0~Reference

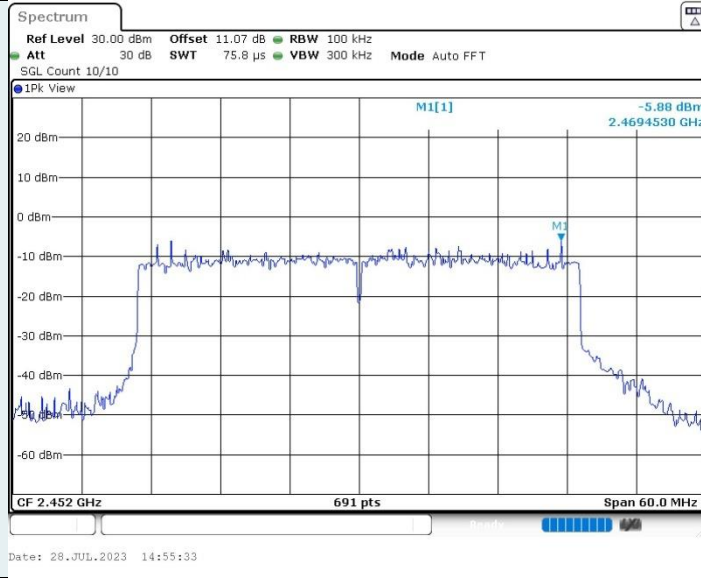

IEEE 802.11ax HE40_Ant1_2452MHz_30MHz~1000MHz

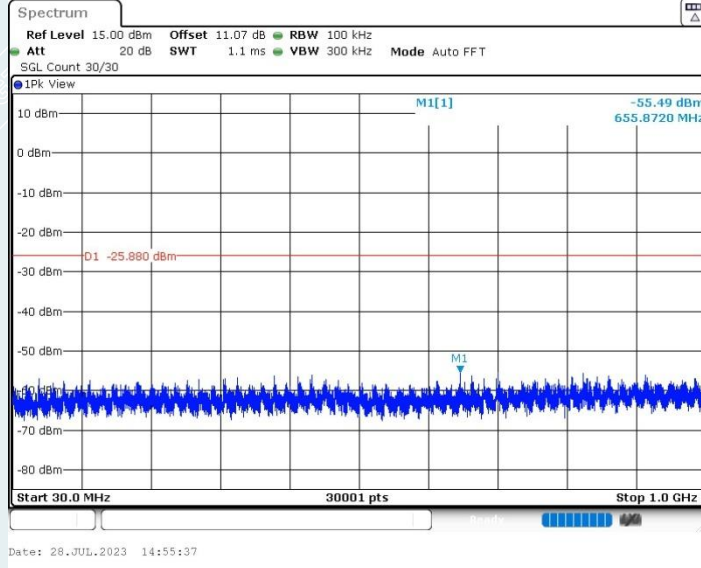

IEEE 802.11ax HE40_Ant1_2452MHz_1000MHz~26500MHz

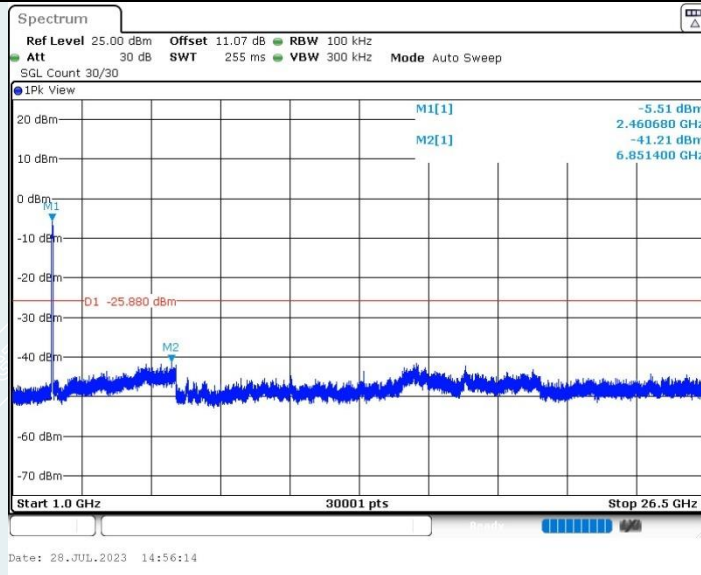

11. RESTRICTED BANDS OF OPERATION

11.1 LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

| Frequency(MHz) | Frequency(MHz) | Frequency(MHz) | Frequency(GHz) |
|---------------------|-----------------------|-----------------|----------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | |
| 13.36 - 13.41 | | | |

| Frequency (MHz) | Quasi-peak($\mu\text{V}/\text{m}$) | Measurement distance(m) | Quasi-peak($\text{dB}\mu\text{V}/\text{m}$)@distance 3m |
|-----------------|--------------------------------------|-------------------------|---|
| 0.009-0.490 | 2400/F(kHz) | 300 | 128.5~93.8 |
| 0.490-1.705 | 24000/F(kHz) | 30 | 73.8~63 |
| 1.705-30.0 | 30 | 30 | 69.5 |
| 30~88 | 100 | 3 | 40 |
| 88~216 | 150 | 3 | 43.5 |
| 216~960 | 200 | 3 | 46 |
| Above 960 | 500 | 3 | 54 |


11.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 DTS Measurement Guidance.

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) PEAK: RBW=1MHz / VBW=1MHz / Sweep=AUTO.
 - b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO.

If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, Where T is defined in section 2.8.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus polarization are measured.

11.3 TEST SETUP

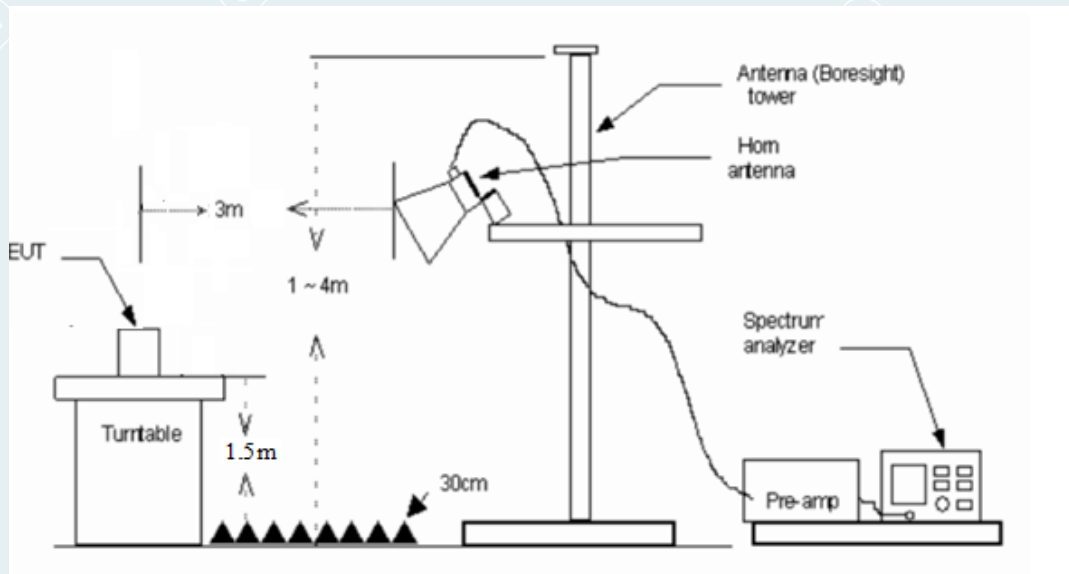

11.4 TEST RESULTS

Pre-scanned in three placement surfaces, Erect, Lateral standing, Handstand. The worst cases mode (Handstand) were recorded in this report.

IEEE 802.11b mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

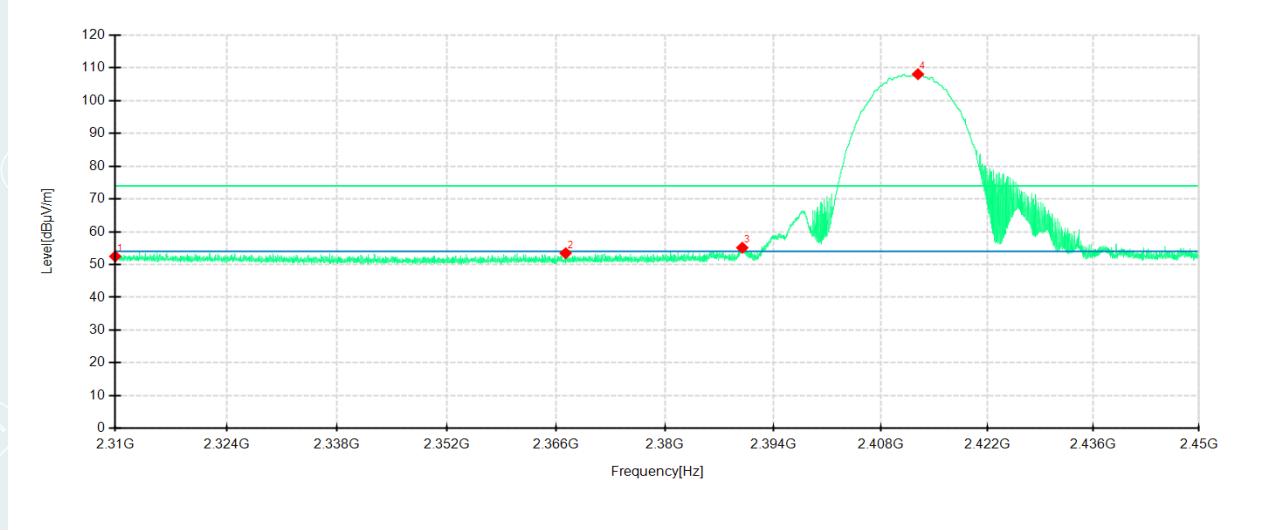

Detector mode: Peak

Polarity: Vertical

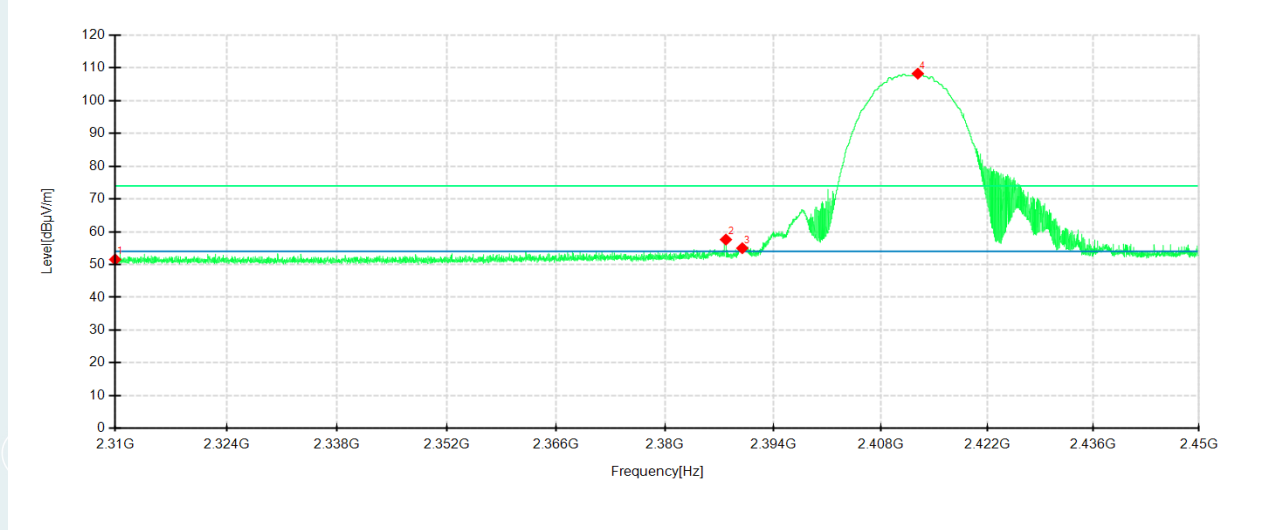

| No. | Frequency MHz | Reading dB μ V/m | Level dB μ V/m | Factor dB | Limit dB μ V/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|------------------|-------------------------|-----------------------|--------------|-----------------------|--------------|--------------|------------|------------|----------|
| 1 | 2310.0000 | 46.89 | 52.48 | 5.59 | 74.00 | 21.52 | 200 | 67 | Horizontal | / |
| 2 | 2367.1900 | 48.86 | 53.46 | 4.60 | 74.00 | 20.54 | 100 | 314 | Horizontal | / |
| 3 | 2390.0000 | 50.33 | 55.13 | 4.80 | 74.00 | 18.87 | 100 | 294 | Horizontal | / |
| 4 | 2412.9000 | 103.13 | 108.06 | 4.93 | 74.00 | -34.06 | 100 | 314 | Horizontal | No limit |
| 1 | 2310.0000 | 46.65 | 51.54 | 4.89 | 74.00 | 22.46 | 100 | 146 | Vertical | / |
| 2 | 2387.8750 | 52.43 | 57.61 | 5.18 | 74.00 | 16.39 | 100 | 305 | Vertical | / |
| 3 | 2390.0000 | 49.76 | 54.98 | 5.22 | 74.00 | 19.02 | 200 | 265 | Vertical | / |
| 4 | 2412.8825 | 102.77 | 108.23 | 5.46 | 74.00 | -34.23 | 100 | 325 | Vertical | No limit |

----- The following blanks -----

IEEE 802.11b mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

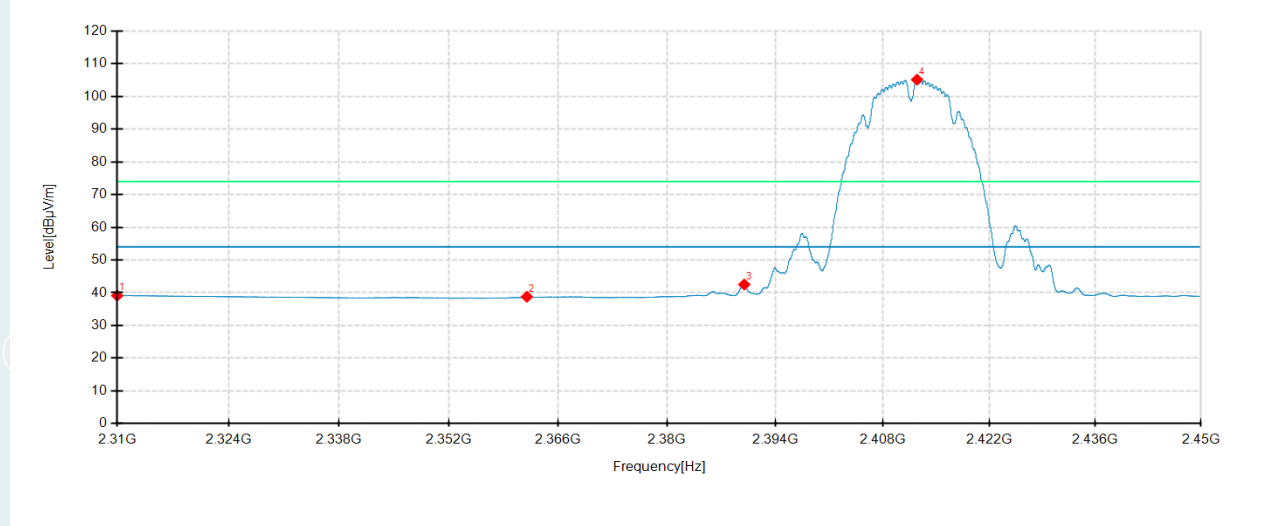

Detector mode: Average

Polarity: Vertical

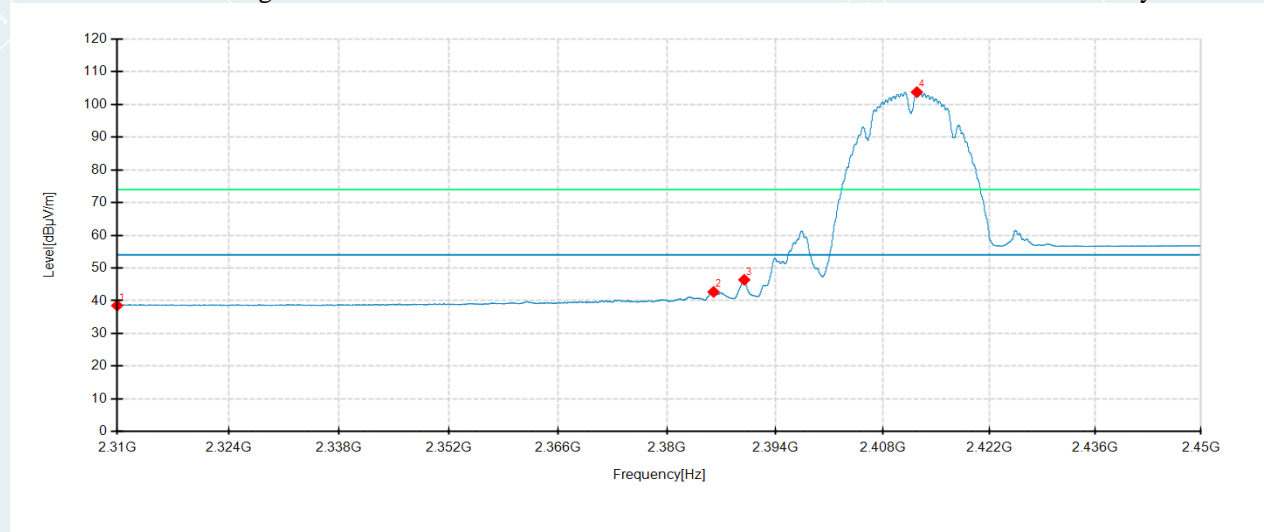

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 33.53 | 39.12 | 5.59 | 54.00 | 14.88 | 100 | 17 | Horizontal | / |
| 2 | 2361.9575 | 34.22 | 38.78 | 4.56 | 54.00 | 15.22 | 200 | 216 | Horizontal | / |
| 3 | 2390.0000 | 37.72 | 42.52 | 4.80 | 54.00 | 11.48 | 100 | 223 | Horizontal | / |
| 4 | 2412.5150 | 100.20 | 105.13 | 4.93 | 54.00 | -51.13 | 100 | 293 | Horizontal | No limit |
| 1 | 2310.0000 | 33.65 | 38.54 | 4.89 | 54.00 | 15.46 | 200 | 247 | Vertical | / |
| 2 | 2386.0200 | 37.55 | 42.70 | 5.15 | 54.00 | 11.30 | 200 | 306 | Vertical | / |
| 3 | 2390.0000 | 41.19 | 46.41 | 5.22 | 54.00 | 7.59 | 200 | 306 | Vertical | / |
| 4 | 2412.4975 | 98.29 | 103.74 | 5.45 | 54.00 | -49.74 | 200 | 306 | Vertical | No limit |

IEEE 802.11b mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

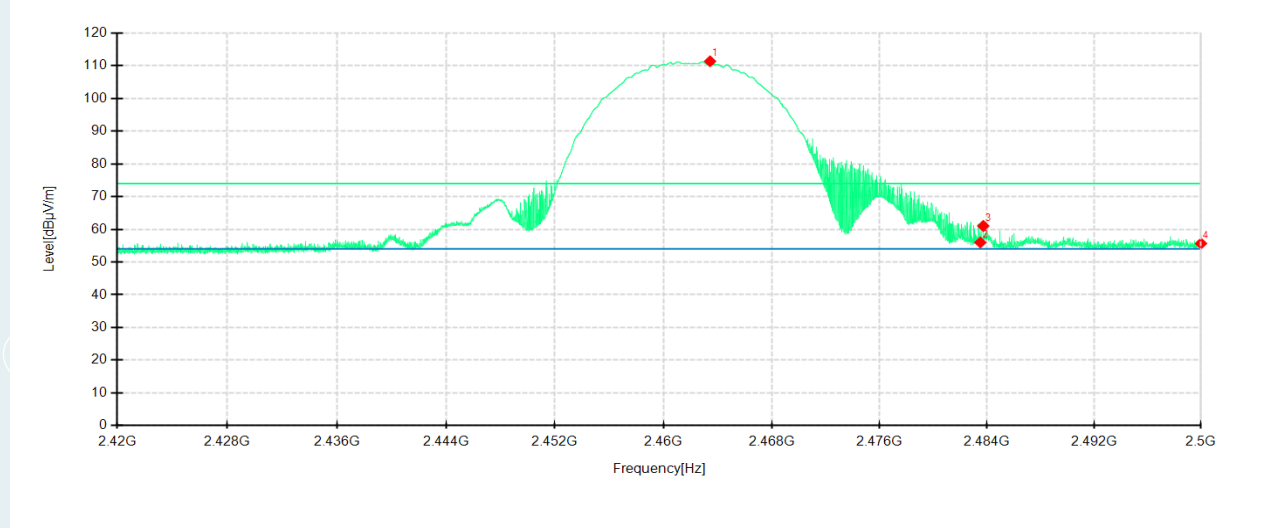

Detector mode: Peak

Polarity: Vertical

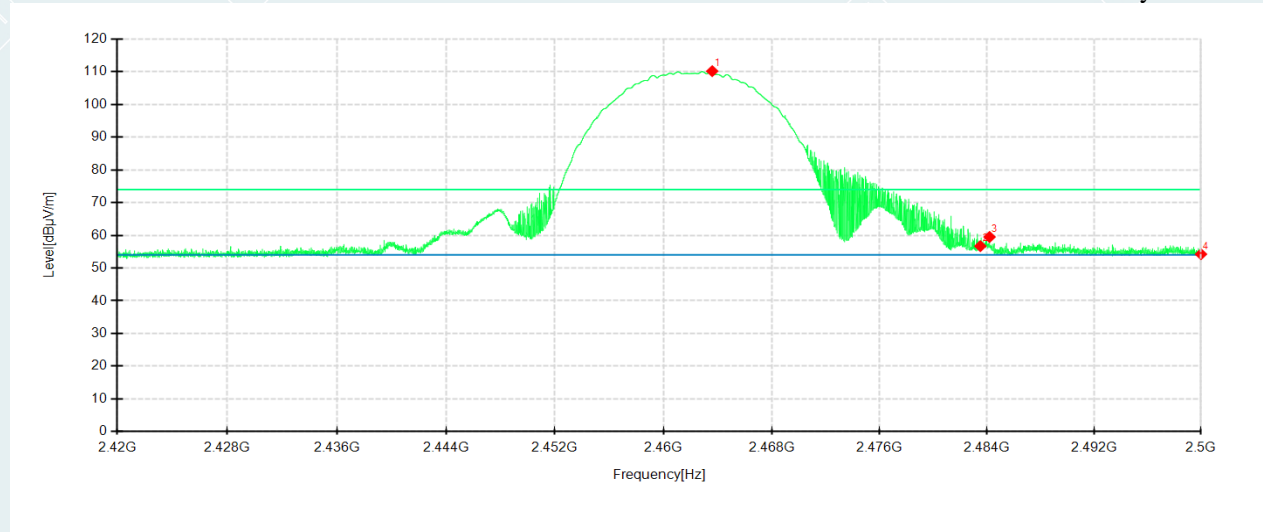

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2463.4400 | 106.04 | 111.34 | 5.30 | 74.00 | -37.34 | 100 | 294 | Horizontal | No limit |
| 2 | 2483.5000 | 50.35 | 55.98 | 5.63 | 74.00 | 18.02 | 200 | 281 | Horizontal | / |
| 3 | 2483.7200 | 55.39 | 61.03 | 5.64 | 74.00 | 12.97 | 100 | 314 | Horizontal | / |
| 4 | 2500.0000 | 49.76 | 55.66 | 5.90 | 74.00 | 18.34 | 200 | 252 | Horizontal | / |
| 1 | 2463.6000 | 104.48 | 110.17 | 5.69 | 74.00 | -36.17 | 100 | 322 | Vertical | No limit |
| 2 | 2483.5000 | 51.00 | 56.70 | 5.70 | 74.00 | 17.30 | 200 | 324 | Vertical | / |
| 3 | 2484.1900 | 53.80 | 59.50 | 5.70 | 74.00 | 14.50 | 100 | 342 | Vertical | / |
| 4 | 2500.0000 | 48.54 | 54.24 | 5.70 | 74.00 | 19.76 | 100 | 333 | Vertical | / |

IEEE 802.11b mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

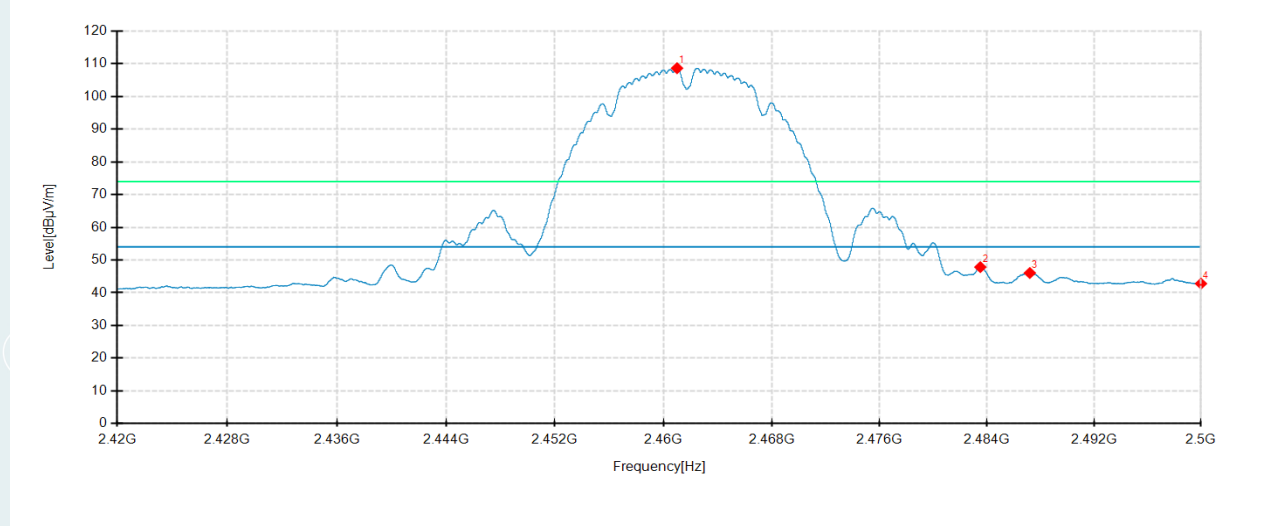

Detector mode: Average

Polarity: Vertical

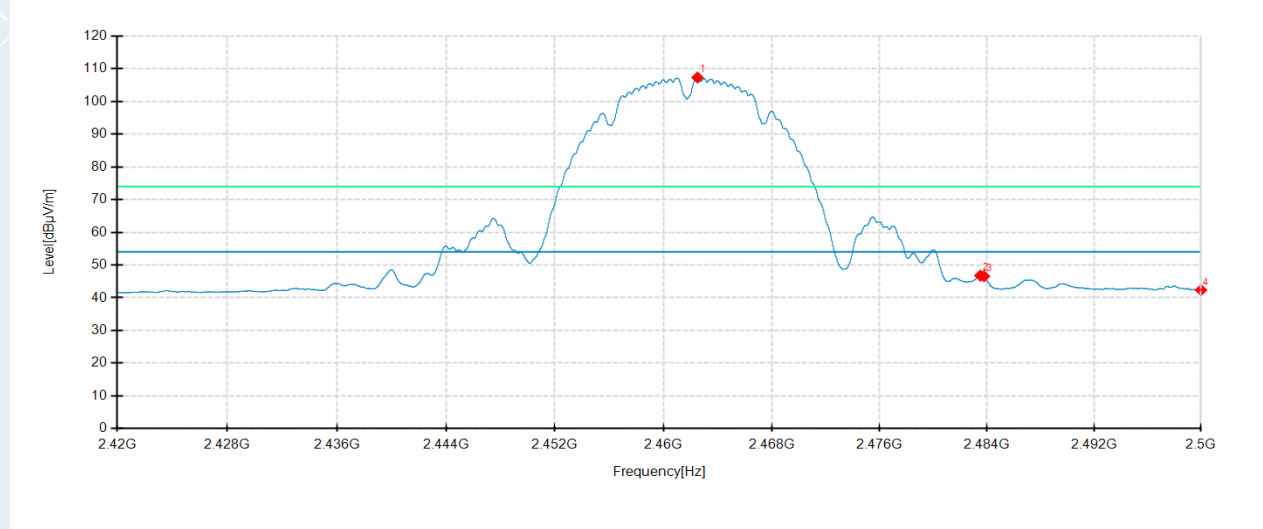

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2461.0000 | 103.37 | 108.63 | 5.26 | 54.00 | -54.63 | 100 | 286 | Horizontal | No limit |
| 2 | 2483.5000 | 42.21 | 47.84 | 5.63 | 54.00 | 6.16 | 100 | 305 | Horizontal | / |
| 3 | 2487.1900 | 40.36 | 46.05 | 5.69 | 54.00 | 7.95 | 100 | 305 | Horizontal | / |
| 4 | 2500.0000 | 36.89 | 42.79 | 5.90 | 54.00 | 11.21 | 100 | 305 | Horizontal | / |
| 1 | 2462.5100 | 101.62 | 107.31 | 5.69 | 54.00 | -53.31 | 200 | 312 | Vertical | No limit |
| 2 | 2483.5000 | 41.09 | 46.79 | 5.70 | 54.00 | 7.21 | 200 | 305 | Vertical | / |
| 3 | 2483.7800 | 40.86 | 46.56 | 5.70 | 54.00 | 7.44 | 200 | 305 | Vertical | / |
| 4 | 2500.0000 | 36.66 | 42.36 | 5.70 | 54.00 | 11.64 | 200 | 305 | Vertical | / |

IEEE 802.11g mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

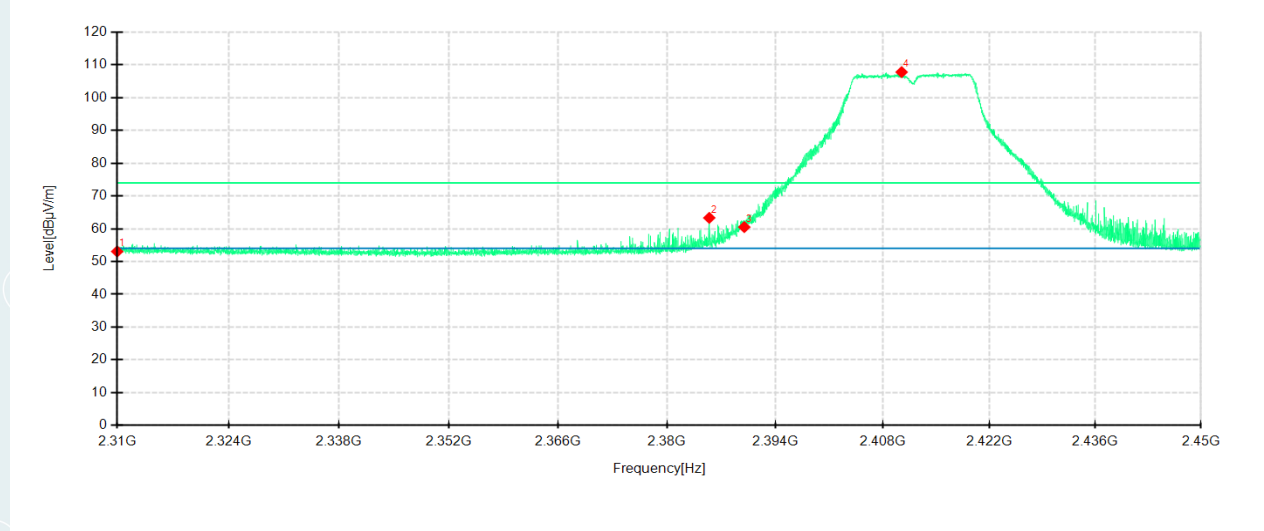

Detector mode: Peak

Polarity: Vertical

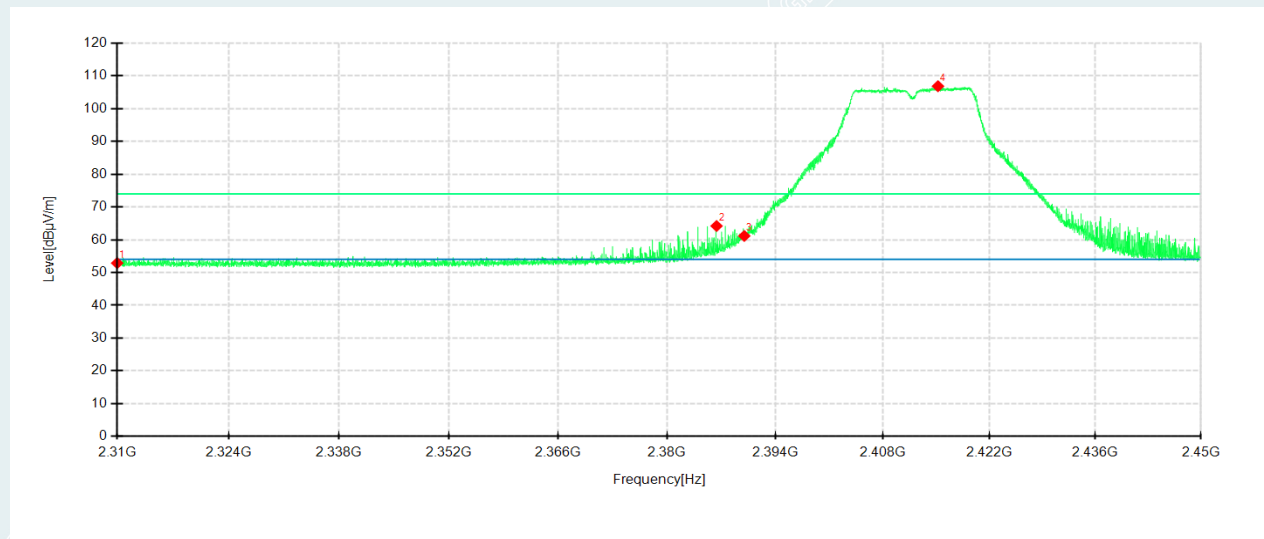

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 47.48 | 53.07 | 5.59 | 74.00 | 20.93 | 100 | 344 | Horizontal | / |
| 2 | 2385.4600 | 58.56 | 63.32 | 4.76 | 74.00 | 10.68 | 100 | 304 | Horizontal | / |
| 3 | 2390.0000 | 55.72 | 60.52 | 4.80 | 74.00 | 13.48 | 100 | 314 | Horizontal | / |
| 4 | 2410.5025 | 102.86 | 107.78 | 4.92 | 74.00 | -33.78 | 100 | 304 | Horizontal | No limit |
| 1 | 2310.0000 | 47.99 | 52.88 | 4.89 | 74.00 | 21.12 | 100 | 74 | Vertical | / |
| 2 | 2386.4050 | 59.04 | 64.20 | 5.16 | 74.00 | 9.80 | 200 | 315 | Vertical | / |
| 3 | 2390.0000 | 55.95 | 61.17 | 5.22 | 74.00 | 12.83 | 200 | 305 | Vertical | / |
| 4 | 2415.2625 | 101.36 | 106.83 | 5.47 | 74.00 | -32.83 | 100 | 321 | Vertical | No limit |

IEEE 802.11g mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

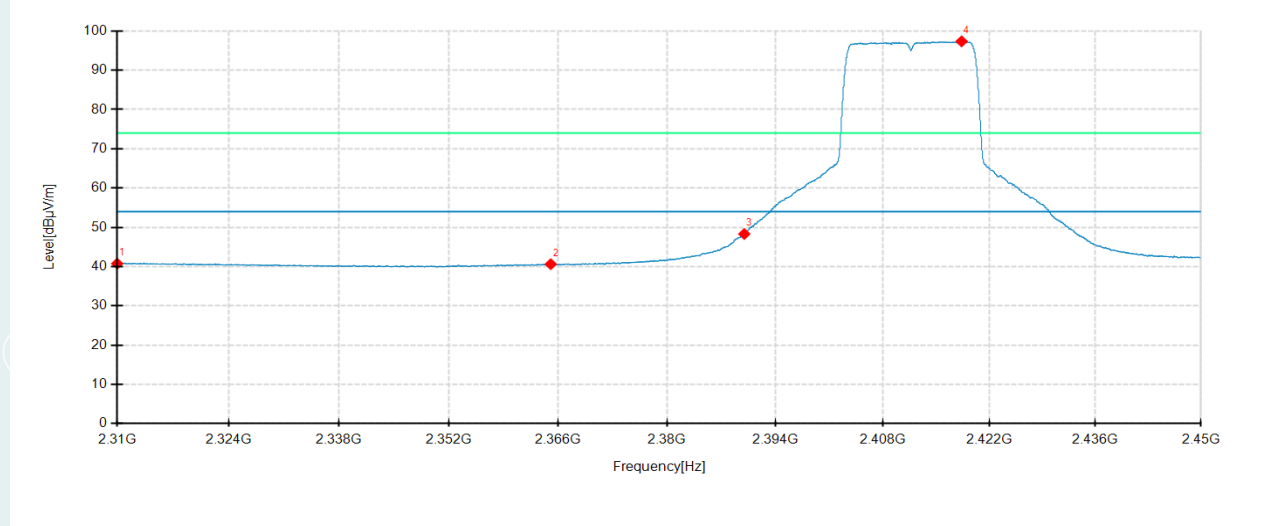

Detector mode: Average

Polarity: Vertical

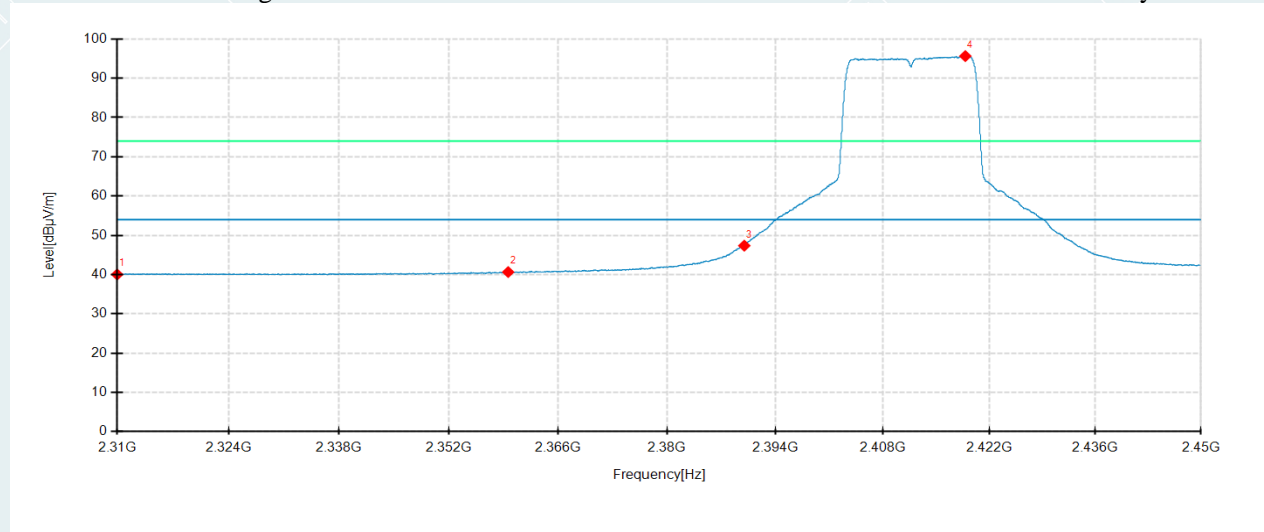

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|------------------|-------------------|-----------------|--------------|-----------------|--------------|--------------|------------|------------|----------|
| 1 | 2310.0000 | 35.17 | 40.76 | 5.59 | 54.00 | 13.24 | 100 | 284 | Horizontal | / |
| 2 | 2365.0200 | 36.03 | 40.62 | 4.59 | 54.00 | 13.38 | 100 | 315 | Horizontal | / |
| 3 | 2390.0000 | 43.50 | 48.30 | 4.80 | 54.00 | 5.70 | 100 | 305 | Horizontal | / |
| 4 | 2418.3600 | 92.41 | 97.36 | 4.95 | 54.00 | -43.36 | 100 | 294 | Horizontal | No limit |
| 1 | 2310.0000 | 35.14 | 40.03 | 4.89 | 54.00 | 13.97 | 100 | 312 | Vertical | / |
| 2 | 2359.5600 | 35.93 | 40.65 | 4.72 | 54.00 | 13.35 | 100 | 332 | Vertical | / |
| 3 | 2390.0000 | 42.15 | 47.37 | 5.22 | 54.00 | 6.63 | 200 | 305 | Vertical | / |
| 4 | 2418.8500 | 90.14 | 95.64 | 5.50 | 54.00 | -41.64 | 200 | 295 | Vertical | No limit |

IEEE 802.11g mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

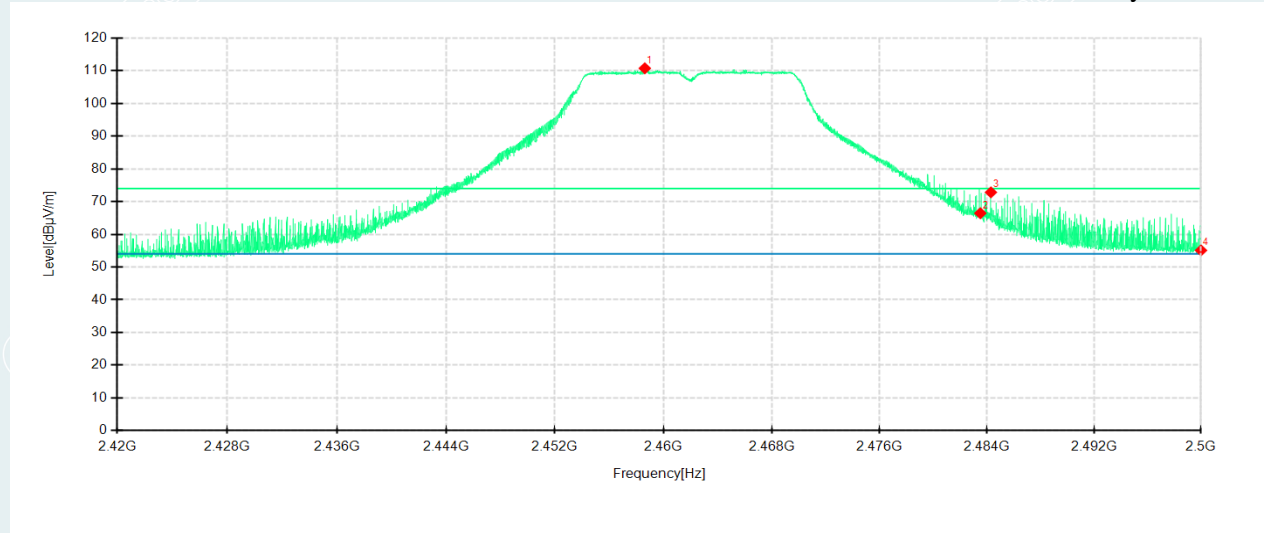

Detector mode: Peak

Polarity: Vertical

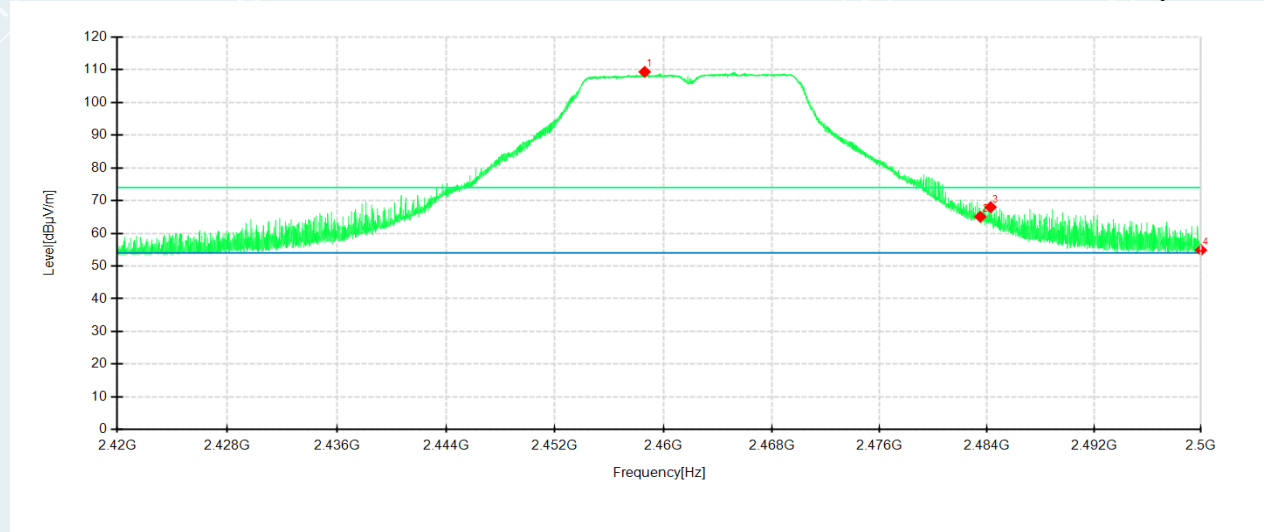

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2458.6200 | 105.50 | 110.73 | 5.23 | 74.00 | -36.73 | 100 | 304 | Horizontal | No limit |
| 2 | 2483.5000 | 60.82 | 66.45 | 5.63 | 74.00 | 7.55 | 100 | 304 | Horizontal | / |
| 3 | 2484.2900 | 67.19 | 72.84 | 5.65 | 74.00 | 1.16 | 100 | 315 | Horizontal | / |
| 4 | 2500.0000 | 49.20 | 55.10 | 5.90 | 74.00 | 18.90 | 100 | 255 | Horizontal | / |
| 1 | 2458.6100 | 103.65 | 109.34 | 5.69 | 74.00 | -35.34 | 100 | 315 | Vertical | No limit |
| 2 | 2483.5000 | 59.37 | 65.07 | 5.70 | 74.00 | 8.93 | 100 | 315 | Vertical | / |
| 3 | 2484.2700 | 62.28 | 67.98 | 5.70 | 74.00 | 6.02 | 200 | 330 | Vertical | / |
| 4 | 2500.0000 | 49.16 | 54.86 | 5.70 | 74.00 | 19.14 | 200 | 330 | Vertical | / |

IEEE 802.11g mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

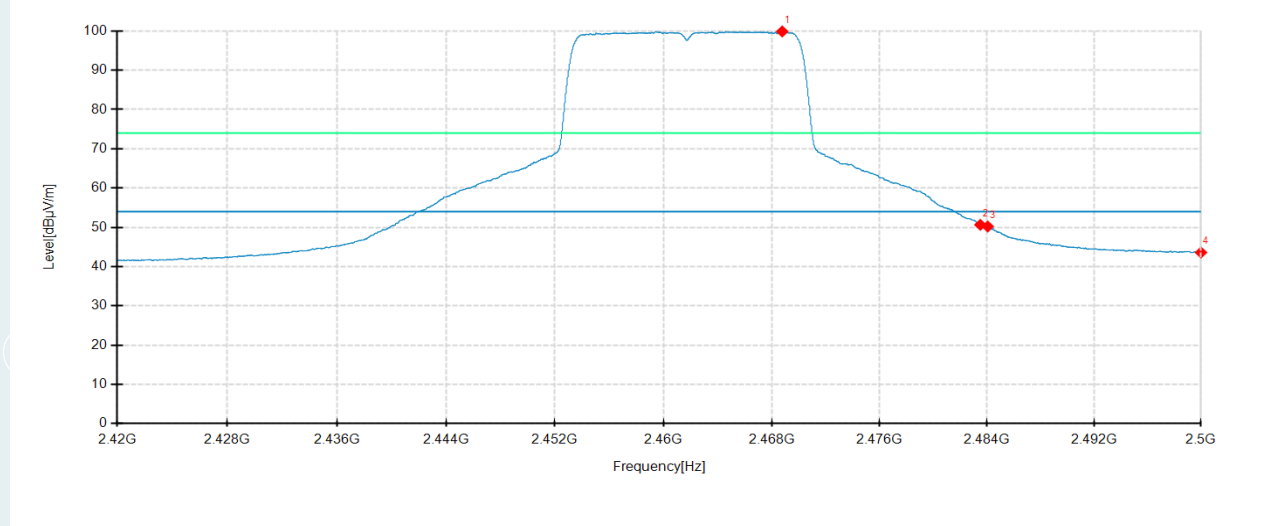

Detector mode: Average

Polarity: Vertical

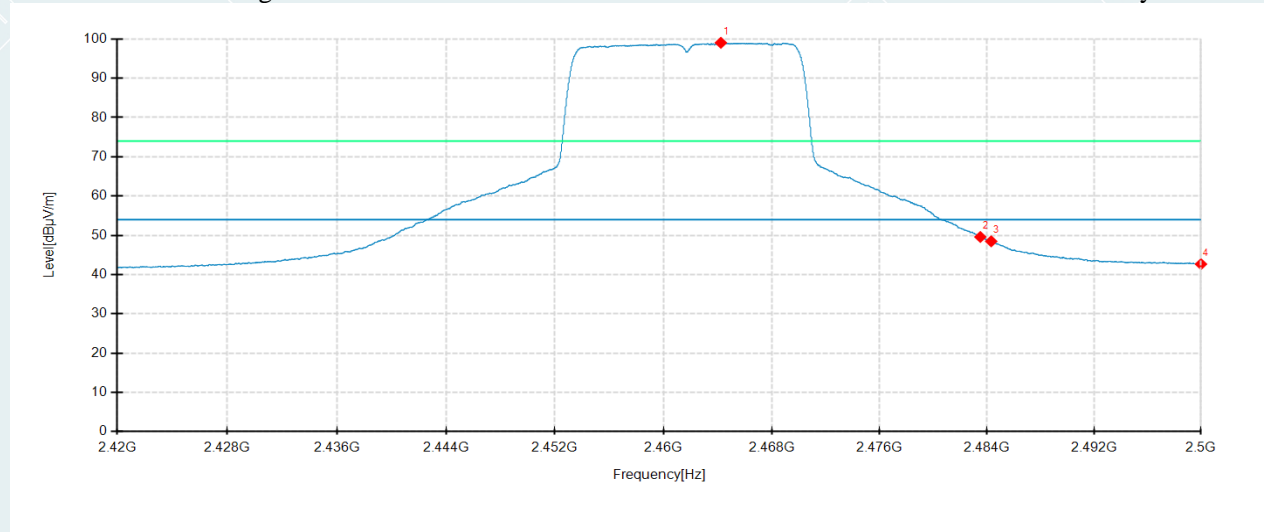

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2468.7800 | 94.49 | 99.88 | 5.39 | 54.00 | -45.88 | 100 | 302 | Horizontal | No limit |
| 2 | 2483.5000 | 45.01 | 50.64 | 5.63 | 54.00 | 3.36 | 100 | 312 | Horizontal | / |
| 3 | 2484.0500 | 44.57 | 50.21 | 5.64 | 54.00 | 3.79 | 100 | 283 | Horizontal | / |
| 4 | 2500.0000 | 37.69 | 43.59 | 5.90 | 54.00 | 10.41 | 100 | 292 | Horizontal | / |
| 1 | 2464.2400 | 93.34 | 99.03 | 5.69 | 54.00 | -45.03 | 100 | 315 | Vertical | No limit |
| 2 | 2483.5000 | 43.88 | 49.58 | 5.70 | 54.00 | 4.42 | 200 | 314 | Vertical | / |
| 3 | 2484.3100 | 42.77 | 48.47 | 5.70 | 54.00 | 5.53 | 200 | 314 | Vertical | / |
| 4 | 2500.0000 | 36.97 | 42.67 | 5.70 | 54.00 | 11.33 | 100 | 304 | Vertical | / |

IEEE 802.11n HT20 mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

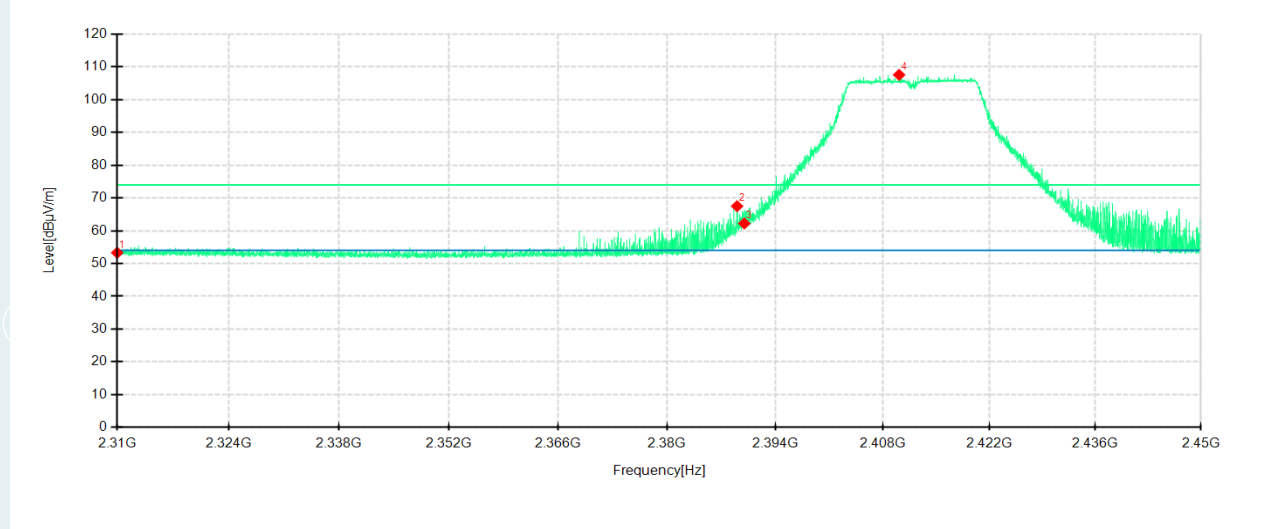

Detector mode: Peak

Polarity: Vertical

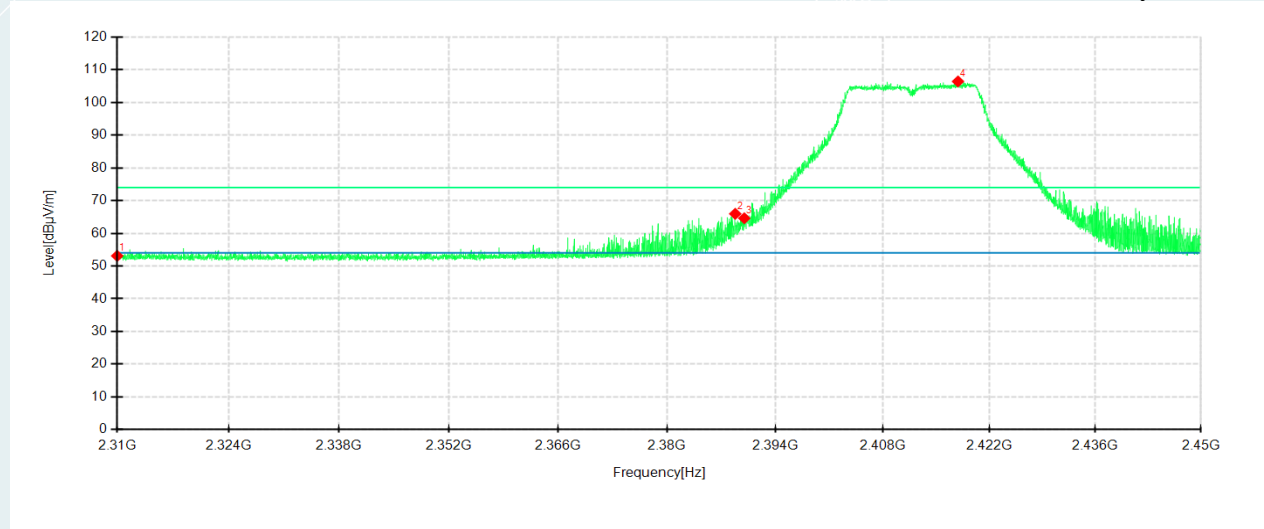

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 47.70 | 53.29 | 5.59 | 74.00 | 20.71 | 100 | 25 | Horizontal | / |
| 2 | 2389.0650 | 62.72 | 67.50 | 4.78 | 74.00 | 6.50 | 100 | 298 | Horizontal | / |
| 3 | 2390.0000 | 57.43 | 62.23 | 4.80 | 74.00 | 11.77 | 100 | 260 | Horizontal | / |
| 4 | 2410.1700 | 102.64 | 107.56 | 4.92 | 74.00 | -33.56 | 100 | 309 | Horizontal | No limit |
| 1 | 2310.0000 | 48.21 | 53.10 | 4.89 | 74.00 | 20.90 | 200 | 123 | Vertical | / |
| 2 | 2388.8200 | 60.76 | 65.96 | 5.20 | 74.00 | 8.04 | 200 | 300 | Vertical | / |
| 3 | 2390.0000 | 59.40 | 64.62 | 5.22 | 74.00 | 9.38 | 100 | 305 | Vertical | / |
| 4 | 2417.8875 | 100.92 | 106.41 | 5.49 | 74.00 | -32.41 | 100 | 325 | Vertical | No limit |

IEEE 802.11n HT20 mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

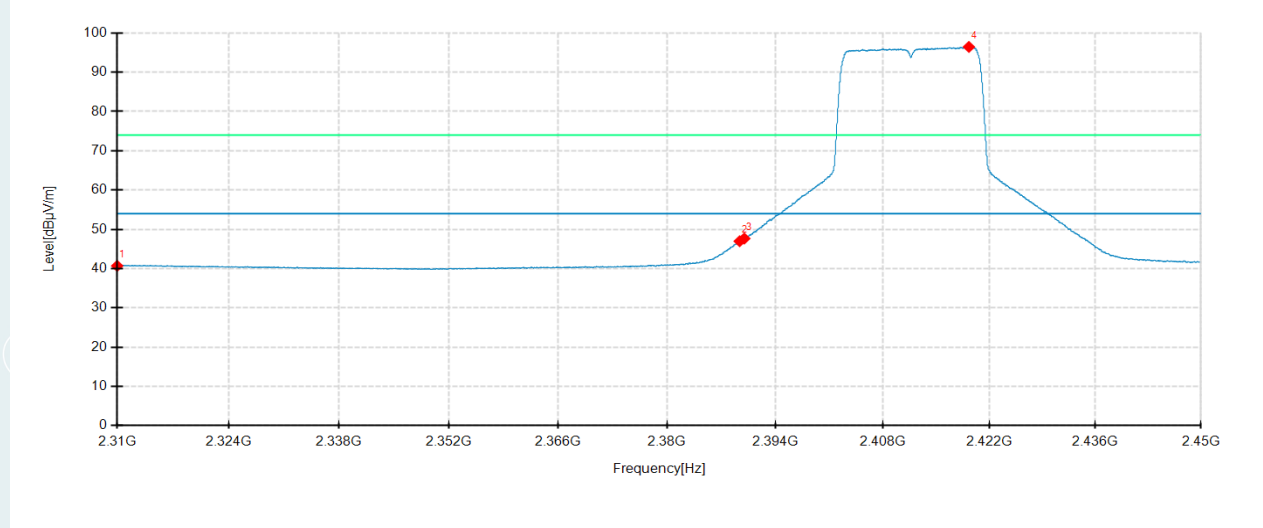

Detector mode: Average

Polarity: Vertical

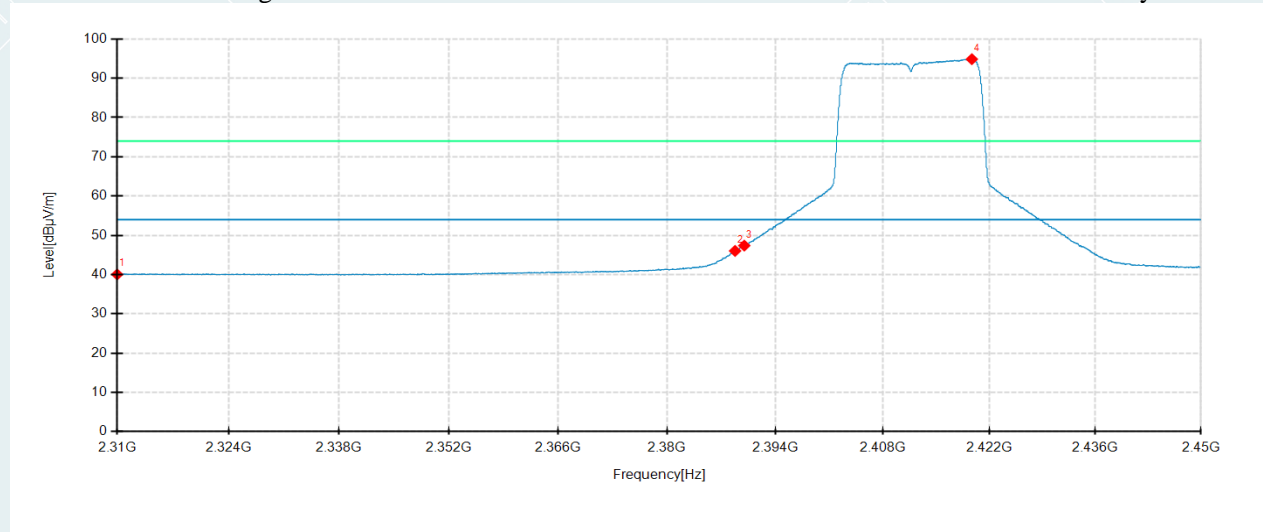

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 35.10 | 40.69 | 5.59 | 54.00 | 13.31 | 100 | 154 | Horizontal | / |
| 2 | 2389.3975 | 42.18 | 46.97 | 4.79 | 54.00 | 7.03 | 100 | 295 | Horizontal | / |
| 3 | 2390.0000 | 42.86 | 47.66 | 4.80 | 54.00 | 6.34 | 100 | 295 | Horizontal | / |
| 4 | 2419.3225 | 91.49 | 96.45 | 4.96 | 54.00 | -42.45 | 100 | 305 | Horizontal | No limit |
| 1 | 2310.0000 | 35.15 | 40.04 | 4.89 | 54.00 | 13.96 | 100 | 7 | Vertical | / |
| 2 | 2388.8025 | 40.83 | 46.03 | 5.20 | 54.00 | 7.97 | 200 | 293 | Vertical | / |
| 3 | 2390.0000 | 42.16 | 47.38 | 5.22 | 54.00 | 6.62 | 200 | 302 | Vertical | / |
| 4 | 2419.7075 | 89.35 | 94.85 | 5.50 | 54.00 | -40.85 | 200 | 302 | Vertical | No limit |

IEEE 802.11n HT20 mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

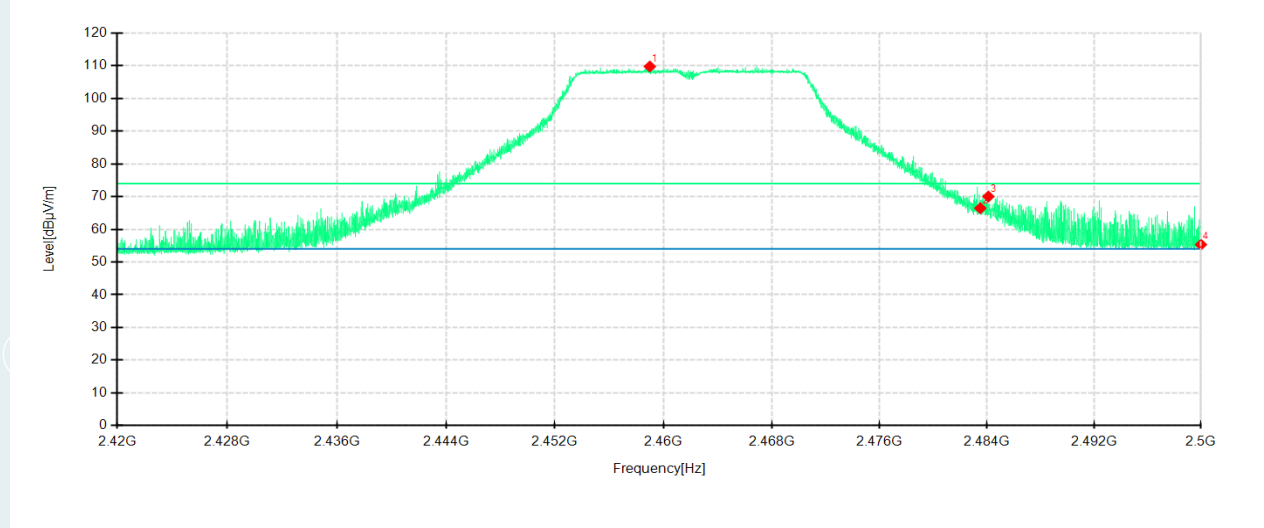

Detector mode: Peak

Polarity: Vertical

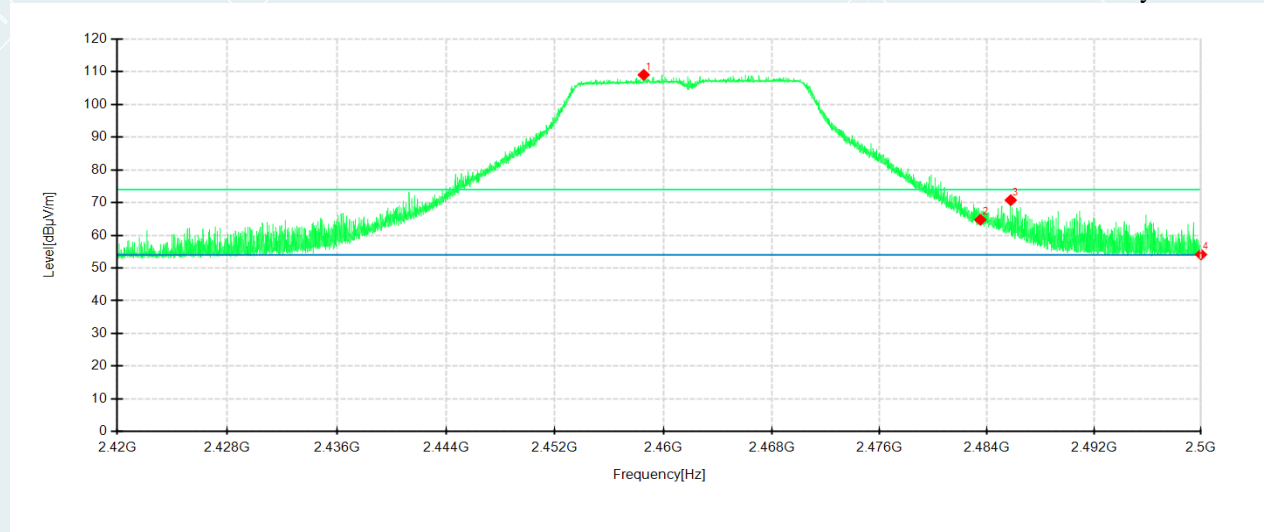

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2458.9900 | 104.52 | 109.75 | 5.23 | 74.00 | -35.75 | 100 | 313 | Horizontal | No limit |
| 2 | 2483.5000 | 60.82 | 66.45 | 5.63 | 74.00 | 7.55 | 100 | 274 | Horizontal | / |
| 3 | 2484.1000 | 64.38 | 70.02 | 5.64 | 74.00 | 3.98 | 100 | 294 | Horizontal | / |
| 4 | 2500.0000 | 49.44 | 55.34 | 5.90 | 74.00 | 18.66 | 200 | 257 | Horizontal | / |
| 1 | 2458.5400 | 103.35 | 109.04 | 5.69 | 74.00 | -35.04 | 100 | 315 | Vertical | No limit |
| 2 | 2483.5000 | 59.06 | 64.76 | 5.70 | 74.00 | 9.24 | 100 | 324 | Vertical | / |
| 3 | 2485.7700 | 65.06 | 70.75 | 5.69 | 74.00 | 3.25 | 100 | 324 | Vertical | / |
| 4 | 2500.0000 | 48.44 | 54.14 | 5.70 | 74.00 | 19.86 | 100 | 233 | Vertical | / |

IEEE 802.11n HT20 mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

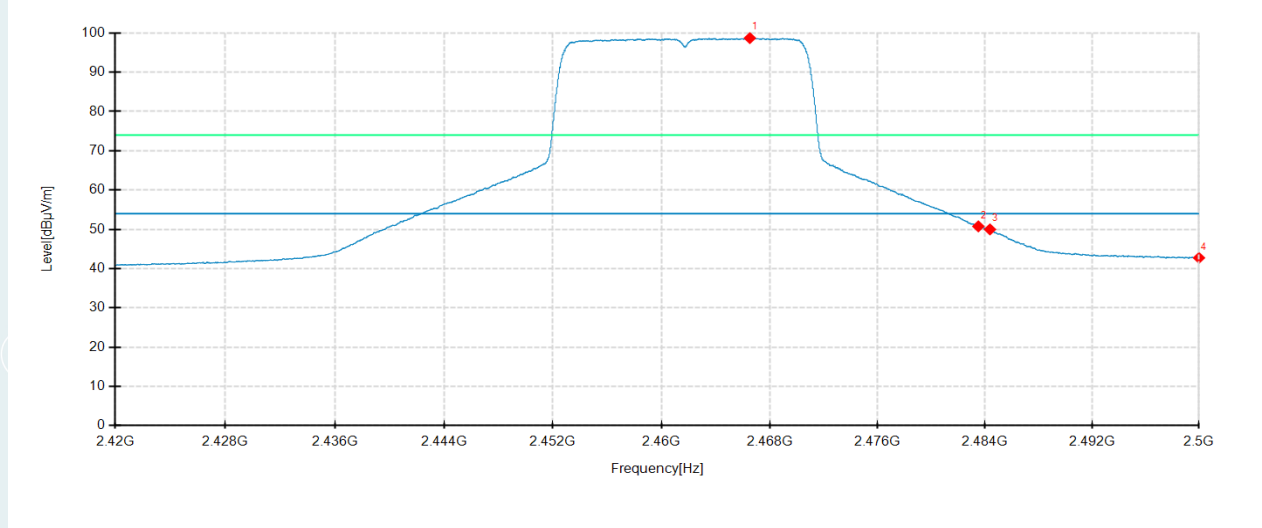

Detector mode: Average

Polarity: Vertical

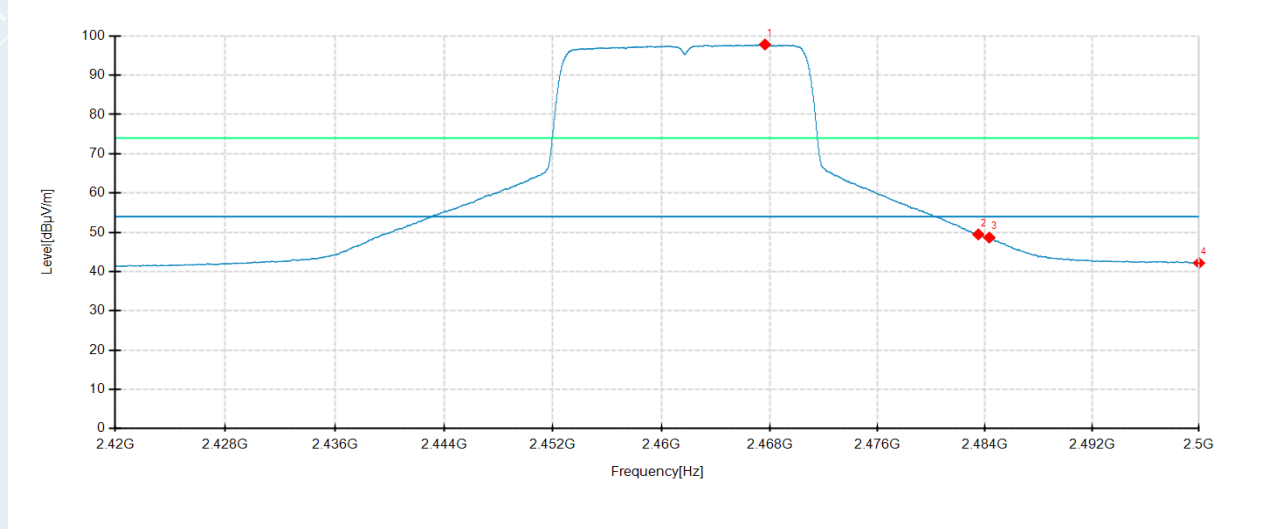

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBuV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2466.5300 | 93.35 | 98.70 | 5.35 | 54.00 | -44.70 | 100 | 301 | Horizontal | No limit |
| 2 | 2483.5000 | 45.13 | 50.76 | 5.63 | 54.00 | 3.24 | 100 | 292 | Horizontal | / |
| 3 | 2484.3700 | 44.33 | 49.98 | 5.65 | 54.00 | 4.02 | 100 | 292 | Horizontal | / |
| 4 | 2500.0000 | 36.83 | 42.73 | 5.90 | 54.00 | 11.27 | 100 | 292 | Horizontal | / |
| 1 | 2467.6500 | 92.15 | 97.84 | 5.69 | 54.00 | -43.84 | 100 | 315 | Vertical | No limit |
| 2 | 2483.5000 | 43.77 | 49.47 | 5.70 | 54.00 | 4.53 | 200 | 313 | Vertical | / |
| 3 | 2484.3200 | 42.96 | 48.66 | 5.70 | 54.00 | 5.34 | 200 | 313 | Vertical | / |
| 4 | 2500.0000 | 36.48 | 42.18 | 5.70 | 54.00 | 11.82 | 100 | 325 | Vertical | / |

IEEE 802.11n HT40 mode ANT1

Lowest Channel

Frequency 2422MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

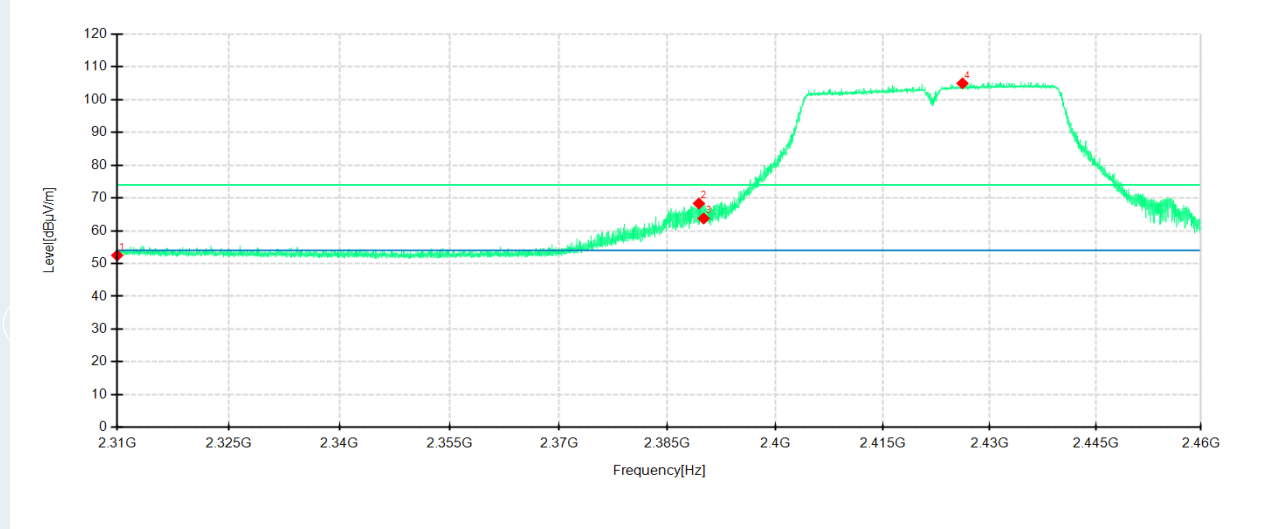

Detector mode: Peak

Polarity: Vertical

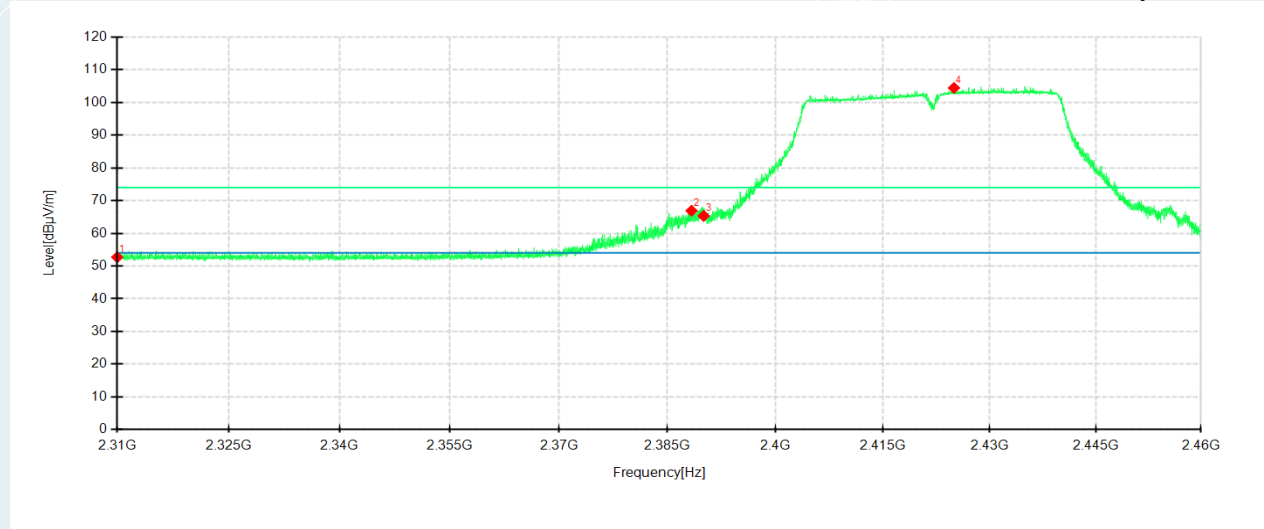

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 46.91 | 52.50 | 5.59 | 74.00 | 21.50 | 100 | 176 | Horizontal | / |
| 2 | 2389.3313 | 63.53 | 68.32 | 4.79 | 74.00 | 5.68 | 100 | 306 | Horizontal | / |
| 3 | 2390.0000 | 58.95 | 63.75 | 4.80 | 74.00 | 10.25 | 100 | 246 | Horizontal | / |
| 4 | 2426.1750 | 99.98 | 104.96 | 4.98 | 74.00 | -30.96 | 100 | 315 | Horizontal | No limit |
| 1 | 2310.0000 | 47.81 | 52.70 | 4.89 | 74.00 | 21.30 | 100 | 175 | Vertical | / |
| 2 | 2388.3188 | 61.71 | 66.90 | 5.19 | 74.00 | 7.10 | 100 | 323 | Vertical | / |
| 3 | 2390.0000 | 60.11 | 65.33 | 5.22 | 74.00 | 8.67 | 100 | 332 | Vertical | / |
| 4 | 2424.9750 | 98.89 | 104.42 | 5.53 | 74.00 | -30.42 | 100 | 323 | Vertical | No limit |

IEEE 802.11n HT40 mode ANT1

Lowest Channel

Frequency 2422MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

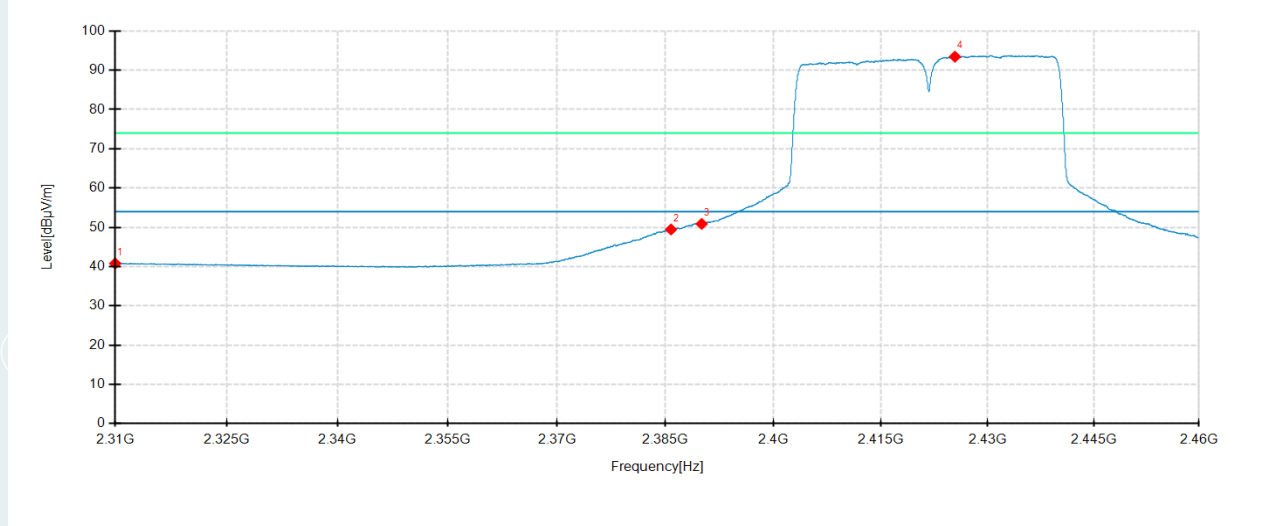

Detector mode: Average

Polarity: Vertical

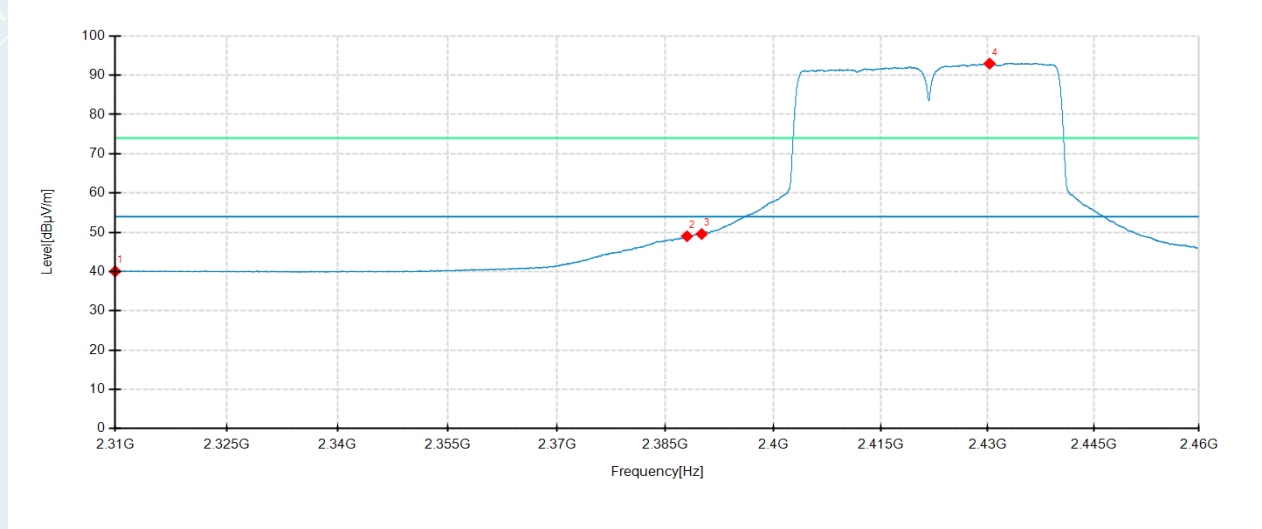

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 35.21 | 40.80 | 5.59 | 54.00 | 13.20 | 200 | 203 | Horizontal | / |
| 2 | 2385.7500 | 44.69 | 49.45 | 4.76 | 54.00 | 4.55 | 100 | 306 | Horizontal | / |
| 3 | 2390.0000 | 46.08 | 50.88 | 4.80 | 54.00 | 3.12 | 100 | 306 | Horizontal | / |
| 4 | 2425.3875 | 88.47 | 93.45 | 4.98 | 54.00 | -39.45 | 100 | 296 | Horizontal | No limit |
| 1 | 2310.0000 | 35.17 | 40.06 | 4.89 | 54.00 | 13.94 | 200 | 326 | Vertical | / |
| 2 | 2387.9625 | 43.82 | 49.00 | 5.18 | 54.00 | 5.00 | 200 | 306 | Vertical | / |
| 3 | 2390.0000 | 44.35 | 49.57 | 5.22 | 54.00 | 4.43 | 100 | 322 | Vertical | / |
| 4 | 2430.2813 | 87.40 | 92.96 | 5.56 | 54.00 | -38.96 | 200 | 246 | Vertical | No limit |

IEEE 802.11n HT40 mode ANT1

Highest Channel

Frequency 2452MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

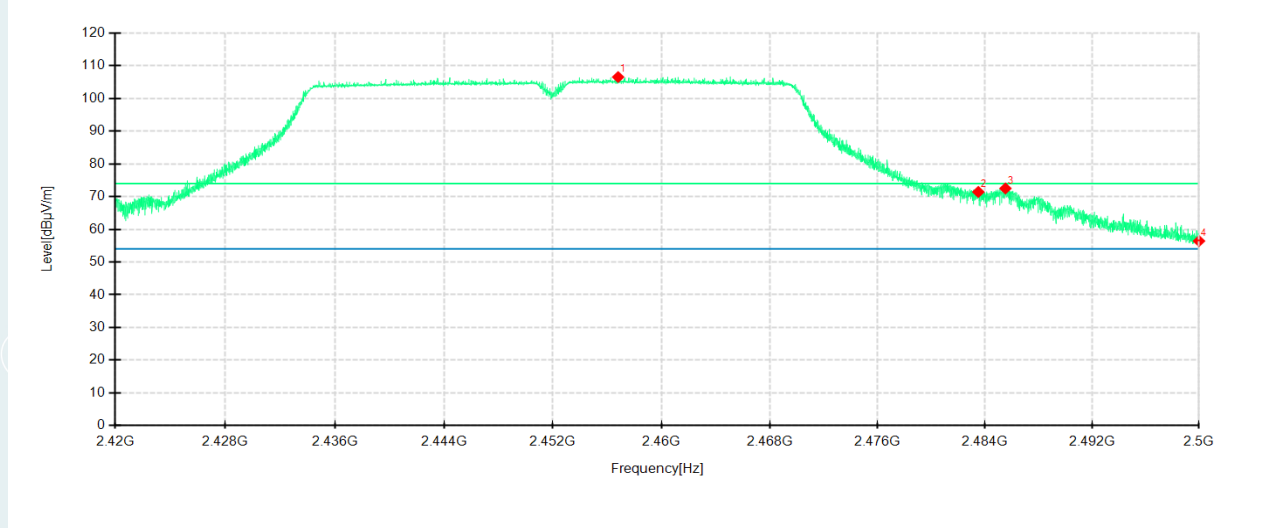

Detector mode: Peak

Polarity: Vertical

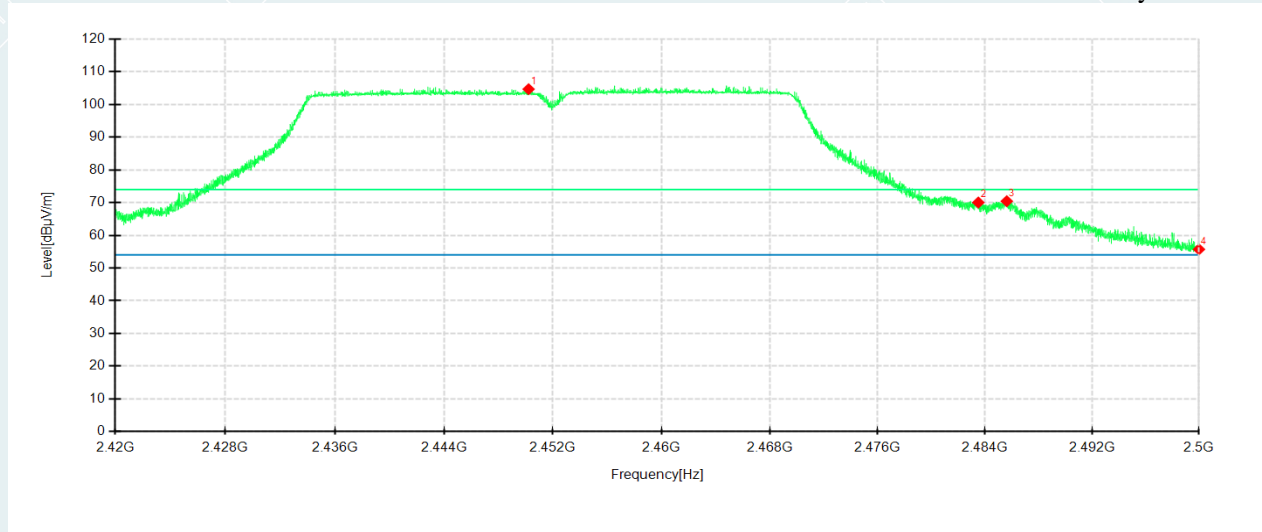

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2456.8000 | 101.35 | 106.54 | 5.19 | 74.00 | -32.54 | 100 | 290 | Horizontal | No limit |
| 2 | 2483.5000 | 65.79 | 71.42 | 5.63 | 74.00 | 2.58 | 100 | 310 | Horizontal | / |
| 3 | 2485.5200 | 66.83 | 72.49 | 5.66 | 74.00 | 1.51 | 100 | 290 | Horizontal | / |
| 4 | 2500.0000 | 50.53 | 56.43 | 5.90 | 74.00 | 17.57 | 200 | 273 | Horizontal | / |
| 1 | 2450.2100 | 98.98 | 104.66 | 5.68 | 74.00 | -30.66 | 100 | 313 | Vertical | No limit |
| 2 | 2483.5000 | 64.33 | 70.03 | 5.70 | 74.00 | 3.97 | 100 | 325 | Vertical | / |
| 3 | 2485.6200 | 64.73 | 70.42 | 5.69 | 74.00 | 3.58 | 100 | 325 | Vertical | / |
| 4 | 2500.0000 | 50.01 | 55.71 | 5.70 | 74.00 | 18.29 | 200 | 216 | Vertical | / |

IEEE 802.11n HT40 mode ANT1

Highest Channel

Frequency 2452MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

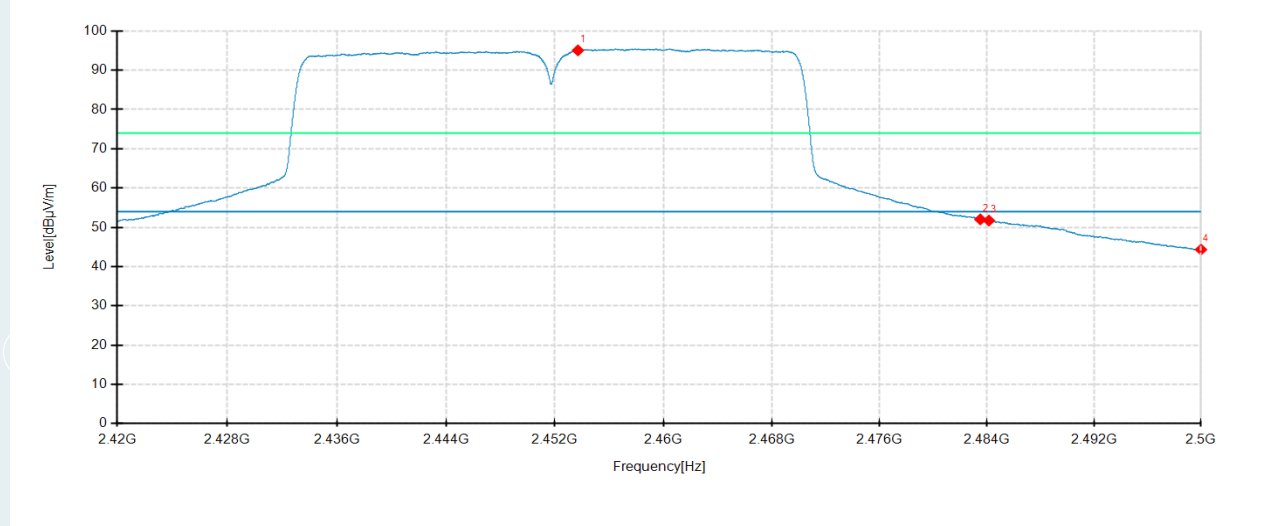

Detector mode: Average

Polarity: Vertical

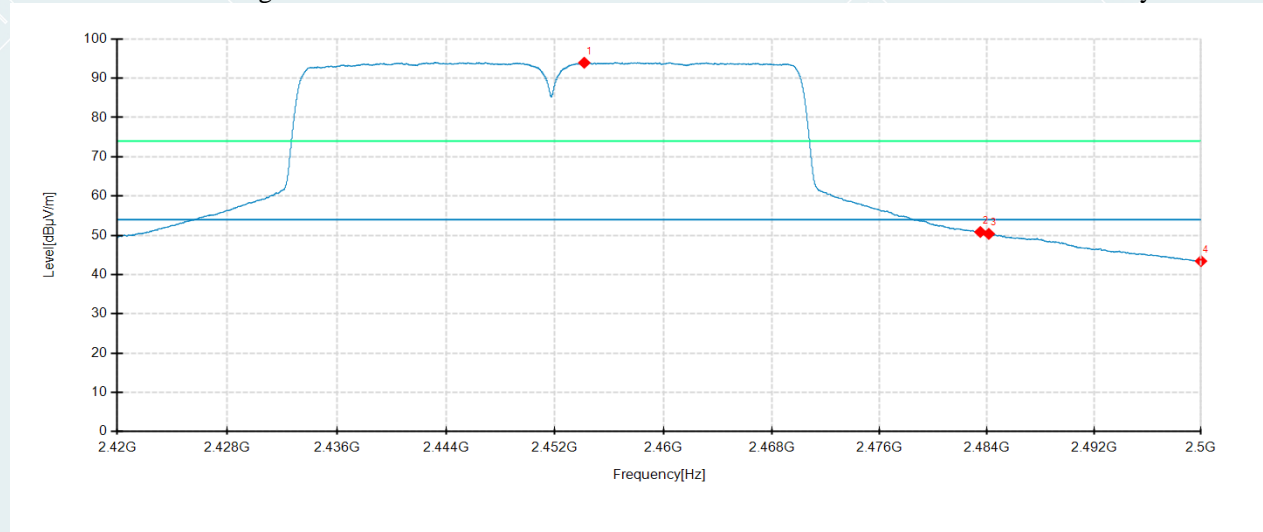

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2453.6900 | 89.92 | 95.06 | 5.14 | 54.00 | -41.06 | 100 | 296 | Horizontal | No limit |
| 2 | 2483.5000 | 46.40 | 52.03 | 5.63 | 54.00 | 1.97 | 100 | 306 | Horizontal | / |
| 3 | 2484.1400 | 46.09 | 51.73 | 5.64 | 54.00 | 2.27 | 100 | 306 | Horizontal | / |
| 4 | 2500.0000 | 38.43 | 44.33 | 5.90 | 54.00 | 9.67 | 100 | 306 | Horizontal | / |
| 1 | 2454.1600 | 88.27 | 93.95 | 5.68 | 54.00 | -39.95 | 100 | 321 | Vertical | No limit |
| 2 | 2483.5000 | 45.15 | 50.85 | 5.70 | 54.00 | 3.15 | 200 | 304 | Vertical | / |
| 3 | 2484.1300 | 44.68 | 50.38 | 5.70 | 54.00 | 3.62 | 200 | 304 | Vertical | / |
| 4 | 2500.0000 | 37.73 | 43.43 | 5.70 | 54.00 | 10.57 | 100 | 313 | Vertical | / |

IEEE 802.11ax HE20 mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

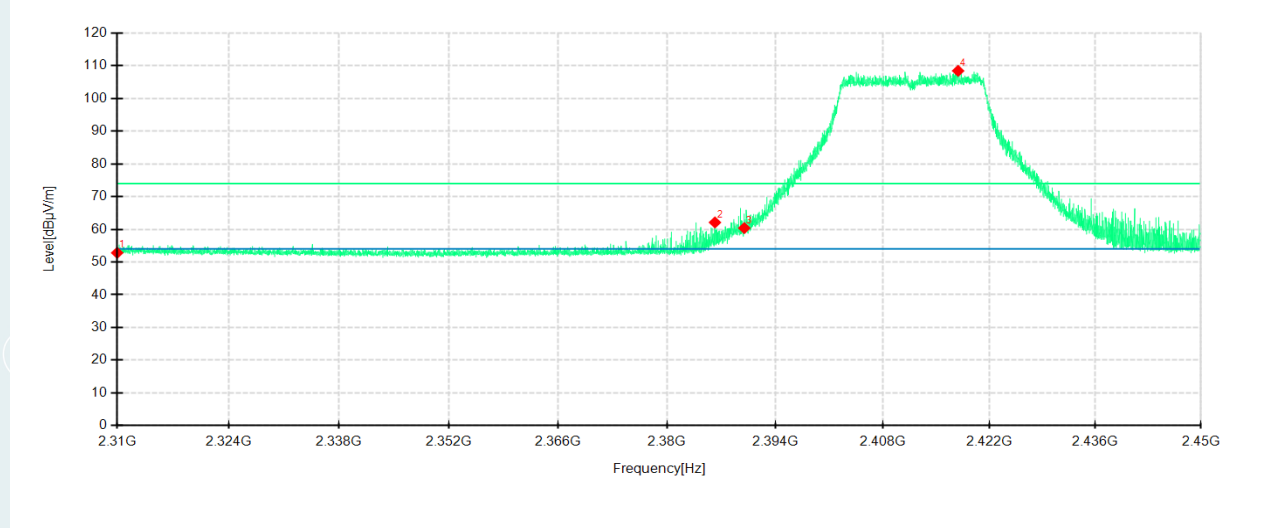

Detector mode: Peak

Polarity: Vertical

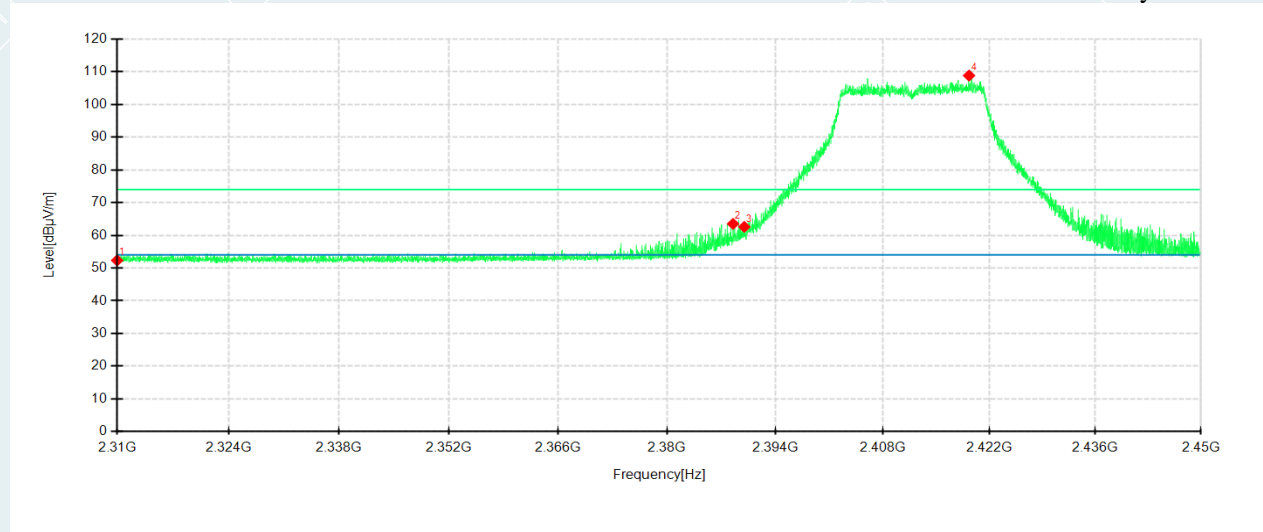

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 47.23 | 52.82 | 5.59 | 74.00 | 21.18 | 100 | 166 | Horizontal | / |
| 2 | 2386.1950 | 57.33 | 62.10 | 4.77 | 74.00 | 11.90 | 100 | 276 | Horizontal | / |
| 3 | 2390.0000 | 55.59 | 60.39 | 4.80 | 74.00 | 13.61 | 100 | 256 | Horizontal | / |
| 4 | 2417.9050 | 103.47 | 108.42 | 4.95 | 74.00 | -34.42 | 100 | 315 | Horizontal | No limit |
| 1 | 2310.0000 | 47.45 | 52.34 | 4.89 | 74.00 | 21.66 | 100 | 351 | Vertical | / |
| 2 | 2388.5400 | 58.31 | 63.50 | 5.19 | 74.00 | 10.50 | 200 | 244 | Vertical | / |
| 3 | 2390.0000 | 57.36 | 62.58 | 5.22 | 74.00 | 11.42 | 200 | 293 | Vertical | / |
| 4 | 2419.3400 | 103.31 | 108.81 | 5.50 | 74.00 | -34.81 | 100 | 321 | Vertical | No limit |

IEEE 802.11ax HE20 mode ANT1

Lowest Channel

Frequency 2412MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

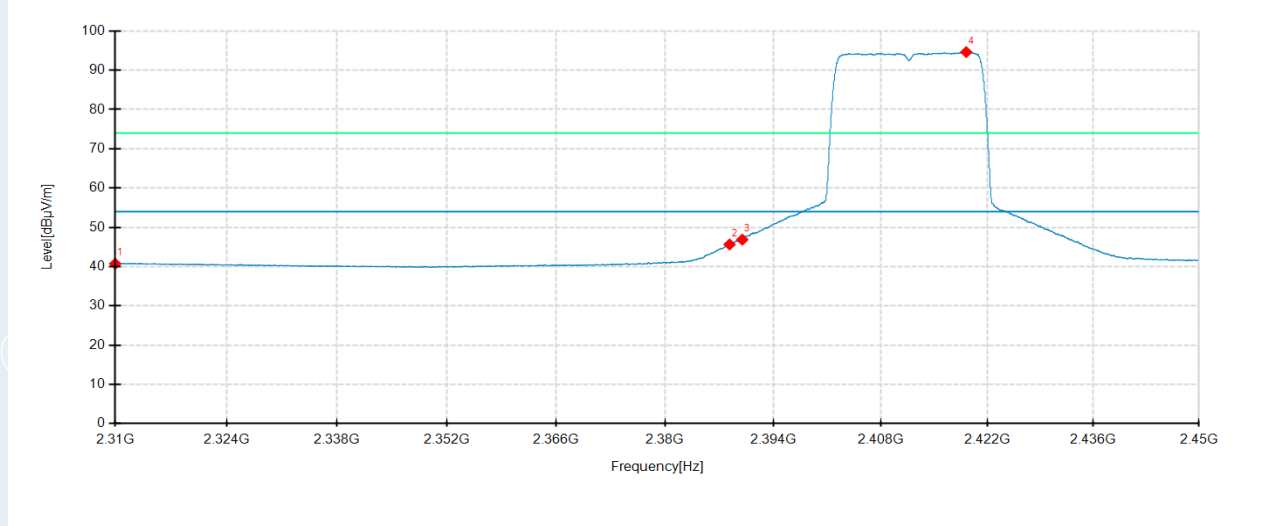

Detector mode: Average

Polarity: Vertical

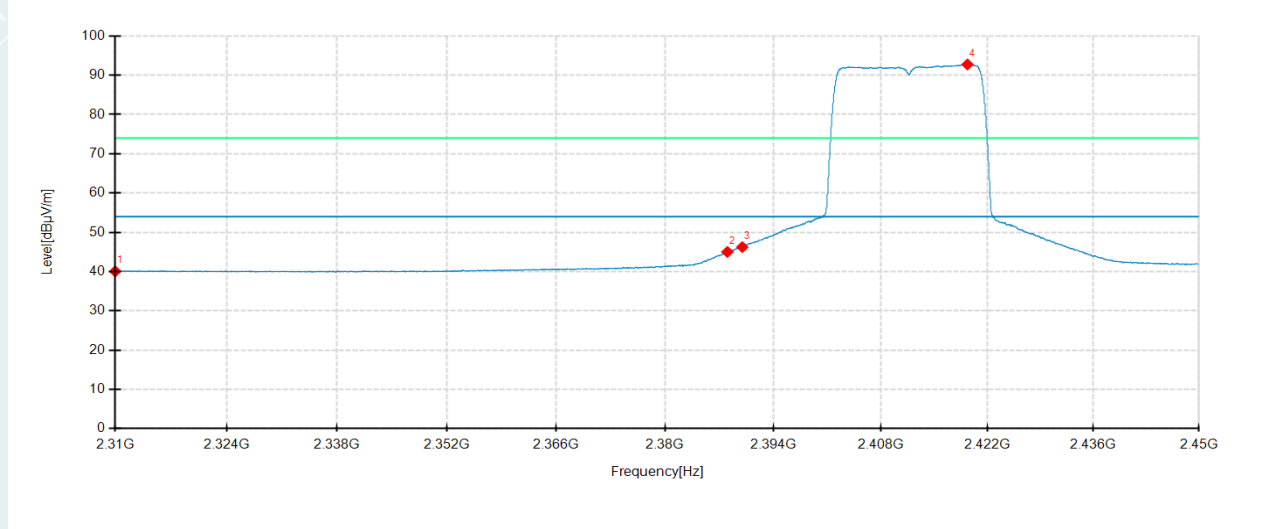

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 35.13 | 40.72 | 5.59 | 54.00 | 13.28 | 100 | 344 | Horizontal | / |
| 2 | 2388.3475 | 40.85 | 45.64 | 4.79 | 54.00 | 8.36 | 100 | 306 | Horizontal | / |
| 3 | 2390.0000 | 42.07 | 46.87 | 4.80 | 54.00 | 7.13 | 100 | 306 | Horizontal | / |
| 4 | 2419.2350 | 89.67 | 94.63 | 4.96 | 54.00 | -40.63 | 100 | 295 | Horizontal | No limit |
| 1 | 2310.0000 | 35.16 | 40.05 | 4.89 | 54.00 | 13.95 | 100 | 15 | Vertical | / |
| 2 | 2388.0675 | 39.82 | 45.00 | 5.18 | 54.00 | 9.00 | 200 | 305 | Vertical | / |
| 3 | 2390.0000 | 41.03 | 46.25 | 5.22 | 54.00 | 7.75 | 200 | 305 | Vertical | / |
| 4 | 2419.3925 | 87.24 | 92.74 | 5.50 | 54.00 | -38.74 | 200 | 295 | Vertical | No limit |

IEEE 802.11ax HE20 mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

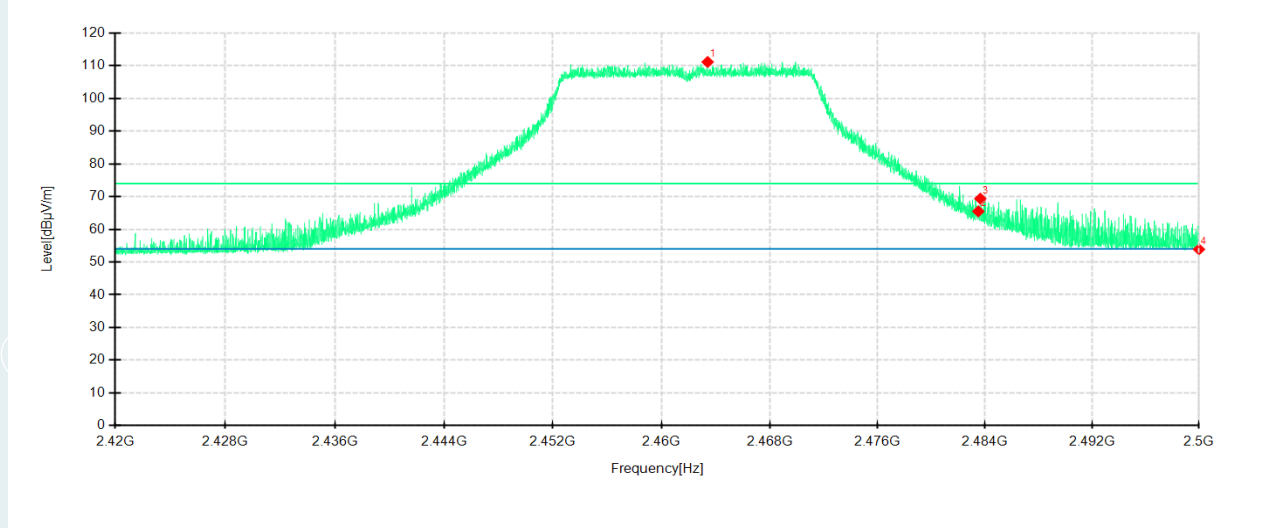

Detector mode: Peak

Polarity: Vertical

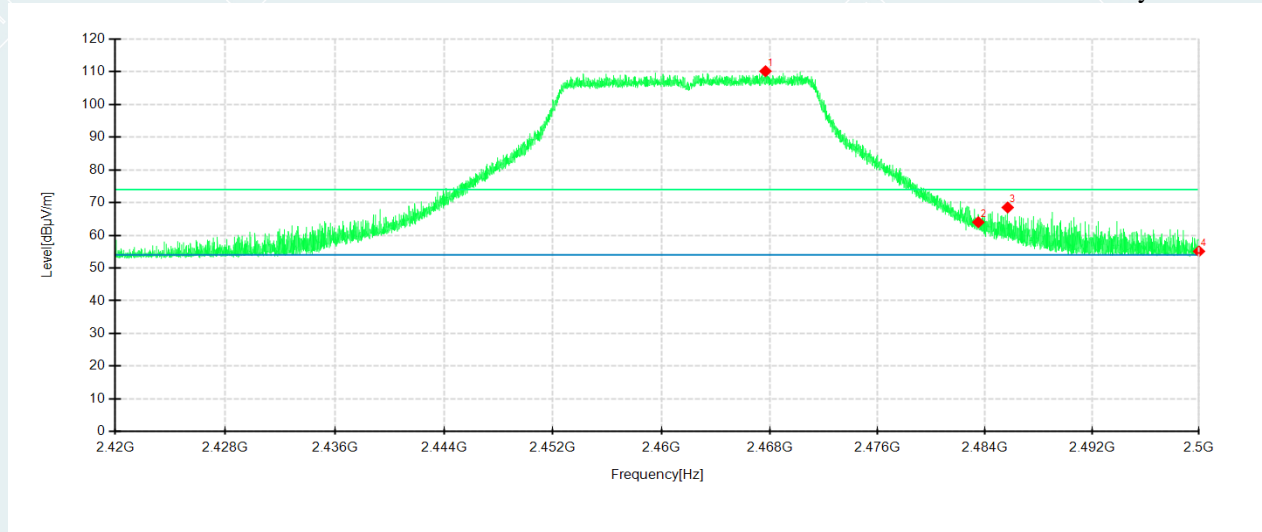

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2463.4100 | 105.84 | 111.14 | 5.30 | 74.00 | -37.14 | 100 | 295 | Horizontal | No limit |
| 2 | 2483.5000 | 59.87 | 65.50 | 5.63 | 74.00 | 8.50 | 100 | 275 | Horizontal | / |
| 3 | 2483.6500 | 63.75 | 69.39 | 5.64 | 74.00 | 4.61 | 100 | 246 | Horizontal | / |
| 4 | 2500.0000 | 47.98 | 53.88 | 5.90 | 74.00 | 20.12 | 200 | 105 | Horizontal | / |
| 1 | 2467.6900 | 104.46 | 110.15 | 5.69 | 74.00 | -36.15 | 100 | 333 | Vertical | No limit |
| 2 | 2483.5000 | 58.31 | 64.01 | 5.70 | 74.00 | 9.99 | 200 | 306 | Vertical | / |
| 3 | 2485.6900 | 62.82 | 68.51 | 5.69 | 74.00 | 5.49 | 200 | 306 | Vertical | / |
| 4 | 2500.0000 | 49.42 | 55.12 | 5.70 | 74.00 | 18.88 | 200 | 296 | Vertical | / |

IEEE 802.11ax HE20 mode ANT1

Highest Channel

Frequency 2462MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

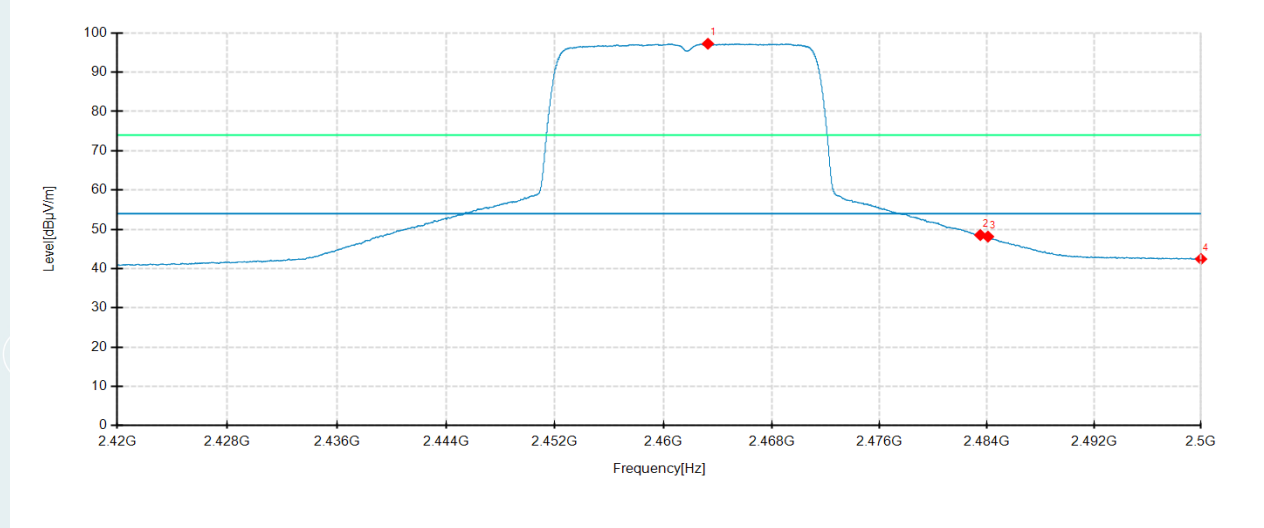

Detector mode: Average

Polarity: Vertical

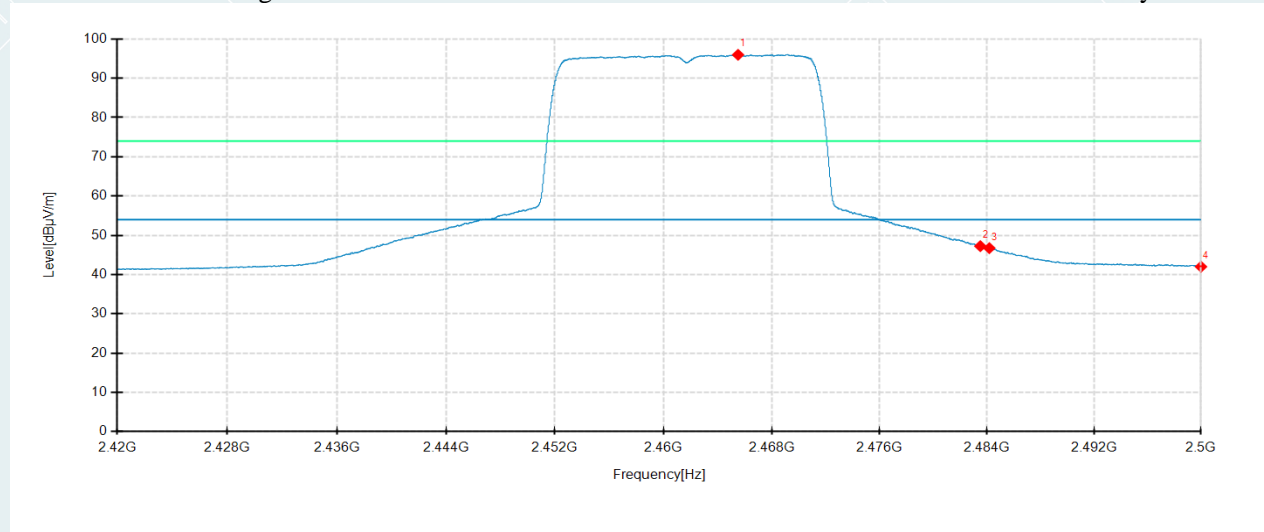

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2463.2800 | 91.96 | 97.26 | 5.30 | 54.00 | -43.26 | 100 | 287 | Horizontal | No limit |
| 2 | 2483.5000 | 42.91 | 48.54 | 5.63 | 54.00 | 5.46 | 100 | 306 | Horizontal | / |
| 3 | 2484.0700 | 42.50 | 48.14 | 5.64 | 54.00 | 5.86 | 100 | 306 | Horizontal | / |
| 4 | 2500.0000 | 36.53 | 42.43 | 5.90 | 54.00 | 11.57 | 100 | 306 | Horizontal | / |
| 1 | 2465.5100 | 90.28 | 95.97 | 5.69 | 54.00 | -41.97 | 200 | 314 | Vertical | No limit |
| 2 | 2483.5000 | 41.55 | 47.25 | 5.70 | 54.00 | 6.75 | 200 | 304 | Vertical | / |
| 3 | 2484.1700 | 41.04 | 46.74 | 5.70 | 54.00 | 7.26 | 200 | 304 | Vertical | / |
| 4 | 2500.0000 | 36.31 | 42.01 | 5.70 | 54.00 | 11.99 | 100 | 313 | Vertical | / |

IEEE 802.11ax HE40 mode ANT1

Lowest Channel

Frequency 2422MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

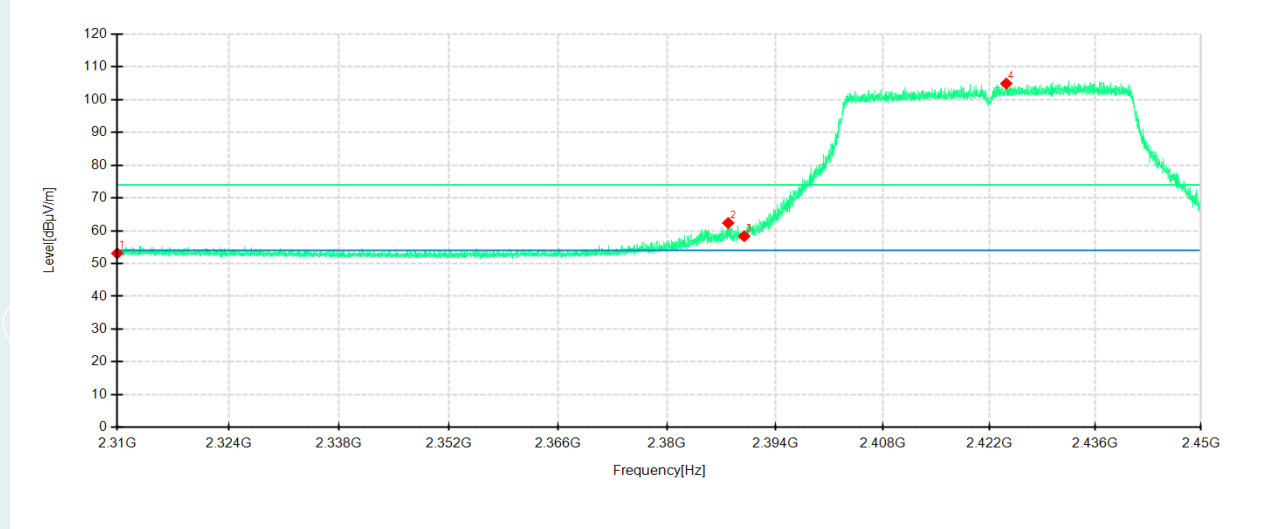

Detector mode: Peak

Polarity: Vertical

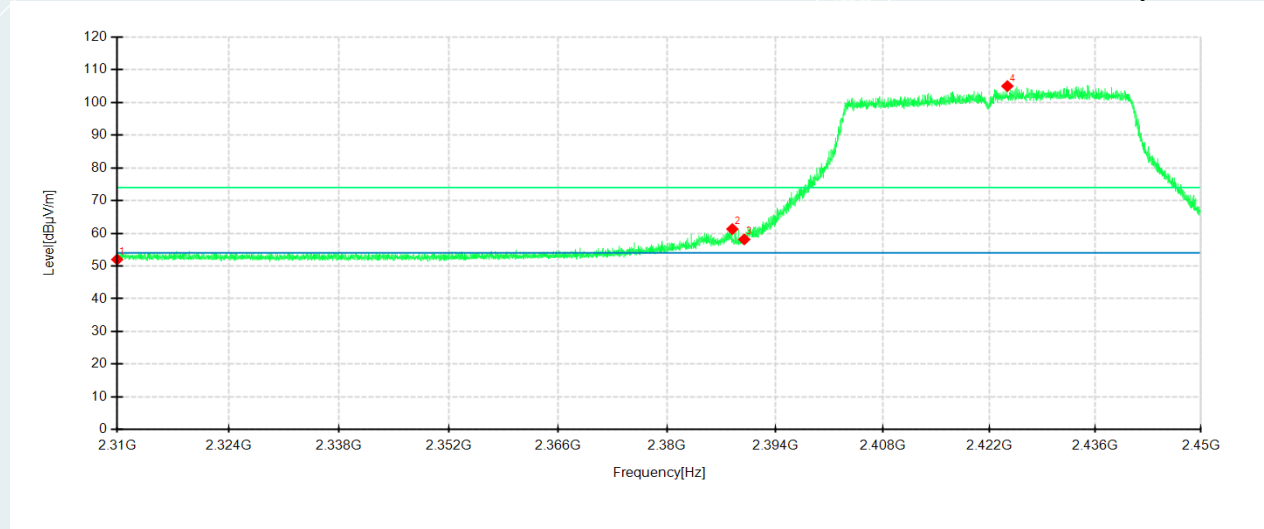

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 47.53 | 53.12 | 5.59 | 74.00 | 20.88 | 200 | 164 | Horizontal | / |
| 2 | 2387.9100 | 57.58 | 62.36 | 4.78 | 74.00 | 11.64 | 100 | 303 | Horizontal | / |
| 3 | 2390.0000 | 53.54 | 58.34 | 4.80 | 74.00 | 15.66 | 100 | 294 | Horizontal | / |
| 4 | 2424.2400 | 99.92 | 104.90 | 4.98 | 74.00 | -30.90 | 100 | 303 | Horizontal | No limit |
| 1 | 2310.0000 | 47.12 | 52.01 | 4.89 | 74.00 | 21.99 | 100 | 333 | Vertical | / |
| 2 | 2388.4525 | 56.11 | 61.30 | 5.19 | 74.00 | 12.70 | 200 | 316 | Vertical | / |
| 3 | 2390.0000 | 52.93 | 58.15 | 5.22 | 74.00 | 15.85 | 200 | 247 | Vertical | / |
| 4 | 2424.3800 | 99.45 | 104.98 | 5.53 | 74.00 | -30.98 | 200 | 316 | Vertical | No limit |

IEEE 802.11ax HE40 mode ANT1

Lowest Channel

Frequency 2422MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

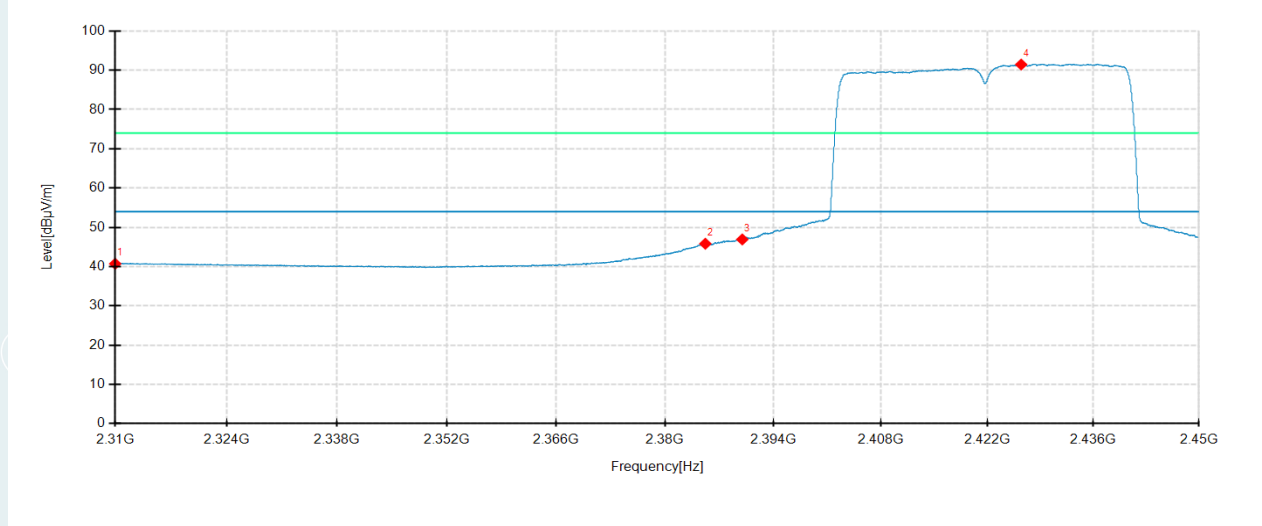

Detector mode: Average

Polarity: Vertical

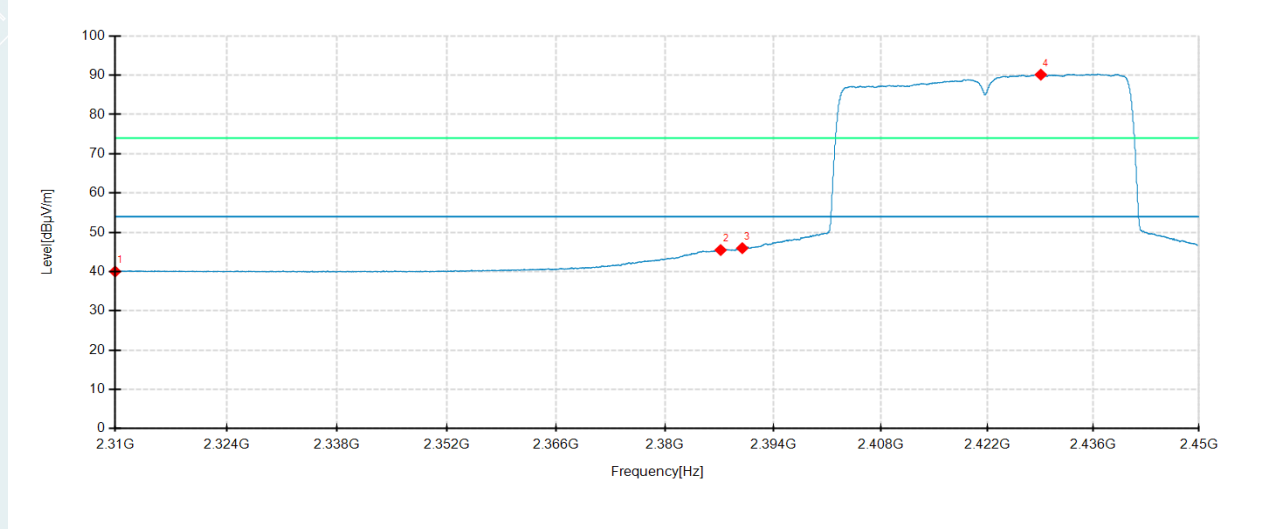

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2310.0000 | 35.12 | 40.71 | 5.59 | 54.00 | 13.29 | 100 | 246 | Horizontal | / |
| 2 | 2385.2150 | 41.06 | 45.82 | 4.76 | 54.00 | 8.18 | 100 | 305 | Horizontal | / |
| 3 | 2390.0000 | 42.12 | 46.92 | 4.80 | 54.00 | 7.08 | 100 | 305 | Horizontal | / |
| 4 | 2426.4625 | 86.47 | 91.46 | 4.99 | 54.00 | -37.46 | 100 | 295 | Horizontal | No limit |
| 1 | 2310.0000 | 35.12 | 40.01 | 4.89 | 54.00 | 13.99 | 200 | 126 | Vertical | / |
| 2 | 2387.1925 | 40.32 | 45.49 | 5.17 | 54.00 | 8.51 | 200 | 303 | Vertical | / |
| 3 | 2390.0000 | 40.75 | 45.97 | 5.22 | 54.00 | 8.03 | 200 | 303 | Vertical | / |
| 4 | 2429.0525 | 84.59 | 90.15 | 5.56 | 54.00 | -36.15 | 200 | 295 | Vertical | No limit |

IEEE 802.11ax HE40 mode ANT1

Highest Channel

Frequency 2452MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiaocong

Detector mode: Peak

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

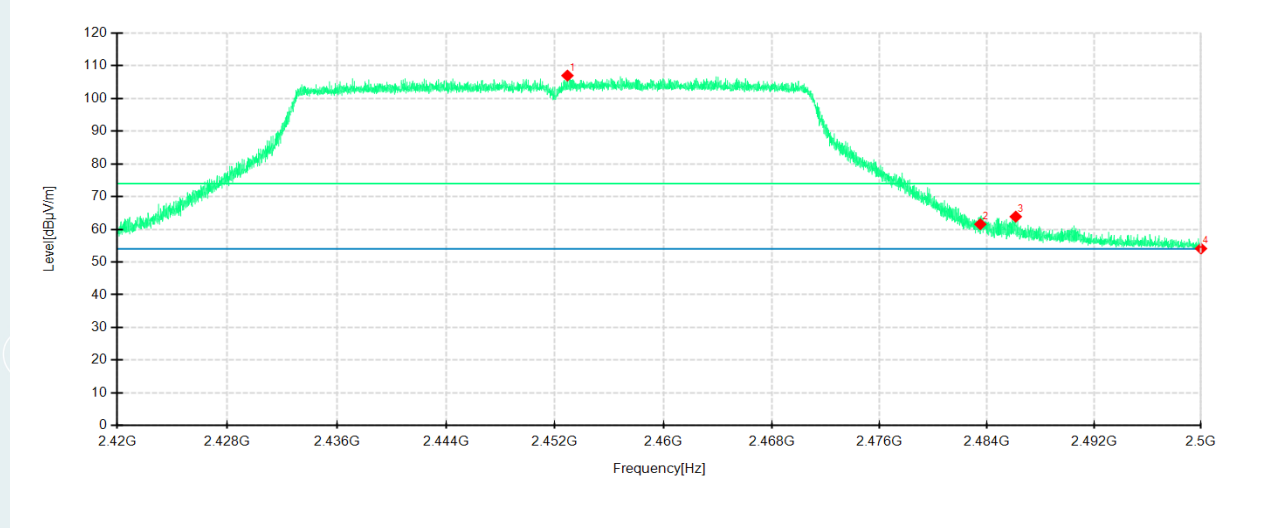

Detector mode: Peak

Polarity: Vertical

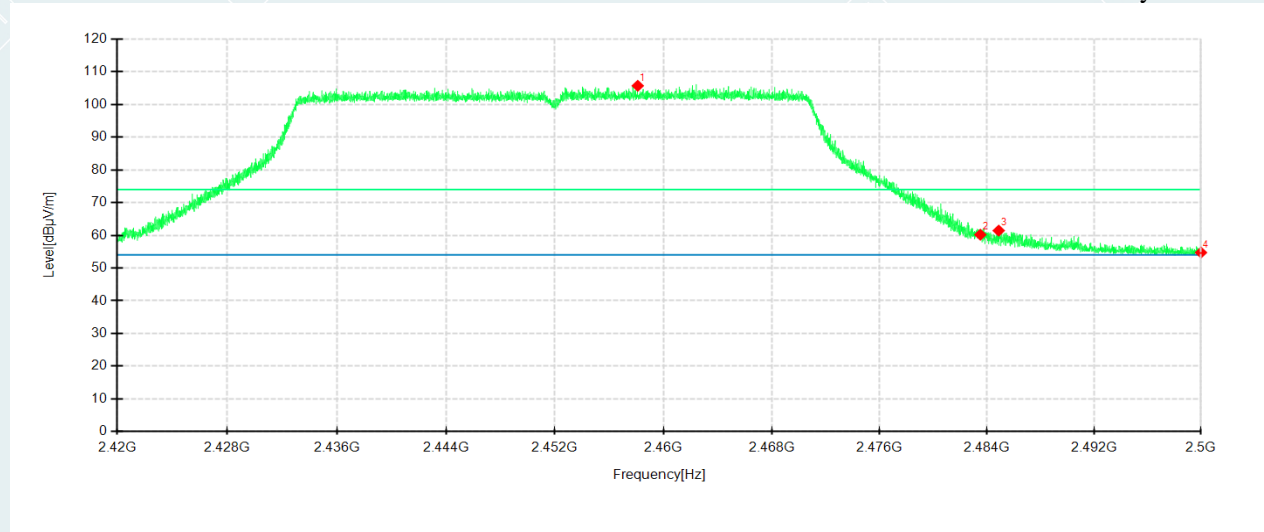

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBµV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2452.9200 | 101.84 | 106.97 | 5.13 | 74.00 | -32.97 | 100 | 305 | Horizontal | No limit |
| 2 | 2483.5000 | 55.93 | 61.56 | 5.63 | 74.00 | 12.44 | 100 | 294 | Horizontal | / |
| 3 | 2486.1400 | 58.20 | 63.87 | 5.67 | 74.00 | 10.13 | 100 | 315 | Horizontal | / |
| 4 | 2500.0000 | 48.22 | 54.12 | 5.90 | 74.00 | 19.88 | 200 | 272 | Horizontal | / |
| 1 | 2458.1000 | 100.00 | 105.69 | 5.69 | 74.00 | -31.69 | 200 | 315 | Vertical | No limit |
| 2 | 2483.5000 | 54.49 | 60.19 | 5.70 | 74.00 | 13.81 | 100 | 302 | Vertical | / |
| 3 | 2484.8700 | 55.75 | 61.44 | 5.69 | 74.00 | 12.56 | 100 | 323 | Vertical | / |
| 4 | 2500.0000 | 49.04 | 54.74 | 5.70 | 74.00 | 19.26 | 100 | 352 | Vertical | / |

IEEE 802.11ax HE40 mode ANT1

Highest Channel

Frequency 2452MHz

Environment: 27.5°C/57%RH


Tested By: Chen Xiacong

Detector mode: Average

Voltage: AC 120V/60Hz


Date: 2023-08-05

Polarity: Horizontal

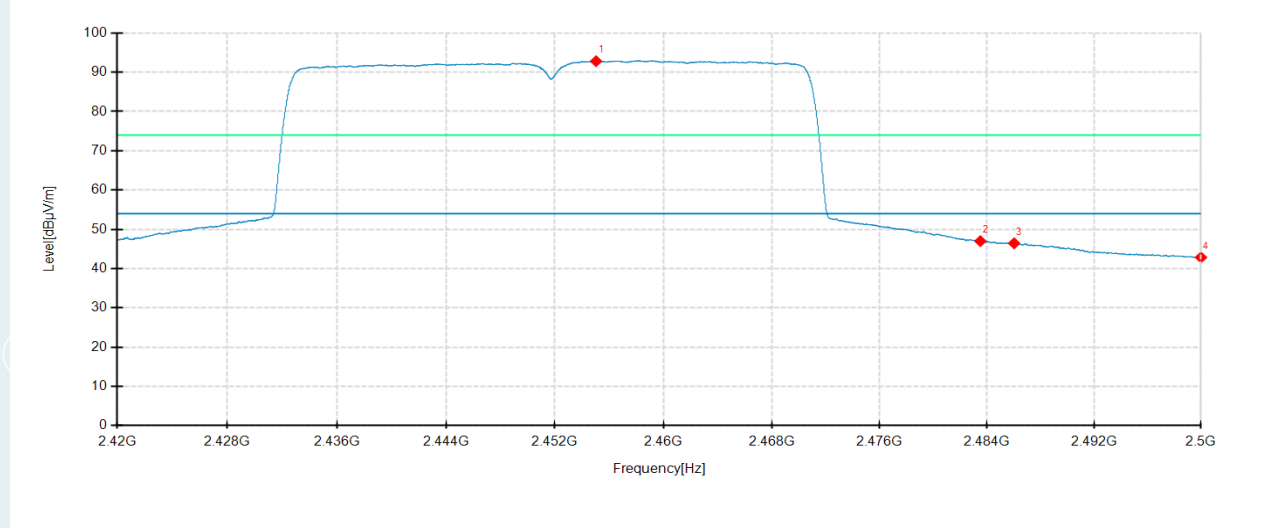

Detector mode: Average

Polarity: Vertical

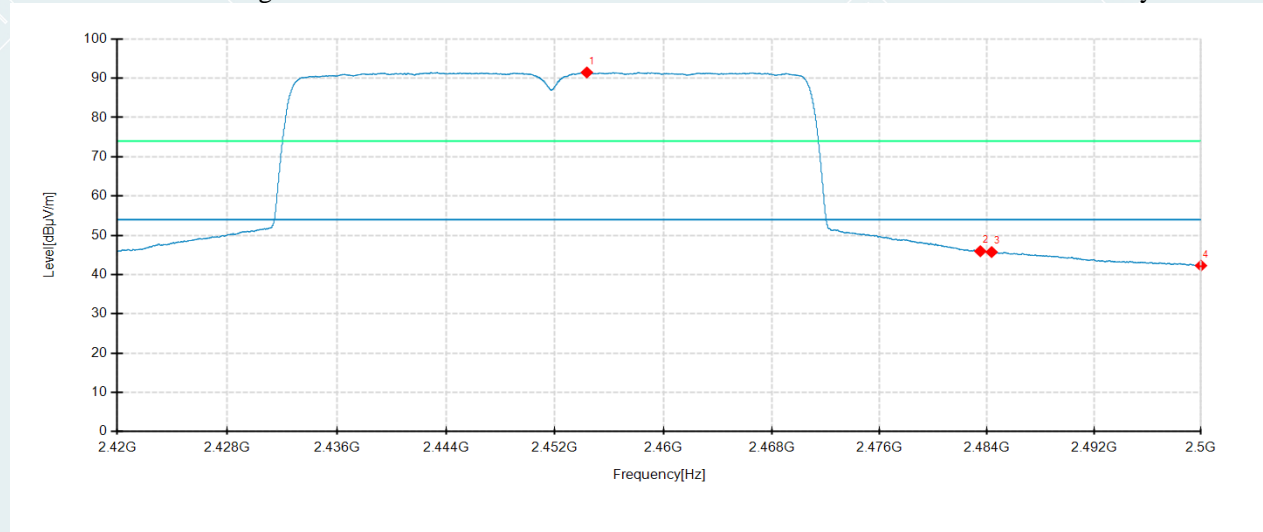

| No. | Frequency MHz | Reading dBµV/m | Level dBµV/m | Factor dB | Limit dBuV/m | Margin dB | Height cm | Angle ° | Pole | Comment |
|-----|---------------|----------------|--------------|-----------|--------------|-----------|-----------|---------|------------|----------|
| 1 | 2455.0300 | 87.66 | 92.82 | 5.16 | 54.00 | -38.82 | 100 | 296 | Horizontal | No limit |
| 2 | 2483.5000 | 41.37 | 47.00 | 5.63 | 54.00 | 7.00 | 100 | 306 | Horizontal | / |
| 3 | 2486.0200 | 40.77 | 46.44 | 5.67 | 54.00 | 7.56 | 100 | 306 | Horizontal | / |
| 4 | 2500.0000 | 36.95 | 42.85 | 5.90 | 54.00 | 11.15 | 100 | 306 | Horizontal | / |
| 1 | 2454.3500 | 85.80 | 91.48 | 5.68 | 54.00 | -37.48 | 100 | 324 | Vertical | No limit |
| 2 | 2483.5000 | 40.25 | 45.95 | 5.70 | 54.00 | 8.05 | 200 | 304 | Vertical | / |
| 3 | 2484.3400 | 40.04 | 45.74 | 5.70 | 54.00 | 8.26 | 200 | 304 | Vertical | / |
| 4 | 2500.0000 | 36.59 | 42.29 | 5.70 | 54.00 | 11.71 | 100 | 314 | Vertical | / |

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM

Please refer to the attached document E20230711057201-7-Test photo.

APPENDIX B. PHOTOGRAPH OF THE EUT

Please refer to the attached document E20230711057201-8-EUT photo.

----- **End of Report** -----