


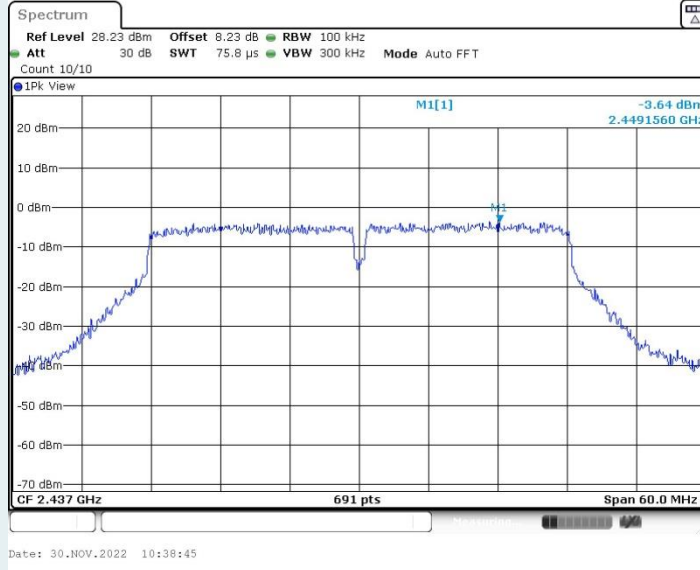




IEEE 802.11n HT40_Ant1_2437MHz_0~Reference

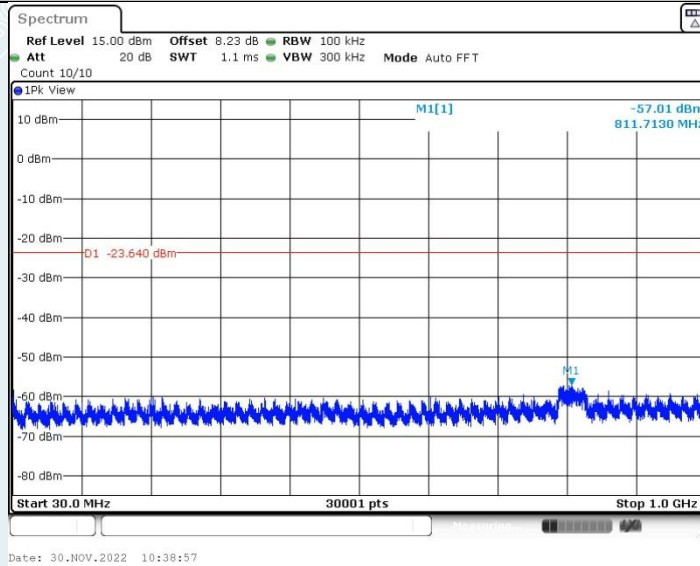

IEEE 802.11n HT40_Ant1_2437MHz_30~1000MHz

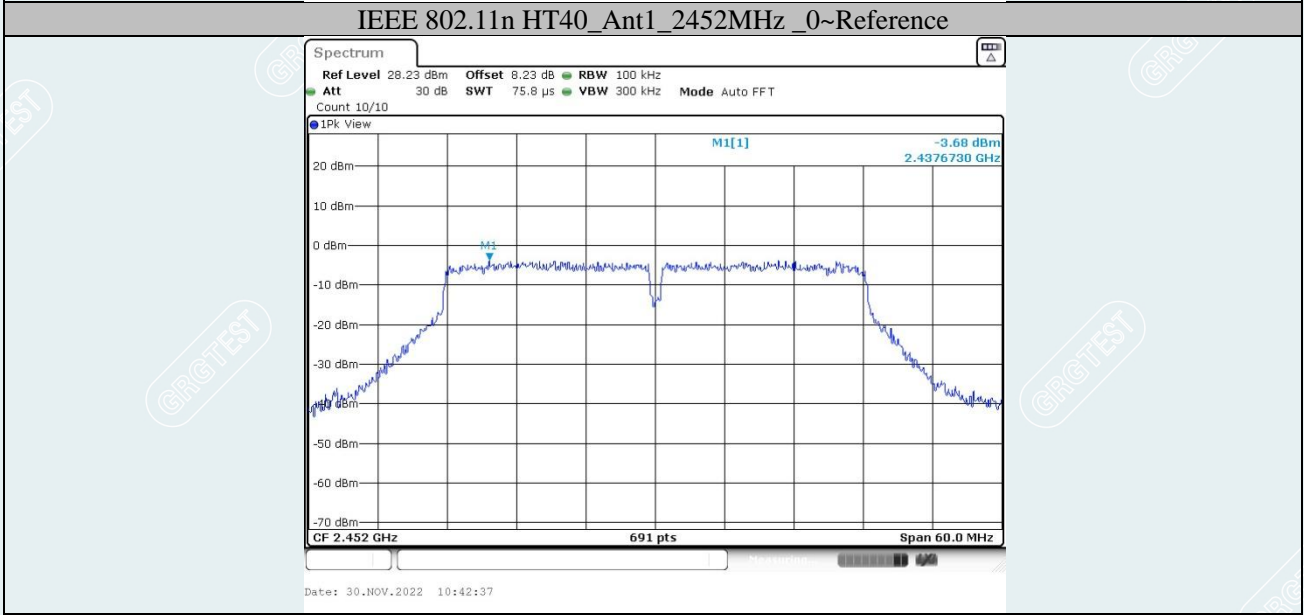

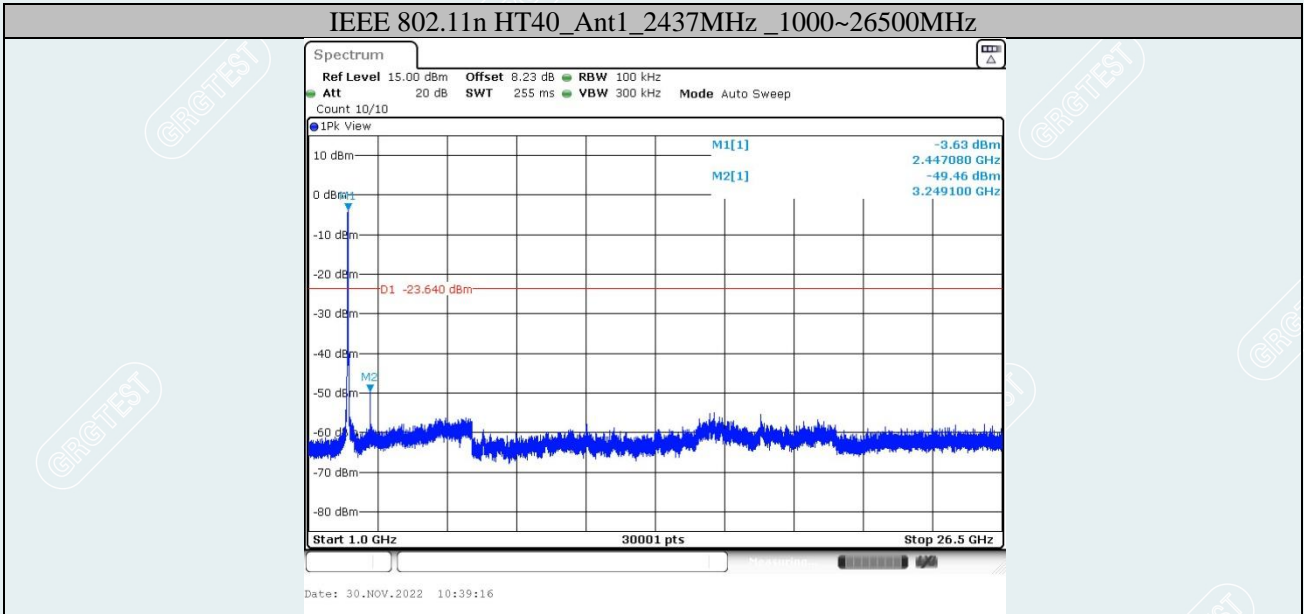

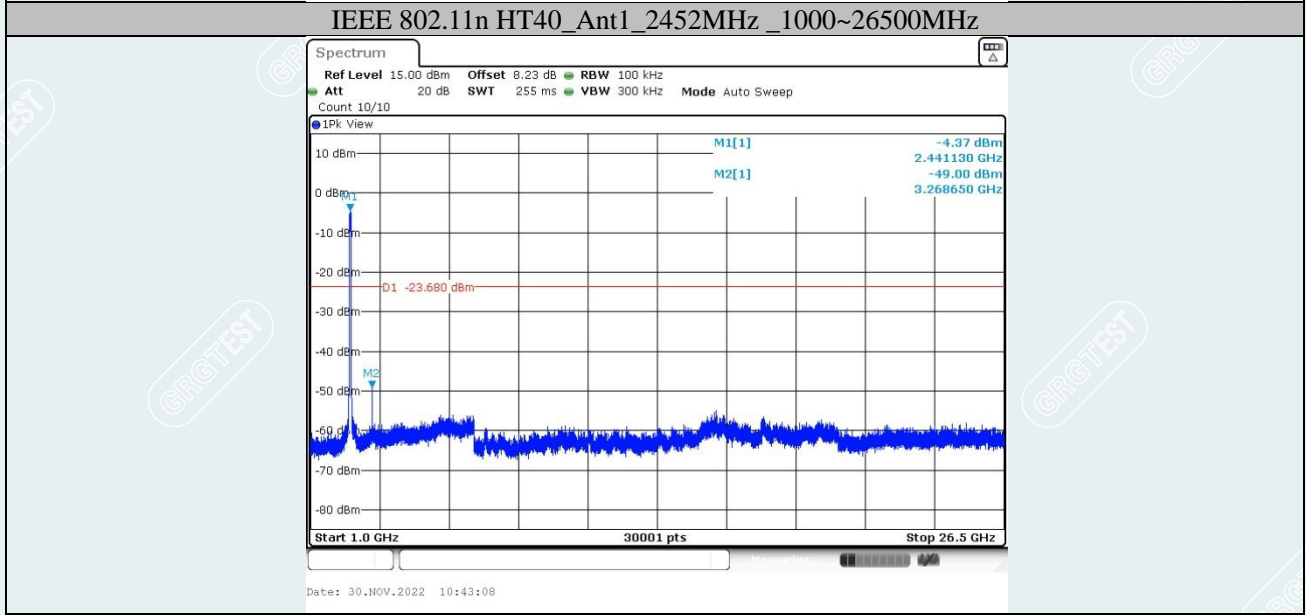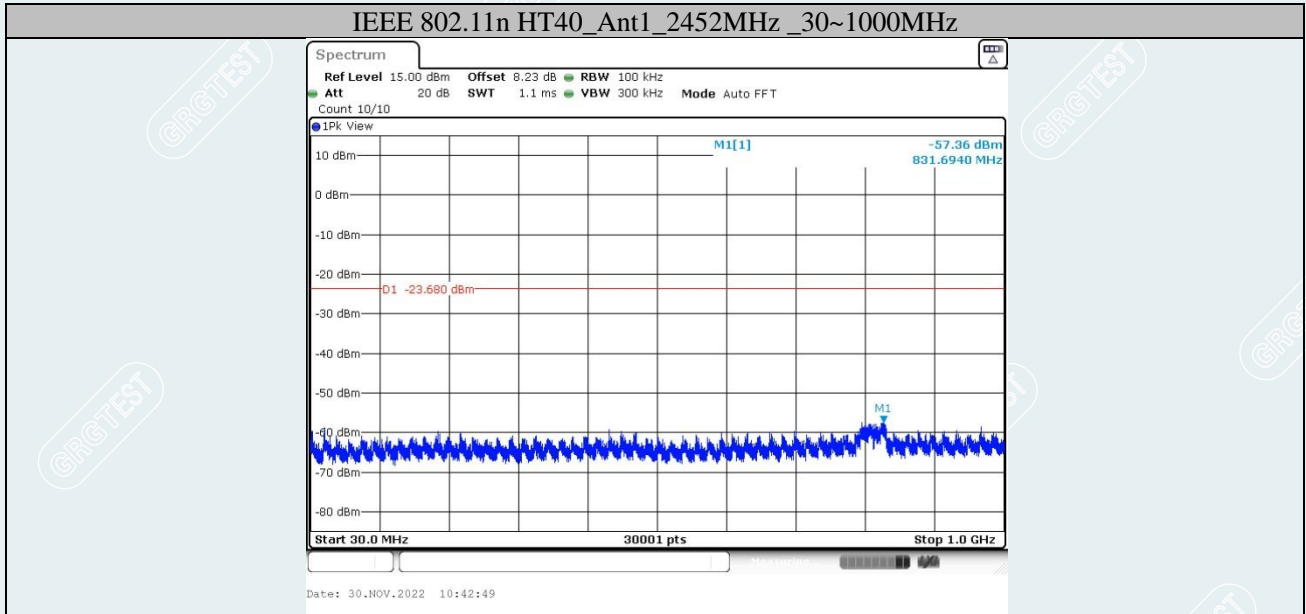

11. RESTRICTED BANDS OF OPERATION

11.1 LIMITS

Section 15.247(d) In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			


Frequency (MHz)	Quasi-peak(μV/m)	Measurement distance(m)	Quasi-peak(dBμV/m)@distance 3m
0.009-0.490	2400/F(kHz)	300	128.5~93.8
0.490-1.705	24000/F(kHz)	30	73.8~63
1.705-30.0	30	30	69.5
30~88	100	3	40
88~216	150	3	43.5
216~960	200	3	46
Above 960	500	3	54

11.2 TEST PROCEDURES

Test procedures follow KDB 558074 D01 15.247 measurement guidance v05r02.

- 1) The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2) The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3) EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4) Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - a) The frequency above 1GHz, for Peak detector: Set RBW=1MHz, RBW=3MHz.
 - b) The frequency above 1GHz, for Avg detector: Set RBW=1MHz, if the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10kHz) but not less than 10 Hz, Where duty cycle is defined in section 2.8. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$, Where T is defined in section 2.8.
- 5) Repeat the procedures until all the PEAK and AVERAGE versus polarization are measured.

11.3 TEST SETUP

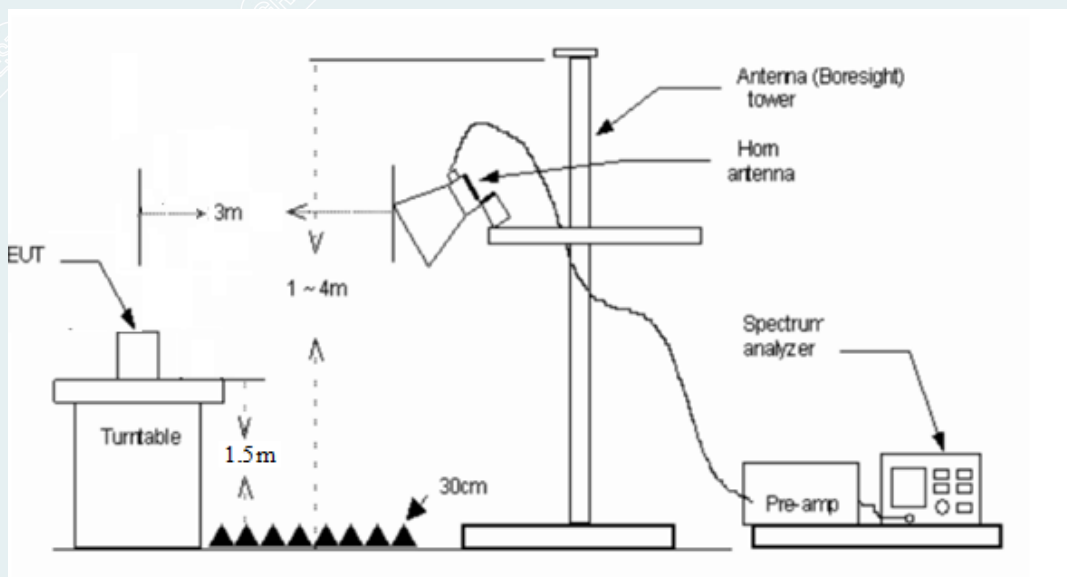

----- The following blanks -----

11.4 TEST RESULTS

According to the user manual, the EUT has two typical installation modes, namely side installation and suction top installation. The two modes have been tested and verified, the worst configuration is the suction top installation mode, which is recorded in this report.

----- The following blanks -----

IEEE 802.11b mode

Lowest Channel

Frequency 2412MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Peak

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

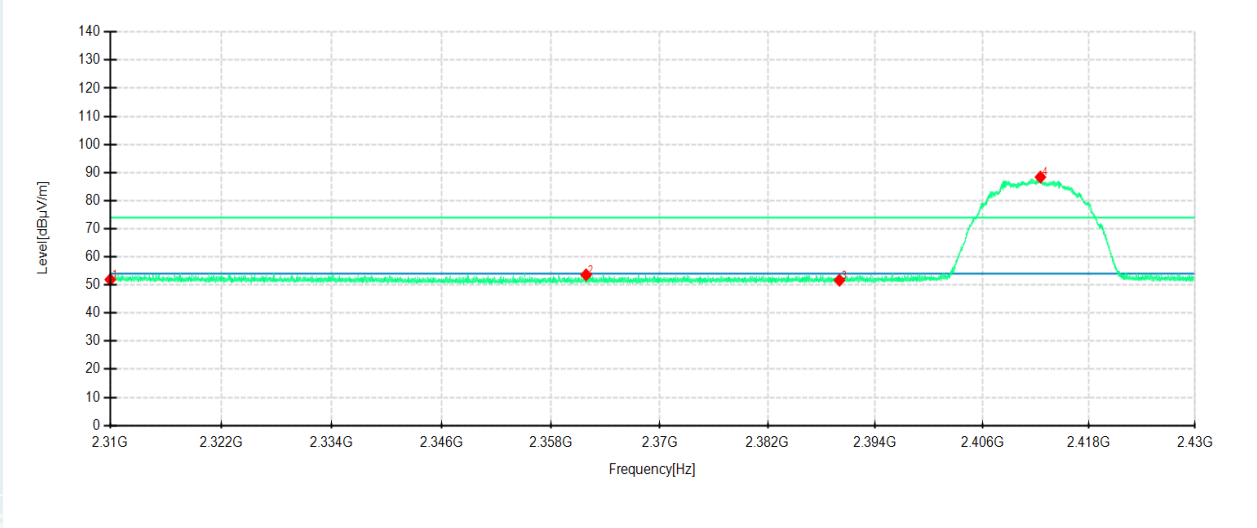

Detector mode: Peak

Polarity: Vertical

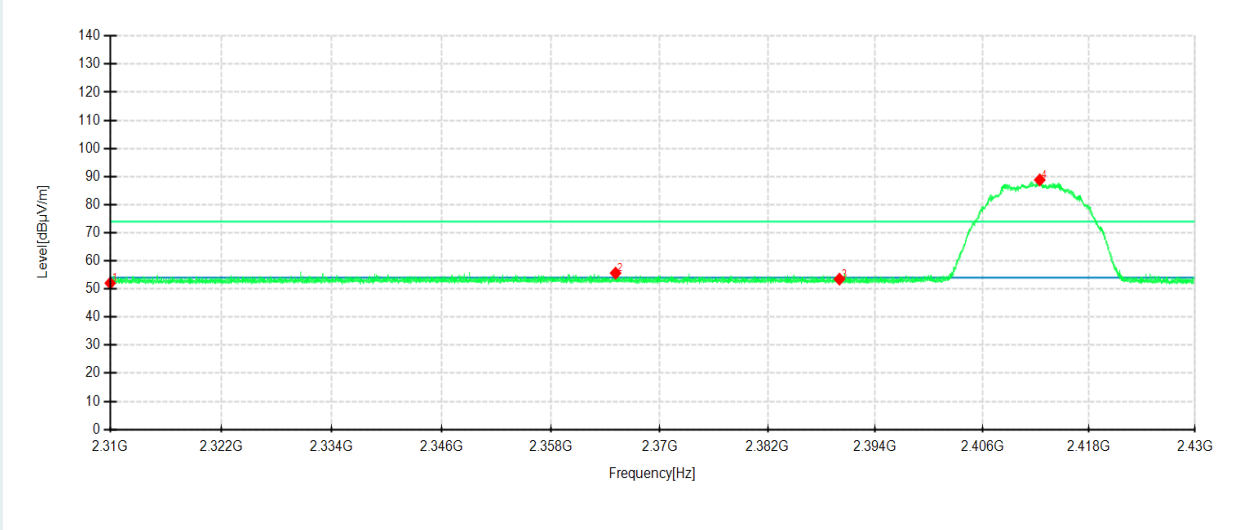

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	42.56	51.91	9.35	74.00	22.09	200	187	Horizontal	/
2	2361.8932	44.96	53.60	8.64	74.00	20.40	200	94	Horizontal	/
3	2390	42.74	51.67	8.93	74.00	22.33	100	172	Horizontal	/
4	2412.5263	79.30	88.38	9.08	74.00	-14.38	100	339	Horizontal	No limit
1	2310	42.15	52.08	9.93	74.00	21.92	100	186	Vertical	/
2	2365.1455	45.49	55.65	10.16	74.00	18.35	100	186	Vertical	/
3	2390	43.43	53.50	10.07	74.00	20.50	200	183	Vertical	/
4	2412.4542	78.99	88.80	9.81	74.00	-14.80	100	39	Vertical	No limit

IEEE 802.11b mode

Lowest Channel

Frequency 2412MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Average

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

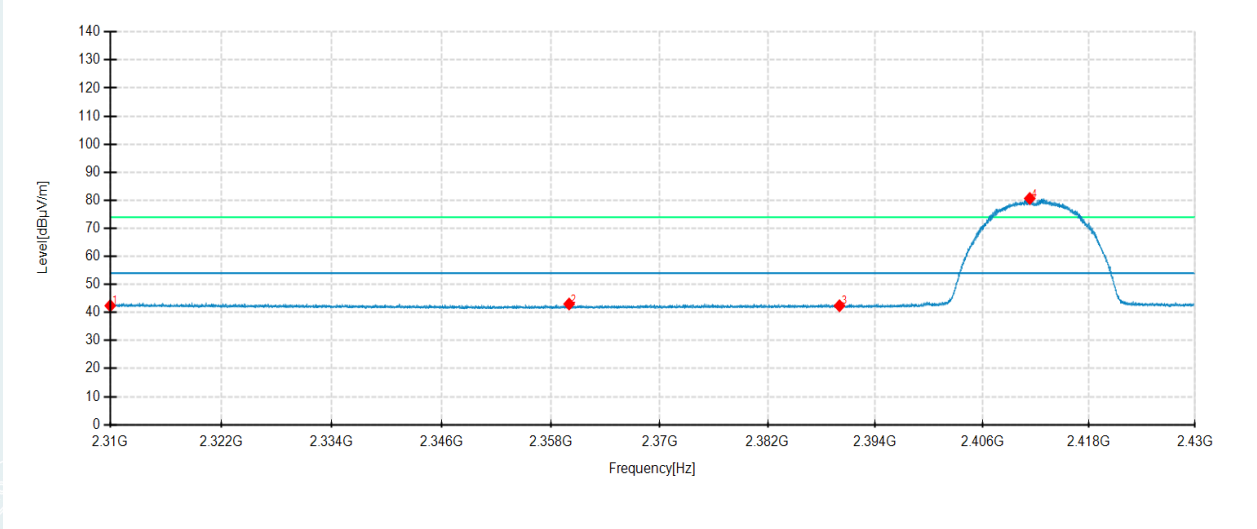

Detector mode: Average

Polarity: Vertical

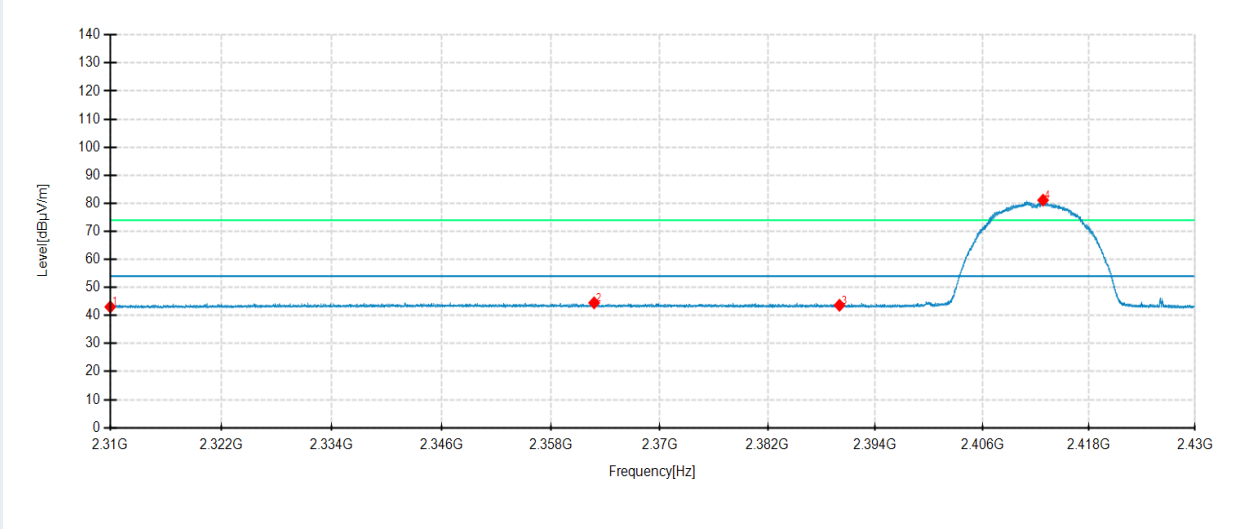


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	33.07	42.42	9.35	54.00	11.58	100	172	Horizontal	/
2	2360.021	34.41	43.03	8.62	54.00	10.97	200	105	Horizontal	/
3	2390	33.47	42.40	8.93	54.00	11.60	100	288	Horizontal	/
4	2411.3261	71.57	80.65	9.08	54.00	-26.65	100	349	Horizontal	No limit
1	2310	33.13	43.06	9.93	54.00	10.94	100	123	Vertical	/
2	2362.7813	34.33	44.50	10.17	54.00	9.50	200	172	Vertical	/
3	2390	33.57	43.64	10.07	54.00	10.36	100	187	Vertical	/
4	2412.8263	71.31	81.11	9.80	54.00	-27.11	100	31	Vertical	No limit

**IEEE 802.11b mode
Highest Channel**


Frequency 2462MHz
 Environment: 24.2°C/53%RH/101.0kPa
 Tested By: Zhang Zishan
 Detector mode: Peak

Voltage: DC 5V
 Date: 2022-12-05
 Polarity: Horizontal

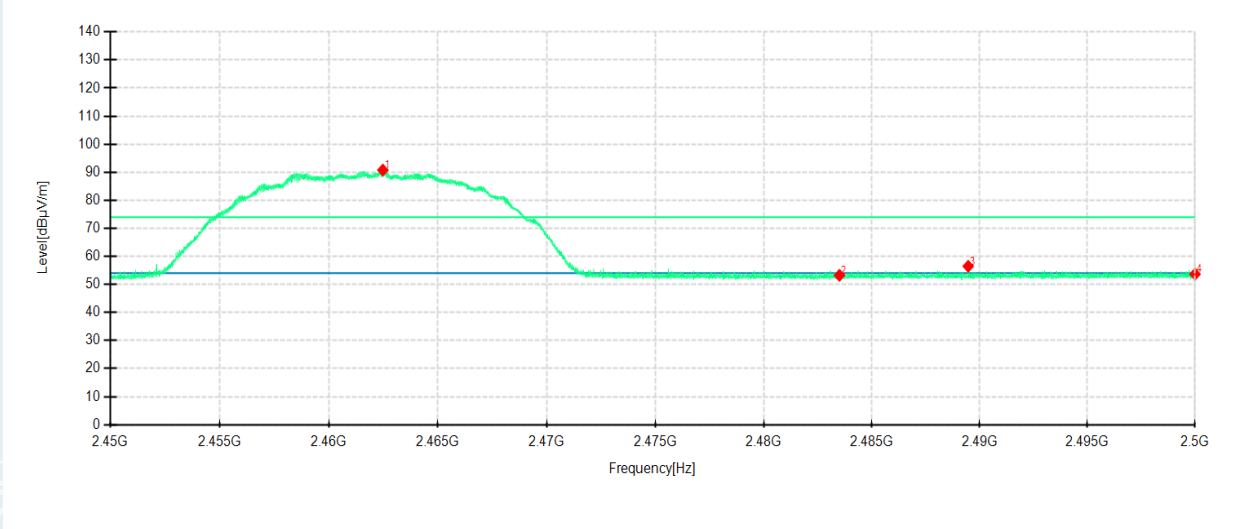

Detector mode: Peak

Polarity: Vertical

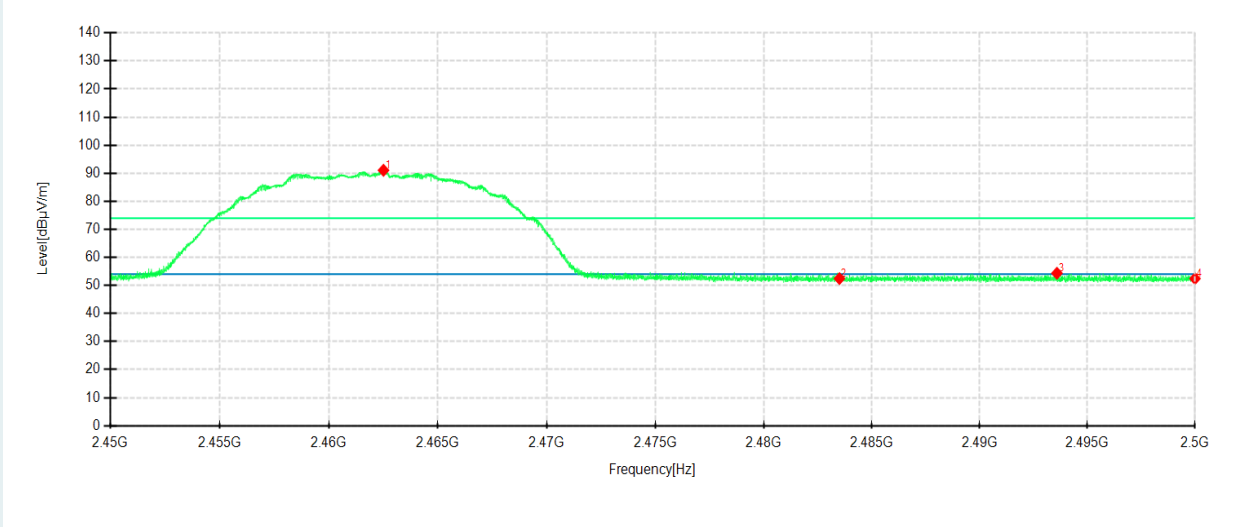

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2462.4712	81.28	90.77	9.49	74.00	-16.77	100	339	Horizontal	No limit
2	2483.5	43.32	53.24	9.92	74.00	20.76	200	189	Horizontal	/
3	2489.4639	46.44	56.48	10.04	74.00	17.52	100	171	Horizontal	/
4	2500	43.42	53.67	10.25	74.00	20.33	200	189	Horizontal	/
1	2462.5012	81.87	91.06	9.19	74.00	-17.06	100	73	Vertical	No limit
2	2483.5	43.16	52.44	9.28	74.00	21.56	100	52	Vertical	/
3	2493.5794	45.03	54.35	9.32	74.00	19.65	200	183	Vertical	/
4	2500	43.09	52.44	9.35	74.00	21.56	200	245	Vertical	/

**IEEE 802.11b mode
Highest Channel**

Frequency 2462MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Average

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

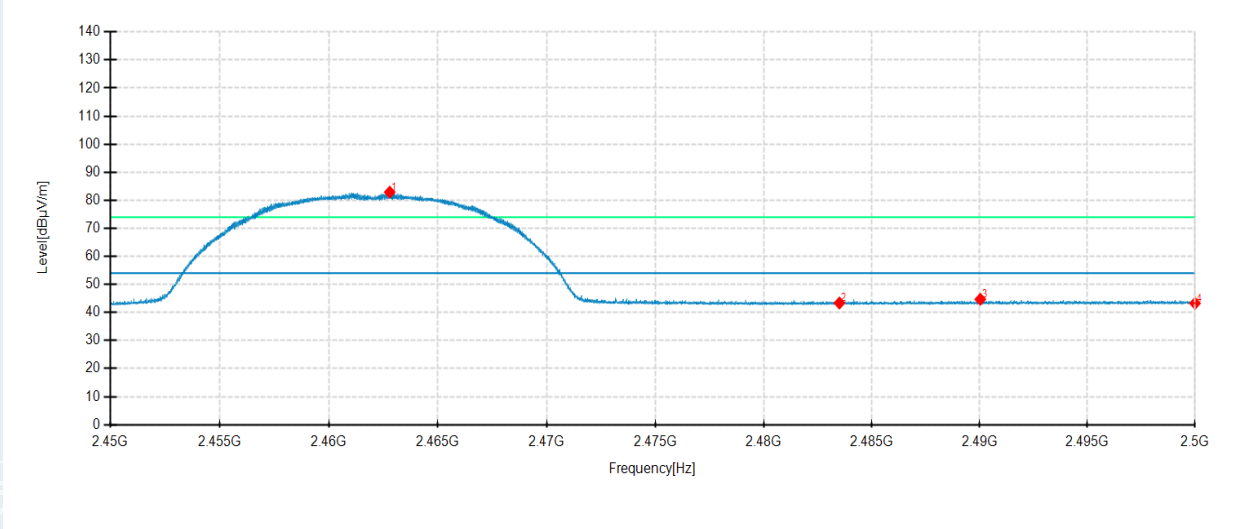

Detector mode: Average

Polarity: Vertical

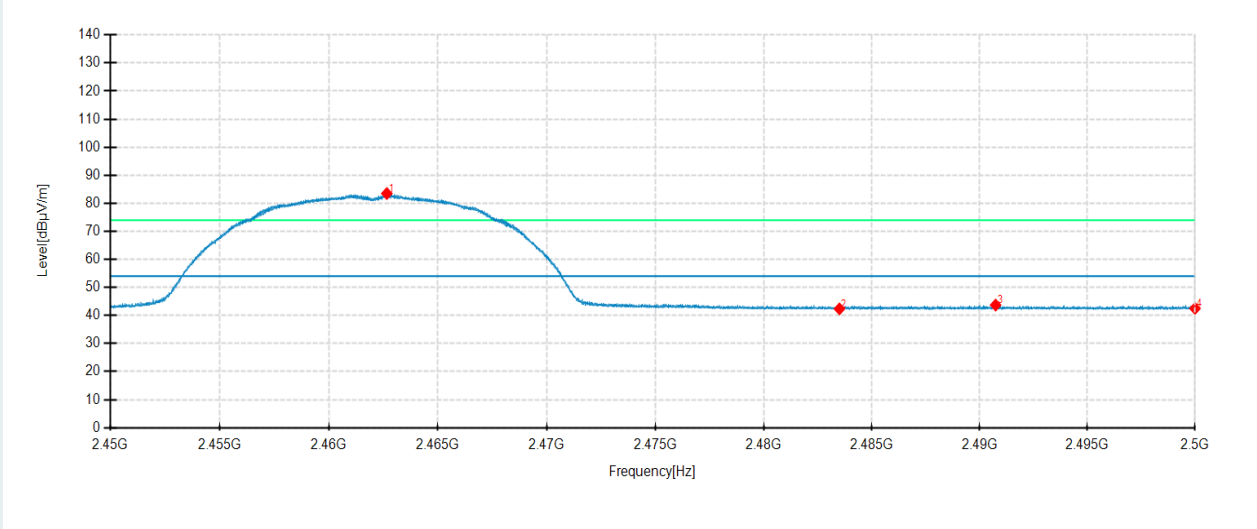

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2462.7863	73.40	82.89	9.49	54.00	-28.89	100	341	Horizontal	No limit
2	2483.5	33.45	43.37	9.92	54.00	10.63	200	188	Horizontal	/
3	2490.024	34.65	44.70	10.05	54.00	9.30	200	188	Horizontal	/
4	2500	33.01	43.26	10.25	54.00	10.74	100	204	Horizontal	/
1	2462.6513	74.29	83.48	9.19	54.00	-29.48	100	73	Vertical	No limit
2	2483.5	33.08	42.36	9.28	54.00	11.64	100	63	Vertical	/
3	2490.7341	34.40	43.71	9.31	54.00	10.29	200	173	Vertical	/
4	2500	33.14	42.49	9.35	54.00	11.51	200	289	Vertical	/

IEEE 802.11g mode

Lowest Channel

Frequency 2412MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Peak

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

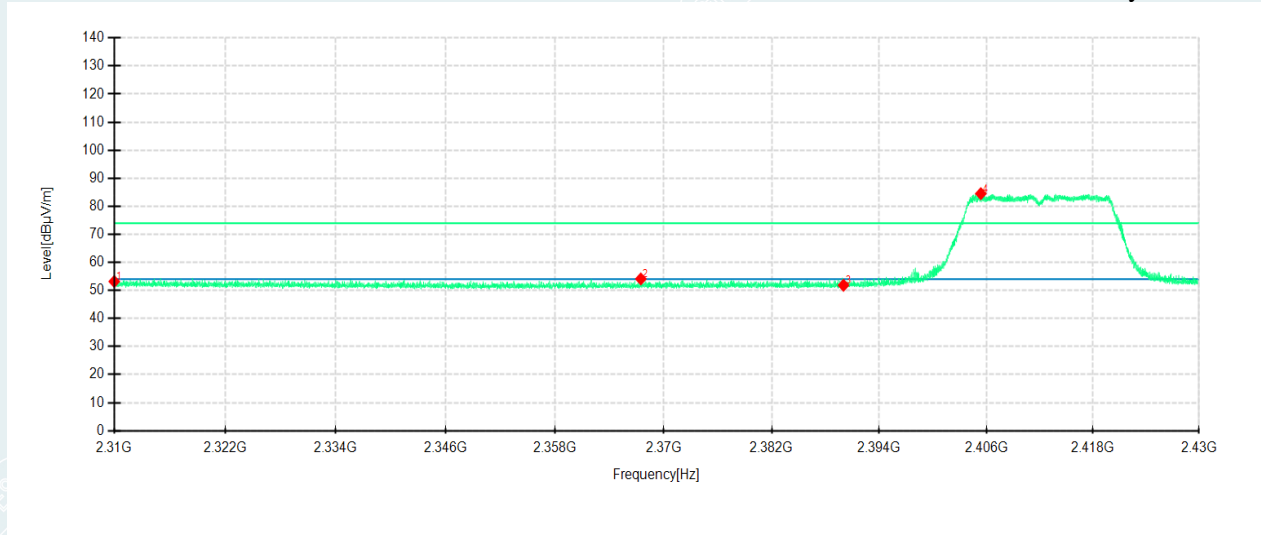

Detector mode: Peak

Polarity: Vertical

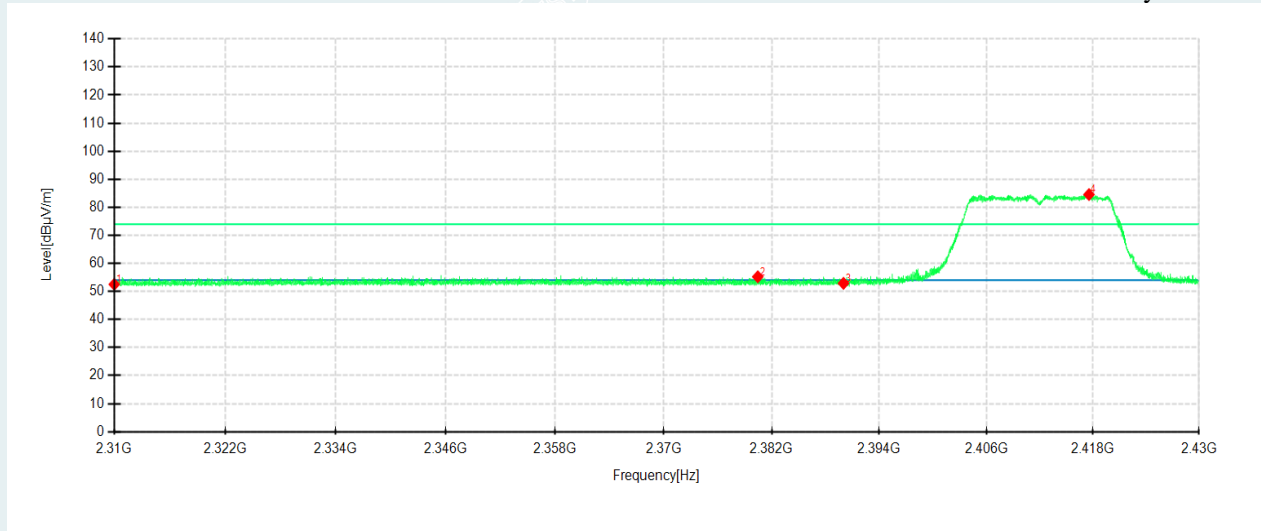

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	43.84	53.19	9.35	74.00	20.81	100	358	Horizontal	/
2	2367.4978	45.40	54.10	8.70	74.00	19.90	100	172	Horizontal	/
3	2390	42.92	51.85	8.93	74.00	22.15	100	172	Horizontal	/
4	2405.3735	75.45	84.50	9.05	74.00	-10.50	100	349	Horizontal	No limit
1	2310	42.60	52.53	9.93	74.00	21.47	200	235	Vertical	/
2	2380.459	45.12	55.23	10.11	74.00	18.77	200	173	Vertical	/
3	2390	42.81	52.88	10.07	74.00	21.12	200	350	Vertical	/
4	2417.5548	74.83	84.54	9.71	74.00	-10.54	100	31	Vertical	No limit

IEEE 802.11g mode

Lowest Channel

Frequency 2412MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Average

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

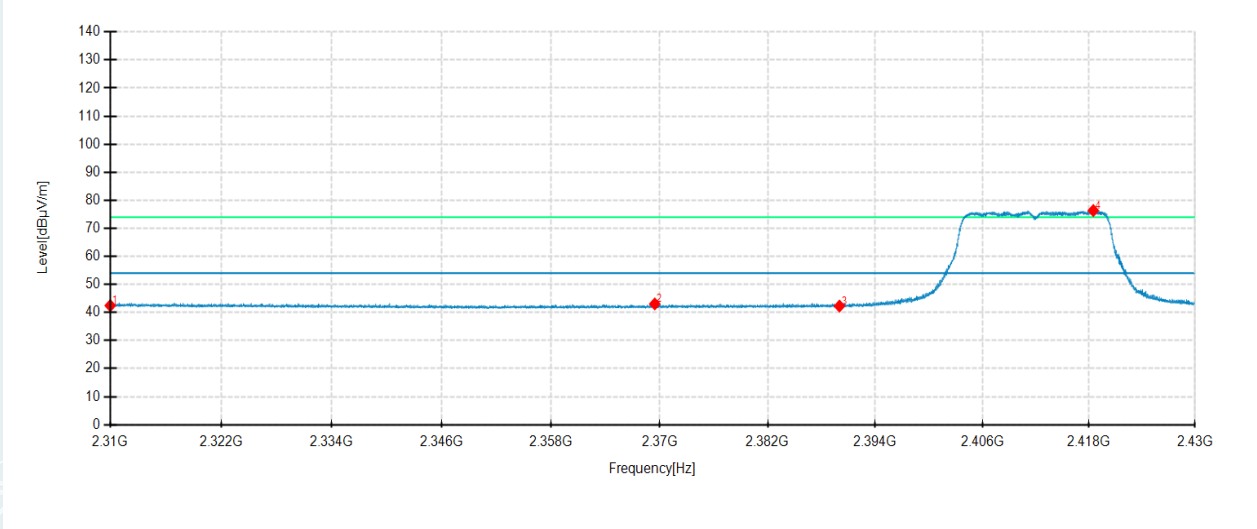

Detector mode: Average

Polarity: Vertical

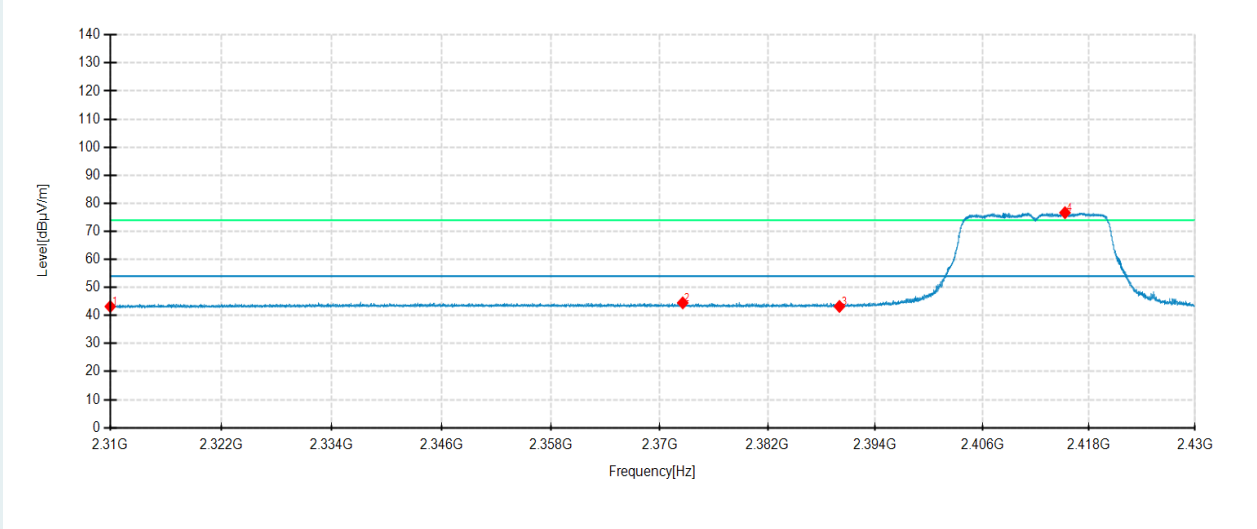

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	33.10	42.45	9.35	54.00	11.55	100	351	Horizontal	/
2	2369.4779	34.34	43.06	8.72	54.00	10.94	200	188	Horizontal	/
3	2390	33.36	42.29	8.93	54.00	11.71	100	171	Horizontal	/
4	2418.4908	67.23	76.34	9.11	54.00	-22.34	100	340	Horizontal	No limit
1	2310	33.27	43.20	9.93	54.00	10.80	200	194	Vertical	/
2	2372.5743	34.37	44.50	10.13	54.00	9.50	200	173	Vertical	/
3	2390	33.15	43.22	10.07	54.00	10.78	200	246	Vertical	/
4	2415.2985	66.89	76.65	9.76	54.00	-22.65	100	30	Vertical	No limit

**IEEE 802.11g mode
Highest Channel**

Frequency 2462MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Peak

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

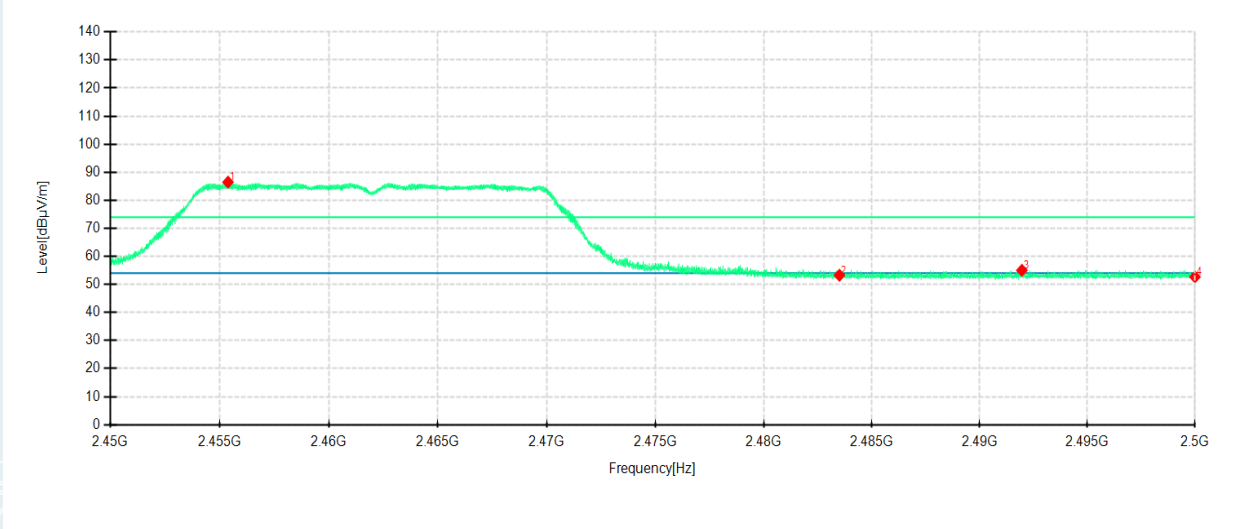

Detector mode: Peak

Polarity: Vertical

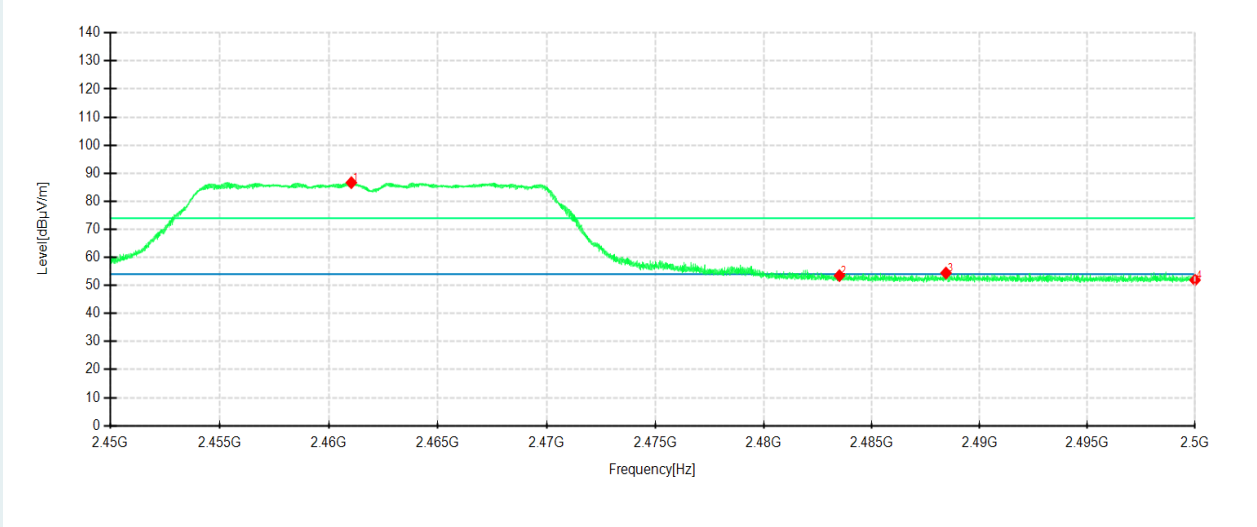

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2455.3805	77.14	86.49	9.35	74.00	-12.49	100	339	Horizontal	No limit
2	2483.5	43.35	53.27	9.92	74.00	20.73	100	171	Horizontal	/
3	2491.9542	44.95	55.04	10.09	74.00	18.96	200	21	Horizontal	/
4	2500	42.43	52.68	10.25	74.00	21.32	200	187	Horizontal	/
1	2461.0261	77.46	86.65	9.19	74.00	-12.65	100	73	Vertical	No limit
2	2483.5	44.20	53.48	9.28	74.00	20.52	200	174	Vertical	/
3	2488.4338	45.13	54.43	9.30	74.00	19.57	100	82	Vertical	/
4	2500	42.55	51.90	9.35	74.00	22.10	100	135	Vertical	/

IEEE 802.11g mode

Highest Channel

Frequency 2462MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Average

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

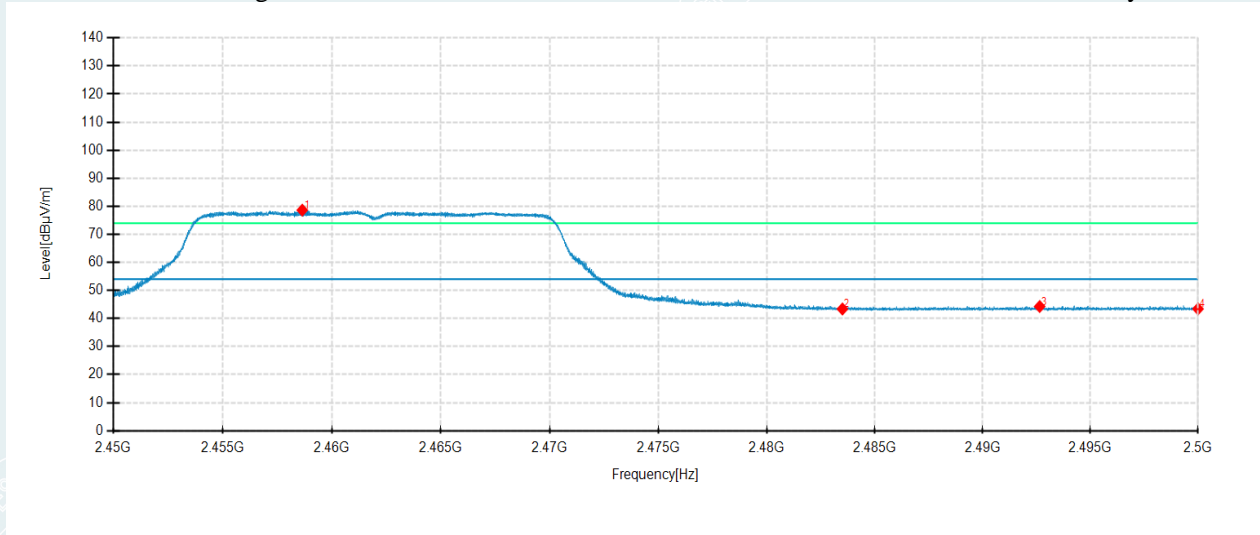

Detector mode: Average

Polarity: Vertical

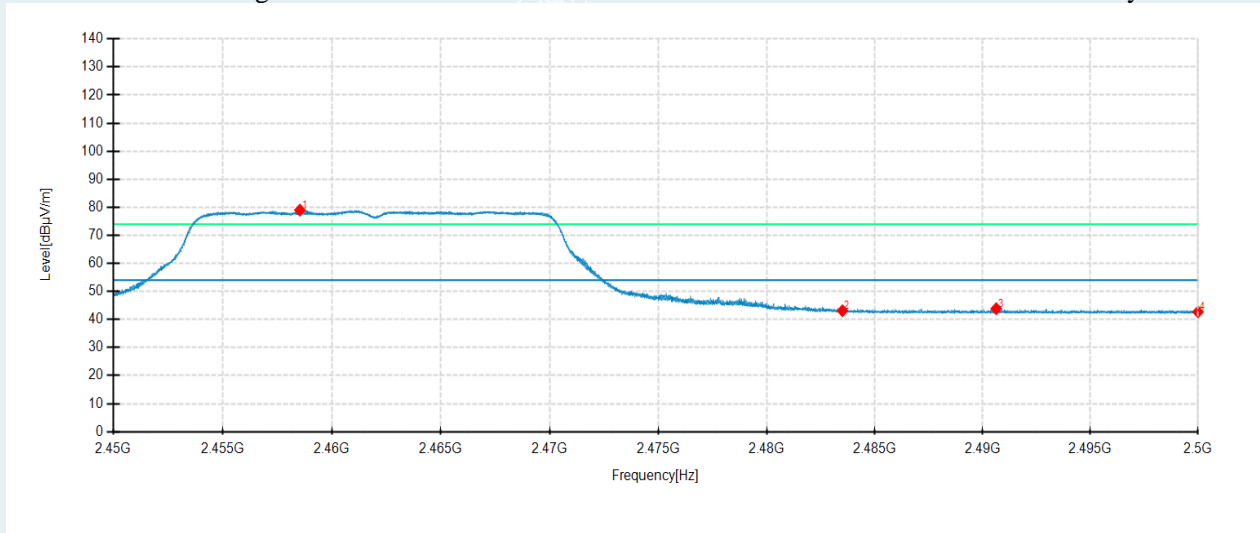

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2458.6409	69.21	78.63	9.42	54.00	-24.63	100	340	Horizontal	No limit
2	2483.5	33.46	43.38	9.92	54.00	10.62	100	350	Horizontal	/
3	2492.6393	34.18	44.28	10.10	54.00	9.72	100	174	Horizontal	/
4	2500	33.17	43.42	10.25	54.00	10.58	200	157	Horizontal	/
1	2458.5309	69.80	78.98	9.18	54.00	-24.98	100	71	Vertical	No limit
2	2483.5	33.84	43.12	9.28	54.00	10.88	100	1	Vertical	/
3	2490.6241	34.53	43.84	9.31	54.00	10.16	100	103	Vertical	/
4	2500	33.36	42.71	9.35	54.00	11.29	200	286	Vertical	/

IEEE 802.11n HT20 mode

Lowest Channel

Frequency 2412MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Peak

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

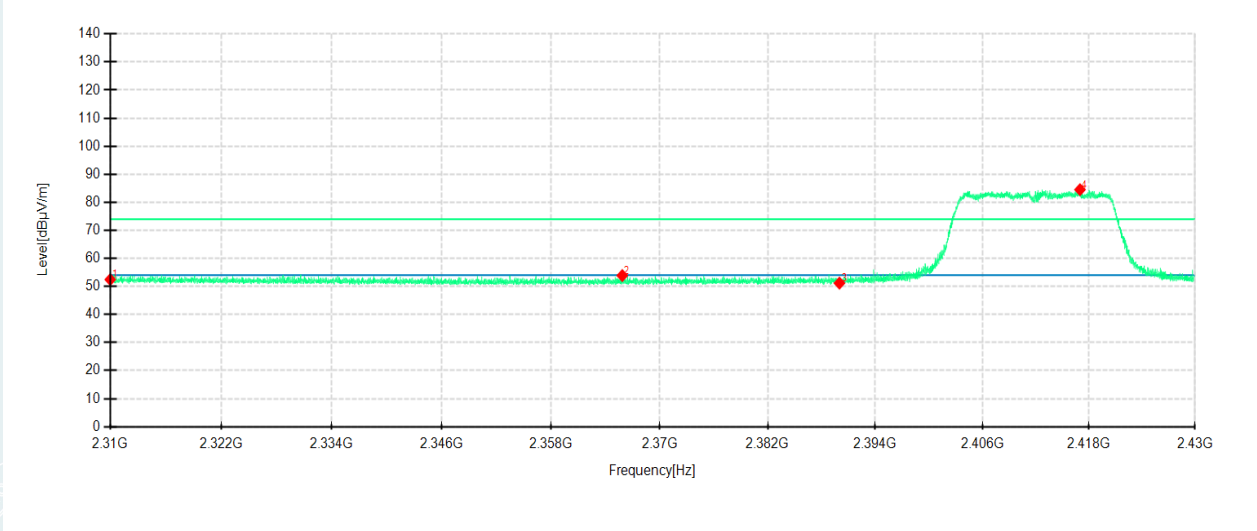

Detector mode: Peak

Polarity: Vertical

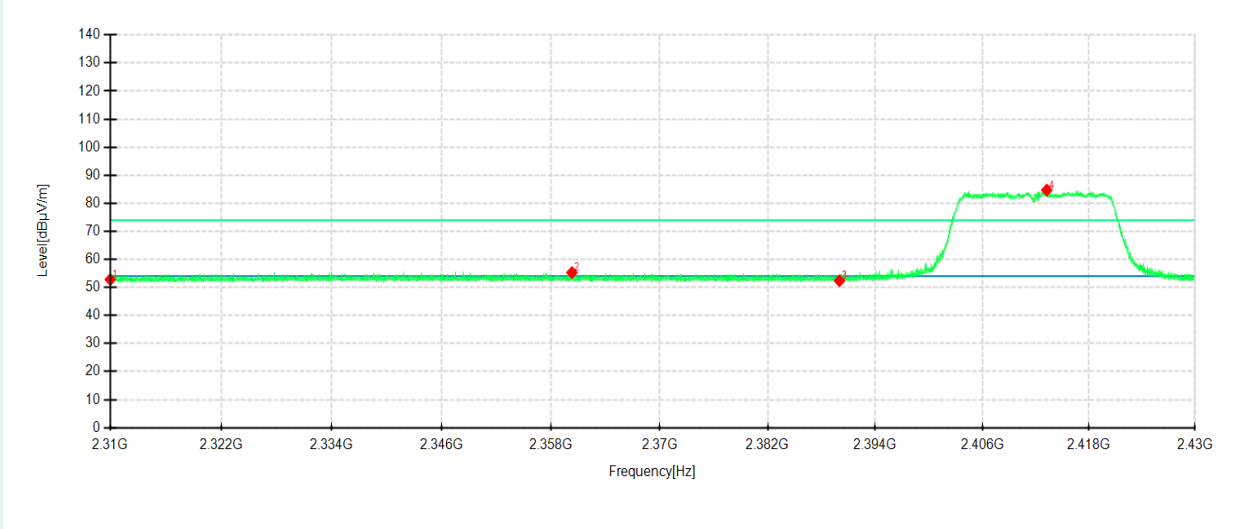

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	43.10	52.45	9.35	74.00	21.55	100	193	Horizontal	/
2	2365.8896	45.19	53.87	8.68	74.00	20.13	200	146	Horizontal	/
3	2390	42.25	51.18	8.93	74.00	22.82	100	172	Horizontal	/
4	2416.9907	75.39	84.50	9.11	74.00	-10.50	100	339	Horizontal	No limit
1	2310	42.87	52.80	9.93	74.00	21.20	100	168	Vertical	/
2	2360.333	45.12	55.30	10.18	74.00	18.70	100	189	Vertical	/
3	2390	42.30	52.37	10.07	74.00	21.63	200	214	Vertical	/
4	2413.2463	74.91	84.70	9.79	74.00	-10.70	100	32	Vertical	No limit

IEEE 802.11n HT20 mode

Lowest Channel

Frequency 2412MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Average

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

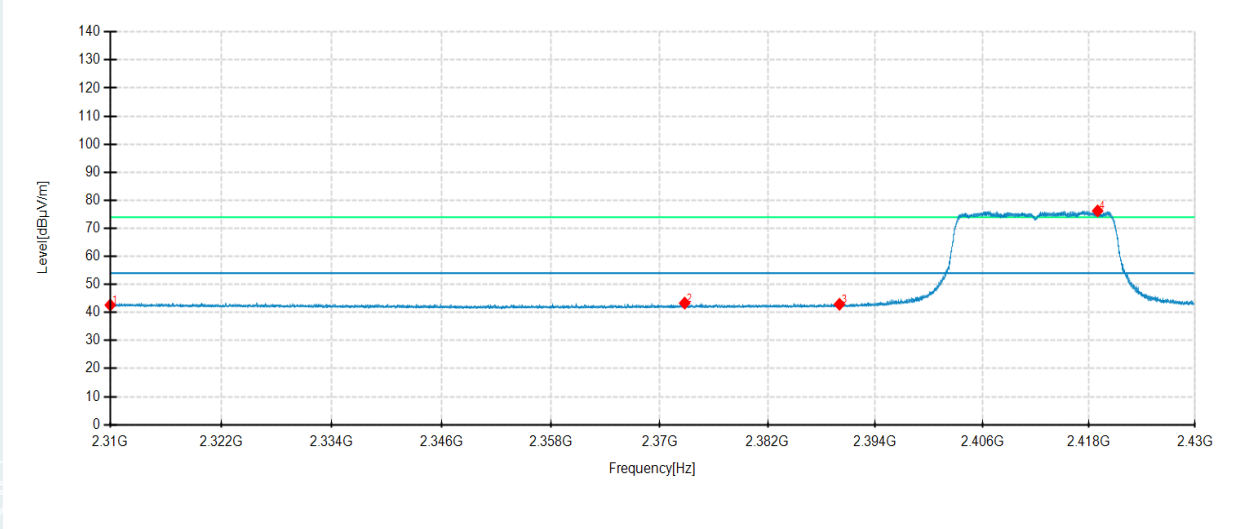

Detector mode: Average

Polarity: Vertical

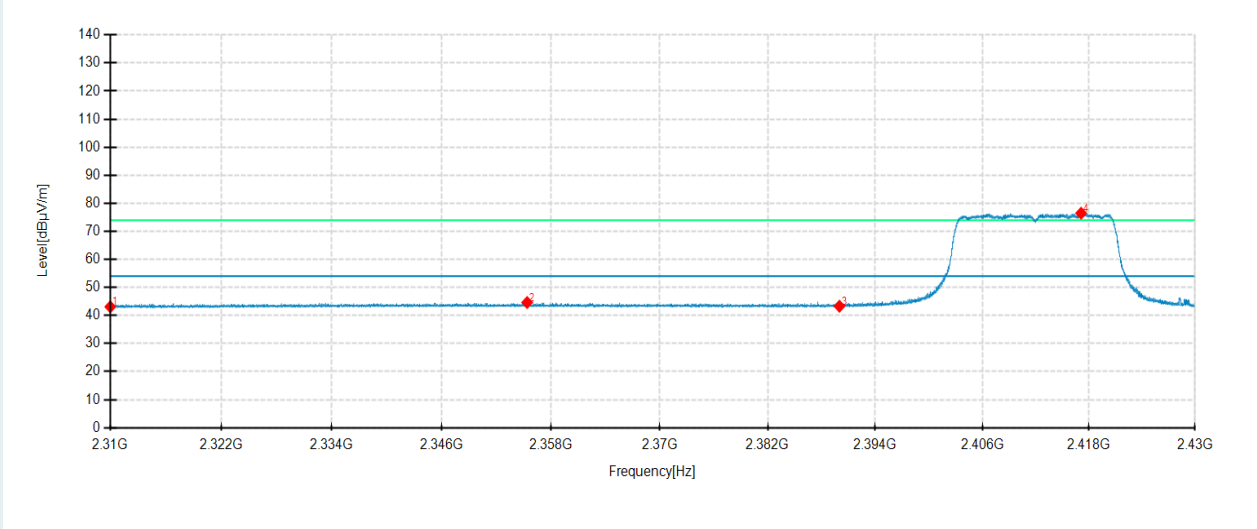

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	33.28	42.63	9.35	54.00	11.37	100	173	Horizontal	/
2	2372.7903	34.60	43.35	8.75	54.00	10.65	100	246	Horizontal	/
3	2390	34.00	42.93	8.93	54.00	11.07	200	156	Horizontal	/
4	2418.9829	67.11	76.22	9.11	54.00	-22.22	100	348	Horizontal	No limit
1	2310	33.16	43.09	9.93	54.00	10.91	200	225	Vertical	/
2	2355.4005	34.43	44.63	10.20	54.00	9.37	100	188	Vertical	/
3	2390	33.23	43.30	10.07	54.00	10.70	100	188	Vertical	/
4	2417.1107	66.74	76.46	9.72	54.00	-22.46	100	30	Vertical	No limit

**IEEE 802.11n HT20 mode
Highest Channel**

Frequency 2462MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Peak

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

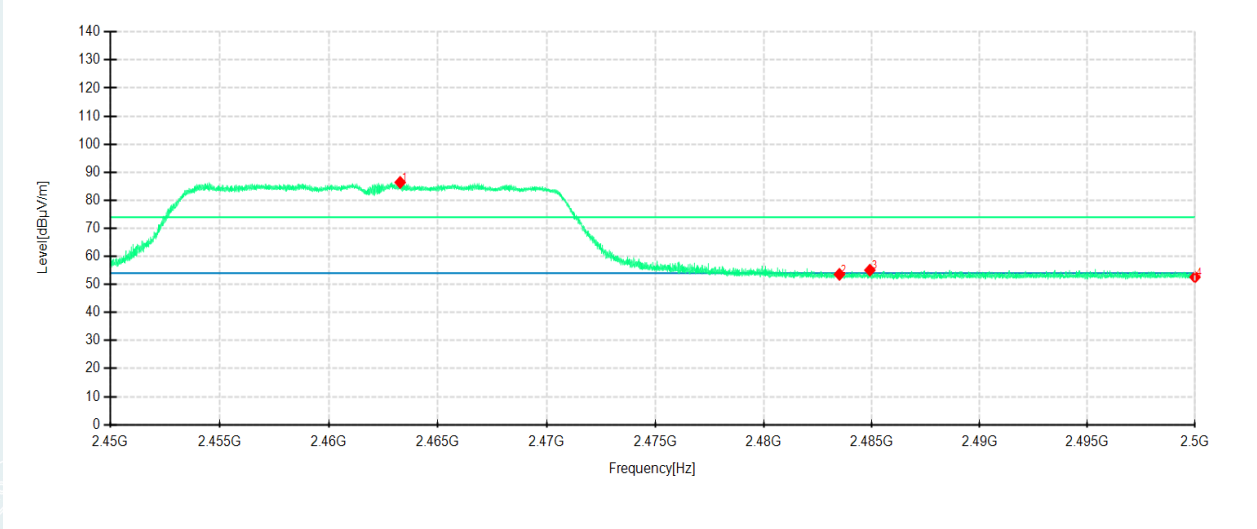

Detector mode: Peak

Polarity: Vertical

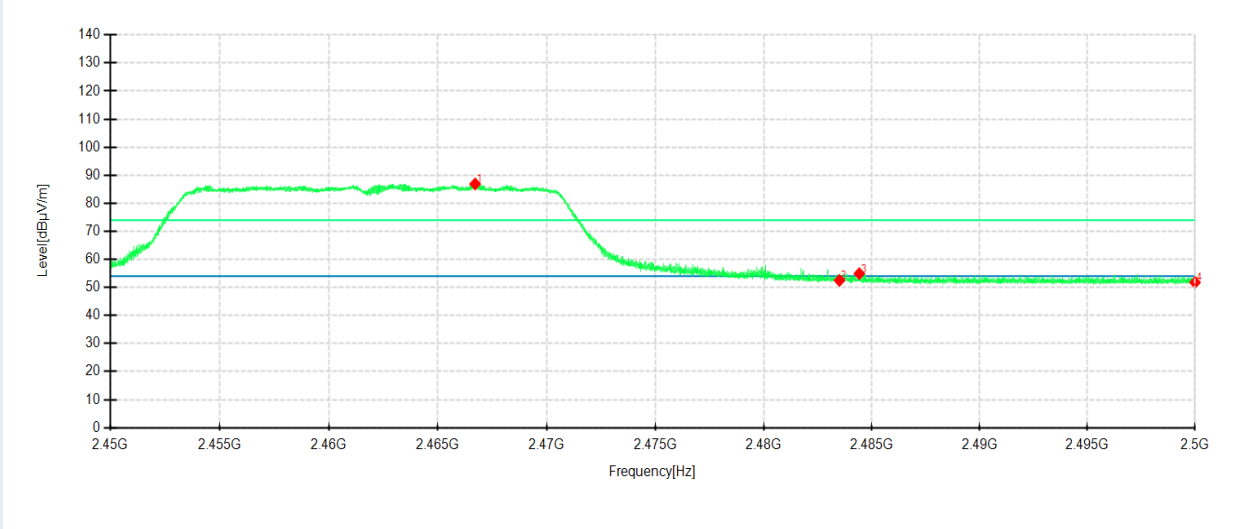

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2463.2663	76.87	86.38	9.51	74.00	-12.38	100	341	Horizontal	No limit
2	2483.5	43.67	53.59	9.92	74.00	20.41	100	341	Horizontal	/
3	2484.9085	45.12	55.07	9.95	74.00	18.93	200	187	Horizontal	/
4	2500	42.35	52.60	10.25	74.00	21.40	200	63	Horizontal	/
1	2466.7067	77.69	86.90	9.21	74.00	-12.90	100	30	Vertical	No limit
2	2483.5	43.23	52.51	9.28	74.00	21.49	100	0	Vertical	/
3	2484.4184	45.63	54.91	9.28	74.00	19.09	200	171	Vertical	/
4	2500	42.43	51.78	9.35	74.00	22.22	200	358	Vertical	/

**IEEE 802.11n HT20 mode
Highest Channel**

Frequency 2462MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Average

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

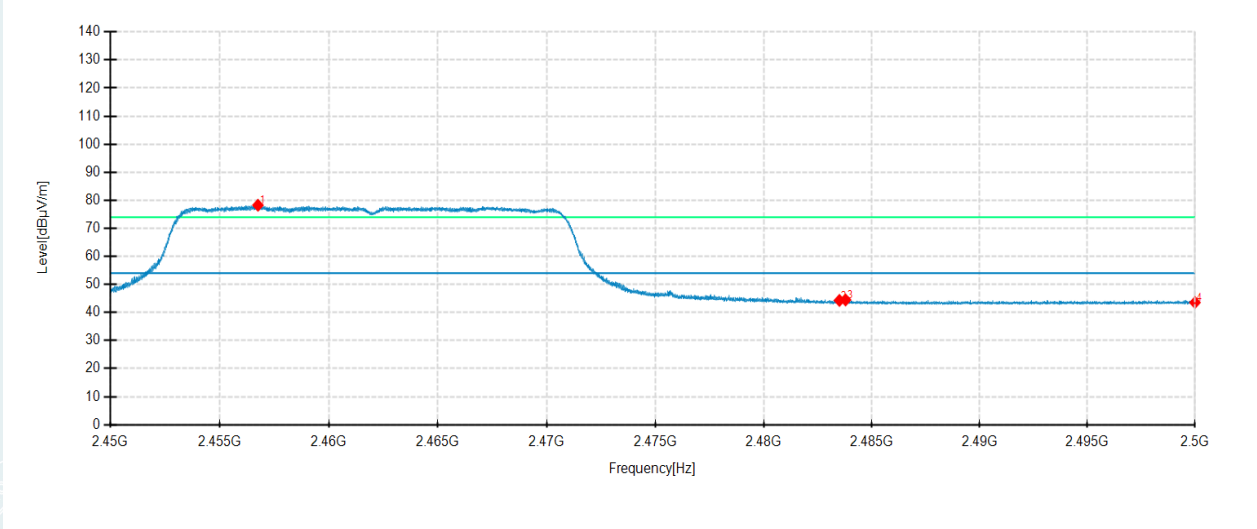

Detector mode: Average

Polarity: Vertical

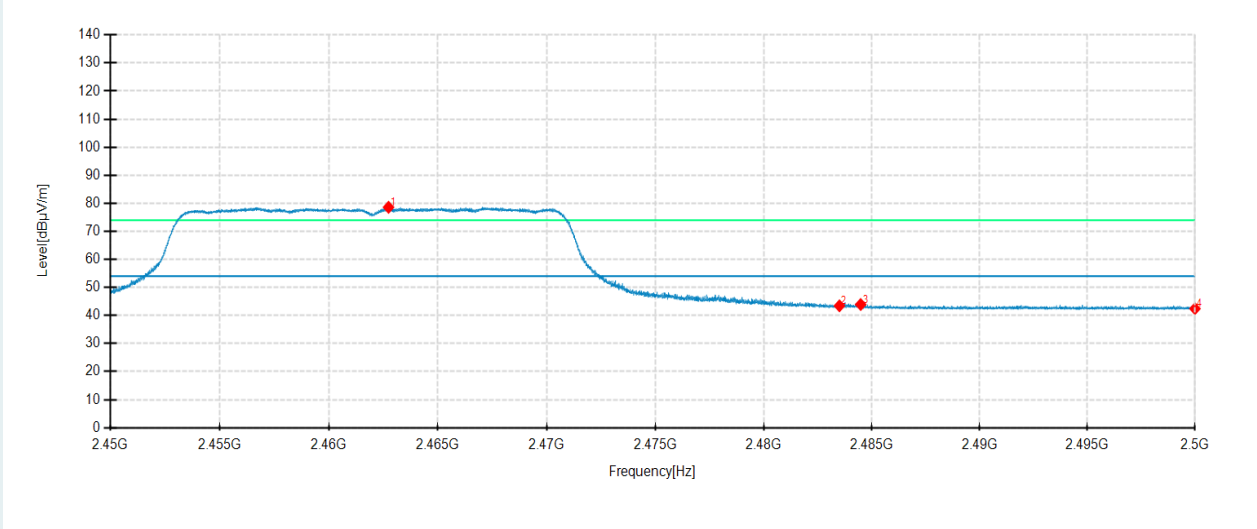

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2456.7507	68.86	78.24	9.38	54.00	-24.24	100	339	Horizontal	No limit
2	2483.5	34.39	44.31	9.92	54.00	9.69	100	339	Horizontal	/
3	2483.7834	34.55	44.47	9.92	54.00	9.53	100	298	Horizontal	/
4	2500	33.30	43.55	10.25	54.00	10.45	200	115	Horizontal	/
1	2462.7313	69.38	78.57	9.19	54.00	-24.57	100	72	Vertical	No limit
2	2483.5	34.16	43.44	9.28	54.00	10.56	200	182	Vertical	/
3	2484.4834	34.63	43.91	9.28	54.00	10.09	100	103	Vertical	/
4	2500	33.08	42.43	9.35	54.00	11.57	200	172	Vertical	/

IEEE 802.11n HT40 mode

Lowest Channel

Frequency 2422MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Peak

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

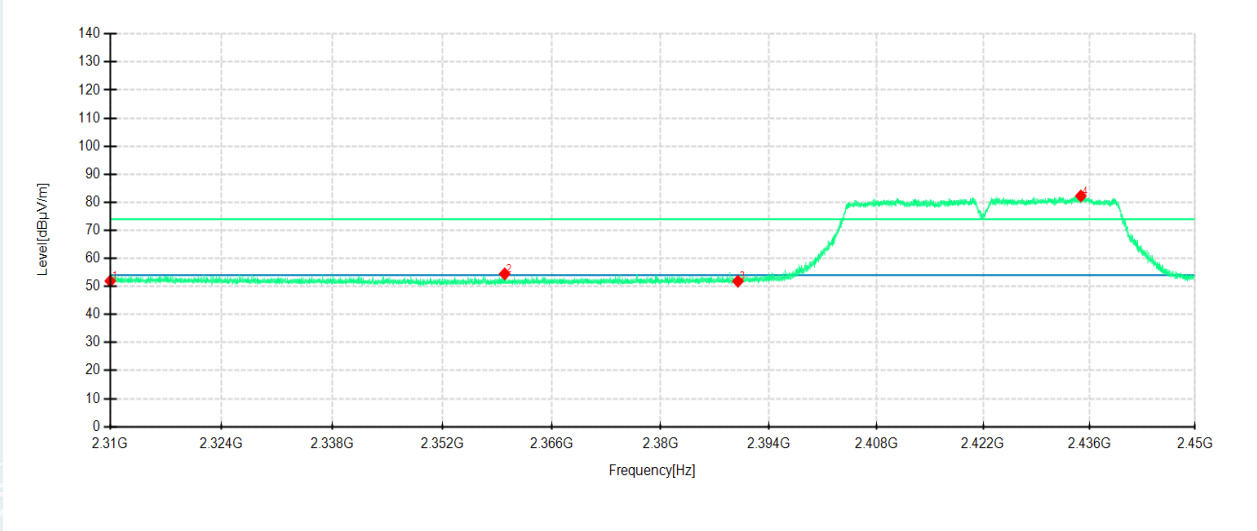

Detector mode: Peak

Polarity: Vertical

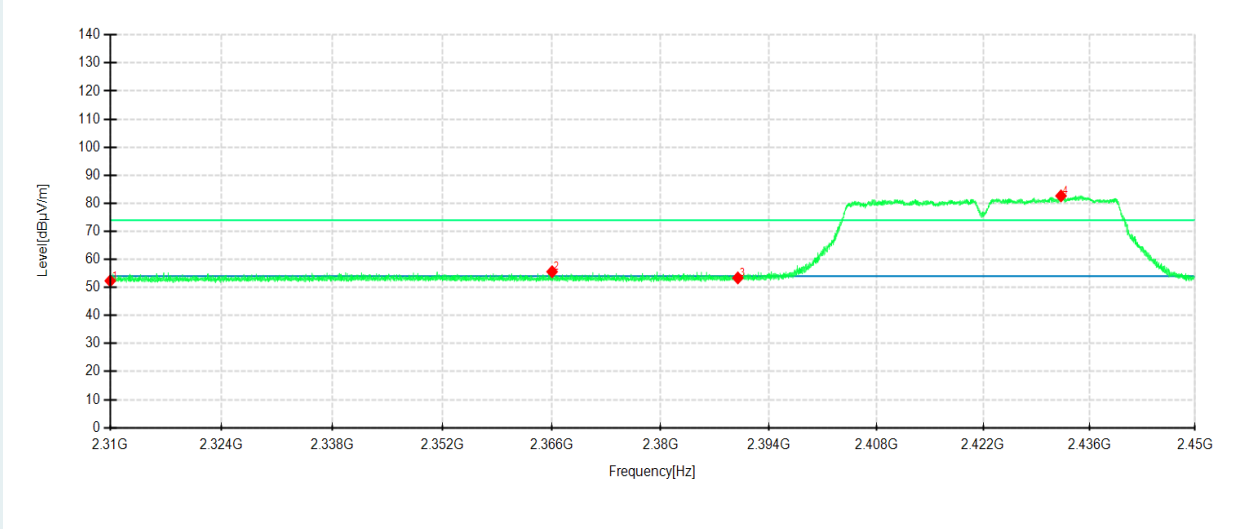

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	42.57	51.92	9.35	74.00	22.08	200	21	Horizontal	/
2	2359.957	45.86	54.48	8.62	74.00	19.52	200	0	Horizontal	/
3	2390	42.92	51.85	8.93	74.00	22.15	200	63	Horizontal	/
4	2434.8785	73.06	82.24	9.18	74.00	-8.24	100	338	Horizontal	No limit
1	2310	42.42	52.35	9.93	74.00	21.65	100	186	Vertical	/
2	2366.0336	45.44	55.60	10.16	74.00	18.40	200	182	Vertical	/
3	2390	43.32	53.39	10.07	74.00	20.61	100	82	Vertical	/
4	2432.2602	73.17	82.63	9.46	74.00	-8.63	100	93	Vertical	No limit

IEEE 802.11n HT40 mode

Lowest Channel

Frequency 2422MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Average

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

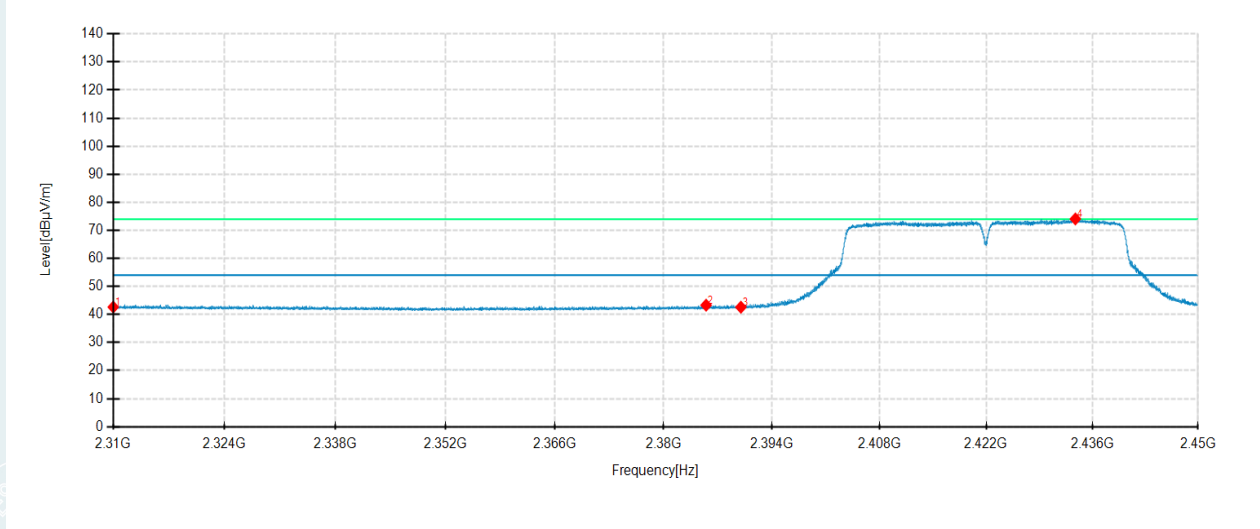

Detector mode: Average

Polarity: Vertical

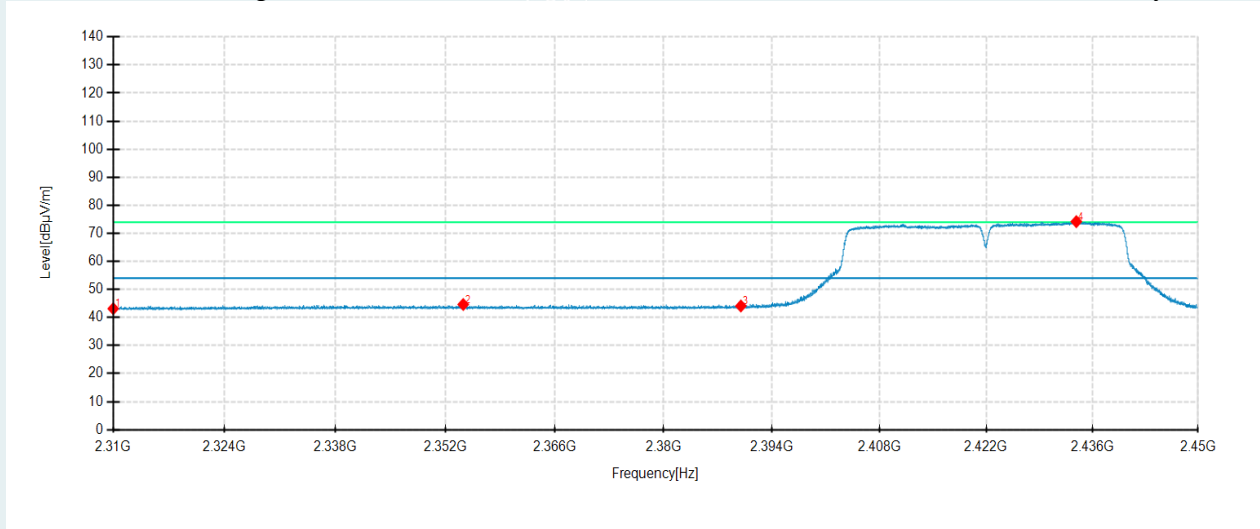

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2310	33.29	42.64	9.35	54.00	11.36	200	188	Horizontal	/
2	2385.4956	34.44	43.32	8.88	54.00	10.68	200	188	Horizontal	/
3	2390	33.67	42.60	8.93	54.00	11.40	100	340	Horizontal	/
4	2433.7584	64.90	74.07	9.17	54.00	-20.07	100	351	Horizontal	No limit
1	2310	33.21	43.14	9.93	54.00	10.86	100	22	Vertical	/
2	2354.2724	34.42	44.63	10.21	54.00	9.37	100	188	Vertical	/
3	2390	34.03	44.10	10.07	54.00	9.90	200	173	Vertical	/
4	2433.8844	64.74	74.17	9.43	54.00	-20.17	100	74	Vertical	No limit

**IEEE 802.11n HT40 mode
Highest Channel**

Frequency 2452MHz

Environment: 24.2°C/53%RH/101.0kPa


Tested By: Zhang Zishan

Detector mode: Peak

Voltage: DC 5V


Date: 2022-12-05

Polarity: Horizontal

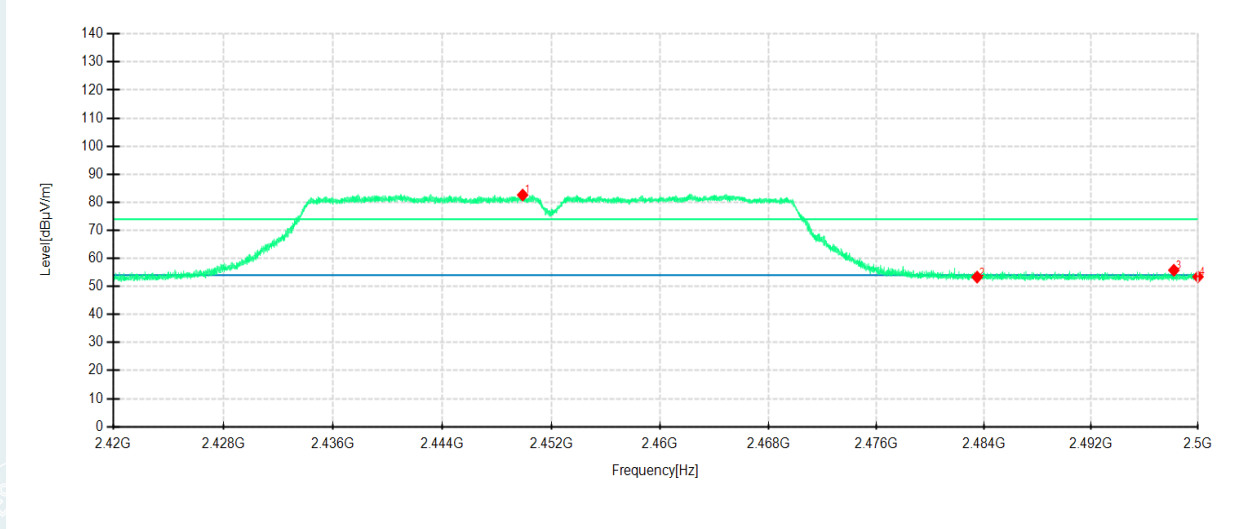

Detector mode: Peak

Polarity: Vertical

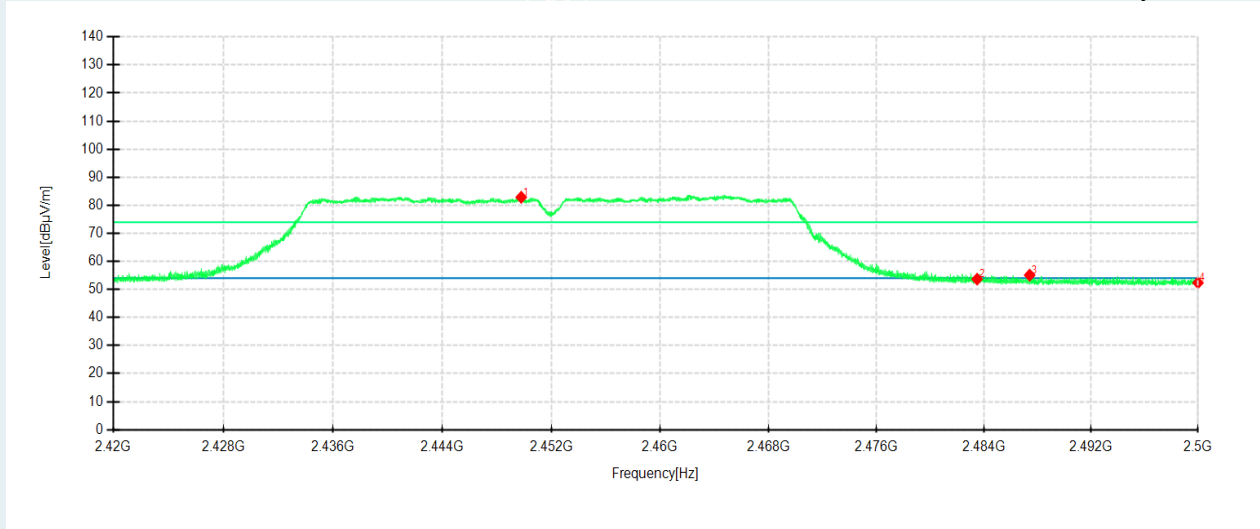


No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2449.891	73.36	82.60	9.24	74.00	-8.60	100	342	Horizontal	No limit
2	2483.5	43.40	53.32	9.92	74.00	20.68	100	172	Horizontal	/
3	2498.1918	45.56	55.77	10.21	74.00	18.23	200	188	Horizontal	/
4	2500	43.19	53.44	10.25	74.00	20.56	100	172	Horizontal	/
1	2449.787	73.72	82.86	9.14	74.00	-8.86	100	31	Vertical	No limit
2	2483.5	44.39	53.67	9.28	74.00	20.33	100	62	Vertical	/
3	2487.4147	45.79	55.09	9.30	74.00	18.91	100	93	Vertical	/
4	2500	43.02	52.37	9.35	74.00	21.63	200	173	Vertical	/

**IEEE 802.11n HT40 mode
Highest Channel**


Frequency 2452MHz
Environment: 24.2°C/53%RH/101.0kPa
Tested By: Zhang Zishan
Detector mode: Average

Voltage: DC 5V
Date: 2022-12-05
Polarity: Horizontal

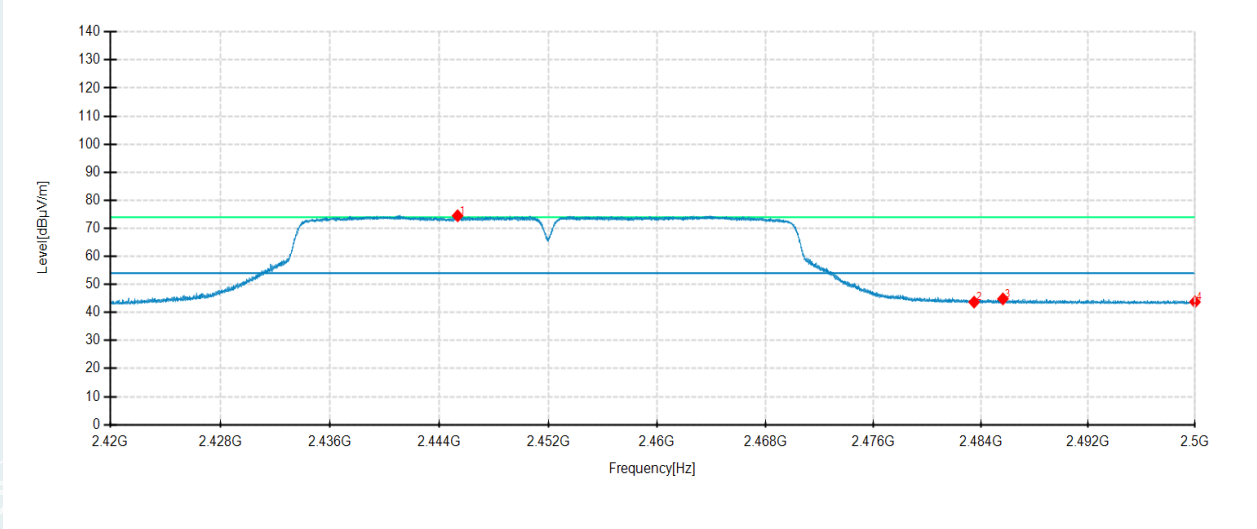

Detector mode: Average

Polarity: Vertical

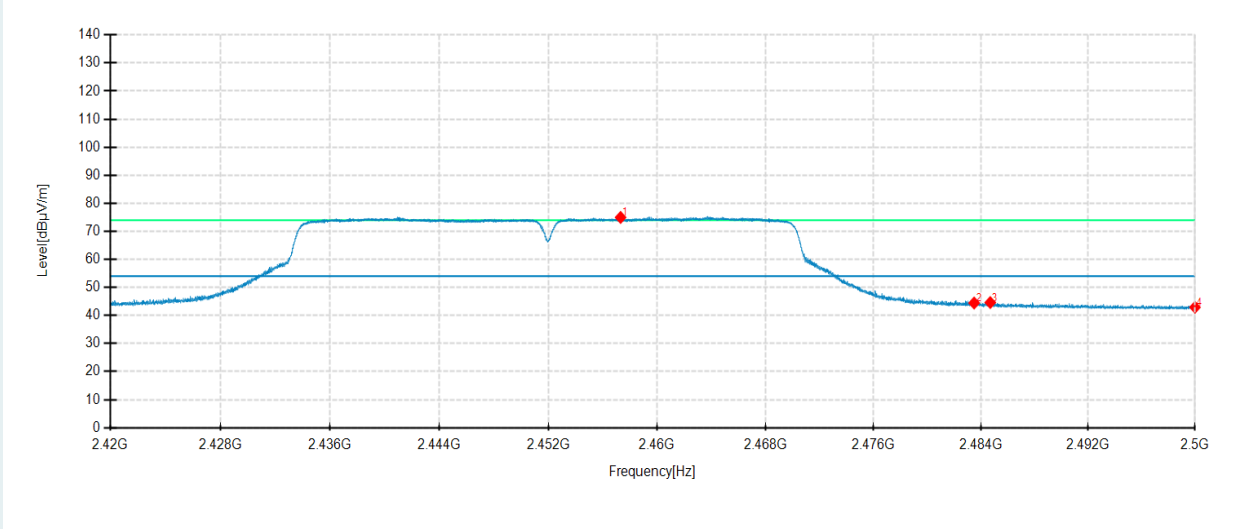

No.	Frequency MHz	Reading dBµV/m	Level dBµV/m	Factor dB	Limit dBµV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	2445.3385	65.26	74.48	9.22	54.00	-20.48	100	338	Horizontal	No limit
2	2483.5	33.78	43.70	9.92	54.00	10.30	100	171	Horizontal	/
3	2485.6466	34.89	44.85	9.96	54.00	9.15	100	244	Horizontal	/
4	2500	33.52	43.77	10.25	54.00	10.23	100	350	Horizontal	/
1	2457.3157	65.79	74.96	9.17	54.00	-20.96	100	73	Vertical	No limit
2	2483.5	35.17	44.45	9.28	54.00	9.55	100	104	Vertical	/
3	2484.7025	35.33	44.62	9.29	54.00	9.38	100	63	Vertical	/
4	2500	33.57	42.92	9.35	54.00	11.08	200	255	Vertical	/

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM

Please refer to the attached document E20221124437601-10 Test photo.

APPENDIX B. PHOTOGRAPH OF THE EUT

Please refer to the attached document E20221124437601-11 EUT photo.

----- End of Report -----