

Report No.: ZR/2020/9005901 Page: 1 of 29

## FCC TEST REPORT

Application No:	ZR/2020/90059		
Applicant:	Nauto		
Address of Applicant	220 Portage Avenue, Palo Alto, California 94306		
Manufacturer:	Nauto		
Address of Manufacturer:	220 Portage Avenue, Palo Alto, California 94306		
EUT Description:	In-vehicle Camera		
Model No.:	Nauto 3-1		
Trade Mark:	Nauto		
FCC ID:	2AKJ5-N31		
Standards:	47 CFR Part 2		
	47 CFR Part 22 subpart H		
	47 CFR Part 24 subpart E		
	47 CFR Part 27 subpart C		
	47 CFR Part 90 subpart R		
Test Method:	FCC KDB 971168 D01 Power Meas License Digital Systems V03r01		
	C63.26 (2015)		
Date of Receipt:	2020/10/27		
Date of Test:	2020/10/27 to 2020/11/23		
Date of Issue:	2020/11/23		
Test Result:	PASS *		

In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derele yang

Derek Yang Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx</u>. Attention is drawn to the limitation of liability, indemnification and <u>urisdiction issues</u> defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. <u>Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)83071443</u>, or email: <u>CN DoccheckBerges.com</u>

No. Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 tt (86-755) 26012053 ft (86-755) 26710594 www.sgsgroup.com.cn 中国 • 深圳 • 科技园中区M-10栋一号厂房 邮编: 518057 tt (86-755) 26012053 ft (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 2 of 29

## 1 Version

	Revision Record					
Version Chapter Date Modifier Remark						
01		2020/11/23		Original		

Authorized for issue by:		
Tested By	Mike Mu (Mike Hu) /Project Engineer	
Checked By	David Chen (David Chen) /Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation or liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com



Report No.: ZR/2020/9005901 Page: 3 of 29

## Content

1	VER	SION	2
2	TES	T SUMMARY	5
	2.1	UMTS BAND 5 /LTE BAND 5	5
	2.2	UMTS BAND 2 /LTE BAND 2	5
	2.3	LTE BAND 4 /66	6
	2.4	LTE BAND 12	6
	2.5	LTE BAND 14	7
	2.6	LTE BAND 71	
3	GEN	IERAL INFORMATION	9
	3.1	CLIENT INFORMATION	9
	3.2	TEST LOCATION	9
	3.3	TEST FACILITY	9
	3.4	GENERAL DESCRIPTION OF EUT	10
	3.5	TEST MODE	10
	3.6	TEST ENVIRONMENT	10
	3.7	TECHNICAL SPECIFICATION	11
	3.8	TEST FREQUENCIES	13
4	DES	CRIPTION OF TESTS	17
	4.1	CONDUCTED OUTPUT POWER	17
	4.2	EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER	17
	4.3	OCCUPIED BANDWIDTH	17
	4.4	BAND EDGE AT ANTENNA TERMINALS	
	4.5	SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	19
	4.6	PEAK-AVERAGE RATIO	19
	4.7	FIELD STRENGTH OF SPURIOUS RADIATION	20
	4.8	FREQUENCY STABILITY / TEMPERATURE VARIATION	21
	4.9	TEST SETUPS	22
	4.9.1	Test Setup 1	22
	4.9.2	2 Test Setup 2	22
	4.9.3	3 Test Setup 3	23
	4.9.4	1 Test Setup 4	23



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Ocuments, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en/Ocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's indiges at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document. To and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document. To any dwithin the limits of Cilent's instructions, if any. The Company by the Company's finder and this document. This document to exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized atteration, forgery or falsification of the content or appearance of this document is unavful and offenders may be prosecuted to the fulles textent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing / Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or enail: CN\_Doccheck@esgs.com



Report No.: ZR/2020/9005901 Page: 4 of 29

	4.10	Test Conditions	24
5	MAI	N TEST INSTRUMENTS	26
_			
6	MEA	ASUREMENT UNCERTAINTY	29
7	APP	PENDIXES	29



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation or liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com



Report No.: ZR/2020/9005901 Page: 5 of 29

## 2 Test Summary

### 2.1 UMTS Band 5 /LTE Band 5

Test Item	FCC Rule No.	Requirements	Test Result	Verdict		
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	FCC: ERP ≤ 7 W	Section 1 of Appendix B	Pass		
Peak-Average Ratio		Limit≤13 dB	Section 2 of Appendix B	Pass		
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass		
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass		
Band Edges Compliance	§2.1051, §22.917	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass		
Spurious Emission at Antenna Terminals	§2.1051, §22.917	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass		
Field Strength of Spurious Radiation	§2.1053, §22.917	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass		
Frequency Stability	§2.1055, §22.355	≤ ±2.5ppm.	Section 8 of Appendix B	Pass		
Remark: For the verc	Remark: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".					

## 2.2 UMTS Band 2 /LTE Band 2

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	EIRP ≤ 2 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §24.232	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §24.238	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	<ul> <li>≤ -13 dBm/1 MHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> </ul>	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §24.235	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass
Remark: For the verc	lict, the "N/A" denote	es "not applicable", the "N/T" denotes "not te	sted".	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@ess.com

No. Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 6 of 29

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	EIRP ≤ 1 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §27.50(d)	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	<ul> <li>≤ -13 dBm/1 MHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> </ul>	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §27.54	≤ ±2.5 ppm.	Section 8 of Appendix B	Pass
Remark: For the verd	lict, the "N/A" denot	es "not applicable", the "N/T" denotes "not	tested".	

## 2.3 LTE Band 4 /66

### 2.4 LTE Band 12

Test Item	FCC Rule No	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§27.50(c)	FCC: ERP ≤ 3 W.	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	FCC: ≤ -13 dBm/100 kHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §27.54	≤ ±2.5ppm.	Section 8 of Appendix B	Pass
Remark: For the verc	lict, the "N/A" denot	es "not applicable", the "N/T" denotes "not	tested".	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation on liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this ter report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: (N\_Doccheck@egs.com)



Report No.: ZR/2020/9005901 Page: 7 of 29

## 2.5 LTE Band 14

Test Item	FCC Rule No	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§90.365	FCC: ERP ≤ 3 W.	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046, §27.50(c)	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Emission Mask	§90.210(n)	Transmitters designed for operation under this part on frequencies other than listed in this section must meet the emission mask requirements of Emission Mask B. Equipment operating under this part on frequencies allocated to but shared with the Federal Government, must meet the applicable Federal Government technical standards (b) Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows: (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.(2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB(3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.	Section 5 of Appendix B	Pass
Band Edges Compliance	§2.1051, §90.543(e)	<ul> <li>(1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 76 + 10 log (P) dB in a 6.25 kHz band segment, for base and fixed stations.(2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than 65 + 10 log (P) dB in a 6.25 kHz band segment, for mobile and portable stations.(3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz,</li> </ul>	Section 6 of Appendix B	Pass



	Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed
	overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.
	Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is
	advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of
	Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a
	transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or
	appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the
	results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,
	Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
td	No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
tu.	
	中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 8 of 29

Test Item	FCC Rule No	Requirements	Test Result	Verdict
		by at least 43 + 10 log (P) dB.		
Spurious Emission at Antenna Terminals	§2.1051, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559– 1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 7 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §90.543(c) §90.543(f)	FCC: ≤ -13 dBm/100 kHz. For operations in the 758–775 MHz and 788–805 MHz bands, all emissions including harmonics in the band 1559– 1610 MHz shall be limited to -70 dBW/ MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.	Section 8 of Appendix B	Pass
Frequency Stability	§2.1055, §90.213	≤ ±2.5ppm.	Section 9 of Appendix B	Pass
Remark: For the verdict,	the "N/A" denote	s "not applicable", the "N/T" denotes "not tes	sted".	

## 2.6 LTE Band 71

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(c)	EIRP ≤ 3 W	Section 1 of Appendix B	Pass
Peak-Average Ratio	§2.1046,	Limit≤13 dB	Section 2 of Appendix B	Pass
Modulation Characteristics	§2.1047	Digital modulation	Section 3 of Appendix B	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 4 of Appendix B	Pass
Band Edges Compliance	§2.1051, §27.53(g)	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Section 5 of Appendix B	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(g)	<ul> <li>≤ -13 dBm/1 MHz, from 9 kHz to 10<sup>th</sup> harmonics but outside authorized operating frequency ranges.</li> </ul>	Section 6 of Appendix B	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(g)	≤ -13 dBm/1 MHz.	Section 7 of Appendix B	Pass
Frequency Stability	§2.1055, §27.54	within the authorized bands of operation.	Section 8 of Appendix B	Pass
Remark: For the verdict,	the "N/A" denot	es "not applicable", the "N/T" denotes "not te	sted".	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior writtem approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@egs.com



Report No.: ZR/2020/9005901 Page: 9 of 29

## **3** General Information

### 3.1 Client Information

Applicant:	Nauto
Address of Applicant:	220 Portage Avenue, Palo Alto, California 94306
Manufacturer:	Nauto
Address of Manufacturer:	220 Portage Avenue, Palo Alto, California 94306

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057

### 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### • VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • FCC – Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconserate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: **CN\_Doccheck@ess.com** 

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 10 of 29

#### **EUT Description::** In-vehicle Camera Model No.: Nauto 3-1 Trade Mark: Nauto Hardware Version: N3V8-NA Software Version: NautoN3\_Shipping\_U82\_202010230751\_SECURED □ Portable Device, ⊠Module Sample Type: External, X Integrated Antenna Type: WCDMA Band II:0.7dBi WCDMA Band V:-0.1dBi LTE Band 2:0.7dBi; LTE Band 4:0.6dBi; Antenna Gain: LTE Band 5:-0.1dBi; LTE Band 12: -0.2dBi LTE Band 14: 0.1dBi LTE Band 66: 0.6dBi LTE Band 71: -0.1dBi

## 3.4 General Description of EUT

### 3.5 Test Mode

Test Mode	Test Modes Description
UMTS/TM1	UMTS system, WCDMA, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation
LTE/TM2	

Remark: The test mode(s) are selected according to relevant radio technology specifications.

## 3.6 Test Environment

Environment Parameter	Selected Values During Tests		
Relative Humidity	52%		
Atmospheric Pressure:	101.32 KPa		
Temperature	NT 25 °C		
	LV 5V		
Voltage:	NV	12&24V	
	HV	31V	

Remark: LV= lower extreme test voltage; NV= nominal voltage

HV= upper extreme test voltage; NT= normal temperature



No.1Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国 · 深圳 · 科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 11 of 29

## 3.7 Technical Specification

Characteristics	Description				
Dadia Quatana Tura	UMTS				
Radio System Type	LTE				
	Band	ТХ	RX		
	UMTS Band II	1850 to 1910 MHz	1930 to 1990 MHz		
	UMTS Band V	824 to 849 MHz	869 to 894 MHz		
	LTE Band 2	1850 to 1910 MHz	1930 to 1990 MHz		
Supported Frequency	LTE Band 4	1710 to 1755 MHz	2110 to 2155 MHz		
Range	LTE Band 5	824 to 849 MHz	869 to 894 MHz		
	LTE Band 12	699 to 716 MHz	729 to 746 MHz		
	LTE Band 14	788 to 798 MHz	758 to 768 MHz		
	LTE Band 66	1710 to 1780 MHz	2110 to 2200 MHz		
	LTE Band 71	663 to 698 MHz	617 to 652 MHz		
Target TX Output Power	UMTS Band V: 24dBm LTE Band 2: 24dBm LTE Band 4: 24dBm LTE Band 5: 24dBm LTE Band 12: 24dBm LTE Band 14: 24dBm LTE Band 66: 24dBm LTE Band 71: 24dBm				
	UMTS system:	⊠5 MHz			
	LTE Band 2	⊠1.4 MHz;⊠3 MHz; ⊠5 MHz; ⊠10 MHz; ⊠15 MHz, ⊠20 MHz			
Supported Channel	LTE Band 4	$\boxed{\square 1.4 \text{ MHz}; \square 3 \text{ MHz}; \square 5 \text{ MHz}; \square 10 \text{ MHz};}$ $\boxed{\square 15 \text{ MHz}, \square 20 \text{ MHz}}$			
Bandwidth	LTE Band 5	⊠1.4 MHz;⊠3 MHz; ⊠\$			
Bandwidth	LTE Band 12	☐ 1.4 MHz;⊠3 MHz; ⊠5	5 MHz; 🛛 10 MHz		
	LTE Band 14	⊠5 MHz; ⊠10 MHz			
	LTE Band66	│	5 MHz; ⊠10 MHz;		
	LTE Band71	⊠5 MHz; ⊠10 MHz; ⊠	15 MHz, 🛛 20 MHz		
Characteristics	Description				
Designation of	UMTS Band II 4M15F9W;				
Emissions	UMTS Band V	4M17F9W;			
(Remark: the necessary bandwidth of which is the worst value from the measured occupied	LTE Band 2	1M09G7D;1M10W7D; 2M70G7D;2M70W7D; 4M48G7D;4M49W7D; 8M91G7D;4M90W7D; 13M5G7D;5M07W7D; 17M9G7D;5M20W7D;			
bandwidths for each type of channel	LTE Band 4	17M9G7D;5M20W7D; 1M09G7D;1M09W7D; 2M70G7D;2M69W7D;			



	Unless otherwise agreed in writing, this document is issued by the overleaf, available on request or accessible at http://www.sgs.com/en/ subject to Terms and Conditions for Electronic Documents at http://w Attention is drawn to the limitation of liability, indemnification and juri advised that information contained hereon reflects the Company's fin Client's instructions, if any. The Company's sole responsibility is to transaction from exercising all their rights and obligations under the except in full, without prior written approval of the Company. Any ur appearance of this document is unlawful and offenders may be prosec results shown in this test report refer only to the sample(s) tested and su Attention: To check the authenticity of testing inspection report & or email: 6N.Doccheck@eas.com	Terms-and-Conditions.aspx and, for electronic format documents, www.gos.com/en/Terms-and-Conditions/Terms-e-Document.aspx. sdiction issues defined therein. Any holder of this document is till client and this document does not exonerate parties to a transaction documents. This document cannot be reproduced authorized alteration, forgery or falsification of the content or uted to the fullest extent of the law. Unless otherwise stated the ich samole(s) are retained for 30 days only.
td.	No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057	t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn
	中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057	t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 12 of 29

bandwidth		4M48G7D;4M49W7D;
configuration.)		8M93G7D;4M88W7D;
Ŭ ,		13M5G7D;5M07W7D;
		17M9G7D;5M20W7D;
		1M10G7D;1M09W7D;
	LTE Band 5	2M70G7D;2M70W7D;
	LIE Danu 5	4M47G7D;4M49W7D;
		8M93G7D;4M90W7D;
		1M09G7D;1M09W7D;
	LTE Dand 10	2M70G7D;2M69W7D;
	LTE Band 12	4M47G7D;4M49W7D;
		8M93G7D;4M89W7D;
	LTE Dand 14	4M48G7D;4M49W7D;
	LTE Band 14	8M91G7D;4M86W7D;
		1M09G7D;1M09W7D;
		2M70G7D;2M70W7D;
		4M48G7D;4M49W7D;
	LTE Band 66	8M93G7D;4M88W7D;
		13M4G7D;5M10W7D;
		17M9G7D;5M20W7D;
		4M47G7D;4M48W7D;
	LTE David 71	8M93G7D;4M90W7D;
	LTE Band 71	13M5G7D;5M07W7D;
		17M9G7D;5M12W7D;



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: ZR/2020/9005901 Page: 13 of 29

## 3.8 Test Frequencies

Test Mode	TX / BX	RF Channel		
		Low (L)	Middle (M)	High (H)
WCDMA Band II	ТХ	Channel 9262	Channel 9400	Channel 9538
	IA	1852.4 MHz	1880.0 MHz	1907.6 MHz
	DV	Channel 9662	Channel 9800	Channel 9938
	RX	1932.4 MHz	1960.0 MHz	1987.6 MHz

Test Made	TX / BX	RF Channel			
Test Mode		Low (L)	Middle (M)	High (H)	
WCDMA Band V	ТХ	Channel 4132	Channel 4182	Channel 4233	
	IX	826.4MHz	836.4 MHz	846.6 MHz	
	ΩV	Channel 4357	Channel 4407	Channel 4458	
	RX	871.4 MHz	881.4 MHz	891.6 MHz	

Test Made	Developminist	andwidth TX / RX	RF Channel		
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
		τv	Channel 18607	Channel 18900	Channel 19193
	1.4MHz	ТХ	1850.7 MHz	1880 MHz	1909.3 MHz
	1.4IVI⊓Z	RX	Channel 607	Channel 900	Channel 1193
		ΠΛ	1930.7 MHz	1960 MHz	1989.3 MHz
		ТΧ	Channel 18615	Channel 18900	Channel 19185
			1851.5 MHz	1880 MHz	1908.5 MHz
	3MHz	RX	Channel 615	Channel 900	Channel 1185
		ΠΛ	1931.5 MHz	1960 MHz	1988.5 MHz
		ТΧ	Channel 18625	Channel 18900	Channel 19175
	5MHz —		1852.5 MHz	1880 MHz	1907.5 MHz
		RX	Channel 625	Channel 900	Channel1175
LTE Band 2		ΠΛ	1932.5 MHz	1960 MHz	1987.5 MHz
LIE Dallu Z		ТХ	Channel 18650	Channel 18900	Channel 19150
	10MHz		1855 MHz	1880 MHz	1905 MHz
		RX	Channel 650	Channel 900	Channel 1150
			1935 MHz	1960 MHz	1985 MHz
		ТХ	Channel 18675	Channel 18900	Channel 19125
	15MHz		1857.5 MHz	1880 MHz	1902.5 MHz
	TOIVITIZ	RX	Channel 675	Channel 900	Channel 1125
			1937.5 MHz	1960 MHz	1982.5 MHz
		ТХ	Channel 18700	Channel 18900	Channel 19100
	20MHz		1860 MHz	1880 MHz	1900 MHz
	20101112	RX	Channel 700	Channel 900	Channel 1100
		RX	1940 MHz	1960 MHz	1980 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation on liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this ter report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: (N\_Doccheck@egs.com)



Report No.: ZR/2020/9005901 Page: 14 of 29

Test Mode	e Bandwidth TX / R			RF Channel	
Test Mode	Danuwiuth	TX / RX	Low (L)	Middle (M)	High (H)
		ТΧ	Channel 19957	Channel 20175	Channel 20393
	1.4MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz
	1.4IVI⊓Z	RX	Channel 1975	Channel 2175	Channel 2375
			2112.5 MHz	2132.5MHz	2152.5 MHz
		ТХ	Channel 19965	Channel 20175	Channel 20385
	3MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz
	SIVIEZ	RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
		ТХ	Channel 19975	Channel 20175	Channel 20375
	5MHz -	IX	1712.5 MHz	1732.5 MHz	1752.5 MHz
		RX	Channel 1975	Channel 2175	Channel 2375
LTE Band 4			2112.5 MHz	2132.5MHz	2152.5 MHz
LIE Dallu 4		ТΧ	Channel 20000	Channel 20175	Channel 20350
	10MHz		1715 MHz	1732.5 MHz	1750 MHz
		RX	Channel 2000	Channel 2175	Channel 2350
			2115 MHz	2132.5MHz	2150 MHz
		ТХ	Channel 20025	Channel 20175	Channel 20325
	15MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz
		RX	Channel 2025	Channel 2175	Channel 2325
			2117.5 MHz	2132.5MHz	2147.5 MHz
		ТХ	Channel 20050	Channel 20175	Channel 20300
	20MHz		1720 MHz	1732.5 MHz	1745 MHz
		DV	Channel 2050	Channel 2175	Channel 2300
		RX	2120 MHz	2132.5MHz	2145 MHz

Test Mede	Dandwidth	TX / RX	RF Channel		
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
		ТΧ	Channel 20407	Channel 20525	Channel 20643
	1.4MHz		824.7 MHz	836.5 MHz	848.3 MHz
	1.411112	RX	Channel 2407	Channel 2525	Channel 2643
		ПЛ	869.7 MHz	881.5 MHz	893.3 MHz
		ТХ	Channel 20415	Channel 20525	Channel 20635
	3MHz		825.5 MHz	836.5 MHz	847.5 MHz
	SIVILIZ	RX	Channel 2415	Channel 2525	Channel 2635
LTE Band 5			870.5 MHz	881.5 MHz	892.5 MHz
LTE Danu 5		ТХ	Channel 20425	Channel 20525	Channel 20625
	5MHz		826.5 MHz	836.5 MHz	846.5 MHz
		RX	Channel 2425	Channel 2525	Channel 2625
			871.5 MHz	881.5 MHz	891.5 MHz
		ТХ	Channel 20450	Channel 20525	Channel 20600
	10MHz		829 MHz	836.5 MHz	844 MHz
		RX	Channel 2450	Channel 2525	Channel 2600
		ΠΛ	874 MHz	881.5 MHz	889 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: ZR/2020/9005901 Page: 15 of 29

Test Mode	Bandwidth TX / RX		RF Channel			
Test Mode	Danuwiuth		Low (L)	Middle (M)	High (H)	
		ТХ	Channel 23017	Channel 23095	Channel 23173	
	1.4MHz		699.7 MHz	707.5 MHz	715.3 MHz	
	1.411112	RX	Channel 5017	Channel 5095	Channel 5173	
			729.7 MHz	737.5 MHz	745.3 MHz	
		ТХ	Channel 23025	Channel 23095	Channel 23165	
	3MHz		700.5 MHz	707.5 MHz	714.5 MHz	
		RX	Channel 5025	Channel 5095	Channel 5165	
LTE Band12			730.5 MHz	737.5 MHz	744.5 MHz	
LIE Danuiz		ТХ	Channel 23035	Channel 23095	Channel 23155	
	5MHz	701.5 MHz	707.5 MHz	713.5 MHz		
		SMH2 RX	Channel 5035	Channel 5095	Channel 5155	
			731.5 MHz	737.5 MHz	743.5 MHz	
		ТХ	Channel 23060	Channel 23095	Channel 23130	
	10MHz		704 MHz	707.5 MHz	711 MHz	
		RX	Channel 5060	Channel 5095	Channel 5130	
		ΠΛ	734 MHz	737.5 MHz	741 MHz	

Test Mode	Bandwidth	TX / RX	RF Channel			
Test Would	Danuwiuth		Low (L)	Middle (M)	High (H)	
		τv	Channel 23305	Channel 23330	Channel 23355	
	5MHz	ТХ	790.5 MHz	793 MHz	795.5 MHz	
		RX	Channel 5305	5 Channel 5330 Cha	Channel 5355	
LTE Band 14			760.5 MHz	763 MHz	765.5 MHz	
LIE Danu 14		ТХ	Channel 23330	Channel 23330	Channel 23330	
	10MHz		793MHz	793 MHz	793 MHz	
		PV	Channel 5330	Channel 5330	Channel 5330	
		RX	763MHz	763 MHz	763 MHz	

Test Mede	Dandwidth	TX / RX		RF Channel	
Test Mode	Bandwidth		Low (L)	Middle (M)	High (H)
		ΤХ	Channel 131979	Channel 132322	Channel 132665
	1.4MHz		1710.7 MHz	1745 MHz	1779.3 MHz
	1.4IVITZ	RX	Channel 66443	Channel 66786	Channel 67329
			2110.7 MHz	2145MHz	2199.3 MHz
		ТΧ	Channel 131987	Channel 132322	Channel 132657
	3MHz		1711.5 MHz	1745 MHz	1778.5MHz
	SIVITIZ	RX	Channel 66451	Channel 66786	Channel 67121
LTE Band 66			2111.5 MHz	2145MHz	2198.5MHz
LIE Danu 00		TX	Channel 131997	Channel 132322	Channel 132647
	5MHz		1712.5 MHz	1745 MHz	1777.5 MHz
		RX	Channel 66461	Channel 66786	Channel 67311
			2112.5 MHz	2145MHz	2197.5 MHz
	10141-	ТΧ	Channel 132022	Channel 132322	Channel 132622
		I A	1715 MHz	1745 MHz	1775 MHz
	10MHz	RX	Channel 66486	Channel 66786	Channel 67286
		ΠΛ	2115 MHz	2145MHz	2195 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is of the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@sgs.com



Report No.: ZR/2020/9005901 Page: 16 of 29

		TV	Channel 132047	Channel 132322	Channel 132597
		ТХ	1717.5 MHz	1745 MHz	1772.5 MHz
	15MHz	RX	Channel 66511	Channel 66786	Channel 67261
			2117.5 MHz	2145MHz	2192.5 MHz
	20MHz	20MHz TX RX	Channel 132072	Channel 132322	Channel 132572
			1720 MHz	1745 MHz	1770 MHz
			Channel 66536	Channel 66786	Channel 67236
			2120 MHz	2145MHz	2190 MHz

Test Made	Test Mode TX / RX			RF Channel	
Test Wode			Low (L)	Middle (M)	High (H)
		тх	Channel 133147	Channel 133297	Channel 133447
	5MHz		665.5 MHz	680.5 MHz	695.5 MHz
		RX	Channel 68611	Channel 68761	Channel 68911
			619.5 MHz	634.5 MHz	649.5 MHz
		ту	Channel 133172	Channel 133297	Channel 133422
	10MHz	ТΧ	668 MHz	680.5 MHz	693 MHz
		RX	Channel 68636	Channel 68761	Channel 68886
LTE Band 71			622 MHz	634.5 MHz	647 MHz
LTE Banu / T		тх	Channel 133197	Channel 133297	Channel 133397
	15MHz		670.5 MHz	680.5 MHz	690.5 MHz
	TOWITZ	RX	Channel 68661	Channel 68761	Channel 68861
			624.5 MHz	634.5 MHz	644.5 MHz
		тх	Channel 133222	Channel 133297	Channel 133372
	20MHz		673 MHz	680.5 MHz	688 MHz
		RX	Channel 68686	Channel 68761	Channel 68836
			627 MHz	634.5 MHz	642 MHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN Doccheck@ess.com



Report No.: ZR/2020/9005901 Page: 17 of 29

#### **Description of Tests** 4

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

**Remark: Reference test setup 1** 

### 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 ; C63.26 (2015) Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd)EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2

中国·深圳·科技园中区M-10栋一号厂房

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### **Remark: Reference test setup 1**



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation or liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exconserate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, <a href="http://www.set.ast.exertificate.com">http://www.set.ast.exertificate.com</a>. Provide the state on the set of the set of the set of the laws. The set of the laws and the set of the laws and the set of the laws and the set of the set of the set of the set of the laws. Unless otherwise stated the results shown in this test report refer only to the sample(s) test end such sample(s) test end No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sasaroup.com.cn sgs.china@sgs.com

邮编: 518057 t (86-755) 26012053 f (86-755) 26710594

Member of the SGS Group (SGS SA)



Report No.: ZR/2020/9005901 Page: 18 of 29

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within

1 - 5% of the 99% occupied bandwidth observed in Step 7

### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

#### Remark: Reference test setup 1

Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: ON pocchaet@ess.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 19 of 29

## 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### Remark: Reference test setup 1

Test Settings

- Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency (separated into at least two plots per channel)
- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings

## 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.1

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: ON Doccheck@egs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 tk (86–755) 26012053 fk (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 tk (86–755) 26012053 fk (86–755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 20 of 29

#### Test Settings

- The signal analyzer's CCDF measurement profile is enabled
- Frequency = carrier center frequency
- Measurement BW > Emission bandwidth of signal
- The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

## 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8) Calculate power in dBm by the following formula:

ERP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBd)

#### Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + 10log10(Power [Watts]).

#### Above 1GHz test procedure as below:

1) Different between above is the test site, change from Semi- Anechoic

Chamber to fully Anechoic Chamber

2) Calculate power in dBm by the following formula:

EIRP(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dBi)





Report No.: ZR/2020/9005901 Page: 21 of 29

EIRP=ERP+2.15dB

#### Where:

Pg is the generator output power into the substitution antenna.

- 3. Test the EUT in the lowest channel, the middle channel the Highest channel
- 4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5. Repeat above procedures until all frequencies measured was complete

#### Remark: Reference test setup 3

## 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; ANSI/C63.26 (2015)

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30 ℃ to +50 ℃ in 10 ℃ increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### Remark: Reference test setup 4



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-enD-countert.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test retained for 30 days only. Attention. To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,


No.1Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 tt (86-755) 26012053 ft (86-755) 26710594 www.sgsgroup.com.cn 中国・深圳・科技园中区M-10栋一号厂房 邮编: 518057 tt (86-755) 26012053 ft (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 22 of 29

## 4.9 Test Setups

### 4.9.1 Test Setup 1

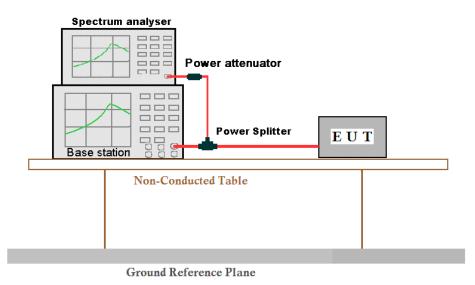

## 4.9.2 Test Setup 2

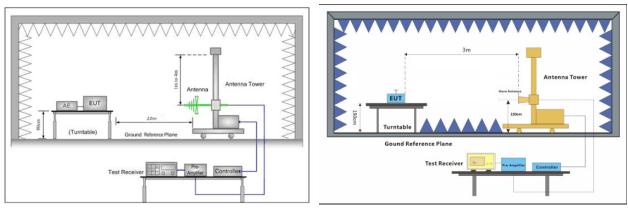


Figure 1. 30MHz to 1GHz

Figure 2. above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days on). Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN. Doccheck@ags.com

中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 2601205 f (86-755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 23 of 29

### 4.9.3 Test Setup 3

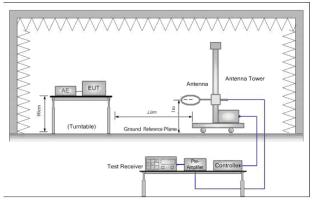


Figure 1. Below 30MHz


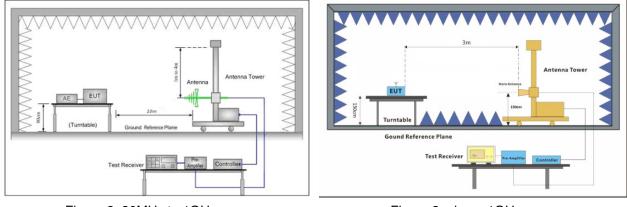


Figure 2. 30MHz to 1GHz

#### Figure 3. above 1GHz

#### 4.9.4 Test Setup 4

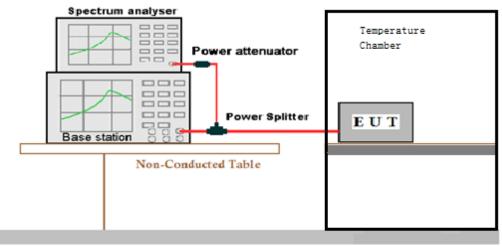

Ground Reference Plane



No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86–755) 26012053 f (86–755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86–755) 26012053 f (86–755) 26710594 sgs.china@sgs.com



Report No.: ZR/2020/9005901 Page: 24 of 29

## 4.10 Test Conditions

el )
əl )
el )
el )
el )
el)
•



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@esg.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057
t (86-755) 26012053 f (86-755) 26710594

www.sgsgroup.com.cn

neg : \$\sigma\$. with \$\sigma\$. Add approxed is the sigma\$. Science \$\sigma\$ to \$\sigma\$. Science \$\sigma\$ to



Report No.: ZR/2020/9005901 Page: 25 of 29

(if	Test Setup	Test Setup 1
requi	red) RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
	Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2
	Test Environment	Ambient Climate & Rated Voltage
Band Edges	Test Setup	Test Setup 1
Compliance	RF Channels (TX)	L, H (L= low channel, H= high channel )
	Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2
	Test Environment	Ambient Climate & Rated Voltage
Spurious Emissior	Test Setup	Test Setup 1
Antenna Terminal		L,M, H (L= low channel, M= middle channel, H= high channel )
	Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2
	Test Environment	Ambient Climate & Rated Voltage
	Test Setup	Test Setup 2
Field Strength of Spurious Radiation	n Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2; Remark: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
	Test Environment	<ul> <li>(1) -30 °C to +50 °C with step 10 °C at Rated Voltage;</li> <li>(2) VL, VN and VH of Rated Voltage at Ambient Climate.</li> </ul>
	Test Setup	Test Setup 4
Frequency Stabilit	Y RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
	Test Mode	UMTS/TM1;LTE/TM1;LTE/TM2



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoncerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itset retained for 30 days only. Attention: To check the authenticity of testing Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN\_Doccheck@gss.com



Report No.: ZR/2020/9005901 Page: 26 of 29

## 5 Main Test Instruments

RE in Chamber						
Test Equipment	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date	
rest Equipment	Manufacturer		No.	(yyyy-mm- dd)	(yyyy-mm- dd)	
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12	
Spectrum Analyzer (20Hz-43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2020/4/16	2021/4/15	
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26	
Horn Antenna (800MHz- 18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/413	2021/412	
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2020/10/17	2021/10/16	
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2020/7/14	2021/7/14	
Low Noise Amplifier (100MHz-18GHz)	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2020/7/14	2021/7/14	
Pre-Amplifier (0.1- 26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	EMC2063	2020/9/20	2021/9/19	
Pre-amplifier (26-40GHz)	Compliance Directions Systems Inc.	PAP-2640- 50	SEM005-08	2020/4/16	2021/4/15	
Band filter	N/A	N/A	N/A	N/A	N/A	
Measurement Software	AUDIX	e3 V8.2014-6- 27	N/A	N/A	N/A	
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11	
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15	
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/1/13	2021/1/2	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond



Report No.: ZR/2020/9005901 Page: 27 of 29

RF conducted test						
Test Equipment	Manufacturer	Model No.	Inventory	Cal. date	Cal.Due date	
			No.	(yyyy-mm- dd)	(yyyy-mm- dd)	
Dual Output Mobile Communication DC Source	Agilent Technologies Inc	66311B	W009-09	2020/10/22	2021/10/21	
Signal Analyzer	Rohde & Schwarz	FSV	W005-02	2020/4/16	2021/4/15	
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11	
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A	
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/10/22	2021/10/21	
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	HTC-1	W006-17	2020/10/22	2021/10/21	
Temperature Chamber	GIANT FORCE	ICT-150- 40-CP-AR	W027-03	2020/10/22	2021/10/21	
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15	
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/10/22	2021/10/21	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: ON Doccheck@ass.com



Report No.: ZR/2020/9005901 Page: 28 of 29

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm- dd)	Cal. Due date (yyyy- mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Wideband Radio CommunicationTeste	Anristu	MT8821C	6201462742	2020/4/16	2021/4/15
Wideband Radio CommunicationTester	Rohde & Schwarz	CMW500	W005-02	2020/1/3	2021/1/2
EXA Signal Analyzer (10Hz- 26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2020/3/13	2021/3/12
Spectrum Analyzer (20Hz- 43GHz)	Rohde & Schwarz	FSU43	SEM004-08	2020/4/16	2021/4/15
BiConiLog Antenna (26- 3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26
Horn Antenna (800MHz-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2020/10/17	2023/10/16
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2020/7/25	2021/7/24
Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP- 0126	SEM004-11	2020/7/25	2021/7/24
Pre-amplifier (26-40GHz)	Compliance Directions Systems Inc.	PAP- 2640-50	SEM005-08	2020/4/16	2021/4/15
Band filter	N/A	N/A	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11
Tunable Notch Filter WRCD1700/2000-0.2/40-10EEK	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Tunable Notch Filter WRCD800/960-0.2/40-10EEK	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHK1.2/15G-10SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHKX10-2700-3000-18000-40SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
HighPass Filter WHKX7.0/26.5G-6SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Band Reject Filter WRCG 824/849-814/859-40/8SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Band Reject Filter WRCG 1850/1910-1835/1925- 40/8SS	WAINRIGHT Instruments GMBH	N/A	N/A	N/A	N/A
Measurement Software	AUDIX	e3 V8.2014- 6-27	N/A	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation or liability, indemnification and urisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: (N.Doccheck@ess.com)



Report No.: ZR/2020/9005901 Page: 29 of 29

## 6 Measurement Uncertainty

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item	Extended Uncertainty	Data	
Transmit Output Power Data	Power [dBm]	U =±0.37 dB	
Bandwidth	Magnitude [%]	U =± 0.2%	
Band Edge Compliance	Disturbance Power [dBm]	U = ±2.0 dB	
Spurious Emissions, Conducted	Disturbance Power [dBm]	$U = \pm 2.0 \text{ dB}$	
		For 3 m Chamber:	
		U = ±4.5 dB (30 MHz to 1GHz)	
Field Strength of Spurious	ERP[dBm]/EIRP [dBm]	$U = \pm 3.3 \text{ dB}$ (above 1 GHz)	
Radiation	בהרנטטווון/בוהר נטטווון	For 10 m Chamber:	
		U = ±4.5 dB (30 MHz to 1GHz)	
		$U = \pm 3.2 \text{ dB}$ (above 1 GHz)	
Frequency Stability	Frequency Accuracy [ppm]	U = ±0.24 ppm	

## 7 Appendixes

Appendix A	Photographs of Set-Up for ZR202090059
Appendix B.1	WCDMA Band II & V
Appendix B.2	LTE Band 2
Appendix B.3	LTE Band 4
Appendix B.4	LTE Band 5
Appendix B.5	LTE Band 12
Appendix B.6	LTE Band 14
Appendix B.7	LTE Band 66
Appendix B.8	LTE Band 71

The End



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or consil: UN Docoheck/Mbss.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn 中国·深圳•科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com