



TEST REPORT

Test Report No. : UL-RPT-RP11456397JD13C

Manufacturer : Neeo AG
Model No. : 6336-REMOTE
FCC ID : 2AKK7-RM633601
Technology : Digital Transmission System (IEEE 802.15.4)
Test Standard(s) : FCC Parts 15.209(a) & 15.247

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. This sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0.

Date of Issue: 23 March 2017

Checked by:

Ian Watch
Senior Engineer, Radio Laboratory

Company Signatory:

Sarah Williams
Senior Engineer, Radio Laboratory
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its terms
of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information..... 4

2. Summary of Testing..... 5

 2.1. General Information 5

 2.2. Summary of Test Results 5

 2.3. Methods and Procedures 5

 2.4. Deviations from the Test Specification 5

3. Equipment Under Test (EUT) 6

 3.1. Identification of Equipment Under Test (EUT) 6

 3.2. Description of EUT 6

 3.3. Modifications Incorporated in the EUT 6

 3.4. Additional Information Related to Testing 7

 3.5. Support Equipment 7

4. Operation and Monitoring of the EUT during Testing 8

 4.1. Operating Modes 8

 4.2. Configuration and Peripherals 8

5. Measurements, Examinations and Derived Results 9

 5.1. General Comments 9

 5.2. Test Results 10

 5.2.1. Transmitter Minimum 6 dB Bandwidth 10

 5.2.2. Transmitter Power Spectral Density 13

 5.2.3. Transmitter Maximum Peak Output Power 16

 5.2.4. Transmitter Radiated Emissions 19

 5.2.5. Transmitter Band Edge Radiated Emissions 27

6. Measurement Uncertainty31

7. Report Revision History32

1. Customer Information








Company Name:	Neeo AG
Address:	Ritterquai 8 4500 Solothurn Switzerland

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) – Section 15.209
Site Registration:	FCC: 209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	20 December 2016 to 22 February 2017

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.247(a)(2)	Transmitter Minimum 6 dB Bandwidth	
Part 15.247(e)	Transmitter Power Spectral Density	
Part 15.247(b)(3)	Transmitter Maximum (Average) Output Power	
Part 15.247(d) & 15.209(a)	Transmitter Radiated Emissions	
Part 15.247(d) & 15.209(a)	Transmitter Band Edge Radiated Emissions	
Key to Results		
 = Complied  = Did not comply		

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Neoo
Model Name or Number:	6336-REMOTE
Test Sample Serial Number:	Not marked or stated (<i>Radiated sample</i>)
Hardware Version:	Hardware Rev. 10
Software Version:	0.18.5
FCC ID:	2AKK7-RM633601

Brand Name:	Neoo
Model Name or Number:	6336-REMOTE
Test Sample Serial Number:	Not marked or stated (<i>Conducted sample with RF port</i>)
Hardware Version:	Hardware Rev. 10
Software Version:	0.18.5
FCC ID:	2AKK7-RM633601

3.2. Description of EUT

The Equipment Under Test was a Thinking Remote for home automation. It contains IEEE 802.15.4 and WLAN transceivers. It is powered from a 3.7 Volt rechargeable battery.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	IEEE 802.15.4 (Digital Transmission System)		
Type of Unit:	Transceiver		
Modulation:	O-QPSK		
Data Rate:	250 kb/s		
Power Supply Requirement(s):	Nominal	3.7 V	
Maximum Conducted Output Power:	12.0 dBm		
Antenna Gain:	-3.3 dBi		
Transmit Frequency Range:	2405 MHz to 2480 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	11	2405
	Middle	18	2440
	Top	26	2480

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop PC
Brand Name:	Dell
Model Name or Number:	E5400
Serial Number:	01160

Description:	USB to TTL Serial Cable (3.3V) 1.8m
Brand Name:	FTDI Chip
Model Name or Number:	TTL-232RG
Serial Number:	Not marked or stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Continuously transmitting (100% duty cycle) at maximum power on the bottom, middle and top channels as required.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT was powered by a fully charged 3.7 VDC internal battery.
- A laptop PC with an open source terminal application Tera Term V4.83 was used to place the EUT into test mode. The procedure to set up and control the EUT was supplied by the customer in a document titled 'userManual-Radio.pdf' dated 12/12/2016.
- Radiated spurious emissions were performed with the EUT in the worst case orientation/position. All ports were terminated with suitable terminations.
- The EUT radiated sample was used for radiated spurious emissions tests.
- The EUT conducted sample was used for all other tests.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter Minimum 6 dB Bandwidth

Test Summary:

Test Engineer:	David Doyle	Test Date:	20 December 2016
Test Sample Serial Number:	Not marked or stated <i>(Conducted sample with RF port)</i>		

FCC Reference:	Part 15.247(a)(2)
Test Method Used:	FCC KDB 558074 Section 8.2


Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	40

Note(s):

1. 6 dB DTS bandwidth tests were performed using a signal analyser in accordance with FCC KDB 558074 Section 8.2 measurement procedure. The signal analyser resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The DTS bandwidth was measured at 6 dB down from the peak of the signal.
2. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.




Test setup:

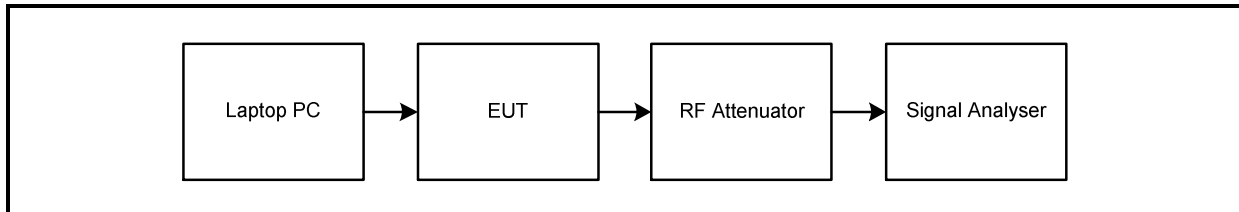

Transmitter Minimum 6 dB Bandwidth (continued)

Results:

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	1461.600	≥500	961.600	Complied
Middle	1555.700	≥500	1055.700	Complied
Top	1557.400	≥500	1057.400	Complied

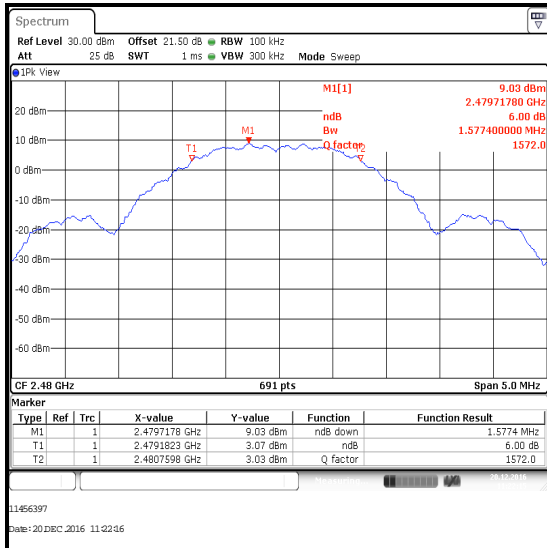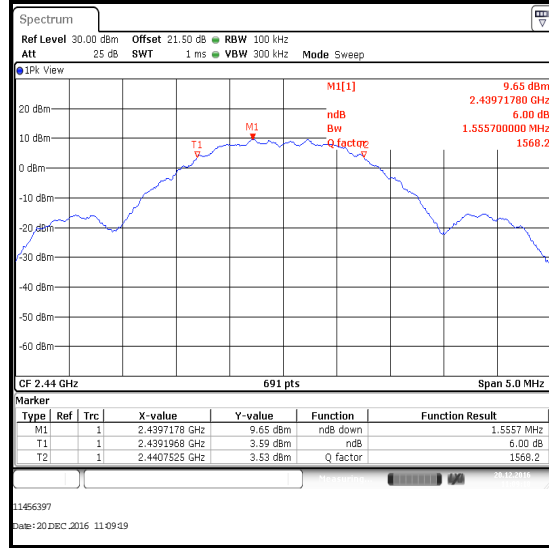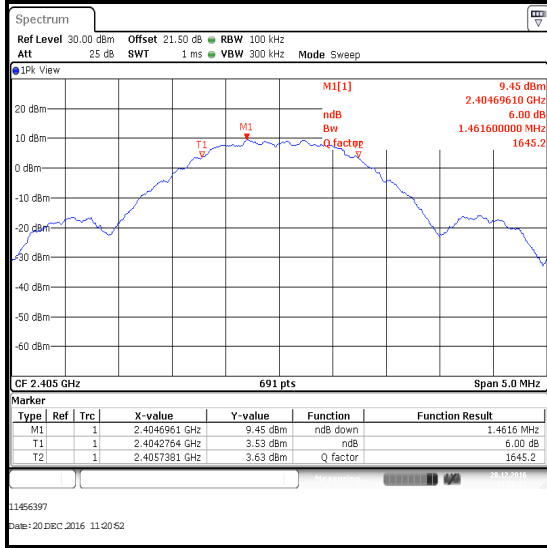

Transmitter Minimum 6 dB Bandwidth (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	02 Apr 2017	12
M1835	Signal Analyser	Rohde & Schwarz	FSV30	103050	26 Feb 2017	12
A2526	Attenuator	AtlanTecRF	AN18W5-20	832828#1	Calibrated before use	-
M260	Signal Generator	Rohde & Schwarz	SMP02	829076/008	09 May 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24

5.2.2. Transmitter Power Spectral Density**Test Summary:**

Test Engineer:	David Doyle	Test Date:	20 December 2016
Test Sample Serial Number:	Not marked or stated <i>(Conducted sample with RF port)</i>		


FCC Reference:	Part 15.247(e)
Test Method Used:	FCC KDB 558074 Section 10.2

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	40

Note(s):


1. Transmitter Power Spectral Density tests in all bands were performed using a signal analyser in accordance with FCC KDB 558074 Section 10.2.
2. The signal analyser resolution bandwidth was set to 10 kHz and video bandwidth of 30 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 1.5 times the measured DTS bandwidth. A marker was placed at the peak of the signal and the results recorded in the table below.
3. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the signal analyser to compensate for the loss of the attenuator and RF cable.

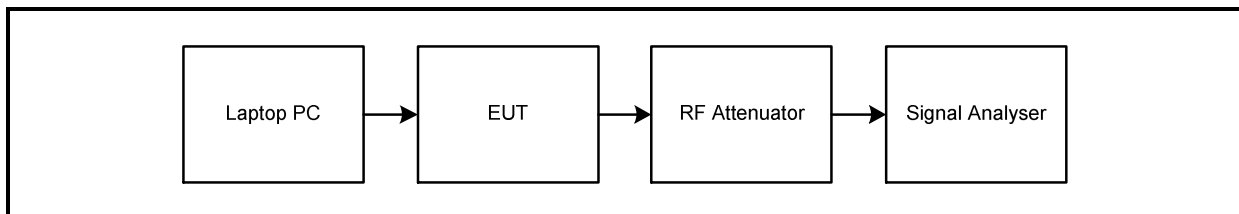Test setup:


Transmitter Power Spectral Density (continued)

Results:


Channel	Output Power (dBm / 10 kHz)	Limit (dBm / 3 kHz)	Margin (dB)	Result
Bottom	3.7	8.0	4.3	Complied
Middle	3.5	8.0	4.5	Complied
Top	2.8	8.0	5.2	Complied

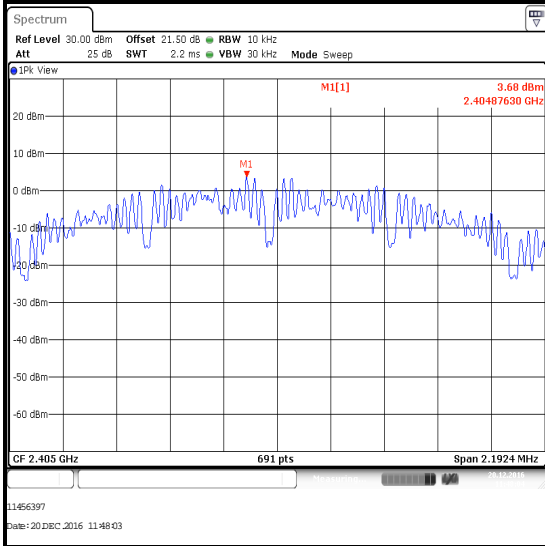

Bottom Channel

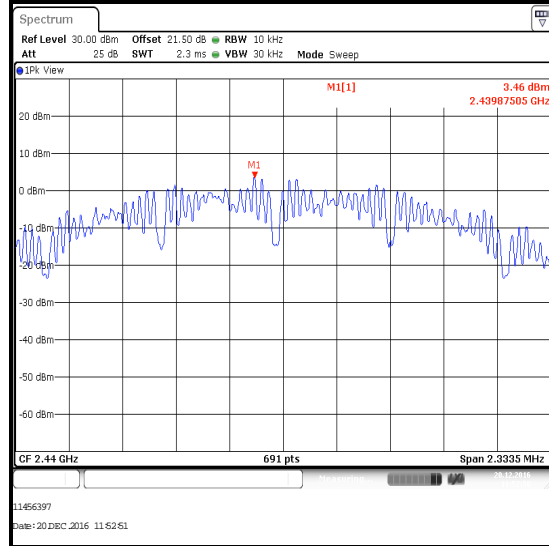

Middle Channel

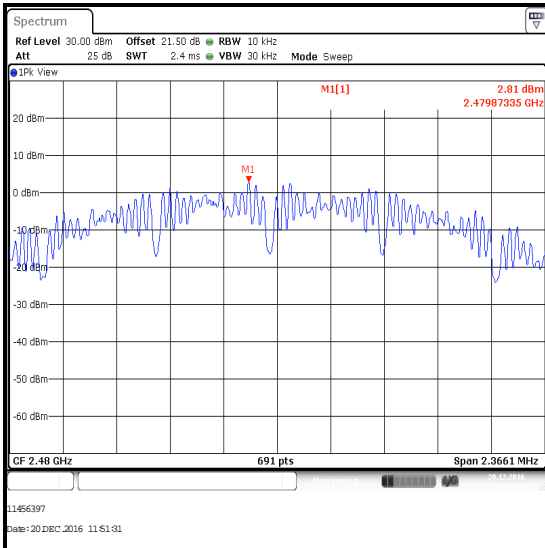

Top Channel

Transmitter Power Spectral Density (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	02 Apr 2017	12
M1835	Signal Analyser	Rohde & Schwarz	FSV30	103050	26 Feb 2017	12
A2526	Attenuator	AtlanTecRF	AN18W5-20	832828#1	Calibrated before use	-
M260	Signal Generator	Rohde & Schwarz	SMP02	829076/008	09 May 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24

5.2.3. Transmitter Maximum Peak Output Power**Test Summary:**

Test Engineer:	David Doyle	Test Date:	20 December 2016
Test Sample Serial Number:	Not marked or stated (<i>Conducted sample with RF port</i>)		


FCC Reference:	Part 15.247(b)(3)
Test Method Used:	FCC KDB 558074 Section 9.1.1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	40

Note(s):

1. Conducted power tests were performed using a signal analyser in accordance with FCC KDB 558074 Section 9.1.1 with the RBW > *DTS bandwidth* procedure.
2. The signal analyser resolution bandwidth was set to 3 MHz and video bandwidth of 10 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 10 MHz. A marker was placed at the peak of the signal and the results recorded in the table below.
3. The signal analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the spectrum analyser to compensate for the loss of the attenuator and RF cable.
4. The conducted power was added to the declared antenna gain to obtain the EIRP.

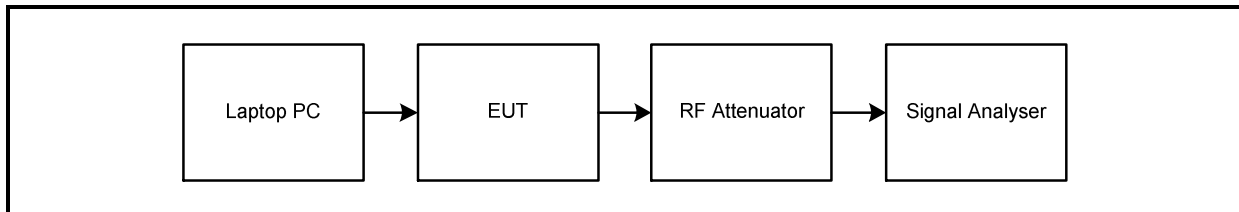
Test setup:

Transmitter Maximum Peak Output Power (continued)**Results:**


Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	11.9	30.0	18.1	Complied
Middle	12.0	30.0	18.0	Complied
Top	11.7	30.0	18.3	Complied

Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)	Result
Bottom	11.9	-3.3	8.6	36.0	27.4	Complied
Middle	12.0	-3.3	8.7	36.0	27.3	Complied
Top	11.7	-3.3	8.4	36.0	27.6	Complied


Transmitter Maximum Peak Output Power (continued)

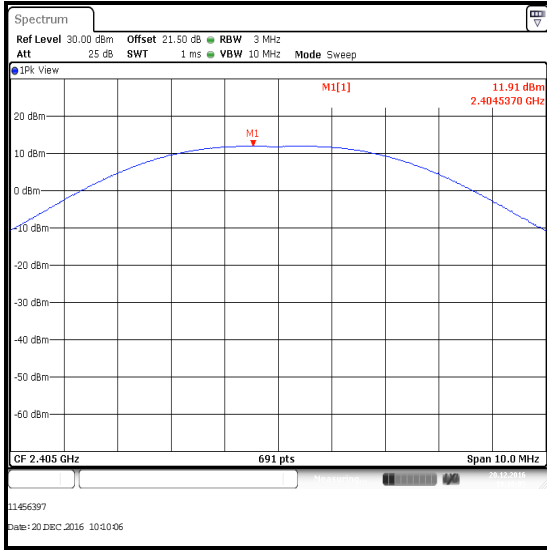

Bottom Channel

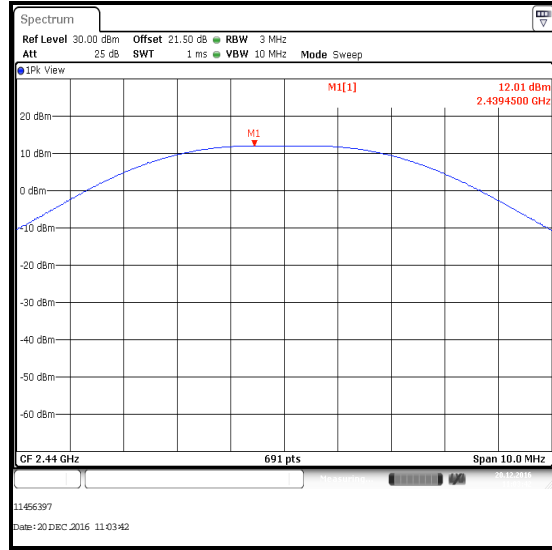

Middle Channel

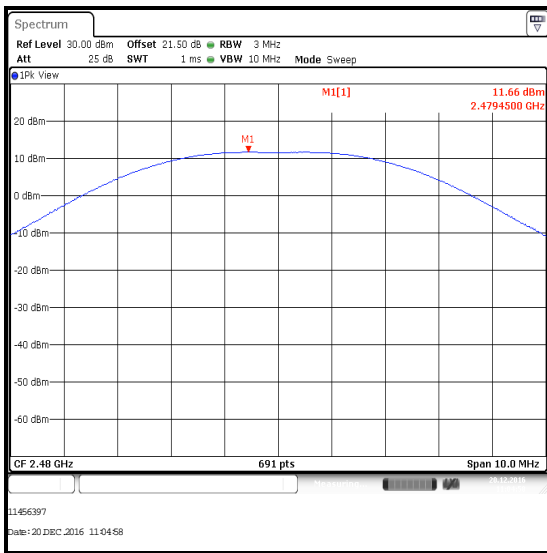

Top Channel

Test Equipment Used:

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1659	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	02 Apr 2017	12
M1835	Signal Analyser	Rohde & Schwarz	FSV30	103050	26 Feb 2017	12
A2526	Attenuator	AtlanTecRF	AN18W5-20	832828#1	Calibrated before use	-
M260	Signal Generator	Rohde & Schwarz	SMP02	829076/008	09 May 2017	12
M199	Power Meter	Rohde & Schwarz	NRVS	827023/075	11 Apr 2018	24
M1267	Power Sensor	Rohde & Schwarz	NRV-Z52	100155	15 Apr 2018	24

5.2.4. Transmitter Radiated Emissions**Test Summary:**

Test Engineer:	David Doyle	Test Date:	18 January 2017
Test Sample Serial Number:	Not marked or stated (<i>Radiated sample</i>)		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Sections 6.3 and 6.5
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

Temperature (°C):	22
Relative Humidity (%):	30


Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
3. All emissions shown on the pre-scan plots were investigated and found to be ambient, or >20 dB below the applicable limit or below the measurement system noise floor. Therefore the highest peak noise floor reading of the measuring receiver was recorded in the table below
4. Measurements below 1 GHz were performed in a semi-anechoic chamber (Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.


Transmitter Radiated Emissions (continued)

Test setup for radiated measurements:

Semi-anechoic chamber

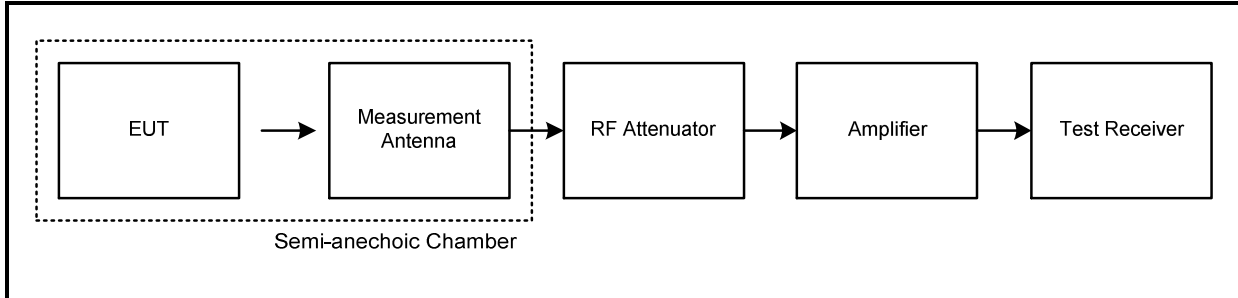


Anechoic chamber

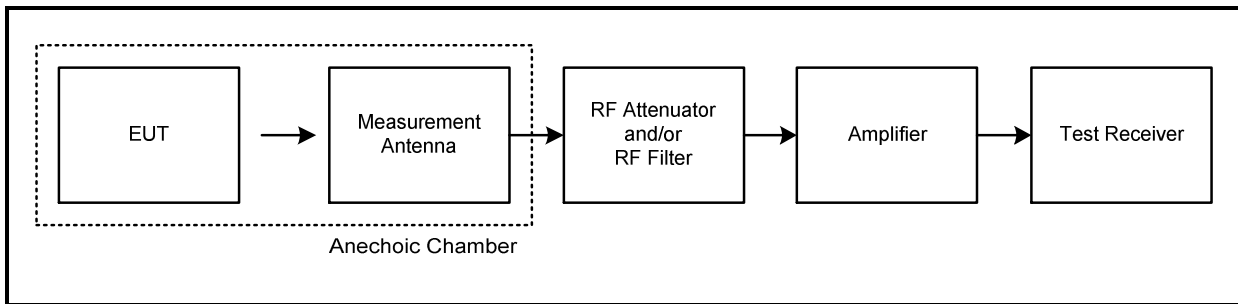

Transmitter Radiated Emissions (continued)**Results: Middle Channel**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
967.595	Vertical	30.6	54.0	23.4	Complied

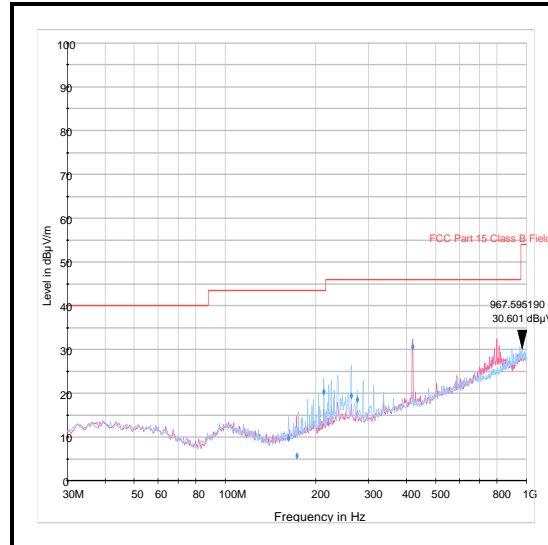**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M2014	Thermohygrometer	Testo	608-H1	45046246	10 Jun 2017	12
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	07 Dec 2017	12
M1273	Test Receiver	Rohde & Schwarz	ESIB26	100275	11 Apr 2017	12
A2959	Antenna	Schwarzbeck	VULB 9163	9163-967	08 Sep 2017	12
G0543	Amplifier	Sonoma	310N	230801	09 Jun 2017	6
A1834	Attenuator	Hewlett Packard	8491B	10444	30 Mar 2017	12

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	David Doyle	Test Dates:	12 January 2017 & 16 January 2017
Test Sample Serial Number:	Not marked or stated (<i>Radiated sample</i>)		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	FCC KDB 558074 Sections 11 & 12 referencing ANSI C63.10 Sections 6.3 and 6.6
Frequency Range	1 GHz to 25 GHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	33 to 34

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. The emission shown on the 1 GHz to 3 GHz plot is the EUT fundamental.
4. Measurements above 1 GHz were performed in a fully anechoic chamber (Asset Number K0002) at a distance of 3 metres. The EUT was placed at a height of 1.5 metres above the test chamber floor in the centre of the chamber turntable. All measurement antennas were placed at a fixed height of 1.5 metres above the test chamber floor, in line with the EUT. The EUT was positioned in the X, Y and Z planes to maximise the emission levels.
5. Pre-scans were performed and markers placed on the highest measured levels the test receiver was set up as followed: a RBW set to 1 MHz, the VBW set to 3, with the sweep time set to auto couple. Peak and average measurements were performed with appropriate detectors during the pre-scan measurements.
6. *Emissions in restricted bands: In accordance with C63.10 Section 6.6.4.3, Note 1, where the peak detected amplitude was shown to comply with the average limit, an average measurement was not performed.
7. ** -20 dBc limit applies in non-restricted bands as the conducted output power measurements were performed using a peak detector.
8. The reference level for the emission in the non-restricted band was established by following KDB 558074 Section 11.2 procedure.

Transmitter Radiated Emissions (continued)**Results: Peak / Bottom Channel**

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1050.565	Horizontal	53.2	54.0*	0.8	Complied
4810.671	Horizontal	42.5	54.0*	11.5	Complied
9621.871	Horizontal	55.5	74.8**	19.3	Complied
12027.343	Horizontal	56.6	74.0	17.4	Complied
19243.742	Vertical	58.2	74.0	15.8	Complied

Results: Average / Bottom Channel

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
12027.129	Horizontal	50.9	54.0	3.1	Complied
19243.600	Vertical	49.9	54.0	4.1	Complied

Results: Peak / Middle Channel

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1034.335	Horizontal	53.5	54.0*	0.5	Complied
4880.757	Horizontal	42.9	54.0*	11.1	Complied
9761.886	Horizontal	56.0	74.8**	18.8	Complied
12197.371	Horizontal	56.6	74.0	17.4	Complied
19516.171	Vertical	55.0	74.0	19.0	Complied





Results: Average / Middle Channel

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
12197.429	Horizontal	50.9	54.0	3.1	Complied
19515.943	Vertical	46.9	54.0	7.1	Complied




Results: Peak / Top Channel

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1050.550	Horizontal	53.7	54.0*	0.3	Complied
4960.900	Horizontal	45.8	54.0*	8.2	Complied
9917.857	Horizontal	52.2	74.8**	22.6	Complied
12402.314	Horizontal	53.0	54.0*	1.0	Complied
19836.028	Vertical	53.1	54.0*	0.9	Complied

Transmitter Radiated Emissions (continued)

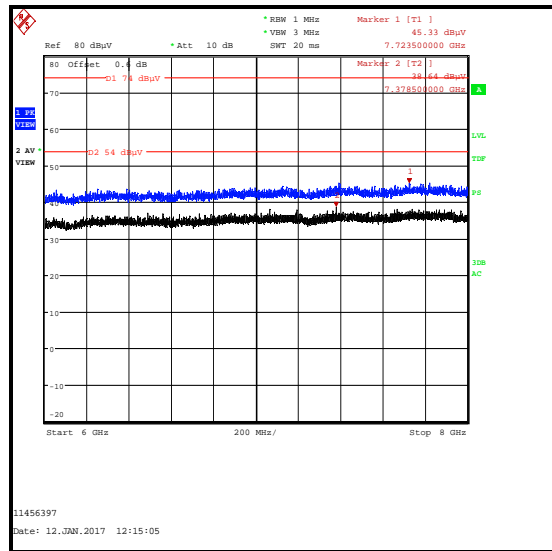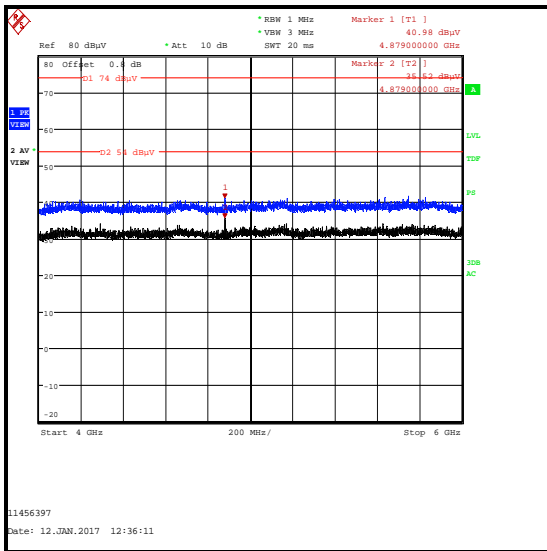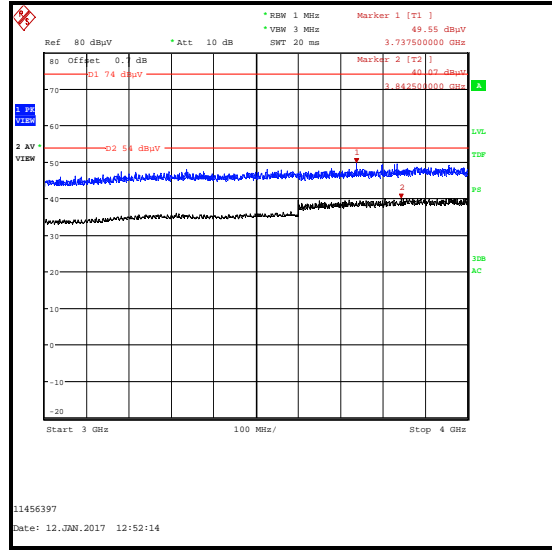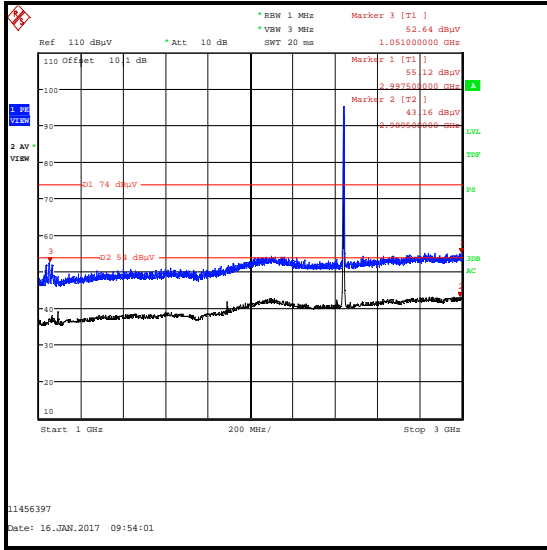

Transmitter Radiated Emissions (continued)

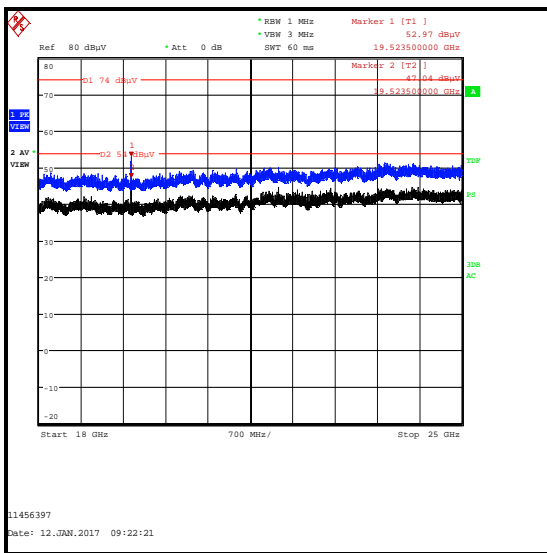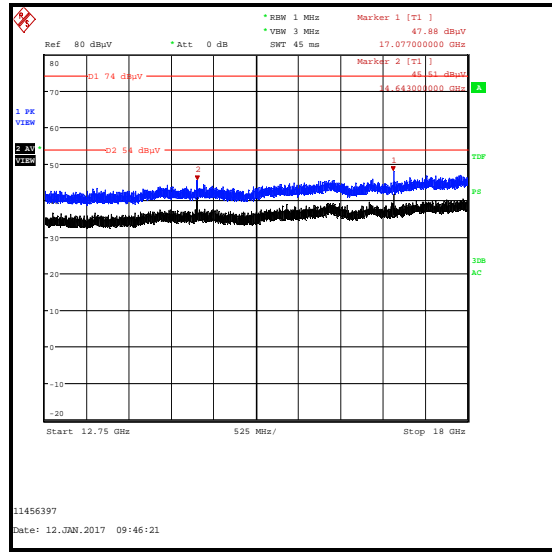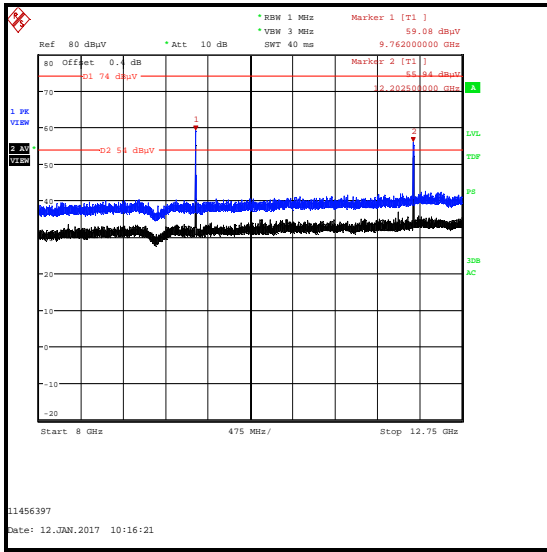

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Transmitter Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	16 Nov 2017	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	21 Mar 2017	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	09 Nov 2017	12
A1818	Antenna	EMCO	3115	00075692	08 Nov 2017	12
A253	Antenna	Flann Microwave	12240-20	128	08 Nov 2017	12
A254	Antenna	Flann Microwave	14240-20	139	08 Nov 2017	12
A255	Antenna	Flann Microwave	16240-20	519	08 Nov 2017	12
A256	Antenna	Flann Microwave	18240-20	400	08 Nov 2017	12
A436	Antenna	Flann Microwave	20240-20	330	07 Nov 2017	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	26 Apr 2017	12
A1975	High Pass Filter	AtlanTecRF	AFH-03000	090424010	26 Apr 2017	12

5.2.5. Transmitter Band Edge Radiated Emissions**Test Summary:**

Test Engineer:	David Doyle	Test Dates:	16 January 2017 & 22 February 2017
Test Sample Serial Number:	Not marked or stated (<i>Radiated sample</i>)		

FCC Reference:	Parts 15.247(d) & 15.209(a)
Test Method Used:	ANSI C63.10 Section 6.10.4, 6.10.5 / KDB 558074 Section 11.1 and Section 12.2.5.1

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	34 to 36

Note(s):

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The maximum peak conducted output power was previously measured. In accordance with FCC KDB 558074 Section 11.1(a), the lower band edge measurement was performed with a peak detector and the -20 dBc limit applied.
3. As the lower band edge is adjacent to a non-restricted band, only peak measurements are required. In accordance with FCC KDB 558074 Section 11.1, the test method in Section 11.3 was followed. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent non-restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
4. As the upper band edge is adjacent to a restricted band, both peak and average measurements were recorded by placing a marker at the edge of the band. The test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. Peak and average measurements were performed with appropriate detectors. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
5. There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with appropriate detectors. Markers were placed on the highest point on each trace.
6. *In accordance with ANSI C63.10 Section 6.6.4.3, Note 1, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.

Transmitter Band Edge Radiated Emissions (continued)**Results: Lower Band Edge**

Frequency (MHz)	Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
2400.000	50.0	73.2	23.2	Complied

Results: Upper Band Edge / Peak

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.500	63.2	74.0	10.8	Complied


Results: Upper Band Edge / Average

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2483.500	51.8	54.0	2.2	Complied


Results: 2310 to 2390 MHz Restricted Band

Frequency (MHz)	Peak Level (dB μ V/m)	Average Limit (dB μ V/m)	Margin (dB)	Result
2372.821	52.8	54.0*	1.2	Complied


Transmitter Band Edge Radiated Emissions (continued)

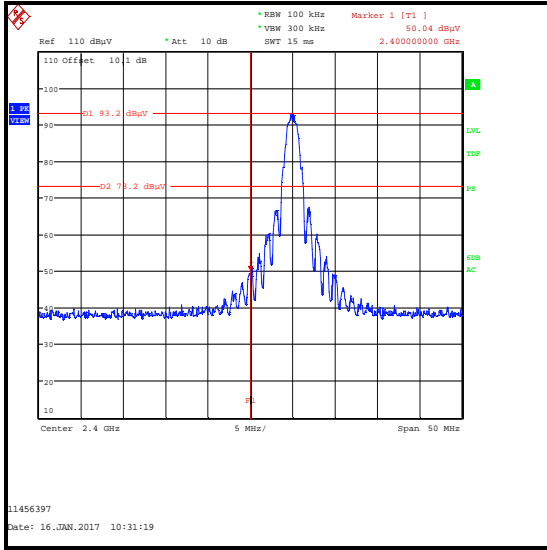


Lower Band Edge Peak Measurement

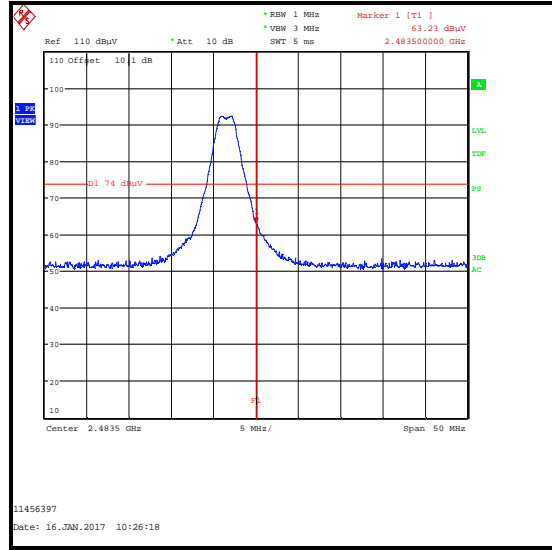

Upper Band Edge Peak Measurement

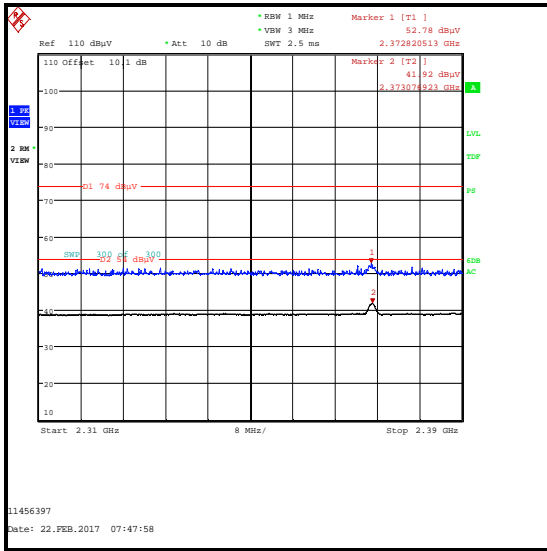

2310 MHz to 2390 MHz Restricted Band

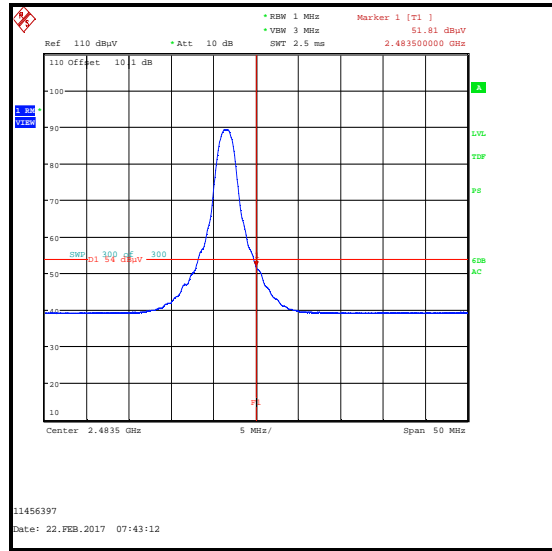

Upper Band Edge Average Measurement

Transmitter Band Edge Radiated Emissions (continued)**Test Equipment Used:**

Asset No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1656	Thermohygrometer	JM Handelspunkt	30.5015.13	Not stated	02 Apr 2017	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	16 Nov 2017	12
M1886	Test Receiver	Rohde & Schwarz	ESU26	100554	21 Mar 2017	12
A1534	Pre Amplifier	Hewlett Packard	8449B	3008A00405	09 Nov 2017	12
A1818	Antenna	EMCO	3115	00075692	08 Nov 2017	12
A1396	Attenuator	Huber & Suhner	6810.17.B	757987	26 Apr 2017	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document "approximately" is interpreted as meaning "effectively" or "for most practical purposes".

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
Minimum 6 dB Bandwidth	2.4 GHz to 2.4835 GHz	95%	±4.59 %
Spectral Power Density	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Conducted Maximum Output Power	2.4 GHz to 2.4835 GHz	95%	±1.13 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	95%	±5.65 dB
Radiated Spurious Emissions	1 GHz to 25 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version

--- END OF REPORT ---