

TEST REPORT



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2021-02086
Page (1) / (79) Pages

1. Client

- Name : WIZnet Co., Ltd
- Address : 5F Humax Village, 216 Hwangsaeul-ro, Bundang-Gu, Seongnam-si, Gyeonggi-Do, South Korea
- Date of Receipt : 2020-09-24

2. Manufacturer

- Name : WIZnet Co., Ltd
- Address : 5F Humax Village, 216 Hwangsaeul-ro, Bundang-Gu, Seongnam-si, Gyeonggi-Do, South Korea

3. Use of Report : For FCC Certification

4. Test Sample / Model: WizFi320 / WizFi320-PA



5. Date of Test : 2021-05-28 to 2021-06-05

6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247 ANSI C63.10-2013

7. Testing Environment: Temp.: (23 ± 1) °C, Humidity: (48 ± 5) % R.H.

8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by	Technical Manager
	Gwanyong Kim: (Signature) 	Young-taek Lee: (Signature) 

2021-06-07

Republic of KOREA **CTK Co., Ltd.**

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2021-02086
Page (2) / (79)Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2021-06-07	Issued (CTK-2021-02086)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2021-02086
Page (3) / (79)Pages

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	4
2. Facility and Accreditations.....	5
2.1 Test Facility	5
2.2 Laboratory Accreditations and Listings.....	5
2.3 Calibration Details of Equipment Used for Measurement.....	5
3. Test Specifications	6
3.1 Standards	6
3.2 Mode of operation during the test	7
3.3 Maximum Measurement Uncertainty	7
4. Technical Characteristic Test.....	8
4.1 6 dB Bandwidth and 99 % Bandwidth.....	8
4.2 Fundamental emission output power	12
4.3 Power Spectral Density	15
4.4 Band Edge & Conducted Spurious emission	18
4.5 Radiated Emissions.....	23
4.6 AC Conducted Emissions	76
5. APPENDIX A – Test Equipment Used For Tests.....	79



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2021-02086
Page (4) / (79)Pages

1. General Product Description

1.1 Client Information

Company	WIZnet Co., Ltd
Contact Point	5F Humax Village, 216 Hwangsaeul-ro, Bundang-Gu, Seongnam-si, Gyeonggi-Do, South Korea
Contact Person	Name : Lucid Minsu Jeun E-mail : main8096@wiznet.co.kr Tel : +82-31-8023-5678

1.2 Product Information

FCC ID	2AKKW-WIZFI320
Product Description	WizFi320
Basic Model name	WizFi320-PA
Variant Model name	WizFi320-CON has a different antenna type from the basic model. ▶ WizFi320-PA : PCB Antenna ▶ WizFi320-CON : Dipole Antenna
Operating Frequency	2 412 MHz – 2 462 MHz (Bandwidth 20 MHz) 2 422 MHz – 2 452 MHz (Bandwidth 40 MHz)
RF Output Power	802.11b : 15.25 dBm (33.50 mW) 802.11g : 13.50 dBm (22.39 mW) 802.11n(HT20) : 13.26 dBm (21.18 mW) 802.11n(HT40) : 11.25dBm (13.33 mW)
Antenna type	▶ WizFi320-PA : PCB Antenna ▶ WizFi320-CON : Dipole Antenna
Antenna gain	▶ WizFi320-PA : 3.28 dBi ▶ WizFi320-CON : 3.0 dBi
Number of channels	11 (Bandwidth 20 MHz) 7 (Bandwidth 40 MHz)
Type of Modulation	802.11b : DSSS 802.11g/n : OFDM
Power Source	DC 3.3 V
Test Software(Version)	ESP RF test tool (Version 2.5)
RF Power setting in Test SW	802.11b : Attenuation(dB) – “1” 802.11g : Attenuation(dB) – “5” 802.11n(HT20): Attenuation(dB) – “6” 802.11n(HT40): Attenuation(dB) – “17”

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	HP	15-bs563TU	CND7253R6P
AC/DC Adapter	HP	HSTNN-LA40	7628011101



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2021-02086
Page (5) / (79)Pages

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea.

2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-02086
 Page (6) / (79)Pages

3. Test Specifications

3.1 Standards

Section in FCC	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	C	Conducted
15.247(e)	Transmitter power spectral density	C	
15.247(b)	Fundamental emission output power	C	
15.247(d)	Unwanted emission	C	
15.209	Transmitter emission	C	Radiated
15.207(a)	AC Conducted Emission	C	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013			
<i>Note 4:</i> The tests were performed according to the method of measurements prescribed in KDB No.558074, ANSI C63.10-2013			



3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests.
The results are only attached worst cases.

Test mode & Worst case

Mode	Worst case(Data rate)
802.11b	11 Mbps
802.11g	6 Mbps
802.11n(HT20)	MCS 0
802.11n(HT40)	MCS 0

Test Frequency & Bandwidth

Bandwidth	Lowest channel	Middle channel	Highest channel
20 MHz	2 412 MHz	2 437 MHz	2 462 MHz
40 MHz	2 422 MHz	2 437 MHz	2 452 MHz

Duty cycle

Mode	Duty cycle (%)
802.11b	9.0
802.11g	8.7
802.11n(HT20)	8.5
802.11n(HT40)	8.7

3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB (C.L. : Approx. 95 %, $k = 2$)
Power Spectral Density	1.5 dB (C.L. : Approx. 95 %, $k = 2$)
Occupied Bandwidth	0.1 MHz (C.L. : Approx. 95 %, $k = 2$)
Unwanted Emission(conducted)	3.0 dB (C.L. : Approx. 95 %, $k = 2$)
Radiated Emissions ($f \leq 30$ MHz)	1.5 dB (C.L. : Approx. 95 %, $k = 2$)
Radiated Emissions ($f \leq 1$ GHz)	4.66 dB (C.L. : Approx. 95 %, $k = 2$)
Radiated Emissions ($f > 1$ GHz)	4.76 dB (C.L. : Approx. 95 %, $k = 2$)
AC Conducted Emission	1.96 dB μ V (C.L. : Approx. 95 %, $k = 2$)



4. Technical Characteristic Test

4.1 6 dB Bandwidth and 99 % Bandwidth

Test Procedures

KDB 558074 - Section 8.2
ANSI C63.10-2013 - Section 6.9.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

ANSI C63.10-2013 - Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission.

Use the 99 % power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz (6 dB Bandwidth)
- b) RBW = 1 % to 5 % of the OBW
(99 % Bandwidth)
- c) VBW $\geq 3 \times$ RBW
- d) Detector = peak
- e) Trace mode = Max hold
- f) Sweep = auto couple
- g) Allow trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Limit : 6 dB Bandwidth

6 dB Bandwidth > 500 kHz

Limit : 99 % Bandwidth

N/A



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501




Report No. :
 CTK-2021-02086
 Page (9) / (79)Pages

Test Data:




Mode	Channel	Frequency [MHz]	6 dB Bandwidth [MHz]	99 % Bandwidth [MHz]	Result
802.11b	Lowest	2 412	9.69	13.015	Complies
	Middle	2 437	9.68	12.937	
	Highest	2 462	9.70	13.003	
802.11g	Lowest	2 412	16.49	16.473	
	Middle	2 437	16.48	16.466	
	Highest	2 462	16.48	16.476	
802.11n (HT20)	Lowest	2 412	17.40	17.469	
	Middle	2 437	17.40	17.451	
	Highest	2 462	17.40	17.460	
802.11n (HT40)	Lowest	2 422	36.44	36.195	
	Middle	2 437	36.44	36.162	
	Highest	2 452	36.44	36.167	

See next pages for actual measured spectrum plots.

802.11b

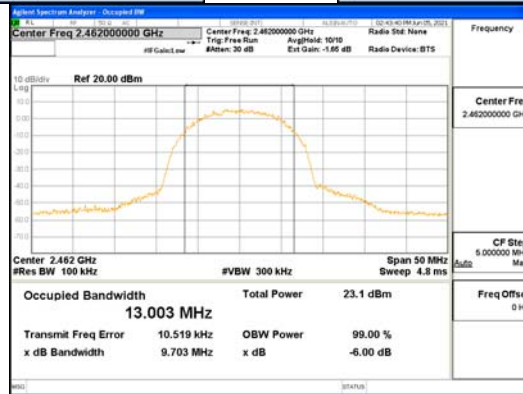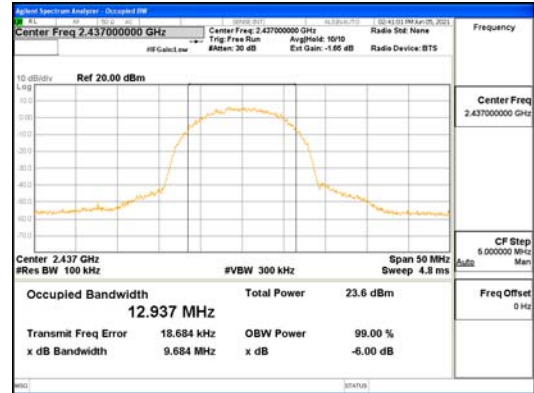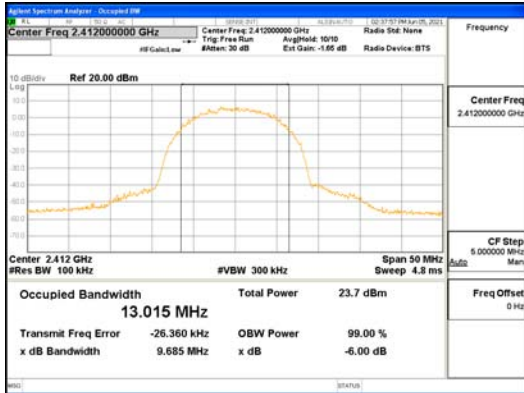

802.11g

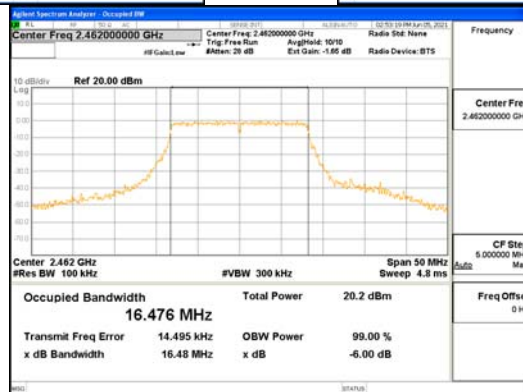
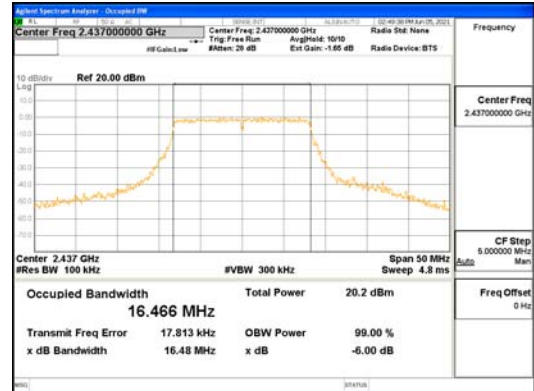
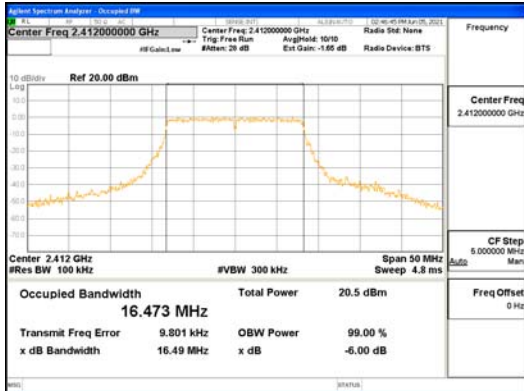







CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No. :
 CTK-2021-02086
 Page (11) / (79)Pages

802.11n(HT20)

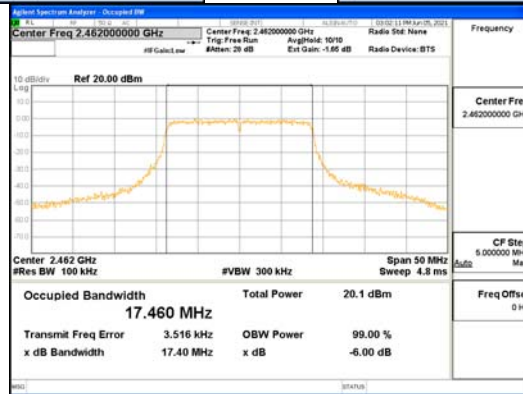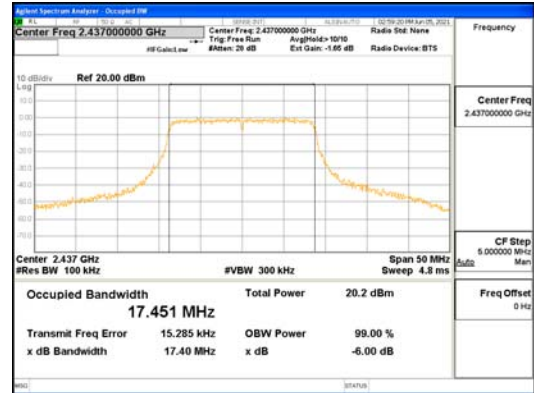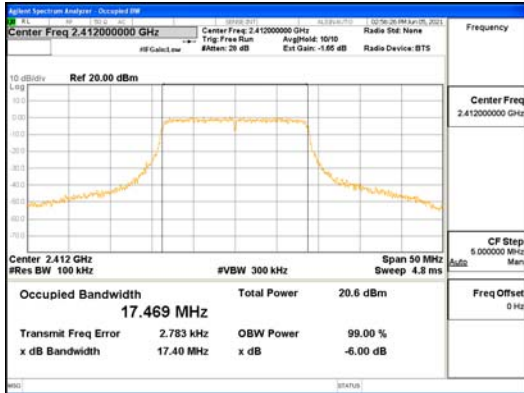

802.11n(HT40)

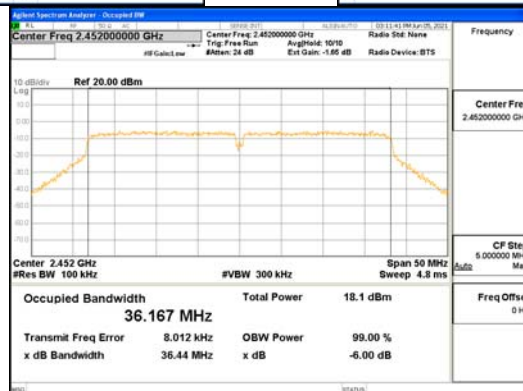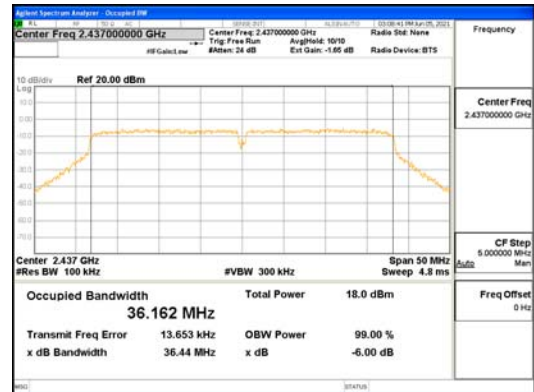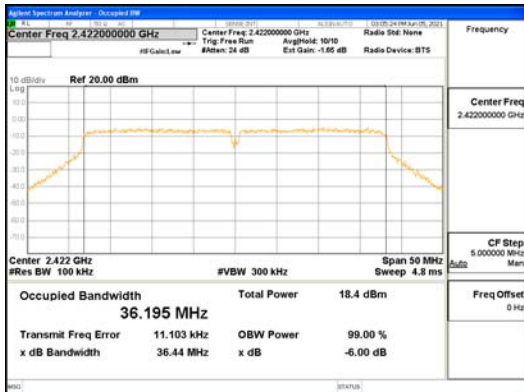

4.2 Fundamental emission output power

Test Procedures

KDB 558074 - Section 8.3.1.1
ANSI C63.10-2013 - Section 11.9.2.2.2

The following procedure can be used when the maximum available RBW of the instrument is greater than the DTS bandwidth:

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) 1 % to 5 % of the OBW
or not to exceed 1 MHz.
- b) VBW $\geq 3 \times$ RBW
- c) span $\geq 1.5 \times$ OBW
- d) Sweep time = auto
- e) Detector = RMS (i.e., Power averaging)
- f) Trace = least 100 traces in power averaging (rms) mode.
- g) Allow trace to fully stabilize
- h) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges.

Limit :

Maximum Output Power < 1 W (30 dBm)

Test Data

Mode	Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
802.11b	Lowest	2 412	15.25	30	Complies
	Middle	2 437	15.25		
	Highest	2 462	14.71		
802.11g	Lowest	2 412	13.50		
	Middle	2 437	13.29		
	Highest	2 462	13.18		
802.11n (HT20)	Lowest	2 412	13.26		
	Middle	2 437	12.95		
	Highest	2 462	12.80		
802.11n (HT40)	Lowest	2 422	11.25		
	Middle	2 437	10.88		
	Highest	2 452	11.01		



See next pages for actual measured spectrum plots.




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-02086
 Page (13) / (79)Pages

802.11b

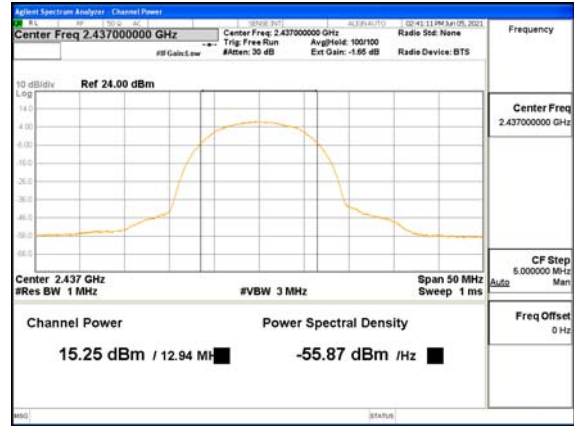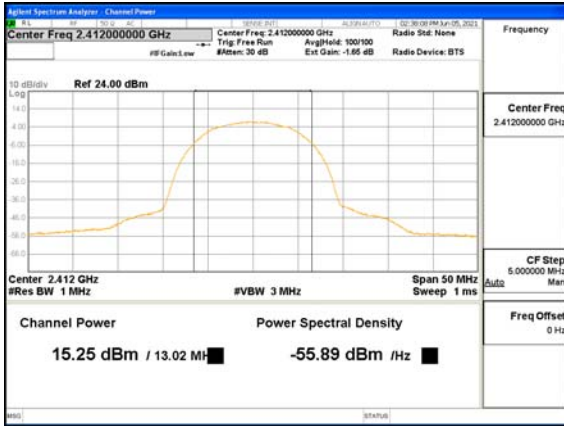

802.11g

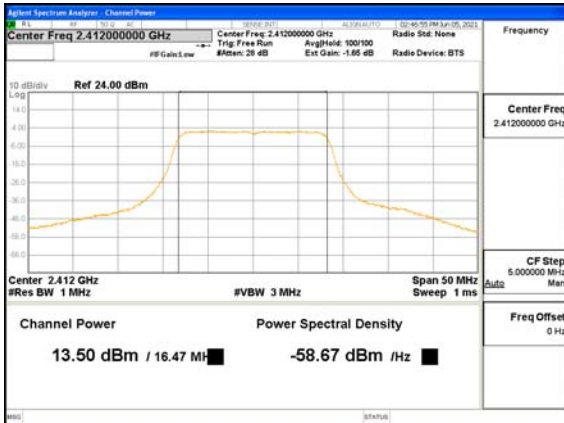





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No. :
 CTK-2021-02086
 Page (14) / (79)Pages

802.11n(HT20)



802.11n(HT40)

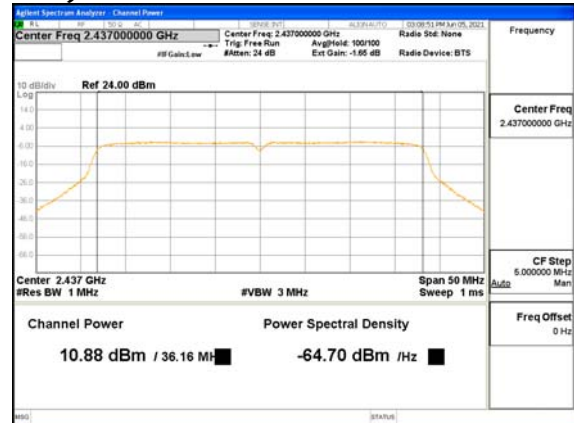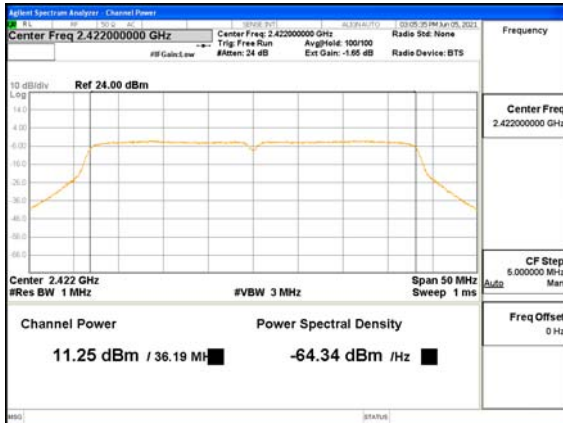

4.3 Power Spectral Density

Test Procedures

KDB 558074 - Section 8.4
ANSI C63.10-2013 - Section 11.10.2

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- b) VBW $\geq 3 \times \text{RBW}$
- c) span $\geq 1.5 \times \text{DTS bandwidth}$
- d) Sweep time = auto couple
- e) Detector = peak
- f) Trace mode= max hold
- g) Allow trace to fully stabilize
- h) Use the peak marker function to determine the maximum amplitude level within the RBW.

Limit :

Power Spectral Density < 8 dBm @ 3 kHz BW

Test Data

Mode	Channel	Frequency [MHz]	Measurement data [dBm]	Limit [dBm]	Result
802.11b	Lowest	2 412	-8.604	8	Complies
	Middle	2 437	-8.729		
	Highest	2 462	-9.083		
802.11g	Lowest	2 412	-14.253		
	Middle	2 437	-14.385		
	Highest	2 462	-14.743		
802.11n (HT20)	Lowest	2 412	-14.470		
	Middle	2 437	-14.585		
	Highest	2 462	-14.979		
802.11n (HT40)	Lowest	2 422	-17.905		
	Middle	2 437	-18.314		
	Highest	2 452	-17.990		




See next pages for actual measured spectrum plots.

802.11b




CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2021-02086
Page (16) / (79)Pages

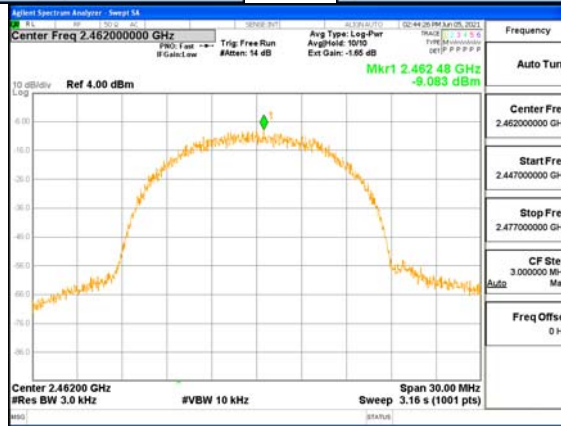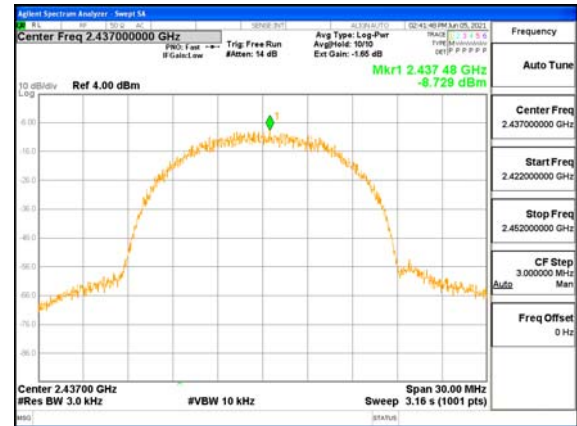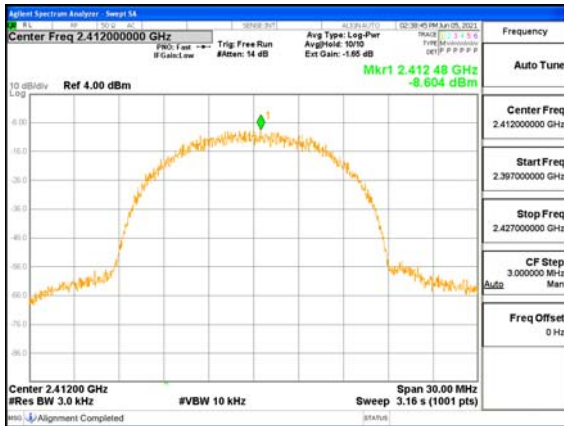

802.11g


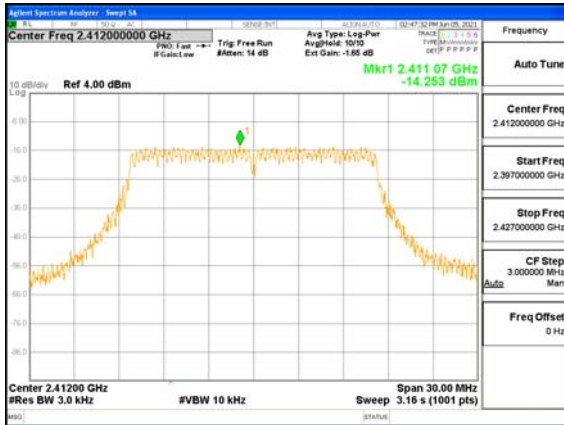





CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No. :
 CTK-2021-02086
 Page (17) / (79)Pages

802.11n(HT20)

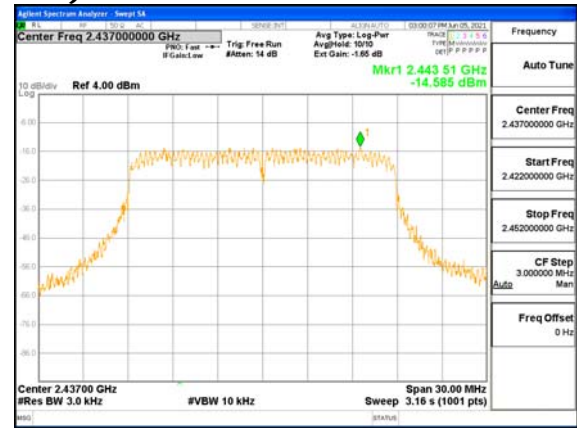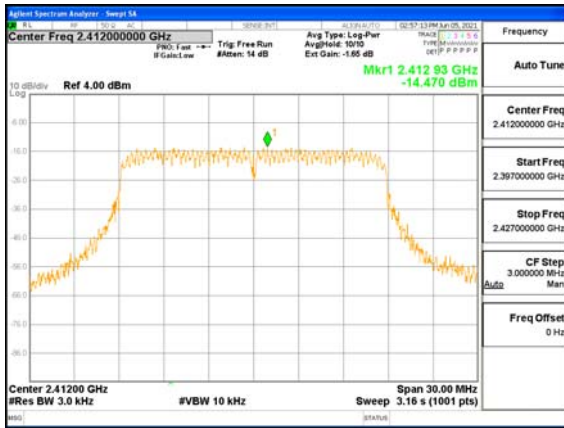

802.11n(HT40)

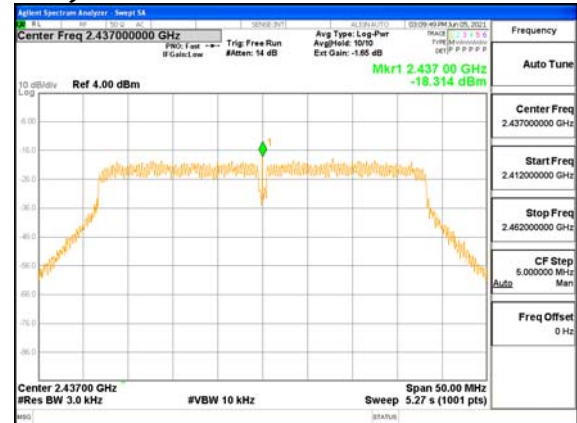



4.4 Band Edge & Conducted Spurious emission

Test Procedures

KDB 558074 - Section 8.5
ANSI C63.10-2013 - Section 11.11.3

Typical regulatory requirements specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions.

- a) If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to determine compliance as described in 11.9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 100 kHz
- b) VBW $\geq 3 \times$ RBW
- c) Detector = peak
- d) Sweep time = auto couple
- e) Trace mode = max hold
- f) Allow trace to fully stabilize
- g) Use the peak marker function to determine the maximum amplitude level.

Limit :

Emission level < 30 dBc

Test Data : Complies

- All conducted emission in any 100 kHz bandwidth outside of the spread spectrum band was at least 30 dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.


See next pages for actual measured spectrum plots.



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No. :
 CTK-2021-02086
 Page (19) / (79)Pages

802.11b




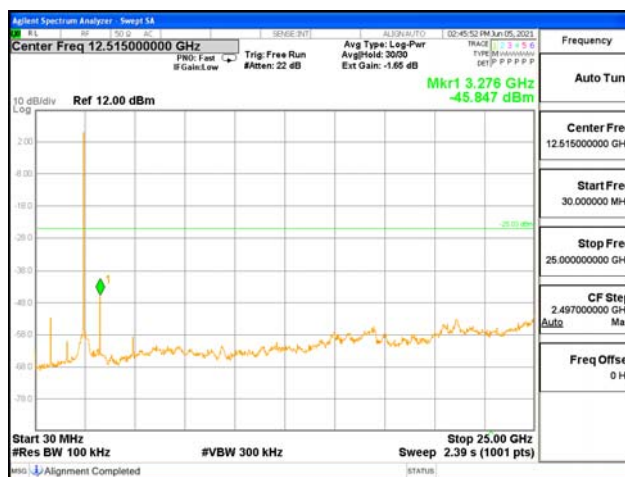




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No. :
 CTK-2021-02086
 Page (20) / (79)Pages

802.11g

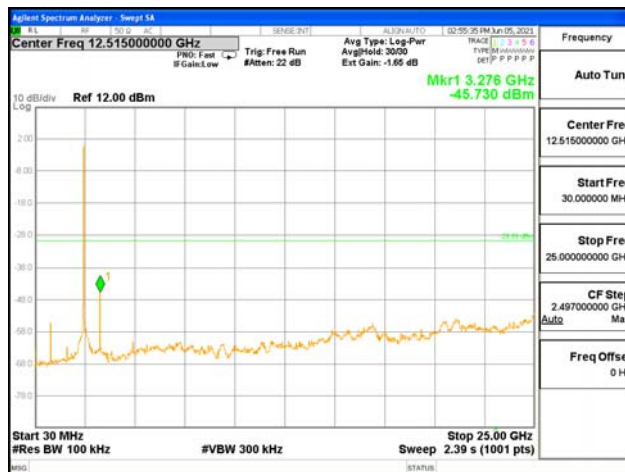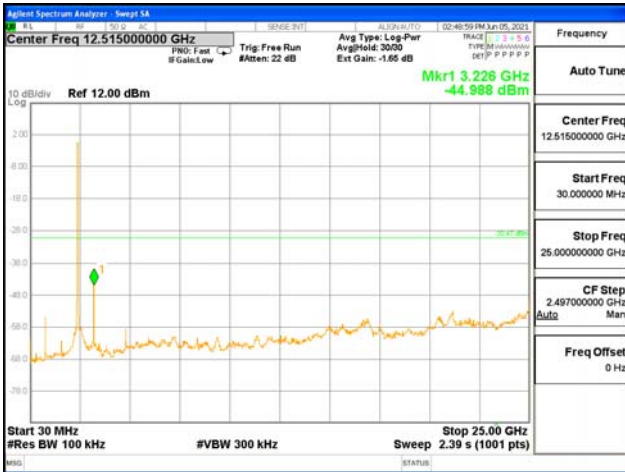
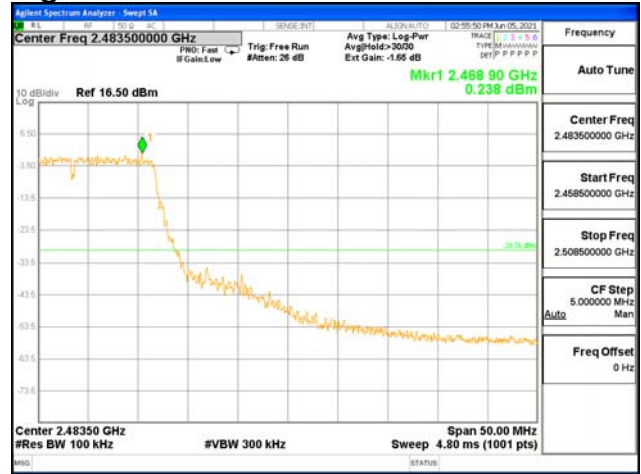
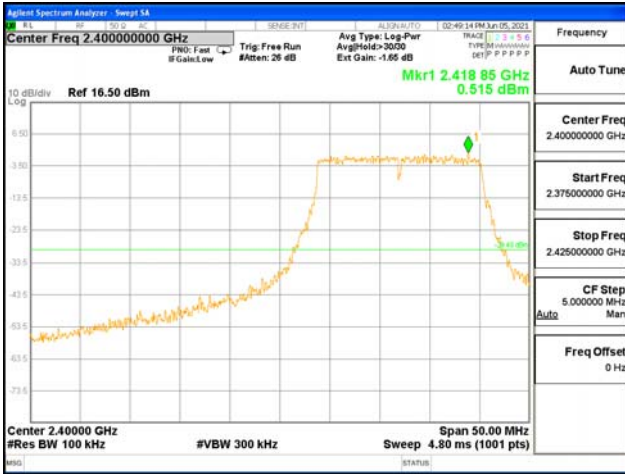




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No. :
 CTK-2021-02086
 Page (21) / (79)Pages

802.11n(HT20)

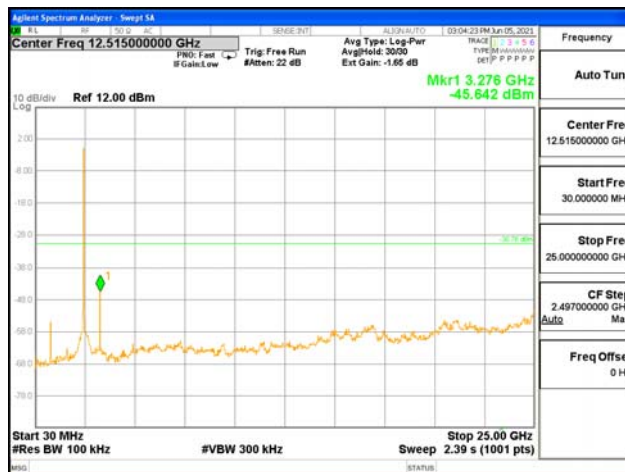
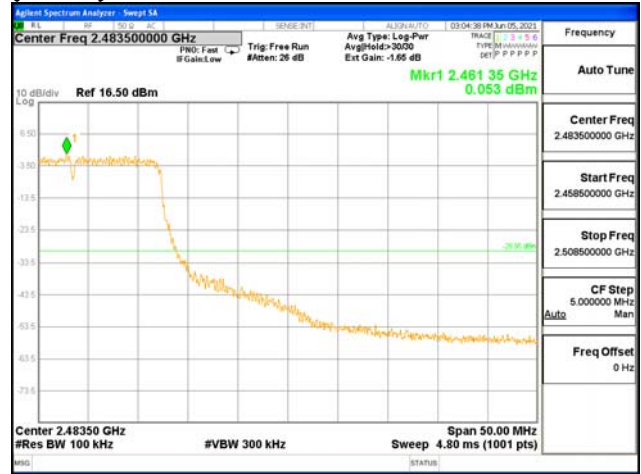
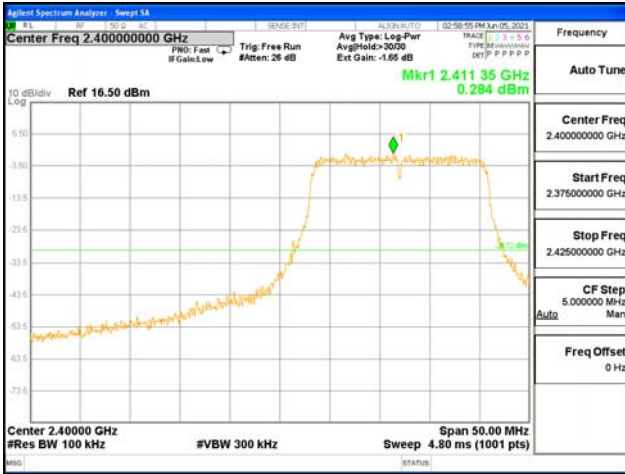




CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No. :
 CTK-2021-02086
 Page (22) / (79)Pages

802.11n(HT40)

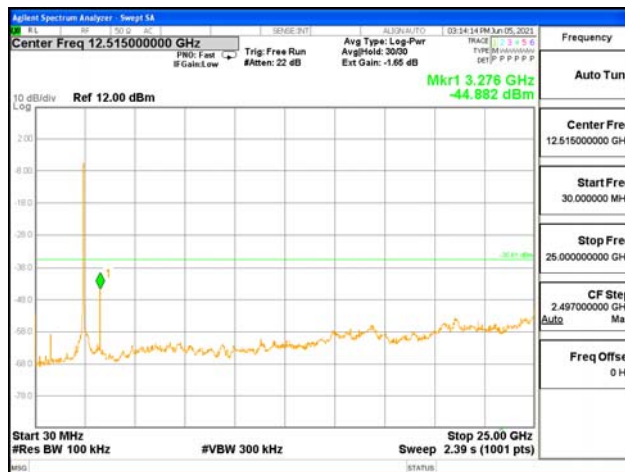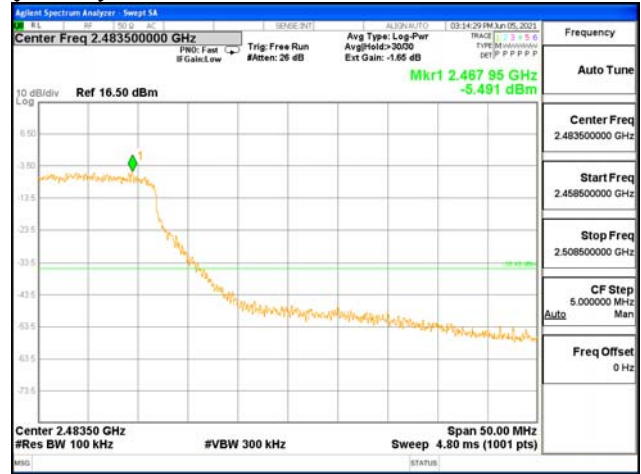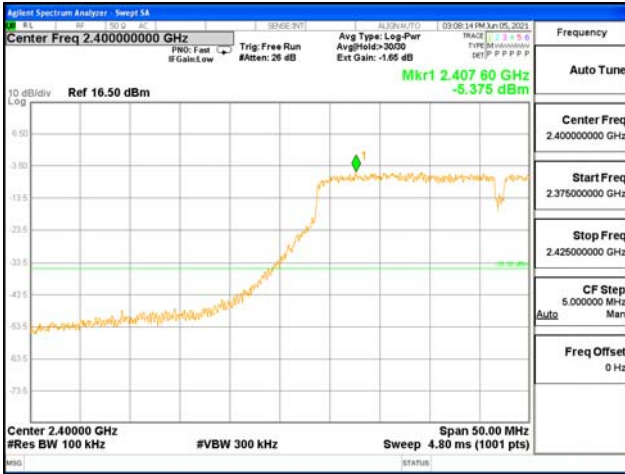



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2021-02086
Page (23) / (79)Pages

4.5 Radiated Emissions

Test Location

- 10 m SAC (test distance : 10 m, 3 m)
 3 m SAC (test distance : 3 m)

Test Procedures

KDB 558074 - Section 8.5, 8.6
ANSI C63.10-2013 - Section 11.11, 11.12

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3 m away from the EUT. Test Antenna height is carried from 1 m to 4 m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

Test Settings :

Frequency Range = 9 kHz ~ 26.5 GHz (2.4 GHz 10th harmonic)

- a) RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz,
200 Hz for $f < 150$ kHz
- b) VBW \geq RBW
- c) Sweep time = auto couple



Limit :

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table 1. Restricted Frequency Bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2021-02086
Page (25) / (79)Pages

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	48.5 – 13.8	300
0.490-1.705	24000/F(kHz)	33.8 – 23	30
1.705-30	30	29.5	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3 m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1 GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

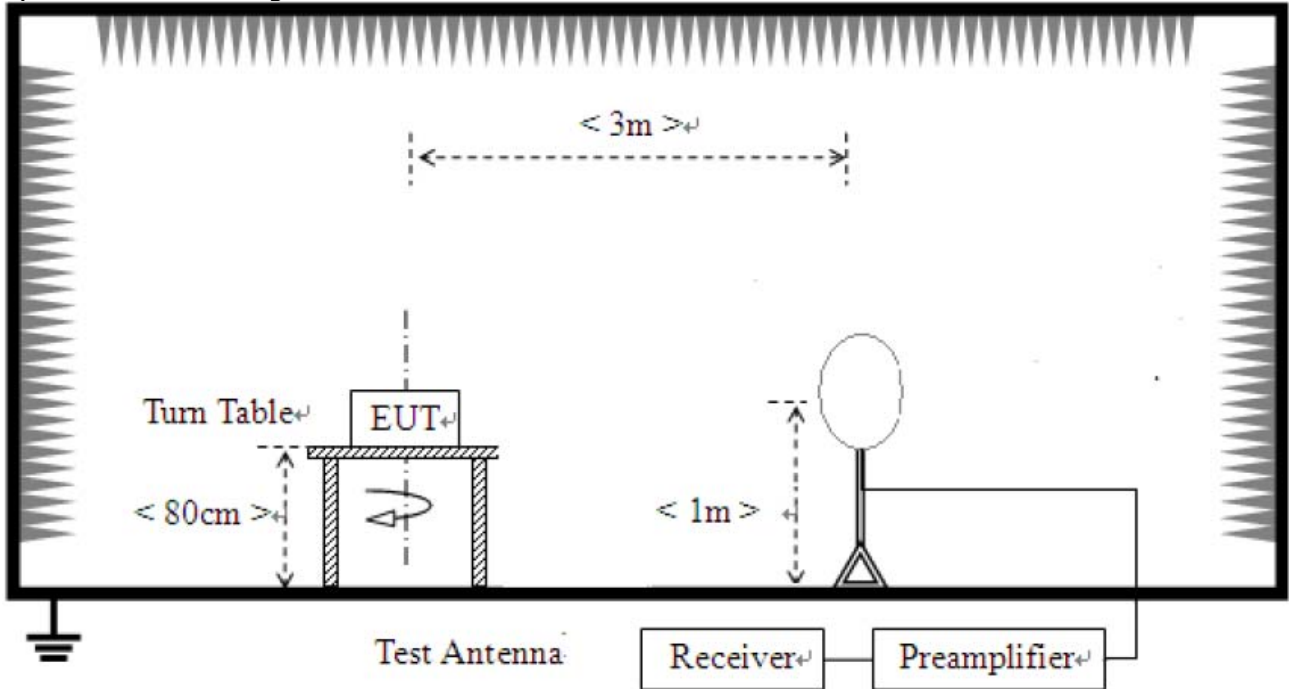

- 2) For field strength of emissions from 30 MHz to 1 GHz

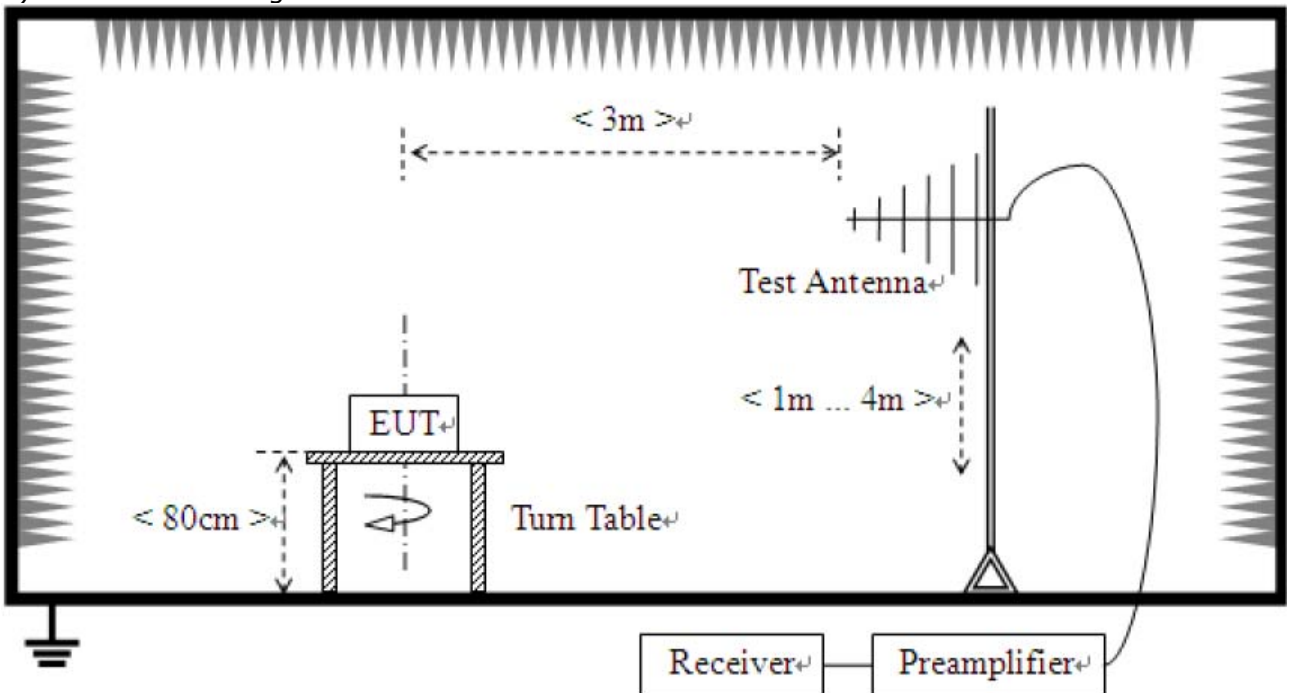

3) For field strength of emissions above 1 GHz

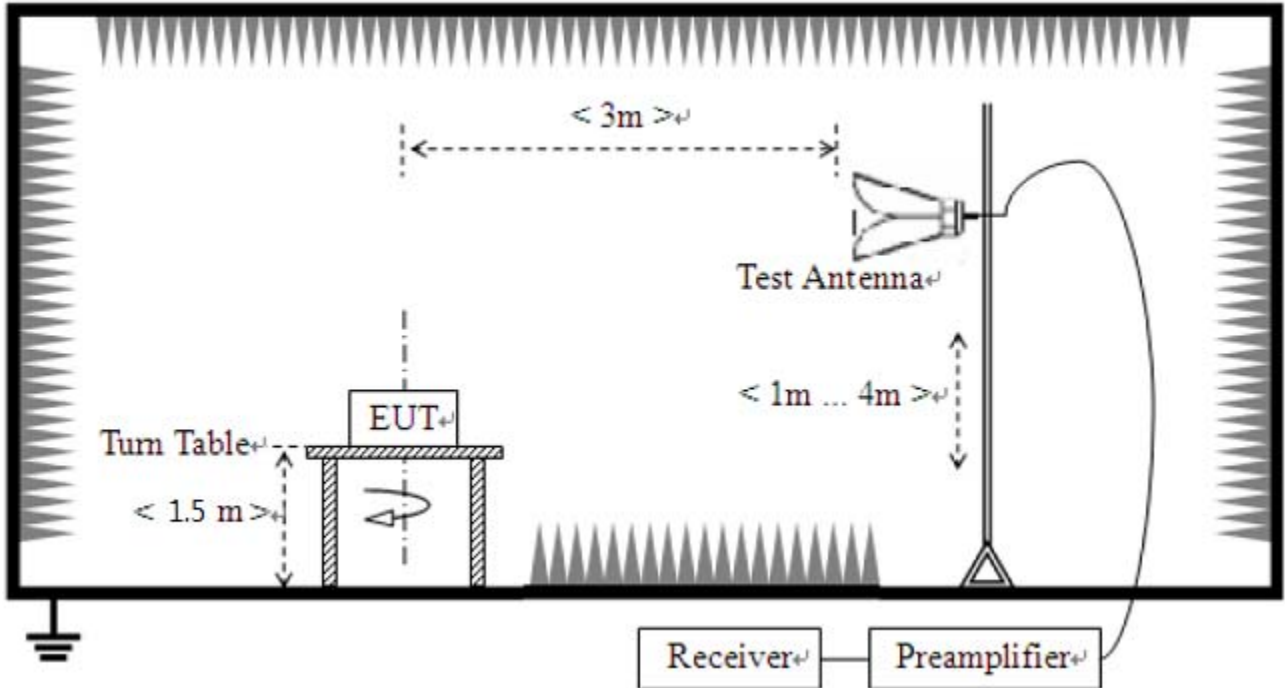

[Basic Model : WizFi320-PA]

Test results


1) 9 kHz to 30 MHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

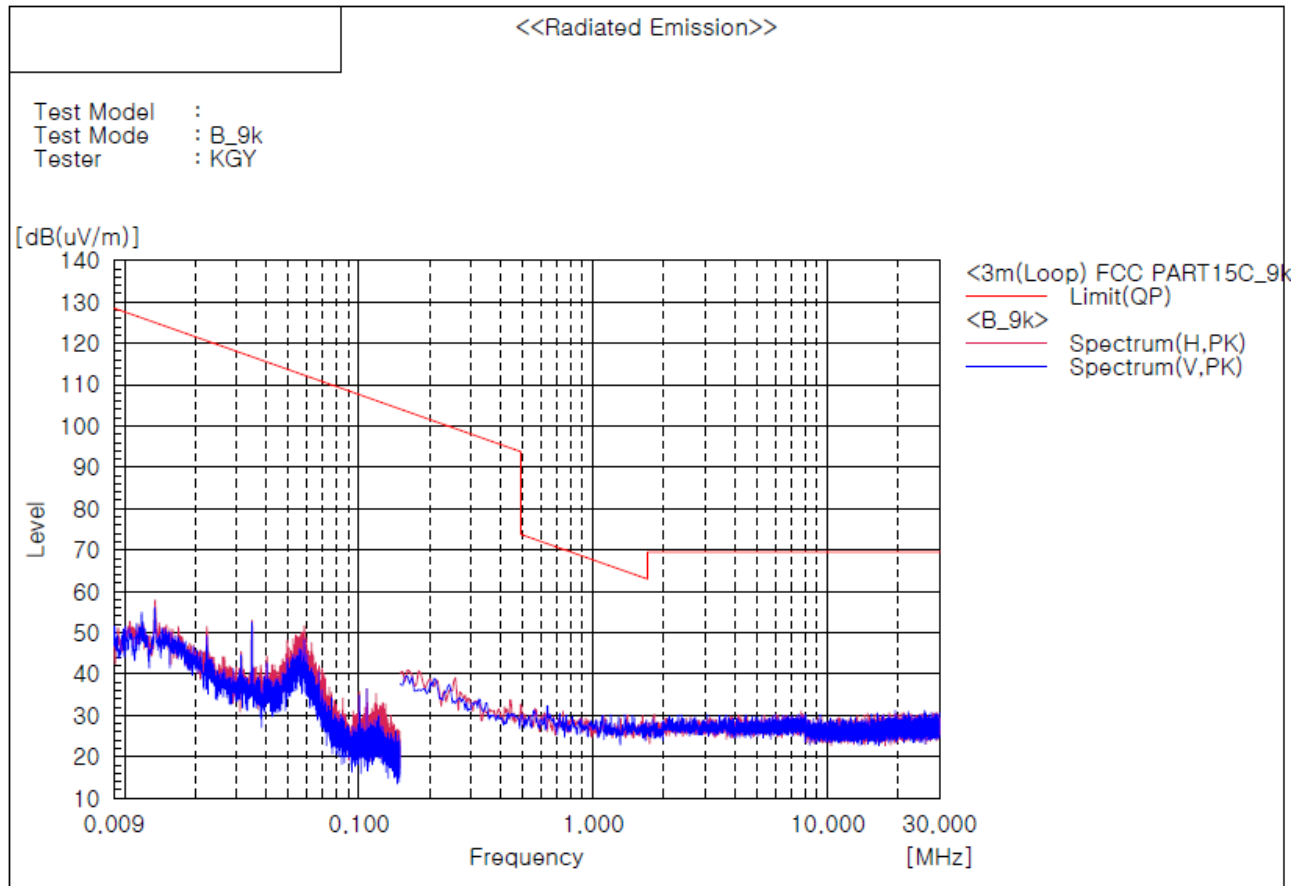

Result : There are more than 20 dB of margin compared to the reference value.

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

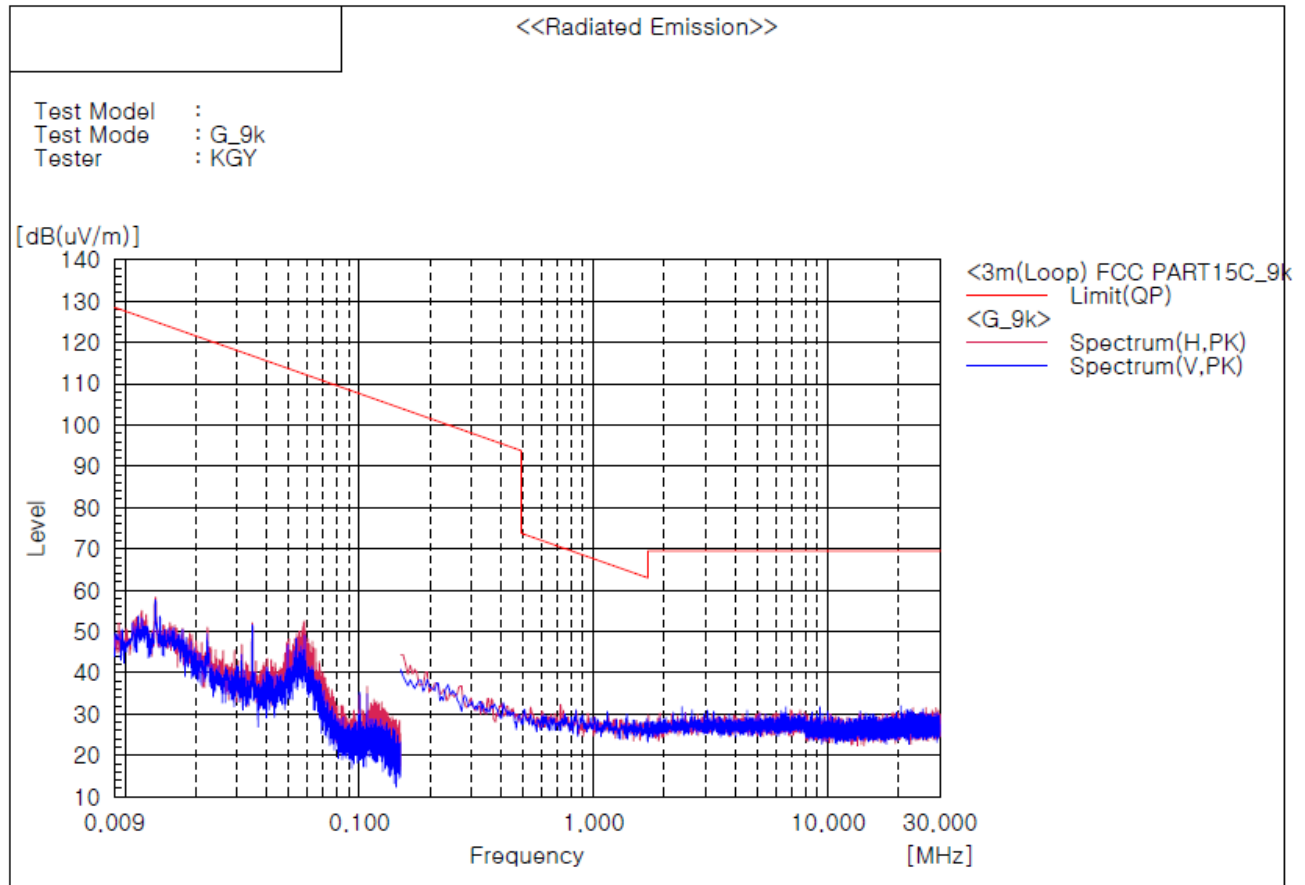

Result : There are more than 20 dB of margin compared to the reference value.

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

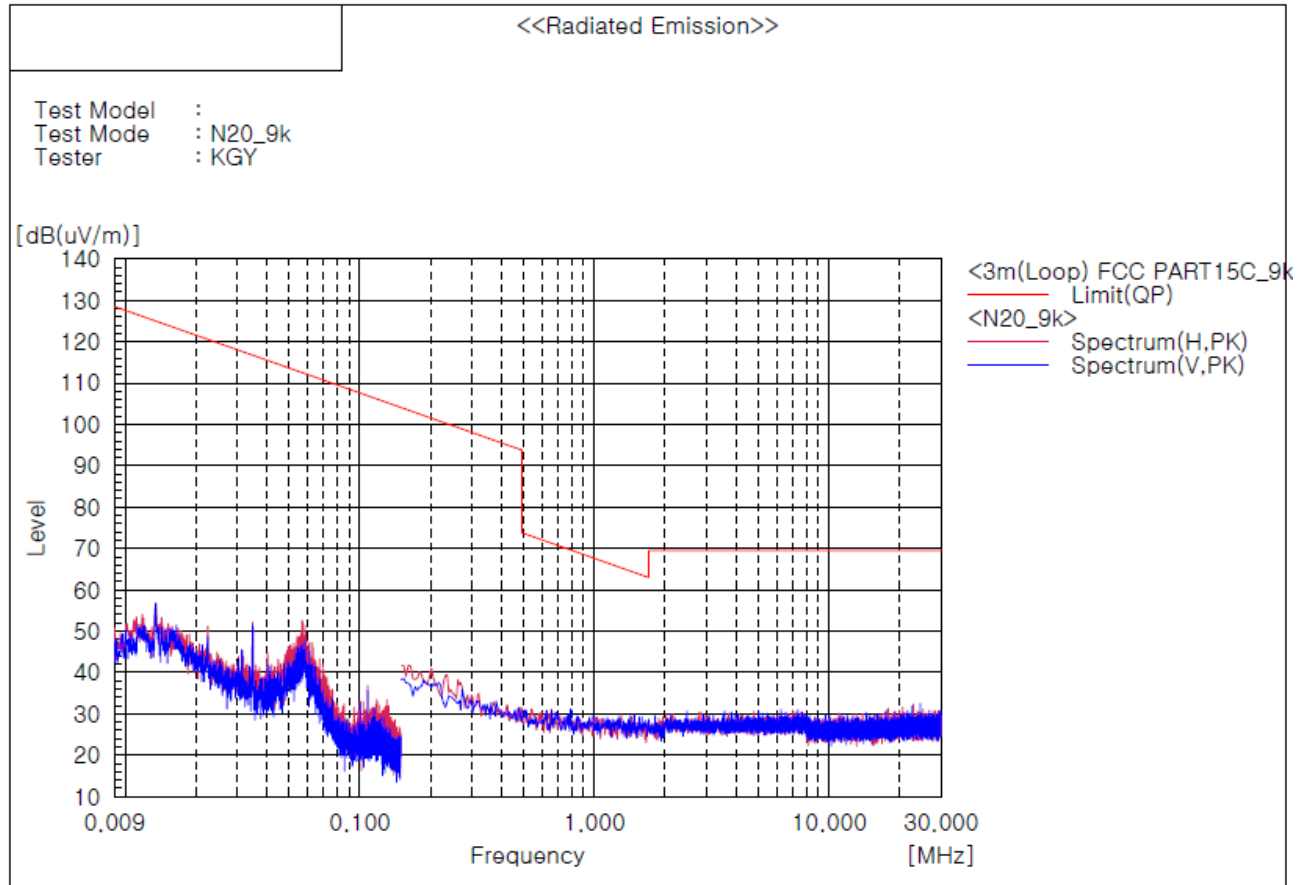

Result : There are more than 20 dB of margin compared to the reference value.

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

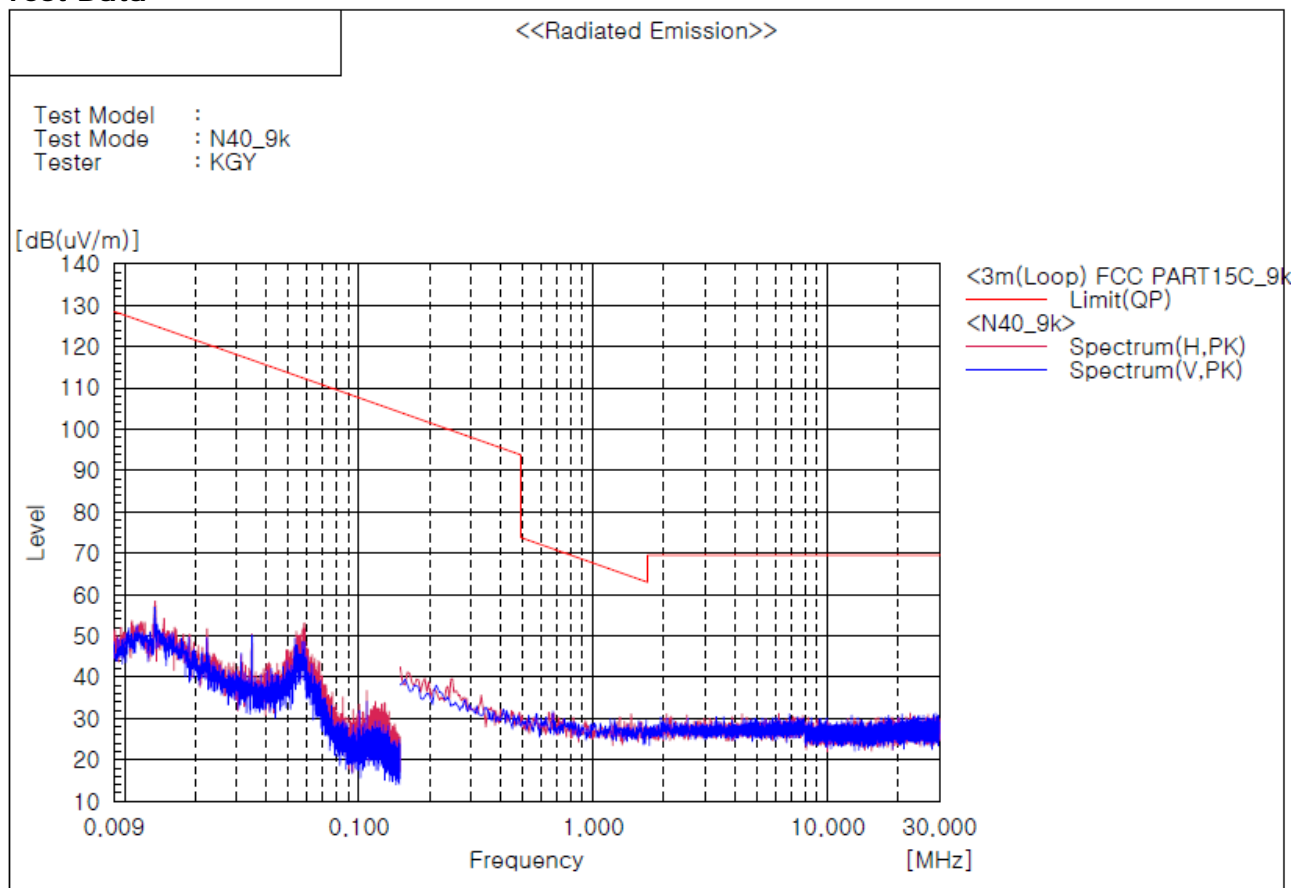

Result : There are more than 20 dB of margin compared to the reference value.

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
5. This data is the Peak(PK) value.


2) 30 MHz to 1 GHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

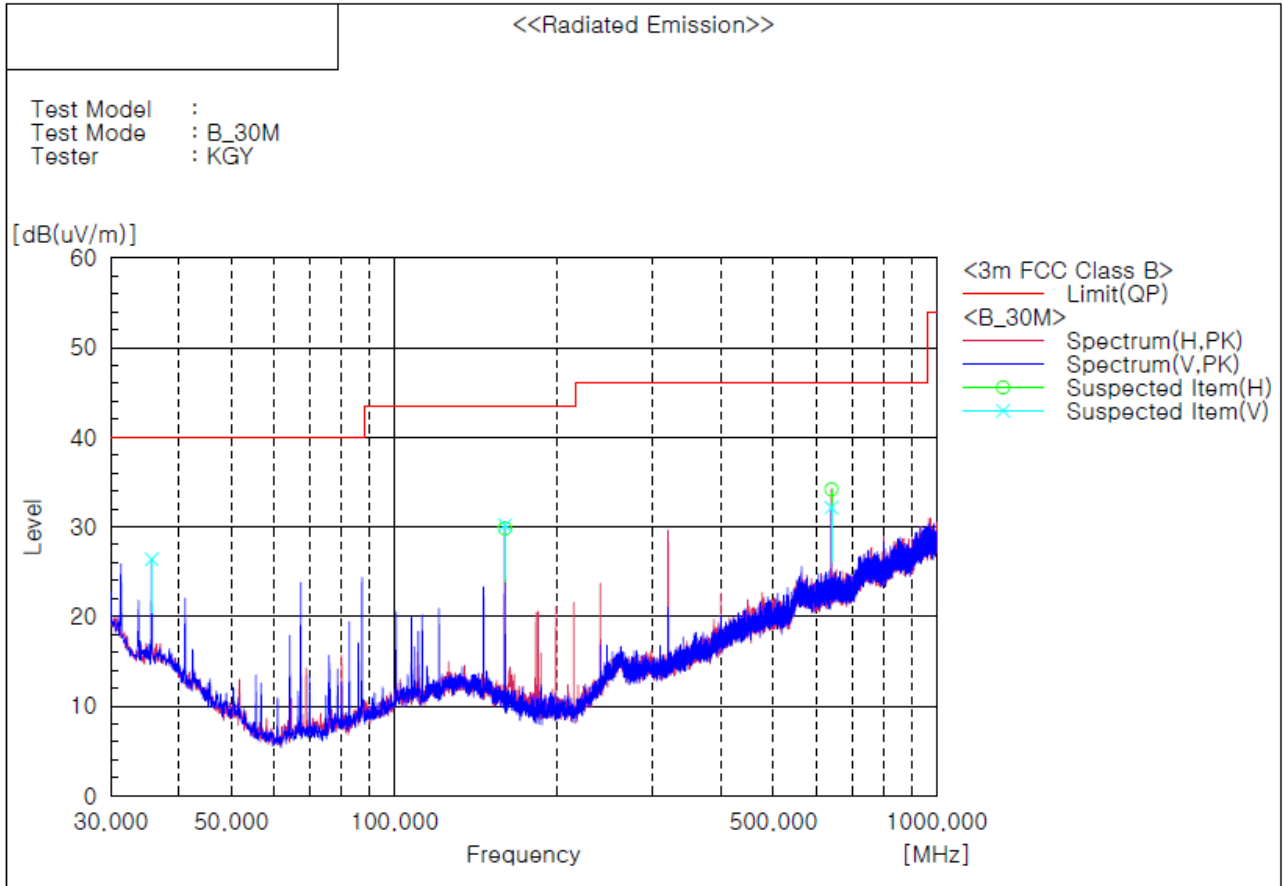

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	35.699	V	35.8	-9.4	26.4	40.0	13.6	101.0	156.0
2	159.980	V	43.1	-12.9	30.2	43.5	13.3	101.0	183.0
3	159.980	H	42.7	-12.9	29.8	43.5	13.7	209.0	306.0
4	640.009	H	33.4	0.8	34.2	46.0	11.8	101.0	353.0
5	640.009	V	31.3	0.8	32.1	46.0	13.9	101.0	50.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

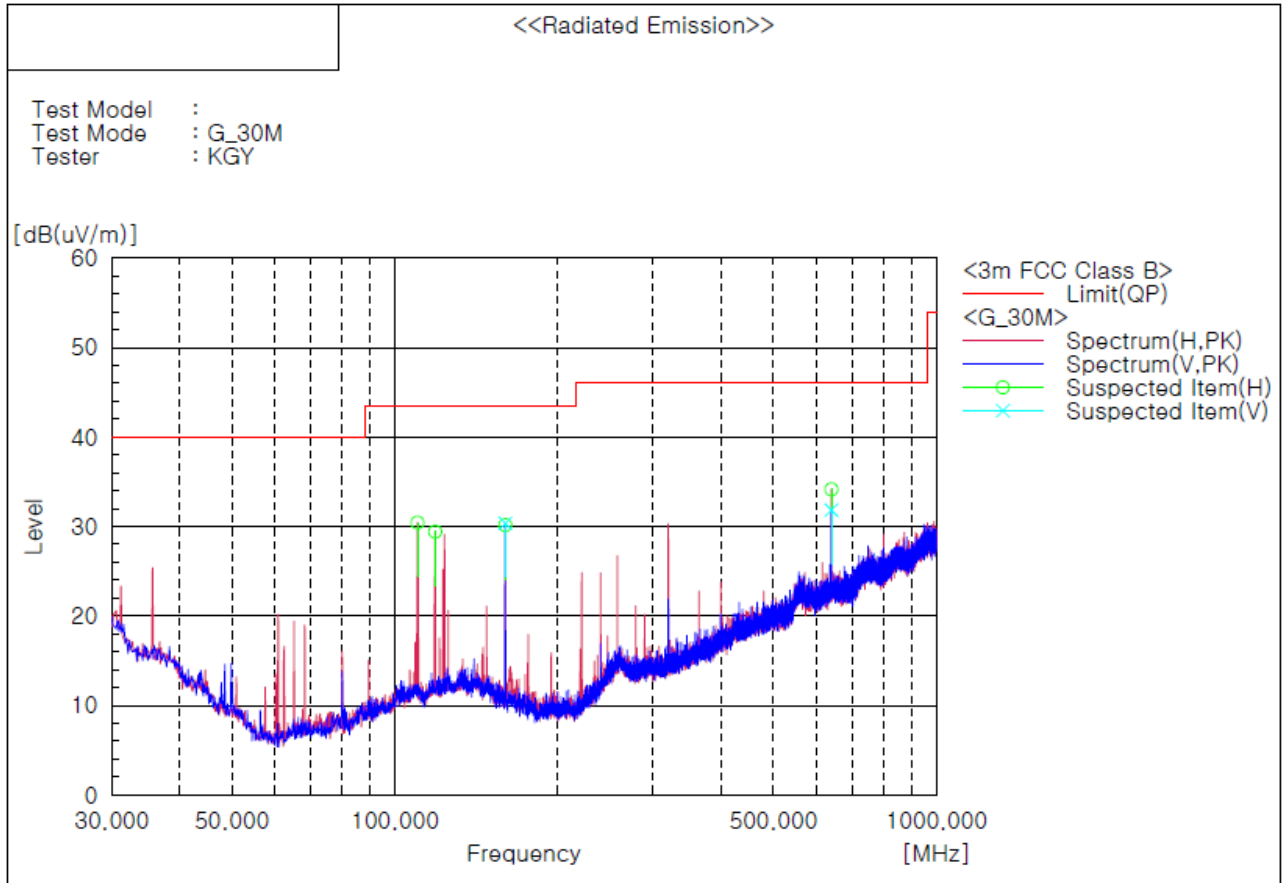

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	110.146	H	43.1	-12.7	30.4	43.5	13.1	399.0	175.0
2	118.755	H	41.7	-12.3	29.4	43.5	14.1	399.0	205.0
3	159.980	V	43.3	-12.9	30.4	43.5	13.1	100.0	359.0
4	159.980	H	43.0	-12.9	30.1	43.5	13.4	205.0	305.0
5	640.009	H	33.3	0.8	34.1	46.0	11.9	101.0	352.0
6	640.009	V	31.0	0.8	31.8	46.0	14.2	100.0	42.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

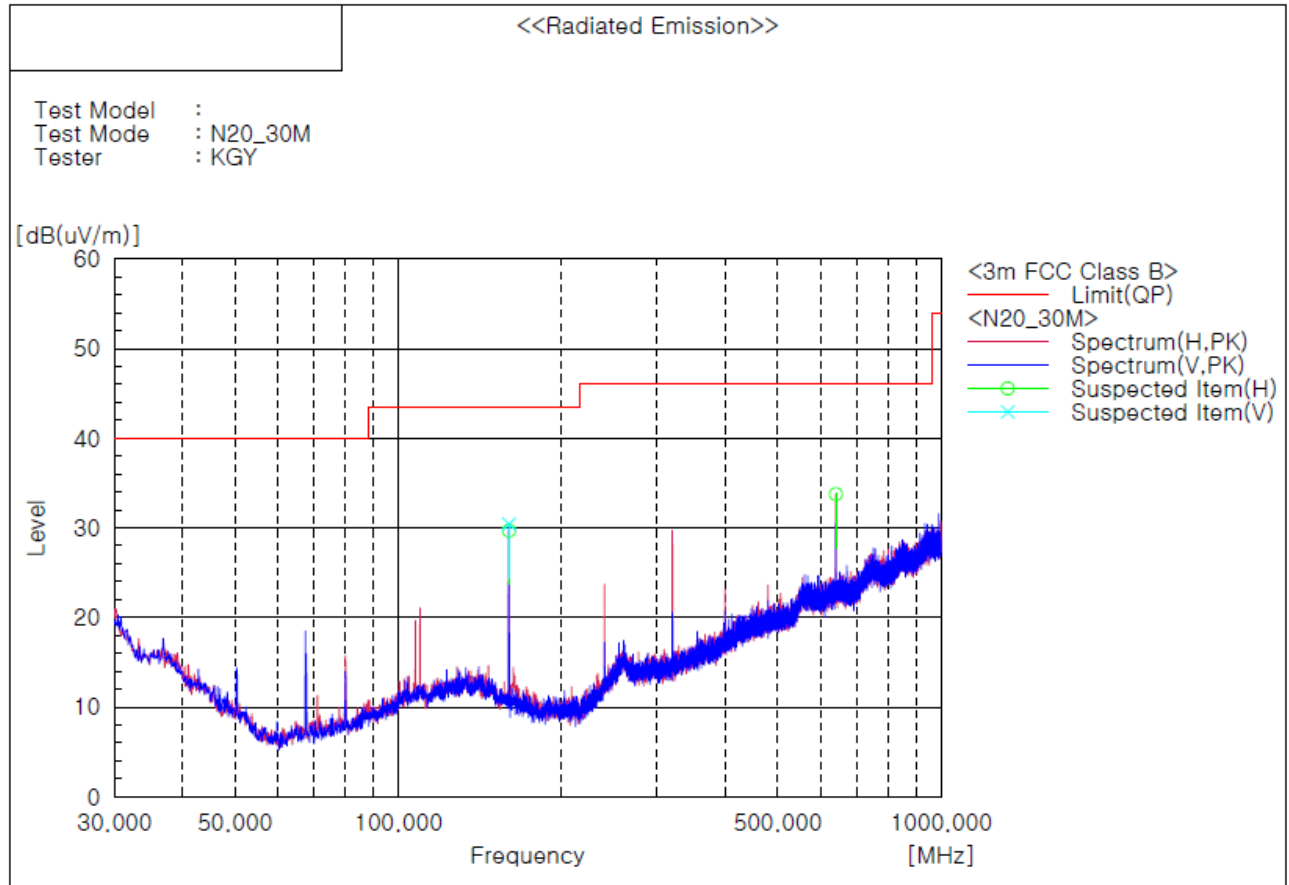

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	159.980	V	43.3	-12.9	30.4	43.5	13.1	101.0	329.0
2	159.980	H	42.6	-12.9	29.7	43.5	13.8	206.0	312.0
3	640.009	H	33.0	0.8	33.8	46.0	12.2	101.0	350.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

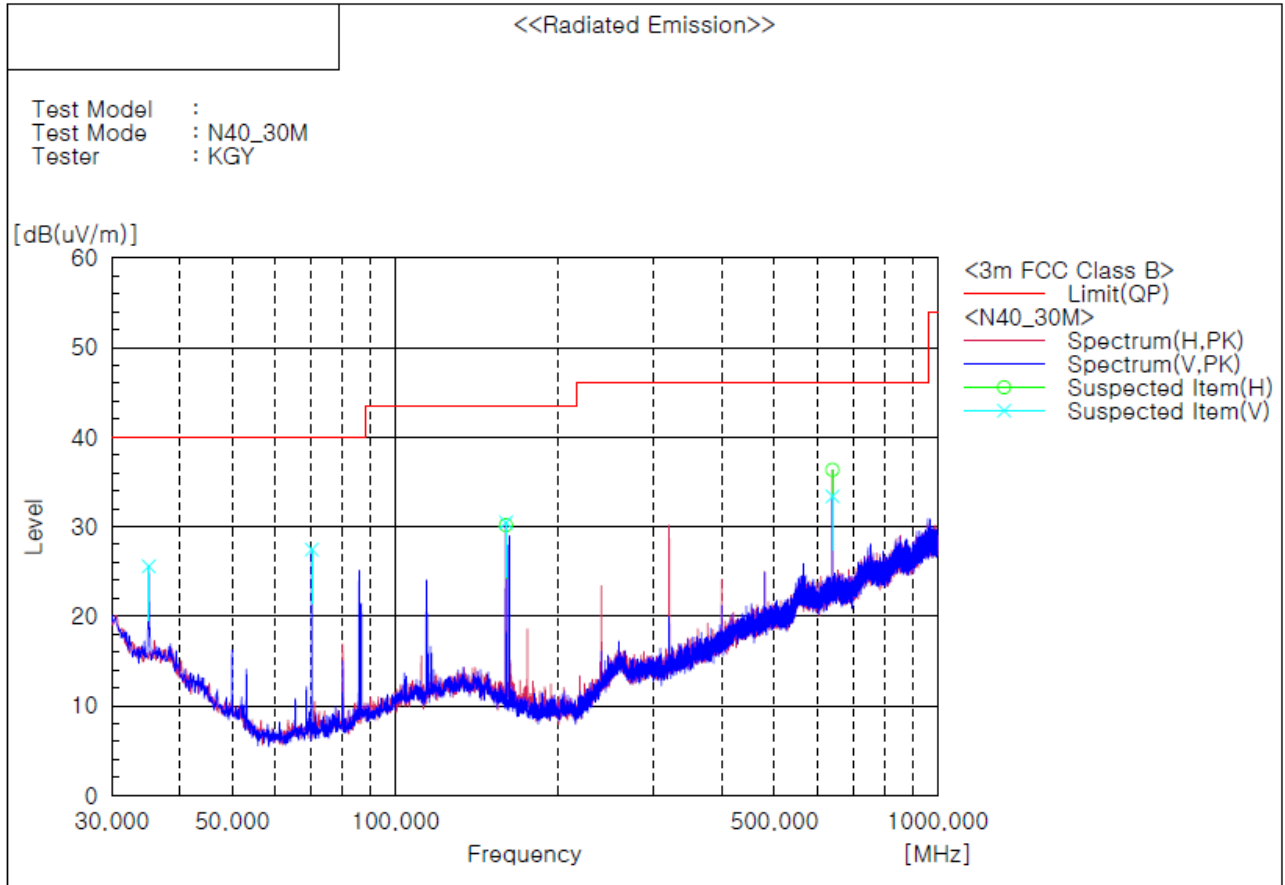

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	35.093	V	34.8	-9.2	25.6	40.0	14.4	295.0	176.0
2	70.134	V	45.0	-17.6	27.4	40.0	12.6	101.0	339.0
3	159.980	V	43.4	-12.9	30.5	43.5	13.0	101.0	322.0
4	159.980	H	43.1	-12.9	30.2	43.5	13.3	205.0	255.0
5	640.009	H	35.5	0.8	36.3	46.0	9.7	101.0	20.0
6	640.009	V	32.6	0.8	33.4	46.0	12.6	101.0	42.0

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.


3) 1 GHz to 18 GHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

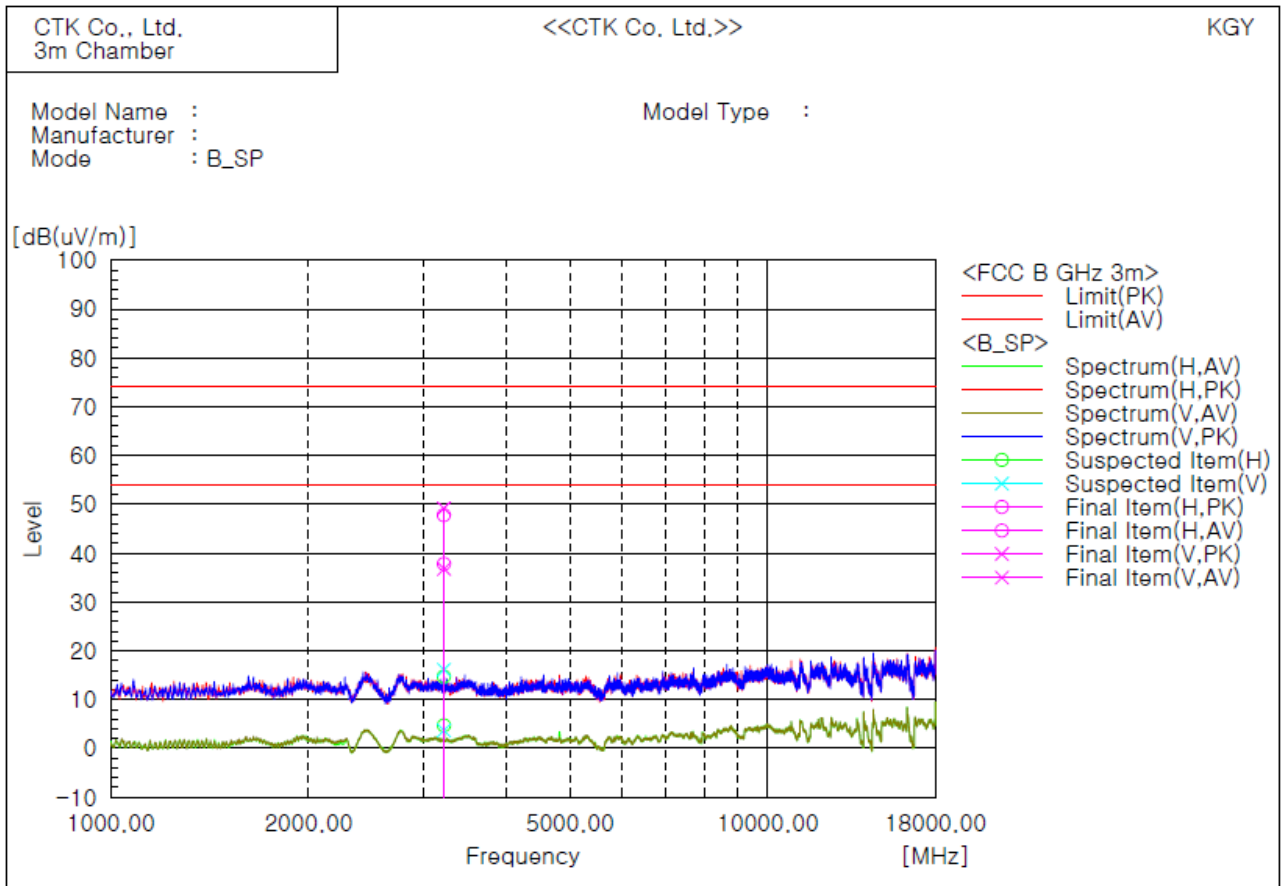

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3214.250	H	48.6		-0.8	47.8		74.0	54.0	26.2		99.9	17.0
2	3214.250	V	50.0		-0.8	49.2		74.0	54.0	24.8		99.9	104.5
3	3216.375	H		38.5	-0.7		37.8	74.0	54.0		16.2	99.9	338.9
4	3216.375	V		37.5	-0.7		36.8	74.0	54.0		17.2	235.1	0.0

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

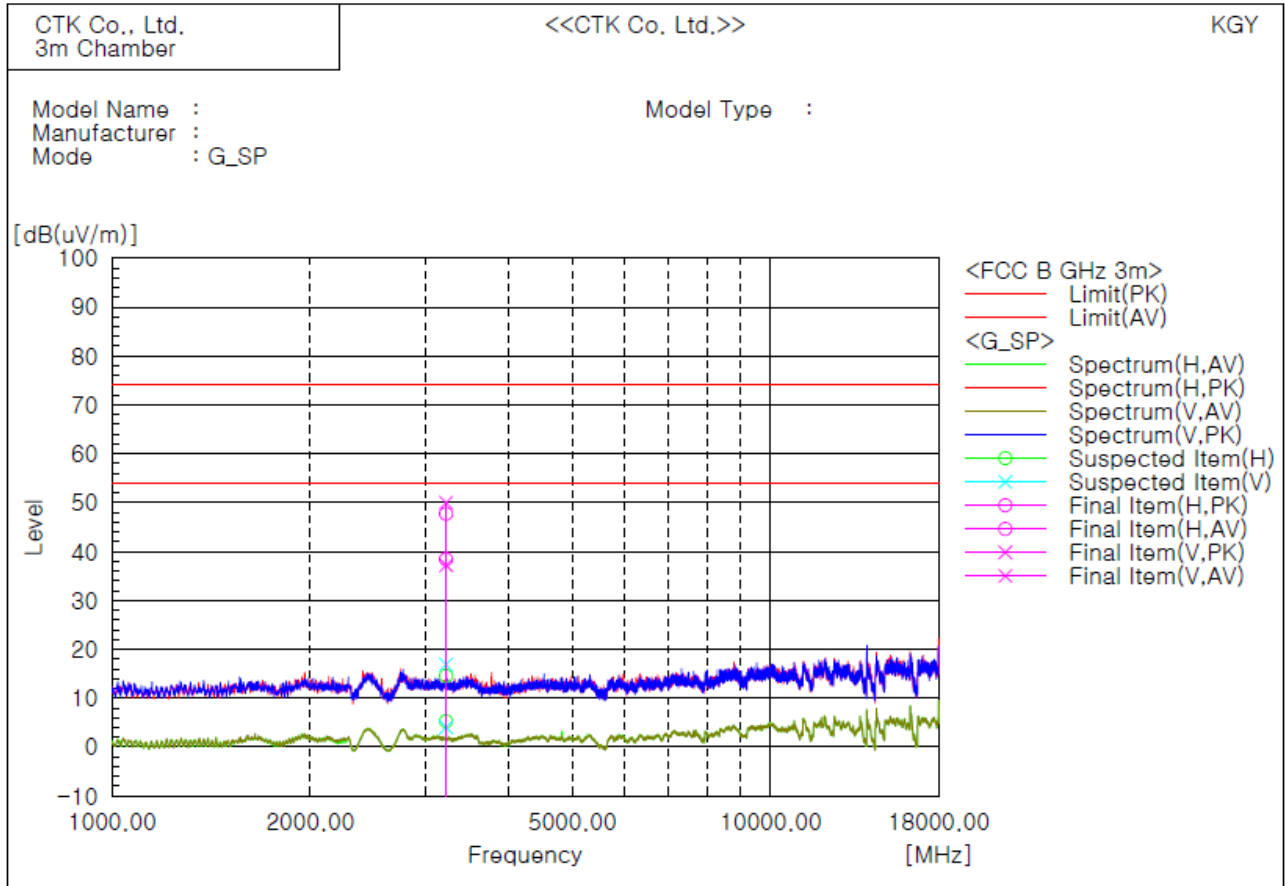

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3216.375	H	48.4	39.1	-0.7	47.7	38.4	74.0	54.0	26.3	15.6	99.8	340.7
2	3216.375	H	50.7	37.9	-0.7	50.0	37.2	74.0	54.0	24.0	16.8	99.8	322.7
3	3216.375	V						74.0	54.0			99.8	107.7
4	3216.375	V						74.0	54.0			99.8	305.7

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz

Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

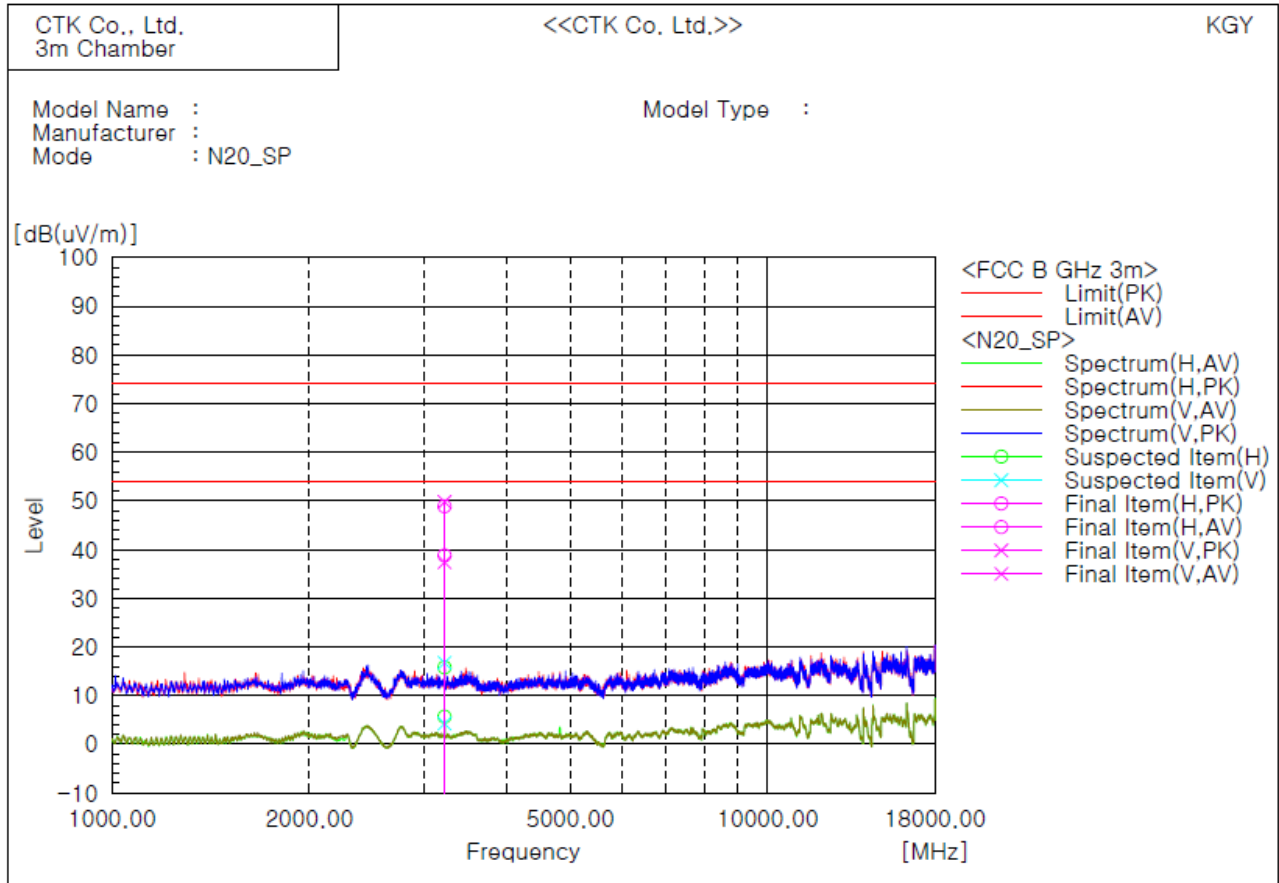

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3216.375	H	49.6	39.5	-0.7	48.9	38.8	74.0	54.0	25.1	15.2	99.8	0.0
2	3216.375	H	49.6	39.5	-0.7	48.9	38.8	74.0	54.0	25.1	15.2	99.8	0.0
3	3216.375	V	50.5	38.1	-0.7	49.8	37.4	74.0	54.0	24.2	16.6	235.5	54.8
4	3216.375	V	50.5	38.1	-0.7	49.8	37.4	74.0	54.0	24.2	16.6	99.8	301.9

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

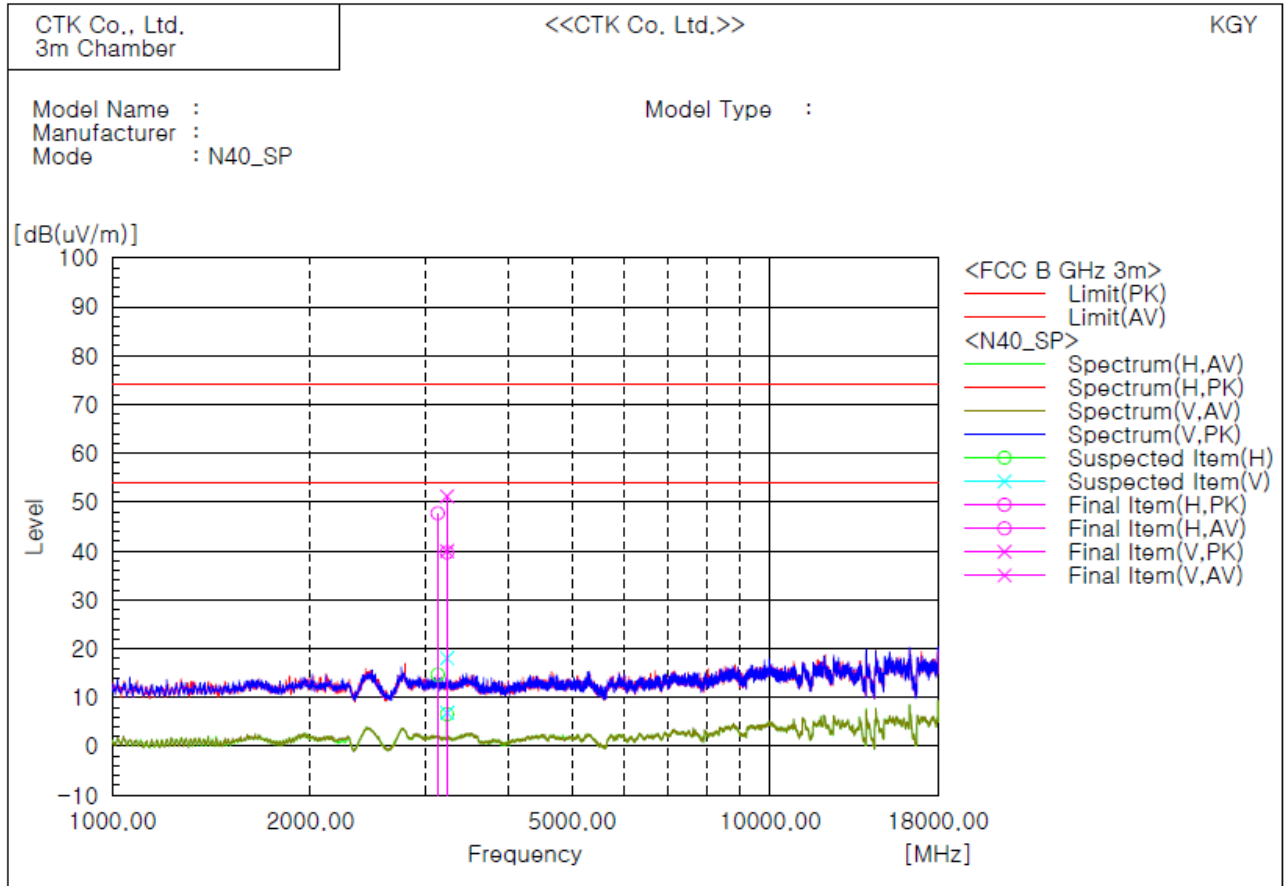

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3125.000	H	48.7		-1.0	47.7		74.0	54.0	26.3		99.8	122.6
2	3229.125	H		40.4	-0.7		39.7	74.0	54.0		14.3	99.8	319.0
3	3229.125	V	51.9		-0.7	51.2		74.0	54.0	22.8		234.7	275.4
4	3229.125	V		40.7	-0.7		40.0	74.0	54.0		14.0	99.8	303.9

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz


4) 18 GHz to 26.5 GHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

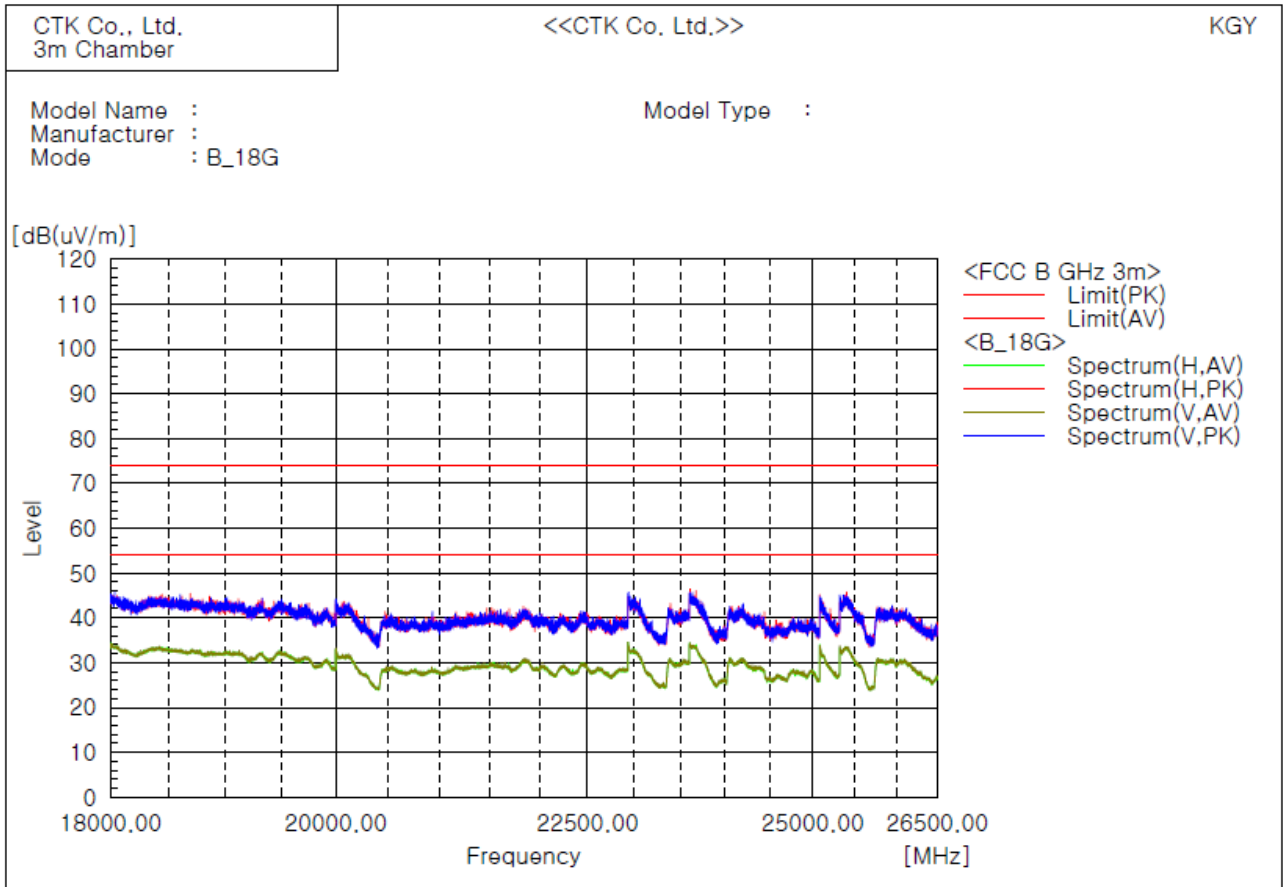

Result : There are more than 20 dB of margin compared to the reference value.

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

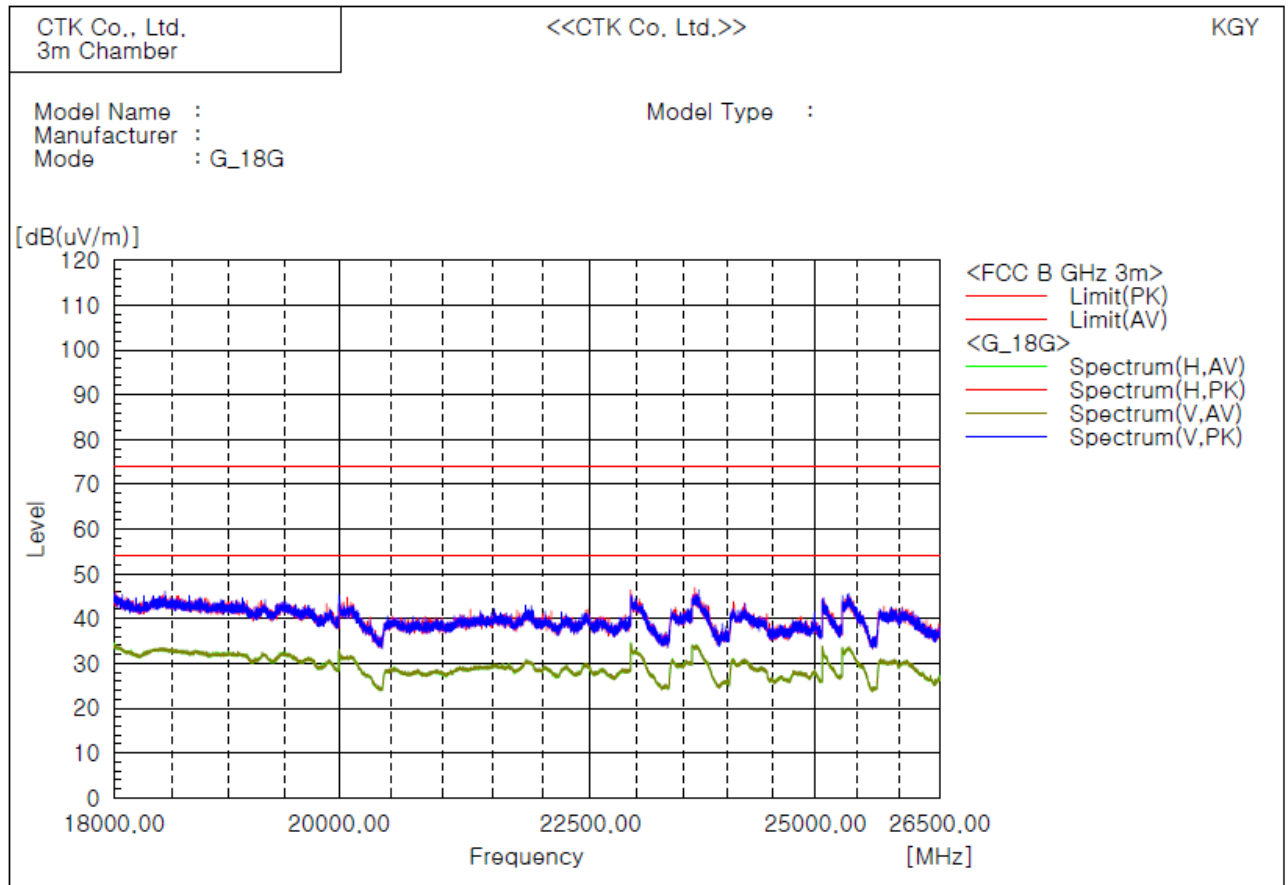

Result : There are more than 20 dB of margin compared to the reference value.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f.(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain




Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

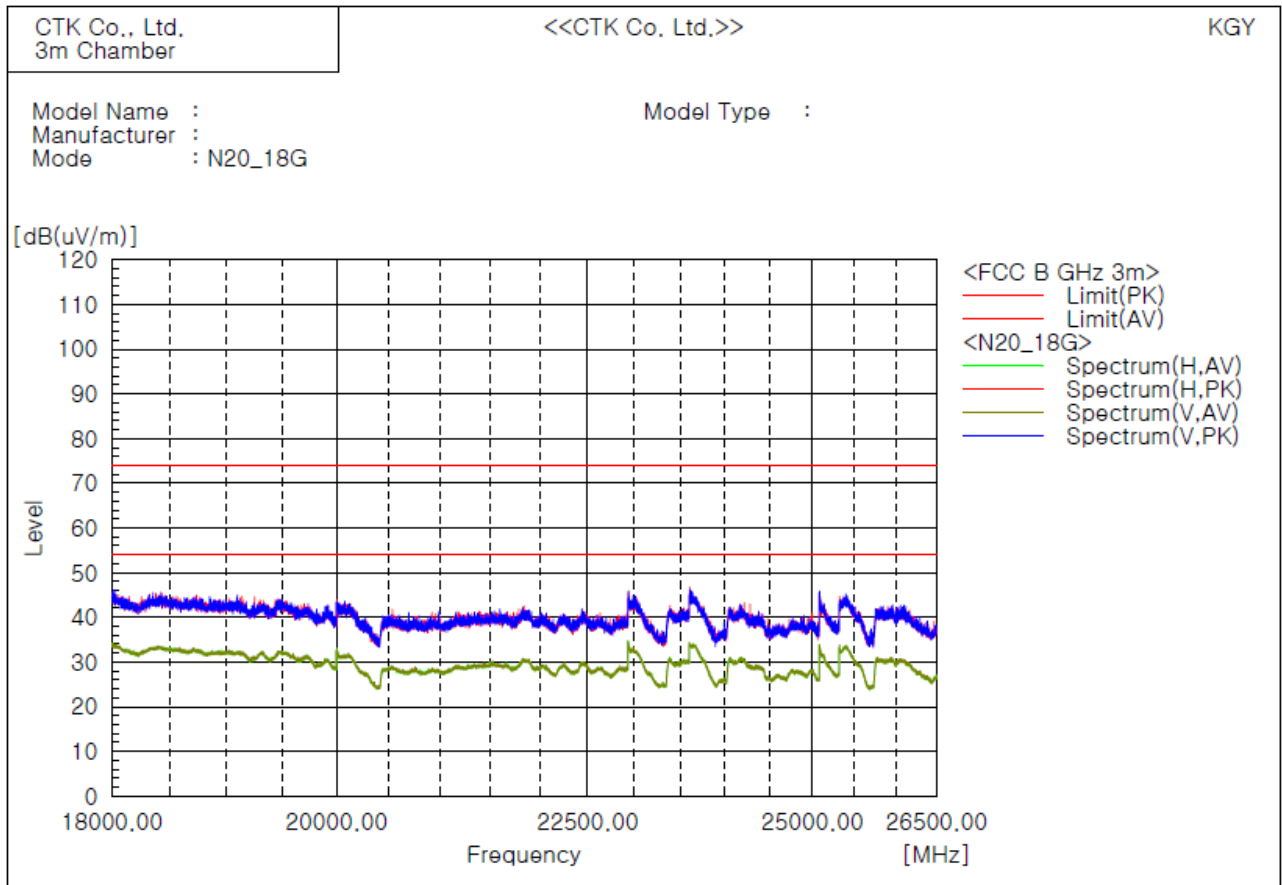

Result : There are more than 20 dB of margin compared to the reference value.

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

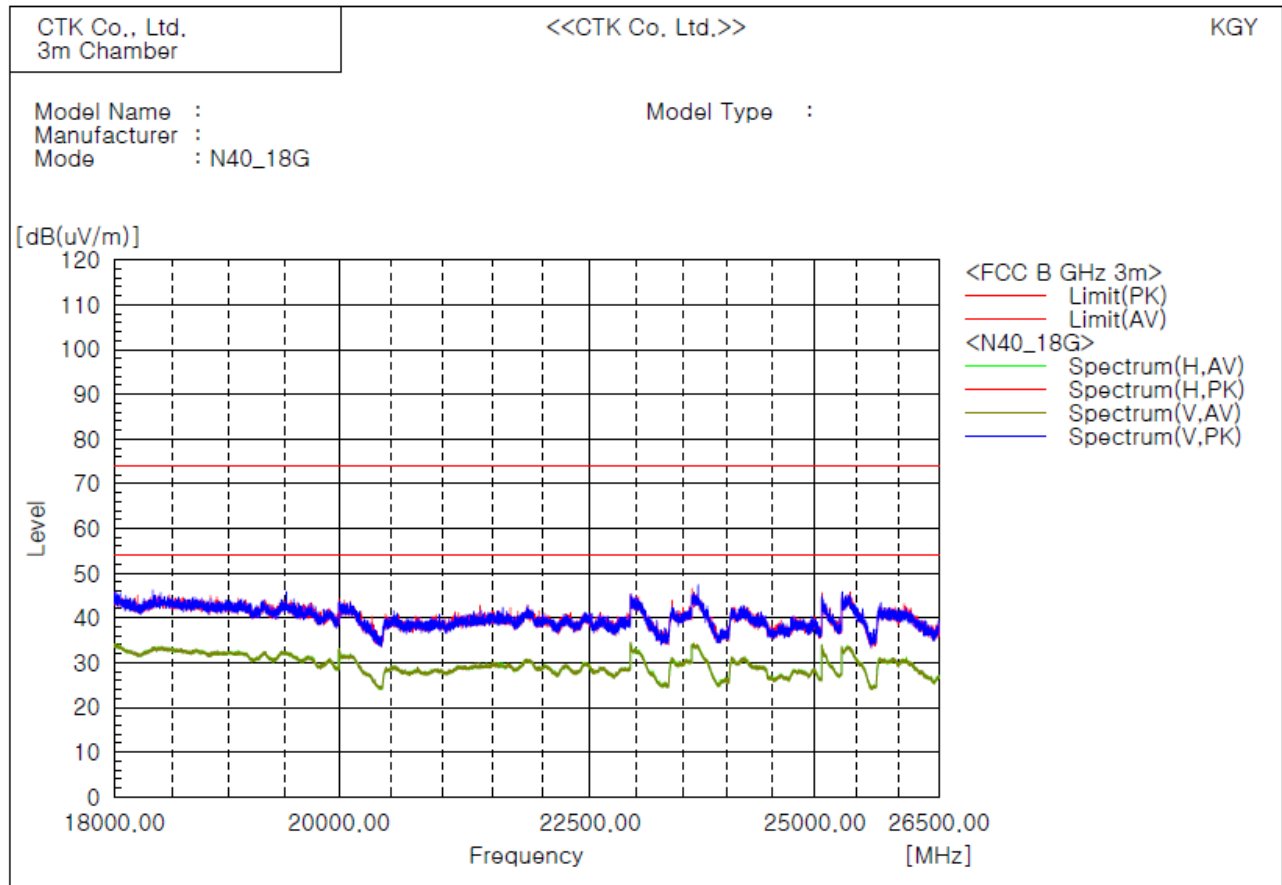

Result : There are more than 20 dB of margin compared to the reference value.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain


5) Restricted Frequency Bands

Test mode : 802.11b, Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :

Complies

Test Data

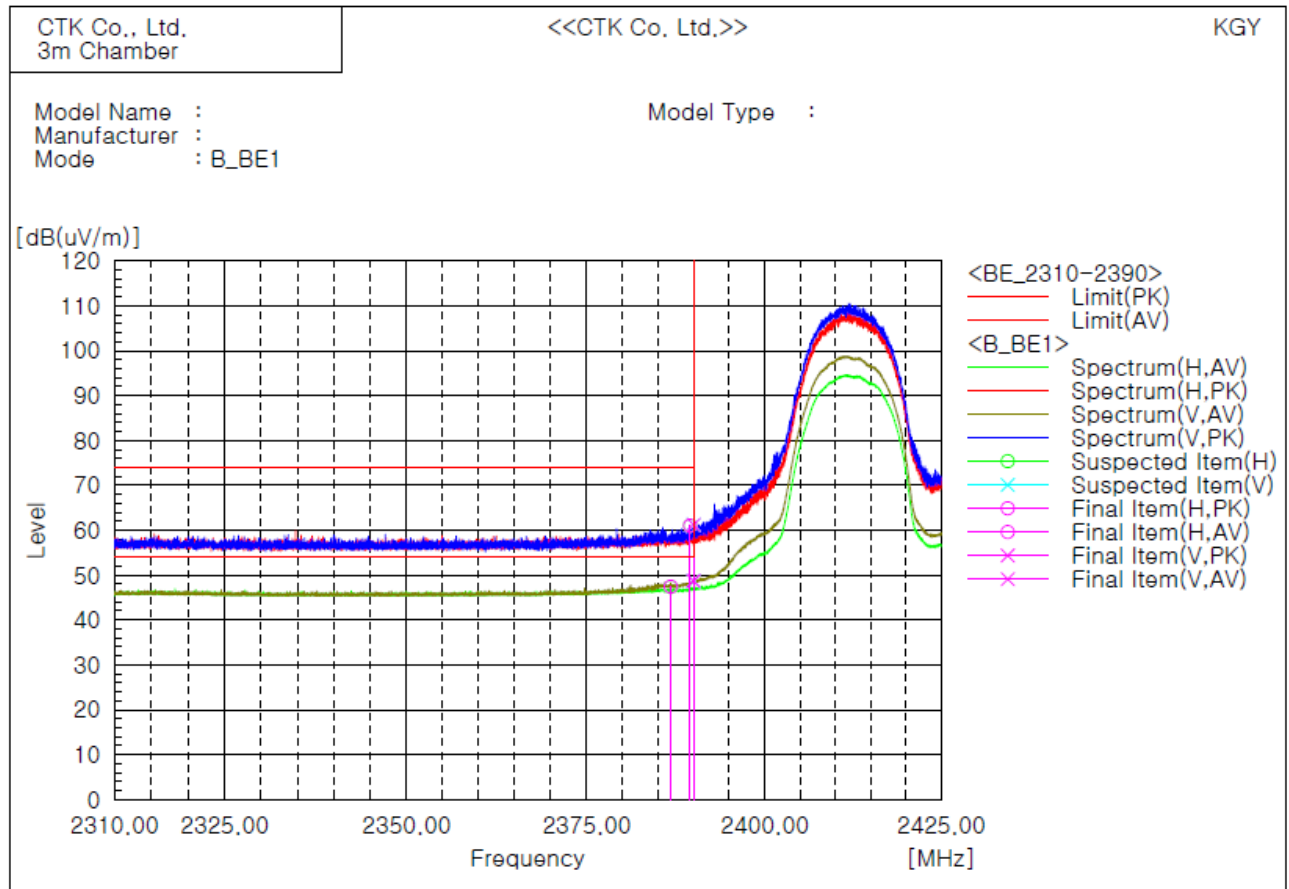

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2386.777	H	54.8	41.2	6.2	61.0	47.4	74.0	54.0	13.0	6.6	464.2	0.0
2	2389.508	H	54.8	41.2	6.2	61.0	47.4	74.0	54.0	13.0	6.6	356.0	299.4
3	2389.968	V	54.9	42.4	6.3	61.2	48.7	74.0	54.0	12.8	5.3	100.0	185.2
4	2389.997	V	54.9	42.4	6.3	61.2	48.7	74.0	54.0	12.8	5.3	100.0	296.2


Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11b, Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :
 Complies

Test Data

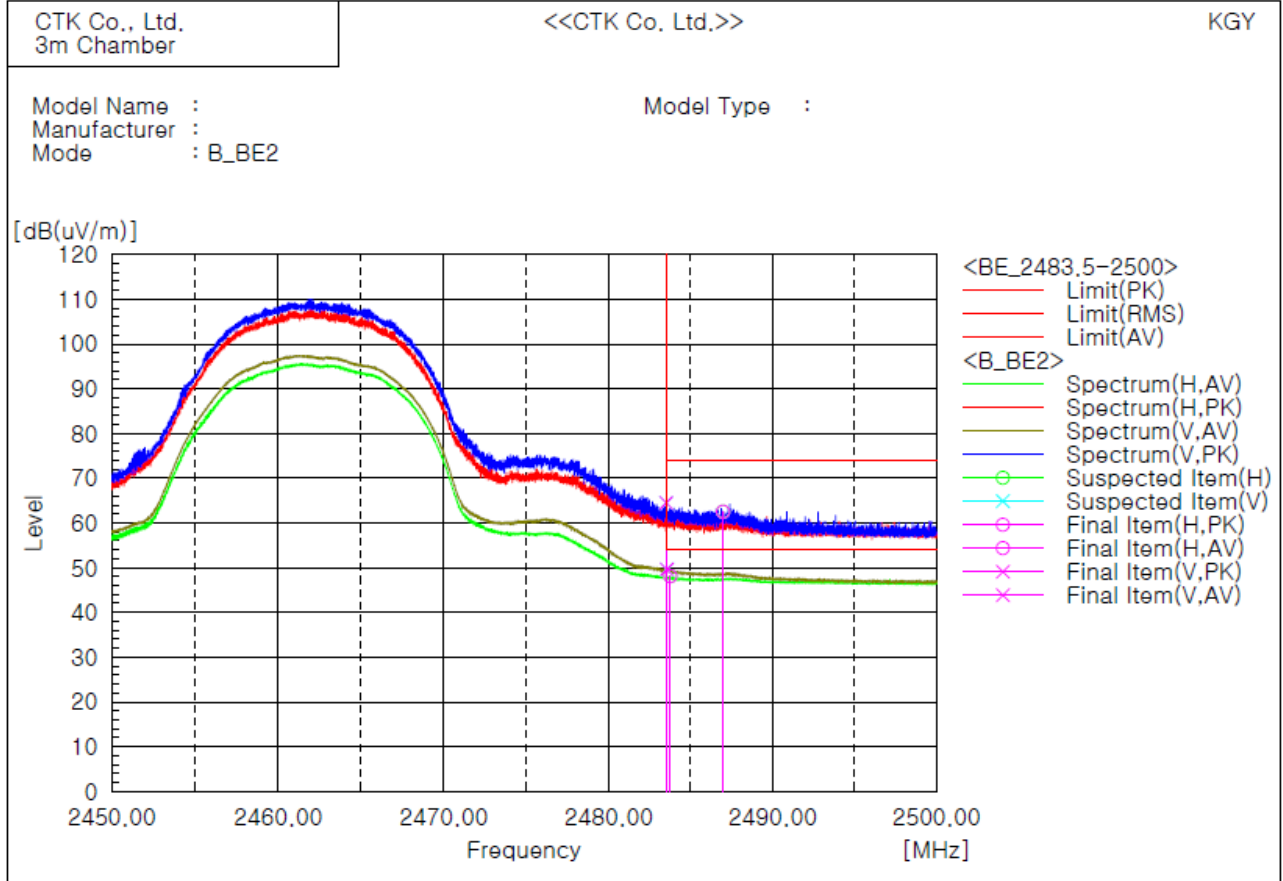

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.506	V	58.3		6.2	64.5		74.0	54.0	9.5		99.8	215.7
2	2483.550	V		43.4	6.2		49.6	74.0	54.0		4.4	99.8	289.9
3	2483.762	H		41.9	6.2		48.1	74.0	54.0		5.9	225.2	73.0
4	2486.975	H	56.3		6.2	62.5		74.0	54.0	11.5		99.8	50.1

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11g, Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :

Complies

Test Data

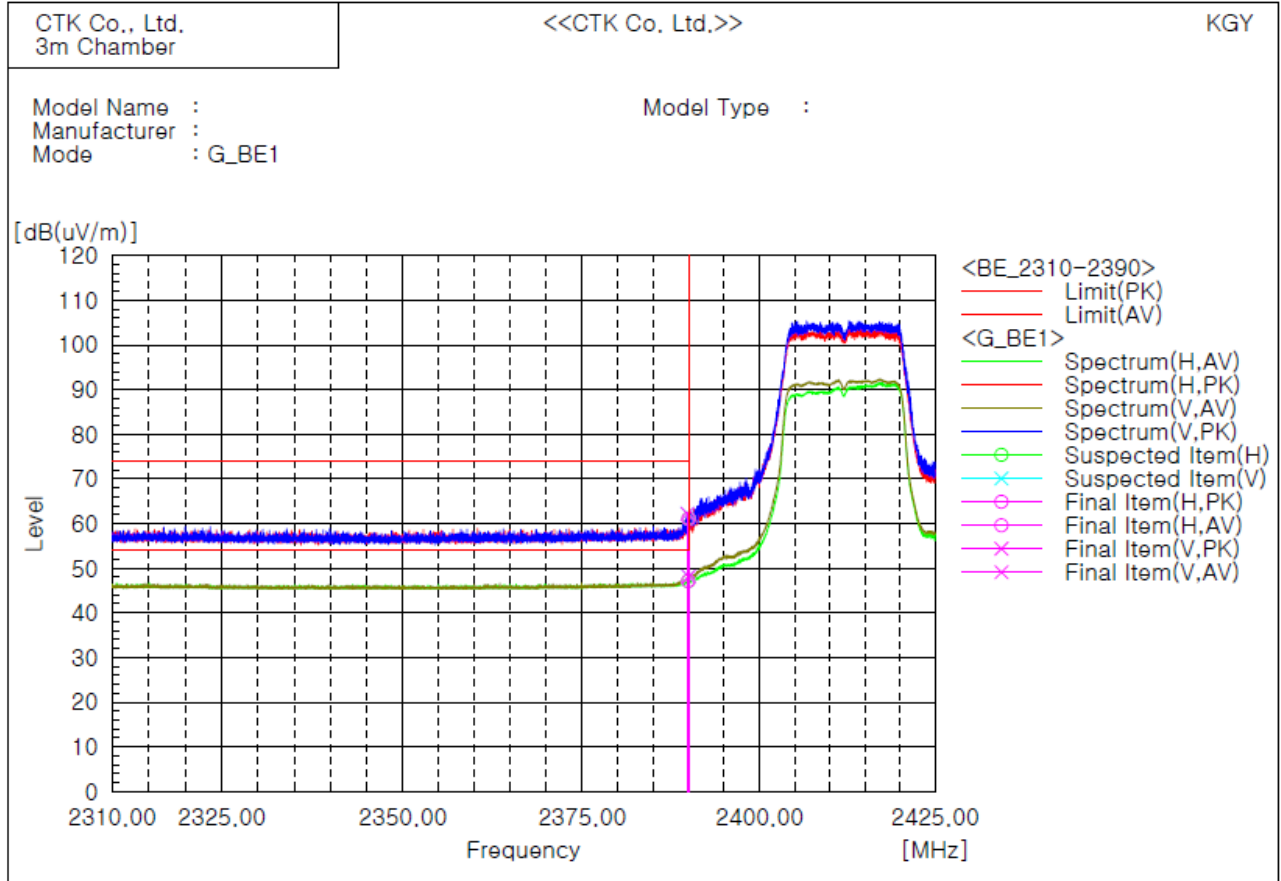

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f. [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2389.810	V	55.9	40.8	6.3	62.2	47.1	74.0	54.0	11.8	6.9	99.8	269.8
2	2389.925	H	54.8	41.8	6.3	61.1	48.1	74.0	54.0	12.9	5.9	99.8	285.2
3	2389.968	H	54.8	41.8	6.3	61.1	48.1	74.0	54.0	12.9	5.9	99.8	285.2
4	2389.982	V	54.8	41.8	6.3	61.1	48.1	74.0	54.0	12.9	5.9	99.8	293.4

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f.(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11g, Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :

Complies

Test Data

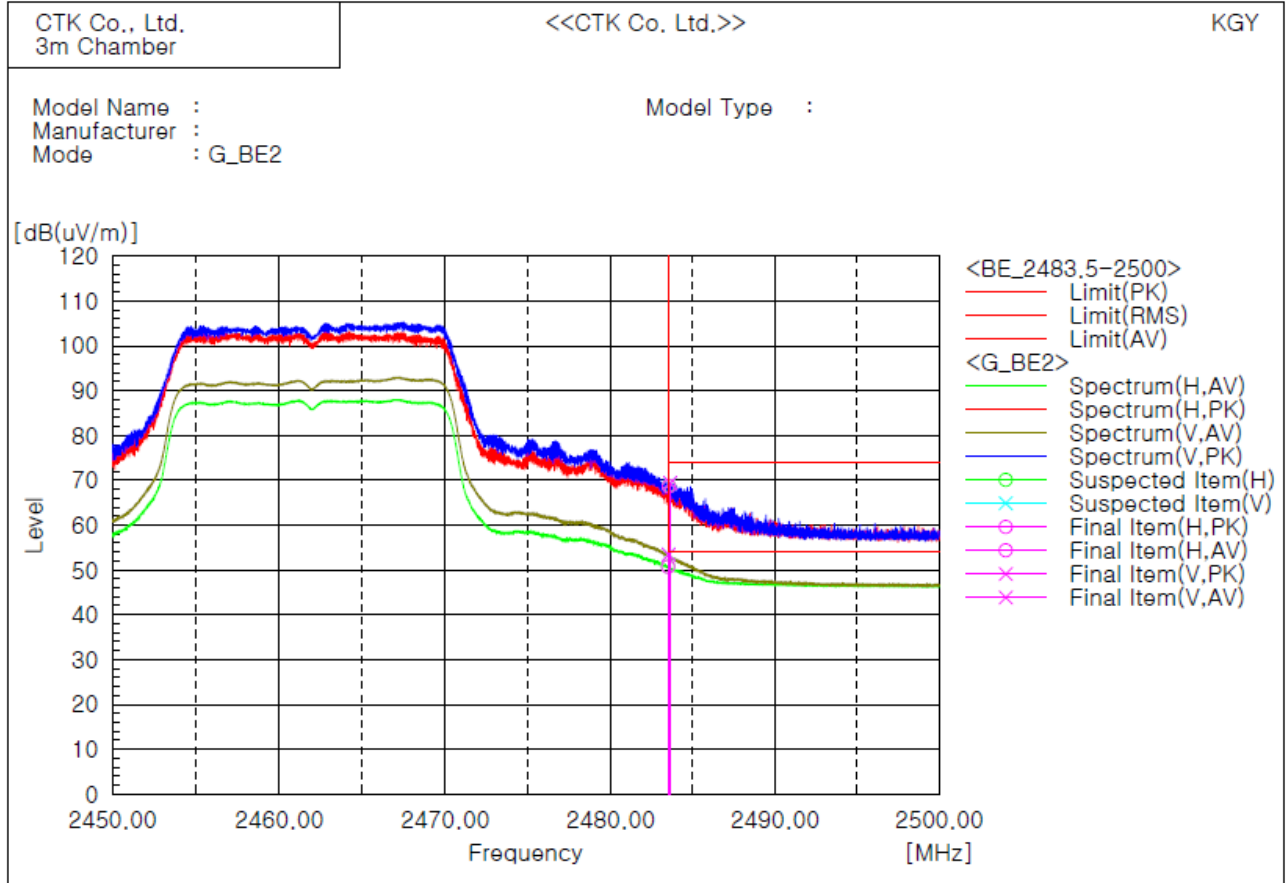

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.500	H	62.5	44.5	6.2	68.7	50.7	74.0	54.0	5.3	3.3	225.7	328.3
2	2483.525	V	63.2	47.2	6.2	69.4	53.4	74.0	54.0	4.6	0.6	99.9	301.6
3	2483.550	H	62.5	44.5	6.2	68.7	50.7	74.0	54.0	5.3	3.3	99.9	260.7
4	2483.625	V	63.2	47.2	6.2	69.4	53.4	74.0	54.0	4.6	0.6	99.9	213.4

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT20), Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :

Complies

Test Data

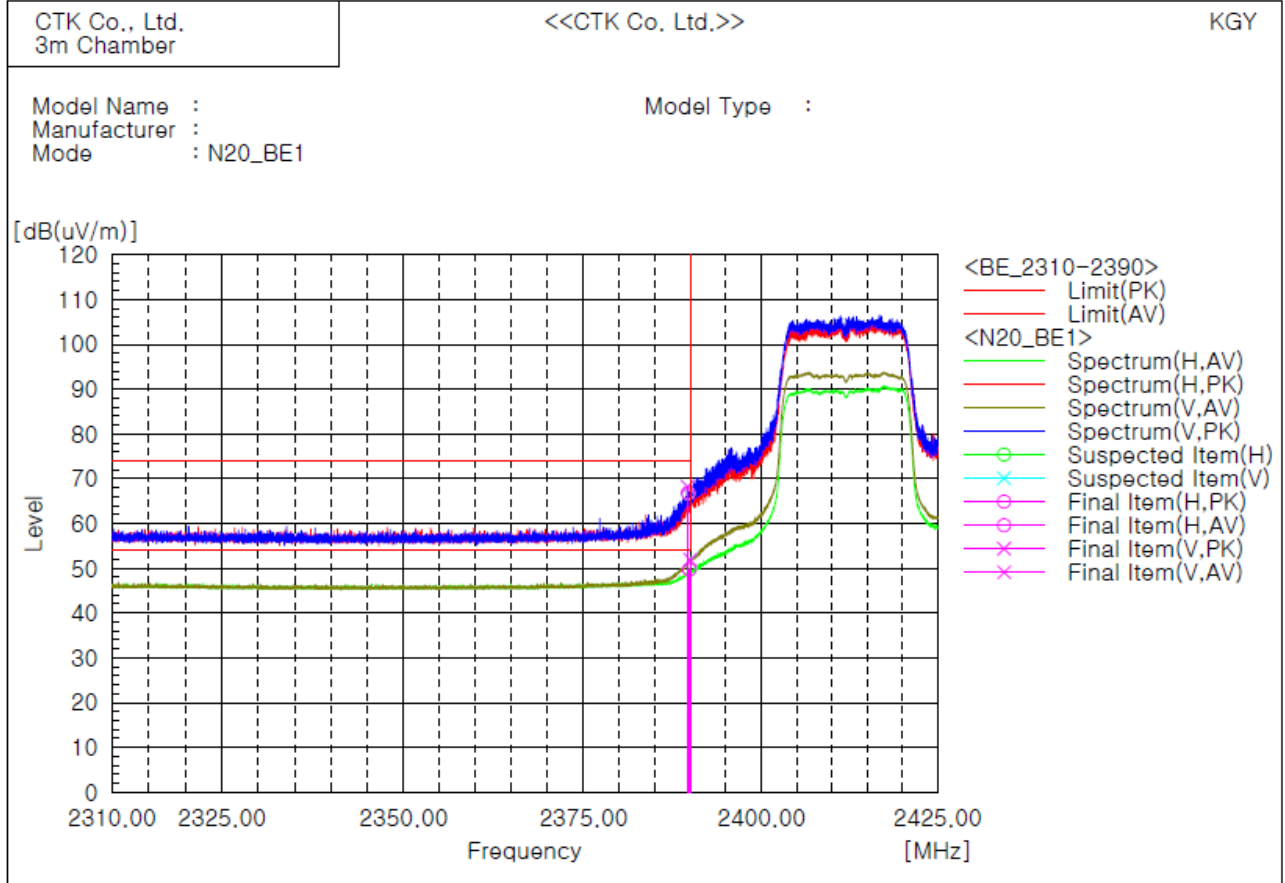

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2389.594	V	61.9	—	6.3	68.2	—	74.0	54.0	5.8	—	100.0	198.5
2	2389.681	H	60.5	—	6.3	66.8	—	74.0	54.0	7.2	—	356.7	299.1
3	2389.867	H	—	43.4	6.3	—	49.7	74.0	54.0	—	4.3	235.0	359.9
4	2389.968	V	—	45.6	6.3	—	51.9	74.0	54.0	—	2.1	100.0	198.5


Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT20), Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :
 Complies

Test Data

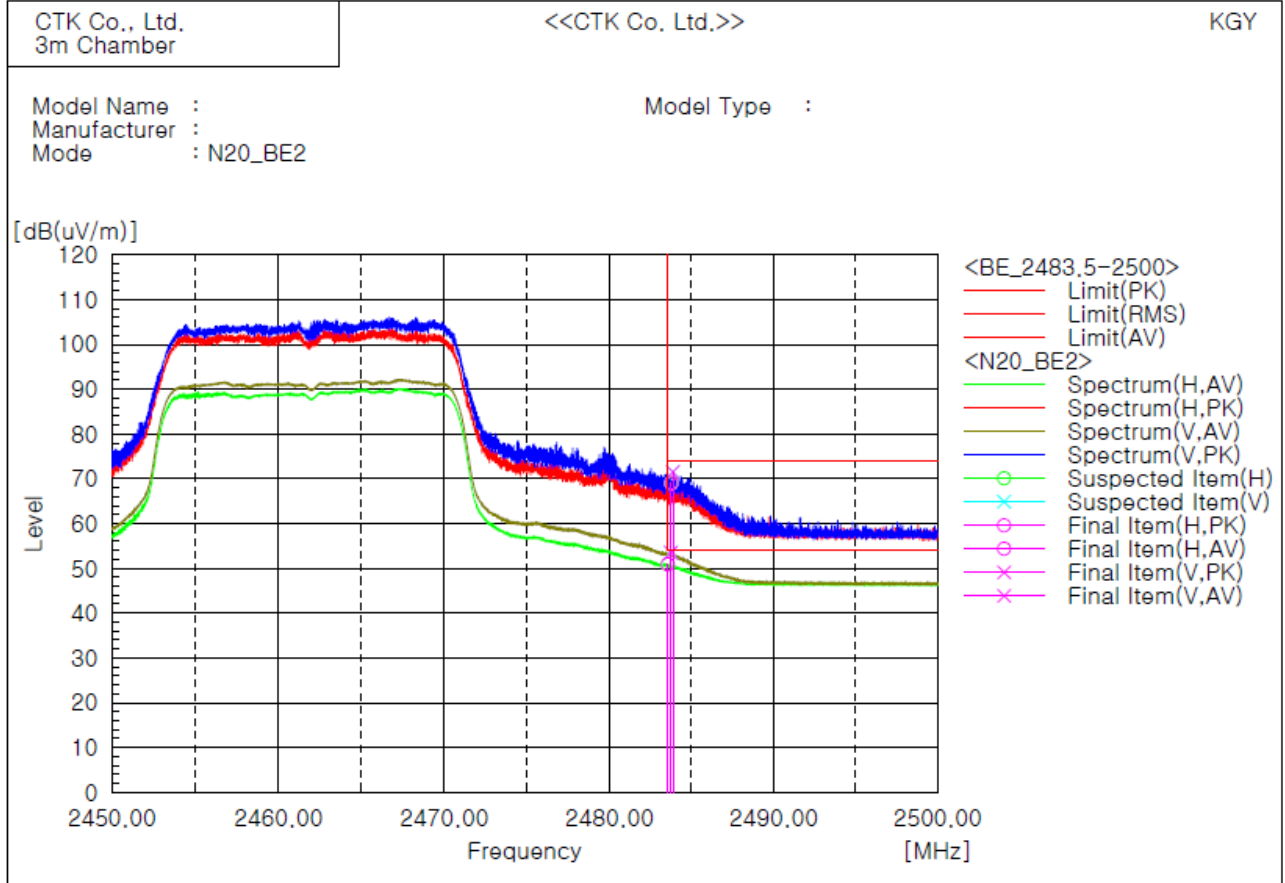

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.769	H	62.8		6.2	69.0	50.9	74.0	54.0	5.0		99.9	49.0
2	2483.556	H		44.7	6.2			74.0	54.0		3.1	225.4	77.2
3	2483.869	V	65.3		6.2	71.5	53.5	74.0	54.0	2.5		99.9	212.1
4	2483.738	V		47.3	6.2			74.0	54.0		0.5	99.9	288.2

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



Test mode : 802.11n(HT40), Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :
 Complies

Test Data

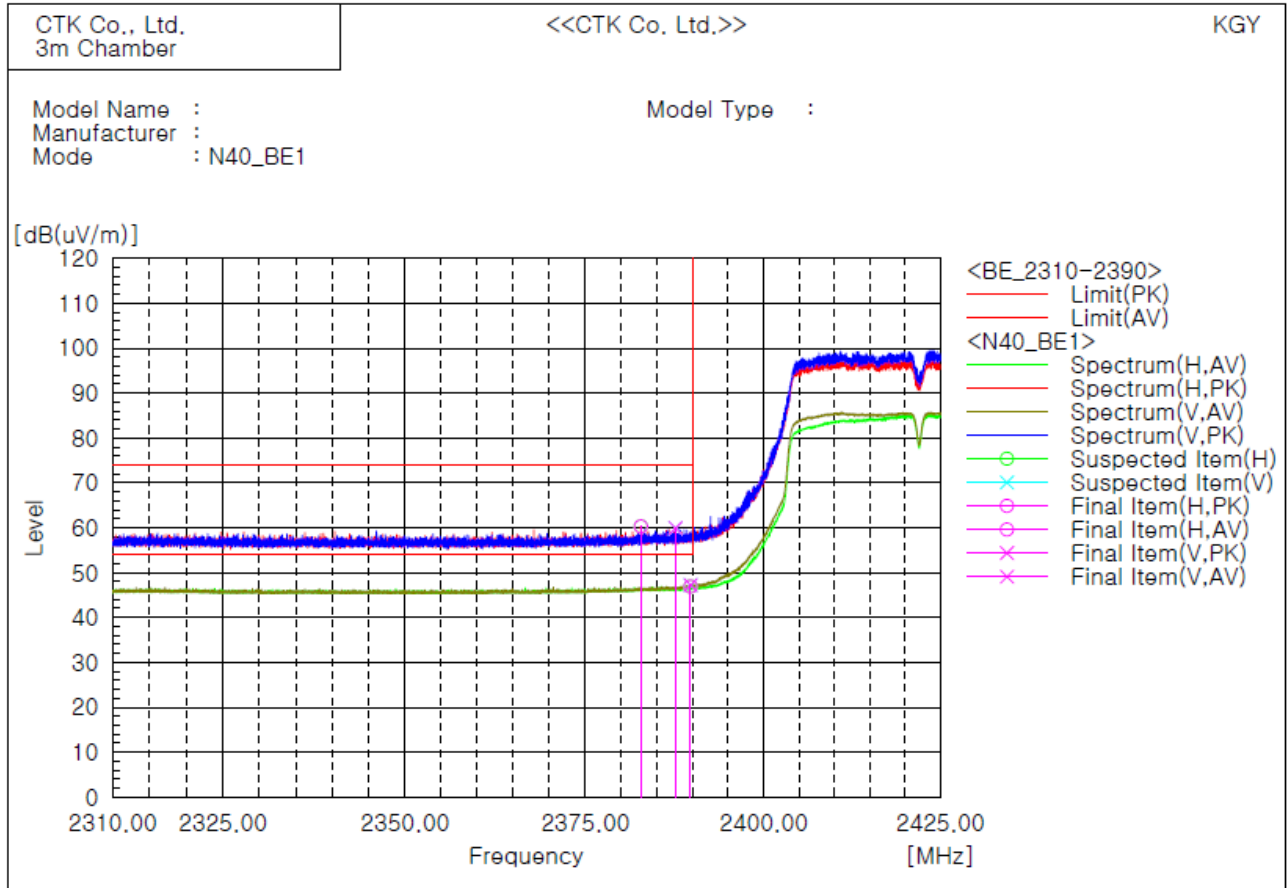

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2382.766	H	54.1		6.2	60.3		74.0	54.0	13.7		345.0	270.9
2	2389.724	H		40.6	6.3		46.9	74.0	54.0		7.1	464.0	0.1
3	2387.611	V	53.7		6.2	59.9		74.0	54.0	14.1		99.8	274.6
4	2389.724	V		40.9	6.3		47.2	74.0	54.0		6.8	99.8	286.4


Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT40), Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :
 Complies

Test Data

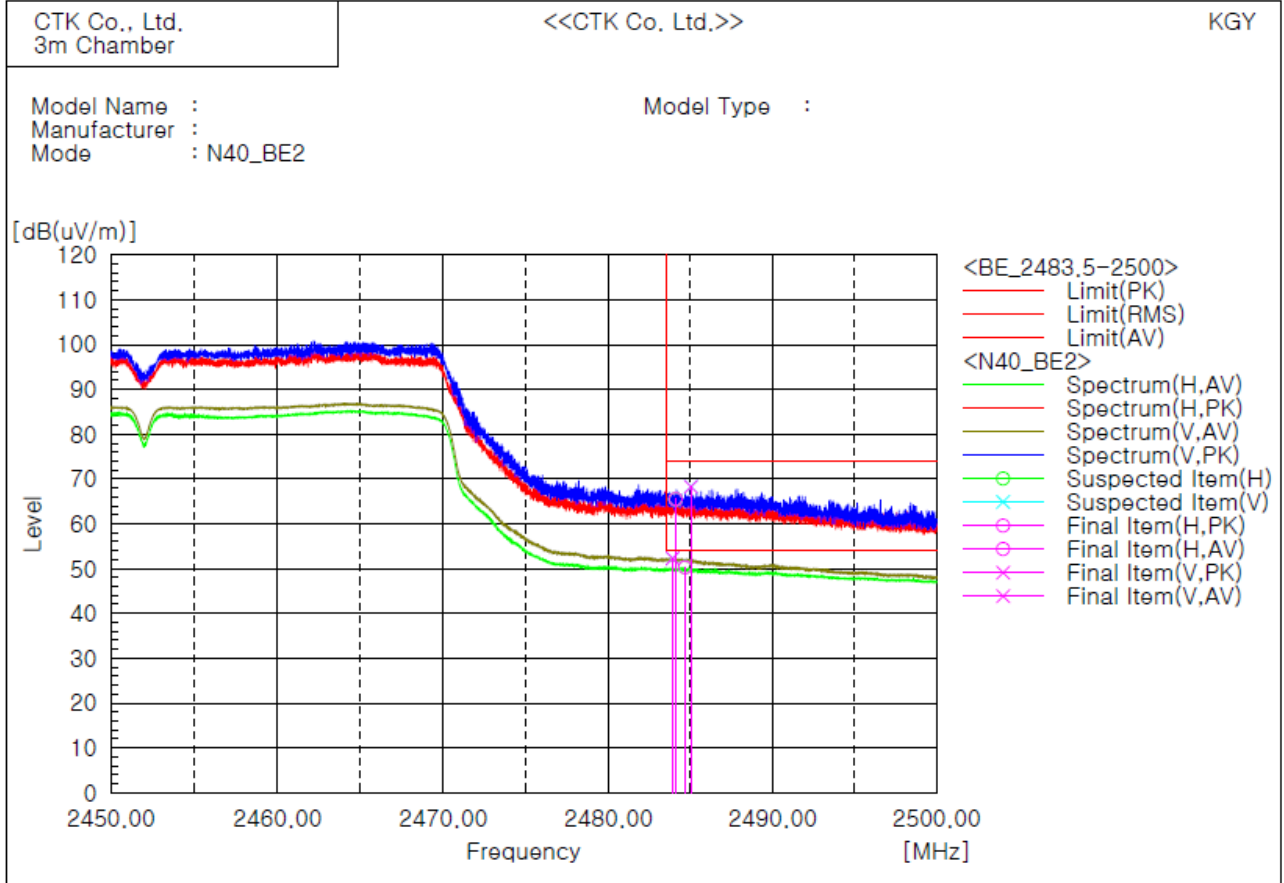

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f. [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.906	V	46.1	46.1	6.2	52.3	52.3	74.0	54.0	1.7	1.7	99.8	299.4
2	2484.100	H	59.3	59.3	6.2	65.5	65.5	74.0	54.0	8.5	8.5	99.8	45.9
3	2484.669	H	44.1	44.1	6.2	50.3	50.3	74.0	54.0	3.7	3.7	225.0	72.7
4	2485.031	V	62.1	62.1	6.2	68.3	68.3	74.0	54.0	5.7	5.7	99.8	211.0

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

[Variant Model : WizFi320-CON]

Test results


1) 9 kHz to 30 MHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

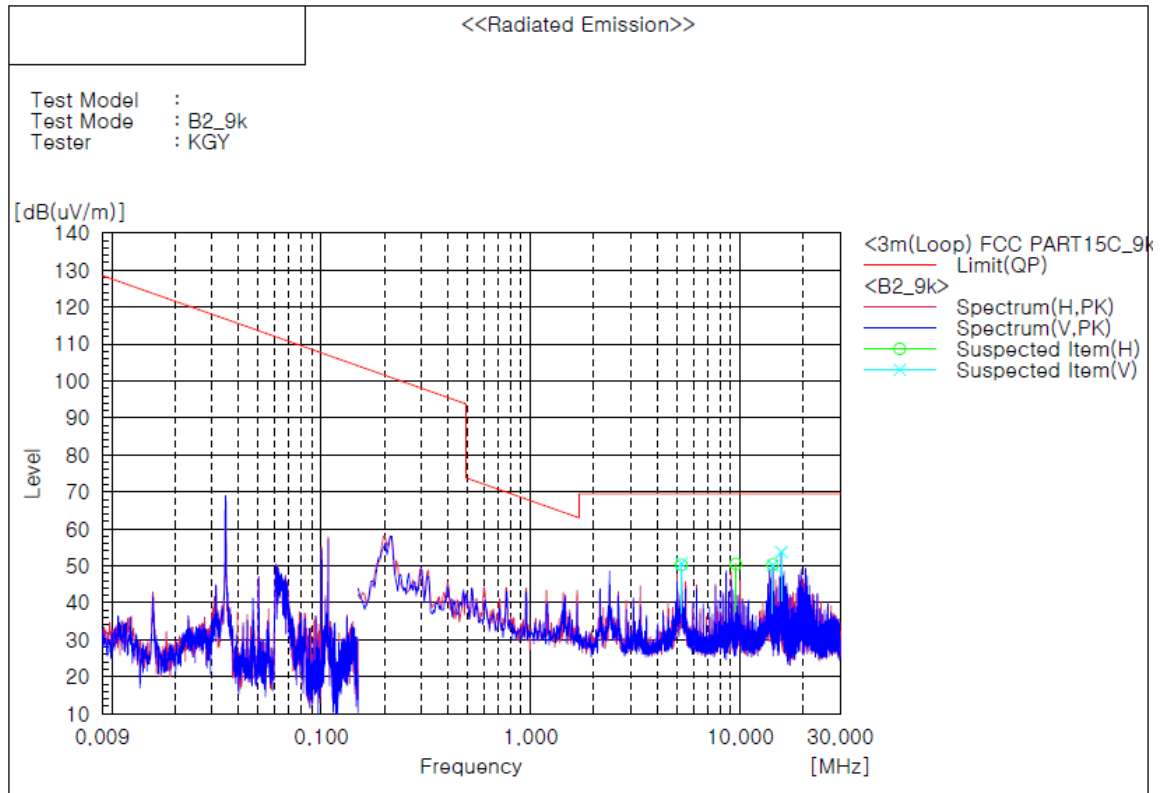

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	5.236	V	25.2	25.4	50.6	69.5	18.9	100.0	252.0
2	5.236	H	24.9	25.4	50.3	69.5	19.2	100.0	252.0
3	9.523	H	24.5	26.0	50.5	69.5	19.0	100.0	9.0
4	14.284	H	24.1	26.2	50.3	69.5	19.2	100.0	4.0
5	14.284	V	24.0	26.2	50.2	69.5	19.3	100.0	28.0
6	15.713	V	27.4	26.3	53.7	69.5	15.8	100.0	4.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

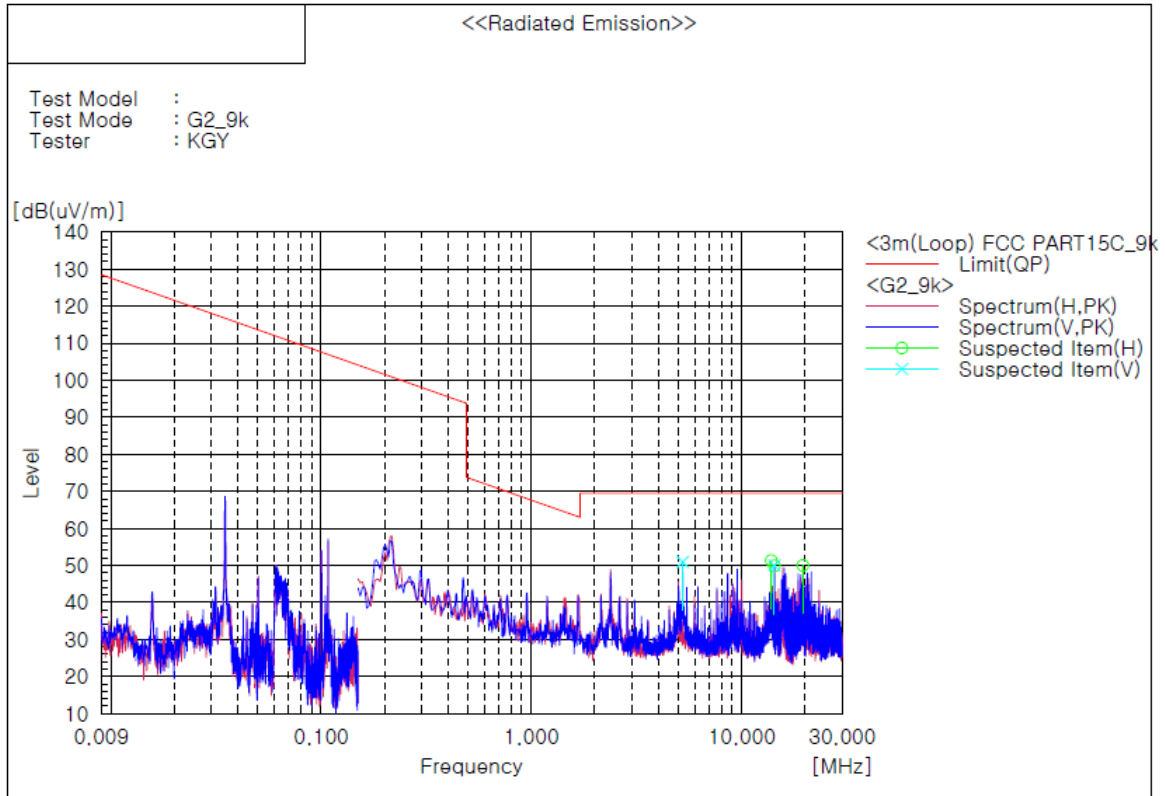

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	5.239	V	25.5	25.4	50.9	69.5	18.6	100.0	288.0
2	13.810	H	25.1	26.2	51.3	69.5	18.2	100.0	101.0
3	14.284	H	23.7	26.2	49.9	69.5	19.6	100.0	283.0
4	14.288	V	23.8	26.2	50.0	69.5	19.5	100.0	228.0
5	19.526	H	23.3	26.7	50.0	69.5	19.5	100.0	263.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

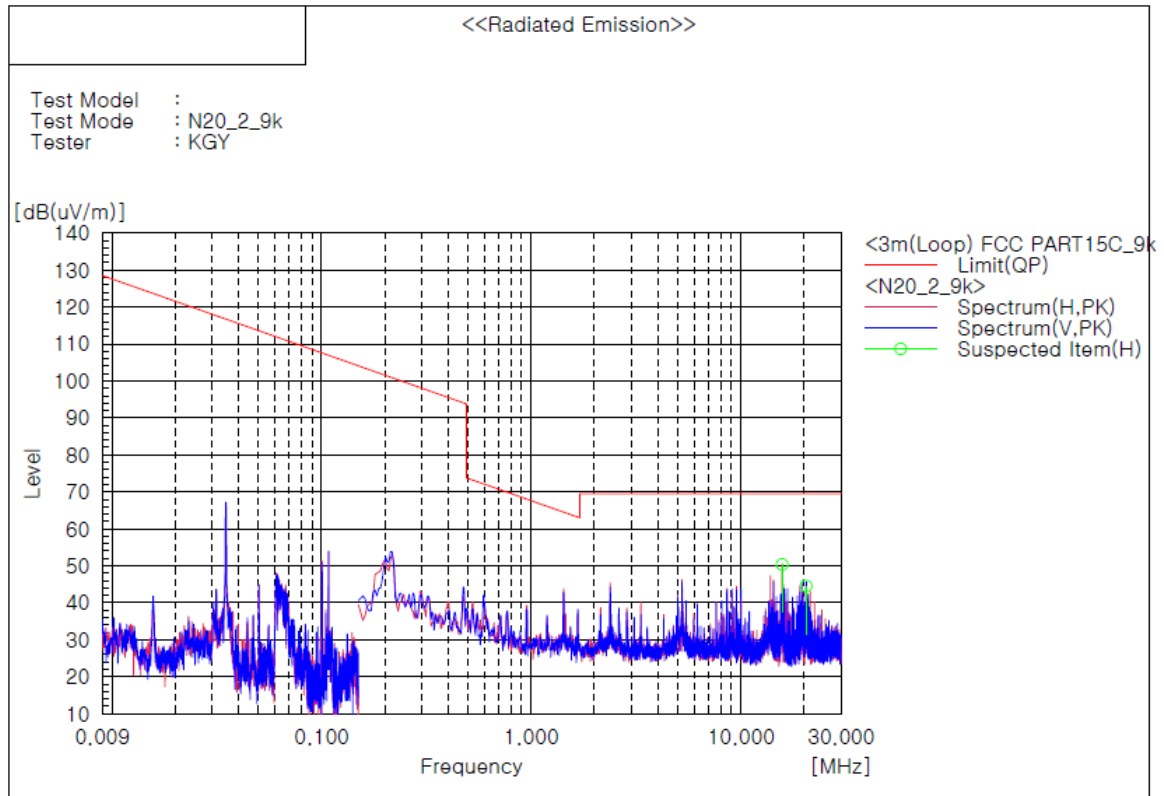

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	15.717	H	24.1	26.3	50.4	69.5	19.1	100.0	246.0
2	20.474	H	17.7	26.8	44.5	69.5	25.0	100.0	262.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

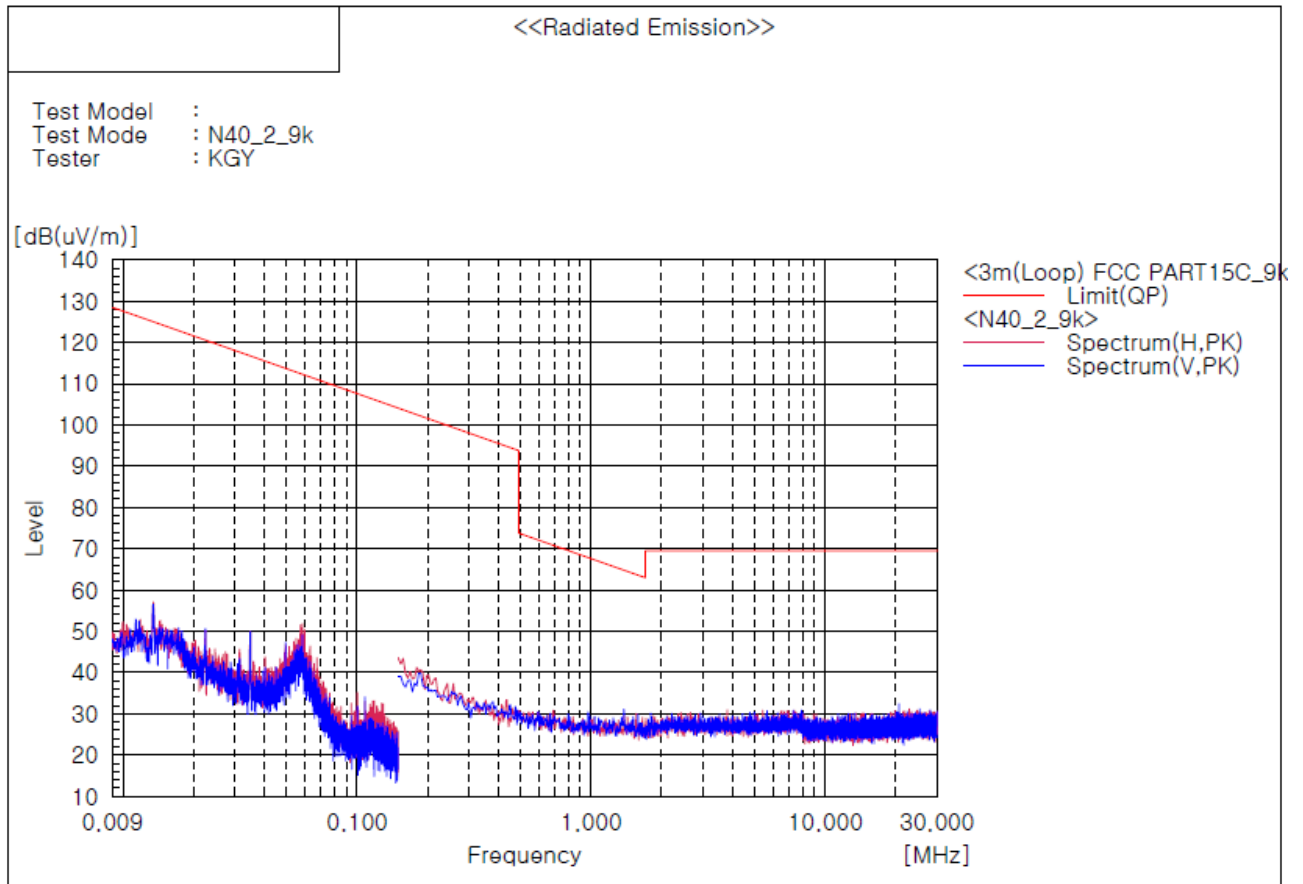

Result : There are more than 20 dB of margin compared to the reference value.

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator
4. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
5. This data is the Peak(PK) value.


2) 30 MHz to 1 GHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

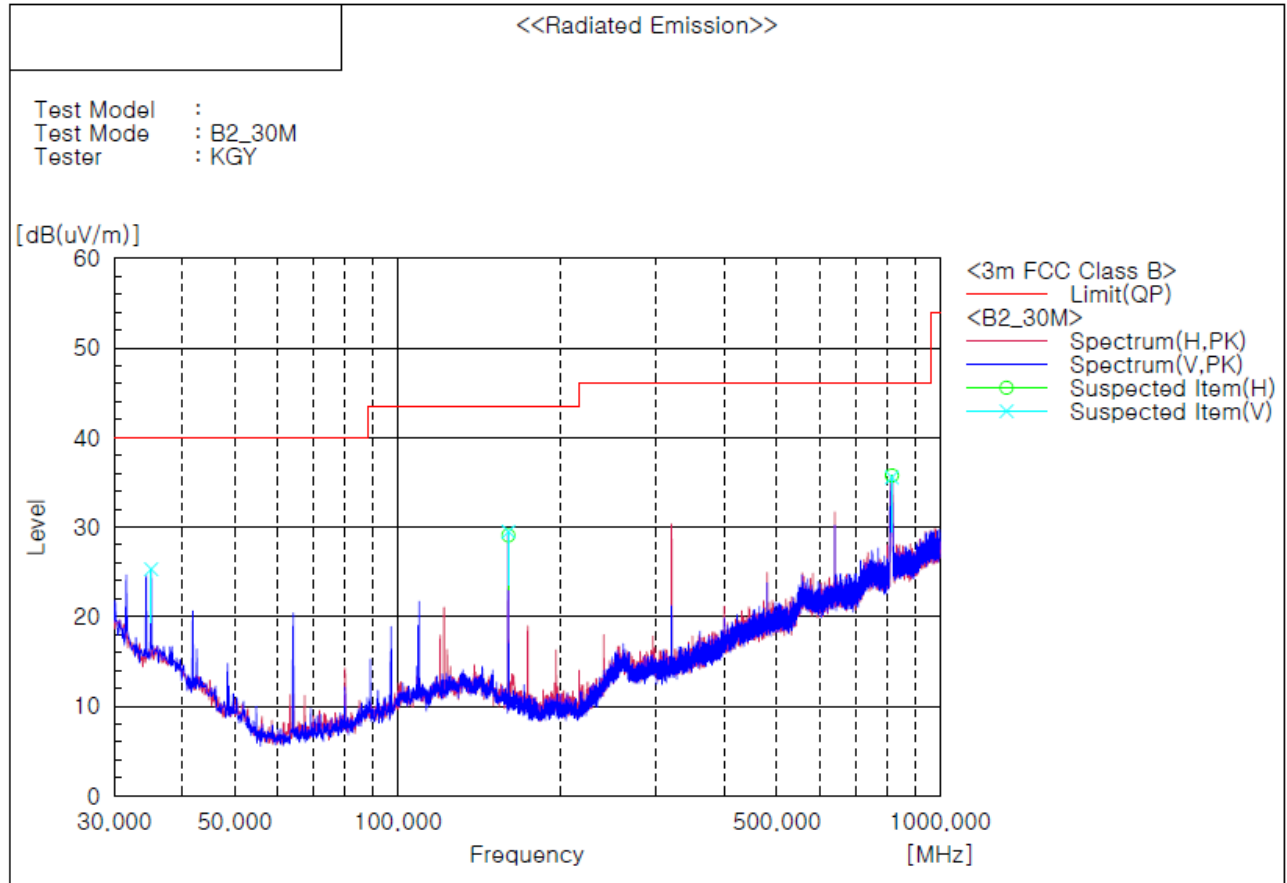

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	35.093	V	34.5	-9.2	25.3	40.0	14.7	101.0	189.0
2	159.980	V	42.4	-12.9	29.5	43.5	14.0	101.0	359.0
3	159.980	H	42.0	-12.9	29.1	43.5	14.4	209.0	318.0
4	815.094	V	32.1	3.4	35.5	46.0	10.5	101.0	275.0
5	815.943	H	32.3	3.5	35.8	46.0	10.2	100.0	174.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

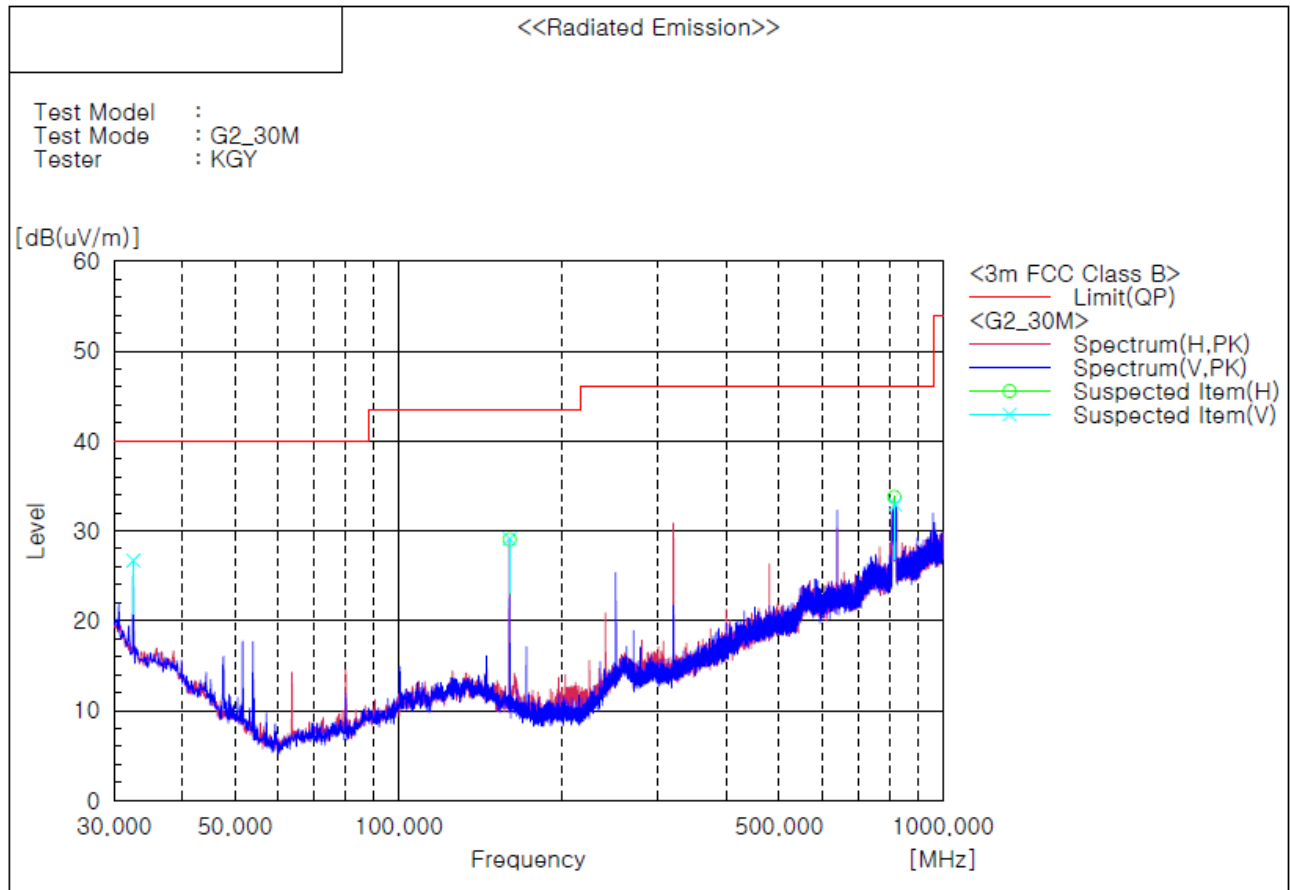

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	32.546	V	34.6	-7.9	26.7	40.0	13.3	101.0	155.0
2	159.980	V	42.0	-12.9	29.1	43.5	14.4	101.0	305.0
3	159.980	H	41.9	-12.9	29.0	43.5	14.5	194.0	322.0
4	814.973	H	30.4	3.4	33.8	46.0	12.2	194.0	205.0
5	817.519	V	29.3	3.6	32.9	46.0	13.1	101.0	252.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

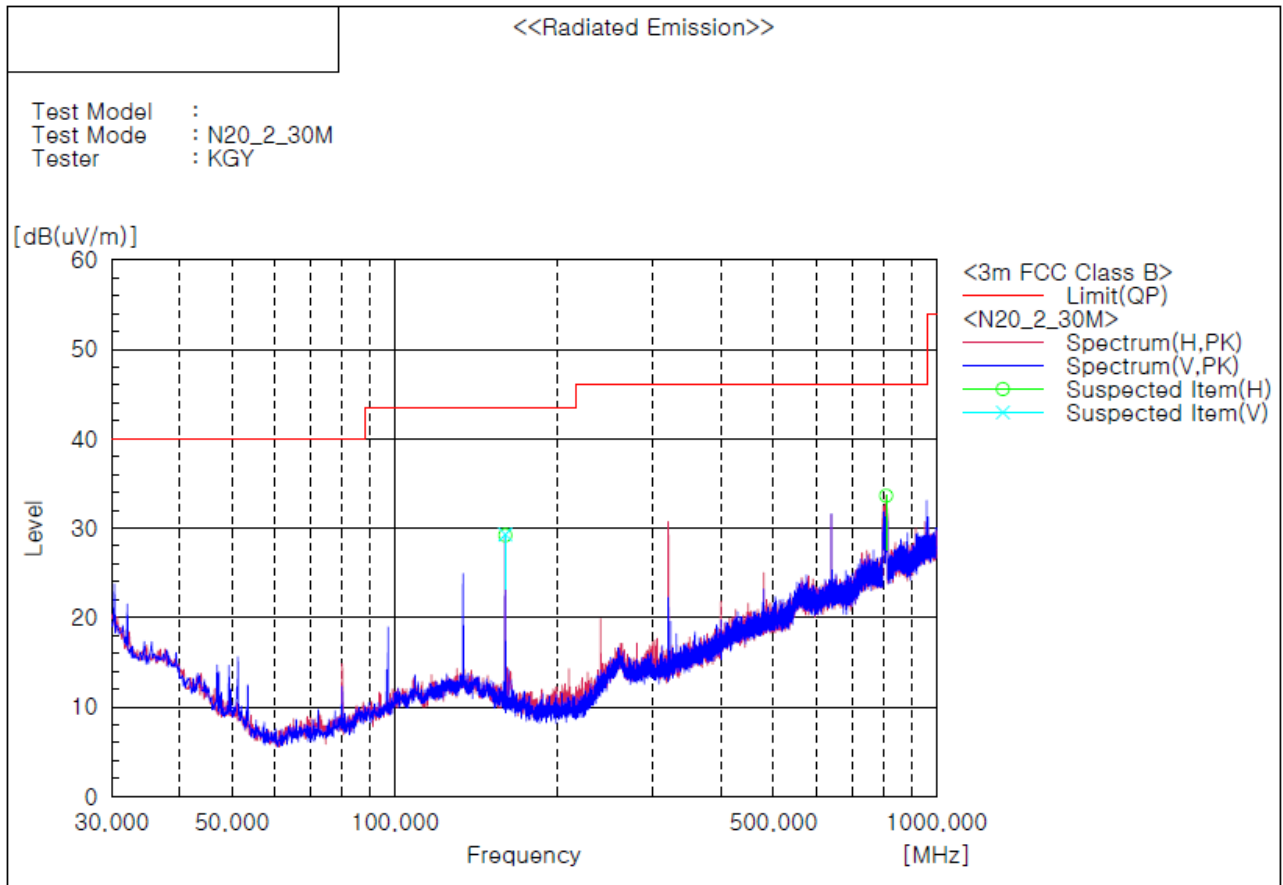

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	159.980	V	42.2	-12.9	29.3	43.5	14.2	101.0	182.0
2	159.980	H	42.1	-12.9	29.2	43.5	14.3	194.0	336.0
3	807.819	H	30.4	3.2	33.6	46.0	12.4	101.0	205.0

Remark :


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

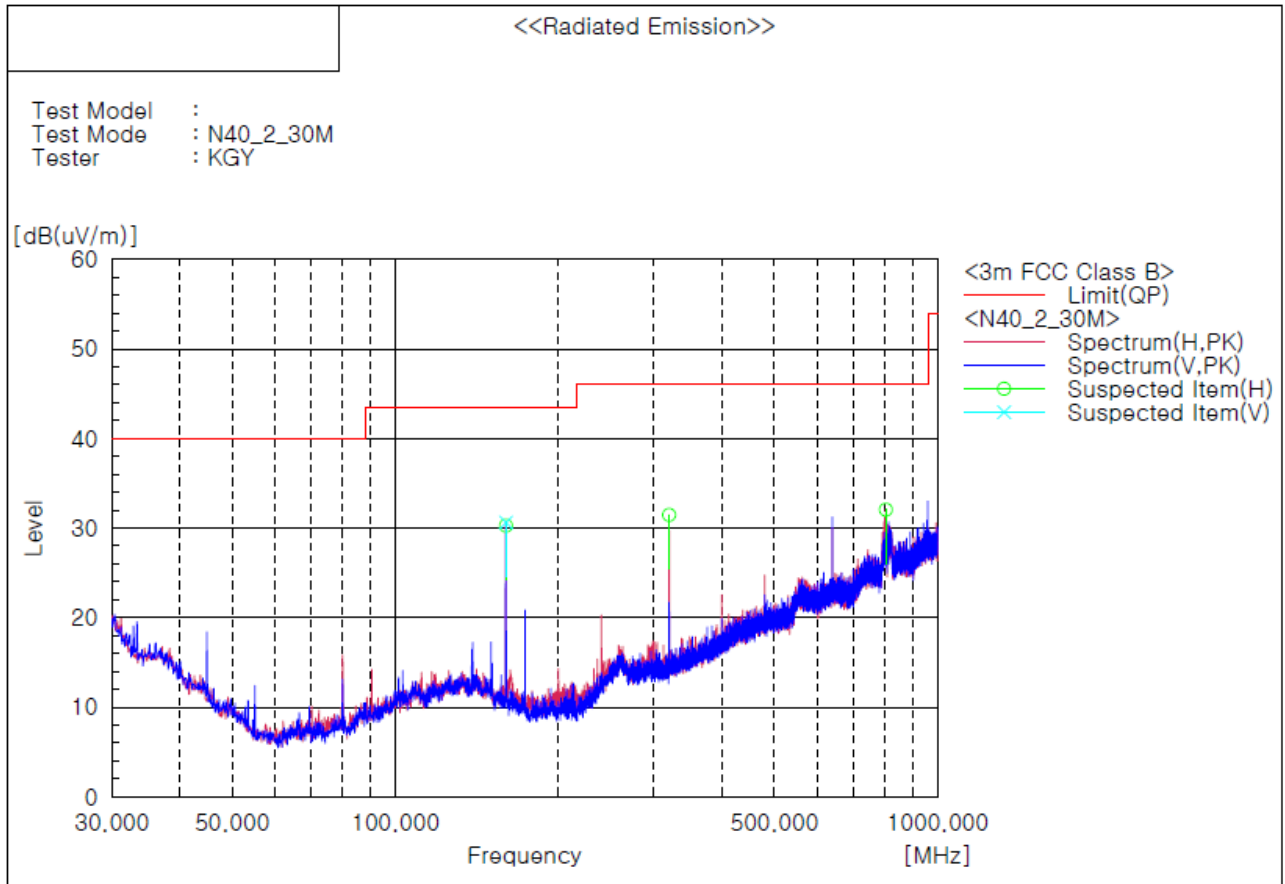

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]
1	159.980	V	43.5	-12.9	30.6	43.5	12.9	101.0	321.0
2	159.980	H	43.2	-12.9	30.3	43.5	13.2	209.0	330.0
3	320.030	H	39.7	-8.2	31.5	46.0	14.5	100.0	322.0
4	803.090	H	29.0	3.1	32.1	46.0	13.9	100.0	195.0

Remark :

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.


3) 1 GHz to 18 GHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

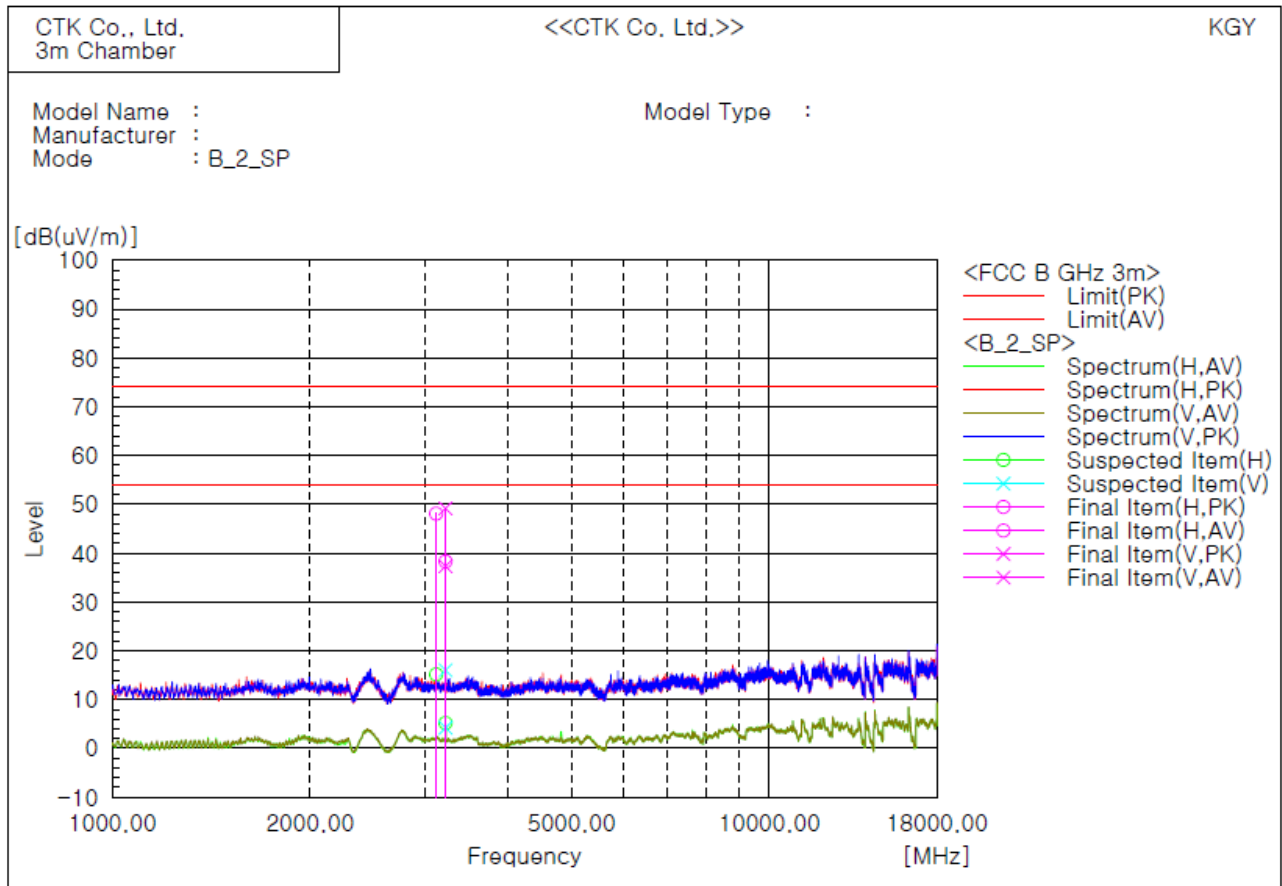

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3112.250	H	49.1		-1.0	48.1		74.0	54.0	25.9		225.0	267.3
2	3216.375	H		39.0	-0.7		38.3	74.0	54.0		15.7	99.8	338.8
3	3216.375	V	49.9		-0.7	49.2		74.0	54.0	24.8		235.0	57.4
4	3216.375	V		38.0	-0.7		37.3	74.0	54.0		16.7	99.8	302.7

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

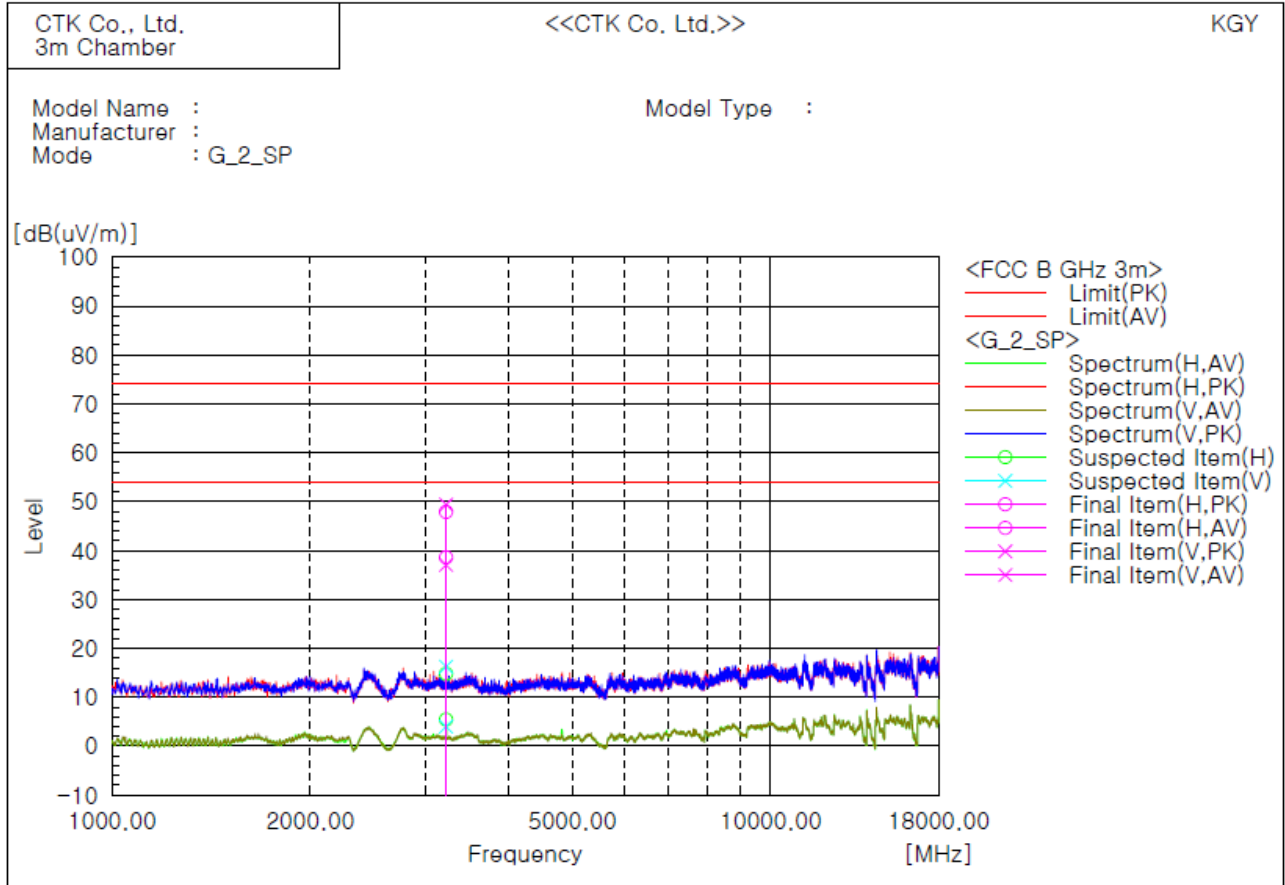

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3216.375	H	48.6		-0.7	47.9		74.0		26.1		99.9	0.0
2	3216.375	H		39.3	-0.7		38.6	74.0	54.0		15.4	99.9	322.0
3	3216.375	V	50.1		-0.7	49.4		74.0	54.0	24.6		236.4	59.7
4	3216.375	V		37.8	-0.7		37.1	74.0	54.0		16.9	99.9	300.5

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No. :
 CTK-2021-02086
 Page (62) / (79)Pages

Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

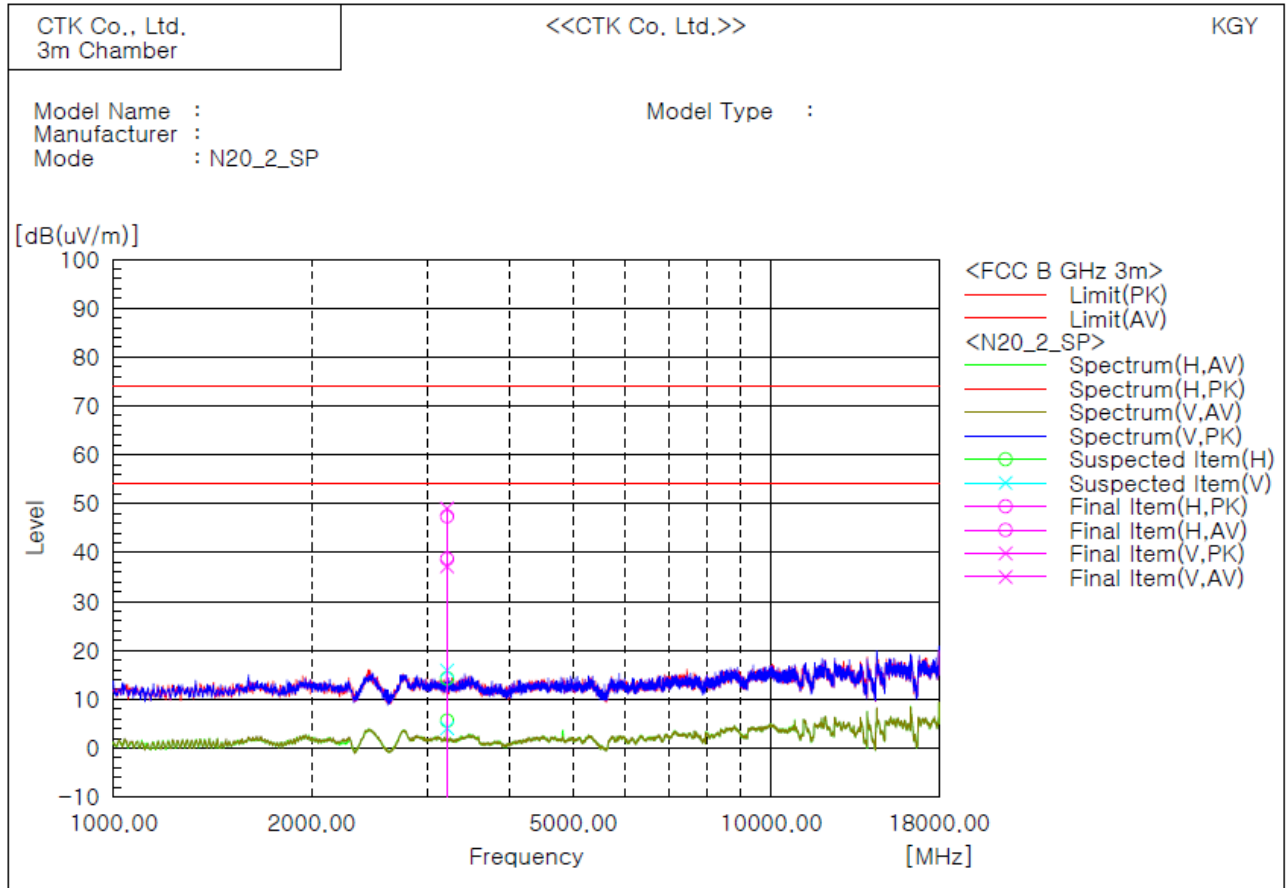

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f. [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3216.375	H	49.7	39.4	-0.7	49.0	38.7	74.0	54.0	25.0	15.3	99.8	318.5
2	3216.375	V	49.7	37.9	-0.7	49.0	37.2	74.0	54.0	25.0	16.8	233.4	58.4
3	3216.375	V	49.7	37.9	-0.7	49.0	37.2	74.0	54.0	25.0	16.8	99.8	305.0
4	3216.375	H	48.1	37.9	-0.7	47.4	37.2	74.0	54.0	26.6	15.3	99.8	118.5

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501


Report No. :
 CTK-2021-02086
 Page (63) / (79)Pages

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

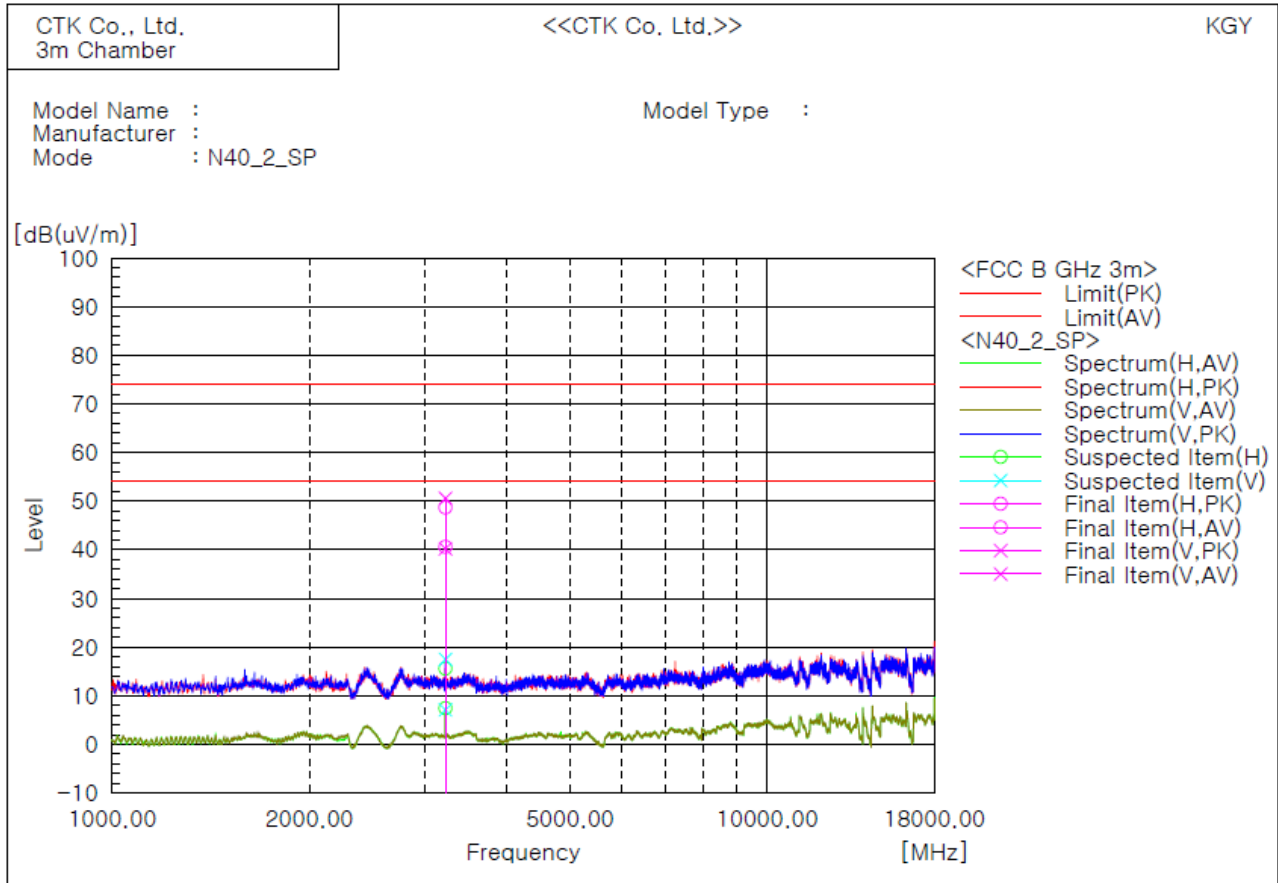

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	3229.125	H	49.4		-0.7	48.7		74.0	54.0	25.3		99.8	359.9
2	3229.125	H		41.3	-0.7		40.6	74.0	54.0		13.4	99.8	320.9
3	3229.125	V	51.3		-0.7	50.6		74.0	54.0	23.4		235.4	59.0
4	3229.125	V		40.9	-0.7		40.2	74.0	54.0		13.8	99.8	289.9

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Band reject filter was used from 1 GHz to 18 GHz


4) 18 GHz to 26.5 GHz

Test mode : 802.11b, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

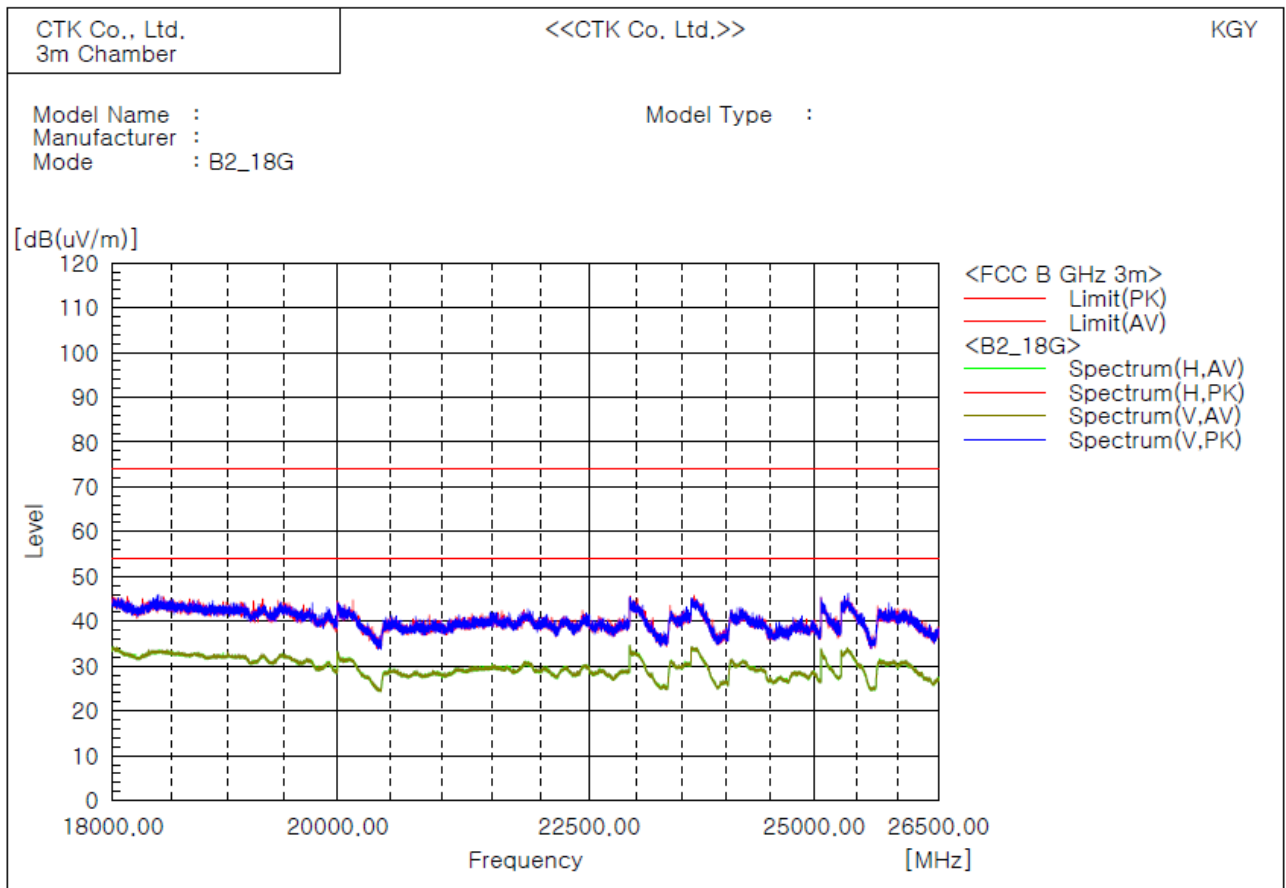

Result : There are more than 20 dB of margin compared to the reference value.

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11g, Lowest channel (Worst case)

The requirements are :

Complies

Test Data

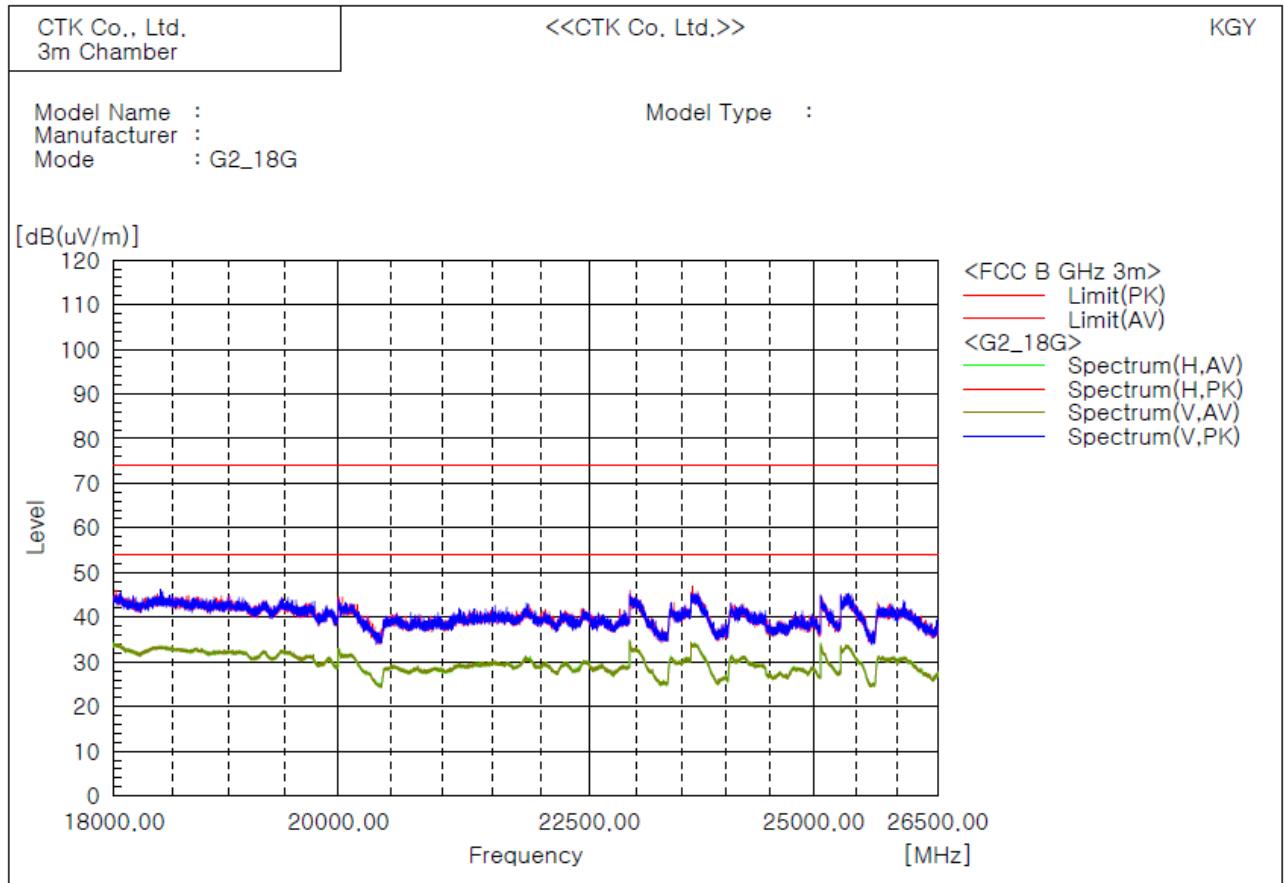

Result : There are more than 20 dB of margin compared to the reference value.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f.(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501


Report No.:
CTK-2021-02086
Page (66) / (79)Pages

Test mode : 802.11n(HT20), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

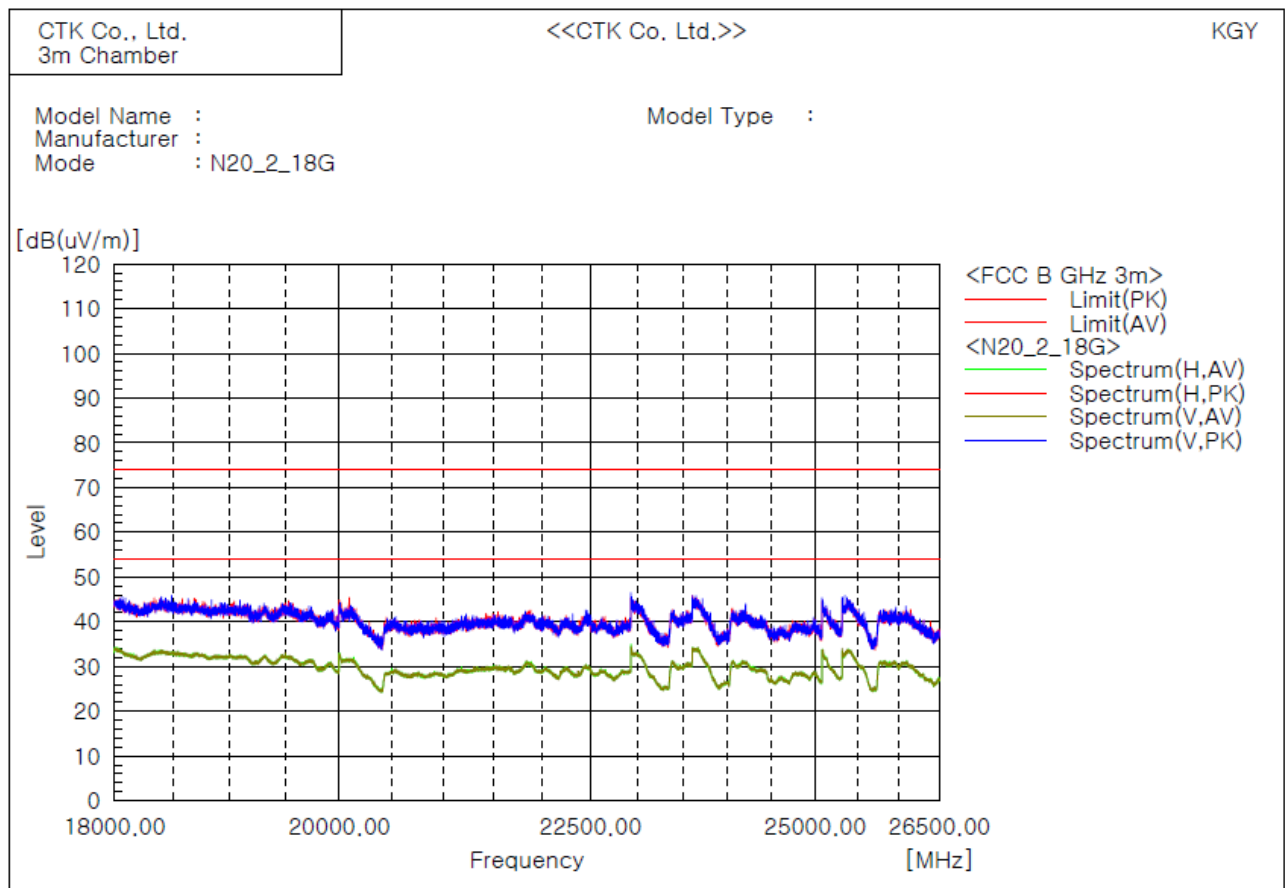

Result : There are more than 20 dB of margin compared to the reference value.

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f.(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT40), Lowest channel (Worst case)

The requirements are :

Complies

Test Data

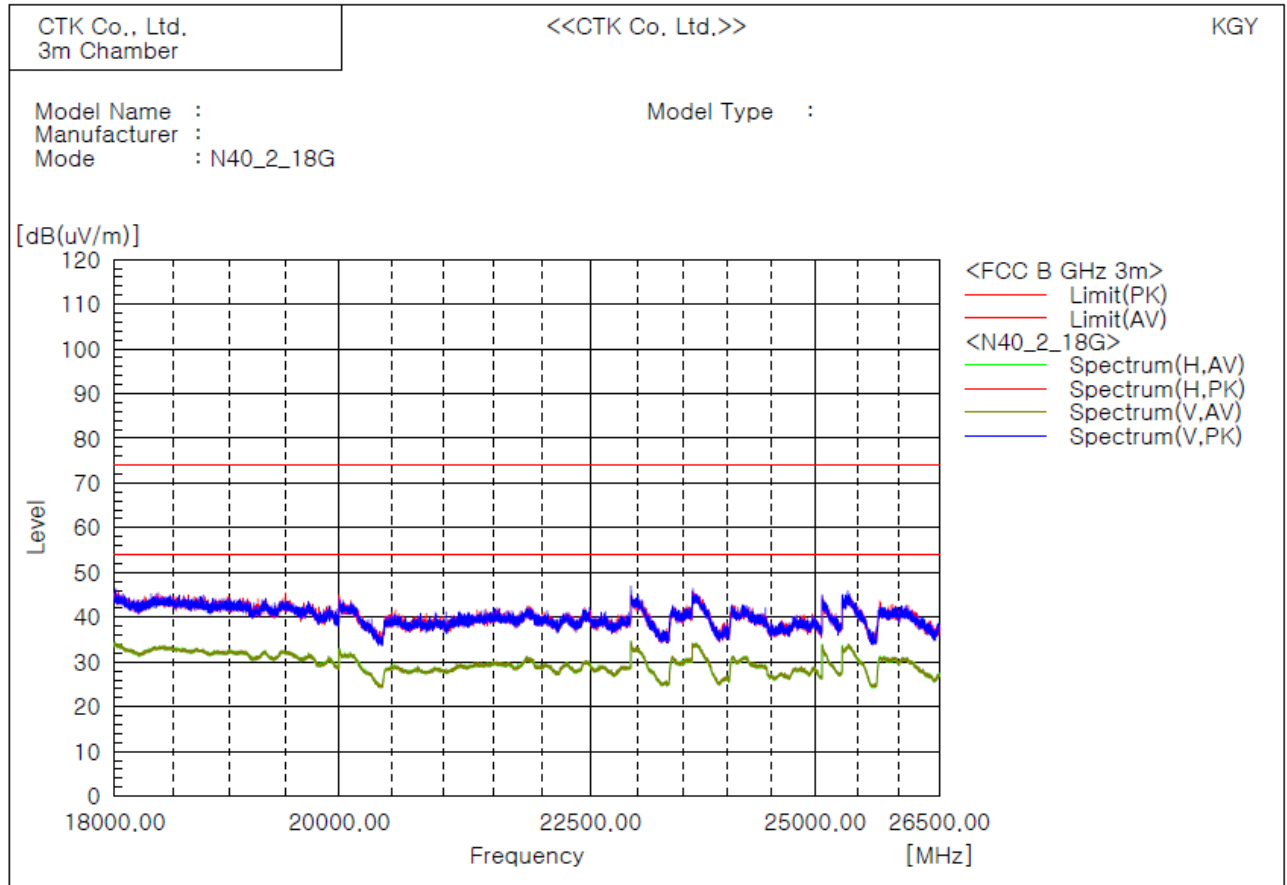

Result : There are more than 20 dB of margin compared to the reference value.

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f.(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain


5) Restricted Frequency Bands

Test mode : 802.11b, Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :

Complies

Test Data

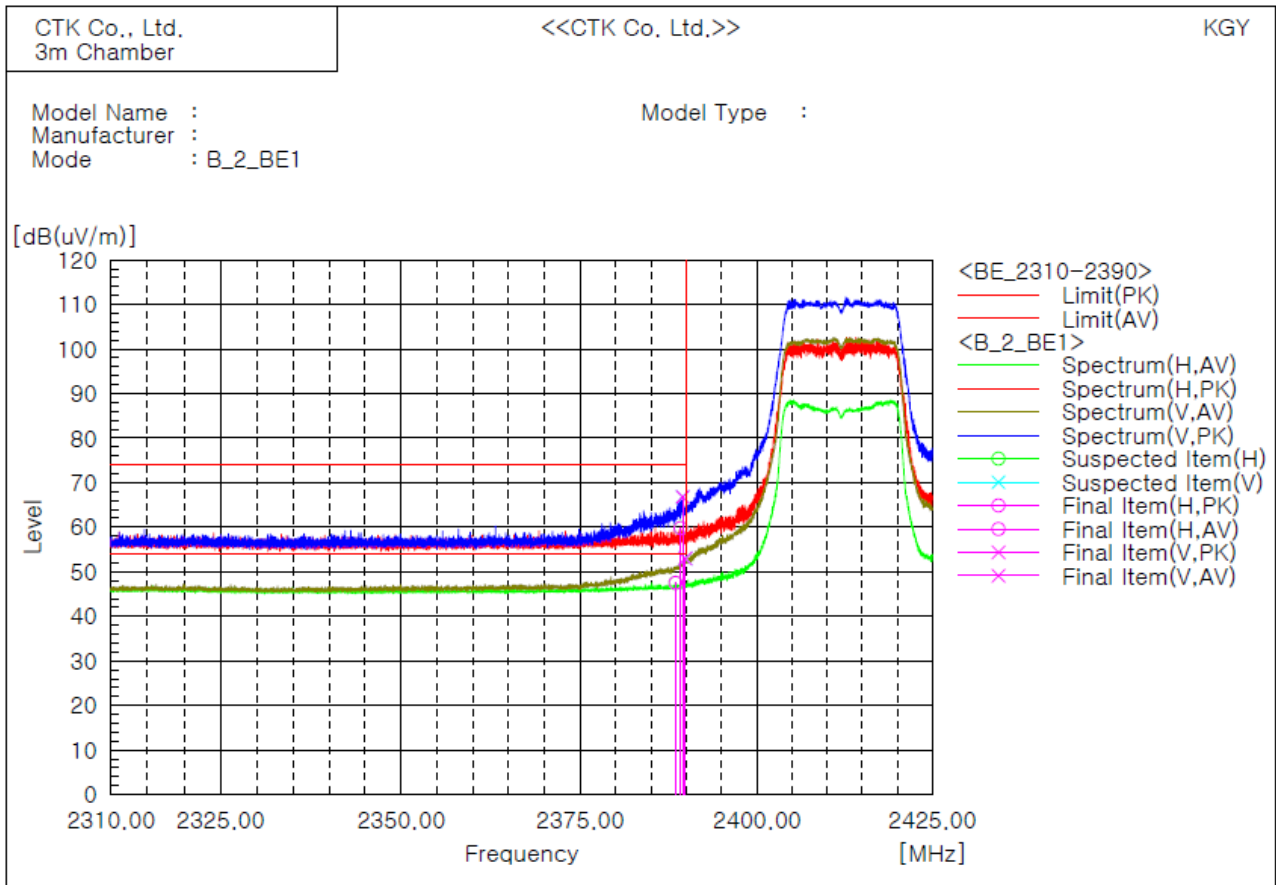

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2388.459	H		41.3	6.2			74.0	54.0			99.8	0.0
2	2389.177	H	53.6		6.2	59.8		74.0	54.0	14.2		236.3	300.2
3	2389.465	V	60.6		6.2	66.8		74.0	54.0	7.2		223.0	107.8
4	2389.867	V		46.7	6.3		53.0	74.0	54.0		1.0	99.8	359.9


Remarks

- Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
- Result = Reading + c.f(correction factor)
- Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11b, Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :
 Complies

Test Data

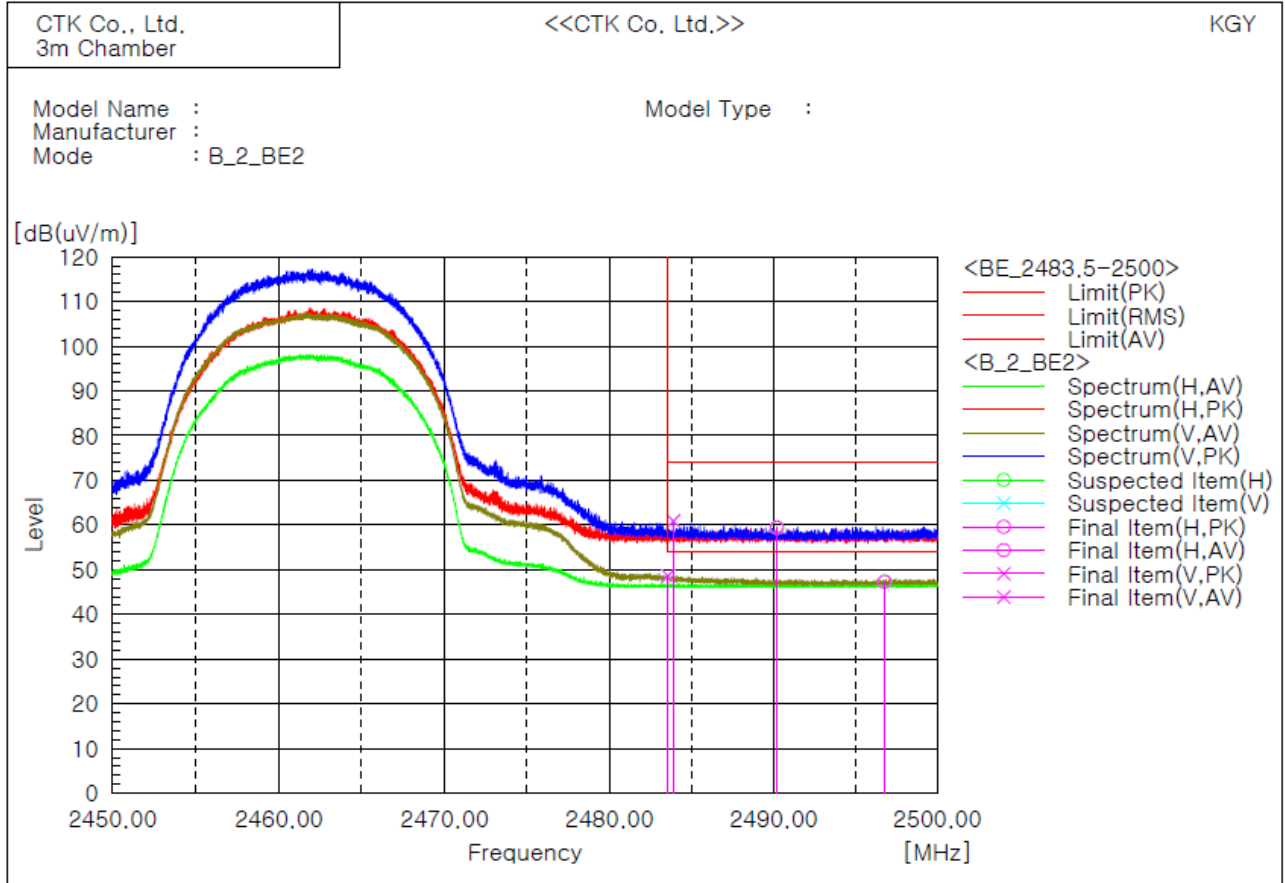

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2490.206	H	53.1		6.3	59.4	74.0	74.0	54.0	14.6		355.9	86.3
2	2496.781	H		41.0	6.3	47.3	74.0	74.0	54.0		6.7	464.3	359.9
3	2483.900	V	54.7		6.2	60.9	74.0	74.0	54.0	13.1		99.8	68.9
4	2483.569	V		42.4	6.2	48.6	74.0	74.0	54.0		5.4	99.8	354.9


Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11g, Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :
 Complies

Test Data

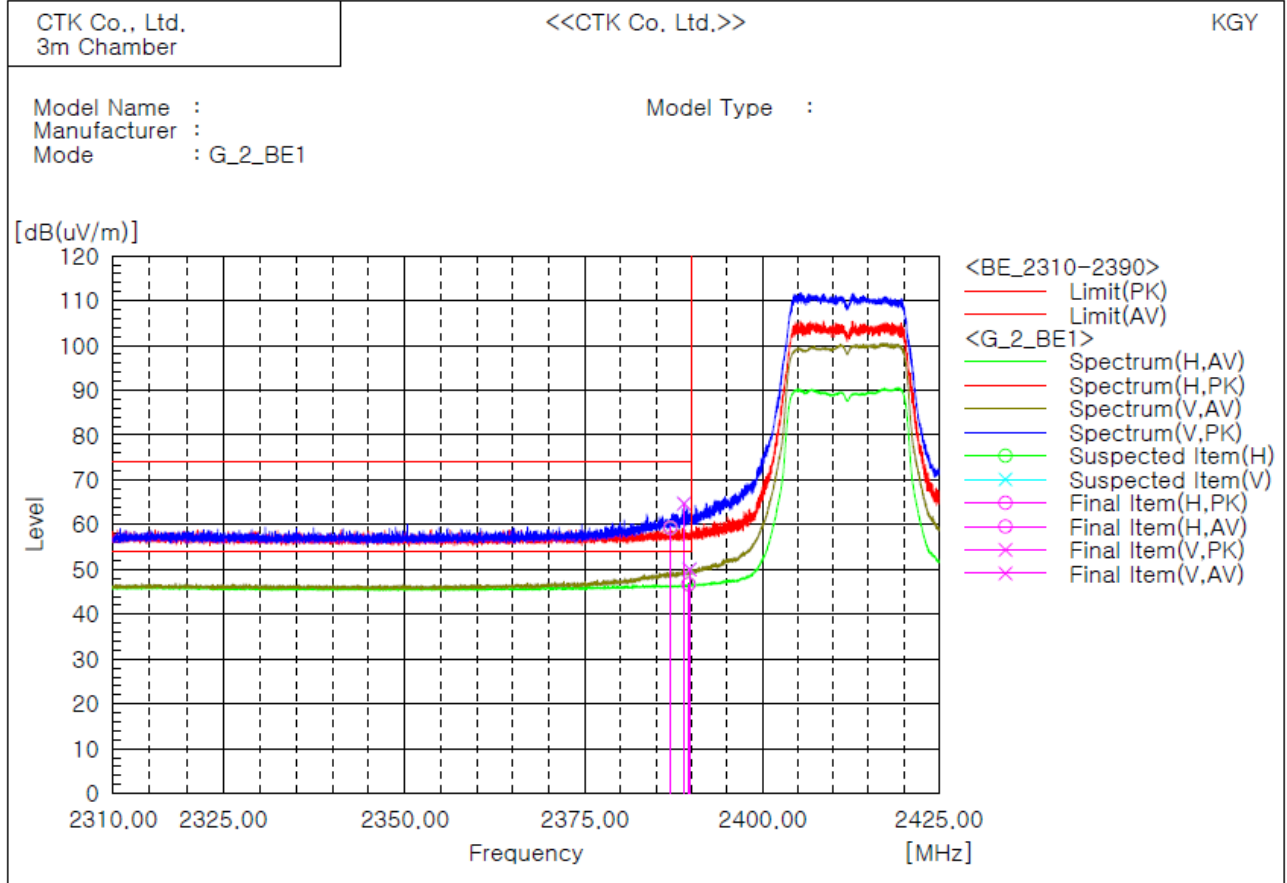

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2387.007	H	53.1		6.2	59.3		74.0	54.0	14.7		464.2	9.5
2	2389.551	H		40.4	6.3		46.7	74.0	54.0		7.3	342.7	0.0
3	2388.919	V	58.5		6.2	64.7		74.0	54.0	9.3		235.2	246.5
4	2389.709	V		43.7	6.3		50.0	74.0	54.0		4.0	356.4	0.1


Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11g, Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :
 Complies

Test Data

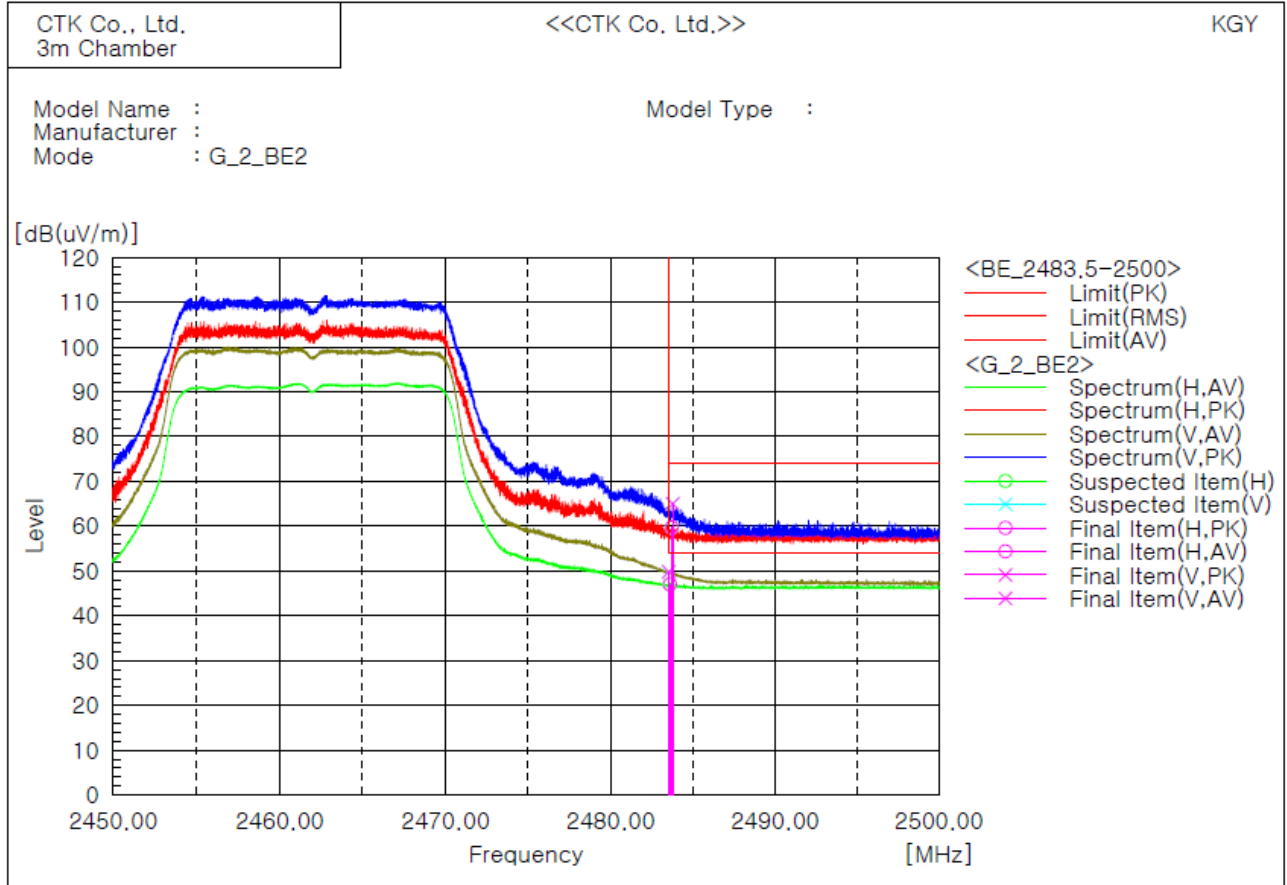

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.538	V	---	43.6	6.2	---	49.8	74.0	54.0	---	4.2	237.7	212.9
2	2483.606	H	---	40.8	6.2	---	47.0	74.0	54.0	---	7.0	345.2	21.6
3	2483.725	H	53.5	---	6.2	59.7	---	74.0	54.0	14.3	---	223.0	332.7
4	2483.775	V	58.8	---	6.2	65.0	---	74.0	54.0	9.0	---	464.3	80.7


Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT20), Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :
 Complies

Test Data

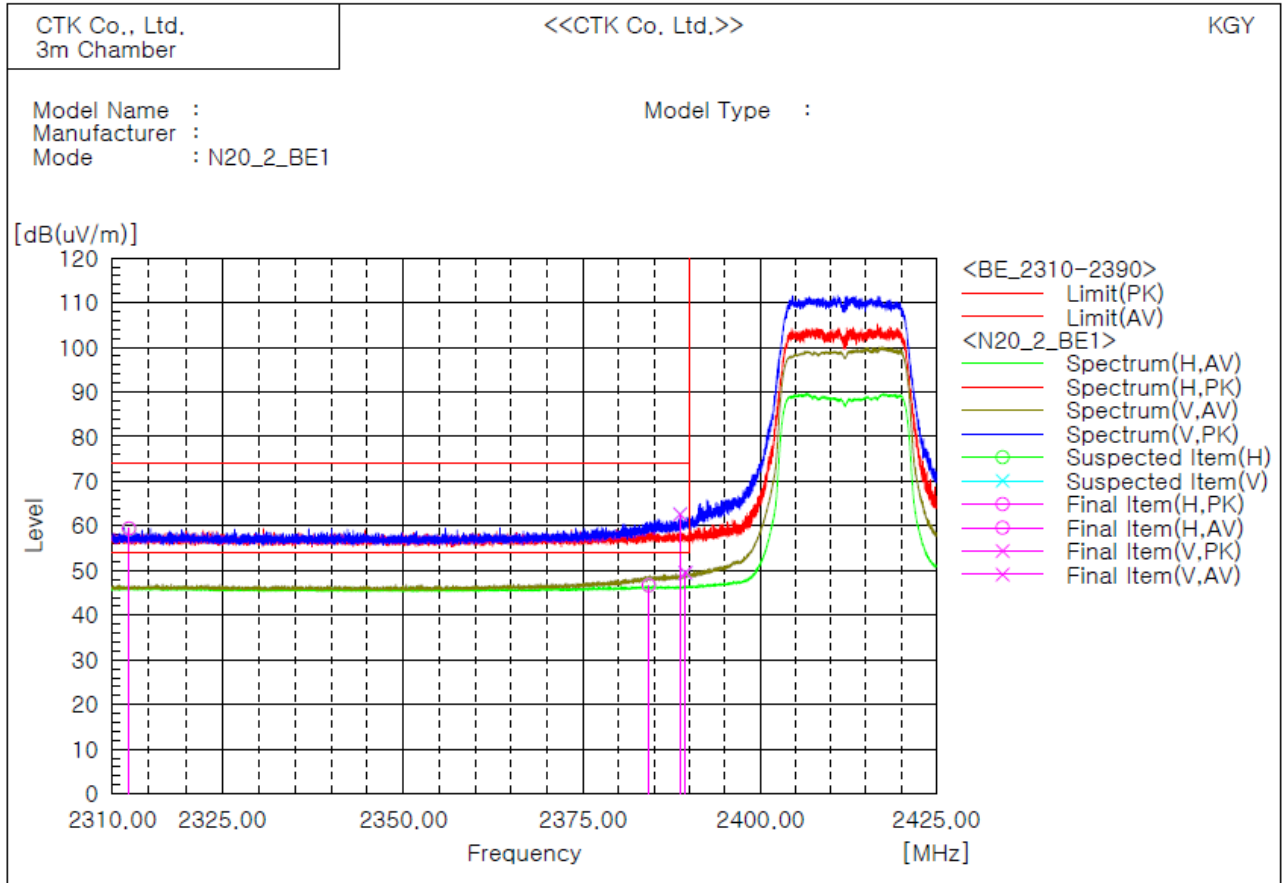

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2312.300	H	53.2	40.5	6.2	59.4	46.7	74.0	54.0	14.6	7.3	99.8	24.4
2	2384.261	H	56.4	43.3	6.2	62.6	49.5	74.0	54.0	11.4	4.5	353.9	87.7
3	2388.646	V	56.4	43.3	6.2	62.6	49.5	74.0	54.0	11.4	4.5	353.9	87.7
4	2389.436	V	56.4	43.3	6.2	62.6	49.5	74.0	54.0	11.4	4.5	353.9	87.7

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT20), Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :

Complies

Test Data

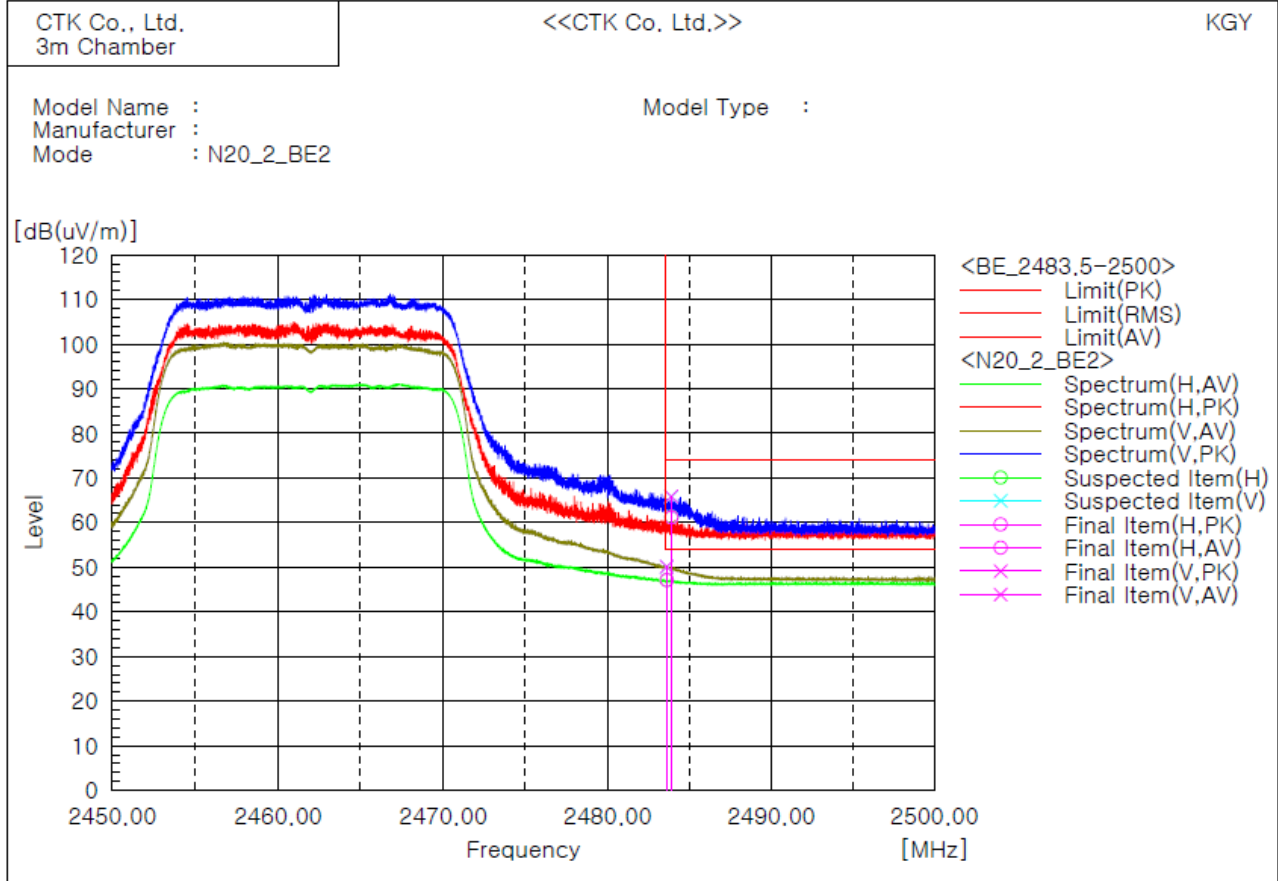

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	o.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.625	H	---	40.9	6.2	---	47.1	74.0	54.0	---	6.9	346.3	24.6
2	2483.625	V	---	43.9	6.2	---	50.1	74.0	54.0	---	3.9	235.1	224.1
3	2483.894	V	59.6	---	6.2	65.8	---	74.0	54.0	8.2	---	464.3	63.4
4	2483.906	H	55.0	---	6.2	61.2	---	74.0	54.0	12.8	---	346.3	12.4

Remarks


1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT40), Lowest channel
(Test frequency range : 2 310 MHz – 2 390 MHz)

The requirements are :

Complies

Test Data

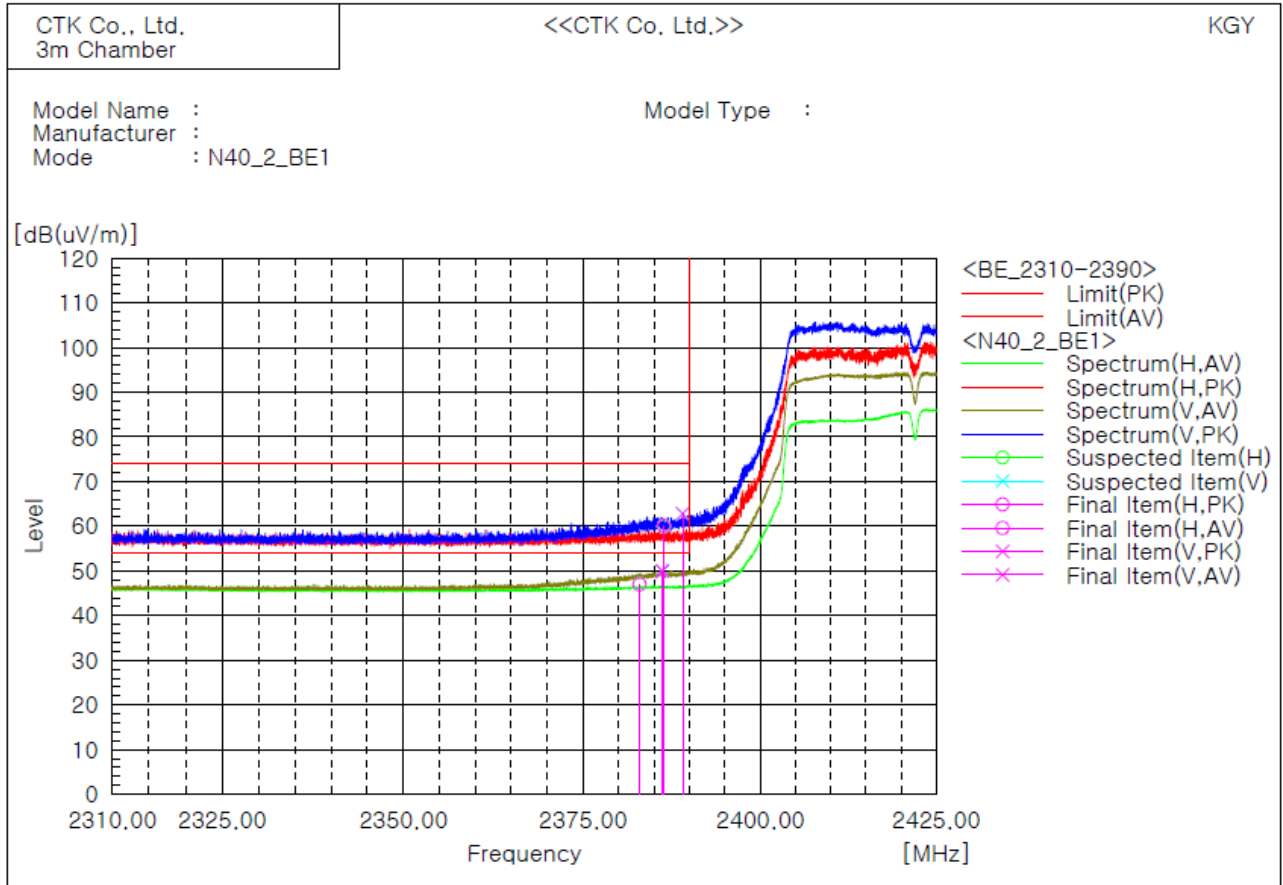

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2382.953	H	40.8	40.8	6.2	47.0	47.0	74.0	54.0	7.0	7.0	224.2	0.1
2	2386.159	V	43.8	43.8	6.2	50.0	50.0	74.0	54.0	4.0	4.0	356.6	0.0
3	2386.375	H	53.8	53.8	6.2	60.0	60.0	74.0	54.0	14.0	14.0	100.0	127.1
4	2389.034	V	56.6	56.6	6.2	62.8	62.8	74.0	54.0	11.2	11.2	356.6	275.6


Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

Test mode : 802.11n(HT40), Highest channel
(Test frequency range : 2 483.5 MHz – 2 500 MHz)

The requirements are :
 Complies

Test Data

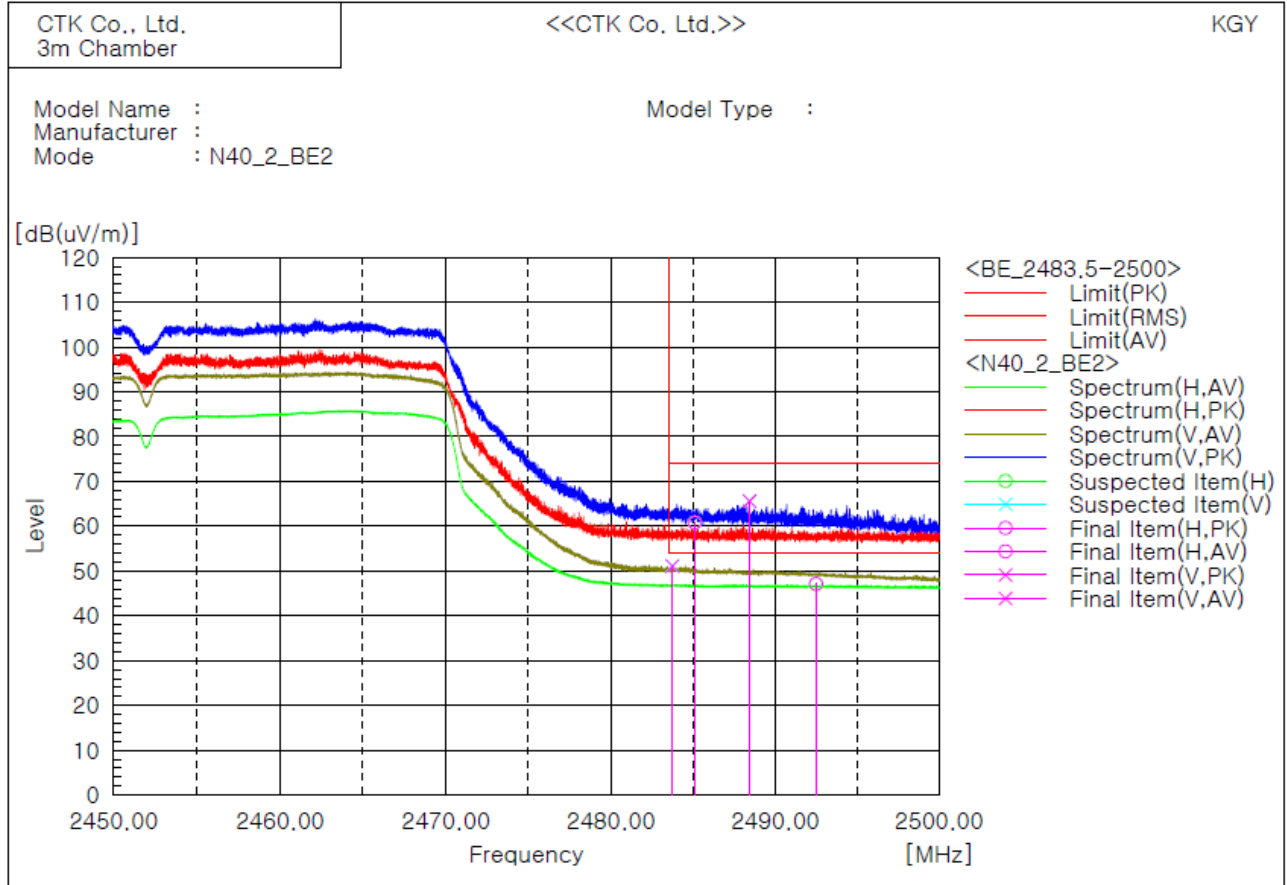

Final Result

No.	Frequency [MHz]	(P)	Reading PK [dB(uV)]	Reading AV [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Result AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Height [cm]	Angle [deg]
1	2483.738	V	54.6	44.9	6.2	60.8	51.1	74.0	54.0	13.2	2.9	99.8	0.1
2	2485.113	H	54.6	---	6.2	60.8	---	74.0	54.0	13.2	---	345.2	284.3
3	2488.444	V	59.3	---	6.3	65.6	---	74.0	54.0	8.4	---	464.3	58.7
4	2492.494	H	---	40.8	6.3	---	47.1	74.0	54.0	---	6.9	345.2	122.8

Remarks

1. Measuring position : The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain

4.6 AC Conducted Emissions

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz-30 MHz, shall not exceed the limits.

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

ANSI C63.10-2013 - Section 6.2.2

The EUT was placed on a non-metallic table 0.8 m above the metallic, grounded floor and 0.4 m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8 m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results

The requirements are:


Complies

Test mode : 802.11b, Lowest channel(Worst case)

Frequency [MHz]	Measured Data [dBuV]	Margin [dB]	Remark
24.005	30.2	29.8	Quasi-peak
24.023	27.0	23.0	Average

Test Data

[LINE]

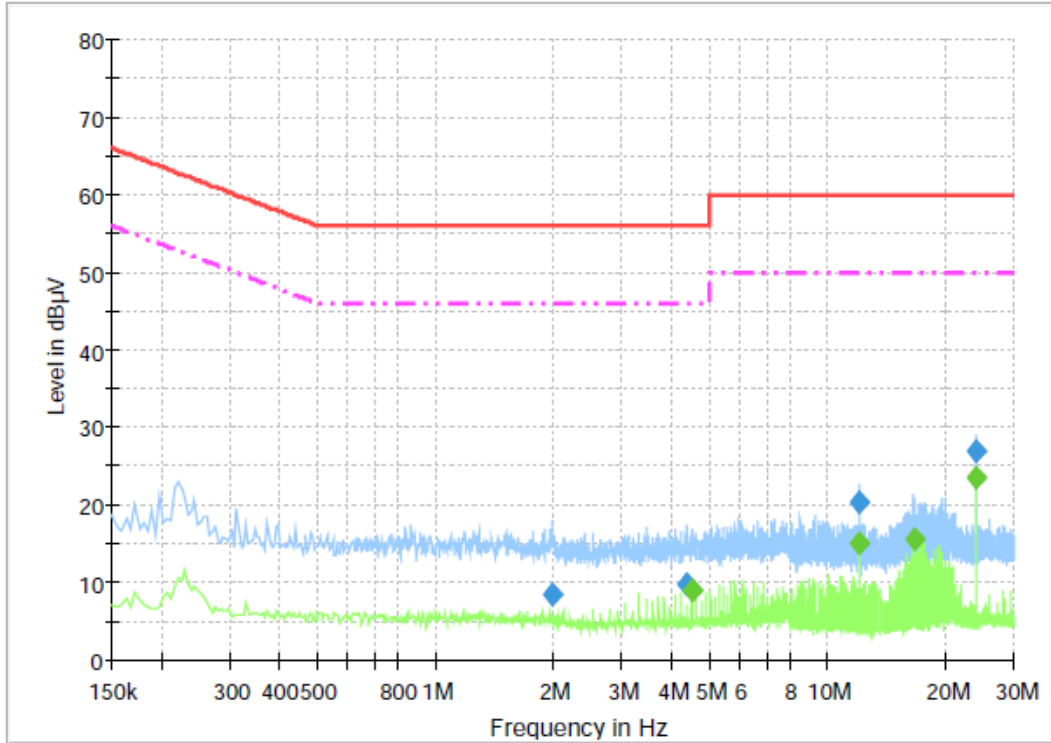


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.999500	8.3	1000.0	9.000	On	L1	9.8	47.7	56.0
4.407000	9.7	1000.0	9.000	On	L1	9.9	46.3	56.0
12.003000	20.4	1000.0	9.000	On	L1	9.9	39.6	60.0
24.004500	26.9	1000.0	9.000	On	L1	10.1	33.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.510500	8.9	1000.0	9.000	On	L1	9.9	37.1	46.0
12.003000	15.1	1000.0	9.000	On	L1	9.9	34.9	50.0
16.786500	15.5	1000.0	9.000	On	L1	10.0	34.6	50.0
24.022500	23.6	1000.0	9.000	On	L1	10.1	26.4	50.0

[NEUTRAL]

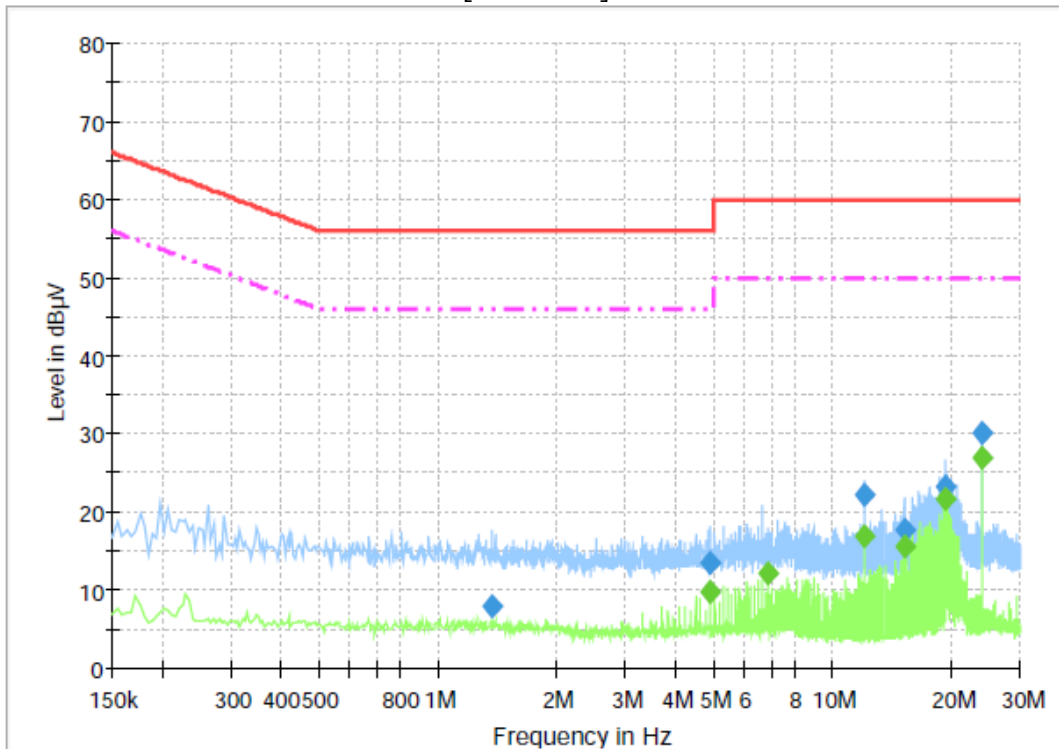

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
1.378500	8.0	1000.0	9.000	On	N	9.8	48.0	56.0
4.911000	13.5	1000.0	9.000	On	N	9.9	42.5	56.0
12.003000	22.1	1000.0	9.000	On	N	9.9	37.9	60.0
15.193500	17.6	1000.0	9.000	On	N	9.9	42.4	60.0
19.441500	23.3	1000.0	9.000	On	N	10.1	36.7	60.0
24.004500	30.2	1000.0	9.000	On	N	10.1	29.8	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
4.911000	9.7	1000.0	9.000	On	N	9.9	36.3	46.0
6.900000	12.2	1000.0	9.000	On	N	9.9	37.8	50.0
12.003000	16.8	1000.0	9.000	On	N	9.9	33.2	50.0
15.193500	15.7	1000.0	9.000	On	N	9.9	34.3	50.0
19.306500	21.7	1000.0	9.000	On	N	10.1	28.3	50.0
24.022500	27.0	1000.0	9.000	On	N	10.1	23.0	50.0



CTK Co., Ltd.
 (Ho-dong), 113, Yejik-ro, Cheoin-gu,
 Yongin-si, Gyeonggi-do, Korea
 Tel: +82-31-339-9970
 Fax: +82-31-624-9501

Report No.:
 CTK-2021-02086
 Page (79) / (79)Pages

5. APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	US46470483	2021-02-16	2022-02-16
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2021-04-12	2022-04-12
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2020-10-20	2021-10-20
4	Bilog Antenna	SCHAFFNER	CBL6111C	2551	2021-03-22	2023-03-22
5	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2020-05-20	2022-05-20
6	6dB Attenuator	BIRD	5W 6dB	1744	2020-12-16	2021-12-16
7	6dB Attenuator	Rohde & Schwarz	DNF	272.4110.50-2	2020-10-23	2021-10-23
8	AMPLIFIER	SONOMA	310	291721	2021-01-22	2022-01-22
9	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2021-01-12	2022-01-12
10	Preamplifier	Agilent	8449B	3008A02011	2020-11-30	2021-11-30
11	Double Ridged Guide Antenna	ETS-Lindgren	3117	00154525	2019-10-14	2021-10-14
12	Horn Antenna	SCHWARZBECK	BBHA9170	00967	2020-05-25	2022-05-25
13	Band Reject Filter	Micro Tronics	BRM50702	G444	2020-10-14	2021-10-14
14	DC Power Supply	HP	E3632A	KR75301278	2020-07-23	2021-07-23
15	Dual-Tracking DC Power Supply	Topward Electric Instruments Co.,Ltd.	6303D	711196	2021-01-14	2022-01-14
16	Low Noise Amplifier	TESTEK	TK-PA1840H	200115-L	2021-05-21	2022-05-21
17	LISN	Rohde & Schwarz	ENV216	101235	2021-01-12	2022-01-12
18	EMI Test Receiver	Rohde & Schwarz	ESCI3	100032	2021-01-15	2022-01-15

	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable	Canare Corporation	L-5D2W	N/A	2020-10-20
2	RF Cable	Junkosha Inc.	MWX221	2005S321	2021-06-02
3	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY073/2	2021-02-20
4	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2021-02-20
5	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2021-02-20
6	RF Cable	HUBER+SUHNER	SUCOFLEX 104	N/A	2021-02-20
7	RF Cable	HUBER+SUHNER	SUCOFLEX 104	MY27573/4	2021-02-20
8	RF Cable	HUBER+SUHNER	SUCOFLEX 106	N/A	2021-02-20
9	RF Cable	HUBER+SUHNER	SUCOFLEX 102	803010/2	2021-02-20
10	RF Cable	HUBER+SUHNER	SUCOFLEX 102	803742/2	2021-02-20
11	RF Cable	HUBER+SUHNER	SUCOFLEX 102	MY4728/2	2021-02-20