

User Manual

www.annke.com

Production Information

Thank you for purchasing our NVR! This manual is designed for the installation and operation of this product. You can get more information about the features and functions of this product in details. Please read this manual carefully before using. Please contact us if you have any questions.

Legal Disclaimer

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. OUR COMPANY SHALL NOT TAKE ANY RESPONSIBILITES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, OUR COMPANY WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

SURVEILLANCE LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS THE APPLICABLE LAW. OUR COMPANY SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATER PREVAILS.

Regulatory Information FCC Information

Please take attention that changes or modification are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Compliance: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: 1. This device may not cause harmful interference.

2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement

C C This product and -if applicable -the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU.

2012/19/EU(WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info

2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the

battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info

Safety Instruction

These instructions are intended to ensure that user can use the product correctly to avoid danger or property loss. The precaution measure is divided into [Warnings] and [Cautions].

Warnings: Serious injury or death may occur if any of the warnings are neglected.

Cautions: Injury or equipment damage may occur if any of the cautions are neglected.



\land Warnings

• Proper configuration of all passwords and other security settings is the responsibility of the installer and/or end-user.

• In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region. Please refer to technical specifications for detailed information.

• Input voltage should meet both the SELV (Safety Extra Low Voltage) and the Limited Power Source with 100 to 240 VAC or 12 VDC according to the IEC60950-1 standard. Please refer to technical specifications for detailed information.

• Do not connect several devices to one power adapter as adapter overload may cause over-heating or a fire hazard.

• Please make sure that the plug is firmly connected to the power socket.

• If smoke, odor or noise rise from the device, turn off the power at once and unplug the power cable, and then please contact the service center.


1. What's in the Box



WiFi NVR X1



Security Cameras X4




Antenna Extension Cable X1










User Manual X1

Mouse X1


Network Cable X1

Power Adapter X5


2. Product Introduction NVR:

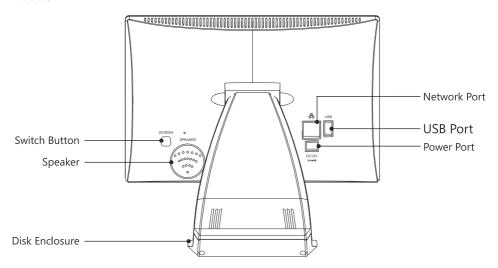


Camera:

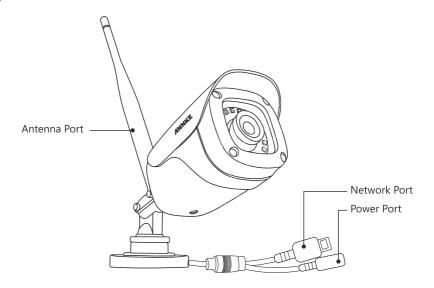

2.1 Connection Diagram

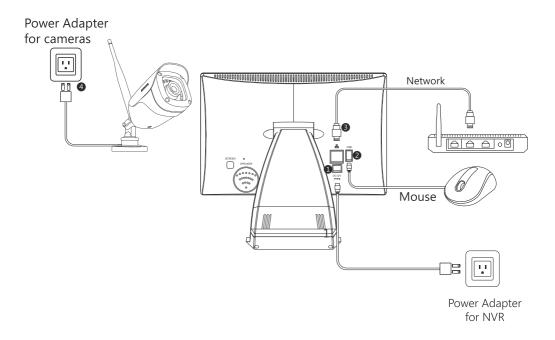

2.2 The Camera's Antenna Direction

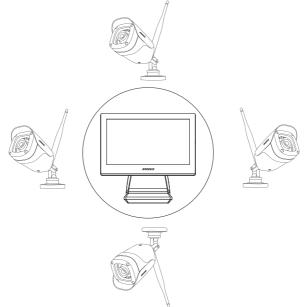

Note: Make sure the antenna is screwed tight.

3. Basic Operations

3.1 Power on the NVR & Security Cameras

Connect the NVR to a monitor or a TV and then connect the NVR and the cameras to an outlet. They will boot automatically.

3.2 Log into the System

After the system is launched, click "OK" to log in. (The default user name is admin, no password.)



3.3 Setup Wizard

After the initial login, you will see the setup wizard on the screen, helping you comprehend & set up the system.

3.3.1 General Configuration

Setup [Time Zone] , [Date time] , [Sync Time] , [Date Format] , [Language].

	Gen	ieral Setup		_
Time Zone	+00:00			
Date time	13/11/2019	06 :09 :52	Apply	
Sync Time	Enable			
Date Format	DD/MM/YYYY			
Language				
Boot Wizard	Z Enable			
			Next	Cancel

3.3.2 Wireless Setup

Please confirm the wireless channel and region.

Wireless Setup	Wireless Setup
Wireless Channel FL Pegion FDC (Adaptive channel)	Wireless Channel Region, FCC -
The shamel should conform to local laws, and regulations,	Please confirm whether the channel complies with local lawstit
Previous Next Cancel	Previous Cancel

Note: The wireless channel and region need to be conform to the local legislation. If the wireless signal is not stable, please click **"Adaptive Channel"** to improve the signal.

3.3.3 Network Configuration

Click **"Diagnose"** to do a quick check on the NVR's network connection, and then click **"Auto Config"** to match the network for the NVR.



3.3.4 HDD Setup

Check the HDD and then click "Format" to format the HDD.

1 ST(000yx001-124) 931-5-68 10.0-68 Fermination	
	mat
1.00	inde

Note: Formatting HDD will erase all data contained in the disk. Please be careful when formatting an HDD.

3.3.5 Download App

Please download and launch the app. Scan the QR code of the device to add the device.



3.4 Change the Password

Please change the password after you have logged into the system. Right click the mouse. Choose **[System Setup] - [System Admin] - [User]** to change the password.

🔠 Split Screen 🕨		General Setup Record Setup Network Setup Channel Setup System Admut
🕫 Video Manage	System Version	
🗋 System Setup	System Version System Log	1D UserName Superuser Add User
🎞 Video Playback		2 3 4
💾 Video Backup	System Upgrade	5 Username admin 6 Old password
📣 Volume 🕨	Sys Maintenance	7 New password ####################################
o ^o Setup Wizard	Factory Setting	10 Password length (up to 12 characters) 11 Cancel
🚱 Fast Network		12
🕫 Wireless Add		
① Exit System		Ok Cancel

Note: Please keep your password in mind. If you have forgotten your password, please click the mouse' left and right buttons more than 6 times at a uniform speed. If there is any question, please contact our support team via support@annke.com.



3.5 Set up the Video Recording

By default, the system will record 24/7. If you want to change the video recording mode, please re-configure the system.

Right click the mouse. Choose **[System Setup] - [Record Setup] - [Reset]** to select the video recording mode and period.

🔠 Split Screen 🕨	General Setup Record Setup Channel Setup System Admin
S Video Manage	
System Setup	Channel 1 7 Channe
🎞 Video Playback	Copy To
💾 Video Backup	122A11 111 122 123 124 125 126 127 128
🔹 Volume 🕨	
🕫 Setup Wizard	Ok. Cancel a so so so
🚱 Fast Network	
🔊 Wireless Add	
① Exit System	Select All Reset Apply OK Cancel

3.6 Motion Detection Setup

In default, the motion detection is enabled 24/7 and for all areas. If you want to change the motion detection mode, please re-configure the system.

Right click the mouse. Choose **[System Setup] - [Channel Setup] - [Video Detection]** to select the sensitivity level, the motion detection period and areas.

∷ Split Screen ► Split Screen ►		General Setup	Record Setup Network Setu	Channel Set	ap System Admin
💭 System Setup	Encode Setup Channel OSD	Channel Detection] Motion	 ■ Enabl ■ PIR 	
 Video Playback Video Backup Volume Volume Setup Wizard Fast Network 	Video Thitostor IPC Upgrade Bitrate	Sensitivity Alarm Duration	Tigli 5 seconds Buzzer E-Mail Notice APP Alarm	1	
 Wireless Add Exit System 		Copy To	Arming Time	Area Edit Apply	Ok Gancel

Note: Please choose the suitable motion detection areas, period and motion sensitivity level to reduce the false alarms.

3.7 Video Playback

Right click the mouse and then choose **[Video Playback]**. In default, the system will playback today's earliest videos (4 channels).

You can drag the video timeline to play back the videos or speed up the video playback.

Choose the channel & time that you want to play back, and then click **"Search"** to locate the videos in a specific time.

品 Split Screen Video Manage 🗇 System Setup Video Playback Video Backup Volume - 10) 00 Setup Wizard 19 Fast Network Wireless Add 10 1 Exit System




3.8 Video Backup

Right click the mouse. Choose **[Video Backup]** and then select the channel, video recording mode and period. Click **"Search**".

The system will display the video files. Choose the video files that you need and then click **"Backup"**. You will get a prompt to ask you to insert a USB drive. Please insert the USB drive within 60 seconds. The system will back up the video files automatically.

Please remove the USB drive after all the video files have been exported.

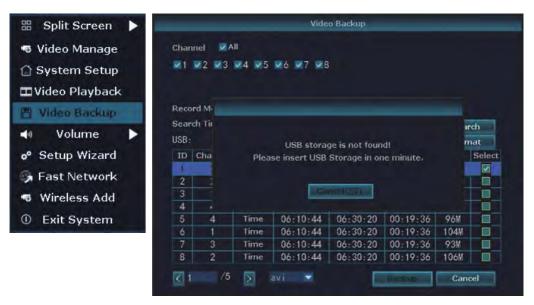

			Vide	o Backup			
Chann			₩6 ₩7 ₩8	1			
	d Mode			ei			
Search	h Tir		-				rch
USB:			Video is	backing up.			nat
ID	Cha		Plea	se Wait			Select
1				1%			
2	1						
3							
4	4	Time	06:30:26	06:31:58	00:01:32	8M	
5	4	Time	06:10:44	06:30:20	00:19:36	96M	
6	1	Time	06:10:44	06:30:20	00:19:36	104₩	
7	3	Time	06:10:44	06:30:20	00:19:36	93M	
8	2	Time	06:10:44	06:30:20	00:19:36	106M	
1000	/5	5	avî 💌	-	Ration	Can	

3.9 Email Alert Setup

Right click the mouse. Choose **[System Setup] - [Network Setup] - [Email]** to set up the email alerts. Please select SMTP provide and encryption type and then input the correct sender, password, SMTP port and the recipient's email address.

🔡 Split Screen 🕨		General Setup Reco	ord Setup	AntionalCitotup	Channel Seti	ap System Admin
 ☐ System Setup ■ Video Playback 	Network Setup DDNS	E-Mail Function SMTP Provider	e Enable gna i l			More Parameter
 Video Backup Volume 	E-Mar()	Sender Password SMTP Server	satp. gau	spport.com ************************************		Test Display
• Setup Wizard	Wireless Setup PPP0E	Port Encryption Type Sendee 1	587 SSL annke@st	ipport.com		Quick Setup
🌍 Fast Network 🖷 Wireless Add		Sendee 2 Subject Interval	NVR Repo 30	ort.		Second
① Exit System		i Health Mail Enable Health Mail Interval				Minute
				Reset A	pply	Ok Cancel

3.10 Repeater Setup

Step 1. Right click the mouse. Choose [Video Manage] - [Repeater].

Step 2. Choose the security camera that is close to the NVR (with the strongest signal) as the repeater. **Step 3.** Click "+" to select the security camera that is far away from the NVR (with the weakest signal) and then click "**Apply**". Please wait for several minutes to let the security cameras re-connect. After that, click "**Refresh**" to get the new status of the repeater.

Split Screen Video Manage System Setup Video Playback Video Backup Video Backup Setup Wizard Fast Network Wireless Add Exit System

ID	Device Name	IP Address	Port	Protocol	
					Search
					Match Co
					Add On
					Modify 1
Channel	0 > Device Name	IP Address	Sta	itus	
1	IRGAM	172. 20. 14. 30	Connect	Success	Delete
2	IPGAM	172. 20. 14. 31	Connect	Success	Delete A
3	IPCAM	172. 20. 14. 32	Connect	Success	Manual E
-4	IPCAM	172. 20. 14. 33	Connect	Success	
5			No Video	o Source	Repeate
6			No Video	o Source	
			No Video	o Source	
8			No Video	o Source	




Note:

1. If the distance between the security cameras and NVR is too far, you cannot do the repeater setup. Please try again after you shorten the distance.

2. The security camera selected as the repeater needs to have strong signal (more than 3 bars).

3.11 How to Use the Antenna Extension Cable

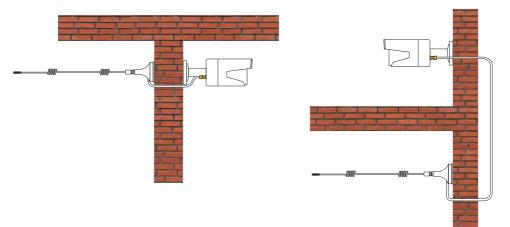

4. Remote Access

Before you access the NVR system remotely, make sure the NVR is connected to the Internet. You can refer to 3.3.3 to check the Internet status of the NVR.

4.1 Mobile Client Access

Step 1. Search "Annke Sight" on App Store or Google Play and then download the app to your smartphone.

- Step 2. Open the app , click "Register".(Picture 1)
- Step 3. Enter your email address, click "Confirm", follow the prompts to complete registration and login. (Picture 2)
- Step 4. Click the "+" button.(Picture 3)
- Step 5. Click "Kit".(Picture 4)


Step 6. Click " 📇 ", Scan the ID number on the device.(Picture 5,6)

Step 7. Enter your password and click "Complete".(Picture 7)

Note: Device has no password by default.

Step 8. Now you can preview the device.(Picture 8,9)

No SIM 🗢 14:45	7 100%	No SIM 🗢 14:48 -7 100% <	■ No SIM ♥ 14:48 ₹ 100% Device Group +
Log in		Register	
Email/phone number	Ŷ	support@annke.com	
password	~		
Forget password?	Register	Confirm	
Confirm		Arrew In the activere user service agreement and	
@ Remember Password			
Local experience		Already have account, log m	9 R L My device Online store Personal center
Picture 1		Picture 2	Picture 3
		11	

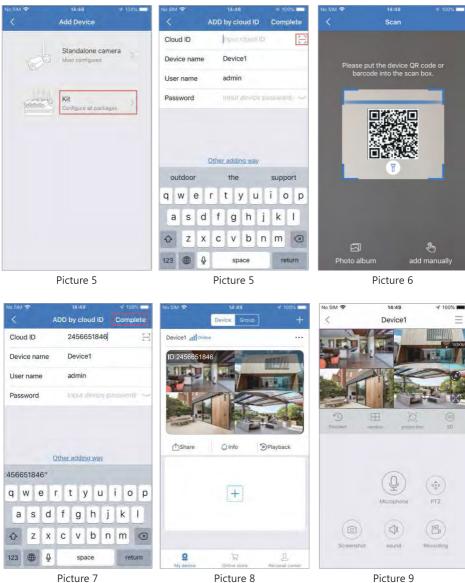

Picture 7

Picture 9

4.2 Access the Security System via CMS

Step 1. Install "Annke Sight" client on your computer.

Step 2. Launch the client and log into your account(The default user name is admin, no password). Click "Add" and then enter the ID, username, password, the device type, and the device channel to add the device. Click "Finish".

Annke Sight								- 17 18
							+ Add	Ef Modify
							Device list	
			Add	Device				
	O IP/DDNS	Cloud ID						
	+ Cloud ID	2088836892		Port	10000			
	User Name:	admin		Password;				
	Area	Default Area	×	Device Name				
	Type:	NVR	¥	*Number Of Channels:	4			
	Channel Serial:	1	Y	Channel Name.	ch_1			
	Channel Type:	Normal	Y	Panorama.	Close	~		
		Finis	sh	Cancel			Group PTZ Control	
Annke Sight	Playback Management	Jier Parameter Record		Tananat Deconnect Al	Servern Number	Have Function		


Step 4. Move the mouse pointer over the ID number. Right click the mouse and then select **"Connect Videos"**. After several seconds, you can view the remote live streaming.



4.3 Access the Security System via a Web Browser

Step 1. Launch the IE browser. Enter **http://sight.annke.com** and press the Enter button. **Step 2.** Enter the ID, username and password to get the live view.

D = d 👸 Remote network video b			
Cloud ID login	Username login	Language ¥	
2088836892	×		
admin			
⊠ Sav	ve the loging device		
	gin		

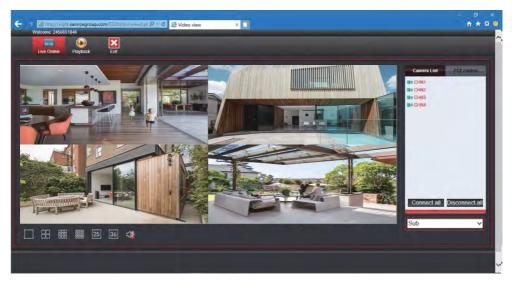

5. Contact Us

If you have any question, please visit our Annke Help Center (help.annke.com) for the troubleshooting solutions, or you can contact our support team via email to **support@annke.com**.

1. What's in the Box



WiFi NVR X1






- Überwachungskameras X4
- Antennenverlängerungskabel X1










Benutzerhandbuch X1

Maus X1


Netzwerkkable X1

Netzteil X5

2. Produkteinführung NVR:

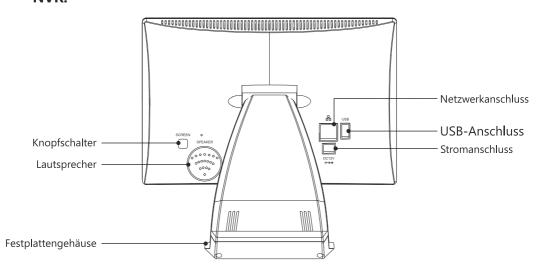


Camera:

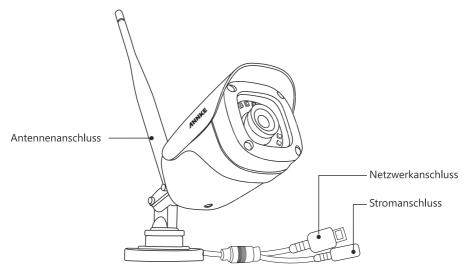


2.1 Anschlussplan

Netzteil für Kameras

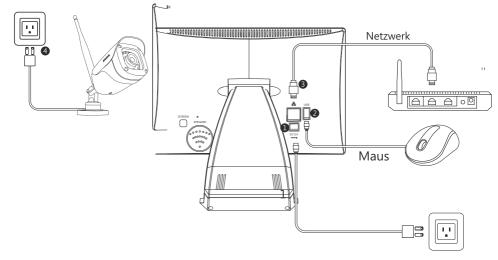

Netzteil für NVR

2.2 Die Antennenrichtung der Kamera

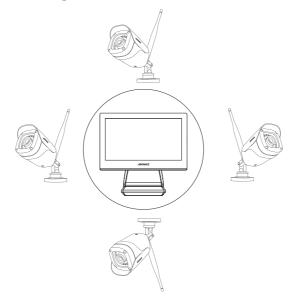

Hinweis: Stellen Sie sicher, dass die Antenne festgeschraubt ist.

3. Grundlegende Operationen

3.1 Schalten Sie den NVR & die Überwachungskameras ein

Schließen Sie den NVR an einen Monitor oder ein Fernsehgerät an und schließen Sie den NVR und die Kameras an eine Steckdose an. Sie werden automatisch gestartet.

3.2 Melden Sie sich im System an

Klicken Sie nach dem Start des Systems auf **"OK"**, um sich anzumelden. (Der Standardbenutzername lautet admin, und das Standardkennwort ist leer)

Benutzername	admin	5
Kennwort		
Passwort me	ul com	

3.3 Setup-Assistent

Nach der erstmaligen Anmeldung wird der Setup-Assistent auf dem Bildschirm angezeigt, der Ihnen hilft, das System zu verstehen und einzurichten.

3.3.1 Allgemeine Konfiguration

Zeitzone einstellen , Datum , Uhrzeitsynchronisation , Datumsformat , Sprache.

h	Gen	ieral Setup		
Time Zone	+00:00		3	
Date time	13/11/2019	06 :09 :52	Apply	
Sync Time	Enable			
Date Format	DD/MM/YYYY			
Language	English			
Boot Wizard	Enable			
			Next	Cancel

3.3.2 Wireless-Setup

Bitte bestätigen Sie den Wireless-kanal und die Region.

Wireless Einrichtung	Wireless Einrichtung
Wireless -Kanal 13 🔷	Wireless -Kanal [1] Rogion <u>Ell</u> Adentiver Kanal
(1997) ganal sollter fort fortischen Generat som Unit Versed infred enragenetierer	Bitte bestätigen Sie, ob der Kanal Lynnerner entspricht den lokalen Gesetzen III
zurück Abbrechen	zurück Abbrechen

Hinweis: Der Wireless-kanal und die Region müssen den örtlichen Gesetzen entsprechen. Wenn das Wireless-Signal nicht stabil ist, klicken Sie auf **"Adaptiver Kanal"**, um das Signal zu verbessern.

3.3.3 Netzwerkkonfiguration

Klicken Sie auf **"diagnostizieren"**, um die Netzwerkverbindung des NVR schnell zu überprüfen, und klicken Sie dann auf **"Auto Config"**, um die Netzwerkverbindung für den NVR anzupassen.



3.3.4 Festplatten Setup

 Festplattenliste

 1
 Modell
 Kapazität
 Verwendet
 Status
 Format

 1
 ST1000X001-7241
 931 5 GB
 11 0 GB
 Format
 Image: Comparison of the status
 Format

 Image: Comparison of the status
 Image: Comparison of the status
 Format
 Image: Comparison of the status
 Format

 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status

 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status

 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status

 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status

 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status

 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status
 Image: Comparison of the status

 Image: Comparison of the status
 Image: Comparison of

Überprüfen Sie die Festplatte und klicken Sie dann auf "Format", um die Festplatte zu formatieren.

Hinweis: Beim Formatieren der Festplatte werden alle auf der Festplatte enthaltenen Daten gelöscht. Seien Sie bitte vorsichtig, wenn Sie eine Festplatte formatieren.

3.3.5 App herunterladen

Bitte laden Sie die App herunter und starten Sie sie. Scannen Sie den QR-Code des Geräts, um das Gerät hinzuzufügen.



3.4 Ändern Sie das Passwort

Bitte ändern Sie das Passwort, nachdem Sie sich im System angemeldet haben. Klicken Sie mit der rechten Maustaste. Wählen Sie **[Menü] - [System Admin] - [Benutzer]**, um das Passwort zu ändern.

∷ Split Bildschirm ►	Allgemeine Einstr Aufnahmeeinst Netzwerkeinst Kanstellungen rijstemindener
Men0 System ■ Wiedergabe System ■ Videobackup System ● Lautstärke System ● Setup Assistent Werkseit ● Fast Netzwerk Kabellos hinzufügen	protokoli 1 odkin 2) notokoli 1 odkin 2) notokoli 2 n/ver 4 5 Benutzemame admin pilege 8 Wiedenbot 4 measurements 9 Obernotit 4 measurements 1 obernotit 4 measurem
① Ausschalten	Okay Abbrechen

Hinweis: Bitte merken Sie sich Ihr Passwort. Wenn Sie Ihr Passwort vergessen haben, klicken Sie mehr als sechs Mal mit einer gleichmäßigen Geschwindigkeit auf die linke und rechte Maustaste.Bei Fragen wenden Sie sich bitte an unser Support-Team unter support@sannce.com.



3.5 Richten Sie die Videoaufnahme ein

Standardmäßig zeichnet das System rund um die Uhr auf. Wenn Sie den Videoaufzeichnungsmodus ändern möchten, konfigurieren Sie das System neu.

Klicken Sie auf die rechte Maustaste. Wählen Sie **[Menü] - [Aufnahmeeinst] - [Zurücksetzen]**, um den Videoaufnahmemodus und den Zeitraum auszuwählen.

∷Split Bildschirm ►	Allgemeine Einste Animalisymmetri Netzwerkeinst Kan-stellungen System Admin
Menû Mindweqda Wiedergabe ♥ Videobackup ♦ Lautstärke ▶ o ^o Setup Assistent Fast Netzwerk Kabellos hinzufügen	Kanal Zeit Bewegung 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 Kopleren Kall Kall <tht< th=""></tht<>
① Ausschalten	Wählen Sie Alle Zurücksetzen Anwenden Okay Abbrechen

3.6 Bewegungserkennungs-Setup

Standardmäßig ist die Bewegungserkennung rund um die Uhr und für alle Bereiche aktiviert. Wenn Sie den Bewegungserkennungsmodus ändern möchten, konfigurieren Sie das System neu.

Klicken Sie auf die rechte Maustaste. Wählen Sie **[Menü] - [Kan.stellungen] - [Bewegungserkenn]**, um die Empfindlichkeitsstufe, den Bewegungserkennungszeitraum und die Bereiche auszuwählen.

₩Split Bildschirm ► •Video verwalten	Allgemeine Einstel Aufgeh meeinst - Net	zwerkeinst Kanschrillunger System Admin
Menü Codecinstellungen i ■ Wiedergabe Ranal 08D ■ Videobackup Der Aktualstierung ● Lautstärke Bitrate ●Setup Assistent Bitrate ●Fast Netzwerk Bitrate	Kanal I Erkennung Bewegung Empfindlichkeit Hoch Alarmdauer 5 Sekünden Summer E Mail-Benachricht APP Alarm	
① Ausschalten		Anwenden Okay Abbrechen

Hinweis: Bitte wählen Sie die geeigneten Bereiche für die Bewegungserkennung, den Zeitraum und die Bewegungsempfindlichkeit aus, um Fehlalarme zu reduzieren.

3.7 Videowiedergabe

Klicken Sie auf die rechte Maustaste und wählen Sie dann **[Wiedergabe]**. Standardmäßig gibt das System die frühesten Videos von heute wieder (4 Kanäle).

Sie können die Video-Timeline ziehen, um die Videos abzuspielen oder die Videowiedergabe zu beschleunigen.

Wählen Sie den Kanal & die Zeit, die Sie wiedergeben möchten, und klicken Sie dann auf **"Suche"**, um Videos von einer bestimmten Zeit zu suchen.

Split Bildschirm
Wiederwalten
Menü
Wiedergabe
Videobackup
Videobackup
Lautstärke
CSetup Assistent
Fast Netzwerk
Rabellos hinzufügen
Ausschalten




3.8 Videosicherung

Klicken Sie auf die rechte Maustaste. Wählen Sie [Videobackup] und dann den Kanal, den Videoaufnahmemodus und den Zeitraum. Klicken Sie auf **"Suche"**.

Das System zeigt die Videodateien an. Wählen Sie die gewünschten Videodateien aus und klicken Sie auf **"Backup"**.

Sie werden aufgefordert, ein USB-Laufwerk anzuschließen. Bitte stecken Sie den USB-Stick innerhalb von 60 Sekunden ein. Das System sichert die Videodateien automatisch.Bitte entfernen Sie das USB-Laufwerk, nachdem alle Videodateien exportiert wurden.

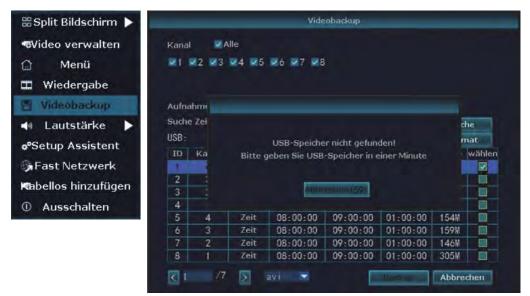

			Vide	obackup			
Kanal		Alle ⊻ 4 ⊻ 5	⊻6 ⊻7 ⊻8				
Aufna	hme						
Suche	Zei					cl	he
USB:			Vide	o sichern.			nat
ID	Ka		Bitte	warten			wählen
1				1%			
2	1			1.4			
3							
4	1	Zeit	09:00:00	09:11:14	00:11:14	49M	
5	4	Zeit	08:00:00	09:00:00	01:00:00	154M	
6	3	Zeit	08:00:00	09:00:00	01:00:00	159M	
7	2	Zeit	08:00:00	09:00:00	01:00:00	146M	
8	1	Zeit	08:00:00	09:00:00	01:00:00	305M	
1000 - 11	/7		avi 💌		Backing	Abbre	COLUMN 1

3.9 Email Benachrichtigungen Setup

Klicken Sie auf die rechte Maustaste. Wählen Sie **[Menü] - [Netzwerkeinst] - [E-Mail**], um die E-Mail-Benachrichtigungen einzurichten.

Bitte wählen Sie den SMTP-Bereitstellung und Verschlüsselungstyp und geben Sie dann den richtigen Absender, das richtige Kennwort, den richtigen SMTP-Port und die E-Mail-Adresse des Empfängers ein.

🖞 Menü	Netzwerkeinst is	E-Mail-Funktion	Aktivieren	
🗖 Wiedergabe	DDNS	SMTP Anbieter	gnail	🚽 🖬 Mehr Parameter
		Absender	annke#support.com	Test
🖞 Videobackup	E Maria	Kennwort	******	Anzeige
🛛 Lautstärke 🕨		SMTP Server	smtp.gmail.com	
Eddtottarike	Wireless Einrichtung	Port		
PSetup Assistent		Encryption Type	SSL 📼	
a manufacture and a	PPPOE	Empfänger 1	annke@support.com	Schnelleinrichtung
Fast Netzwerk		Empfänger 2		
abellos hinzufügen		Beschreibung	NVR Report	
abellos milzaragen		Intervall		Zweite
D Ausschalten		Benachricht, Mail		
		Mail aktvieren	30	Minute

3.10 Repeater Setup

Schritt 1. Klicken Sie auf die rechte Maustaste. Wählen Sie **[Video verwalten] - [Repeater]**. **Schritt 2.** Wählen Sie die Überwachungskamera in der Nähe des NVR (mit dem stärksten Signal) als Repeater.

Schritt 3. Klicken Sie auf "+", um die Überwachungskamera auszuwählen, die weit vom NVR entfernt ist (mit dem schwächsten Signal), und klicken Sie dann auf "Anwenden".

Bitte warten Sie einige Minuten, damit sich die Überwachungskameras wieder verbinden können. Klicken Sie anschließend auf **"Aktualisieren"**, um den neuen Status des Repeaters abzurufen.

Split Bildschirm

SVideo verwalten

🗇 Menü

- III Wiedergabe
- 🖺 Videobackup
- 📣 Lautstärke

- •Setup Assistent
- 🖇 Fast Netzwerk
- Rabellos hinzufügen
- ① Ausschalten

	Protokoll	Port	IP-Adresse	Gerätename	ID
Suche			-		
Kodierun					
Hinzufüge					
Ändern Sie					
				0 5	
				0 🔊	< 0 ?
				- M	
		Sta	IP-Adresse	Gerätename	c 0 /
Kanal lösd	verbunden	ertolgreich	172 20 14 30	Gerätename	Kanal
Kanal lösd Alle lösch	verbunden verbunden	erfolgreich erfolgreich	172 20 14 30 172. 20. 14. 31	Gerätename IPGAV IPCAM	Kanal
and the second second	verbunden verbunden verbunden	erfolgreich erfolgreich erfolgreich	172 20 14 30 172 20 14 31 172 20 14 31	Gerätename IPCAV IPCAM IPCAM IPCAM	Kanal 2 3
Alle lösch Kan, bearb	verbunden verbunden verbunden verbunden	erfolgreich erfolgreich erfolgreich erfolgreich	172 20 14 30 172. 20. 14. 31	Gerätename IPGAV IPCAM	Kanal 2 3 4
Alle lösch	verbunden verbunden verbunden verbunden	erfolgreich erfolgreich erfolgreich	172 20 14 30 172 20 14 31 172 20 14 31	Gerätename IPCAV IPCAM IPCAM IPCAM	Kanal 2 3 4 5
Alle lösch Kan, bearb	verbunden verbunden verbunden verbunden leoquelle	erfolgreich erfolgreich erfolgreich erfolgreich	172 20 14 30 172 20 14 31 172 20 14 31	Gerätename IPCAV IPCAM IPCAM IPCAM	Kanal 2 3 4 5 6
Alle lösch Kan, bearb	verbunden verbunden verbunden verbunden leoquelle leoquelle	erfolgreich erfolgreich erfolgreich erfolgreich Keine Vie	172 20 14 30 172 20 14 31 172 20 14 31	Gerätename IPCAV IPCAM IPCAM IPCAM	Kanal 2 3 4 5




Hinweis:

1. Wenn der Abstand zwischen den Sicherheitskameras und dem NVR zu groß ist, können Sie die Repeater-Einrichtung nicht durchführen. Bitte versuchen Sie es erneut, nachdem Sie den Abstand verkürzt haben.

2. Die als Repeater ausgewählte Überwachungskamera muss ein starkes Signal haben (mehr als 3 Balken).

3.11 Verwendung des Antennenverlängerungskabels

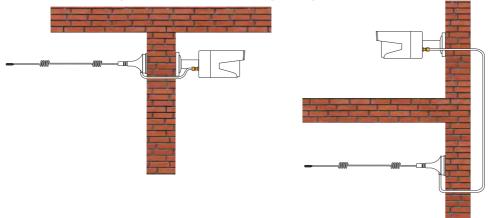

4. Fernzugriff


Stellen Sie vor dem Fernzugriff auf das NVR-System sicher, dass der NVR mit dem Internet verbunden ist. Unter 3.3.3 können Sie den Internetstatus des NVR überprüfen.


4.1 Mobiler Client-Zugriff

- Schritt 1. Suchen Sie im App Store oder bei Google Play nach "Annke Sight" und laden Sie die App auf Ihr Smartphone herunter.
- Schritt 2. Öffnen Sie die App und klicken Sie auf "Registrieren". (Bild 1)
- Schritt 3. Geben Sie Ihre E-Mail-Adresse ein, klicken Sie auf "Bestätigen" und folgen Sie den Anweisungen, um die Registrierung und Anmeldung abzuschließen. (Bild 2)
- Schritt 4. Klicken Sie auf die Schaltfläche "+". (Bild 3)
- Schritt 5. Klicken Sie auf "Kit" (Bild 4).
- Schritt 6. Klicken Sie auf "- ", und scannen Sie die ID-Nummer auf dem Gerät (Bild 5,6).
- Schritt 7. Geben Sie Ihr Passwort ein und klicken Sie auf "komplett". (Bild 7)
- Hinweis: Das Gerät hat standardmäßig kein Kennwort.

Schritt 8. Jetzt können Sie eine Vorschau des Geräts anzeigen (Bild 8,9).

SIM fehit 🗢 14:50 🕫 100 % 🖿	D SIM fehit ♥ 14:50 ♀ 100 % ■	SIM fehilt 🗢 14:50 🕹 100 % 💻
Login	Registrieren	
Bitte E-Mail-Adresse / Mandynummer ein 🖓	support@annke.com	Lara-
Bitte Passwort eingeben 💛		
Passwort vergessen? Registrieren Bestätigen Passwort merken	Bestätigen	
Login lokal	Sie haben hereits einen Account, bitte embogan	Q I Zumannen Zumannen Anna
Bild 1	Bild 2	Bild 3
2		2.10 0
	25	

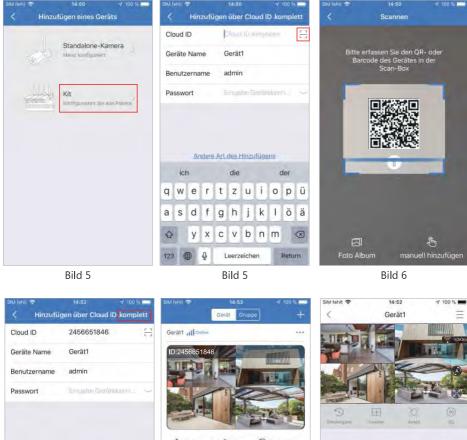

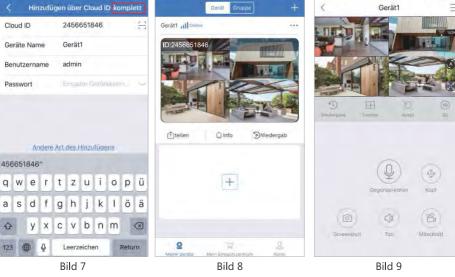

4.2 Zugriff auf das Sicherheitssystem über CMS

W

q

a S

123

Schritt 1. Installieren Sie den Annke Sight-Client auf Ihrem Computer.

Schritt 2. Starten Sie den Client und melden Sie sich bei Ihrem Konto an(Der Standardbenutzername lautet admin, und das Standardkennwort ist leer). Klicken Sie auf "Hinzuf." und geben Sie die ID, den Benutzernamen, das Kennwort, den Gerätetyp und den Gerätekanal ein, um das Gerät hinzuzufügen.Klicken Sie auf "Fertig".

🛸 Annke Sight							100 million (1990)	0 ×
							17 Hincul	C Brusts
							Geräteliste	
				nzufügen				
- C (10)	O IP/DDNS	Cloud ID	erat n	nzurugen		-		
	+ Cloud ID:	2456651845		Port:	10000			
	Benutzername .	admin		Passwort				
	Bereich	Standard Bereich	×	Gerätename:				
	Art	NVR	¥	* Anzahl Kanale:	4			
1.1	serieller Kanal.	1	Y	Kanalname .	ch_1			
	Kanal Art.	Normal	v	Panorema.	Aus	~		
		Ferti	g	Abbrechen			Gruppe	
		~					PTZ Steuerung	
Annke Sight	Wiedergabe Konagement	Benutzer Parameter Aufrahme		enshat Alettenner B	Idscherm-	96 Mehr		

Schritt 3. Bewegen Sie den Mauszeiger über die ID-Nummer. Klicken Sie mit der rechten Maustaste und wählen Sie dann "Videos verbinden".Nach einigen Sekunden können Sie das Remote-Live-Streaming anzeigen.



4.3 Zugriff auf das Sicherheitssystem über einen Webbrowser

Schritt 1. Starten Sie den IE-Browser. Geben Sie **http://sight.annke.com** ein und drücken Sie die Eingabetaste.

Schritt 2. Geben Sie die ID, den Benutzernamen und das Passwort ein, um die Live-Ansicht zu erhalten.

🔶 🔸 🖾 http://www.isiannike.com/	9 - C SRemote network video b X	****
-	Cloud ID login Username login	Language T
	2088836892	×
	Save the loging device	
	Login	



5. Kontaktieren Sie uns

Falls Sie Fragen haben, besuchen Sie bitte unser Annke-Hilfezentrum (help.annke.com), um Lösungen zur Fehlerbehebung zu erhalten, oder wenden Sie sich per E-Mail an unser Support-Team unter **support@annke.com**

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for **compliance could void the user's authority to** operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- -- Reorient or relocate the receiving antenna.
- -- Increase the separation between the equipment and receiver.
- -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- -- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter.