

FCC/ISED

RF

TEST REPORT


ISSUED BY
Shenzhen BALUN Technology Co., Ltd.



FOR
ZigBee Module

ISSUED TO
Volansys Technologies pvt ltd

Block A-7th Floor, Safal Profitaire, Corporate Road Prahaladnagar,
Ahmedabad-380 015, Gujarat, India

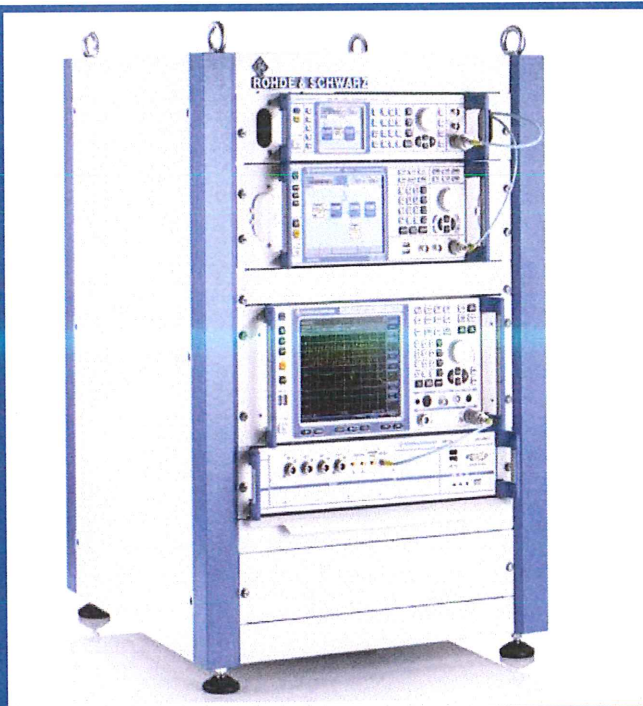

Tested by: Ye Hongji
Ye Hongji

Date: Apr 20, 2021

Approved by: Wei Yanquan
Wei Yanquan
(Chief Engineer)

Date: Apr. 20, 2021

Report No.: BL-SZ2120086-601

EUT Name: ZigBee Module

Model Name: JN5179-001-M16

Brand Name: Volansys

Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen (Issue 5, March 2019)
RSS-247 (Issue 2, February 2017)

FCC ID: 2AKNO-VOLJN5179M16

ISED Number: 22256-JN5179M16

Test Conclusion: Pass

Test Date: Feb. 03, 2021 ~ Apr. 15, 2021

Date of Issue: Apr. 20, 2021

NOTE: This test report of test results only related to testing samples, which can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen BALUN Technology Co., Ltd. Any objections should be raised within thirty days from the date of issue. To validate the report, please contact us.

Revision History

Version	Issue Date	Revisions Content
<u>Rev. 01</u>	<u>Apr. 02, 2021</u>	<u>Initial Issue</u>
<u>Rev. 02</u>	<u>Apr. 20, 2021</u>	<u>Add antenna information required in RSS-Gen 6.8 on page 16 and add 2475 channel data on power, conducted spurious emissions, band edge (authorized-band band-edge), band edge (restricted-band band-edge) & power spectral density (PSD).</u>

TABLE OF CONTENTS

1	ADMINISTRATIVE DATA (GENERAL INFORMATION)	5
1.1	Identification of the Testing Laboratory	5
1.2	Identification of the Responsible Testing Location	5
1.3	Laboratory Condition	5
1.4	Announce	5
2	PRODUCT INFORMATION	6
2.1	Applicant Information	6
2.2	Manufacturer Information	6
2.3	Factory Information	6
2.4	General Description for Equipment under Test (EUT)	6
2.5	Technical Information	7
2.6	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Verdict	9
4	GENERAL TEST CONFIGURATIONS	10
4.1	Test Environments	10
4.2	Test Equipment List	10
4.3	Measurement Uncertainty	12
4.4	Description of Test Setup	13
4.4.1	For Antenna Port Test	13
4.4.2	For AC Power Supply Port Test	13

4.4.3	For Radiated Test (Below 30 MHz)	14
4.4.4	For Radiated Test (30 MHz-1 GHz)	14
4.4.5	For Radiated Test (Above 1 GHz).....	15
4.5	Measurement Results Explanation Example.....	15
4.5.1	For conducted test items:	15
4.5.2	For radiated band edges and spurious emission test:.....	15
5	TEST ITEMS.....	16
5.1	Antenna Requirements.....	16
5.1.1	Relevant Standards	16
5.1.2	Antenna Anti-Replacement Construction	17
5.1.3	Antenna Gain	17
5.2	Output Power	18
5.2.1	Test Limit.....	18
5.2.2	Test Setup	18
5.2.3	Test Procedure	18
5.2.4	Test Result	19
5.3	6dB Bandwidth	20
5.3.1	Limit.....	20
5.3.2	Test Setup	20
5.3.3	Test Procedure	20
5.3.4	Test Result	20
5.4	Conducted Spurious Emission	21
5.4.1	Limit.....	21
5.4.2	Test Setup	21
5.4.3	Test Procedure	21
5.4.4	Test Result	22
5.5	Band Edge (Authorized-band band-edge).....	23
5.5.1	Limit.....	23
5.5.2	Test Setup	23
5.5.3	Test Procedure	23
5.5.4	Test Result	24
5.6	Conducted Emission	25

5.6.1	Limit.....	25
5.6.2	Test Setup	25
5.6.3	Test Procedure	25
5.6.4	Test Result	25
5.7	Radiated Spurious Emission	26
5.7.1	Limit.....	26
5.7.2	Test Setup	26
5.7.3	Test Procedure	26
5.7.4	Test Result	29
5.8	Band Edge (Restricted-band band-edge).....	30
5.8.1	Limit.....	30
5.8.2	Test Setup	30
5.8.3	Test Procedure	30
5.8.4	Test Result	30
5.9	Power Spectral density (PSD).....	31
5.9.1	Limit.....	31
5.9.2	Test Setup	31
5.9.3	Test Procedure	31
5.9.4	Test Result	31
ANNEX A	TEST RESULT	32
A.1	Output Power	32
A.2	Occupied Bandwidth	34
A.3	Conducted Spurious Emissions	36
A.4	Band Edge (Authorized-band band-edge).....	40
A.5	Conducted Emissions.....	42
A.6	Radiated Spurious Emission	44
A.7	Band Edge (Restricted-band band-edge).....	62
A.8	Power Spectral Density (PSD)	67
ANNEX B	TEST SETUP PHOTOS	68
ANNEX C	EUT EXTERNAL PHOTOS	68
ANNEX D	EUT INTERNAL PHOTOS	68

1 ADMINISTRATIVE DATA (GENERAL INFORMATION)

1.1 Identification of the Testing Laboratory

Company Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Identification of the Responsible Testing Location

Test Location	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 11524A-1. The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.
Description	All measurement facilities used to collect the measurement data are located at Block B, FL 1, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China 518055

1.3 Laboratory Condition

Ambient Temperature	20°C to 25°C
Ambient Relative Humidity	45% to 55%
Ambient Pressure	100 kPa to 102 kPa

1.4 Announce

- (1) The test report reference to the report template version v1.3.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
- (5) This document may not be altered or revised in any way unless done so by BALUN and all revisions are duly noted in the revisions section.
- (6) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (7) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Volansys Technologies pvt ltd
Address	Block A-7th Floor, Safal Profitaire, Corporate Road Prahaladnagar, Ahmedabad-380 015, Gujarat, India

2.2 Manufacturer Information

Manufacturer	Volansys Technologies pvt ltd
Address	Ratana Business Hub,207, 2nd Floor, Opp Bharat Petrol PumpSanathal Chokdi, Changodar Highway, Ahmedabad 382210 Gujarat India

2.3 Factory Information

Factory	Volansys Technologies pvt ltd
Address	Ratana Business Hub,207, 2nd Floor, Opp Bharat Petrol PumpSanathal Chokdi, Changodar Highway, Ahmedabad 382210 Gujarat India

2.4 General Description for Equipment under Test (EUT)

EUT Name	ZigBee Module
Model Name Under Test	JN5179-001-M16
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial number	2AKNO-VOLJN5179-M16
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Technical Information

Network and Wireless connectivity	Zigbee
-----------------------------------	--------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology		DSSS(IEEE802.15.4)
Modulation Type		O-QPSK
Product Type		☒ Mobile ☐ Portable ☐ Fix Location
Transfer Rate		250 KHz
Frequency Range		The frequency range used is 2400 MHz to 2483.5 MHz.
Number of channel		16 (at intervals of 5 MHz) $F_{CH} = 2350 + 5K$ [MHz], for K=11, 12, ..., 26
Tested Channel		11 (2405 MHz), 18 (2440 MHz), 25 (2475 MHz), 26 (2480 MHz)
Antenna Type	External antenna	Columnar Antenna
	Internal antenna	PCB Antenna
Antenna Gain	External antenna	2.1 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
	Internal antenna	3 dBi (In test items related to antenna gain, the final results reflect this figure. This value is provided by the applicant.)
Antenna System(MIMO Smart Antenna)		N/A

All channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

2.6 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	SecureCRTPortable		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Lenovo	X220
Mode	Channel	Frequency (MHz)	Soft Set
O-QPSK	CH11	2405	4
	CH18	2440	4
	CH25	2475	4
	CH26	2480	2

Run software:

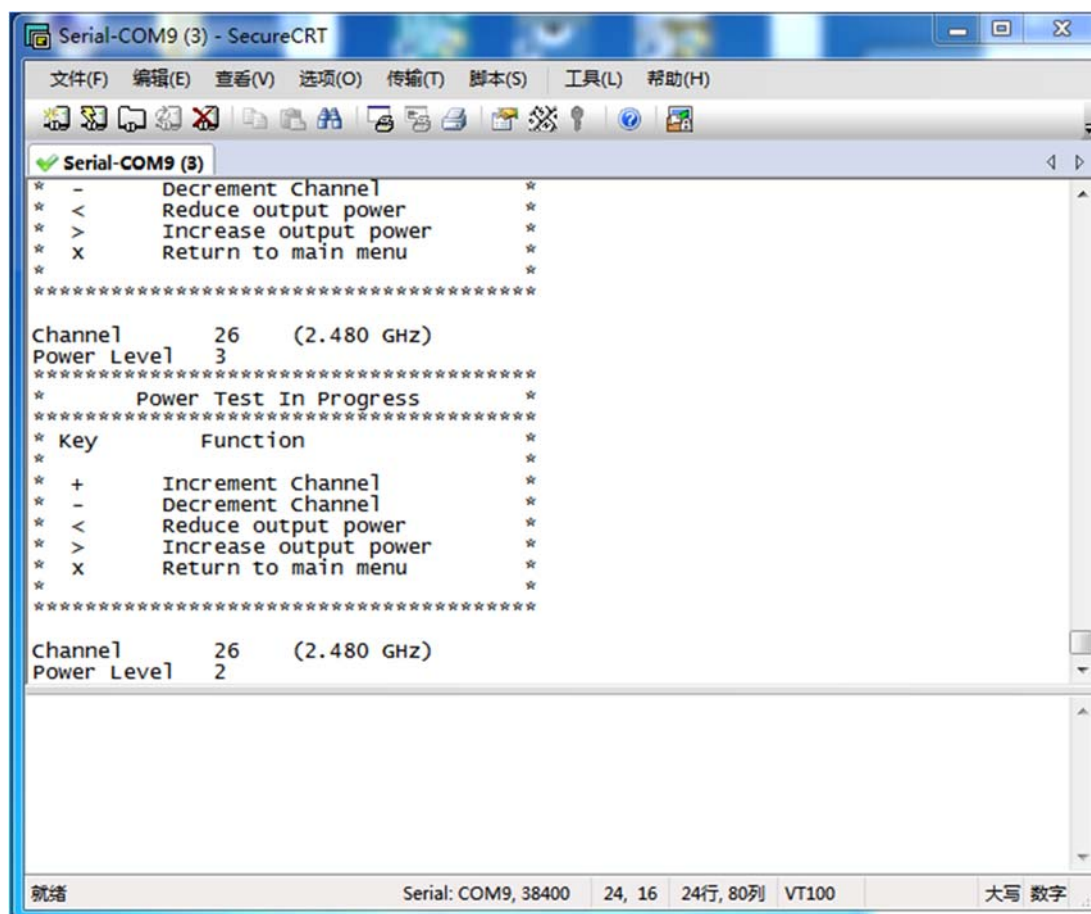

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Miscellaneous Wireless Communications Services
2	KDB Publication 558074 D01v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	RSS-Gen (Issue 5, Mar. 2019)	General Requirements for Compliance of Radio Apparatus
5	RSS-247 (Issue 2, February 2017)	Digital Transmission Systems (DTSs), Frequency Hopping Systems(FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Verdict

No.	Description	FCC PART No.	ISED Part No.	Test Result	Verdict
1	Antenna Requirement	15.203; 15.247(b)	RSS-247, 5.4 (6)	N/A	Pass ^{Note 1}
2	Output Power	15.247(b)	RSS-247, 5.4 (4)	ANNEX A.1	Pass
3	6dB Bandwidth	15.247(a)	RSS-GEN, 6.6; RSS-247, 5.2 (1)	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 5.5	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.209; 15.247(d)	RSS-GEN, 8.9; RSS-247, 5.5	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209; 15.247(d)	RSS-247, 5.5	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209; 15.247(d)	RSS-247, 5.5	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 5.2 (2)	ANNEX A.8	Pass
10	Receiver Spurious Emissions	N/A	RSS-Gen, 7.1.2	N/A	N/A ^{Note 2}

Note ¹: Please refer to section 5.1.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	45% - 55%	
Atmospheric Pressure	100 kPa - 102 kPa	
Temperature	NT (Normal Temperature)	+22°C to +25°C
Working Voltage of the EUT	NV (Normal Voltage)	3.3 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2020.06.08	2021.06.07
Switch Unit with OSP-B157	ROHDE&SCHWARZ	OSP120	101270	2020.06.08	2021.06.07
EMI Receiver	KEYSIGHT	N9038A	MY53220118	2020.06.09	2021.06.08
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2020.06.09	2021.06.08
LISN	SCHWARZBECK	NSLK 8127	8127-687	2020.06.09	2021.06.08
Bluetooth Tester	ROHDE&SCHWARZ	CBT	101005	2020.06.08	2021.06.07
DC Power Supply	ROHDE&SCHWARZ	HMP2020	018141664	2020.06.08	2021.06.07
Power Splitter	KMW	DCPD-LDC	1305003215	--	--
Power Sensor	ROHDE&SCHWARZ	NRP-Z21	103971	2020.06.08	2021.06.07
Attenuator (20 dB)	KMW	ZA-S1-201	110617091	--	--
Attenuator (6 dB)	KMW	ZA-S1-61	1305003189	--	--
Temperature Chamber	AHK	SP20	1412	2020.06.10	2021.06.09
Test Antenna-Loop(9 kHz-30 MHz)	SCHWARZBECK	FMZB 1519	1519-037	2019.10.29	2021.10.28
Test Antenna-Bi-Log(30 MHz-3 GHz)	SCHWARZBECK	VULB 9163	9163-624	2019.07.02	2021.07.01
Test Antenna-Horn(1-18 GHz)	SCHWARZBECK	BBHA 9120D	9120D-1917	2019.07.02	2021.07.01
Test Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2021.01.05	2023.01.04
Anechoic Chamber	RAINFORD	9m*6m*6m	N/A	2017.02.21	2022.02.20
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	N/A	2018.08.08	2021.08.07
Shielded Enclosure	ChangNing	CN-130701	130703	--	--
Signal Generator	ROHDE&SCHWARZ	SMB100A	177746	2020.06.08	2021.06.07
Power Amplifier	OPHIR RF	5225F	1037	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5225F	1037	2021.02.18	2022.02.17
Power Amplifier	OPHIR RF	5273F	1016	2020.02.19	2021.02.18
Power Amplifier	OPHIR RF	5273F	1016	2021.02.18	2022.02.17
Directional Coupler	Werlantone	C5982-10	109275	N/A	N/A
Directional Coupler	Werlantone	CHP-273E	S00801z-01	N/A	N/A

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Sound Level Meter	B&K	NL-20	00844023	2020.10.23	2021.10.22
Ear Simulator	B&K	4192-L-001	3038758	2020.02.19	2021.02.18
Ear Simulator	B&K	4192-L-001	3038758	2021.02.18	2022.02.17
Audio analyzer	B&K	UPL 16	100129	2020.02.28	2021.02.27
Audio analyzer	B&K	UPL 16	100129	2021.02.27	2022.02.26

4.3 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Occupied Channel Bandwidth	$\pm 4\%$
RF output power, conducted	± 1.4 dB
Power Spectral Density, conducted	± 2.5 dB
Unwanted Emissions, conducted	± 2.8 dB
All emissions, radiated	± 5.4 dB
Temperature	$\pm 1^{\circ}\text{C}$
Humidity	$\pm 4\%$


4.4 Description of Test Setup

4.4.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

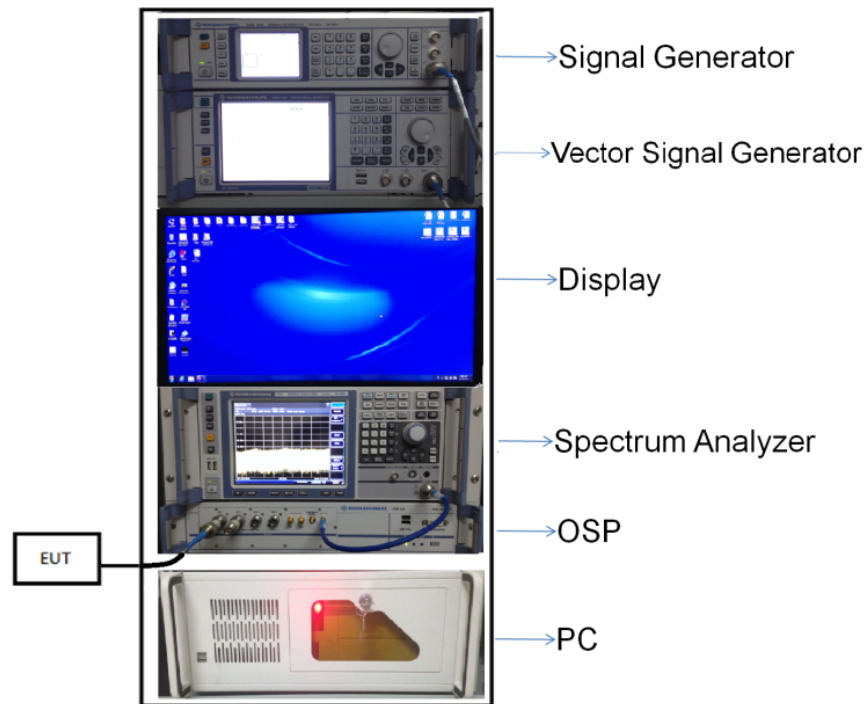


(Diagram 1)

4.4.2 For AC Power Supply Port Test

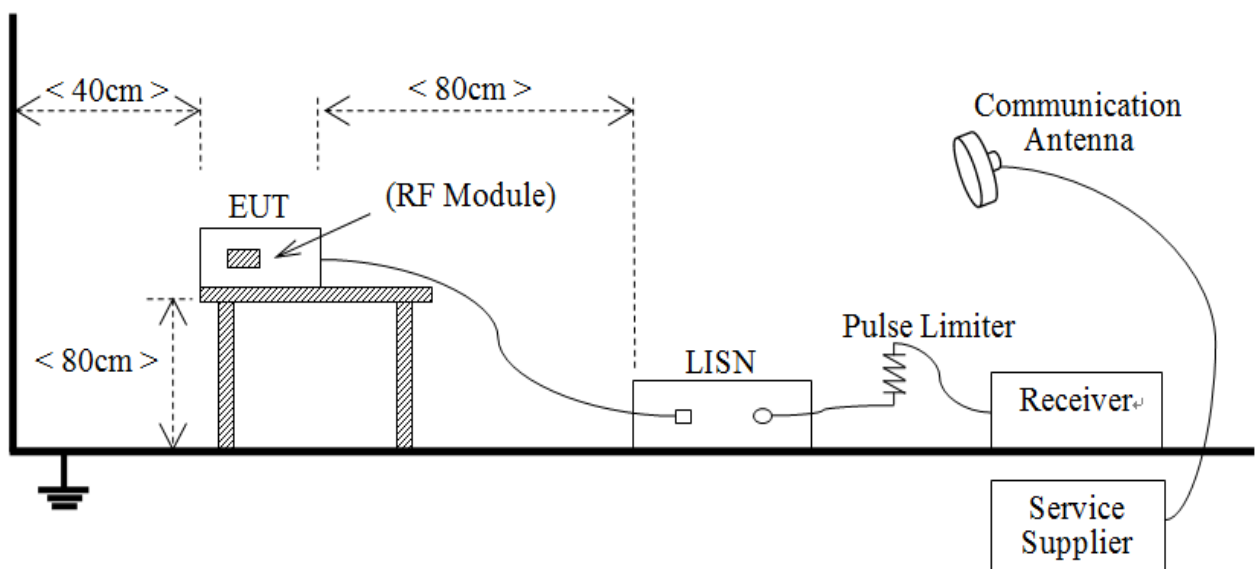


(Diagram 2)

4.4.3 For Radiated Test (Below 30 MHz)

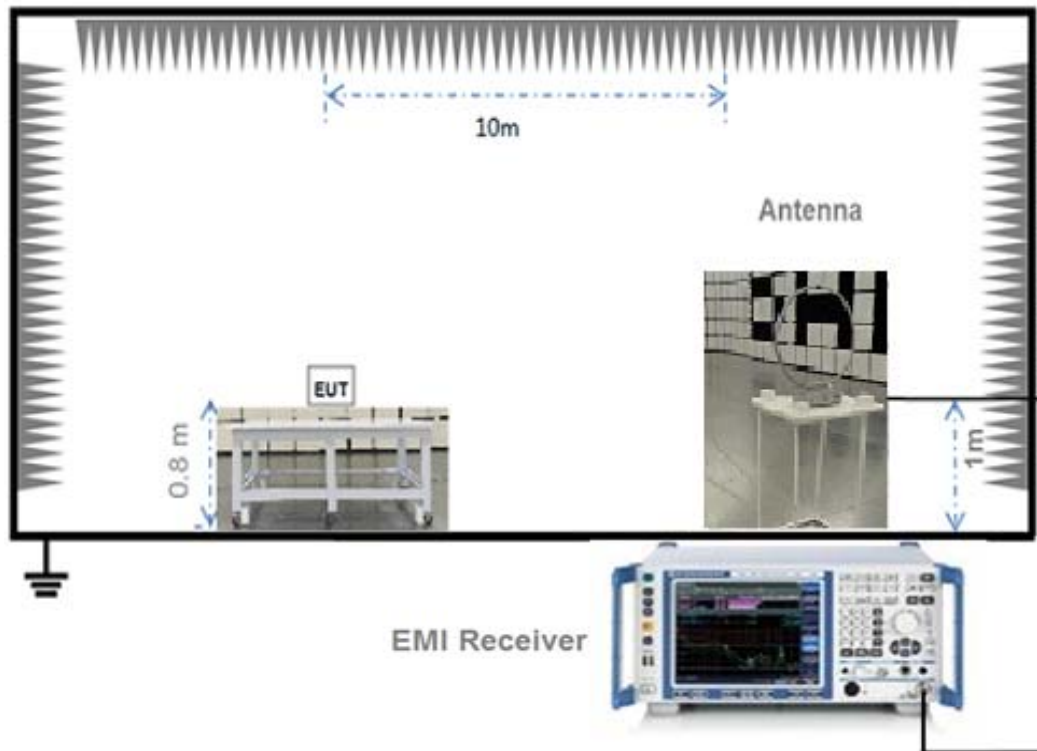


(Diagram 3)

4.4.4 For Radiated Test (30 MHz-1 GHz)

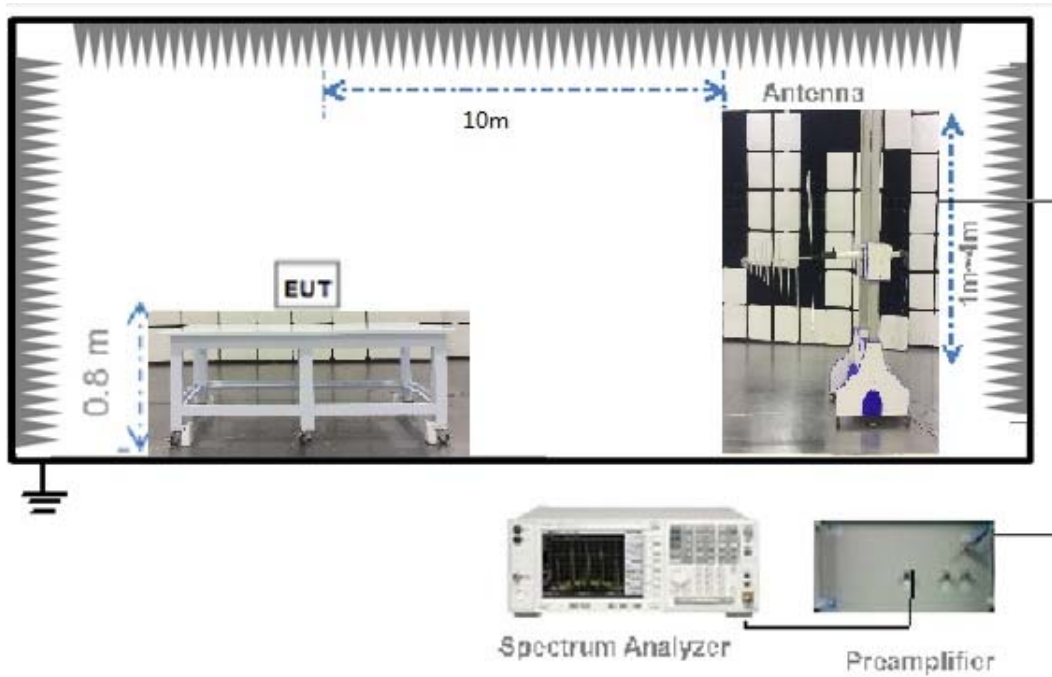

(Diagram 4)

4.4.5 For Radiated Test (Above 1 GHz)

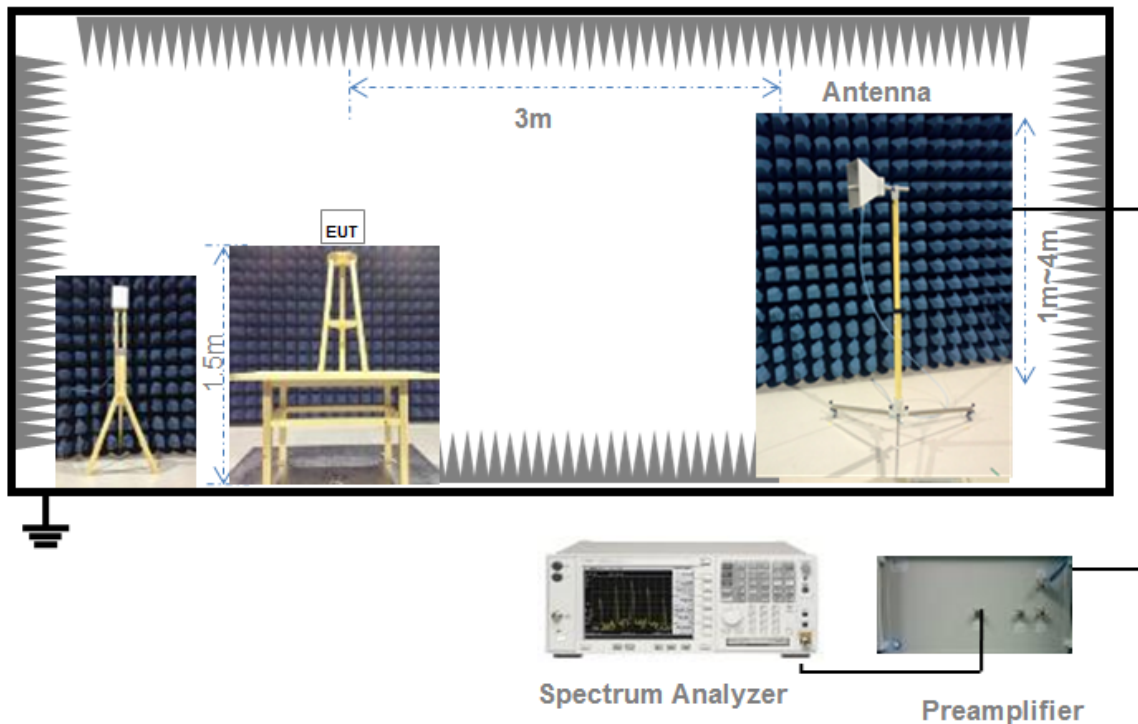

(Diagram 5)

4.5 Measurement Results Explanation Example

4.5.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.5.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dBμV/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

EIRP = Measure Conducted output power Value (dBm) + Maximum transmit antenna gain (dBi) + the appropriate maximum ground reflection factor (dB)

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (f); RSS-Gen, 6.8

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device' s antenna shall be stated, based on a measurement or on data from the antenna' s manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b); RSS-247, 5.4 (d)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

5.2.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the *DTS bandwidth*.

- a) Set the RBW $\geq$ *DTS bandwidth*.
- b) Set VBW $\geq$ 3 RBW.
- c) Set span $\geq$ 3 RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

Maximum conducted (average) output power (Reporting Only)

a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
 - 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

- c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

Set $VBW \geq RBW$. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.36dB Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Use the following spectrum analyzer settings:

Set RBW = 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-GEN, 8.9, RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The following procedures may be used to determine the peak or average field strength or power of an unwanted emission that is within 2 MHz of the authorized band edge. If a peak detector is utilized, use the procedure described in 13.2.1. Use the procedure described in 13.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., duty cycle $\geq 98\%$). Use the procedure described in 13.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent). Use the procedure described in 13.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2 percent).

When using a peak detector to measure unwanted emissions at or near the band edge (within 2 MHz of the authorized band), the following integration procedure can be used.

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band edge).

Set span to 2 MHz

RBW = 100 kHz.

VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweep to continue until the trace stabilizes (required measurement time may increase for low duty cycle applications)

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

Standard method(The 99% OBW of the fundamental emission is without 2 MHz of the authorized band):

Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.

Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.

Attenuation: Auto (at least 10 dB preferred).

Sweep time: Coupled.

Resolution bandwidth: 100 kHz.

Video bandwidth: 300 kHz.

Detector: Peak.

Trace: Max hold.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.4.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.7.2 Test Setup

See section 4.4.3 to 4.4.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).

b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)

c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).

d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).

e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

f) Compare the resultant electric field strength level to the applicable limit.

g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure

Peak emission levels are measured by setting the instrument as follows:

a) RBW = as specified in Table 1.

b) VBW $\geq 3 \times$ RBW.

c) Detector = Peak.

d) Sweep time = auto.

e) Trace mode = max hold.

f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz

> 1000 MHz	1 MHz
------------	-------

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30 MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(c); RSS-247, 5.5

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

For transmitters operating above 1 GHz repeat the measurement with an average detector.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(d); RSS-247, 5.2 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

5.9.2 Test Setup

See section 4.4.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power

Peak Power Test Data

Channel	Measured Output Peak Power		Limit		Verdict
	O-QPSK		dBm	mW	
	dBm	mW			
CH11	25.53	357.27	30	1000	Pass
CH18	25.39	345.94			Pass
CH25	25.30	338.84			Pass
CH26	1.34	1.36			Pass

Average Power Test Data


Channel	Measured Output Average Power		Limit		Verdict
	O-QPSK		dBm	mW	
	dBm	mW			
CH11	22.98	198.61	30	1000	Pass
CH18	22.57	180.72			Pass
CH25	22.35	171.79			Pass
CH26	-1.13	0.77			Pass

Maximum E.I.R.P Test Data(External antenna)

Channel	E.I.R.P		Limit		Verdict
	O-QPSK		dBm	W	
	dBm	mW			
CH11	28.53	712.85	36	4	Pass
CH18	28.39	690.24			Pass
CH25	28.30	676.08			Pass
CH26	4.34	2.72			Pass


Test plots

CH11

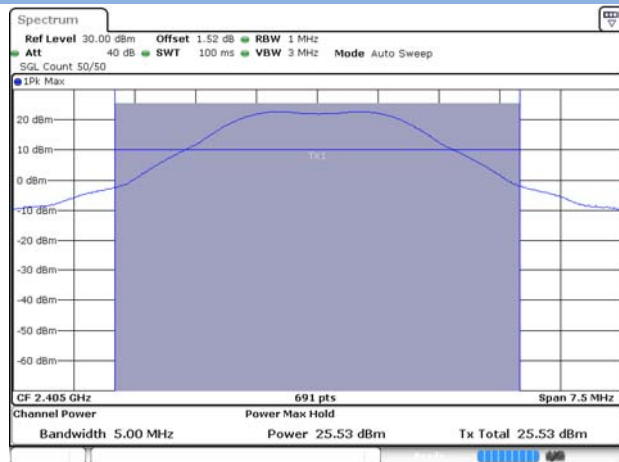


Date: 16 MAR 2021 14:39:15

CH18

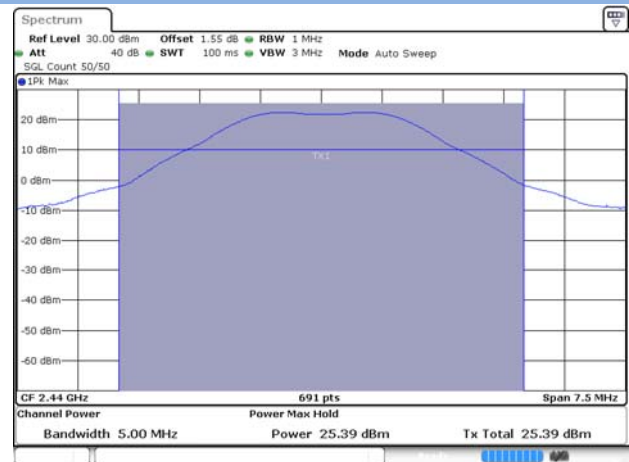

Date: 16 MAR 2021 14:39:58

CH25

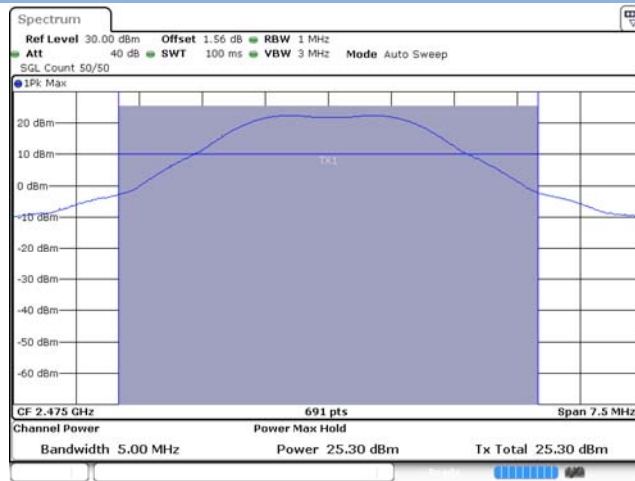

CH26



Date: 16 MAR 2021 14:42:25

A.2 Occupied Bandwidth


Test Data

Test Mode	O-QPSK		
Channel	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB Bandwidth Limits (kHz)
CH11	1.608643	2.310924	≥500
CH18	1.637695	2.364946	≥500
CH26	1.579590	2.334934	≥500

Test plots

6 dB Bandwidth

CH11

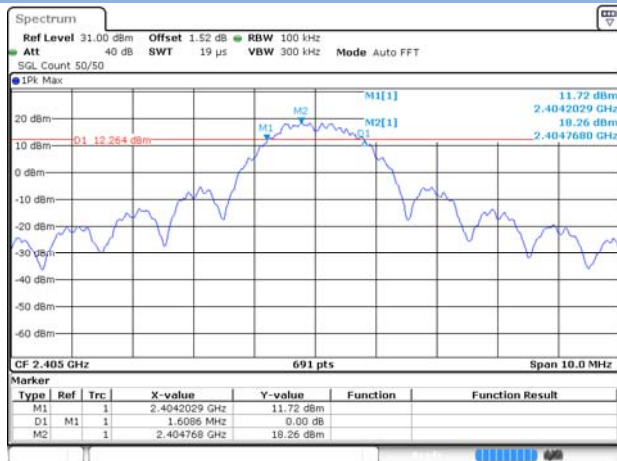

CH18




CH26




99% Bandwidth

CH11

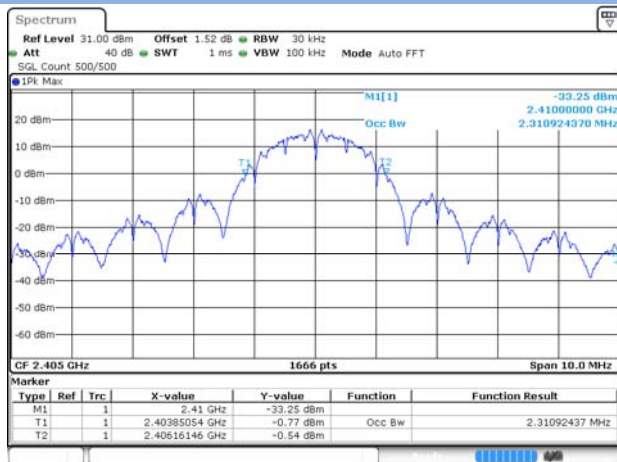

Date: 16 MAR 2021 14:36:41

CH18

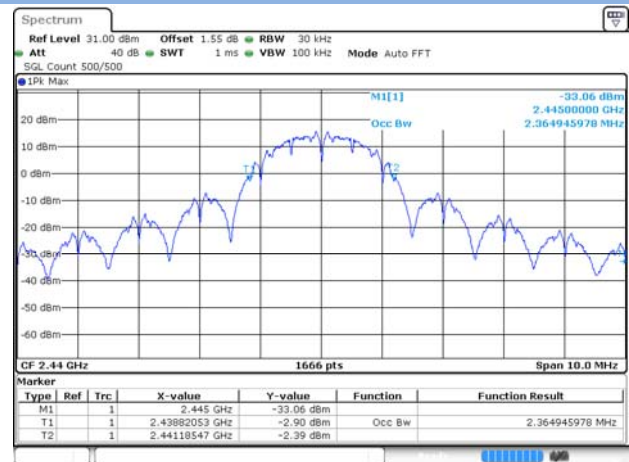

Date: 16 MAR 2021 14:40:13

CH26



Date: 16 MAR 2021 14:42:39


A.3 Conducted Spurious Emissions

Test Data

O-QPSK					
Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated 20 dBc Limit	
CH11	2372.500	-34.24	19.93	-0.07	Pass
CH18	24864.90	-36.11	19.45	-0.55	Pass
CH25	2344.500	-34.51	19.63	-0.37	Pass
CH26	22795.40	-36.36	-4.34	-24.34	Pass


Test Plots

CH11, CARRIER LEVEL

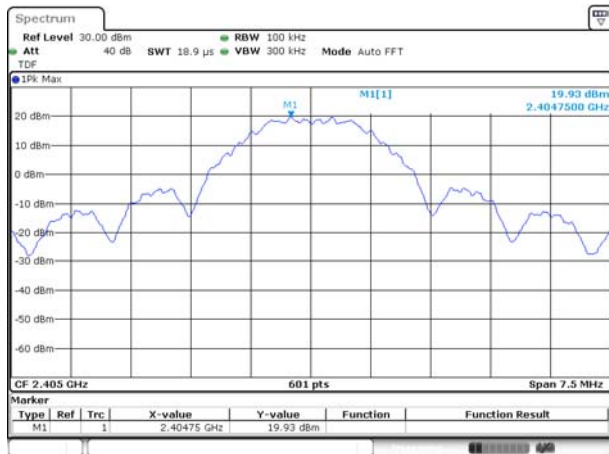


Date: 16 MAR 2021 14:36:59

CH11, SPURIOUS 30 MHz ~ 3 GHz

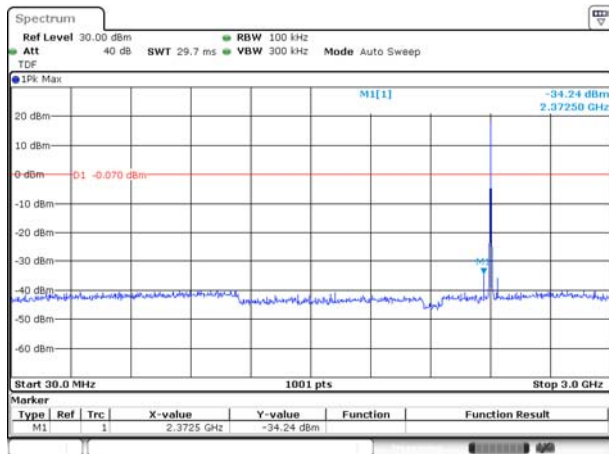


Date: 16 MAR 2021 14:37:34

CH11, SPURIOUS 2 GHz ~ 25 GHz

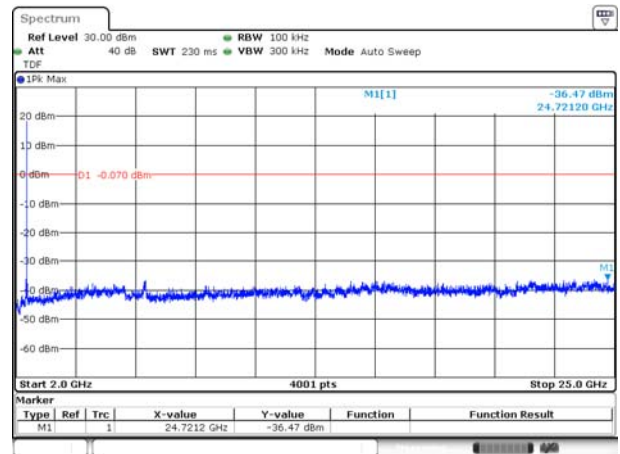


Date: 16 MAR 2021 14:37:41

CH18, CARRIER LEVEL

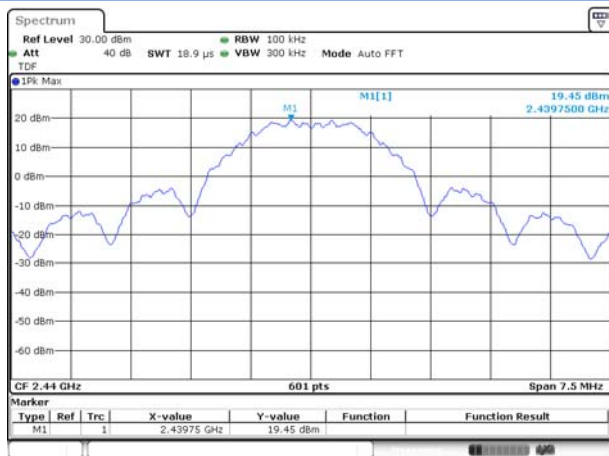


Date: 16 MAR 2021 14:40:34

CH18, SPURIOUS 30 MHz ~ 3 GHz

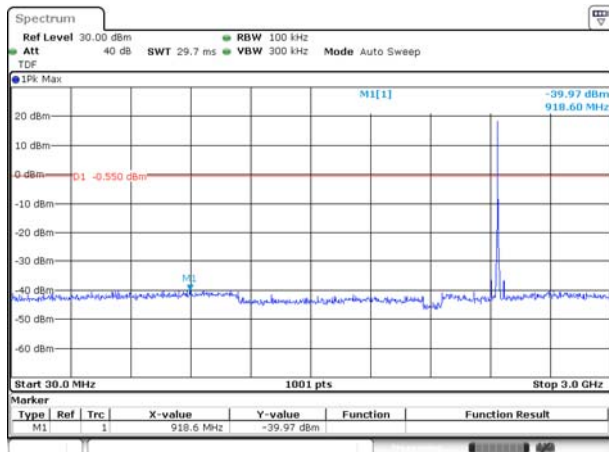


Date: 16 MAR 2021 14:41:03

CH18, SPURIOUS 2 GHz ~ 25 GHz

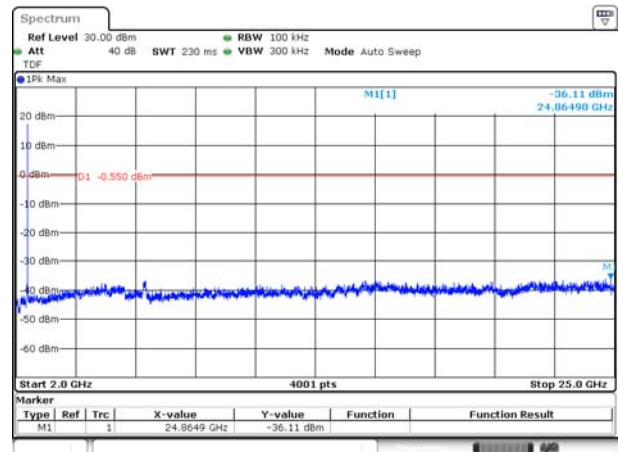


Date: 16 MAR 2021 14:41:11


CH25, CARRIER LEVEL

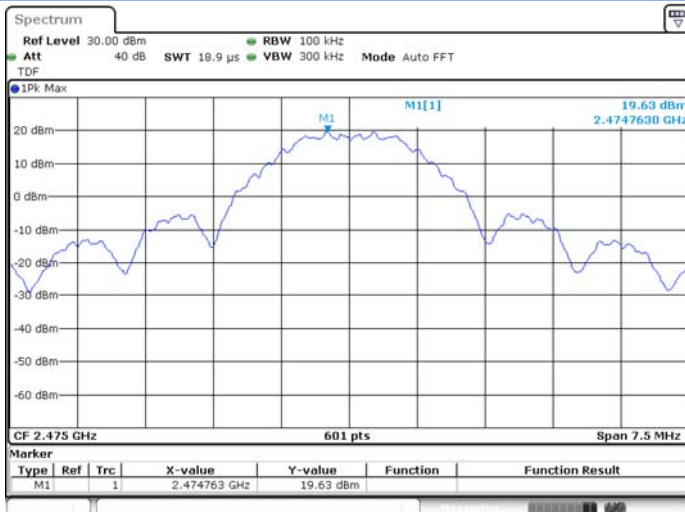


CH25, SPURIOUS 30 MHz ~ 3 GHz

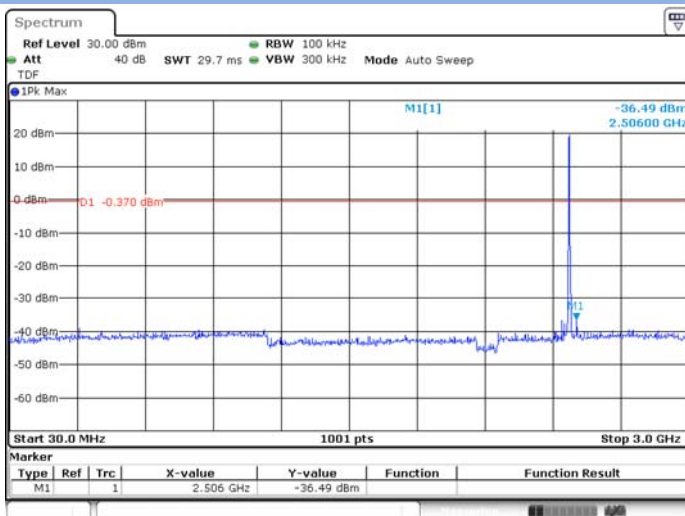

CH25, SPURIOUS 2 GHz ~ 25 GHz

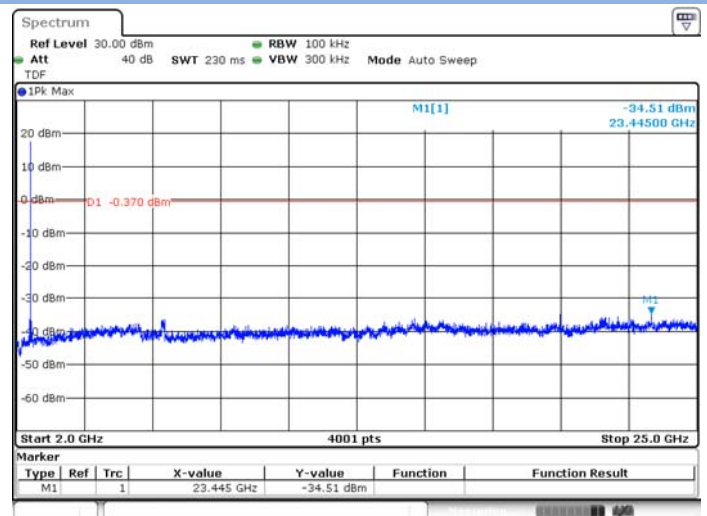


CH26, CARRIER LEVEL

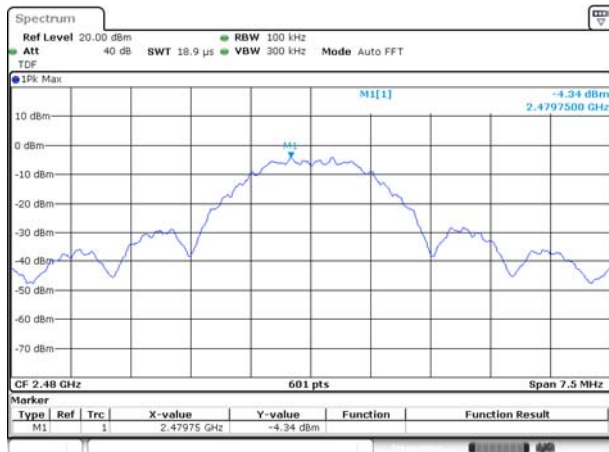


Date: 16 MAR 2021 14:42:51

CH26, SPURIOUS 30 MHz ~ 3 GHz

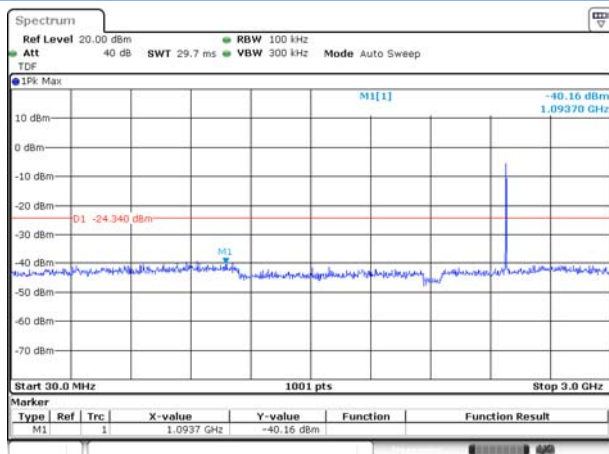

Date: 16 MAR 2021 14:43:11

CH26, SPURIOUS 2 GHz ~ 25 GHz

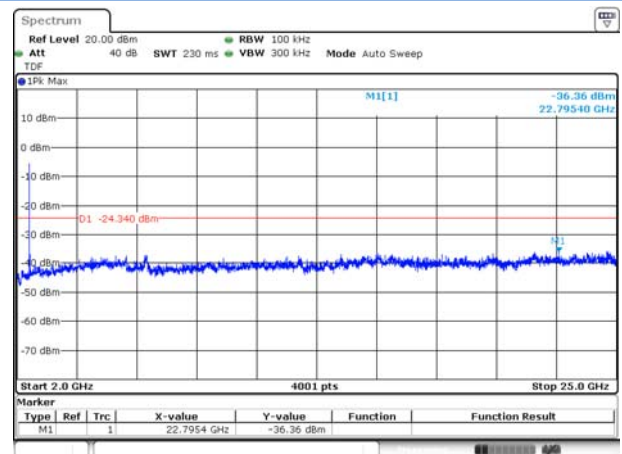

Date: 16 MAR 2021 14:43:38


A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Channel	Frequency (MHz)	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated 20 dBc Limit	
CH11	2405.000	-24.95	19.93	-0.07	Pass
CH25	2475.000	-38.86	19.63	-0.37	Pass
CH26	2480.000	-41.79	-4.34	-24.34	Pass

Test Plots


CH11, Carrier level

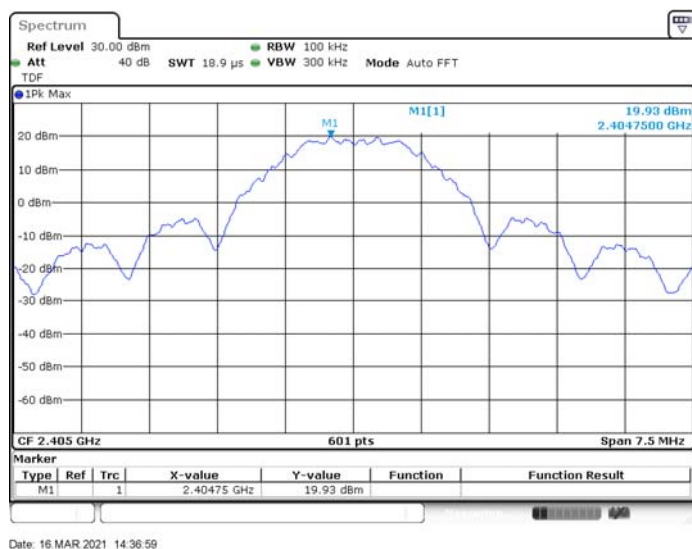


CH11, Reference level

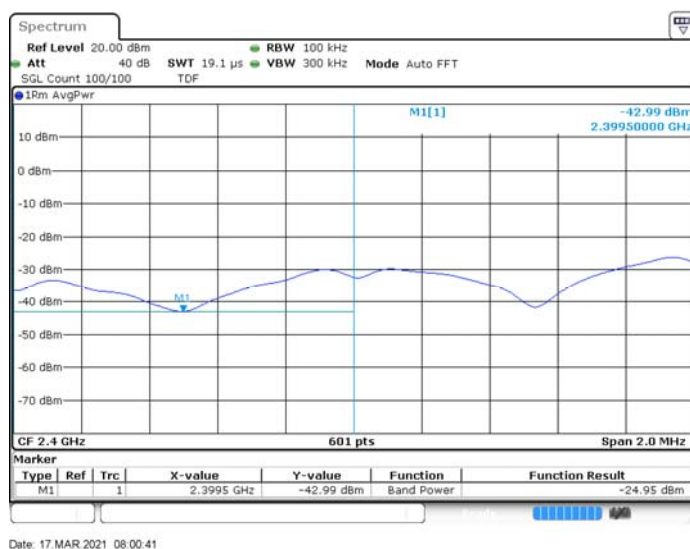


CH25, Carrier level

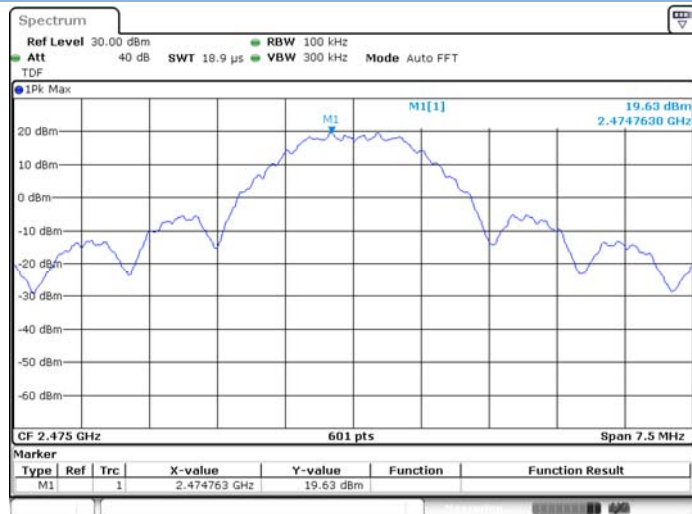

CH25, Reference level

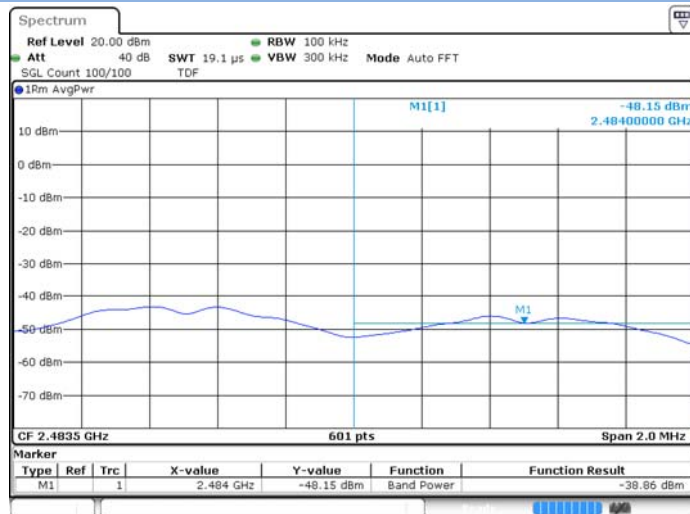


CH26, Carrier level

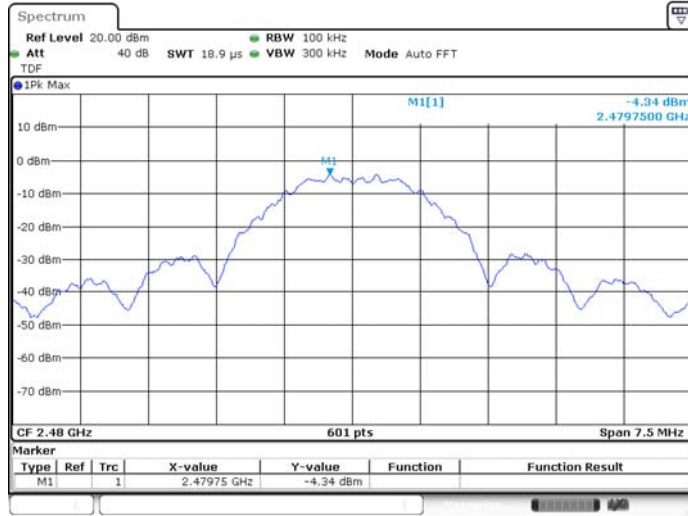

Date: 16 MAR 2021 14:42:51

CH26, Reference level

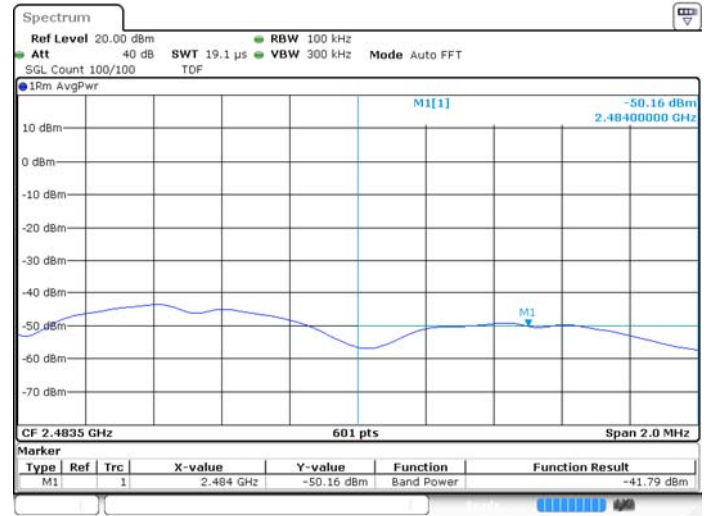

Date: 17 MAR 2021 08:02:14


A.5 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15B_Class B

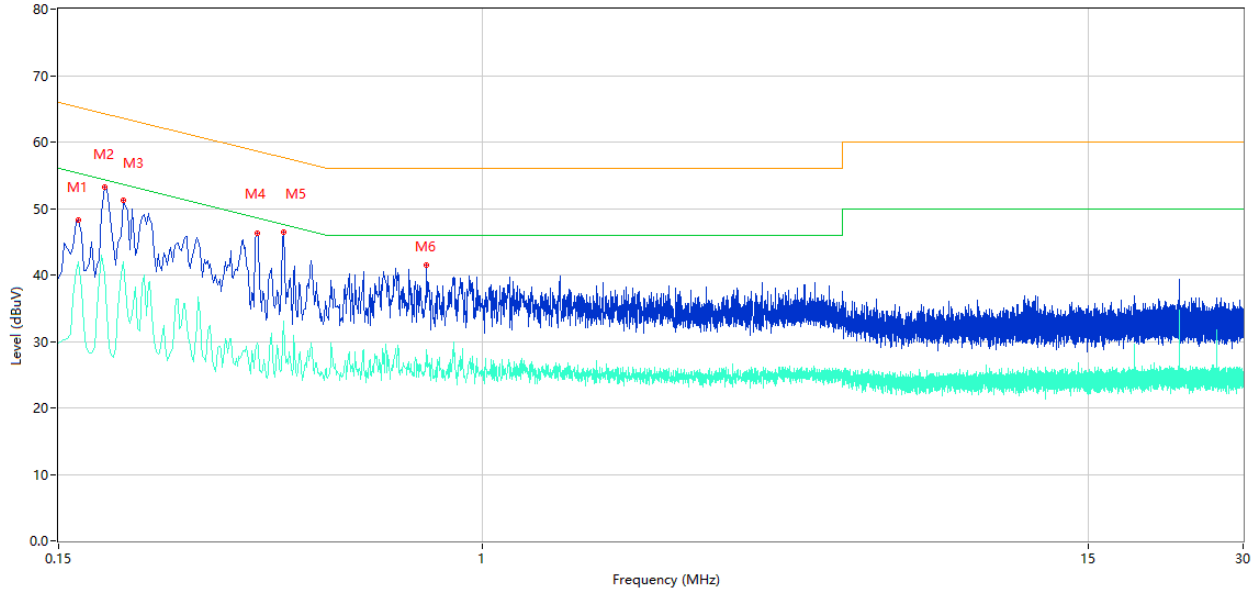

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.164	48.32	10.40	65.26	-16.94	Peak	L	Pass
1**	0.164	42.07	10.40	55.26	-13.19	AV	L	Pass
2	0.184	53.18	10.39	64.30	-11.12	Peak	L	Pass
2**	0.184	40.11	10.39	54.30	-14.19	AV	L	Pass
3	0.200	51.25	10.38	63.61	-12.36	Peak	L	Pass
3**	0.200	41.98	10.38	53.61	-11.63	AV	L	Pass
4	0.364	46.29	10.30	58.64	-12.35	Peak	L	Pass
4**	0.364	29.72	10.30	48.64	-18.92	AV	L	Pass
5	0.410	46.49	10.31	57.65	-11.16	Peak	L	Pass
5**	0.410	33.13	10.31	47.65	-14.52	AV	L	Pass
6	0.778	41.53	10.26	56.00	-14.47	Peak	L	Pass
6**	0.778	28.78	10.26	46.00	-17.22	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15B_Class B

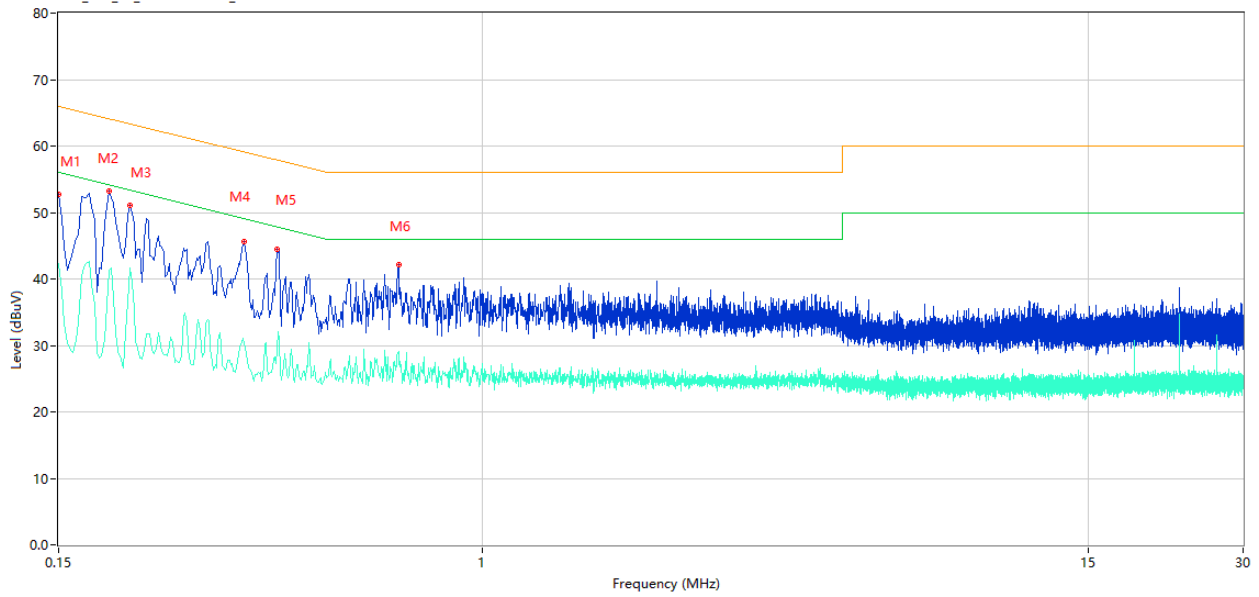

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Over Limit (dB)	Detector	Line	Verdict
1	0.150	52.75	10.41	66.00	-13.25	Peak	N	Pass
1**	0.150	42.26	10.41	56.00	-13.74	AV	N	Pass
2	0.188	53.17	10.38	64.12	-10.95	Peak	N	Pass
2**	0.188	41.37	10.38	54.12	-12.75	AV	N	Pass
3	0.206	51.07	10.38	63.37	-12.30	Peak	N	Pass
3**	0.206	41.69	10.38	53.37	-11.68	AV	N	Pass
4	0.344	45.58	10.32	59.11	-13.53	Peak	N	Pass
4**	0.344	30.32	10.32	49.11	-18.79	AV	N	Pass
5	0.398	44.48	10.31	57.90	-13.42	Peak	N	Pass
5**	0.398	29.49	10.31	47.90	-18.41	AV	N	Pass
6	0.686	42.13	10.27	56.00	-13.87	Peak	N	Pass
6**	0.686	29.08	10.27	46.00	-16.92	AV	N	Pass

A.6 Radiated Spurious Emission

Note 1: The symbol of “--” in the table which means not application.


Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note 3: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Note 4: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and normal link mode is worst.

Test Data and Plots


30 MHz to 1 GHz, ANT H

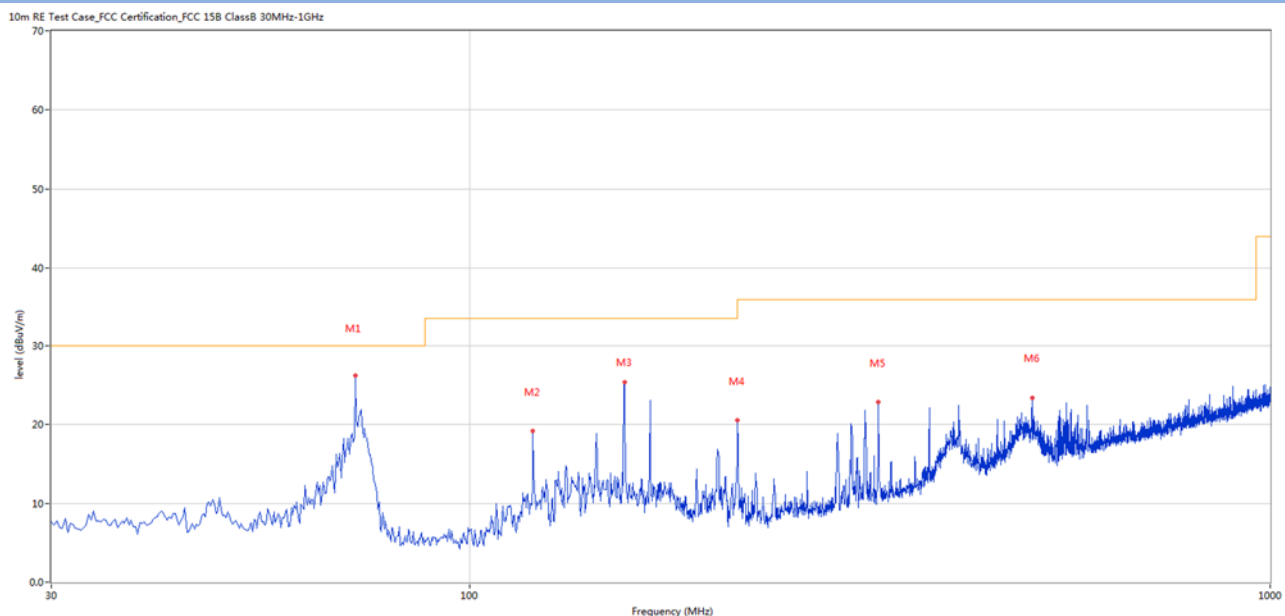

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	71.942	26.21	-30.17	30.0	-3.79	Peak	356.00	400	Horizontal	Pass
2	119.945	19.16	-28.03	33.5	-14.34	Peak	134.00	400	Horizontal	Pass
3	156.068	25.32	-25.70	33.5	-8.18	Peak	8.00	400	Horizontal	Pass
4	215.951	20.51	-28.83	33.5	-12.99	Peak	164.00	400	Horizontal	Pass
5	323.837	22.82	-24.76	36.0	-13.18	Peak	144.00	400	Horizontal	Pass
6	503.969	23.38	-20.49	36.0	-12.62	Peak	295.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

10m RE Test Case_FCC Certification_FCC 15B ClassB 30MHz-1GHz

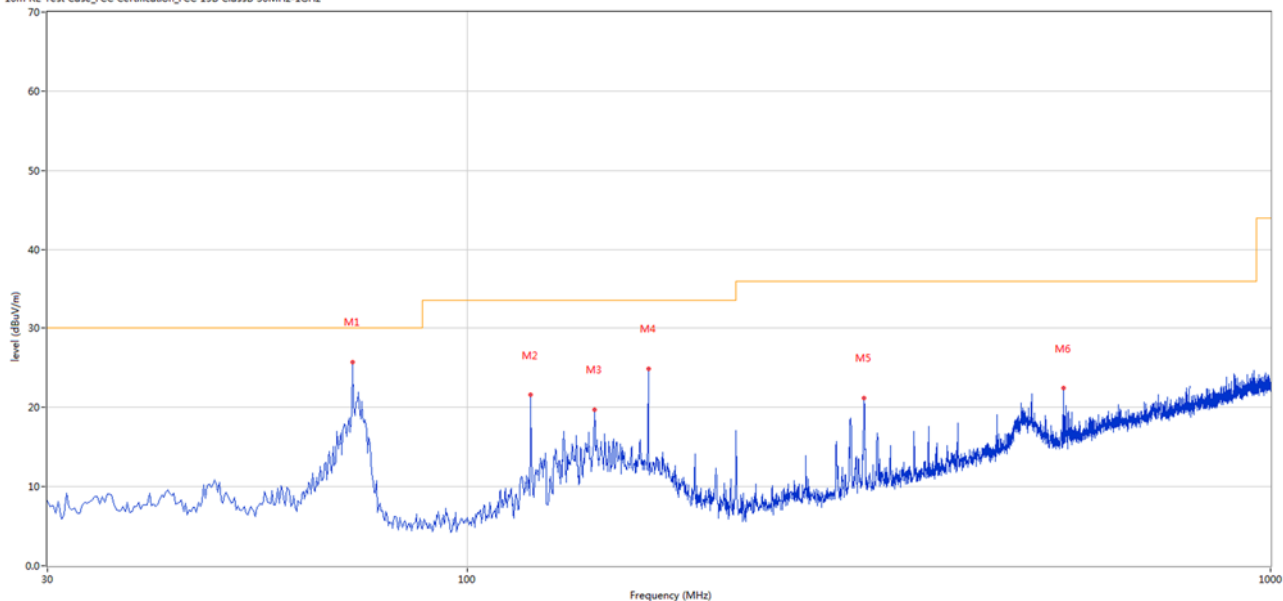

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	71.942	25.70	-30.17	30.0	-4.30	Peak	280.00	200	Vertical	Pass
2	119.945	21.57	-28.03	33.5	-11.93	Peak	360.00	200	Vertical	Pass
3	143.947	19.72	-26.15	33.5	-13.78	Peak	208.00	100	Vertical	Pass
4	167.948	24.85	-26.50	33.5	-8.65	Peak	360.00	200	Vertical	Pass
5	311.957	21.14	-25.46	36.0	-14.86	Peak	127.00	100	Vertical	Pass
6	552.942	22.40	-19.41	36.0	-13.60	Peak	0.00	300	Vertical	Pass


Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious above 18G is noise only, do not show on the report.

External antenna

CH11 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

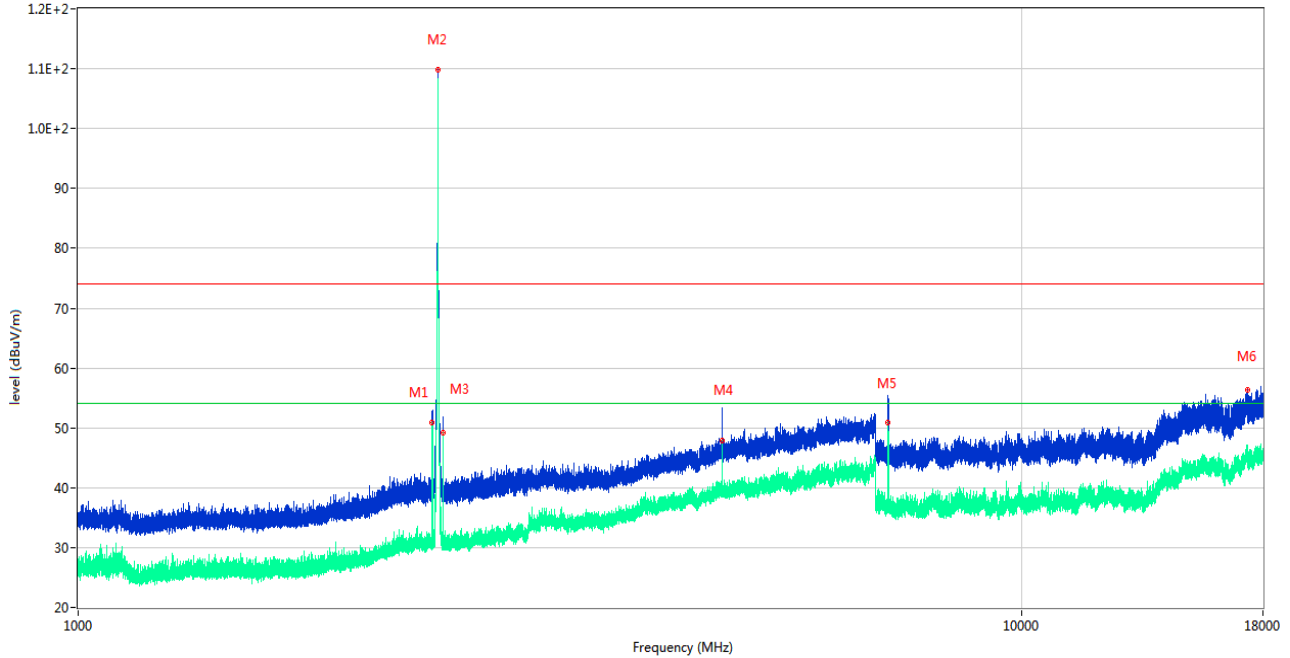

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2372.900	52.55	-10.49	74.0	-21.45	Peak	270.00	150	Horizontal	Pass
1**	2372.900	50.96	-10.49	54.0	-3.04	AV	270.00	150	Horizontal	Pass
2	2404.600	109.79	-10.74	74.0	35.79	Peak	270.00	150	Horizontal	N/A
2**	2404.600	106.11	-10.74	54.0	52.11	AV	270.00	150	Horizontal	N/A
3	2437.000	50.96	-10.61	74.0	-23.04	Peak	264.00	150	Horizontal	Pass
3**	2437.000	49.20	-10.61	54.0	-4.80	AV	264.00	150	Horizontal	Pass
4	4809.600	50.47	-1.41	74.0	-23.53	Peak	30.00	150	Horizontal	Pass
4**	4809.600	47.80	-1.41	54.0	-6.20	AV	30.00	150	Horizontal	Pass
5	7214.188	52.92	17.13	74.0	-21.08	Peak	59.00	150	Horizontal	Pass
5**	7214.188	50.86	17.13	54.0	-3.14	AV	59.00	150	Horizontal	Pass
6	17328.525	56.40	24.16	74.0	-17.60	Peak	240.00	150	Horizontal	Pass
6**	17328.525	44.73	24.16	54.0	-9.27	AV	240.00	150	Horizontal	Pass

CH11 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

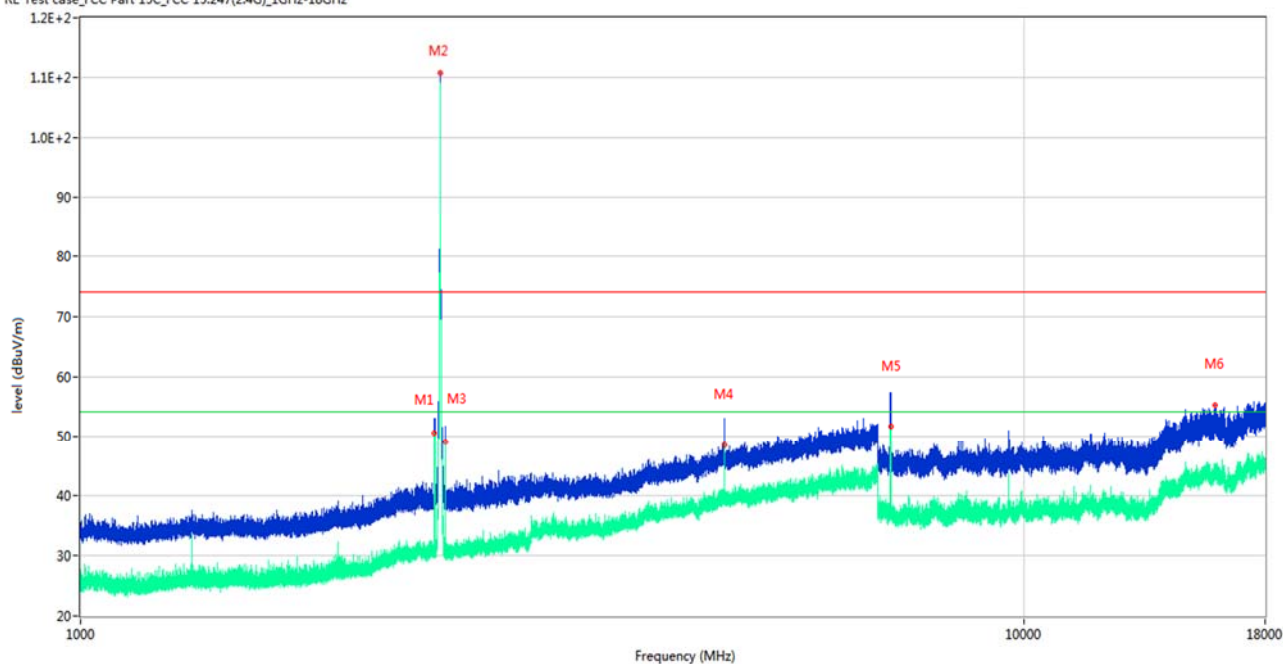

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2372.900	52.33	-10.49	74.0	-21.67	Peak	157.00	150	Vertical	Pass
1**	2372.900	50.53	-10.49	54.0	-3.47	AV	157.00	150	Vertical	Pass
2	2404.500	110.70	-10.73	74.0	36.70	Peak	263.00	150	Vertical	N/A
2**	2404.500	106.26	-10.73	54.0	52.26	AV	263.00	150	Vertical	N/A
3	2437.000	50.83	-10.61	74.0	-23.17	Peak	256.00	150	Vertical	Pass
3**	2437.000	48.95	-10.61	54.0	-5.05	AV	256.00	150	Vertical	Pass
4	4811.000	52.90	-1.41	74.0	-21.10	Peak	295.00	150	Vertical	Pass
4**	4811.000	48.48	-1.41	54.0	-5.52	AV	295.00	150	Vertical	Pass
5	7216.775	57.21	17.17	74.0	-16.79	Peak	87.00	150	Vertical	Pass
5**	7216.775	51.78	17.17	54.0	-2.22	AV	87.00	150	Vertical	Pass
6	15935.963	55.23	23.85	74.0	-18.77	Peak	300.00	150	Vertical	Pass
6**	15935.963	43.27	23.85	54.0	-10.73	AV	300.00	150	Vertical	Pass

CH18 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

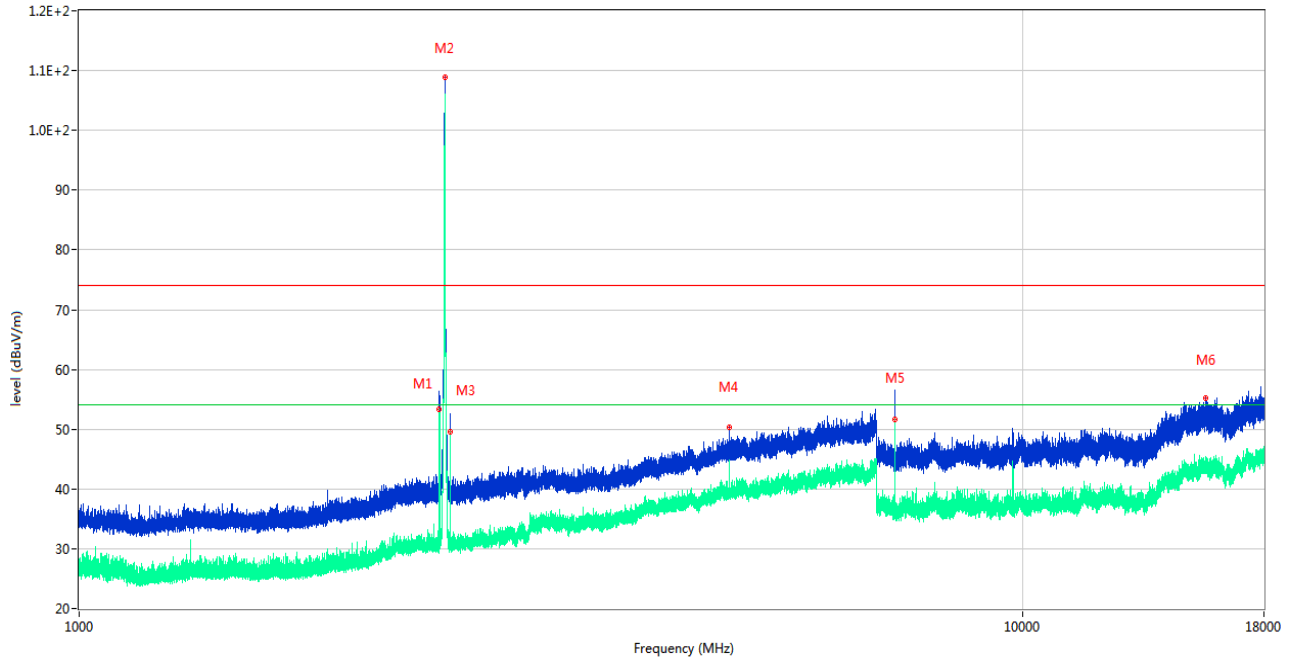

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2407.800	55.20	-10.59	74.0	-18.80	Peak	272.00	150	Horizontal	Pass
1**	2407.800	53.39	-10.59	54.0	-0.61	AV	272.00	150	Horizontal	Pass
2	2439.500	108.82	-10.53	74.0	34.82	Peak	265.00	150	Horizontal	N/A
2**	2439.500	104.32	-10.53	54.0	50.32	AV	265.00	150	Horizontal	N/A
3	2471.900	51.28	-10.74	74.0	-22.72	Peak	278.00	150	Horizontal	Pass
3**	2471.900	49.60	-10.74	54.0	-4.40	AV	278.00	150	Horizontal	Pass
4	4881.200	50.31	-1.19	74.0	-23.69	Peak	38.00	150	Horizontal	Pass
4**	4881.200	44.22	-1.19	54.0	-9.78	AV	38.00	150	Horizontal	Pass
5	7322.000	52.42	16.87	74.0	-21.58	Peak	267.00	150	Horizontal	Pass
5**	7322.000	51.60	16.87	54.0	-2.40	AV	267.00	150	Horizontal	Pass
6	15624.901	55.28	23.48	74.0	-18.72	Peak	86.00	150	Horizontal	Pass
6**	15624.901	43.24	23.48	54.0	-10.76	AV	86.00	150	Horizontal	Pass

CH18 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

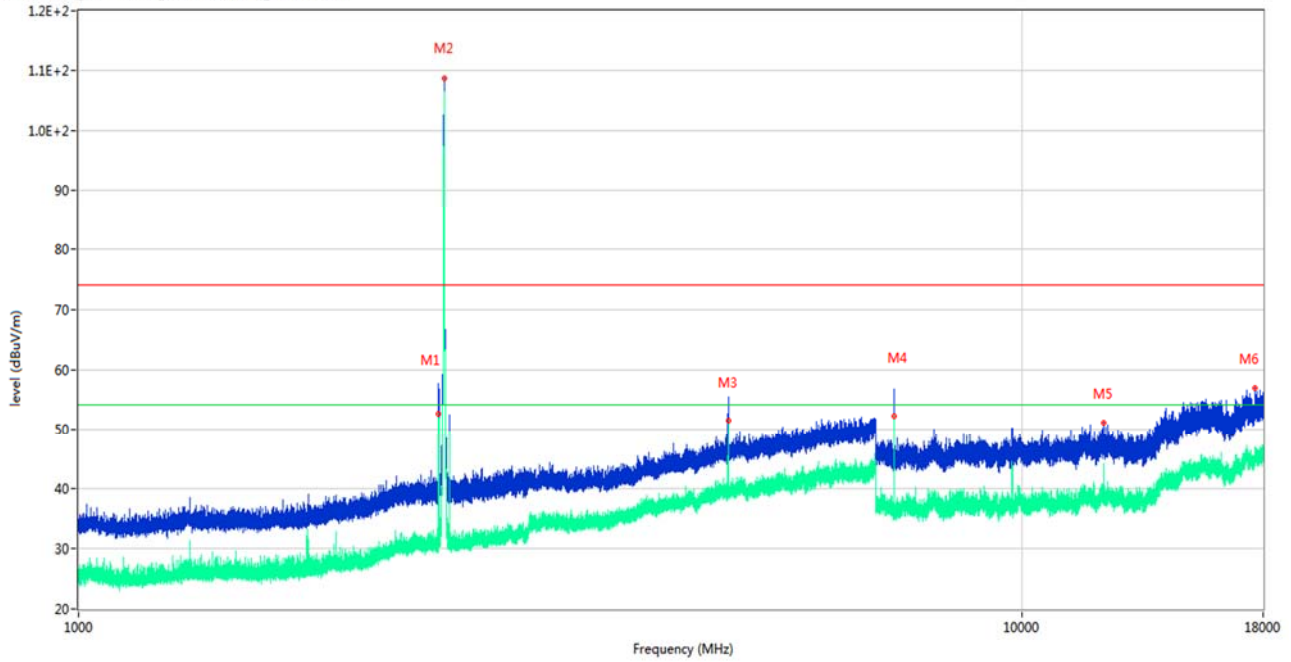

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2408.300	56.59	-10.55	74.0	-17.41	Peak	259.00	150	Vertical	Pass
1**	2408.300	52.25	-10.55	54.0	-1.75	AV	259.00	150	Vertical	Pass
2	2439.500	108.72	-10.53	74.0	34.72	Peak	259.00	150	Vertical	N/A
2**	2439.500	105.56	-10.53	54.0	51.56	AV	259.00	150	Vertical	N/A
3	4881.200	55.11	-1.19	74.0	-18.89	Peak	0.00	150	Vertical	Pass
3**	4881.200	51.38	-1.19	54.0	-2.62	AV	0.00	150	Vertical	Pass
4	7318.837	56.05	17.03	74.0	-17.95	Peak	106.00	150	Vertical	Pass
4**	7318.837	52.18	17.03	54.0	-1.82	AV	106.00	150	Vertical	Pass
5	12197.425	50.98	20.41	74.0	-23.02	Peak	0.00	150	Vertical	Pass
5**	12197.425	42.04	20.41	54.0	-11.96	AV	0.00	150	Vertical	Pass
6	17660.850	56.82	24.25	74.0	-17.18	Peak	206.00	150	Vertical	Pass
6**	17660.850	45.53	24.25	54.0	-8.47	AV	206.00	150	Vertical	Pass

CH25 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

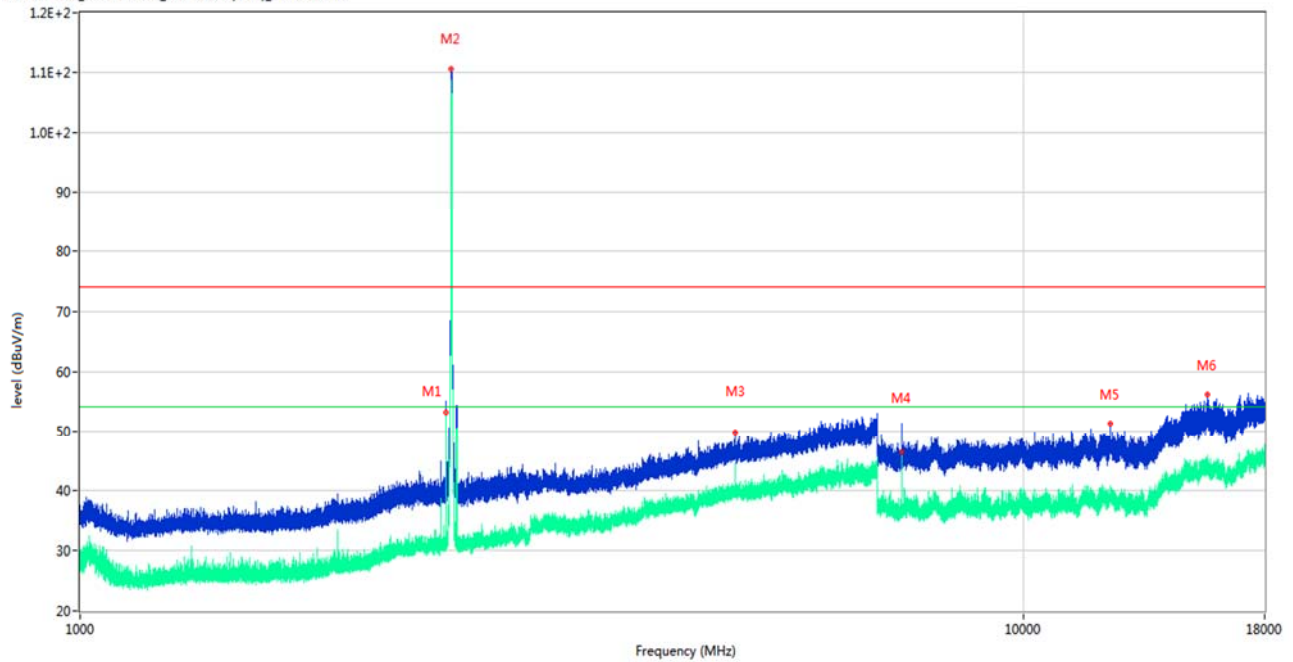

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2443.000	57.72	-10.46	74.0	-16.28	Peak	295.00	150	Horizontal	Pass
1**	2443.000	53.11	-10.46	54.0	-0.89	AV	295.00	150	Horizontal	Pass
2	2474.500	110.63	-10.56	74.0	36.63	Peak	289.00	150	Horizontal	N/A
2**	2474.500	106.60	-10.56	54.0	52.60	AV	289.00	150	Horizontal	N/A
3	4949.000	49.70	-1.67	74.0	-24.30	Peak	134.00	150	Horizontal	Pass
3**	4949.000	41.81	-1.67	54.0	-12.19	AV	134.00	150	Horizontal	Pass
4	7423.775	50.05	17.11	74.0	-23.95	Peak	262.00	150	Horizontal	Pass
4**	7423.775	46.36	17.11	54.0	-7.64	AV	262.00	150	Horizontal	Pass
5	12349.513	51.33	19.71	74.0	-22.67	Peak	323.00	150	Horizontal	Pass
5**	12349.513	38.69	19.71	54.0	-15.31	AV	323.00	150	Horizontal	Pass
6	15650.625	56.14	23.52	74.0	-17.86	Peak	277.00	150	Horizontal	Pass
6**	15650.625	44.24	23.52	54.0	-9.76	AV	277.00	150	Horizontal	Pass

CH25 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

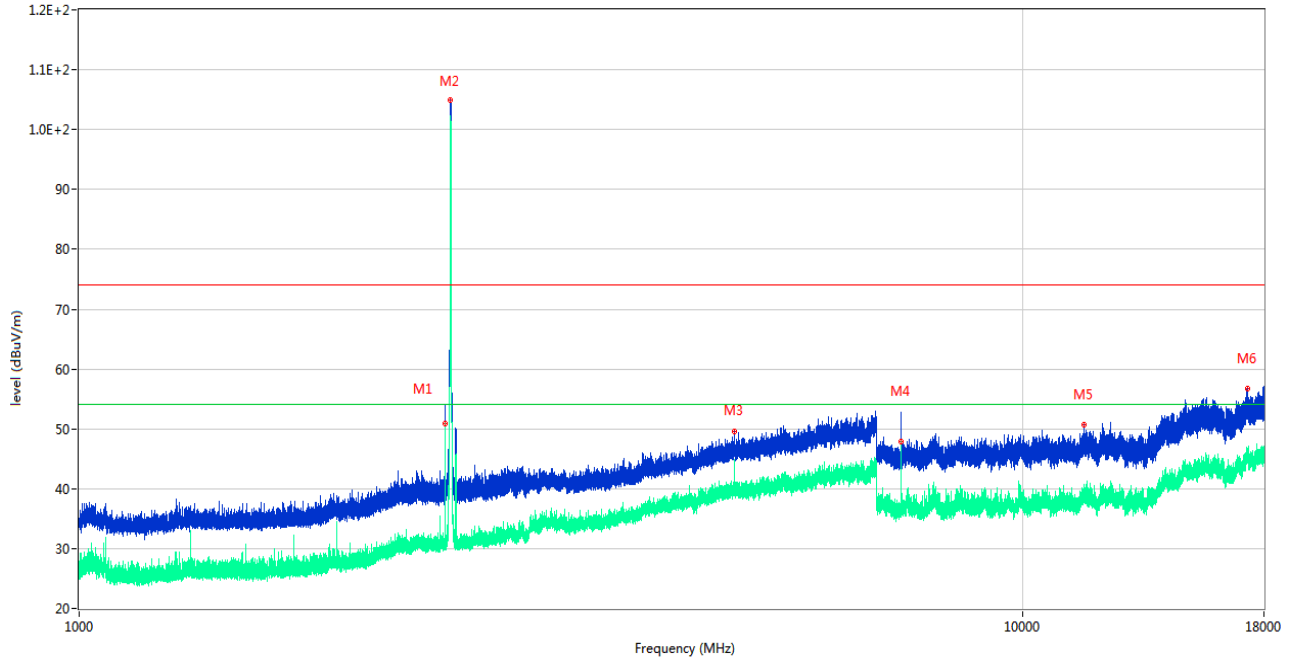

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2442.800	52.81	-10.47	74.0	-21.19	Peak	186.00	150	Vertical	Pass
1**	2442.800	50.91	-10.47	54.0	-3.09	AV	186.00	150	Vertical	Pass
2	2474.600	104.96	-10.55	74.0	30.96	Peak	328.00	150	Vertical	N/A
2**	2474.600	100.51	-10.55	54.0	46.51	AV	328.00	150	Vertical	N/A
3	4950.800	49.66	-1.63	74.0	-24.34	Peak	133.00	150	Vertical	Pass
3**	4950.800	43.32	-1.63	54.0	-10.68	AV	133.00	150	Vertical	Pass
4	7424.062	51.22	17.11	74.0	-22.78	Peak	295.00	150	Vertical	Pass
4**	7424.062	47.83	17.11	54.0	-6.17	AV	295.00	150	Vertical	Pass
5	11617.537	50.70	20.22	74.0	-23.30	Peak	185.00	150	Vertical	Pass
5**	11617.537	38.57	20.22	54.0	-15.43	AV	185.00	150	Vertical	Pass
6	17292.036	56.73	24.56	74.0	-17.27	Peak	154.00	150	Vertical	Pass
6**	17292.036	44.93	24.56	54.0	-9.07	AV	154.00	150	Vertical	Pass

CH26 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

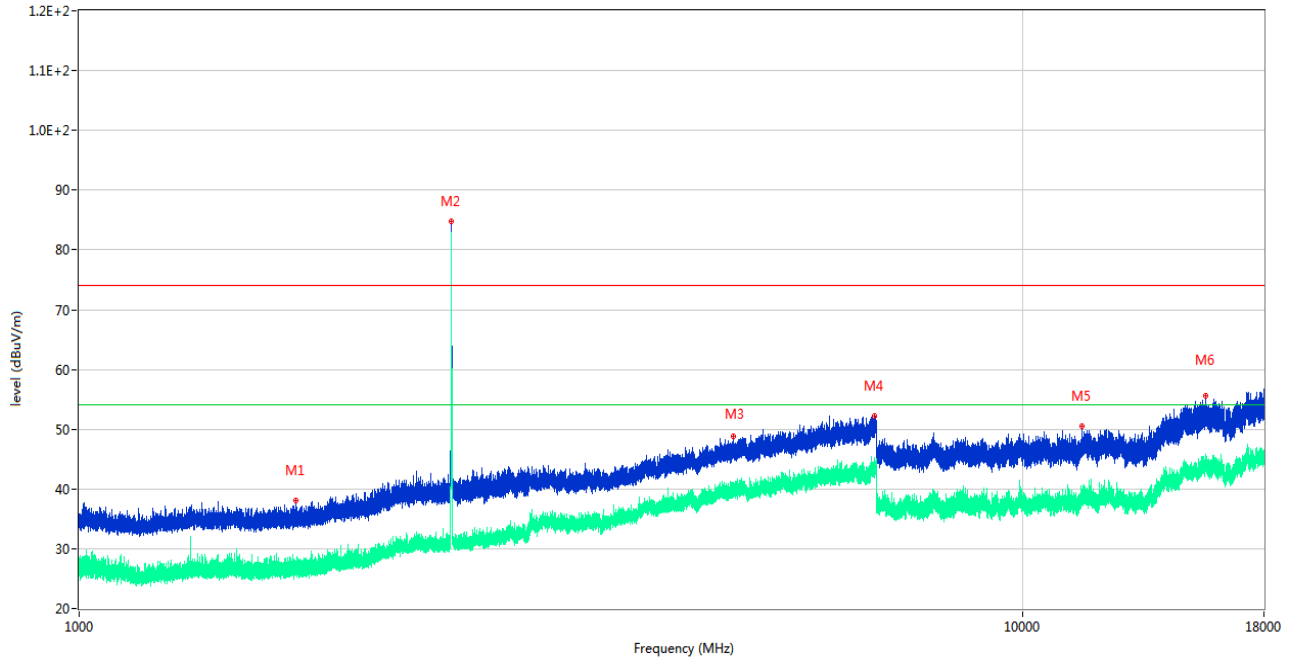

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1698.200	38.16	-15.19	74.0	-35.84	Peak	255.00	150	Horizontal	Pass
1**	1698.200	26.60	-15.19	54.0	-27.40	AV	255.00	150	Horizontal	Pass
2	2480.500	84.75	-10.28	74.0	10.75	Peak	269.00	150	Horizontal	N/A
2**	2480.500	81.33	-10.28	54.0	27.33	AV	269.00	150	Horizontal	N/A
3	4930.200	48.82	-1.16	74.0	-25.18	Peak	360.00	150	Horizontal	Pass
3**	4930.200	39.15	-1.16	54.0	-14.85	AV	360.00	150	Horizontal	Pass
4	6968.800	52.12	5.12	74.0	-21.88	Peak	189.00	150	Horizontal	Pass
4**	6968.800	44.39	5.12	54.0	-9.61	AV	189.00	150	Horizontal	Pass
5	11550.262	50.48	19.71	74.0	-23.52	Peak	136.00	150	Horizontal	Pass
5**	11550.262	38.26	19.71	54.0	-15.74	AV	136.00	150	Horizontal	Pass
6	15617.549	55.58	23.46	74.0	-18.42	Peak	156.00	150	Horizontal	Pass
6**	15617.549	43.82	23.46	54.0	-10.18	AV	156.00	150	Horizontal	Pass

CH26 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

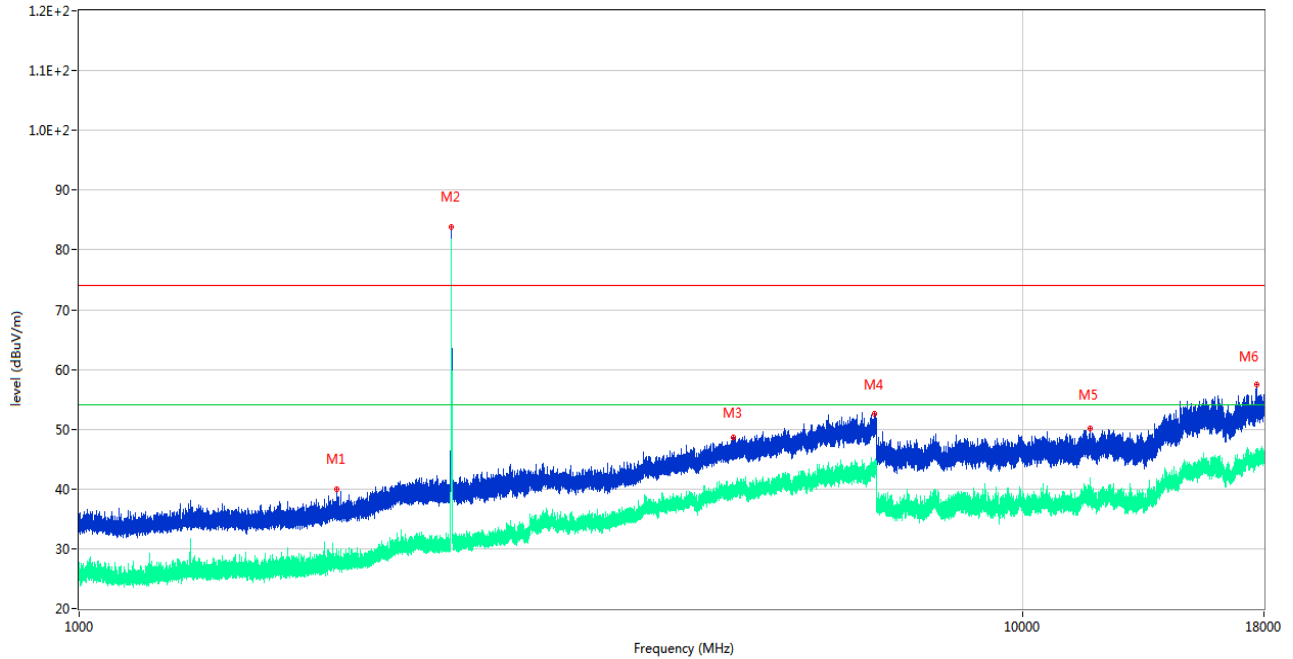


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1873.700	40.00	-13.75	74.0	-34.00	Peak	295.00	150	Vertical	Pass
1**	1873.700	27.36	-13.75	54.0	-26.64	AV	295.00	150	Vertical	Pass
2	2479.500	83.77	-10.38	74.0	9.77	Peak	112.00	150	Vertical	N/A
2**	2479.500	80.46	-10.38	54.0	26.46	AV	112.00	150	Vertical	N/A
3	4931.600	48.64	-1.11	74.0	-25.36	Peak	187.00	150	Vertical	Pass
3**	4931.600	40.24	-1.11	54.0	-13.76	AV	187.00	150	Vertical	Pass
4	6966.200	52.63	4.91	74.0	-21.37	Peak	262.00	150	Vertical	Pass
4**	6966.200	43.13	4.91	54.0	-10.87	AV	262.00	150	Vertical	Pass
5	11776.812	50.15	18.73	74.0	-23.85	Peak	315.00	150	Vertical	Pass
5**	11776.812	38.18	18.73	54.0	-15.82	AV	315.00	150	Vertical	Pass
6	17702.062	57.49	24.41	74.0	-16.51	Peak	171.00	150	Vertical	Pass
6**	17702.062	46.17	24.41	54.0	-7.83	AV	171.00	150	Vertical	Pass

PCB antenna

CH11 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

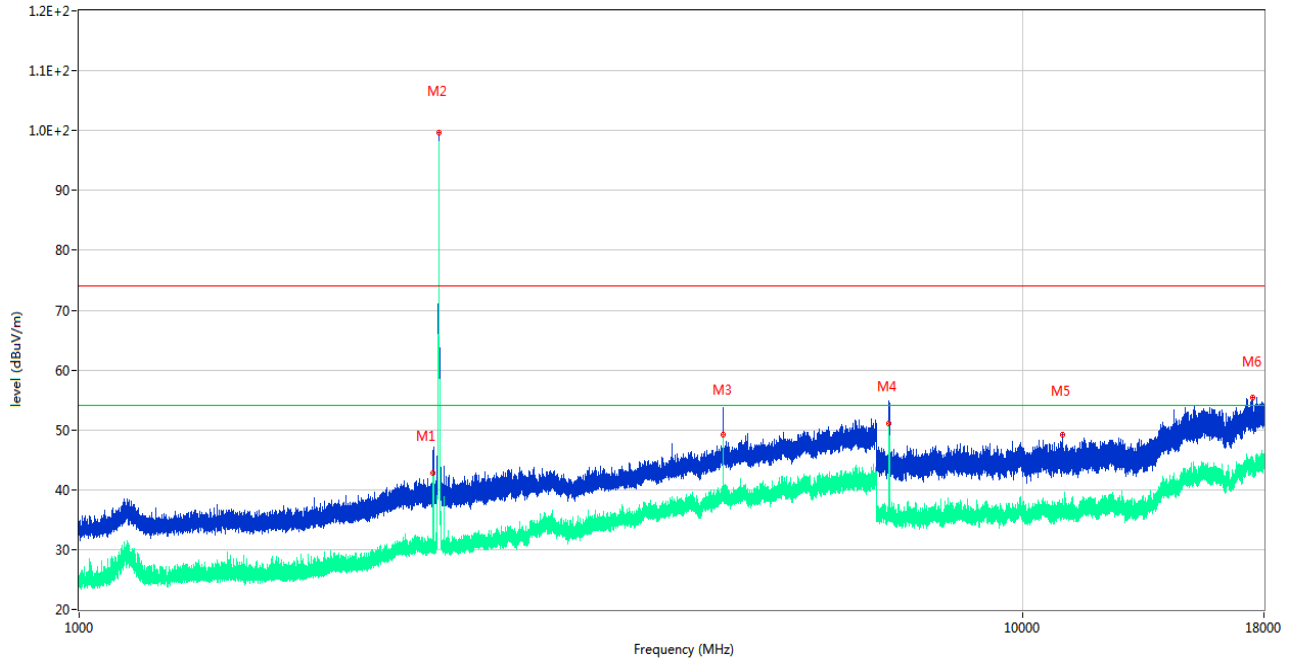

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2372.800	46.03	-10.49	74.0	-27.97	Peak	351.00	150	Horizontal	Pass
1**	2372.800	42.77	-10.49	54.0	-11.23	AV	351.00	150	Horizontal	Pass
2	2404.500	99.75	-10.73	74.0	25.75	Peak	142.00	150	Horizontal	N/A
2**	2404.500	95.43	-10.73	54.0	41.43	AV	142.00	150	Horizontal	N/A
3	4811.000	53.53	-1.41	74.0	-20.47	Peak	356.00	150	Horizontal	Pass
3**	4811.000	49.28	-1.41	54.0	-4.72	AV	356.00	150	Horizontal	Pass
4	7213.900	54.54	17.12	74.0	-19.46	Peak	125.00	150	Horizontal	Pass
4**	7213.900	51.10	17.12	54.0	-2.90	AV	125.00	150	Horizontal	Pass
5	11001.713	49.15	19.01	74.0	-24.85	Peak	107.00	150	Horizontal	Pass
5**	11001.713	36.20	19.01	54.0	-17.80	AV	107.00	150	Horizontal	Pass
6	17495.212	55.38	23.95	74.0	-18.62	Peak	333.00	150	Horizontal	Pass
6**	17495.212	45.19	23.95	54.0	-8.81	AV	333.00	150	Horizontal	Pass

CH11 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

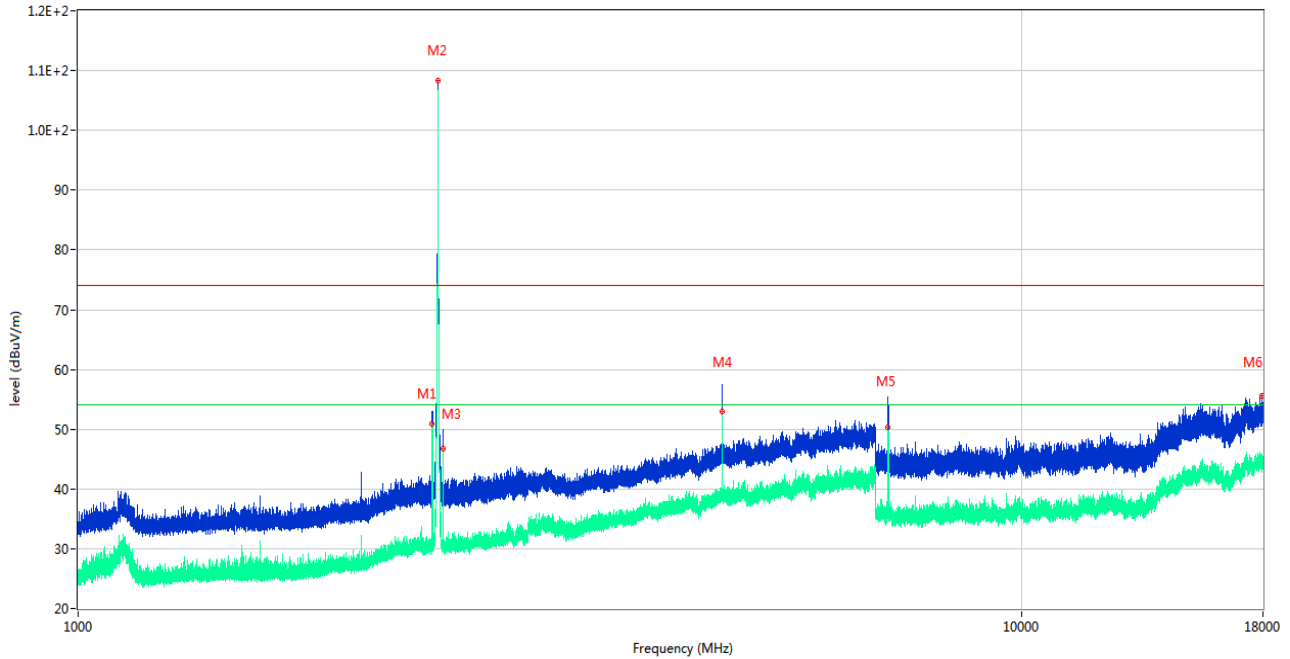

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2372.900	52.17	-10.49	74.0	-21.83	Peak	290.00	150	Vertical	Pass
1**	2372.900	50.81	-10.49	54.0	-3.19	AV	290.00	150	Vertical	Pass
2	2404.600	108.39	-10.74	74.0	34.39	Peak	290.00	150	Vertical	N/A
2**	2404.600	104.82	-10.74	54.0	50.82	AV	290.00	150	Vertical	N/A
3	2436.800	48.96	-10.61	74.0	-25.04	Peak	277.00	150	Vertical	Pass
3**	2436.800	46.78	-10.61	54.0	-7.22	AV	277.00	150	Vertical	Pass
4	4809.400	55.83	-1.41	74.0	-18.17	Peak	65.00	150	Vertical	Pass
4**	4809.400	52.96	-1.41	54.0	-1.04	AV	65.00	150	Vertical	Pass
5	7216.487	54.96	17.16	74.0	-19.04	Peak	160.00	150	Vertical	Pass
5**	7216.487	50.38	17.16	54.0	-3.62	AV	160.00	150	Vertical	Pass
6	17963.512	55.57	24.42	74.0	-18.43	Peak	332.00	150	Vertical	Pass
6**	17963.512	43.44	24.42	54.0	-10.56	AV	332.00	150	Vertical	Pass

CH18 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

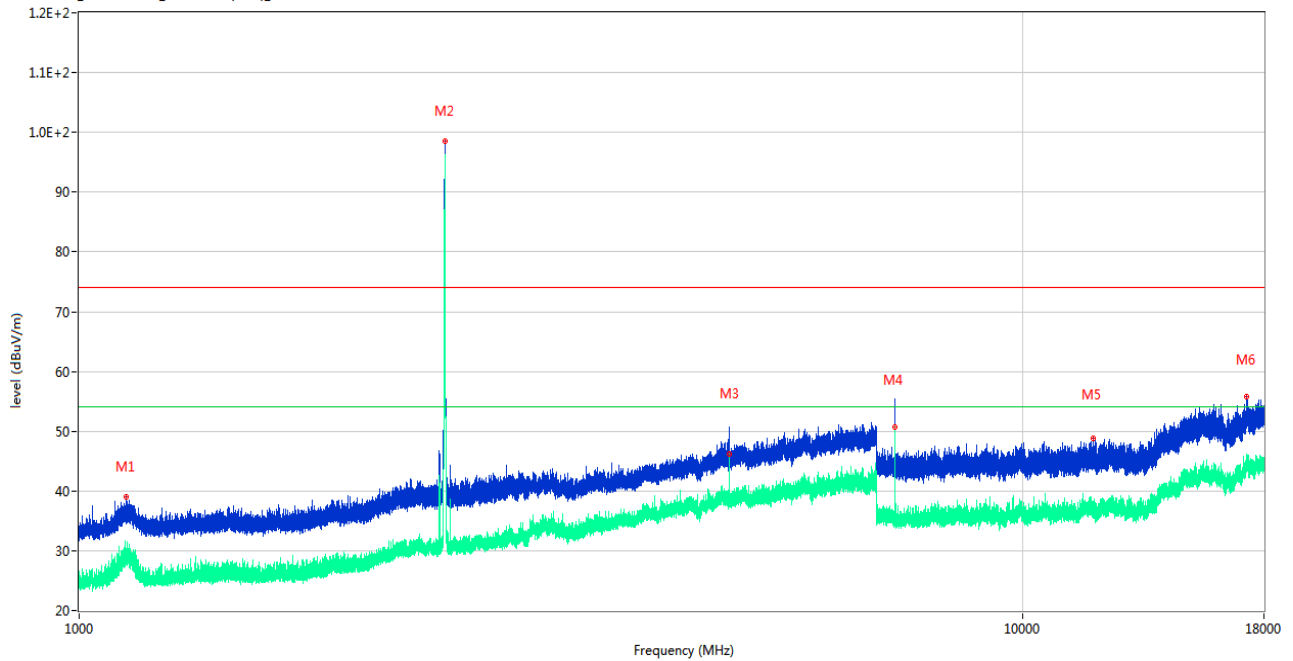

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1121.000	39.11	-15.23	74.0	-34.89	Peak	256.00	150	Horizontal	Pass
1**	1121.000	29.48	-15.23	54.0	-24.52	AV	256.00	150	Horizontal	Pass
2	2439.500	98.47	-10.53	74.0	24.47	Peak	256.00	150	Horizontal	N/A
2**	2439.500	93.79	-10.53	54.0	39.79	AV	256.00	150	Horizontal	N/A
3	4881.200	50.02	-1.19	74.0	-23.98	Peak	83.00	150	Horizontal	Pass
3**	4881.200	46.15	-1.19	54.0	-7.85	AV	83.00	150	Horizontal	Pass
4	7318.837	53.92	17.03	74.0	-20.08	Peak	119.00	150	Horizontal	Pass
4**	7318.837	50.78	17.03	54.0	-3.22	AV	119.00	150	Horizontal	Pass
5	11879.451	48.78	18.06	74.0	-25.22	Peak	176.00	150	Horizontal	Pass
5**	11879.451	37.82	18.06	54.0	-16.18	AV	176.00	150	Horizontal	Pass
6	17245.575	55.77	24.20	74.0	-18.23	Peak	146.00	150	Horizontal	Pass
6**	17245.575	44.36	24.20	54.0	-9.64	AV	146.00	150	Horizontal	Pass

CH18 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

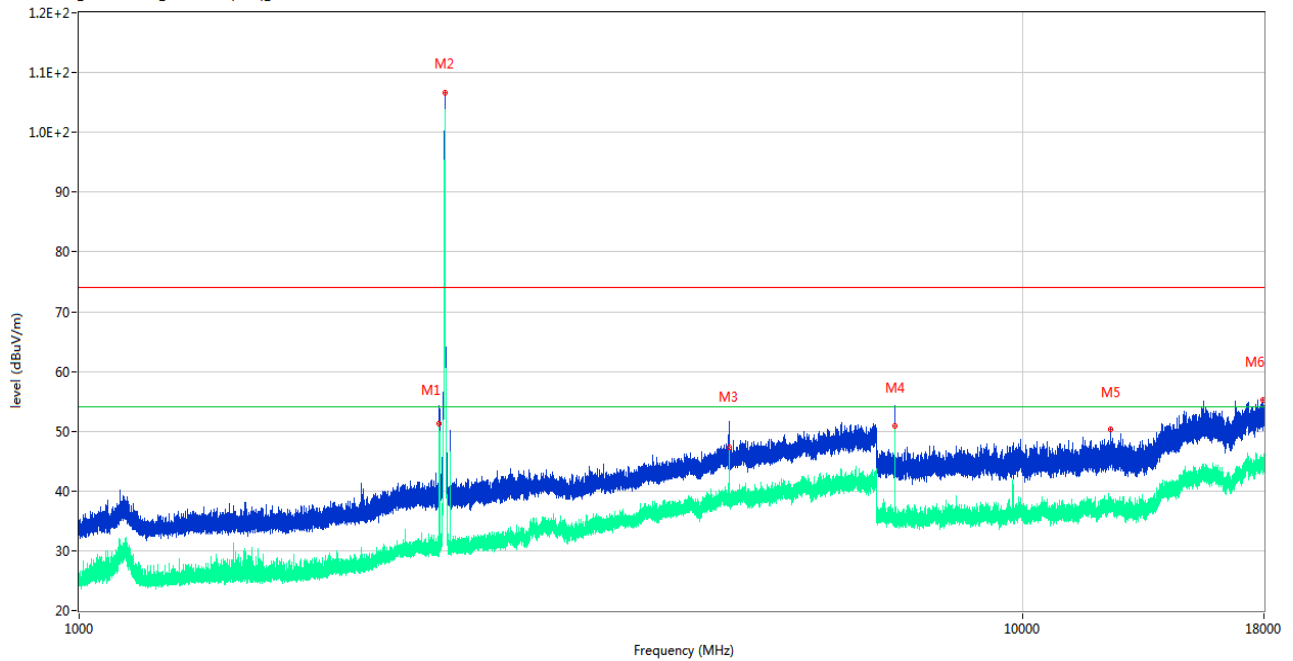

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2407.900	52.88	-10.58	74.0	-21.12	Peak	269.00	150	Vertical	Pass
1**	2407.900	51.30	-10.58	54.0	-2.70	AV	269.00	150	Vertical	Pass
2	2439.500	106.56	-10.53	74.0	32.56	Peak	282.00	150	Vertical	N/A
2**	2439.500	102.96	-10.53	54.0	48.96	AV	282.00	150	Vertical	N/A
3	4879.000	50.89	-1.29	74.0	-23.11	Peak	51.00	150	Vertical	Pass
3**	4879.000	47.23	-1.29	54.0	-6.77	AV	51.00	150	Vertical	Pass
4	7321.713	54.20	16.87	74.0	-19.80	Peak	112.00	150	Vertical	Pass
4**	7321.713	50.84	16.87	54.0	-3.16	AV	112.00	150	Vertical	Pass
5	12394.651	50.24	19.25	74.0	-23.76	Peak	151.00	150	Vertical	Pass
5**	12394.651	37.41	19.25	54.0	-16.59	AV	151.00	150	Vertical	Pass
6	17942.776	55.17	24.33	74.0	-18.83	Peak	326.00	150	Vertical	Pass
6**	17942.776	44.35	24.33	54.0	-9.65	AV	326.00	150	Vertical	Pass

CH25 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

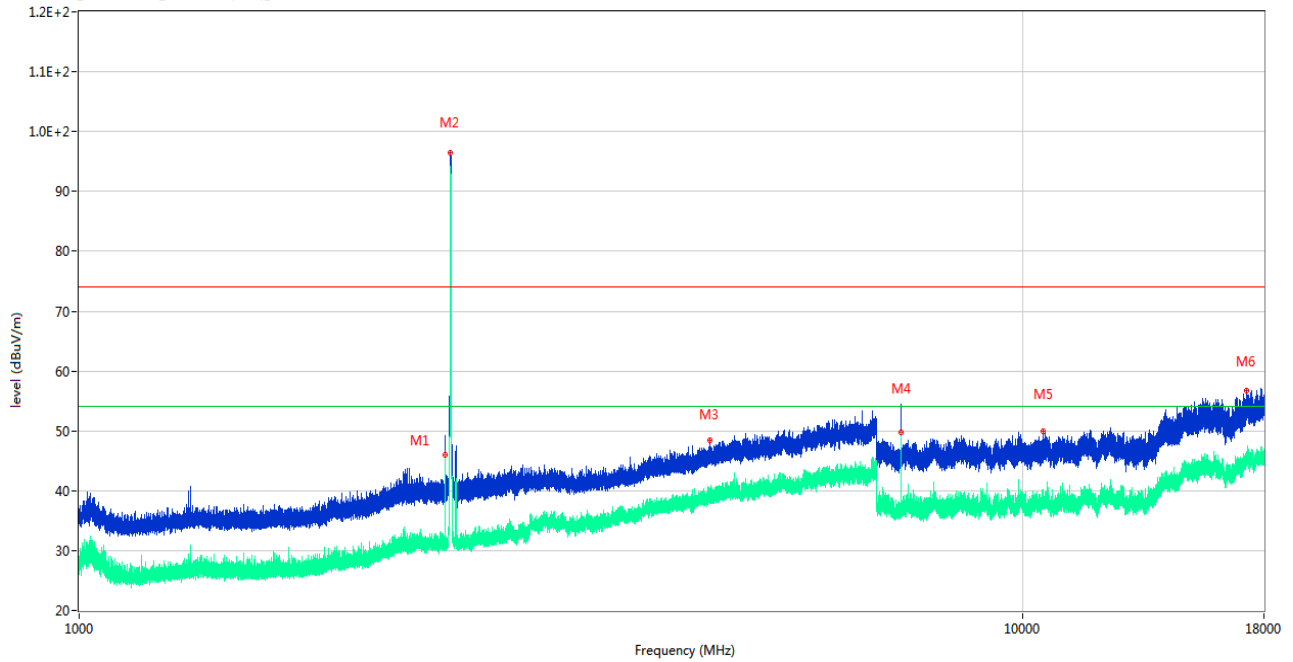

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2442.700	49.00	-10.47	74.0	-25.00	Peak	323.00	150	Horizontal	Pass
1**	2442.700	46.06	-10.47	54.0	-7.94	AV	323.00	150	Horizontal	Pass
2	2474.500	96.41	-10.56	74.0	22.41	Peak	178.00	150	Horizontal	N/A
2**	2474.500	92.17	-10.56	54.0	38.17	AV	178.00	150	Horizontal	N/A
3	4660.800	48.44	-1.90	74.0	-25.56	Peak	205.00	150	Horizontal	Pass
3**	4660.800	38.81	-1.90	54.0	-15.19	AV	205.00	150	Horizontal	Pass
4	7426.937	53.09	17.07	74.0	-20.91	Peak	155.00	150	Horizontal	Pass
4**	7426.937	49.69	17.07	54.0	-4.31	AV	155.00	150	Horizontal	Pass
5	10495.713	50.00	18.41	74.0	-24.00	Peak	360.00	150	Horizontal	Pass
5**	10495.713	39.21	18.41	54.0	-14.79	AV	360.00	150	Horizontal	Pass
6	17247.412	56.75	24.20	74.0	-17.25	Peak	0.00	150	Horizontal	Pass
6**	17247.412	45.08	24.20	54.0	-8.92	AV	0.00	150	Horizontal	Pass

CH25 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

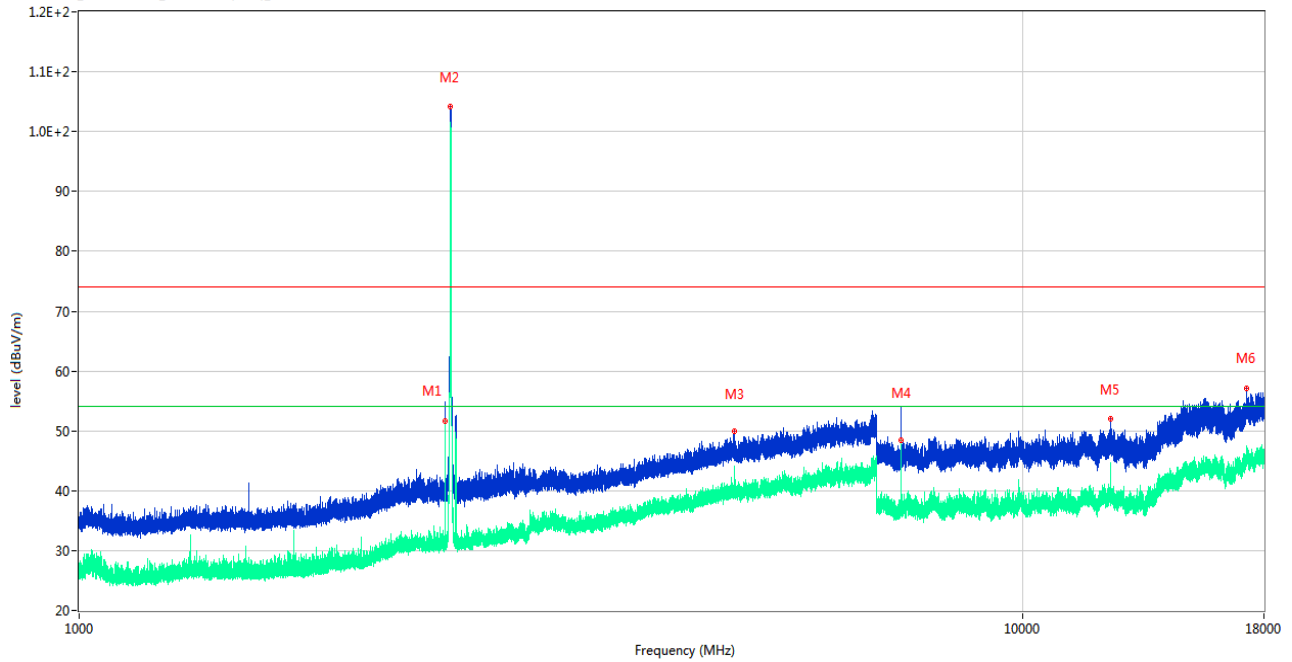

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2442.800	53.61	-10.47	74.0	-20.39	Peak	121.00	150	Vertical	Pass
1**	2442.800	51.57	-10.47	54.0	-2.43	AV	121.00	150	Vertical	Pass
2	2475.400	104.20	-10.51	74.0	30.20	Peak	95.00	150	Vertical	N/A
2**	2475.400	100.79	-10.51	54.0	46.79	AV	95.00	150	Vertical	N/A
3	4949.200	49.87	-1.68	74.0	-24.13	Peak	23.00	150	Vertical	Pass
3**	4949.200	43.51	-1.68	54.0	-10.49	AV	23.00	150	Vertical	Pass
4	7423.775	53.96	17.11	74.0	-20.04	Peak	296.00	150	Vertical	Pass
4**	7423.775	48.52	17.11	54.0	-5.48	AV	296.00	150	Vertical	Pass
5	12377.400	52.05	19.43	74.0	-21.95	Peak	262.00	150	Vertical	Pass
5**	12377.400	41.05	19.43	54.0	-12.95	AV	262.00	150	Vertical	Pass
6	17248.463	57.19	24.20	74.0	-16.81	Peak	289.00	150	Vertical	Pass
6**	17248.463	45.45	24.20	54.0	-8.55	AV	289.00	150	Vertical	Pass

CH26 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

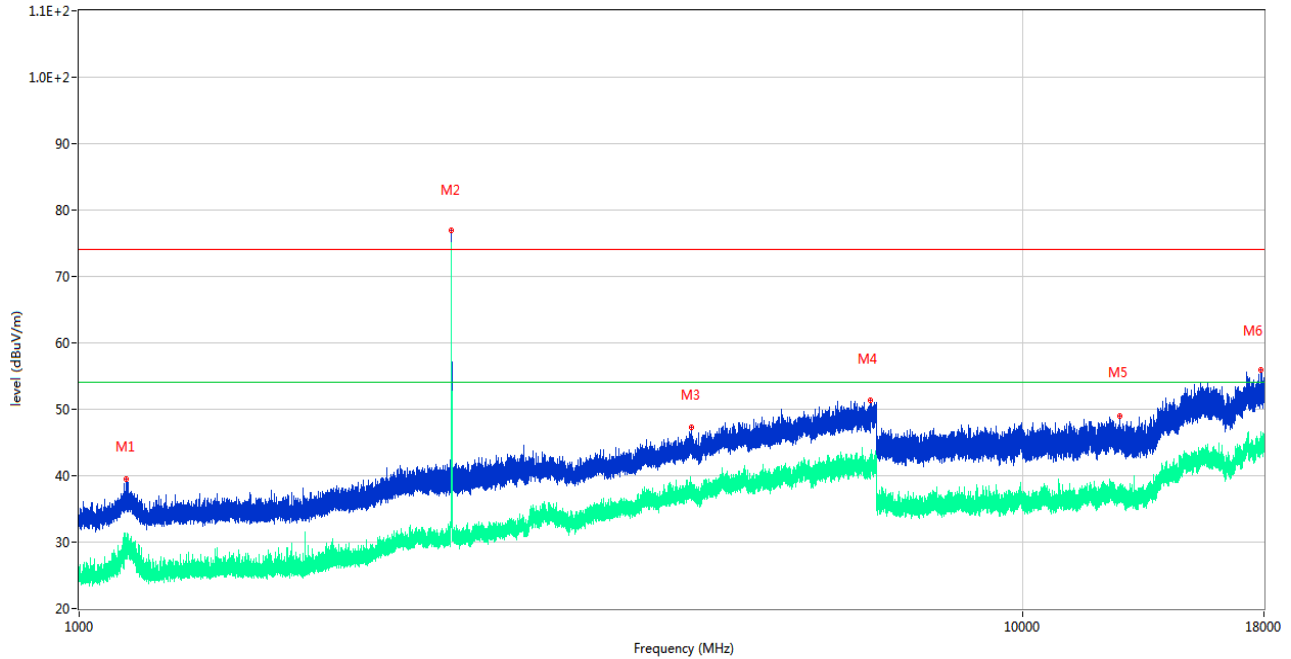

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1121.700	39.47	-15.23	74.0	-34.53	Peak	239.00	150	Horizontal	Pass
1**	1121.700	30.45	-15.23	54.0	-23.55	AV	239.00	150	Horizontal	Pass
2	2479.600	76.95	-10.37	74.0	2.95	Peak	155.00	150	Horizontal	N/A
2**	2479.600	73.79	-10.37	54.0	19.79	AV	155.00	150	Horizontal	N/A
3	4458.800	47.27	-2.59	74.0	-26.73	Peak	360.00	150	Horizontal	Pass
3**	4458.800	38.08	-2.59	54.0	-15.92	AV	360.00	150	Horizontal	Pass
4	6898.400	51.30	4.61	74.0	-22.70	Peak	324.00	150	Horizontal	Pass
4**	6898.400	41.61	4.61	54.0	-12.39	AV	324.00	150	Horizontal	Pass
5	12653.975	48.92	19.05	74.0	-25.08	Peak	227.00	150	Horizontal	Pass
5**	12653.975	37.05	19.05	54.0	-16.95	AV	227.00	150	Horizontal	Pass
6	17872.163	55.96	24.36	74.0	-18.04	Peak	114.00	150	Horizontal	Pass
6**	17872.163	45.06	24.36	54.0	-8.94	AV	114.00	150	Horizontal	Pass

CH26 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

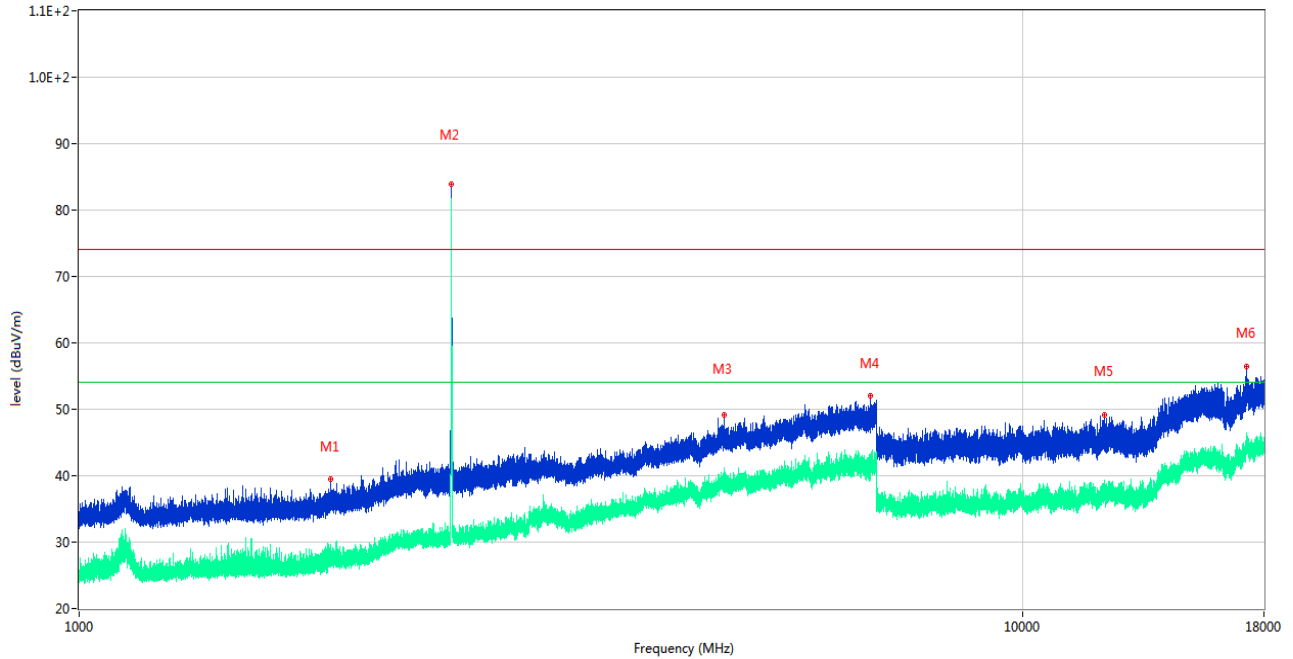

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1846.500	39.48	-14.00	74.0	-34.52	Peak	360.00	150	Vertical	Pass
1**	1846.500	27.41	-14.00	54.0	-26.59	AV	360.00	150	Vertical	Pass
2	2479.500	83.95	-10.38	74.0	9.95	Peak	333.00	150	Vertical	N/A
2**	2479.500	80.36	-10.38	54.0	26.36	AV	333.00	150	Vertical	N/A
3	4819.000	49.17	-1.33	74.0	-24.83	Peak	26.00	150	Vertical	Pass
3**	4819.000	38.68	-1.33	54.0	-15.32	AV	26.00	150	Vertical	Pass
4	6895.200	52.11	4.45	74.0	-21.89	Peak	207.00	150	Vertical	Pass
4**	6895.200	40.91	4.45	54.0	-13.09	AV	207.00	150	Vertical	Pass
5	12203.175	49.15	20.44	74.0	-24.85	Peak	327.00	150	Vertical	Pass
5**	12203.175	37.52	20.44	54.0	-16.48	AV	327.00	150	Vertical	Pass
6	17258.699	56.39	24.24	74.0	-17.61	Peak	111.00	150	Vertical	Pass
6**	17258.699	43.44	24.24	54.0	-10.56	AV	111.00	150	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Test Data

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

External antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
O-QPSK	CH11	2390.0	57.002	31.47	74	16.998	PEAK	Pass
		2390.0	51.185	31.47	54	2.815	AVERAGE	Pass
	CH25	2483.5	59.262	31.4	74	14.738	PEAK	Pass
		2483.5	50.974	31.4	54	3.026	AVERAGE	Pass
	CH26	2483.5	56.748	31.4	74	17.252	PEAK	Pass
		2483.5	47.475	31.4	54	6.525	AVERAGE	Pass


PCB antenna

Test Mode	Test Channel	Frequency (MHz)	Level (dBuV/m)	Factor (dB)	Limit Line (dBuV/m)	Margin (dB)	Remark	Verdict
O-QPSK	CH11	2390.0	58.755	31.47	74	15.245	PEAK	Pass
		2390.0	53.996	31.47	54	0.004	AVERAGE	Pass
	CH25	2483.5	55.883	31.4	74	18.117	PEAK	Pass
		2483.5	45.704	31.4	54	8.296	AVERAGE	Pass
	CH26	2483.5	55.626	31.40	74	18.374	PEAK	Pass
		2483.5	47.626	31.40	54	6.374	AVERAGE	Pass


Test plots

External antenna

CH11, PEAK

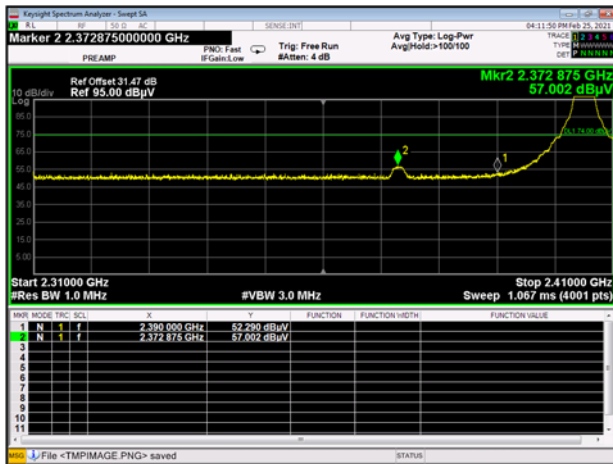

CH11, AV

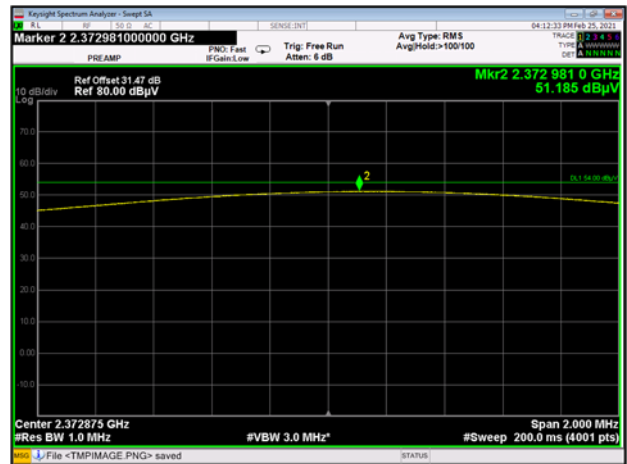


CH25, PEAK




CH25, AV




CH26, PEAK

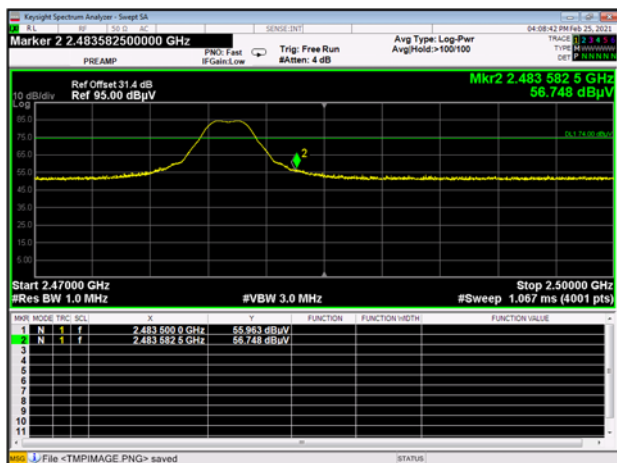

CH26, AV

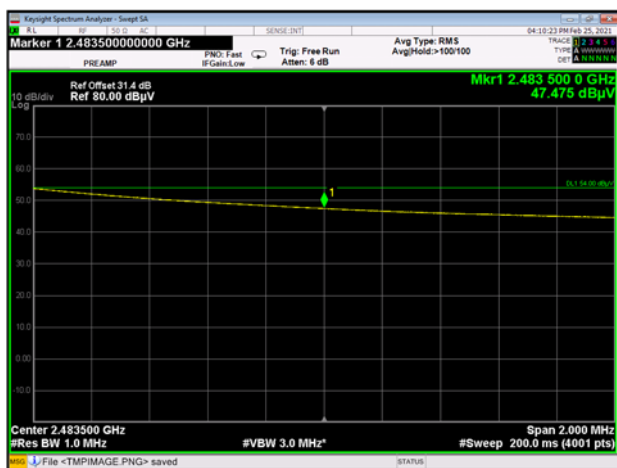


CH26, AV

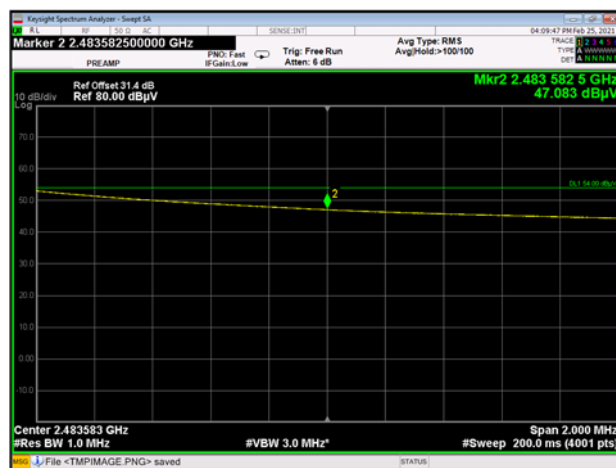


PCB antenna

CH11, PEAK

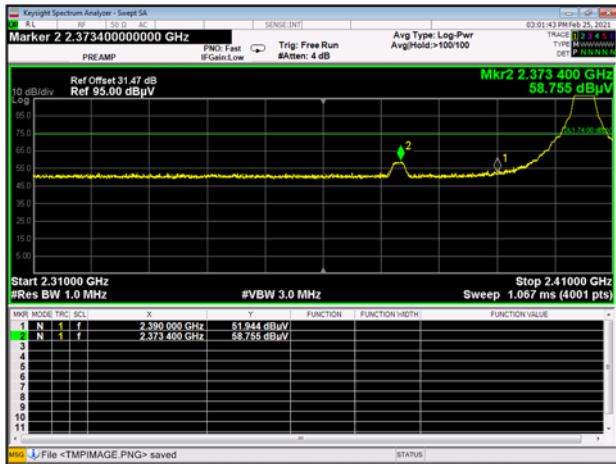


CH11, AV

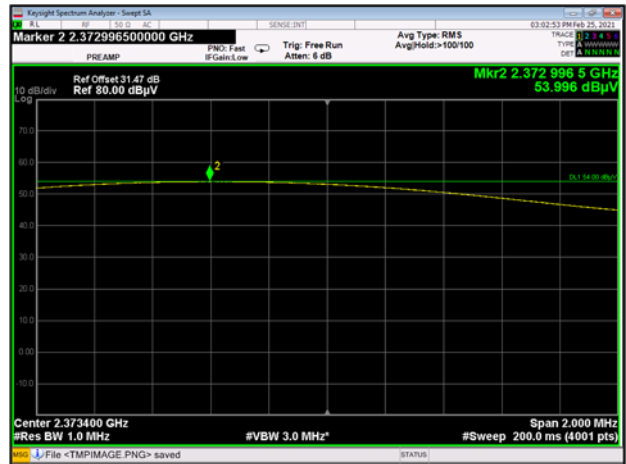


CH25, PEAK




CH25, AV

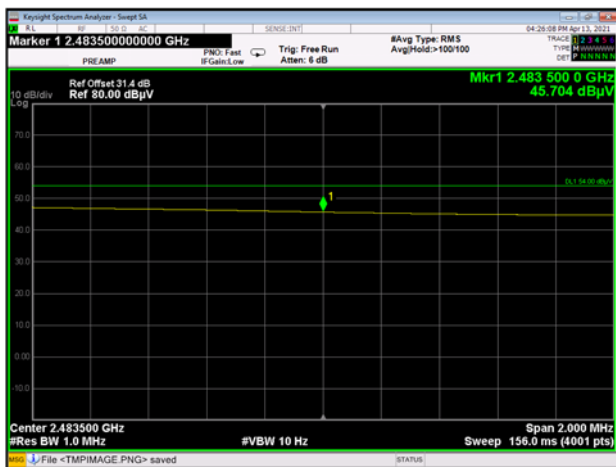


CH25, AV

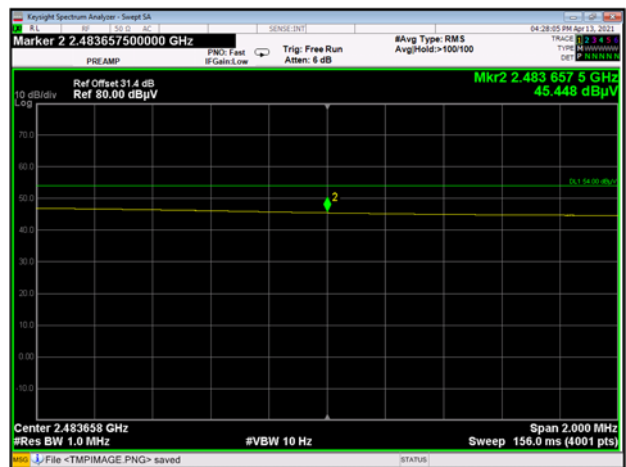


CH26, PEAK

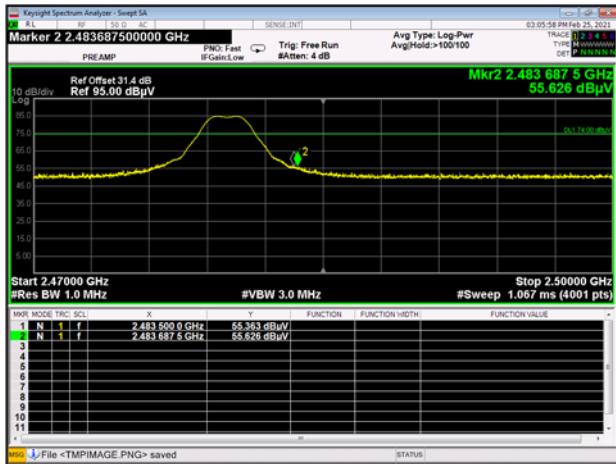

CH26, AV

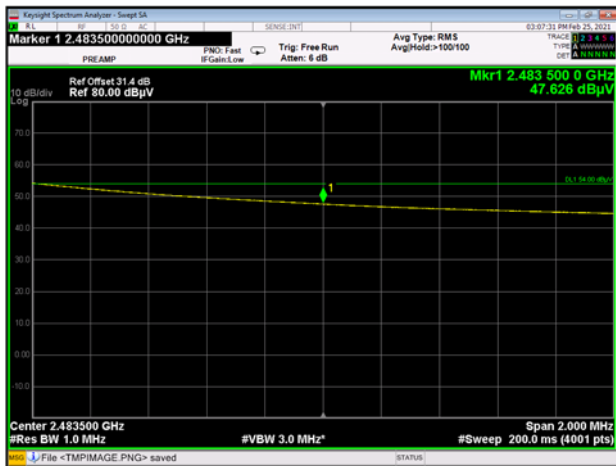

CH26, AV

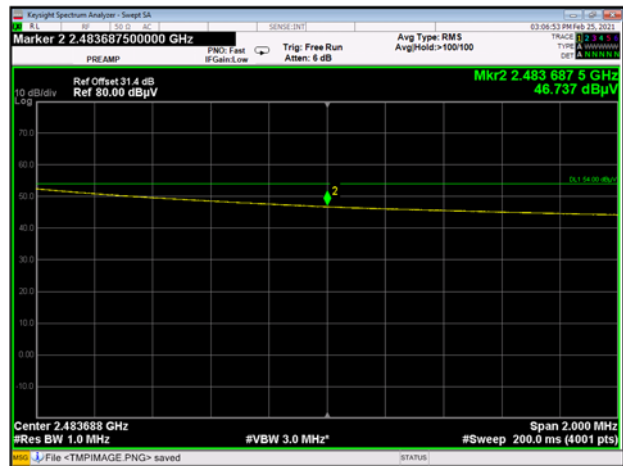

A.8 Power Spectral Density (PSD)

Test Data

Channel	Spectral power density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
CH11	2.29	8	Pass
CH18	1.96	8	Pass
CH25	1.80	8	Pass
CH26	-21.97	8	Pass

Test plots


CH11




CH18



CH25

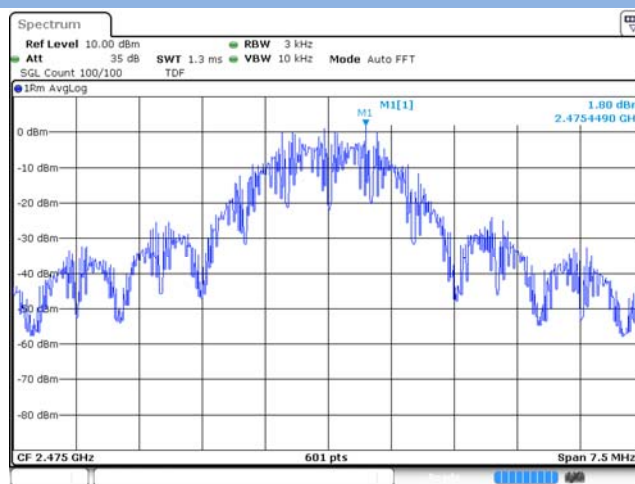

CH26

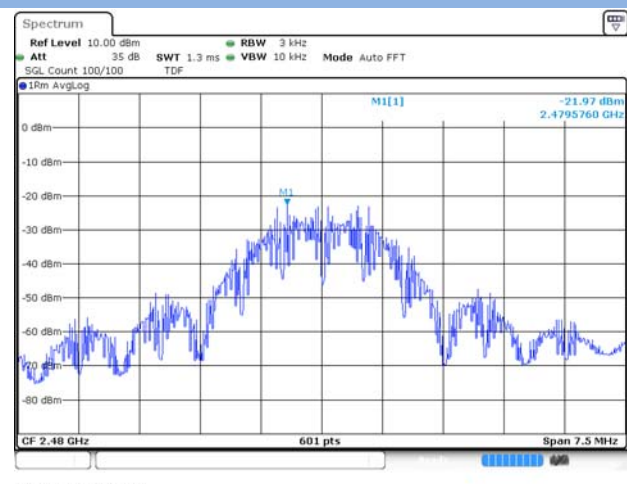

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2120086-AR.pdf”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2120086-AW.pdf”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2120086-AI.pdf”.

--END OF REPORT--