

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: 2AKO6-T1011

Product: Tablet

Trade Mark: ALDOCUBE

Model Number: T1011

U1006、U1008、U1010、U1101、U1102、U1103

Family Model: T701、T802、T1015、T1016、T1017、T1018
T1019、T1020、T1021、T1022、T1023

Report No.: STR200703001004E

Prepared for

Shenzhen Alldocube Technology and Science Co., Ltd
18/F, Jia'anda Bldg, Huafan Road, Dalang, Longhua District,
Shenzhen, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel.: +86-755-6115 9388 Fax.: +86-755-6115 6599
Website:<http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Alldocube Technology and Science Co., Ltd
Address : 18/F, Jia'anda Bldg, Huafan Road, Dalang, Longhua District, Shenzhen China

Manufacturer's Name : Shenzhen Alldocube Technology and Science Co., Ltd
Address : 18/F, Jia'anda Bldg, Huafan Road, Dalang, Longhua District, Shenzhen China

Product name : Tablet

Model and/or type reference ... : T1011

Family Model: U1006、U1008、U1010、U1101、U1102、U1103、T701、T802、T1015、
T1016、T1017、T1018、T1019、T1020、T1021、T1022、T1023

Standards : FCC CFR 47 Part 22H, Part 24E, Part 27

Test procedure ANSI C63.26:2015
ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests 03 Jul, 2020 ~ 20 Jul, 2020

Date of Issue 20 Jul, 2020

Test Result **Pass**

Testing Engineer : _____




(Cheng Jiawen)

Technical Manager : _____



(Jason Chen)

Authorized Signatory : _____



(Sam Chen)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION.....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY.....	6
MEASUREMENT UNCERTAINTY.....	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	6
1.6 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP	10
3. TEST AND MEASUREMENT EQUIPMENT.....	11
4. OUTPUT POWER.....	13
4.1 OUTPUT POWER MEASUREMENT	13
6. BANDEdge AND EMISSION MASK.....	16
7. OUT OF BAND EMISSIONS	17
7.1 MEASUREMENT METHOD	18
8. RADIATED MEASUREMENT	19
8.1. RADIATED POWER (ERP & EIRP).....	19
8.2 LTE BAND 2.....	20
8.4 LTE BAND 5.....	24
8.5 LTE BAND 7.....	26

9. SPURIOUS RADIATION EMISSION	28
9.1 LTE BAND 2.....	30
9.3 LTE BAND 5.....	32
9.4 LTE BAND 7.....	34
10. FREQUENCY STABILITY	36
10.1 LTE BAND 2	37
10.3 LTE BAND 5	39
10.4 LTE BAND 7	41
11. PEAK-TO-AVERAGE RATIO.....	43
11.1 Description of the PAR Measurement.....	43
11.2 Measuring Instruments	43
11.3 Test Procedures.....	43
11.4 Test Setup.....	43

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Tablet
Trade Mark	ALLDOCUBE
Model Name	T1011
Family Model	U1006、U1008、U1010、U1101、U1102、U1103、T701、T802、T1015、T1016、T1017、T1018、T1019、T1020、T1021、T1022、T1023
Model Difference	All models are the same circuit and RF module, except the model name.
FCC ID:	2AKO6-T1011
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2, 5, 7
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz;
Type of Modulation:	QPSK/16QAM
SIM Card	SIM 1 and SIM 2 is a chipset unit and tested as a single chipset. The SIM 1 is chosen for test.
Antenna:	PIFA Antenna
Antenna gain:	Band 2: 1.3dBi, Band 5: 1.0dBi, Band 7: 1.4dBi,
Power Supply:	<input checked="" type="checkbox"/> DC supply: DC 3.8V/6000mAh from battery or DC 5V from adapter.
Adapter:	<input checked="" type="checkbox"/> Adapter supply: Adapter : Model: APS-W010050200W-G Input: 100-240V~50/60Hz 0.35A Max Output: 5V---2.0A
Extreme Vol. Limits:	DC 3.2V to DC 4.4V (Nominal DC 3.8V) (Note 1)
HW Version	V1.1
SW Version	T1011S-V1.0-20200509
** Note1: The High Voltage 4.4V and Low Voltage 3.2V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AKO6-T1011** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 5, Band 7.

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	

2.1051 22.917(a) 24.238(a) 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	
Remark:			
<ol style="list-style-type: none">“N/A” denotes test is not applicable in this Test Report.All test items were verified and recorded according to the standards and without any deviation during the test.No modifications are made to the EUT during all test items.			

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Tablet	T1011	FCC ID: 2AKO6-T1011	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

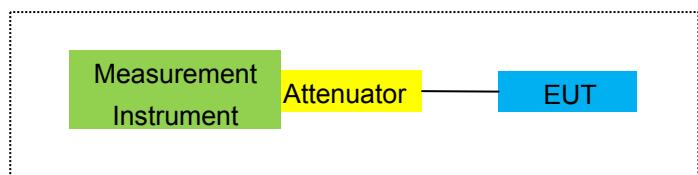

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

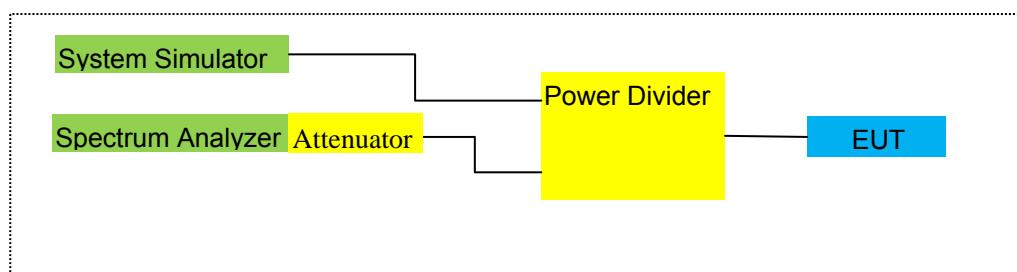

For Frequency Stability

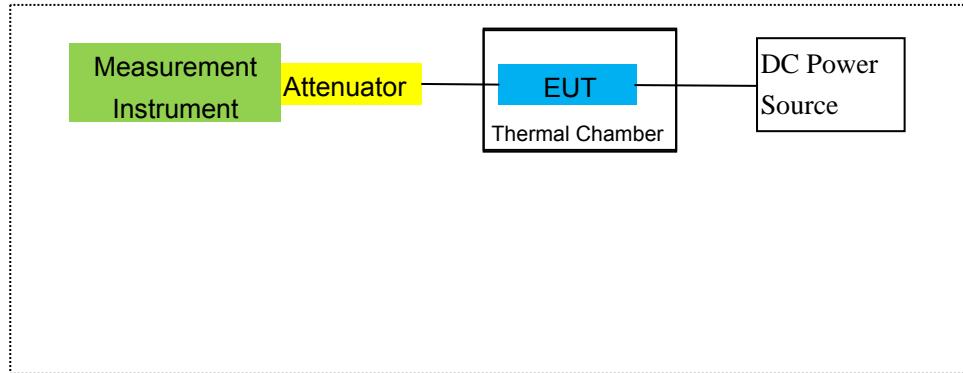

Note: EUT built-in battery-powered, the battery is fully-charged.

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2019.08.28	2020.08.27	1 year
2	Test Receiver	R&S	ESPI	101318	2020.05.11	2021.05.10	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2020.04.11	2021.04.10	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	1 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2020.04.11	2021.04.10	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2019.12.10	2020.12.09	1 year
7	Amplifier	EM	EM-30180	060538	2019.08.06	2020.08.05	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2020.05.11	2021.05.10	1 year
9	Power Meter	R&S	NRVS	100696	2019.08.06	2020.08.05	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2020.05.11	2021.05.10	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2020.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2020.05.11	2021.05.10	1 year
15	LISN	R&S	ENV216	101313	2020.05.11	2021.05.10	1 year
16	LISN	EMCO	3816/2	00042990	2020.05.11	2021.05.10	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2019.05.13 2020.05.11	2020.05.12 2021.05.10	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.04.11	2021.04.10	3 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2021.05.10	1 year
22	Attenuator	MCE	24-10-34	BN9258	2020.05.11	2021.05.10	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2020.05.11	2021.05.10	1 year
24	test receiver	R&S	ESCI	a0304218	2020.05.11	2021.05.10	1 year
25	Communication Tester	R&S	CMU200	A0304247	2019.08.06	2020.08.05	1 year
26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2020.05.11	2021.05.10	1 year

27	DC Power Source	N/A	PS-6005D	2017040292 3	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2019.08.06	2020.08.05	1 year
29	Communication Tester	R&S	CMW500	148500	2020.05.11	2021.05.10	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..		-	-	-	-
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

LTE Band 2

LTE Band 5

LTE Band 7

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log(P) \text{ dB}$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P) \text{ dB}$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P) \text{ dB}$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

LTE Band 2/5/7

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log(P) \text{ dB}$ on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P) \text{ dB}$ on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P) \text{ dB}$ on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set display line

Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

LTE Band 2

LTE Band 5

LTE Band 7

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both QPSK and 16QAM has been tested, the worst case is 16QAM mode, B7 records two patterns, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

- 22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
- 24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
- 27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
- 27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
- 27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
- 27.50 (h)(2)Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, “Measurement Guidance for Certification of Licensed Digital Transmitters”

MODES TESTED

- LTE Band 2
- LTE Band 5
- LTE Band 7

RESULTS

Pass

8.2 LTE BAND 2

Mode	RB/ RB Position	Frequency	Radiated Power (EIRP) for Band 2						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Mid	1850.7	0.88	3.76	28.24	25.36	343.558	Horizontal	Pass
		1880	1.09	3.91	28.22	25.40	346.737	Horizontal	Pass
		1909.3	1.31	3.93	28.20	25.58	361.410	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	0.80	3.77	28.23	25.26	335.738	Horizontal	Pass
		1880	1.10	3.91	28.24	25.43	349.140	Horizontal	Pass
		1908.5	1.28	3.94	28.25	25.59	362.243	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	0.57	3.77	28.31	25.11	324.340	Horizontal	Pass
		1880	1.15	3.91	28.22	25.46	351.560	Horizontal	Pass
		1907.5	1.08	3.94	28.20	25.34	341.979	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	0.57	3.79	28.33	25.11	324.340	Horizontal	Pass
		1880	1.03	3.95	28.22	25.30	338.844	Horizontal	Pass
		1905	1.37	3.97	28.19	25.59	362.243	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	0.77	3.79	28.34	25.32	340.408	Horizontal	Pass
		1880	1.23	3.95	28.22	25.50	354.813	Horizontal	Pass
		1902.5	1.14	3.97	28.18	25.35	342.768	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	1.08	3.81	28.35	25.62	364.754	Horizontal	Pass
		1880	1.05	3.96	28.22	25.31	339.625	Horizontal	Pass
		1900	1.50	4.00	28.16	25.66	368.129	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	0.76	3.76	28.24	25.24	334.195	Vertical	Pass
		1880	0.79	3.91	28.22	25.10	323.594	Vertical	Pass
		1909.3	-0.04	3.93	28.20	24.23	264.850	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-0.05	3.77	28.23	24.41	276.058	Vertical	Pass
		1880	0.54	3.91	28.24	24.87	306.902	Vertical	Pass
		1908.5	0.23	3.94	28.25	24.54	284.446	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	0.34	3.77	28.31	24.88	307.610	Vertical	Pass
		1880	0.96	3.91	28.22	25.27	336.512	Vertical	Pass
		1907.5	-0.78	3.94	28.20	23.48	222.844	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1855	0.62	3.79	28.33	25.16	328.095	Vertical	Pass
		1880	0.74	3.95	28.22	25.01	316.957	Vertical	Pass
		1905	0.47	3.97	28.19	24.69	294.442	Vertical	Pass

15.0MHz Band QPSK	1/#Mid	1857.5	0.18	3.79	28.34	24.73	297.167	Vertical	Pass
		1880	-0.39	3.95	28.22	23.88	244.343	Vertical	Pass
		1902.5	-0.86	3.97	28.18	23.35	216.272	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	1860	-0.65	3.81	28.35	23.89	244.906	Vertical	Pass
		1880	0.92	3.96	28.22	25.18	329.610	Vertical	Pass
		1900	0.72	4.00	28.16	24.88	307.610	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2								
Mode	RB/ RB Position	Frequency	Result					
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP
1.4MHz Band 16 QAM	1/#Mid	1850.7	0.73	3.76	28.24	25.21	331.894	Horizontal
		1880	0.18	3.91	28.22	24.49	281.190	Horizontal
		1909.3	0.58	3.93	28.20	24.85	305.492	Horizontal
3.0MHz Band 16 QAM	1/#Mid	1851.5	0.80	3.77	28.23	25.26	335.738	Horizontal
		1880	0.14	3.91	28.24	24.47	279.898	Horizontal
		1908.5	0.49	3.94	28.25	24.80	301.995	Horizontal
5.0MHz Band 16 QAM	1/#Mid	1852.5	-0.04	3.77	28.31	24.50	281.838	Horizontal
		1880	-0.23	3.91	28.22	24.08	255.859	Horizontal
		1907.5	0.21	3.94	28.20	24.47	279.898	Horizontal
10.0MHz Band 16 QAM	1/#Mid	1855	0.74	3.79	28.33	25.28	337.287	Horizontal
		1880	0.13	3.95	28.22	24.40	275.423	Horizontal
		1905	0.32	3.97	28.19	24.54	284.446	Horizontal
15.0MHz Band 16 QAM	1/#Mid	1857.5	0.75	3.79	28.34	25.30	338.844	Horizontal
		1880	0.21	3.95	28.22	24.48	280.543	Horizontal
		1902.5	1.01	3.97	28.18	25.22	332.660	Horizontal
20.0MHz Band 16 QAM	1/#Mid	1860	-0.45	3.81	28.35	24.09	256.448	Horizontal
		1880	1.07	3.96	28.22	25.33	341.193	Horizontal
		1900	0.18	4.00	28.16	24.34	271.644	Horizontal
1.4MHz Band 16 QAM	1/#Mid	1850.7	-2.17	3.76	28.24	22.31	170.216	Vertical
		1880	-1.22	3.91	28.22	23.09	203.704	Vertical
		1909.3	-0.41	3.93	28.20	23.86	243.220	Vertical
3.0MHz Band 16 QAM	1/#Mid	1851.5	-0.41	3.77	28.23	24.05	254.097	Vertical
		1880	-0.54	3.91	28.24	23.79	239.332	Vertical
		1908.5	-1.40	3.94	28.25	22.91	195.434	Vertical
5.0MHz Band 16 QAM	1/#Mid	1852.5	-1.08	3.77	28.31	23.46	221.820	Vertical
		1880	-0.90	3.91	28.22	23.41	219.280	Vertical
		1907.5	-1.88	3.94	28.20	22.38	172.982	Vertical
10.0MHz Band 16 QAM	1/#Mid	1855	-0.55	3.79	28.33	23.99	250.611	Vertical
		1880	-0.65	3.95	28.22	23.62	230.144	Vertical
		1905	-1.31	3.97	28.19	22.91	195.434	Vertical
15.0MHz Band 16 QAM	1/#Mid	1857.5	-2.19	3.79	28.34	22.36	172.187	Vertical
		1880	-1.97	3.95	28.22	22.30	169.824	Vertical
		1902.5	-0.10	3.97	28.18	24.11	257.632	Vertical

20.0MHz	1/#Mid	1860	-1.21	3.81	28.35	23.33	215.278	Vertical	Pass
Band 16		1880	-1.43	3.96	28.22	22.83	191.867	Vertical	Pass
QAM		1900	-1.65	4.00	28.16	22.51	178.238	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Mode	RB/ RB Positi on	Freque ncy	Radiated Power (ERP) for Band 5							Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Antenn a Gain (dB)	Correc tion (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarizatio n Of Max. ERP	
1.4MHz Band QPSK	1/#Mi d	824.7	8.79	2.01	19.68	2.15	24.31	269.774	Horizontal	Pass
		836.5	8.70	2.01	19.77	2.15	24.31	269.774	Horizontal	Pass
		848.3	8.87	2.02	19.82	2.15	24.52	283.139	Horizontal	Pass
3.0MHz Band QPSK	1/#Mi d	825.5	8.78	2.01	19.70	2.15	24.32	270.396	Horizontal	Pass
		836.5	8.69	2.01	19.77	2.15	24.30	269.153	Horizontal	Pass
		847.5	8.98	2.02	19.81	2.15	24.62	289.734	Horizontal	Pass
5.0MHz Band QPSK	1/#Mi d	826.5	8.63	2.01	19.71	2.15	24.18	261.818	Horizontal	Pass
		836.5	8.77	2.01	19.77	2.15	24.38	274.157	Horizontal	Pass
		846.5	8.54	2.02	19.79	2.15	24.16	260.615	Horizontal	Pass
10.0MHz Band QPSK	1/#Mi d	829	9.07	2.01	19.73	2.15	24.64	291.072	Horizontal	Pass
		836.5	8.66	2.01	19.77	2.15	24.27	267.301	Horizontal	Pass
		844	8.88	2.02	19.78	2.15	24.49	281.190	Horizontal	Pass
1.4MHz Band QPSK	1/#Mi d	824.7	7.40	2.01	19.68	2.15	22.92	195.884	Vertical	Pass
		836.5	7.47	2.01	19.77	2.15	23.08	203.236	Vertical	Pass
		848.3	7.37	2.02	19.82	2.15	23.02	200.447	Vertical	Pass
3.0MHz Band QPSK	1/#Mi d	825.5	8.06	2.01	19.70	2.15	23.60	229.087	Vertical	Pass
		836.5	7.38	2.01	19.77	2.15	22.99	199.067	Vertical	Pass
		847.5	7.39	2.02	19.81	2.15	23.03	200.909	Vertical	Pass
5.0MHz Band QPSK	1/#Mi d	826.5	7.54	2.01	19.71	2.15	23.09	203.704	Vertical	Pass
		836.5	7.50	2.01	19.77	2.15	23.11	204.644	Vertical	Pass
		846.5	7.63	2.02	19.79	2.15	23.25	211.349	Vertical	Pass
10.0MHz Band QPSK	1/#Mi d	829	7.95	2.01	19.73	2.15	23.52	224.905	Vertical	Pass
		836.5	8.09	2.01	19.77	2.15	23.70	234.423	Vertical	Pass
		844	7.33	2.02	19.78	2.15	22.94	196.789	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/ RB Positi on	Frequen cy	Result							Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Antenn a Gain (dB)	Correc tion (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarizatio n Of Max. ERP	
1.4MHz Band 16 QAM	1/#M id	824.7	8.62	2.01	19.68	2.15	24.14	259.418	Horizontal	Pass
		836.5	8.17	2.01	19.77	2.15	23.78	238.781	Horizontal	Pass
		848.3	8.29	2.02	19.82	2.15	23.94	247.742	Horizontal	Pass
3.0MHz Band 16 QAM	1/#M id	825.5	8.50	2.01	19.70	2.15	24.04	253.513	Horizontal	Pass
		836.5	8.18	2.01	19.77	2.15	23.79	239.332	Horizontal	Pass
		847.5	8.34	2.02	19.81	2.15	23.98	250.035	Horizontal	Pass
5.0MHz Band 16 QAM	1/#M id	826.5	7.76	2.01	19.71	2.15	23.31	214.289	Horizontal	Pass
		836.5	7.32	2.01	19.77	2.15	22.93	196.336	Horizontal	Pass
		846.5	7.70	2.02	19.79	2.15	23.32	214.783	Horizontal	Pass
10.0MH z Band 16 QAM	1/#M id	829	8.63	2.01	19.73	2.15	24.20	263.027	Horizontal	Pass
		836.5	7.64	2.01	19.77	2.15	23.25	211.349	Horizontal	Pass
		844	7.62	2.02	19.78	2.15	23.23	210.378	Horizontal	Pass
1.4MHz Band 16 QAM	1/#M id	824.7	6.69	2.01	19.68	2.15	22.21	166.341	Vertical	Pass
		836.5	6.68	2.01	19.77	2.15	22.29	169.434	Vertical	Pass
		848.3	6.97	2.02	19.82	2.15	22.62	182.810	Vertical	Pass
3.0MHz Band 16 QAM	1/#M id	825.5	6.71	2.01	19.70	2.15	22.25	167.880	Vertical	Pass
		836.5	7.43	2.01	19.77	2.15	23.04	201.372	Vertical	Pass
		847.5	6.39	2.02	19.81	2.15	22.03	159.588	Vertical	Pass
5.0MHz Band 16 QAM	1/#M id	826.5	7.22	2.01	19.71	2.15	22.77	189.234	Vertical	Pass
		836.5	6.49	2.01	19.77	2.15	22.10	162.181	Vertical	Pass
		846.5	6.95	2.02	19.79	2.15	22.57	180.717	Vertical	Pass
10.0MH z Band 16 QAM	1/#M id	829	6.20	2.01	19.73	2.15	21.77	150.314	Vertical	Pass
		836.5	6.40	2.01	19.77	2.15	22.01	158.855	Vertical	Pass
		844	7.40	2.02	19.78	2.15	23.01	199.986	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Mid	2502.5	3.15	4.54	27.75	26.36	432.514	Horizontal	Pass
		2535	3.56	4.69	27.72	26.59	456.037	Horizontal	Pass
		2567.5	3.39	4.71	27.71	26.39	435.512	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	3.39	4.55	27.76	26.60	457.088	Horizontal	Pass
		2535	3.51	4.69	27.72	26.54	450.817	Horizontal	Pass
		2565	2.55	4.72	27.70	25.53	357.273	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	3.22	4.55	27.77	26.44	440.555	Horizontal	Pass
		2535	3.44	4.69	27.72	26.47	443.609	Horizontal	Pass
		2562.5	2.74	4.72	27.69	25.71	372.392	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	3.85	4.57	27.78	27.06	508.159	Horizontal	Pass
		2535	3.56	4.73	27.72	26.55	451.856	Horizontal	Pass
		2560	3.03	4.75	27.68	25.96	394.457	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	1.42	4.54	27.75	24.63	290.402	Vertical	Pass
		2535	2.50	4.69	27.72	25.53	357.273	Vertical	Pass
		2567.5	1.60	4.71	27.71	24.60	288.403	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	1.34	4.55	27.76	24.55	285.102	Vertical	Pass
		2535	2.89	4.69	27.72	25.92	390.841	Vertical	Pass
		2565	2.93	4.72	27.70	25.91	389.942	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	1.98	4.55	27.77	25.20	331.131	Vertical	Pass
		2535	2.83	4.69	27.72	25.86	385.478	Vertical	Pass
		2562.5	3.06	4.72	27.69	26.03	400.867	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	2.74	4.57	27.78	25.95	393.550	Vertical	Pass
		2535	2.07	4.73	27.72	25.06	320.627	Vertical	Pass
		2560	3.11	4.75	27.68	26.04	401.791	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/ RB Position	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	2502.5	2.89	4.54	27.75	26.10	407.380	Horizontal	Pass
		2535	3.14	4.69	27.72	26.17	414.000	Horizontal	Pass
		2567.5	2.48	4.71	27.71	25.48	353.183	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	2.18	4.55	27.76	25.39	345.939	Horizontal	Pass
		2535	3.16	4.69	27.72	26.19	415.911	Horizontal	Pass
		2565	2.15	4.72	27.70	25.13	325.837	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	3.16	4.55	27.77	26.38	434.510	Horizontal	Pass
		2535	3.12	4.69	27.72	26.15	412.098	Horizontal	Pass
		2562.5	2.75	4.72	27.69	25.72	373.250	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	3.18	4.57	27.78	26.39	435.512	Horizontal	Pass
		2535	3.59	4.73	27.72	26.58	454.988	Horizontal	Pass
		2560	2.93	4.75	27.68	25.86	385.478	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	1.30	4.54	27.75	24.51	282.488	Vertical	Pass
		2535	1.21	4.69	27.72	24.24	265.461	Vertical	Pass
		2567.5	0.95	4.71	27.71	23.95	248.313	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	1.52	4.55	27.76	24.73	297.167	Vertical	Pass
		2535	1.33	4.69	27.72	24.36	272.898	Vertical	Pass
		2565	1.29	4.72	27.70	24.27	267.301	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	0.52	4.55	27.77	23.74	236.592	Vertical	Pass
		2535	0.98	4.69	27.72	24.01	251.768	Vertical	Pass
		2562.5	0.69	4.72	27.69	23.66	232.274	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	0.96	4.57	27.78	24.17	261.216	Vertical	Pass
		2535	1.31	4.73	27.72	24.30	269.153	Vertical	Pass
		2560	0.54	4.75	27.68	23.47	222.331	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10} (p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10} (p)$, dB at the channel edges and $55 + 10 \log_{10} (p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

LTE Band 2

LTE Band 5

LTE Band 7

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency (MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-53.06	4.04	33.51	-23.59	-13	-10.59	Horizontal
3701.4	-44.16	4.04	33.51	-14.69	-13	-1.69	Vertical
5552.1	-51.53	5.24	35.84	-20.93	-13	-7.93	Vertical
5552.1	-50.71	5.24	35.84	-20.11	-13	-7.11	Horizontal
212.233	-43.40	1.43	16.02	-28.81	-13	-15.81	Vertical
238.116	-43.94	1.30	17.99	-27.25	-13	-14.25	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-45.36	4.04	33.56	-15.84	-13	-2.84	Horizontal
3760.0	-53.26	4.04	33.56	-23.74	-13	-10.74	Vertical
5640.0	-44.58	5.24	35.91	-13.91	-13	-0.91	Vertical
5640.0	-51.95	5.24	35.91	-21.28	-13	-8.28	Horizontal
195.572	-35.39	1.62	16.97	-20.04	-13	-7.04	Vertical
392.488	-44.76	1.74	15.98	-30.53	-13	-17.53	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-52.18	4.04	34.00	-22.22	-13	-9.22	Horizontal
3818.6	-48.67	4.04	34.00	-18.71	-13	-5.71	Vertical
5727.9	-46.42	5.24	36.04	-15.62	-13	-2.62	Vertical
5727.9	-51.67	5.24	36.04	-20.87	-13	-7.87	Horizontal
194.284	-44.04	1.42	17.29	-28.17	-13	-15.17	Vertical
233.701	-40.62	1.50	17.90	-24.21	-13	-11.21	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency (MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-49.20	4.07	33.54	-19.73	-13	-6.73	Horizontal
3720.0	-53.40	4.07	33.54	-23.93	-13	-10.93	Vertical
5580.0	-48.84	5.28	35.86	-18.26	-13	-5.26	Vertical
5580.0	-49.26	5.28	35.86	-18.68	-13	-5.68	Horizontal
209.056	-40.60	1.58	16.89	-25.28	-13	-12.28	Vertical
324.934	-35.35	1.76	17.26	-19.85	-13	-6.85	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-46.30	4.04	33.56	-16.78	-13	-3.78	Horizontal
3760.0	-52.14	4.04	33.56	-22.62	-13	-9.62	Vertical
5640.0	-53.86	5.24	35.91	-23.19	-13	-10.19	Vertical
5640.0	-52.94	5.24	35.91	-22.27	-13	-9.27	Horizontal
191.555	-43.24	1.46	16.27	-28.43	-13	-15.43	Vertical
322.913	-43.80	1.59	15.15	-30.24	-13	-17.24	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-52.24	4.04	34.00	-22.28	-13	-9.28	Horizontal
3800.0	-53.13	4.04	34.00	-23.17	-13	-10.17	Vertical
5700.0	-49.86	5.24	36.04	-19.06	-13	-6.06	Vertical
5700.0	-52.03	5.24	36.04	-21.23	-13	-8.23	Horizontal
181.683	-42.46	1.36	17.39	-26.42	-13	-13.42	Vertical
238.951	-43.74	1.66	15.39	-30.01	-13	-17.01	Horizontal

Note: PMea(dBm)= Power(dBm)+ ARpl (dBm)

. Over Limit= : PMea(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dB m)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-49.49	2.78	27.50	-24.77	-13	-11.77	Horizontal
1649.4	-46.21	2.78	27.50	-21.49	-13	-8.49	Vertical
2474.1	-51.15	2.90	27.80	-26.25	-13	-13.25	Vertical
2474.1	-53.68	2.90	27.80	-28.78	-13	-15.78	Horizontal
194.73	-41.83	1.76	17.59	-26.00	-13	-13.00	Vertical
304.388	-35.38	1.63	15.87	-21.14	-13	-8.14	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-44.33	2.80	27.48	-19.65	-13	-6.65	Horizontal
1673.0	-46.76	2.80	27.48	-22.08	-13	-9.08	Vertical
2509.5	-44.74	2.91	27.70	-19.95	-13	-6.95	Vertical
2509.5	-49.29	2.91	27.70	-24.50	-13	-11.50	Horizontal
195.452	-44.21	1.61	15.68	-30.14	-13	-17.14	Vertical
469.43	-37.39	1.59	17.52	-21.47	-13	-8.47	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-44.31	2.82	27.43	-19.70	-13	-6.70	Horizontal
1696.6	-51.76	2.82	27.43	-27.15	-13	-14.15	Vertical
2544.9	-44.56	2.92	27.74	-19.74	-13	-6.74	Vertical
2544.9	-51.90	2.92	27.74	-27.08	-13	-14.08	Horizontal
202.382	-34.42	1.69	16.67	-19.43	-13	-6.43	Vertical
443.605	-34.93	1.70	17.18	-19.45	-13	-6.45	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-48.11	2.78	27.50	-23.39	-13	-10.39	Horizontal
1658.0	-47.15	2.78	27.50	-22.43	-13	-9.43	Vertical
2487.0	-50.57	2.90	27.80	-25.67	-13	-12.67	Vertical
2487.0	-49.45	2.90	27.80	-24.55	-13	-11.55	Horizontal
183.446	-42.33	1.71	15.57	-28.47	-13	-15.47	Vertical
412.636	-35.88	1.34	16.40	-20.82	-13	-7.82	Horizontal
Test Results for Mid Channel 836.5MHz							
1673.0	-51.14	2.80	27.48	-26.46	-13	-13.46	Horizontal
1673.0	-53.20	2.80	27.48	-28.52	-13	-15.52	Vertical
2509.5	-49.79	2.91	27.70	-25.00	-13	-12.00	Vertical
2509.5	-51.17	2.91	27.70	-26.38	-13	-13.38	Horizontal
189.877	-44.40	1.44	17.04	-28.80	-13	-15.80	Vertical
260.955	-38.25	1.76	17.62	-22.39	-13	-9.39	Horizontal
Test Results for High Channel 844MHz							
1688.0	-51.91	2.82	27.43	-27.30	-13	-14.30	Horizontal
1688.0	-45.37	2.82	27.43	-20.76	-13	-7.76	Vertical
2532.0	-48.15	2.92	27.74	-23.33	-13	-10.33	Vertical
2532.0	-49.17	2.92	27.74	-24.35	-13	-11.35	Horizontal
196.002	-41.25	1.74	17.70	-25.29	-13	-12.29	Vertical
429.148	-42.77	1.41	17.46	-26.71	-13	-13.71	Horizontal

Note: PMea(dBm)= Power(dBm)+ ARPl (dBm)

. Over Limit= : PMea(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Frequency (MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3800.0	-61.32	5.23	35.81	-30.74	-25	-5.74	Horizontal
3800.0	-62.66	5.23	35.81	-32.08	-25	-7.08	Vertical
5700.0	-64.35	5.67	36.85	-33.17	-25	-8.17	Vertical
5700.0	-61.21	5.67	36.85	-30.03	-25	-5.03	Horizontal
200.9	-46.39	1.73	17.97	-30.15	-25	-5.15	Vertical
468.541	-53.98	1.38	15.11	-40.25	-25	-15.25	Horizontal

Test Results for Mid Channel 2535MHz

3800.0	-60.07	5.23	35.82	-29.48	-25	-4.48	Horizontal
3800.0	-64.74	5.23	35.82	-34.15	-25	-9.15	Vertical
5700.0	-63.10	5.67	36.85	-31.92	-25	-6.92	Vertical
5700.0	-64.36	5.67	36.85	-33.18	-25	-8.18	Horizontal
190.899	-44.66	1.77	16.17	-30.25	-25	-5.25	Vertical
380.523	-50.03	1.63	15.21	-36.45	-25	-11.45	Horizontal

Test Results for High Channel 2567.5MHz

3800.0	-61.29	5.24	35.83	-30.70	-25	-5.70	Horizontal
3800.0	-64.24	5.24	35.83	-33.65	-25	-8.65	Vertical
5700.0	-62.69	5.68	36.87	-31.50	-25	-6.50	Vertical
5700.0	-59.04	5.68	36.87	-27.85	-25	-2.85	Horizontal
197.285	-53.56	1.58	17.56	-37.58	-25	-12.58	Vertical
294.192	-50.37	1.45	16.58	-35.24	-25	-10.24	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency (MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3800.0	-59.34	5.23	35.82	-28.75	-25	-3.75	Horizontal
3800.0	-63.60	5.23	35.82	-33.01	-25	-8.01	Vertical
5700.0	-62.73	5.67	36.86	-31.54	-25	-6.54	Vertical
5700.0	-61.21	5.67	36.86	-30.02	-25	-5.02	Horizontal
208.666	-49.83	1.63	15.76	-35.70	-25	-10.70	Vertical
378.842	-44.43	1.71	15.44	-30.70	-25	-5.70	Horizontal
Test Results for Mid Channel 2535MHz							
3800.0	-59.90	5.23	35.82	-29.31	-25	-4.31	Horizontal
3800.0	-61.37	5.23	35.82	-30.78	-25	-5.78	Vertical
5700.0	-62.16	5.67	36.85	-30.98	-25	-5.98	Vertical
5700.0	-62.85	5.67	36.85	-31.67	-25	-6.67	Horizontal
202.643	-50.15	1.79	16.84	-35.09	-25	-10.09	Vertical
278.606	-49.47	1.71	17.64	-33.54	-25	-8.54	Horizontal
Test Results for High Channel 2560MHz							
3800.0	-64.73	5.24	35.83	-34.14	-25	-9.14	Horizontal
3800.0	-62.80	5.24	35.83	-32.21	-25	-7.21	Vertical
5700.0	-63.68	5.70	36.88	-32.50	-25	-7.50	Vertical
5700.0	-59.10	5.70	36.88	-27.92	-25	-2.92	Horizontal
178.99	-50.00	1.79	16.84	-34.94	-25	-9.94	Vertical
367.751	-49.69	1.71	17.64	-33.76	-25	-8.76	Horizontal

Note: PMea(dBm)= Power(dBm)+ ARpl (dBm)

- . Over Limit= : PMea(dBm)-Limit(dBm)
- . Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to $+50^{\circ}\text{C}$

Voltage = low voltage, DC 3.2V, Normal, DC 3.8V and High voltage, DC 4.4V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band 2

LTE Band 5

LTE Band 7

RESULTS

See the following pages.

10.1 LTE BAND 2

QPSK, (20MHz BANDWIDTH)
Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	1880	13.2	0.006996	2.5
3.8	1880	14.1	0.007525	2.5
4.4	1880	13.2	0.007004	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 QPSK, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	12.3	0.006549	2.5
Extreme (50C)	1880	11.9	0.006333	2.5
Extreme (40C)	1880	13.3	0.007065	2.5
Extreme (30C)	1880	13.9	0.007367	2.5
Extreme (10C)	1880	14.0	0.007462	2.5
Extreme (0C)	1880	11.8	0.006302	2.5
Extreme (-10C)	1880	12.8	0.006788	2.5
Extreme (-20C)	1880	14.0	0.007436	2.5
Extreme (-30C)	1880	14.4	0.007653	2.5

16QAM, (20MHz BANDWIDTH)
Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	1880	9.5	0.005045	2.5
3.8	1880	8.5	0.004496	2.5
4.4	1880	8.0	0.004266	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 2 16QAM, (CH 18900 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	1880	9.3	0.004924	2.5
Extreme (50C)	1880	8.6	0.004571	2.5
Extreme (40C)	1880	8.5	0.004524296	2.5
Extreme (30C)	1880	8.9	0.004716395	2.5
Extreme (10C)	1880	9.4	0.004996986	2.5
Extreme (0C)	1880	8.2	0.004338389	2.5
Extreme (-10C)	1880	8.9	0.004754358	2.5
Extreme (-20C)	1880	8.4	0.004475024	2.5
Extreme (-30C)	1880	8.4	0.00447039	2.5

*Note: Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

QPSK, (10MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	836.5	5.4	0.006398	2.5
3.8	836.5	6.6	0.007891	2.5
4.4	836.5	4.4	0.005250	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 QPSK, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	5.6	0.006709	2.5
Extreme (50C)	836.5	5.8	0.006951	2.5
Extreme (40C)	836.5	6.1	0.007292	2.5
Extreme (30C)	836.5	6.7	0.008024	2.5
Extreme (10C)	836.5	5.1	0.006048	2.5
Extreme (0C)	836.5	5.2	0.006252	2.5
Extreme (-10C)	836.5	5.4	0.006490	2.5
Extreme (-20C)	836.5	6.3	0.007558	2.5
Extreme (-30C)	836.5	5.9	0.007051	2.5

16QAM, (10MHz BANDWIDTH)
Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
3.2	836.5	5.6	0.006671	2.5
3.8	836.5	6.3	0.007511	2.5
4.4	836.5	4.6	0.005451	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 5 16QAM, (CH 20525 RB size 50 RB Offset 0 10MHz BANDWIDTH)				
Normal (25C)	836.5	6.5	0.007768	2.5
Extreme (50C)	836.5	6.3	0.007486	2.5
Extreme (40C)	836.5	6.1	0.007295	2.5
Extreme (30C)	836.5	6.3	0.007580	2.5
Extreme (10C)	836.5	5.1	0.006154	2.5
Extreme (0C)	836.5	5.1	0.006094	2.5
Extreme (-10C)	836.5	5.7	0.006839	2.5
Extreme (-20C)	836.5	6.0	0.007178	2.5
Extreme (-30C)	836.5	6.5	0.007735	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

QPSK, (20MHz BANDWIDTH)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	2535	9.7	0.003840	2.5
3.8	2535	8.6	0.003382	2.5
4.4	2535	8.6	0.003400	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 QPSK, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	9.6	0.003789	2.5
Extreme (50C)	2535	9.3	0.003688	2.5
Extreme (40C)	2535	8.0	0.003163	2.5
Extreme (30C)	2535	8.9	0.003529	2.5
Extreme (10C)	2535	8.4	0.003308	2.5
Extreme (0C)	2535	8.2	0.003238	2.5
Extreme (-10C)	2535	9.1	0.003593	2.5
Extreme (-20C)	2535	9.2	0.003620	2.5
Extreme (-30C)	2535	8.3	0.003292	2.5

16QAM, (20MHz BANDWIDTH)
Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
3.2	2535	6.9	0.002722	2.5
3.8	2535	6.8	0.002689	2.5
4.4	2535	5.4	0.002124	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
BAND 7 16QAM, (CH 21100 RB size 100 RB Offset 0 20MHz BANDWIDTH)				
Normal (25C)	2535	6.9	0.002722	2.5
Extreme (50C)	2535	5.3	0.002084	2.5
Extreme (40C)	2535	5.6	0.002213	2.5
Extreme (30C)	2535	6.3	0.002477	2.5
Extreme (10C)	2535	5.6	0.002197	2.5
Extreme (0C)	2535	5.1	0.001997	2.5
Extreme (-10C)	2535	5.1	0.001994	2.5
Extreme (-20C)	2535	5.8	0.002298	2.5
Extreme (-30C)	2535	5.6	0.002213	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

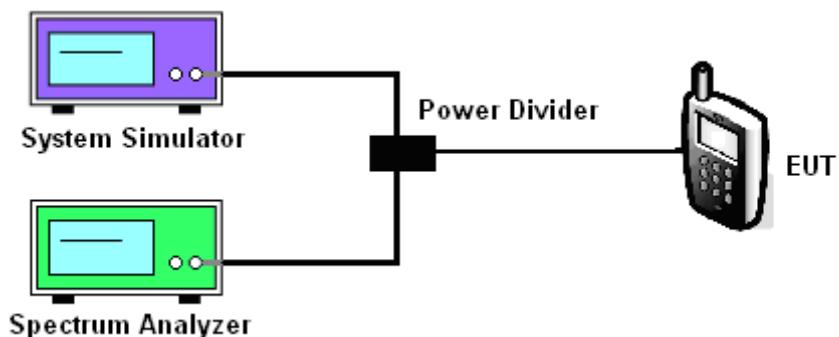

MODES TESTED

LTE Band 2/5/7

Test data reference attachment.

----END OF REPORT----