

ShenZhen xinErSheng Technology Co. , Ltd

Floor 3, Building D, No. 96, Fenghuang Lingxia Road, Fuyong, Shenzhen, Guangdong, China

Antenna Specification for Approval

Customer Name: LANGUANG

Address: _____

Product Name: 2.4G Coaxial antenna

Part NO. : C113F-IPXBT30125-43-112-120R

Write By: Zhou Min


Issued Date: 2023-11-8

Customer :

R&D Dept	Business Dept	Approved By


Supplier

R&D Dept	Engineer Dept	Approval
Ni Sheng	Zhang Ming	xiong

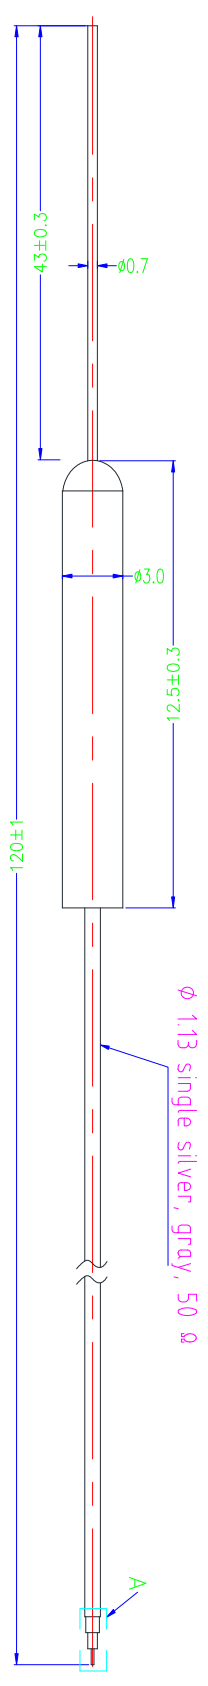

$\phi 1.13$ single silver, gray, 50 Ω

1 IPEX



- Specifications:
1. Frequency range: 2.4GHz -2.5GHz;
 2. Power gain: 1.97dBi.

1 2 3 4 5 6

TITLE: ??	antenna		MATERIAL: ??	FINISH: 表面處理
PART/NO.: C113F-IPXBT30125-43-112-120R	UNIT IN: mm	SCALE: 2.5:1	TOLERANCE: ??	
DATE: 22-12-1	CHECKING: [Signature]	DATE: 22-12-1	LINEAR: L<30 ± 0.10 , 30<L<100 ± 0.15 , L>100 ± 0.20	ANGULAR: X.XX $\pm 0.1^\circ$, X.X $\pm 0.2^\circ$
DRAWING	DATE	CHECKING	UNLESS OTHERWISE SPECIFIED	REV: 01

Dongguan Lixinwei Electronics Co., Ltd

Product Specification

A. Electrical Characteristics

Frequency 2.400MHz ~2.500MHz

VSWR <2.0

Efficiency >65%

Impedance 50 Ohm

Coaxial antenna

Polarization Line

Gain 1.97DBi

B. Material & Mechanical Characteristics

Material of Radiator Cu

Cable Type 1.13

Connector Type : IPEX1

Dimension

C. Environmental

Operation Temperature - 30 °C ~ + 80 °C

Storage Temperature - 30 °C ~ + 85 °C

Test Equipment & Conditions


1. Network Analyzers :

Agilent 8753D 5071B


2. Communications Test Set:

Agilent E5515C


3. 3D Chamber Test System

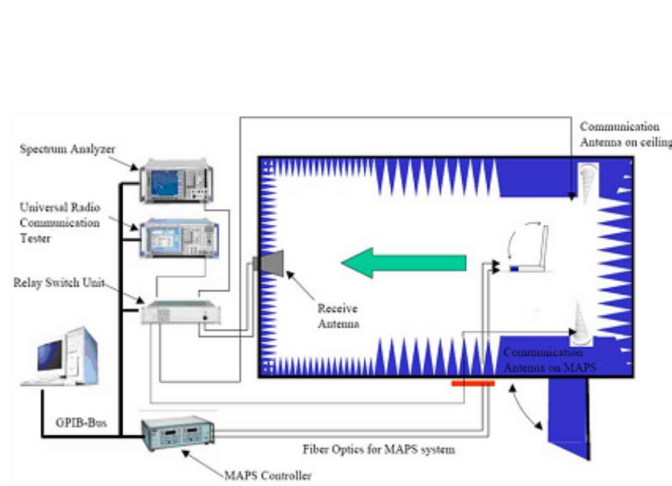

(Testing by 3D anechoic chamber)



Phi axis test




Theta axis test


Efficiency & Gain

Freq (MHz)	Effi (%)	Gain (dBi)
2400	57.97	1.42
2410	64.83	1.76
2420	54.67	1.81
2430	65.56	1.97
2440	56.69	1.53
2450	52.08	1.83
2460	51.84	1.85
2470	52.93	1.75
2480	52.46	1.79
2490	58.44	1.82
2500	57.45	1.49

S11

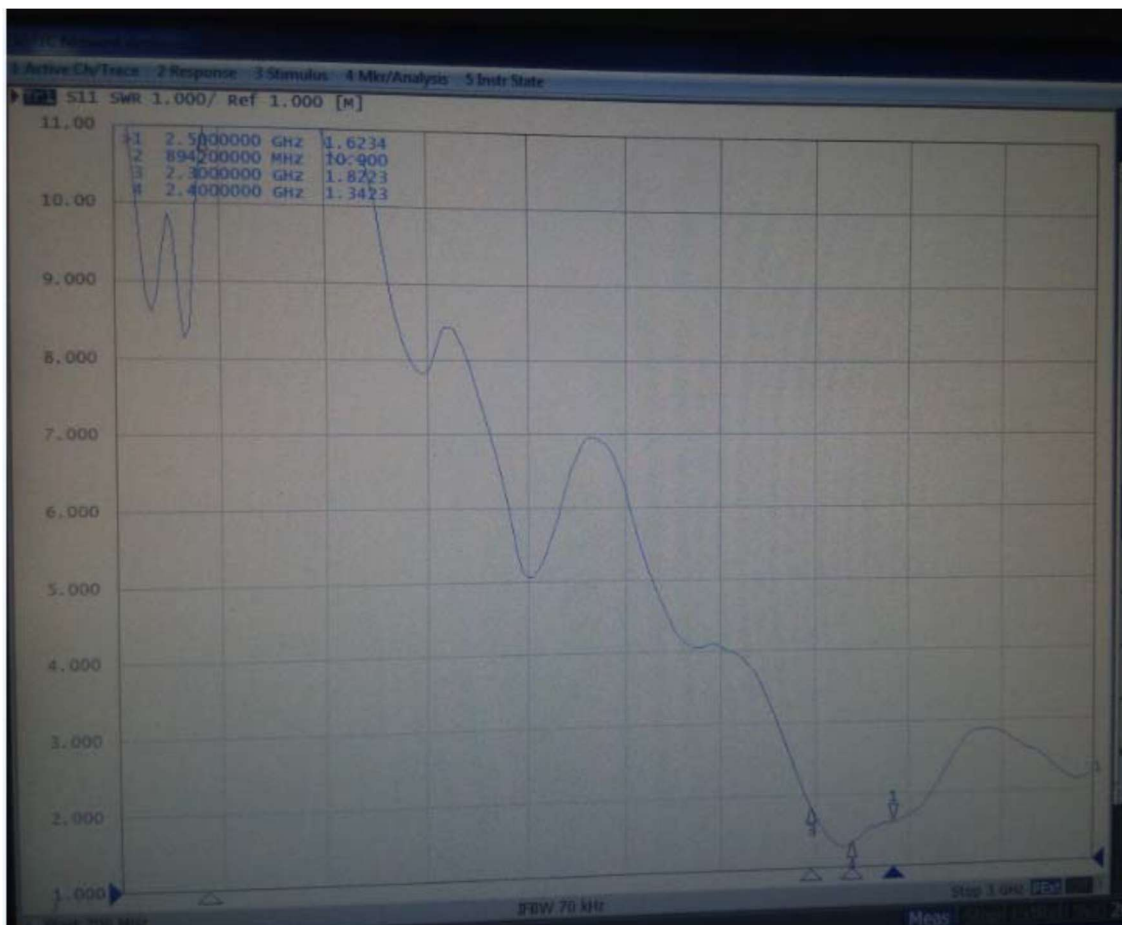

Radiation Pattern:

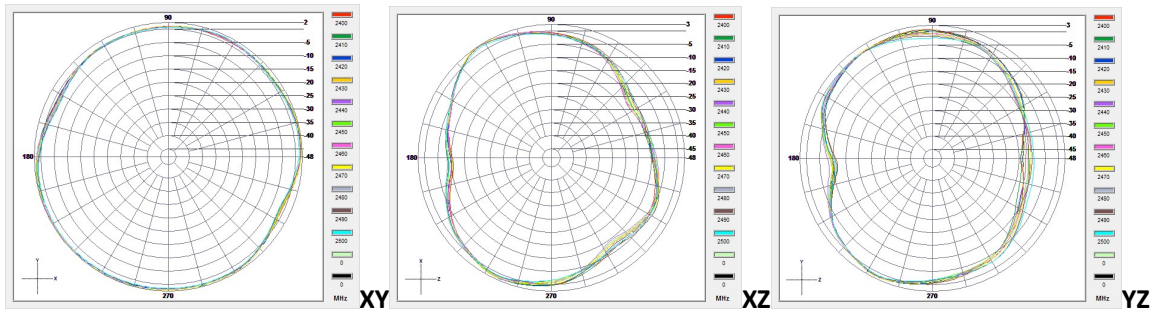

2400 2410 2420 2430 2440 2450 2460 2470 2480 2490 2500

