

ShenZhen Eastong Electronic technology Co., LTD

APPROVAL SHEET FOR BT (2.4G band internal antenna)

Issued by	Checked by	
Confirmed by	Date	2024-01-11
Customer		
Confirm		

Project: BT		Author: XU	File Name:				
Date: 2024-01-11		xiaorong	BT-APP-RA				
Rev: Language:		Check:					
A ENG							
	CONFIDENTIAL						
ShenZhen Eastong Electronic technology Co., LTD							
411, No. 9, Yangmei Huano			neng Middle Road, Bantian, Longgang District, Shenzhen				

Revision History

Date	Revision	Description of Changes
2024-01-11	R:A	Antenna performance approved by customer

1 SUMMARY

2 GENERAL DESCRIPTION

2.1 Definitions

3 MECHANICAL DESCRIPTION

4 ELECTRICAL PERFORMANCE

4.1 Set-up

- 4.1.1 VSWR and return loss
- 4.1.2 Efficiency, Gain and TRP/TIS
- 4.1.3 Matching Circuit Description

4.2 Measurement Data

- 4.2.1 VSWR
- 4.2.2 Active result

5 MECHANICAL DRAWING

6 CONCLUSION

Project: BT		Author: XU	File Name:				
Date: 2024-01-11		xiaorong	BT-APP-RA				
Rev:	Language:	Check:					
A ENG							
	CONFIDENTIAL						
	ShenZhen Eastong Electronic technology Co., LTD						
411, No. 9, Yangmei Huanc			heng Middle Road, Bantian, Longgang District, Shenzhen				

1 Summary

This report summarizes the electrical results of the proposed antenna to support the BT program. We test the antenna with the latest version handset .

2 General Description

2.1 Definitions

VSWR: Voltage Standing Wave Rate

3 Mechanical Description

4 Electrical Performance

4.1 Set-up

4.1.1 VSWR and return loss

VSWR measurements (S_{11}) were performed using an Agilent E5070B Network Analyzer and the previously described test fixture. Coaxial chokes were used to mitigate surface currents on the outside of the cabling. The testing was performed in free space.

4.1.2 Efficiency, Gain and TRP/TIS

The gain of the antenna was measured in Dong Xin's 3D anechoic chamber in Shenzhen. The chamber is capable of doing tests from 380MHz to 6GHz. Coaxial chokes on the feed cable were used to mitigate surface currents. The measurement results are calibrated using dipole standards. For TRP and TIS the chamber uses a Agilent 8960 to establish the connection with the mobile device. During TRP tests the 8960 reads the power received through the chamber probes whilst during TIS tests the 8960 transmits through the probe. All data is afterwards corrected by a calibration table.

4.1.3 Matching Circuit Description


No matching.

Project: BT		Author: XU	File Name:				
Date: 2024-01-11		xiaorong	BT-APP-RA				
Rev:	Language:	Check:					
А	ENG						
	CONFIDENTIAL						
			ectronic technology Co., LTD				
411, No. 9, Yangmei Huand			heng Middle Road, Bantian, Longgang District, Shenzhen				

4.2 Measurement Data

Specification: Single strand, wire diameter 0.6mm, total length 28mm, black, exposed welding head 1mm


Frequency:2402~2480MHz

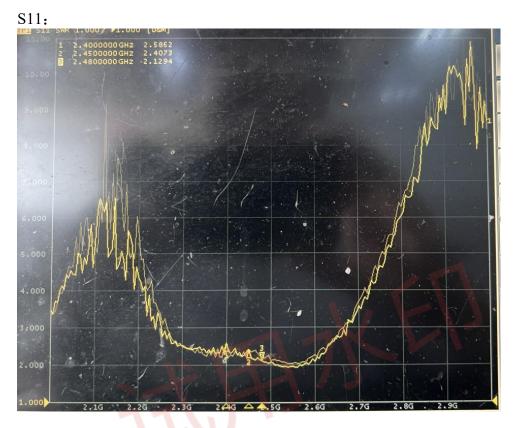

GAIN:

Test Point ID	Freq. (MHz)	TRP (dBm)	Gain (dBi)
1	2400.0	2400.00	-2.91
<u>2</u>	2410.0	2410.00	-2.43
<u>3</u>	2420.0	2420.00	-2.27
<u>4</u>	2430.0	2430.00	-2.12
<u>5</u>	2440.0	2440.00	-1.72
<u>6</u>	2450.0	2450.00	-1.60
<u>7</u>	2460.0	2460.00	-1.27
<u>8</u>	2470.0	2470.00	-2.46
<u>9</u>	2480.0	2480.00	-1.09
<u>10</u>	2490.0	2490.00	-0.84
<u>11</u>	2500.0	2500.00	0.67

Project: BT		Author: XU	File Name:				
Date: 2024-01-11		xiaorong	BT-APP-RA				
Rev:	Language:	Check:					
А	ENG						
	CONFIDENTIAL						
ShenZhen Eastong Electronic technology Co., LTD							
411, No. 9, Yangmei Huancheng Middle Road, Bantian, Longgang District, Shenzhen							

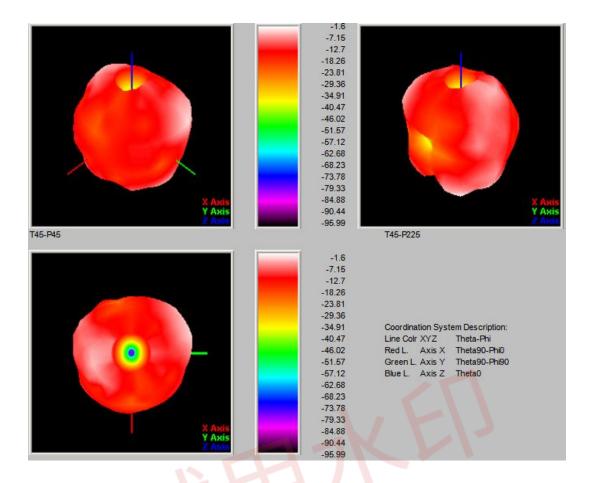



Project: BT		Author: XU	File Name:				
Date: 2024-01-11		xiaorong	BT-APP-RA				
Rev:	ev: Language: Check						
A ENG							
	CONFIDENTIAL						
	Sher	nZhen Eastong Ele	ctronic technology Co., LTD				
411, No. 9, Yangmei Huanc			neng Middle Road, Bantian, Longgang District, Shenzhen				

MT Tria the inside		9 •	and the tolerance not noted is according to the drawing	1. The size marked with * is the key size,	comment.			,	
edition Reserve Injection			he drawing					Sing	
Att ±0.20 C 0.02 approximate black mit m 1:4	±0.16 ∅ ∅1.03 ±0.16 ∅ ∅1.03 ±0.16 ∅ ∅1.03 ±0.16 ∅ № ±0.16 ∅ № ±0.16 ∅ № ±0.16 ∅ № ±0.16 ∅ № ±0.16 ∅ № ±0.16 ∅ № ±0.16 ∅ № ±0.17 0.02 ±0.18 ∅ ±0.18 0.02 ±0.18 0.02 ±0.18 0.02 ±0.18 0.02 ±0.18 0.02 ±0.19 0.02 ±0.19 0.02 ±0.19 0.02 ±0.19 0.02 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±0.112 0.03 ±	ochieviel number 1518-099 date 8/024-02-13 1/1 Product number BT conductor	SHenZhen Eastong Electronic technology Co., LTD			Ø0.6 -		Single strand wire *28±2.0	
	oject: B7 ate: 2024	-01-1	1 Langua		Author: XU xiaorong Check:	Fi	le Name:	BT-APP-RA	
A			ENG	ige.	Check.				
		1		01			NTIAL		
				Shei 411, N	o. 9, Yangmei Hu	Liectro	nic technol g Middle Roa	ogy Co., LTD ad, Bantian, Longgang District, Shenz	zhen