



TEST REPORT

Applicant Name : Cedar Kingdom Corporation Limited
Address : Flat/Rm05, 14/F, Lucky Centre, 165-171 Wanchai Road,
Wanchai, Hong Kong

Report Number : CR21090060-20A
FCC ID: 2AKQUVZCKVT1001

Test Standard (s)

FCC Part 2.1093

Sample Description

Product Type: FUNTAB X
Model No.: VT1001
Date Received: 2021/10/10
Date of Test: 2021/11/25~2021/11/26
Report Date: 2021/11/28

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Lance Li
EMC Engineer

Approved By:

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" .

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "*". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

Attestation of Test Results			
EUT Information	EUT Description	FUNTAB X	
	Tested Model	VT1001	
	FCC ID	2AKQUVZCKVT1001	
	Serial Number	CR21090060-SA-S1	
MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)
GSM 850	1g Body SAR	0.51	1.6
PCS 1900	1g Body SAR	1.07	
WCDMA Band 2	1g Body SAR	0.79	
WCDMA Band 4	1g Body SAR	1.03	
WCDMA Band 5	1g Body SAR	0.11	
LTE Band 2	1g Body SAR	1.08	
LTE Band 4	1g Body SAR	1.02	
LTE Band 5	1g Body SAR	0.21	
LTE Band 7	1g Body SAR	1.14	
WLAN 2.4G	1g Body SAR	0.39	
Simultaneous	1g Body SAR	1.53	
	1g Body SAR	1.53 (Hotspot)	
Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices		
	RF Exposure Procedures: TCB Workshop April 2019		
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
	IEC 62209-1:2016 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz)		
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 616217 D04 SAR for laptop and tablets v01r02 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 248227 D01 802.11 Wi-Fi SAR v02r02		
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.			

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
EUT DESCRIPTION	5
TECHNICAL SPECIFICATION	5
REFERENCE, STANDARDS, AND GUIDELINES	6
SAR LIMITS.....	7
FACILITIES	8
DESCRIPTION OF TEST SYSTEM	9
EQUIPMENT LIST AND CALIBRATION	14
EQUIPMENTS LIST & CALIBRATION INFORMATION.....	14
SAR MEASUREMENT SYSTEM VERIFICATION	15
LIQUID VERIFICATION	15
SYSTEM ACCURACY VERIFICATION.....	17
SAR SYSTEM VALIDATION DATA.....	18
EUT TEST STRATEGY AND METHODOLOGY	23
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR	23
CHEEK/TOUCH POSITION	24
EAR/TILT POSITION	24
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS.....	25
TEST DISTANCE FOR SAR EVALUATION.....	25
SAR EVALUATION PROCEDURE	26
CONDUCTED OUTPUT POWER MEASUREMENT	27
PROVISION APPLICABLE	27
TEST PROCEDURE	27
RADIO CONFIGURATION	27
MAXIMUM TARGET OUTPUT POWER	31
TEST RESULTS:.....	33
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	47
ANTENNA DISTANCE TO EDGE.....	47
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	47
STANDALONE SAR ESTIMATION:.....	48
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS:	48
SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT	48
SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS DETAIL:	49
SAR MEASUREMENT RESULTS	50
SAR TEST DATA	50
SAR MEASUREMENT VARIABILITY	58
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	59
SAR PLOTS	63
APPENDIX A MEASUREMENT UNCERTAINTY	64
APPENDIX B EUT TEST POSITION PHOTOS	65
APPENDIX C PROBE CALIBRATION CERTIFICATES	66
APPENDIX D DIPOLE CALIBRATION CERTIFICATES	67

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	CR21090060-20A	Original Report	2021-11-28

EUT DESCRIPTION

This report has been prepared on behalf of *Cedar Kingdom Corporation Limited* and their product *FUNTAB X*, Model: *VT1001*, FCC ID: *2AKQUVZCKVT1001* or the EUT (Equipment under Test) as referred to in the rest of this report.

Technical Specification

Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
DTM Type:	Class B
Multi-slot Class:	GPRS(Class 12); EDGE(Class 12)
Body-Worn Accessories:	Plastic Case
Face-Head Accessories:	None
Operation Mode :	GSM Voice, GPRS/EDGE Data, WCDMA(R99 (Voice+Data), HSDPA/HSUPA), FDD-LTE Wi-Fi and Bluetooth
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 4: 1710-1755 MHz(TX); 2110-2155 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX); 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX) WLAN 2.4G : 2412 MHz-2462 MHz/2422 MHz-2452 MHz WLAN 5.2G : 5150 MHz-5250 MHz WLAN 5.8G : 5725 MHz-5850 MHz Bluetooth : 2402 MHz-2480 MHz
Conducted RF Power:	GSM 850: 34.00 dBm; PCS 1900: 31.54 dBm; WCDMA Band 2: 22.73 dBm; WCDMA Band 4: 22.91 dBm; WCDMA Band 5: 23.01 dBm; LTE Band 2: 22.27 dBm; LTE Band 4: 22.41 dBm LTE Band 5: 22.69 dBm; LTE Band 7: 22.15 dBm WLAN 2.4G: 11.31 dBm; WLAN 5.2G: 5.97 dBm WLAN 5.8G: 5.93 dBm Bluetooth(BDR/EDR): 6.67 dBm BLE: 0.92 dBm.
Power Source:	3.8 VDC From Rechargeable Battery
Normal Operation:	Body Supported

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits**FCC Limit(1g Tissue)**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit(10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

The test site has been registered with ISED Canada under ISED Canada Registration Number CN0016.


DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

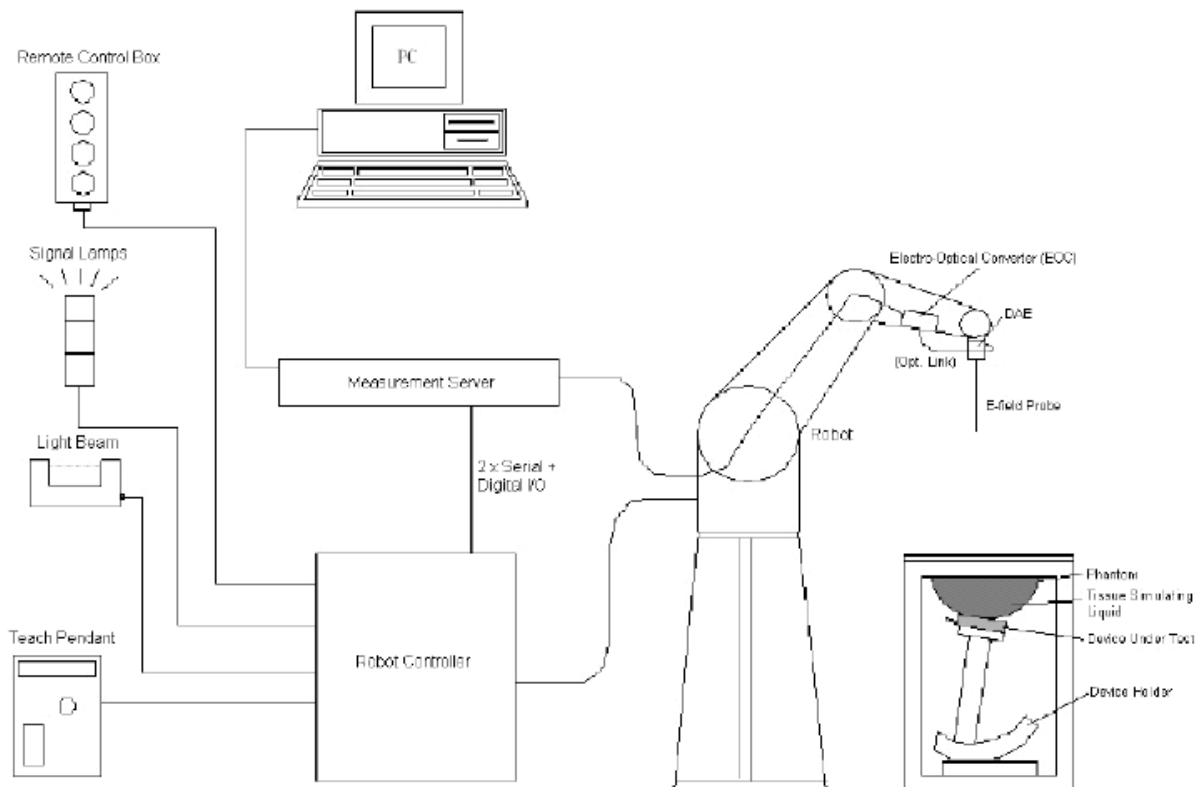

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY5) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm..

When the phantom is mounted inside allocated slot of the DASY5 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY5 platform is used to mount the

Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.

In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom.

Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom. Approximately 25 liters of liquid is required to fill the SAM Twin phantom.



Calibration Frequency Points for EX3DV4 E-Field Probes SN: 7522 Calibrated: 2021/04/19

Calibration Frequency Point(MHz)	Frequency Range(MHz)		Conversion Factor		
	From	To	X	Y	Z
750 Head	650	850	9.93	9.93	9.93
900 Head	850	1000	9.39	9.39	9.39
1750 Head	1650	1850	8.16	8.16	8.16
1900 Head	1850	2000	7.94	7.94	7.94
2300 Head	2200	2400	7.61	7.61	7.61
2450 Head	2400	2550	7.25	7.25	7.25
2600 Head	2550	2700	7.05	7.05	7.05

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
<i>750</i>	<i>41,9</i>	<i>0,89</i>
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
<i>1 500</i>	<i>40,4</i>	<i>1,23</i>
<i>1 640</i>	<i>40,2</i>	<i>1,31</i>
<i>1 750</i>	<i>40,1</i>	<i>1,37</i>
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
<i>2 100</i>	<i>39,8</i>	<i>1,49</i>
<i>2 300</i>	<i>39,5</i>	<i>1,67</i>
2 450	39,2	1,80
<i>2 600</i>	<i>39,0</i>	<i>1,96</i>
3 000	38,5	2,40
<i>3 500</i>	<i>37,9</i>	<i>2,91</i>
<i>4 000</i>	<i>37,4</i>	<i>3,43</i>
<i>4 500</i>	<i>36,8</i>	<i>3,94</i>
<i>5 000</i>	<i>36,2</i>	<i>4,45</i>
<i>5 200</i>	<i>36,0</i>	<i>4,66</i>
<i>5 400</i>	<i>35,8</i>	<i>4,86</i>
<i>5 600</i>	<i>35,5</i>	<i>5,07</i>
<i>5 800</i>	<i>35,3</i>	<i>5,27</i>
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.2	N/A	NCR	NCR
DASY5 Measurement Server	DASY5 6.0.31	N/A	NCR	NCR
Data Acquisition Electronics	DAE4	1354	2021/9/1	2022/8/31
E-Field Probe	EX3DV4	7522	2021/4/19	2022/4/18
Mounting Device	MD4HHTV5	SD 000 H01 KA	NCR	NCR
SAM Twin Phantom	SAM-Twin V5.0	1744	NCR	NCR
Dipole, 750MHz	D750V3	1194	2020/1/13	2023/1/12
Dipole, 1800MHz	D1800V2	2d018	2020/10/15	2023/10/14
Dipole, 1900MHz	D1900V2	5d231	2020/1/14	2023/1/13
Dipole,2450MHz	D2450V2	751	2020/10/13	2023/10/12
Dipole, 2600MHz	D2600V2	1162	2019/10/2	2022/10/1
Simulated Tissue Liquid Head(500-9500MHz)	HBBL600-10000V6	180622-2	Each Time	/
Network Analyzer	8753D	3410A08288	2021/7/07	2022/7/06
Dielectric Assessment Kit	DAK-3.5	1248	NCR	NCR
Signal Generator	SMB100A	108362	2020/12/24	2021/12/23
USB wideband power sensor	U2021XA	MY52350001	2021/7/31	2022/7/30
Pre-Amplifier	PAM-0118	135	2021/01/04	2022/01/03
Directional Coupler	4223-20	3.113.277	2020/12/25	2021/12/24
6dB Attenuator	8493B 6dB Attenuator	2708A 04769	2020/12/25	2021/12/24
Wideband Radio Communication Tester	CMW500	143458	2021/03/03	2022/03/02

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

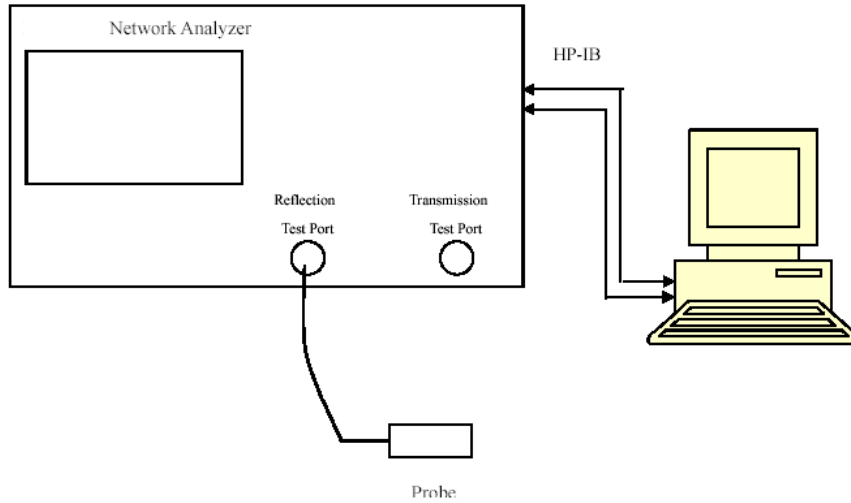

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
713	Simulated Tissue Liquid Head	42.181	0.872	42.1	0.89	0.19	-2.02	± 10
719.5	Simulated Tissue Liquid Head	42.028	0.876	42.06	0.89	-0.08	-1.57	± 10
726	Simulated Tissue Liquid Head	41.998	0.883	42.03	0.89	-0.08	-0.79	± 10
750	Simulated Tissue Liquid Head	41.794	0.888	41.9	0.89	-0.25	-0.22	± 10
824.2	Simulated Tissue Liquid Head	41.725	0.896	41.55	0.9	0.42	-0.44	± 10
826.4	Simulated Tissue Liquid Head	41.655	0.899	41.54	0.9	0.28	-0.11	± 10
829	Simulated Tissue Liquid Head	41.646	0.904	41.53	0.9	0.28	0.44	± 10
836.5	Simulated Tissue Liquid Head	41.629	0.912	41.5	0.9	0.31	1.33	± 10
836.6	Simulated Tissue Liquid Head	41.624	0.919	41.5	0.9	0.3	2.11	± 10
844	Simulated Tissue Liquid Head	41.558	0.926	41.5	0.91	0.14	1.76	± 10
846.6	Simulated Tissue Liquid Head	41.523	0.929	41.5	0.91	0.06	2.09	± 10
848.8	Simulated Tissue Liquid Head	41.335	0.935	41.5	0.91	-0.4	2.75	± 10

*Liquid Verification above was performed on 2021/11/26.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1712.4	Simulated Tissue Liquid Head	40.289	1.324	40.13	1.35	0.4	-1.93	± 10
1720	Simulated Tissue Liquid Head	40.268	1.328	40.13	1.35	0.34	-1.63	± 10
1732.5	Simulated Tissue Liquid Head	40.256	1.346	40.12	1.36	0.34	-1.03	± 10
1732.6	Simulated Tissue Liquid Head	40.194	1.353	40.12	1.36	0.18	-0.51	± 10
1745	Simulated Tissue Liquid Head	40.135	1.361	40.1	1.37	0.09	-0.66	± 10
1750	Simulated Tissue Liquid Head	40.091	1.365	40.1	1.37	-0.02	-0.36	± 10
1752.6	Simulated Tissue Liquid Head	40.083	1.368	40.09	1.37	-0.02	-0.15	± 10
1800	Simulated Tissue Liquid Head	39.056	1.371	40	1.40	-0.06	-0.71	± 10

*Liquid Verification above was performed on 2021/11/26.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
1850.2	Simulated Tissue Liquid Head	40.035	1.375	40	1.4	0.14	-1.79	± 10
1852.4	Simulated Tissue Liquid Head	40.012	1.377	40	1.4	0.03	-1.64	± 10
1860	Simulated Tissue Liquid Head	39.986	1.385	40	1.4	-0.04	-1.07	± 10
1880	Simulated Tissue Liquid Head	39.972	1.391	40	1.4	-0.07	-0.64	± 10
1900	Simulated Tissue Liquid Head	39.841	1.416	40	1.4	-0.4	1.14	± 10
1907.6	Simulated Tissue Liquid Head	39.835	1.423	40	1.4	-0.41	1.64	± 10
1909.8	Simulated Tissue Liquid Head	39.832	1.427	40	1.4	-0.42	1.93	± 10

*Liquid Verification above was performed on 2021/11/25.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2412	Simulated Tissue Liquid Head	39.366	1.742	39.28	1.77	0.22	-1.58	± 10
2437	Simulated Tissue Liquid Head	39.315	1.79	39.23	1.79	0.22	0	± 10
2450	Simulated Tissue Liquid Head	39.206	1.806	39.2	1.8	0.02	0.33	± 10
2462	Simulated Tissue Liquid Head	39.176	1.833	39.18	1.81	-0.01	1.27	± 10
2510	Simulated Tissue Liquid Head	39.166	1.873	39.12	1.86	0.12	0.7	± 10
2535	Simulated Tissue Liquid Head	39.139	1.909	39.09	1.89	0.13	1.01	± 10

*Liquid Verification above was performed on 2021/11/25.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	σ (S/m)	ϵ_r	σ (S/m)	$\Delta\epsilon_r$	$\Delta\sigma$ (S/m)	
2560	Simulated Tissue Liquid Head	39.125	1.944	39.05	1.92	0.19	1.25	± 10
2600	Simulated Tissue Liquid Head	38.927	1.965	39	1.96	-0.19	0.26	± 10

*Liquid Verification above was performed on 2021/11/25.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- a) $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1 \text{ 000 MHz}$;
- b) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1 \text{ 000 MHz} < f \leq 3 \text{ 000 MHz}$;
- c) $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3 \text{ 000 MHz} < f \leq 6 \text{ 000 MHz}$.

System Verification Setup Block Diagram

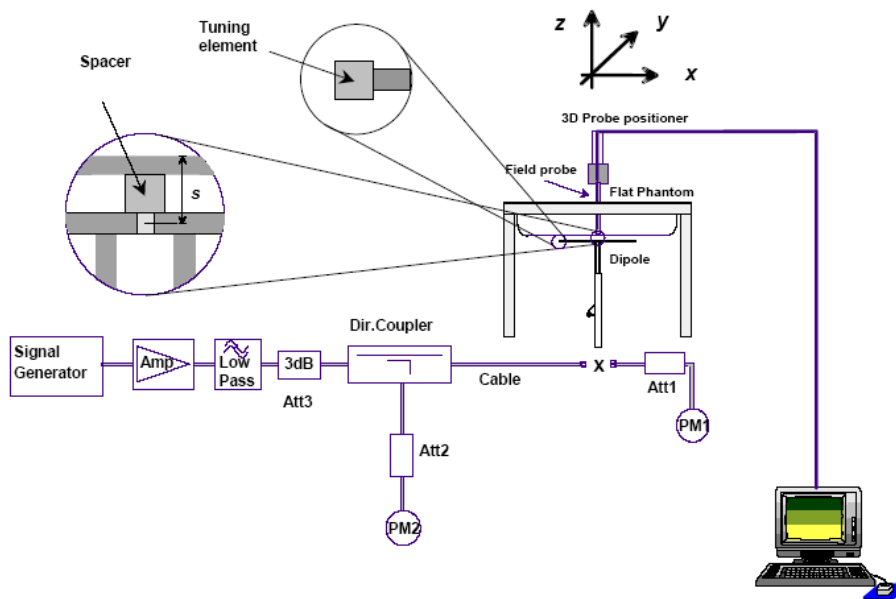

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2021/11/26	750 MHz	Head	100	1g	0.862	8.62	8.55	0.82	± 10
2021/11/26	1800 MHz	Head	100	1g	3.85	38.5	39.3	-2.04	± 10
2021/11/25	1900 MHz	Head	100	1g	3.92	39.2	40.3	-2.73	± 10
2021/11/25	2450 MHz	Head	100	1g	4.99	49.9	53	-5.85	± 10
2021/11/25	2600 MHz	Head	100	1g	5.82	58.2	55.4	5.05	± 10

*The SAR values above are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

System Performance 750 MHz

DUT: D750V3; Type: 750 MHz; Serial: 1167

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.888$ S/m; $\epsilon_r = 41.794$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.93, 9.93, 9.93) @ 750 MHz; Calibrated: 2021/4/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x141x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.65 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.862 W/kg; SAR(10 g) = 0.560 W/kg

Maximum value of SAR (measured) = 1.19 W/kg

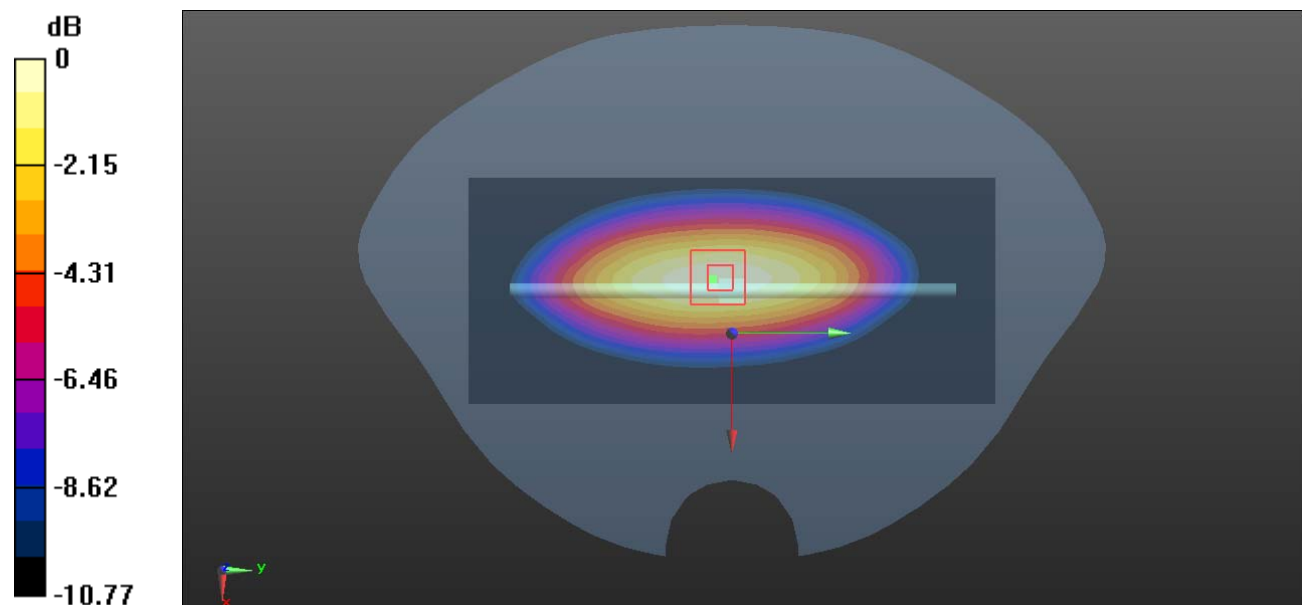

0 dB = 1.19 W/kg = 0.76 dBW/kg

System Performance 1800 MHz**DUT: D1800V2; Type: 1800MHz; Serial: 2d018**

Communication System: CW; Frequency: 1800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.371 \text{ S/m}$; $\epsilon_r = 39.056$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(8.16, 8.16, 8.16) @ 1800 MHz; Calibrated: 2021/4/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 4.41 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.82 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 6.13 W/kg

SAR(1 g) = 3.85 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (measured) = 3.91 W/kg

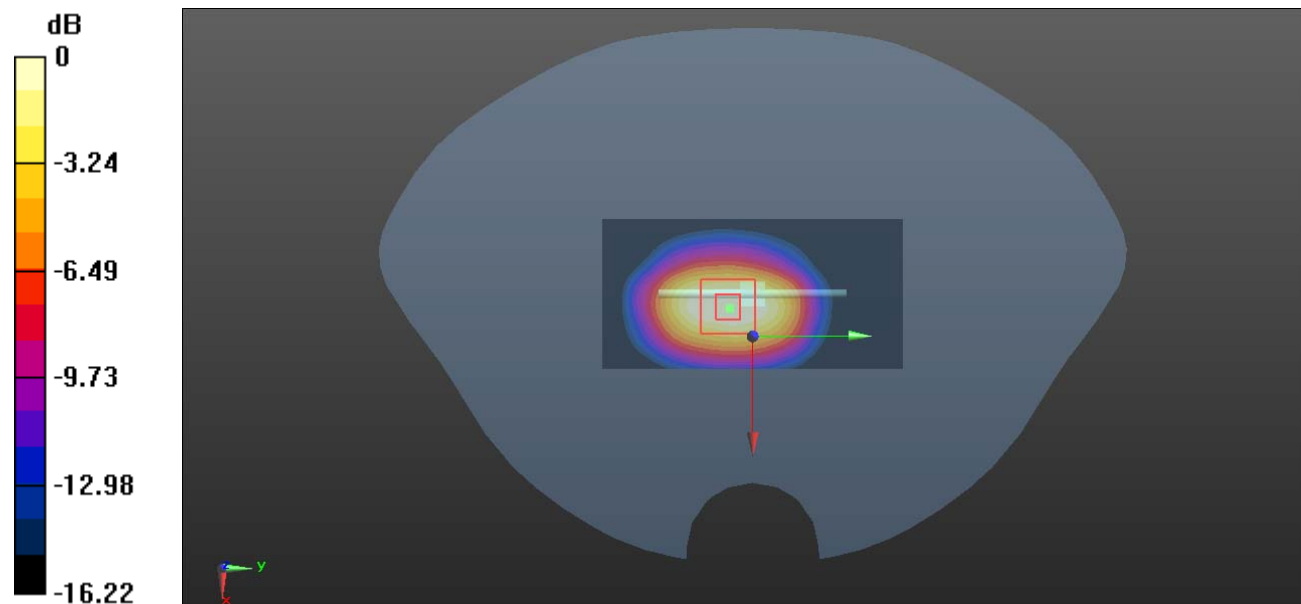

0 dB = 3.91 W/kg = 5.92 dBW/kg

System Performance 1900MHz**DUT: D1900V2; Type: 1900 MHz; Serial: 543**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.416$ S/m; $\epsilon_r = 39.841$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.94, 7.94, 7.94) @ 1900 MHz; Calibrated: 2021/4/19
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.86 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.33 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 6.93 W/kg

SAR(1 g) = 3.92 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 4.24 W/kg

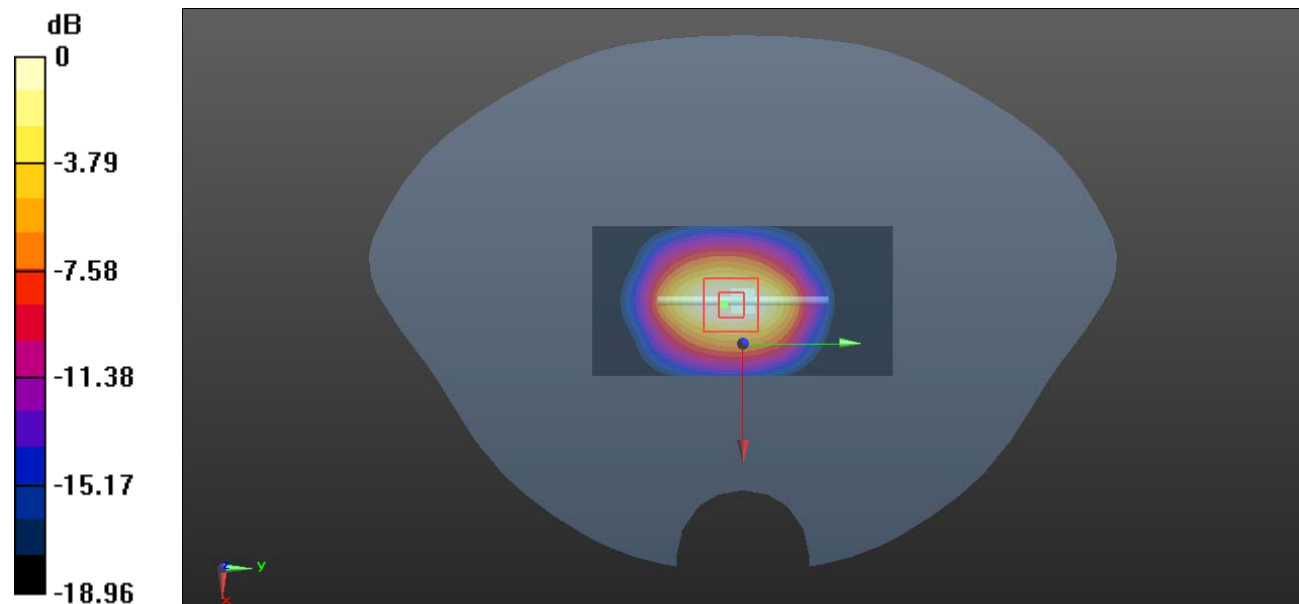

0 dB = 4.24 W/kg = 6.27 dBW/kg

System Performance 2450MHz**DUT: D2450V2; Type: 2450 MHz; Serial: 971**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.806$ S/m; $\epsilon_r = 39.206$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.25, 7.25, 7.25) @ 2450 MHz; Calibrated: 2021/4/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 8.55 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.82 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 10.4 W/kg

SAR(1 g) = 4.99 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 8.05 W/kg

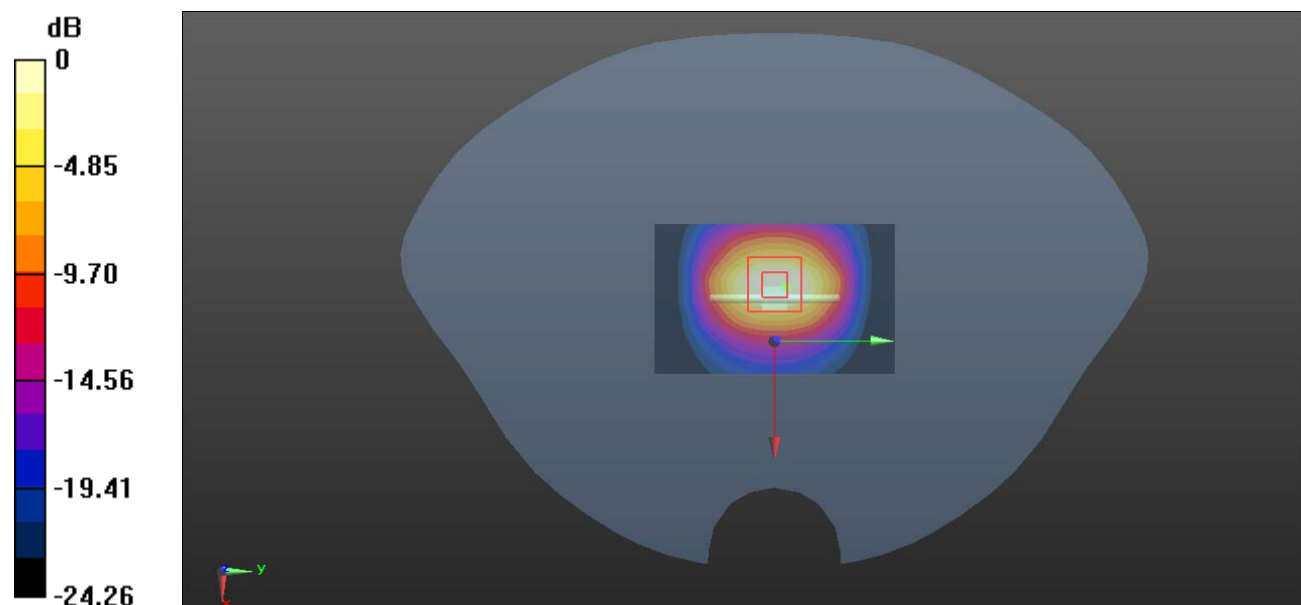

0 dB = 8.05 W/kg = 9.06 dBW/kg

System Performance 2600MHz

DUT: D2600V2; Type: 2600 MHz; Serial: 1132

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.965$ S/m; $\epsilon_r = 38.927$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.05, 7.05, 7.05) @ 2600 MHz; Calibrated: 2021/4/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2021/9/1
- Phantom: Head model; Type: QD000P40CC; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 11.4 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.56 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 13.1 W/kg

SAR(1 g) = 5.82 W/kg; SAR(10 g) = 2.44 W/kg

Maximum value of SAR (measured) = 10.4 W/kg

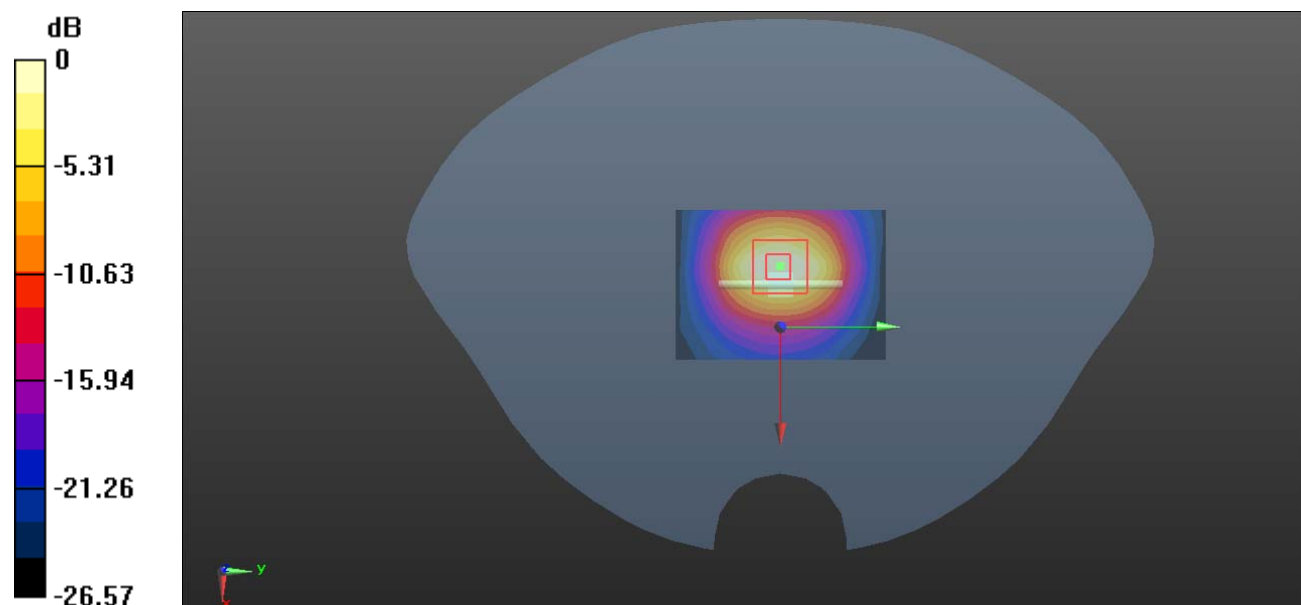


0 dB = 10.4 W/kg = 10.17 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person’s Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

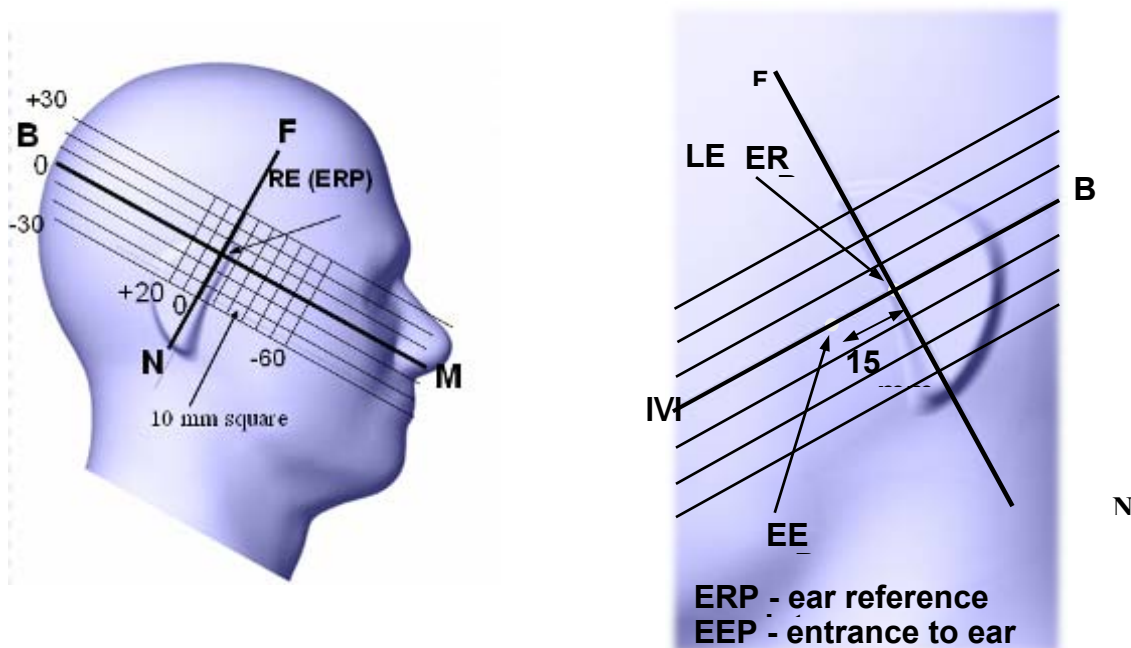

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

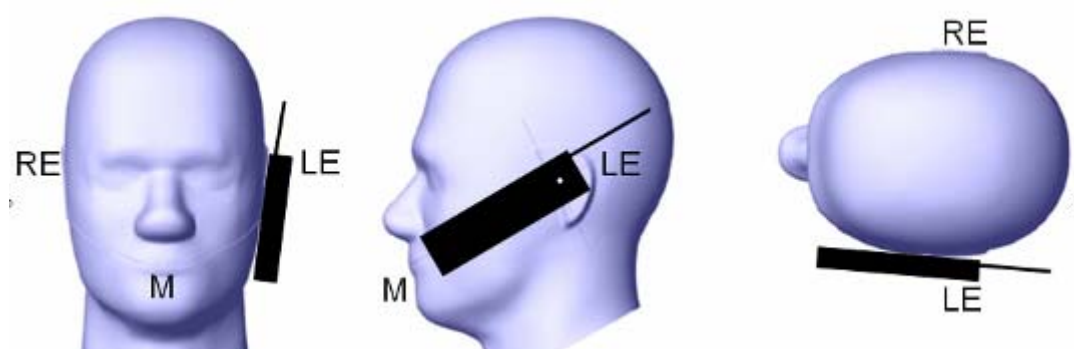

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

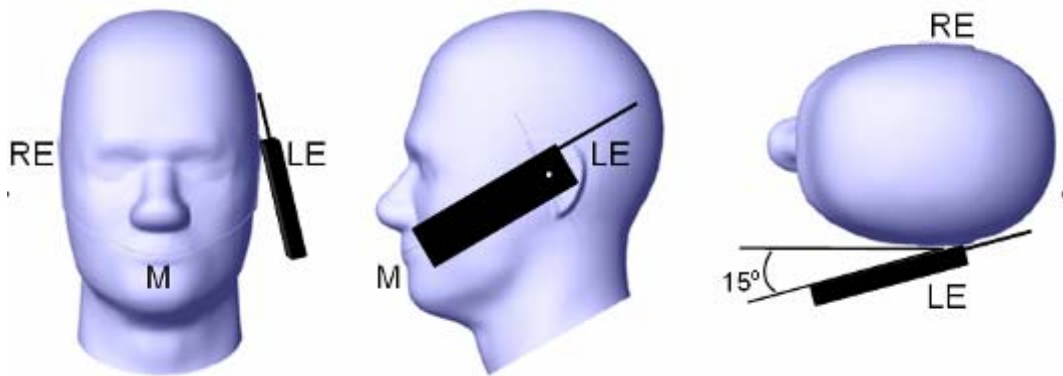

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

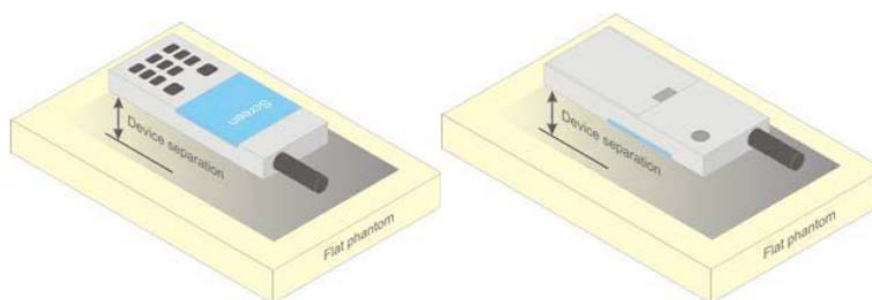


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

In this case the EUT(Equipment Under Test) is set directly against the phantom, the test distance is 0mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through Connector.

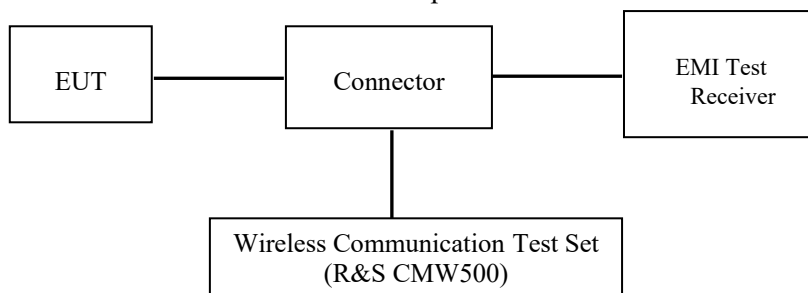

GSM/WCDMA/LTE

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR(dB)	0	0	0.5	0.5	
HSDPA Specifi c Setting s	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
MPR(dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCIs	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	Table 6.2.4-4	
NS_06	6.6.2.2.3	12, 13, 14, 17	10, 15, 20	≥ 50	≤ 1
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	
6.6.3.3.2					
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
				Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
...					
NS_32	-	-	-	-	-

Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM 850	34.1	34.1	34.1
GPRS 1 TX Slot	34	34	34
GPRS 2 TX Slot	31.9	31.9	31.9
GPRS 3 TX Slot	30	30	30
GPRS 4 TX Slot	28.4	28.4	28.4
EDGE 1 TX Slot	28.5	28.5	28.5
EDGE 2 TX Slot	27.1	27.1	27.1
EDGE 3 TX Slot	25	25	25
EDGE 4 TX Slot	23	23	23
PCS 1900	31.6	31.6	31.6
GPRS 1 TX Slot	31.6	31.6	31.6
GPRS 2 TX Slot	29	29	29
GPRS 3 TX Slot	27.1	27.1	27.1
GPRS 4 TX Slot	26.1	26.1	26.1
EDGE 1 TX Slot	27.4	27.4	27.4
EDGE 2 TX Slot	25.5	25.5	25.5
EDGE 3 TX Slot	23.7	23.7	23.7
EDGE 4 TX Slot	22.1	22.1	22.1
WCDMA Band 2	22.8	22.5	22.5
HSDPA	22.7	22.7	22.7
HSUPA	22.8	22.8	22.8
WCDMA Band 4	23	23	23
HSDPA	23	23	23
HSUPA	22.9	22.9	22.9
WCDMA Band 5	23.1	23.1	23.1
HSDPA	23.1	23.1	23.1
HSUPA	22.8	22.8	22.8
LTE Band 2	22.3	22.3	22.3
LTE Band 4	22.5	22.5	22.5
LTE Band 5	22.8	22.8	22.8
LTE Band 7	22.2	22.2	22.2

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
WLAN 2.4G(802.11b)	11.5	11.5	11.5
WLAN 2.4G(802.11g)	11	11	11
WLAN 2.4G(802.11n HT20)	10.6	10.6	10.6
WLAN 2.4G(802.11n HT40)	10.2	10.2	10.2
Wi-Fi 5.2G (802.11a)	6	6	6
Wi-Fi 5.2G (802.11n20)	5.8	5.8	5.8
Wi-Fi 5.2G (802.11n40)	4.9	/	4.9
Wi-Fi 5.2G (802.11ac80)	/	4.6	/
Wi-Fi 5.8G (802.11a)	6	6	6
Wi-Fi 5.8G (802.11n20)	5.9	5.9	5.9
Wi-Fi 5.8G (802.11n40)	5.1	/	5.1
Wi-Fi 5.8G (802.11ac80)	/	4.3	/
BDR(GFSK)	5.5	5.5	5.5
EDR($\pi/4$ -DQPSK)	6.5	6.5	6.5
EDR(8DPSK)	7	7	7
Bluetooth LE_1M	1	1	1
Bluetooth LE_2M	1	1	1

Test Results:**GSM:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)
GSM 850	128	824.2	33.99
	190	836.6	33.58
	251	848.8	34.00
PCS 1900	512	1850.2	30.90
	661	1880	31.22
	810	1909.8	31.54

GPRS:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	33.93	31.70	29.41	28.00
	190	836.6	33.83	31.76	29.87	28.27
	251	848.8	33.93	31.46	29.66	27.99
PCS 1900	512	1850.2	30.85	28.85	26.34	25.80
	661	1880	30.95	28.54	26.97	25.90
	810	1909.8	31.50	28.48	26.76	26.00

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	28.22	26.58	24.85	22.86
	190	836.6	28.29	27.02	24.34	22.84
	251	848.8	28.43	26.80	24.90	22.64
PCS 1900	512	1850.2	26.99	24.89	22.84	21.32
	661	1880	27.10	25.16	23.64	21.96
	810	1909.8	27.28	25.43	23.26	21.67

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	24.93	25.7	25.16	25
	190	836.6	24.83	25.76	25.62	25.27
	251	848.8	24.93	25.46	25.41	24.99
PCS 1900	512	1850.2	21.85	22.85	22.09	22.8
	661	1880	21.95	22.54	22.72	22.9
	810	1909.8	22.5	22.48	22.51	23

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	19.22	20.58	20.6	19.86
	190	836.6	19.29	21.02	20.09	19.84
	251	848.8	19.43	20.8	20.65	19.64
PCS 1900	512	1850.2	17.99	18.89	18.59	18.32
	661	1880	18.1	19.16	19.39	18.96
	810	1909.8	18.28	19.43	19.01	18.67

Note:

1. Rohde & Schwarz Radio Communication Tester (CMW500) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).

WCDMA:
Results (12.2kbps RMC)

Band	Frequency (MHz)	RF Output Power (dBm)
WCDMA Band 2	1852.4	22.73
	1880	22.67
	1907.6	22.55
WCDMA Band 4	1712.4	22.91
	1732.6	22.83
	1752.6	22.87
WCDMA Band 5	826.4	23.01
	836.6	22.92
	846.6	22.97

Results (HSDPA)

Band	Frequency (MHz)	RF Output Power (dBm)			
		Subset 1	Subset 2	Subset 3	Subset 4
WCDMA Band 2	1852.4	22.63	22.24	21.54	21.67
	1880	22.58	22.09	21.78	21.68
	1907.6	22.63	22.00	21.46	21.70
WCDMA Band 4	1712.4	22.61	22.13	21.34	22.00
	1732.6	22.89	22.11	21.34	22.02
	1752.6	22.84	21.86	21.45	21.76
WCDMA Band 5	826.4	22.71	23	22.37	21.83
	836.6	22.96	22.09	22.61	21.13
	846.6	22.90	22.12	21.61	20.98

Results (HSUPA)

Band	Frequency (MHz)	RF Output Power (dBm)				
		Subset 1	Subset 2	Subset 3	Subset 4	Subset 5
WCDMA Band 2	1852.4	22.68	22.14	21.90	21.35	21.11
	1880	22.72	22.44	21.75	21.16	21.19
	1907.6	22.57	22.21	21.72	21.28	21.92
WCDMA Band 4	1712.4	22.78	22.39	21.53	21.57	21.23
	1732.6	22.51	22.21	21.80	21.49	22.00
	1752.6	22.47	22.25	21.69	21.29	22.10
WCDMA Band 5	826.4	22.71	22.24	21.96	21.28	21.89
	836.6	22.48	22.35	21.81	21.46	21.95
	846.6	22.41	22.42	21.76	21.35	21.99

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is $< 75\%$ of SAR limit.

LTE Band 2:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	21.98	22.08	21.89
		RB1#3	0	0	22.04	22.14	21.85
		RB1#5	0	0	21.96	22.04	21.88
		RB3#0	1	1	22.27	22.07	21.99
		RB3#3	1	1	22.11	21.97	21.95
		RB6#0	1	1	21.14	20.76	20.94
	16-QAM	RB1#0	1	1	20.96	21.22	21.61
		RB1#3	1	1	20.88	21.25	21.58
		RB1#5	2	2	20.93	21.29	21.63
		RB3#0	2	2	21.17	20.84	20.81
		RB3#3	2	2	21.16	20.99	20.85
		RB6#0	2	2	20.39	19.97	20.07
3M	QPSK	RB1#0	0	0	22.01	21.88	21.81
		RB1#8	0	0	21.94	21.96	21.78
		RB1#14	0	0	21.83	21.98	21.9
		RB6#0	1	1	20.97	20.95	20.88
		RB6#9	1	1	20.91	20.95	20.86
		RB15#0	1	1	20.97	20.98	20.9
	16-QAM	RB1#0	1	1	21.36	21.35	20.54
		RB1#8	1	1	21.23	21.56	20.58
		RB1#14	1	1	21.09	21.42	20.66
		RB6#0	2	2	20.38	20.1	20.16
		RB6#9	2	2	20.51	20.19	20.04
		RB15#0	2	2	20.09	19.83	19.91
5M	QPSK	RB1#0	0	0	22.07	21.94	21.77
		RB1#13	0	0	21.77	21.96	21.67
		RB1#24	0	0	21.75	21.94	21.78
		RB15#0	1	1	21.08	20.85	20.72
		RB15#10	1	1	21.05	21.04	21.01
		RB25#0	1	1	20.91	20.95	20.8
	16-QAM	RB1#0	1	1	20.31	21.04	20.44
		RB1#13	1	1	20.23	21.07	20.51
		RB1#24	1	1	20.17	21.13	20.54
		RB15#0	2	2	20.24	19.8	19.98
		RB15#10	2	2	20.31	19.92	19.88
		RB25#0	2	2	20.41	19.98	19.85

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	21.93	21.84	21.9
		RB1#25	0	0	21.77	21.95	21.9
		RB1#49	1	1	21.99	22.12	21.88
		RB25#0	1	1	20.87	20.94	20.82
		RB25#25	1	1	21.15	20.98	20.86
		RB50#0	1	1	20.95	20.92	20.94
	16-QAM	RB1#0	1	1	21.5	21.01	20.34
		RB1#25	1	1	21.23	20.95	20.36
		RB1#49	1	1	21.3	21.05	20.42
		RB25#0	2	2	20.39	20.23	20
		RB25#25	2	2	20.03	20.18	20.09
		RB50#0	2	2	20.02	20.04	19.91
15M	QPSK	RB1#0	0	0	21.95	21.91	21.97
		RB1#38	0	0	21.89	22	21.99
		RB1#74	1	1	21.95	22.13	22.01
		RB36#0	1	1	20.94	20.94	20.78
		RB36#39	1	1	21.05	21.15	20.75
		RB75#0	1	1	20.98	21.09	20.9
	16-QAM	RB1#0	1	1	21.41	21.09	20.94
		RB1#38	1	1	21.34	21.13	21
		RB1#74	2	2	21.34	21.03	21.14
		RB36#0	2	2	20.05	20.13	20.07
		RB36#39	2	2	19.93	20.07	20.1
		RB75#0	2	2	19.98	19.93	20.11
20M	QPSK	RB1#0	0	0	22.16	21.98	21.97
		RB1#50	0	0	22.1	21.98	21.86
		RB1#99	0	0	22.19	22.09	22.15
		RB50#0	1	1	21.13	20.99	20.99
		RB50#50	1	1	21.45	21.31	21.26
		RB100#0	1	1	20.93	20.98	20.96
	16-QAM	RB1#0	1	1	21.12	20.98	21.72
		RB1#50	1	1	21.1	20.93	21.71
		RB1#99	2	2	21.21	20.92	21.73
		RB50#0	2	2	20.13	20.01	20.42
		RB50#50	2	2	20.1	20.06	19.97
		RB100#0	2	2	20.12	19.86	19.91

LTE Band 4:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	22.04	22.01	22.26
		RB1#3	0	0	21.97	22.01	22.15
		RB1#5	0	0	22.12	21.99	22.21
		RB3#0	1	1	22.14	22.25	22.08
		RB3#3	1	1	22.14	22.18	22.09
		RB6#0	1	1	21.12	21.1	20.95
	16-QAM	RB1#0	1	1	21.79	20.79	22.12
		RB1#3	1	1	21.79	20.85	22
		RB1#5	2	2	21.8	21.02	22.11
		RB3#0	2	2	21.15	21.28	21.36
		RB3#3	2	2	21.17	21.28	21.25
		RB6#0	2	2	20.33	20.44	20.7
3M	QPSK	RB1#0	0	0	21.99	22.09	22.29
		RB1#8	0	0	22.14	22.14	22.29
		RB1#14	0	0	22.03	22.13	22.19
		RB6#0	1	1	21.09	21.1	21.15
		RB6#9	1	1	21.1	21.14	21.08
		RB15#0	1	1	21.07	21.07	21.2
	16-QAM	RB1#0	1	1	21.39	21.71	21.12
		RB1#8	1	1	21.4	21.87	21.11
		RB1#14	1	1	21.49	21.78	21.1
		RB6#0	2	2	20.18	20.12	20.48
		RB6#9	2	2	20.11	20.28	20.85
		RB15#0	2	2	20.26	20.15	20.36
5M	QPSK	RB1#0	0	0	22.16	22.07	21.96
		RB1#13	0	0	22.11	22.3	22.1
		RB1#24	0	0	21.99	22.28	22.03
		RB15#0	1	1	21.16	21.18	21.26
		RB15#10	1	1	21.07	21.19	21.09
		RB25#0	1	1	21.21	21.11	21.2
	16-QAM	RB1#0	1	1	20.32	21.32	20.77
		RB1#13	1	1	20.3	21.29	20.76
		RB1#24	1	1	20.31	21.48	20.81
		RB15#0	2	2	20.23	20.03	20.26
		RB15#10	2	2	20.33	20.03	20.23
		RB25#0	2	2	20.27	20.07	20.07

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	22.02	22.24	22.32
		RB1#25	0	0	22.12	22.32	22.3
		RB1#49	1	1	22.05	22.28	22.36
		RB25#0	1	1	21.04	21.02	21.21
		RB25#25	1	1	21.24	21.32	21.01
		RB50#0	1	1	21.12	21.05	21.39
	16-QAM	RB1#0	1	1	21.23	21.29	20.6
		RB1#25	1	1	21.42	21.32	20.77
		RB1#49	1	1	21.36	21.29	20.73
		RB25#0	2	2	20.16	20.34	20.74
		RB25#25	2	2	20.24	20.3	20.26
		RB50#0	2	2	20.38	20.25	20.19
15M	QPSK	RB1#0	0	0	22.02	22.18	22.33
		RB1#38	0	0	22.11	22.19	22.19
		RB1#74	1	1	22.02	22.3	22.26
		RB36#0	1	1	21.26	21.15	21.21
		RB36#39	1	1	21.04	21.19	21.15
		RB75#0	1	1	21.23	21.01	21.24
	16-QAM	RB1#0	1	1	21.33	21.31	21.52
		RB1#38	1	1	21.41	21.21	21.45
		RB1#74	2	2	21.33	21.33	21.42
		RB36#0	2	2	20.45	20.34	20.61
		RB36#39	2	2	20.14	20.32	20.35
		RB75#0	2	2	20.27	20.27	20.65
20M	QPSK	RB1#0	0	0	22.03	22.03	22.34
		RB1#50	0	0	22.28	22.05	22.39
		RB1#99	0	0	22.35	22.39	22.41
		RB50#0	1	1	21.08	21.09	21.24
		RB50#50	1	1	21.24	22.28	21.31
		RB100#0	1	1	21.18	21.21	21.03
	16-QAM	RB1#0	1	1	21.22	21.4	20.71
		RB1#50	1	1	21.26	21.57	20.56
		RB1#99	2	2	21.35	21.69	20.65
		RB50#0	2	2	20.37	20.22	20.2
		RB50#50	2	2	20.34	20.17	20.41
		RB100#0	2	2	20.3	20.24	20.59

LTE Band 5:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	RB1#0	0	0	22.48	22.36	22.46
		RB1#3	0	0	22.39	22.58	22.36
		RB1#5	0	0	22.5	22.4	22.29
		RB3#0	1	1	22.61	22.61	22.52
		RB3#3	1	1	22.38	22.58	22.57
		RB6#0	1	1	21.42	21.72	21.42
	16-QAM	RB1#0	1	1	21.88	22.22	21.37
		RB1#3	1	1	22	22.1	21.11
		RB1#5	2	2	21.85	22.11	21.18
		RB3#0	2	2	21.46	21.53	21.87
		RB3#3	2	2	21.31	21.43	21.46
		RB6#0	2	2	20.53	20.72	20.95
3M	QPSK	RB1#0	0	0	22.31	22.5	22.44
		RB1#8	0	0	22.36	22.4	22.54
		RB1#14	1	1	22.46	22.48	22.33
		RB6#0	1	1	21.46	21.53	21.8
		RB6#9	1	1	21.85	21.7	21.48
		RB15#0	1	1	21.45	21.59	21.69
	16-QAM	RB1#0	1	1	21.5	22.12	21.4
		RB1#8	1	1	21.32	22.21	21.29
		RB1#14	2	2	21.73	22.26	21.1
		RB6#0	2	2	20.63	20.76	21.05
		RB6#9	2	2	20.79	20.56	20.96
		RB15#0	2	2	20.7	20.67	20.79
5M	QPSK	RB1#0	0	0	22.36	22.43	22.43
		RB1#13	0	0	22.4	22.56	22.42
		RB1#24	0	0	22.39	22.38	22.48
		RB15#0	1	1	21.41	21.35	21.51
		RB15#10	1	1	21.63	21.73	21.77
		RB25#0	1	1	21.66	21.75	21.75
	16-QAM	RB1#0	1	1	20.49	21.61	21.05
		RB1#13	1	1	20.72	21.74	21.21
		RB1#24	1	1	20.6	21.6	21.12
		RB15#0	2	2	20.64	20.62	20.8
		RB15#10	2	2	20.82	20.5	20.8
		RB25#0	2	2	20.74	20.57	20.67

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10M	QPSK	RB1#0	0	0	22.58	22.48	22.41
		RB1#25	0	0	22.41	22.69	22.51
		RB1#49	1	1	22.48	22.64	22.37
		RB25#0	1	1	21.71	21.39	21.6
		RB25#25	1	1	21.5	21.87	21.84
		RB50#0	1	1	21.39	21.7	21.3
	16-QAM	RB1#0	1	1	21.65	21.55	21.05
		RB1#25	1	1	21.66	21.67	20.98
		RB1#49	2	2	21.77	21.8	20.93
		RB25#0	2	2	20.62	20.76	20.8
		RB25#25	2	2	20.85	20.64	20.98
		RB50#0	2	2	20.66	20.74	20.85

LTE Band 7:

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	RB1#0	0	0	22	21.8	21.75
		RB1#13	0	0	21.84	21.8	21.61
		RB1#24	0	0	21.92	21.74	21.67
		RB15#0	1	1	20.97	20.82	20.78
		RB15#10	1	1	20.87	20.92	20.79
		RB25#0	1	1	20.98	20.74	20.87
	16-QAM	RB1#0	1	1	20.1	20.78	20.61
		RB1#13	1	1	20.13	21.06	20.35
		RB1#24	1	1	20.08	20.79	20.5
		RB15#0	2	2	19.9	19.83	19.87
		RB15#10	2	2	20.45	19.83	19.97
		RB25#0	2	2	20.4	19.96	19.88
10M	QPSK	RB1#0	0	0	21.7	21.81	21.96
		RB1#25	0	0	21.75	21.83	22.15
		RB1#49	1	1	21.86	21.86	21.91
		RB25#0	1	1	20.81	20.81	20.85
		RB25#25	1	1	21.01	20.77	20.85
		RB50#0	1	1	20.91	20.83	21.08
	16-QAM	RB1#0	1	1	20.99	21.12	20.38
		RB1#25	1	1	21.02	21	20.44
		RB1#49	2	2	21.03	20.97	20.36
		RB25#0	2	2	20.33	20.5	19.91
		RB25#25	2	2	20.08	19.98	20.08
		RB50#0	2	2	20.09	20.14	20.16
15M	QPSK	RB1#0	0	0	21.79	21.87	21.77
		RB1#38	0	0	21.88	21.75	21.73
		RB1#74	1	1	21.93	21.77	21.84
		RB36#0	1	1	20.81	20.69	20.77
		RB36#39	1	1	20.88	20.81	20.86
		RB75#0	1	1	20.89	20.92	20.81
	16-QAM	RB1#0	1	1	21.26	21.14	21.24
		RB1#38	1	1	21.33	21.23	21.58
		RB1#74	2	2	21.35	21.15	21.54
		RB36#0	2	2	19.95	20.04	19.81
		RB36#39	2	2	20.04	20.01	19.82
		RB75#0	2	2	19.97	19.99	19.78

Test Bandwidth	Test Modulation	Resource Block & RB offset	Target MPR	Meas MPR	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20M	QPSK	RB1#0	0	0	21.85	21.98	21.92
		RB1#50	0	0	21.99	21.94	21.95
		RB1#99	0	0	21.93	21.89	21.87
		RB50#0	1	1	20.96	21.44	21
		RB50#50	1	1	20.72	20.77	20.99
		RB100#0	1	1	20.74	20.93	20.79
	16-QAM	RB1#0	1	1	20.8	21.49	21.03
		RB1#50	1	1	20.8	21.54	21
		RB1#99	2	2	20.72	21.54	21.12
		RB50#0	2	2	19.96	20.01	19.92
		RB50#50	2	2	20.05	19.85	20.1
		RB100#0	2	2	19.81	19.97	19.84

WLAN 2.4G:

Mode	Channel frequency (MHz)	Data Rate	RF Output Power (dBm)
802.11b	2412	1Mbps	10.92
	2437		11.02
	2462		11.31
802.11g	2412	6Mbps	10.96
	2437		10.46
	2462		10.41
802.11n HT20	2412	MCS0	10.12
	2437		9.36
	2462		10.53
802.11n HT40	2422	MCS0	9.96
	2437		9.36
	2452		10.07

WLAN 5.2G:

Mode	Channel frequency (MHz)	Data Rate	RF Output Power (dBm)
802.11a	5180	6Mbps	5.83
	5200		5.97
	5240		5.64
802.11n20	5180	MCS0	5.30
	5200		5.73
	5240		5.18
802.11n40	5190	MCS0	4.76
	5230		4.40
802.11ac80	5210	MCS0	4.50

WLAN 5.8G:


Mode	Channel frequency (MHz)	Data Rate	RF Output Power (dBm)
802.11a	5745	6Mbps	5.85
	5785		5.93
	5825		5.48
802.11n20	5745	MCS0	5.82
	5785		5.69
	5825		5.28
802.11n40	5755	MCS0	4.97
	5795		4.46
802.11ac80	5775	MCS0	4.21

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	3.32
	2441	4.79
	2480	5.29
EDR($\pi/4$ -DQPSK)	2402	4.97
	2441	5.85
	2480	6.39
EDR(8DPSK)	2402	5.18
	2441	6.23
	2480	6.77
BLE_1M	2402	-1.94
	2440	0.92
	2480	0.73
BLE_2M	2402	-2.08
	2440	0.84
	2480	0.65

Standalone SAR test exclusion considerations

Antennas Location:

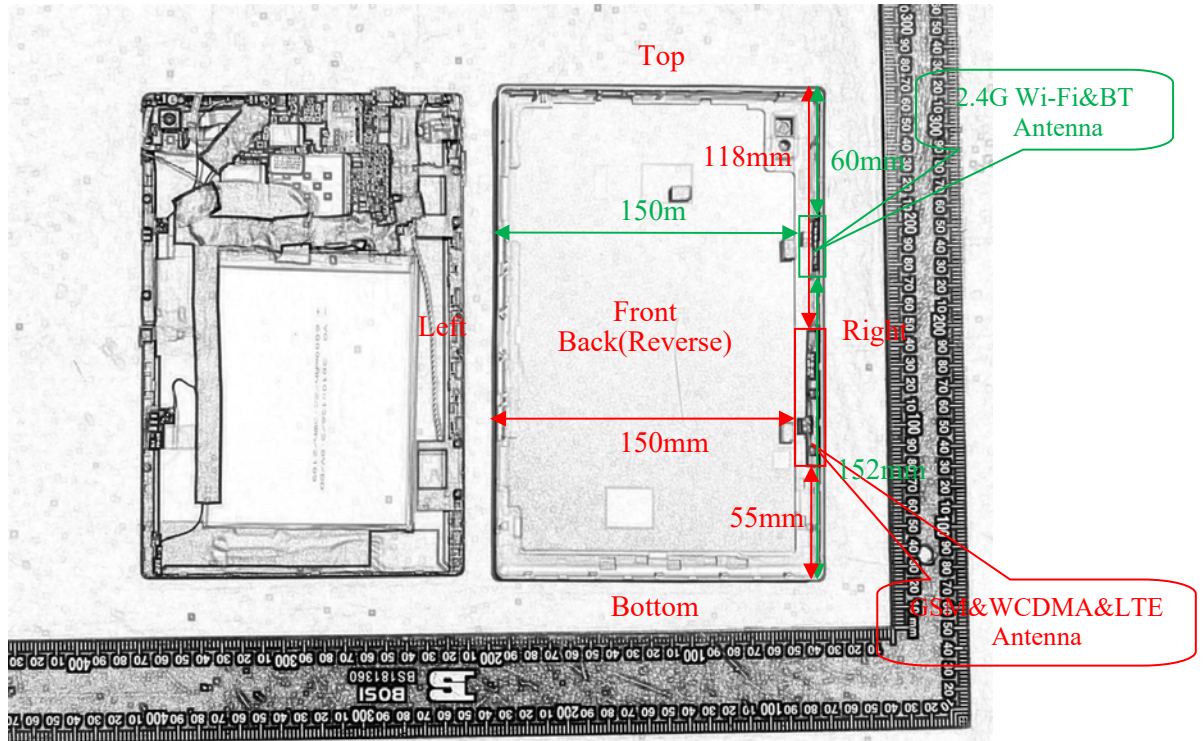

Note: 1. EUT was tested with a plastic case.

Antenna Distance To Edge

Antenna Distance To Edge(mm)					
Antenna	Back	Left	Right	Top	Bottom
WWAN Antenna(GSM/WCDMA/LTE)	< 5	150	<5	118	55
2.4G/5G Wi-Fi/BT Antenna	< 5	150	<5	60	152

Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
2.4G WLAN	2462	11.5	14.13	0	4.4	3	NO
5.2G WLAN	5240	6	3.98	0	1.8	3	YES
5.8G WLAN	5825	6	3.98	0	1.9	3	YES
BT	2480	7	5.01	0	1.6	3	YES

Note: The bluetooth based peak power for calculation, and Wi-Fi based average power for calculation.

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Standalone SAR estimation:

Mode	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Distance (mm)	Estimated 1-g (W/kg)
5.2G WLAN Body	5240	6	3.98	0	0.24
5.8G WLAN Body	5825	6	3.98	0	0.26
BT Body	2480	7	5.01	0	0.21

Note: The bluetooth based peak power for calculation, and Wi-Fi based average power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot \left[\sqrt{f(\text{GHz})/x} \right]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Standalone SAR test exclusion considerations:

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Test exclusion Threshold (mm)
GSM 850	848.8	25.9	389	90
PCS1900	1909.8	23.1	204.2	59.6
WCDMA Band 2	1907.6	22.8	190.5	58.2
WCDMA Band 4	1752.6	23	199.5	58.7
WCDMA Band 5	846.6	23.1	204.2	57.3
LTE Band 2	1900	22.3	169.8	56.1
LTE Band 4	1745	22.5	177.8	56.5
LTE Band 5	844	22.8	190.5	54.9
LTE Band 7	2560	22.2	166	57.3
Wi-Fi 2.4G	2462	11.5	14.1	7.4

Note: The maximum time based average power is used for calculation.

SAR test exclusion for the EUT edge considerations Result

Antenna Distance To Edge(mm)					
Mode	Back	Left	Right	Top	Bottom
BT/Wi-Fi 5G	Exclusion*	Exclusion*	Exclusion*	Exclusion*	Exclusion*
Wi-Fi 2.4G	Required	Exclusion	Required	Exclusion	Exclusion
WWAN(GSM/WCDMA/LTE)	Required	Exclusion	Required	Exclusion	Required

Note:

Required: The distance is less than **Test Exclusion Distance**, the SAR test is required.

Exclusion: The distance is large than **Test Exclusion Distance**, SAR test is not required.

Exclusion*: SAR test exclusion evaluation has been done above.

SAR test exclusion for the EUT edge considerations detail:**Distance < 50mm (To Edges)**

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Distance > 50mm (To Edges)

At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

a. $[\text{Power allowed at numeric threshold for 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot (f(\text{MHz})/150)$ mW, at 100 MHz to 1500 MHz

b. $[\text{Power allowed at numeric threshold for 50 mm in step 1}] + (\text{test separation distance} - 50 \text{ mm}) \cdot 10$ mW at > 1500 MHz and ≤ 6 GHz.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	22.5-23.7 °C	22.3-23.6 °C
Relative Humidity:	45-53%	44-68 %
ATM Pressure:	101.7 kPa	101.2 kPa
Test Date:	2021/11/25	2021/11/26

Testing was performed by Seven Liang, Jacky Yang, Fake ou.

GSM 850 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Worn Back (0mm)	824.2	GSM	/	/	/	/	/	/
	836.6	GSM	33.58	34.1	1.127	0.412	0.46	1#
	848.8	GSM	/	/	/	/	/	/
Body Back (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	31.76	31.9	1.033	0.495	0.51	2#
	848.8	GPRS	/	/	/	/	/	/
Body Right (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	31.76	31.9	1.033	0.324	0.33	3#
	848.8	GPRS	/	/	/	/	/	/
Body Bottom (0mm)	824.2	GPRS	/	/	/	/	/	/
	836.6	GPRS	31.76	31.9	1.033	<0.01	0.01	/
	848.8	GPRS	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is $> 0.5\text{ dB}$, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.
6. For modes that peak SAR is too low to evaluate, a SAR value 0.01W/kg is considered as their Scaled SAR.
7. EUT was tested with a plastic case.

PCS 1900 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Worn Back (0mm)	1850.2	GSM	/	/	/	/	/	/
	1880	GSM	31.22	31.6	1.091	0.583	0.64	4#
	1909.8	GSM	/	/	/	/	/	/
Body Back (0mm)	1850.2	GPRS	25.2	26.1	1.23	0.866	1.07	5#
	1880	GPRS	25.9	26.1	1.047	0.807	0.84	6#
	1909.8	GPRS	26	26.1	1.023	0.764	0.78	7#
Body Right (0mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	25.9	26.1	1.047	0.259	0.27	8#
	1909.8	GPRS	/	/	/	/	/	/
Body Bottom (0mm)	1850.2	GPRS	/	/	/	/	/	/
	1880	GPRS	25.9	26.1	1.047	0.051	0.05	9#
	1909.8	GPRS	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is $> 0.5\text{ dB}$, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
6. EUT was tested with a plastic case.

WCDMA Band 2 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.67	22.8	1.03	0.766	0.79	10#
	1907.6	RMC	/	/	/	/	/	/
Body Right (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.67	22.8	1.03	0.215	0.22	11#
	1907.6	RMC	/	/	/	/	/	/
Body Bottom (0mm)	1852.4	RMC	/	/	/	/	/	/
	1880	RMC	22.67	22.8	1.03	0.042	0.04	12#
	1907.6	RMC	/	/	/	/	/	/

WCDMA Band 4 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	1712.4	RMC	22.91	23	1.021	0.922	0.94	13#
	1732.6	RMC	22.83	23	1.04	0.965	1	14#
	1752.6	RMC	22.87	23	1.03	0.997	1.03	15#
Body Right (0mm)	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	22.83	23	1.04	0.367	0.38	16#
	1752.6	RMC	/	/	/	/	/	/
Body Bottom (0mm)	1712.4	RMC	/	/	/	/	/	/
	1732.6	RMC	22.83	23	1.04	0.024	0.02	17#
	1752.6	RMC	/	/	/	/	/	/

WCDMA Band 5 :

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.92	23.1	1.042	0.107	0.11	18#
	846.6	RMC	/	/	/	/	/	/
Body Right (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.92	23.1	1.042	0.103	0.11	19#
	846.6	RMC	/	/	/	/	/	/
Body Bottom (0mm)	826.4	RMC	/	/	/	/	/	/
	836.6	RMC	22.92	23.1	1.042	<0.01	0.01	/
	846.6	RMC	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than $\frac{1}{4}$ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is $< 75\%$ of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
6. For modes that peak SAR is too low to evaluate, a SAR value 0.01W/kg is considered as their Scaled SAR.
7. EUT was tested with a plastic case.

LTE Band 2 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	1860	20	1RB	22.19	22.3	1.026	0.992	1.02	20#
	1880	20	1RB	22.09	22.3	1.05	1.02	1.07	21#
	1900	20	1RB	22.15	22.3	1.035	1.04	1.08	22#
	1860	20	50%RB	21.45	22.3	1.216	0.815	1.02	23#
	1880	20	50%RB	21.31	22.3	1.256	0.848	1.07	24#
	1900	20	50%RB	21.26	22.3	1.271	0.674	0.86	25#
	1880	20	100%RB	20.98	22.3	1.355	0.58	0.79	26#
Body Right (0mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	22.09	22.3	1.05	0.353	0.37	27#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.31	22.3	1.256	0.333	0.42	28#
Body Bottom (0mm)	1860	20	1RB	/	/	/	/	/	/
	1880	20	1RB	22.09	22.3	1.05	0.056	0.06	29#
	1900	20	1RB	/	/	/	/	/	/
	1880	20	50%RB	21.31	22.3	1.256	0.046	0.06	30#

LTE Band 4 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	1720	20	1RB	22.35	22.5	1.035	0.945	0.98	31#
	1732.5	20	1RB	22.39	22.5	1.026	0.968	0.99	32#
	1745	20	1RB	22.41	22.5	1.021	1	1.02	33#
	1732.5	20	50%RB	22.28	22.5	1.052	0.755	0.79	34#
Body Right (0mm)	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.39	22.5	1.026	0.52	0.53	35#
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.28	22.5	1.052	0.414	0.44	36#
Body Bottom (0mm)	1720	20	1RB	/	/	/	/	/	/
	1732.5	20	1RB	22.39	22.5	1.026	0.051	0.05	37#
	1745	20	1RB	/	/	/	/	/	/
	1732.5	20	50%RB	22.28	22.5	1.052	0.043	0.05	38#

LTE Band 5 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	22.69	22.8	1.026	0.203	0.21	39#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.87	22.8	1.239	0.152	0.19	40#
Body Right (0mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	22.69	22.8	1.026	0.149	0.15	41#
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.87	22.8	1.239	0.106	0.13	42#
Body Bottom (0mm)	829	10	1RB	/	/	/	/	/	/
	836.5	10	1RB	22.69	22.8	1.026	<0.01	0.01	/
	844	10	1RB	/	/	/	/	/	/
	836.5	10	50%RB	21.87	22.8	1.239	<0.01	0.01	/

LTE Band 7 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	2510	20	1RB	21.99	22.2	1.05	1.09	1.14	43#
	2535	20	1RB	21.94	22.2	1.062	0.862	0.92	44#
	2560	20	1RB	21.95	22.2	1.059	0.85	0.9	45#
	2535	20	50%RB	21.44	22.2	1.191	0.667	0.79	46#
Body Right (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.94	22.2	1.062	0.686	0.73	47#
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.44	22.2	1.191	0.564	0.67	48#
Body Bottom (0mm)	2510	20	1RB	/	/	/	/	/	/
	2535	20	1RB	21.94	22.2	1.062	<0.01	0.01	/
	2560	20	1RB	/	/	/	/	/	/
	2535	20	50%RB	21.44	22.2	1.191	<0.01	0.01	/

Note:

1. When the 1-g SAR is ≤ 0.8 W/Kg, testing for other channels are optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg

4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is <1.45 W/kg, tests for the remaining required test channels are optional.
- 5.KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
8. Worst case SAR for 50% RB allocation is selected to be tested.
9. For modes that peak SAR is too low to evaluate, a SAR value 0.01W/kg is considered as their Scaled SAR.
10. EUT was tested with a plastic case.

WLAN 2.4G:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	1g SAR (W/kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body Back (0mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	11.02	11.5	1.117	0.349	0.39	49#
	2462	802.11b	/	/	/	/	/	/
Body Right (0mm)	2412	802.11b	/	/	/	/	/	/
	2437	802.11b	11.02	11.5	1.117	0.232	0.26	50#
	2462	802.11b	/	/	/	/	/	/

Note:

1. When the 1-g SAR is ≤ 0.8 W/kg, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For modes that peak SAR is too low to evaluate, a SAR value 0.01W/kg is considered as their Scaled SAR.
4. KDB 248227 D01-SAR measurement is not required for 2.4 GHz OFDM(801.11g/n) when the highest reported SAR for DSSS(802.11b) is ≤ 1.2 W/kg, and the output power for DSSS is not less than that for OFDM.
5. EUT was tested with a plastic case.

SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Body

SAR probe calibration point	Frequency Band	Freq.(MHz)	EUT Position	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio
				Original	Repeated	
1800MHz (1650-1850MHz)	WCDMA Band 4	1745	Body Back	1.03	0.998	1.03
1900MHz (1850-2000MHz)	LTE Band 2	1900	Body Back	1.08	1.03	1.05
2450MHz (2400-2550MHz)	LTE Band 7	2510	Body Back	1.14	1.09	1.05

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements..

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(GSM/WCDMA/LTE) + Bluetooth	√	×
WWAN(GSM/WCDMA/LTE) + WLAN	√	√
WLAN + Bluetooth	×	×

Note:

KDB616217 D04- The standalone and simultaneous transmission SAR tests required for tablets are more conservative than the hotspot mode use configurations; therefore, additional testing for hotspot SAR is not required.

Simultaneous and Hotspot SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+Bluetooth	Body Worn Back	0.46	0.21	0.67
	Body Back	0.51	0.21	0.72
	Body Right	0.33	0.21	0.54
	Body Bottom	0.01	0.21	0.22
PCS 1900+ Bluetooth	Body Worn Back	0.64	0.21	0.85
	Body Back	1.07	0.21	1.28
	Body Right	0.27	0.21	0.48
	Body Bottom	0.05	0.21	0.26
WCDMA Band 2+ Bluetooth	Body Back	0.79	0.21	1
	Body Right	0.22	0.21	0.43
	Body Bottom	0.04	0.21	0.25
WCDMA Band 2+ Bluetooth	Body Back	1.03	0.21	1.24
	Body Right	0.38	0.21	0.59
	Body Bottom	0.02	0.21	0.23
WCDMA Band 5+ Bluetooth	Body Back	0.11	0.21	0.32
	Body Right	0.11	0.21	0.32
	Body Bottom	0.01	0.21	0.22
LTE Band 2 + Bluetooth	Body Back	1.08	0.21	1.29
	Body Right	0.42	0.21	0.63
	Body Bottom	0.06	0.21	0.27
LTE Band 4 + Bluetooth	Body Back	1.02	0.21	1.23
	Body Right	0.53	0.21	0.74
	Body Bottom	0.05	0.21	0.26
LTE Band 5 + Bluetooth	Body Back	0.21	0.21	0.42
	Body Right	0.15	0.21	0.36
	Body Bottom	0.01	0.21	0.22

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 7 + Bluetooth	Body Worn Back	1.14	0.21	1.35
	Body Back	0.73	0.21	0.94
	Body Right	0.01	0.21	0.22

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 2.4G	Body Worn Back	0.46	0.39	0.85
	Body Back	0.51	0.39	0.9
	Body Right	0.33	0.26	0.59
	Body Bottom	0.01	NA	NA
PCS 1900+ Wi-Fi 2.4G	Body Worn Back	0.64	0.39	1.03
	Body Back	1.07	0.39	1.46
	Body Right	0.27	0.26	0.53
	Body Bottom	0.05	NA	NA
WCDMA Band 2+ Wi-Fi 2.4G	Body Back	0.79	0.39	1.18
	Body Right	0.22	0.26	0.48
	Body Bottom	0.04	NA	NA
WCDMA Band 4+ Wi-Fi 2.4G	Body Back	1.03	0.39	1.42
	Body Right	0.38	0.26	0.64
	Body Bottom	0.02	NA	NA
WCDMA Band 5+ Wi-Fi 2.4G	Body Back	0.11	0.39	0.5
	Body Right	0.11	0.26	0.37
	Body Bottom	0.01	NA	NA
LTE Band 2+ Wi-Fi 2.4G	Body Back	1.08	0.39	1.47
	Body Right	0.42	0.26	0.68
	Body Bottom	0.06	NA	NA
LTE Band 4 + Wi-Fi 2.4G	Body Back	1.02	0.39	1.41
	Body Right	0.53	0.26	0.79
	Body Bottom	0.05	NA	NA
LTE Band 5+ Wi-Fi 2.4G	Body Back	0.21	0.39	0.6
	Body Right	0.15	0.26	0.41
	Body Bottom	0.01	NA	NA
LTE Band 7+ Wi-Fi 2.4G	Body Worn Back	1.14	0.39	1.53
	Body Back	0.73	0.26	0.99
	Body Right	0.01	NA	NA

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 2.4G	Body Worn Back	0.46	0.24	0.7
	Body Back	0.51	0.24	0.75
	Body Right	0.33	0.24	0.57
	Body Bottom	0.01	0.24	0.25
PCS 1900+ Wi-Fi 2.4G	Body Worn Back	0.64	0.24	0.88
	Body Back	1.07	0.24	1.31
	Body Right	0.27	0.24	0.51
	Body Bottom	0.05	0.24	0.29
WCDMA Band 2+ Wi-Fi 2.4G	Body Back	0.79	0.24	1.03
	Body Right	0.22	0.24	0.46
	Body Bottom	0.04	0.24	0.28
WCDMA Band 4+ Wi-Fi 2.4G	Body Back	1.03	0.24	1.27
	Body Right	0.38	0.24	0.62
	Body Bottom	0.02	0.24	0.26
WCDMA Band 5+ Wi-Fi 2.4G	Body Back	0.11	0.24	0.35
	Body Right	0.11	0.24	0.35
	Body Bottom	0.01	0.24	0.25
LTE Band 2+ Wi-Fi 2.4G	Body Back	1.08	0.24	1.32
	Body Right	0.42	0.24	0.66
	Body Bottom	0.06	0.24	0.3
LTE Band 4 + Wi-Fi 2.4G	Body Back	1.02	0.24	1.26
	Body Right	0.53	0.24	0.77
	Body Bottom	0.05	0.24	0.29
LTE Band 5+ Wi-Fi 2.4G	Body Back	0.21	0.24	0.45
	Body Right	0.15	0.24	0.39
	Body Bottom	0.01	0.24	0.25
LTE Band 7+ Wi-Fi 2.4G	Body Worn Back	1.14	0.24	1.38
	Body Back	0.73	0.24	0.97
	Body Right	0.01	0.24	0.25

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+ Wi-Fi 5G	Body Worn Back	0.46	0.26	0.72
	Body Back	0.51	0.26	0.77
	Body Right	0.33	0.26	0.59
	Body Bottom	0.01	0.26	0.27
PCS 1900+ Wi-Fi 5G	Body Worn Back	0.64	0.26	0.9
	Body Back	1.07	0.26	1.33
	Body Right	0.27	0.26	0.53
	Body Bottom	0.05	0.26	0.31
WCDMA Band 2+ Wi-Fi 5G	Body Back	0.79	0.26	1.05
	Body Right	0.22	0.26	0.48
	Body Bottom	0.04	0.26	0.3
WCDMA Band 4+ Wi-Fi 5G	Body Back	1.03	0.26	1.29
	Body Right	0.38	0.26	0.64
	Body Bottom	0.02	0.26	0.28
WCDMA Band 5+ Wi-Fi 5G	Body Back	0.11	0.26	0.37
	Body Right	0.11	0.26	0.37
	Body Bottom	0.01	0.26	0.27
LTE Band 2+ Wi-Fi 5G	Body Back	1.08	0.26	1.34
	Body Right	0.42	0.26	0.68
	Body Bottom	0.06	0.26	0.32
LTE Band 4 + Wi-Fi 5G	Body Back	1.02	0.26	1.28
	Body Right	0.53	0.26	0.79
	Body Bottom	0.05	0.26	0.31
LTE Band 5+ Wi-Fi 5G	Body Back	0.21	0.26	0.47
	Body Right	0.15	0.26	0.41
	Body Bottom	0.01	0.26	0.27
LTE Band 7+ Wi-Fi 5G	Body Worn Back	1.14	0.26	1.4
	Body Back	0.73	0.26	0.99
	Body Right	0.01	0.26	0.27

Conclusion:

Sum of SAR: Σ SAR \leq 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

SAR Plots

Please Refer to the Attachment.

APPENDIX A MEASUREMENT UNCERTAINTY

KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report

APPENDIX B EUT TEST POSITION PHOTOS

Please Refer to the Attachment.

APPENDIX C PROBE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

APPENDIX D DIPOLE CALIBRATION CERTIFICATES

Please Refer to the Attachment.

******* END OF REPORT *******