

11B_Ant1_2412




11B_Ant1_2437




11B_Ant1_2462




11G_Ant1_2412

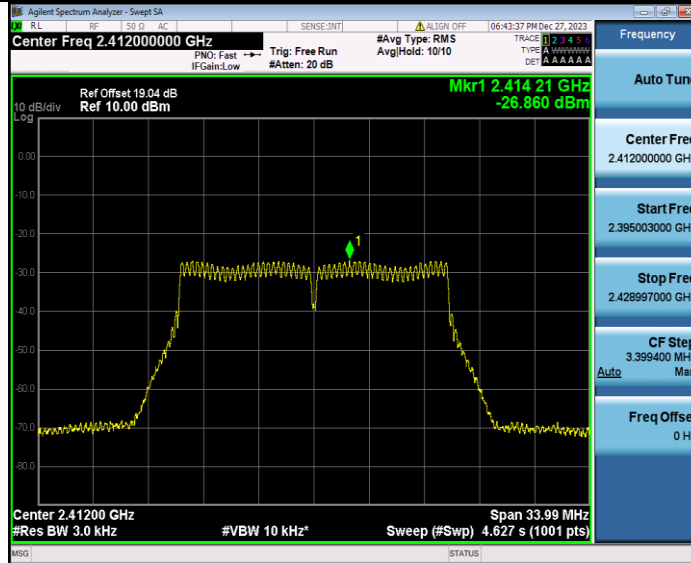



11G_Ant1_2437

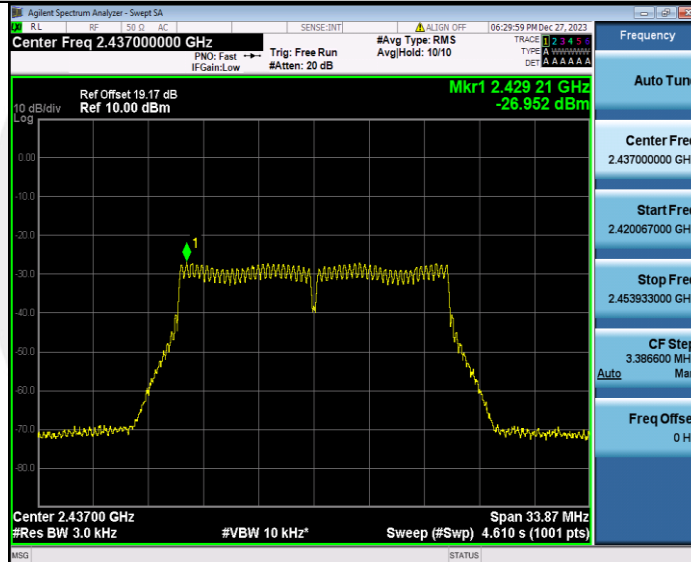

11G_Ant1_2462

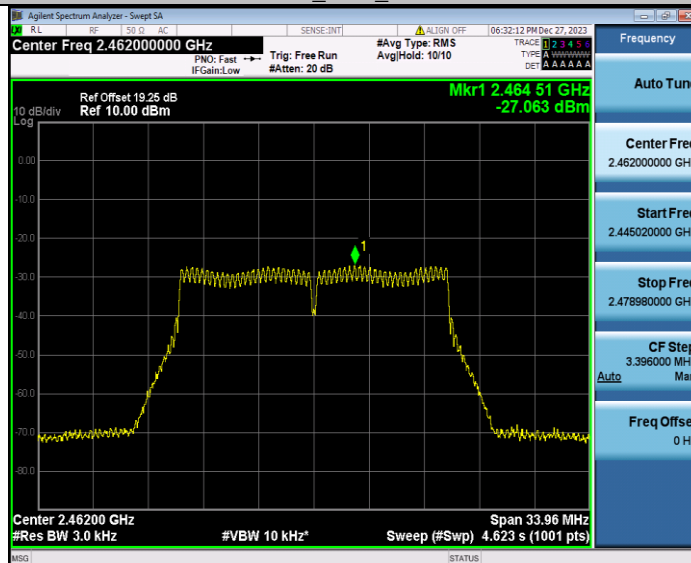

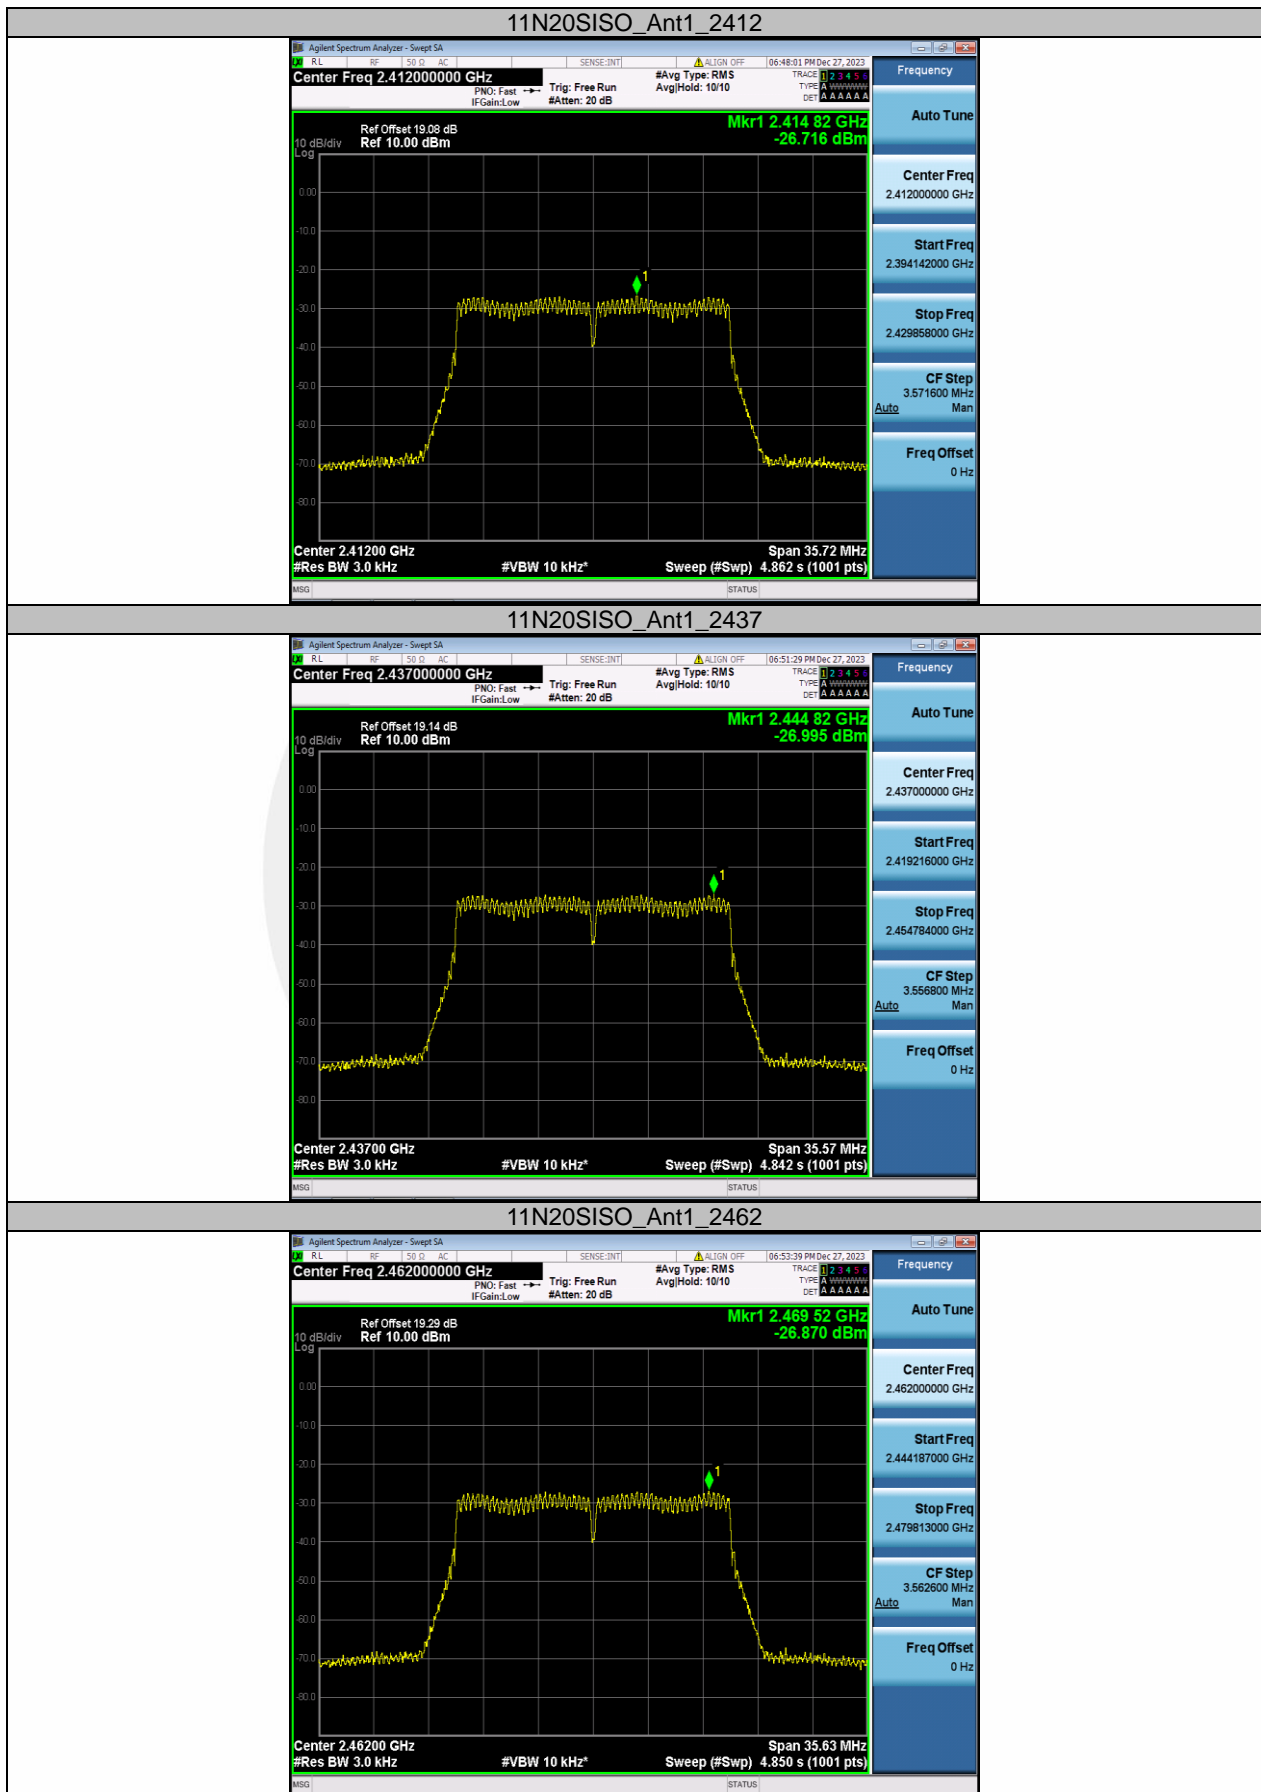

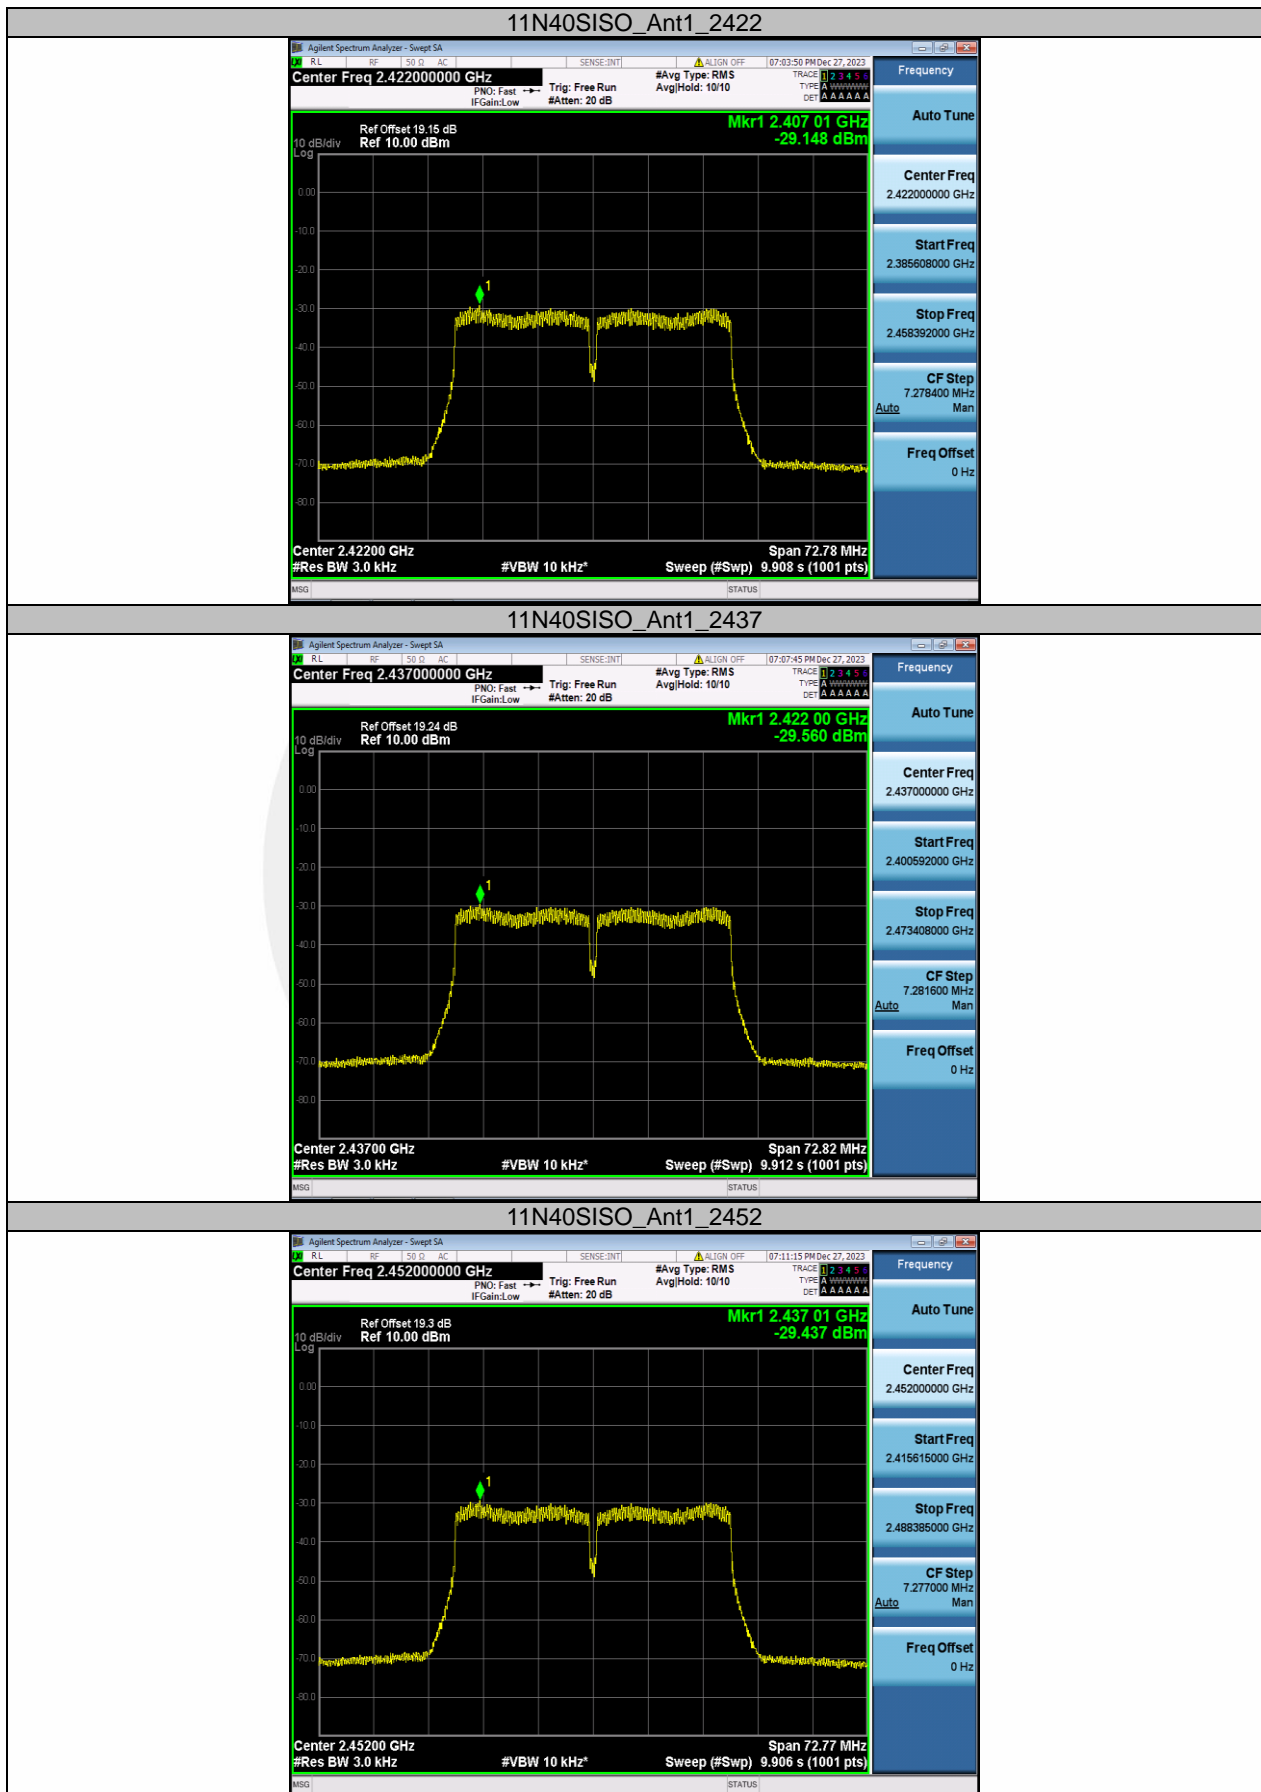

7.4 UNWANTED SPURIOUS EMISSIONS

7.4.1 Applicable Standard

According to FCC Part15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

7.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

7.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

7.4.5 Test Results

All modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Reference level measurement

| TestMode | Antenna | Freq(MHz) | Max.Point[MHz] | Result[dBm] |
|----------|---------|-----------|----------------|-------------|
| 11B | Ant1 | 2412 | 2410.04 | -2.91 |
| | | 2437 | 2438.51 | -2.87 |
| | | 2462 | 2462.50 | -2.97 |


Band edge measurements

| TestMode | Antenna | ChName | Frequency[MHz] | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|----------|---------|--------|----------------|---------------|-------------|------------|---------|
| 11B | Ant1 | Low | 2412 | -2.91 | -37.95 | ≤-32.91 | PASS |
| | | High | 2462 | -2.97 | -38.14 | ≤-32.97 | PASS |


Emission level measurement

| TestMode | Antenna | Frequency[MHz] | FreqRange [Mhz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|----------|---------|----------------|-----------------|----------------|--------------|-------------|---------|
| 11B | Ant1 | 2412 | 30~1000 | -2.91 | -69.2 | ≤-32.91 | PASS |
| | | | 1000~26500 | -2.91 | -53.63 | ≤-32.91 | PASS |
| | | 2437 | 30~1000 | -2.87 | -69.36 | ≤-32.87 | PASS |
| | | | 1000~26500 | -2.87 | -47.29 | ≤-32.87 | PASS |
| | | 2462 | 30~1000 | -2.97 | -69.61 | ≤-32.97 | PASS |
| | | | 1000~26500 | -2.97 | -40.76 | ≤-32.97 | PASS |

Reference level measurement

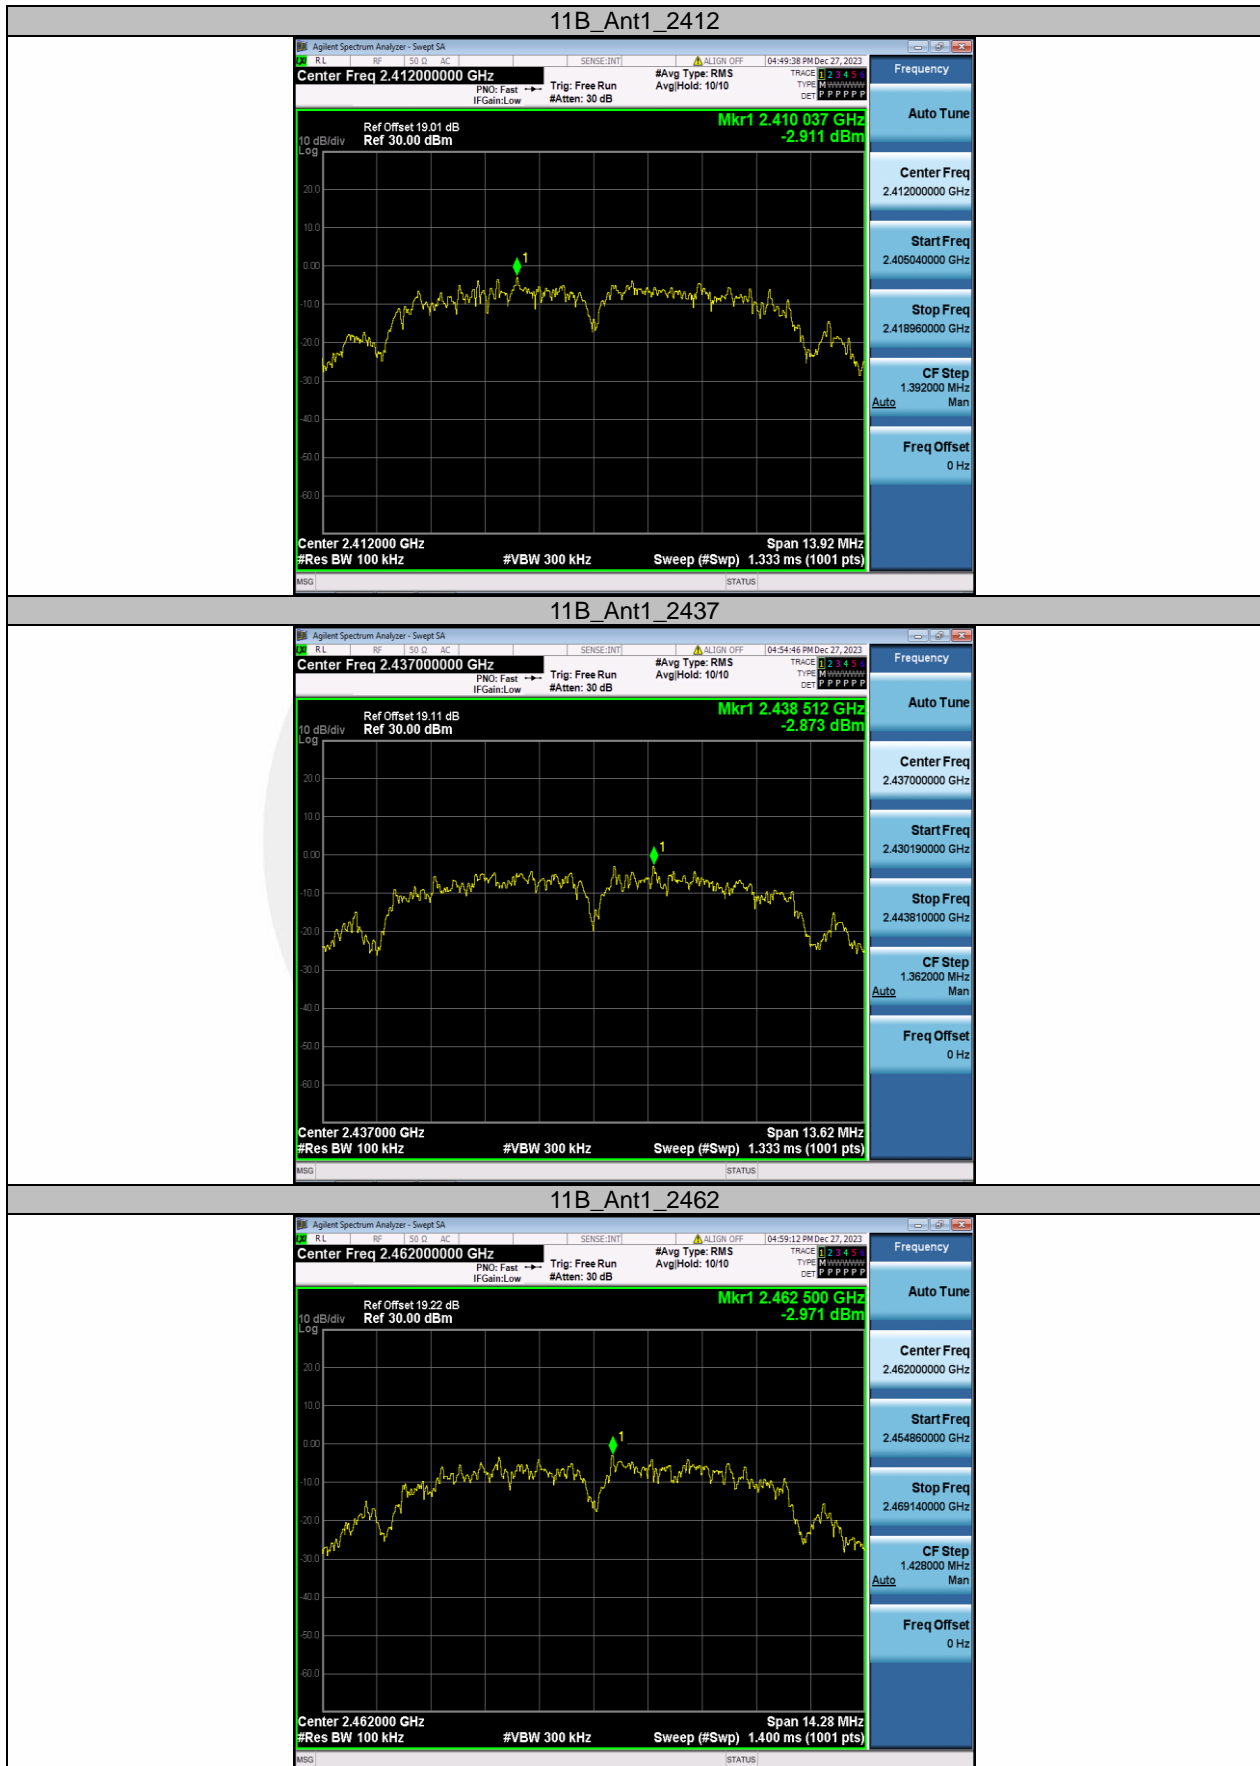


Band edge measurements

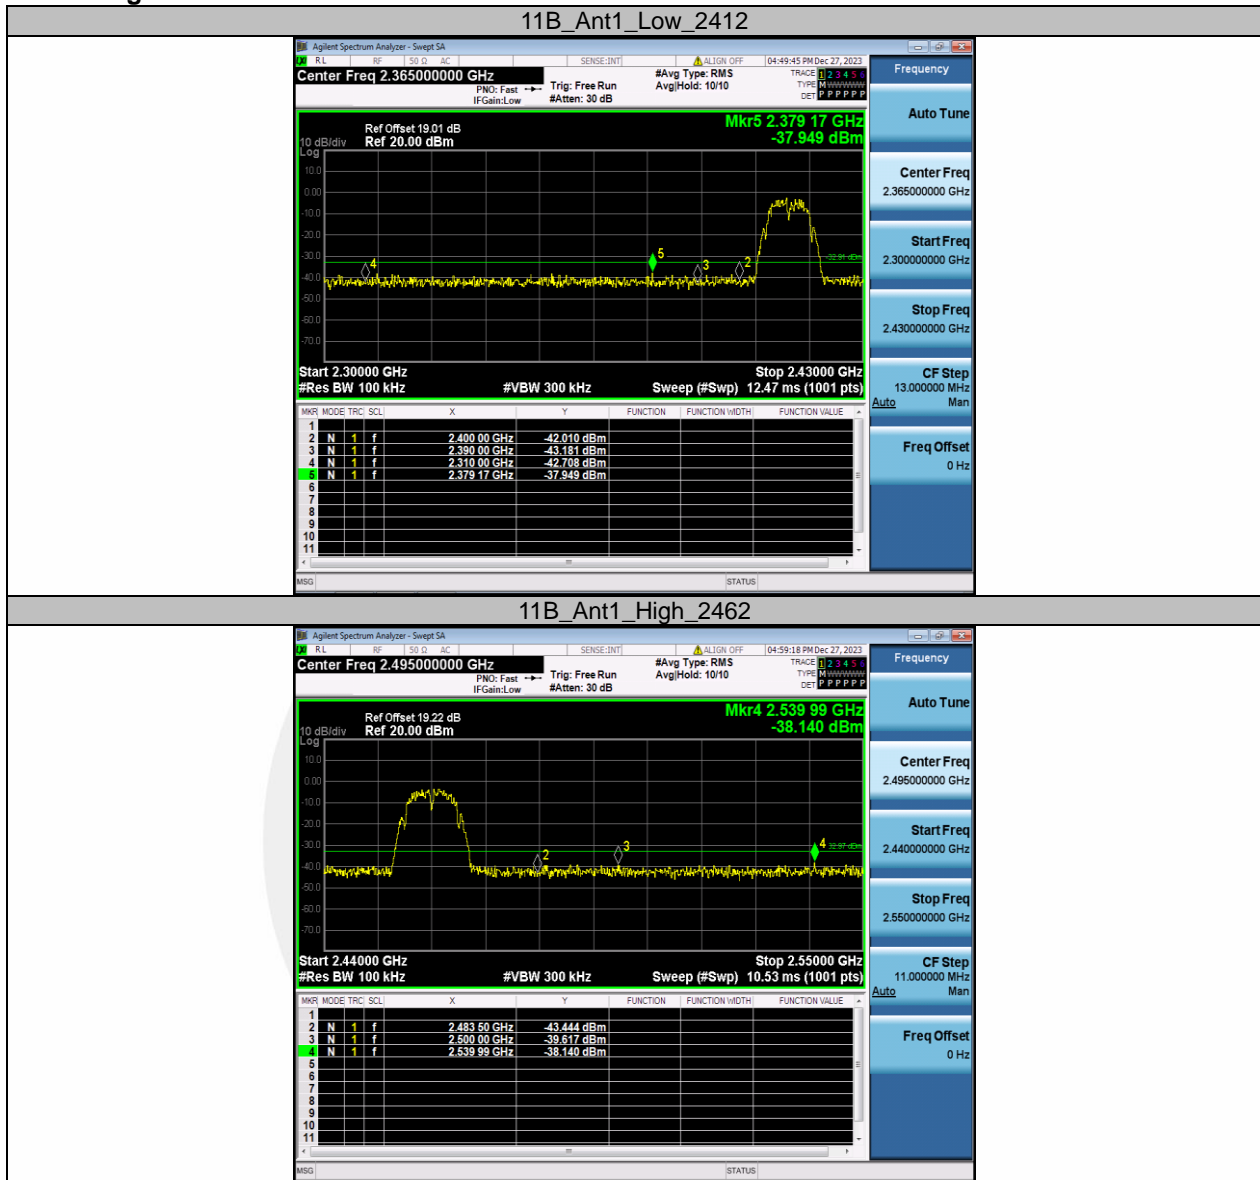


Conducted Spurious Emission


11B_Ant1_2412_30~1000

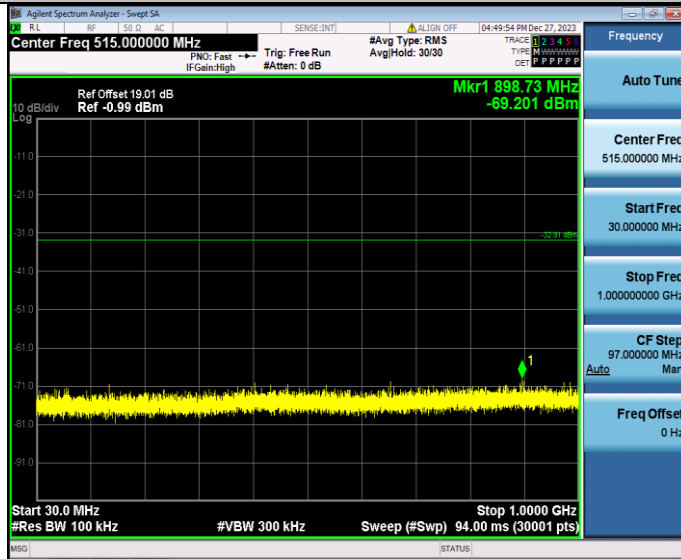

11B_Ant1_2412_1000~26500

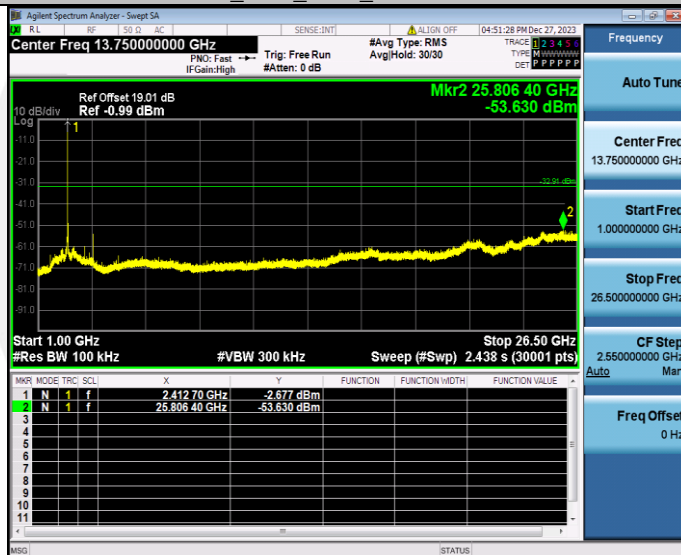


11B_Ant1_2437_30~1000

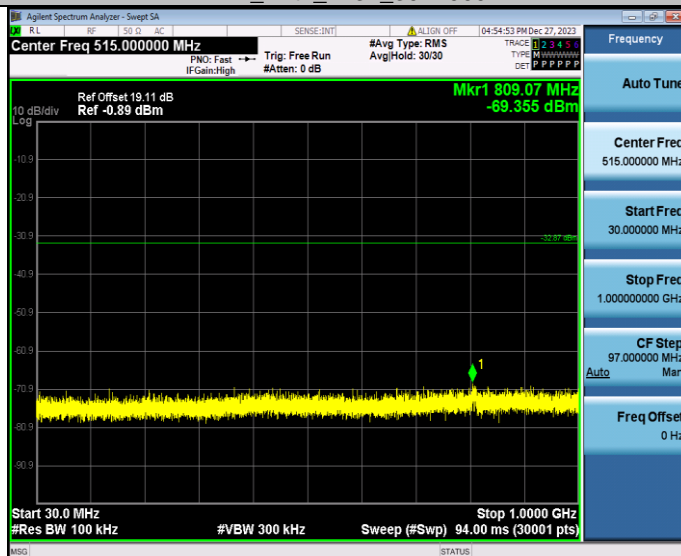


11B_Ant1_2437_1000~26500



11B_Ant1_2462_30~1000

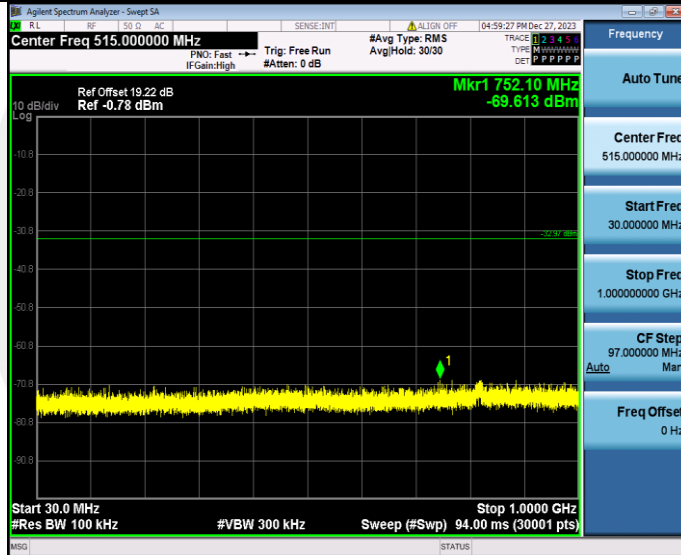

11B_Ant1_2462_1000~26500

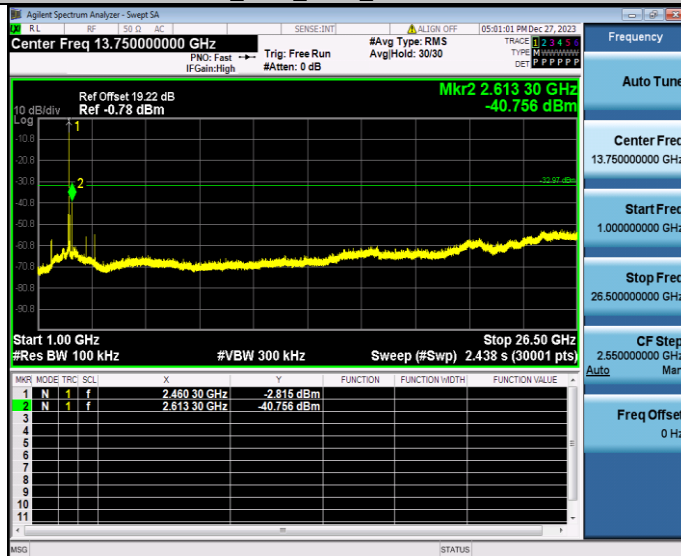

7.5 RADIATED EMISSION

7.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

7.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 10.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2) |
| 13.36-13.41 | | | |

According to FCC Part 15.205 the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

| Restricted Frequency(MHz) | Field Strength (µV/m) | Field Strength (dBµV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009-0.490 | 2400/F(KHz) | 20 log (uV/m) | 300 |
| 0.490-1.705 | 24000/F(KHz) | 20 log (uV/m) | 30 |
| 1.705-30 | 30 | 29.5 | 30 |
| 30-88 | 100 | 40 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

7.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

7.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Span = wide enough to fully capture the emission being measured
 RBW = 100 kHz for
 VBW ≥ RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

For Below 30MHz:
 The EUT was placed on a turn table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Span = wide enough to fully capture the emission being measured
 RBW = 9kHz
 VBW ≥ RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

For Below 150KHz:
 The EUT was placed on a turn table which is 0.8m above ground plane.
 Maximum procedure was performed on the highest emissions to ensure EUT compliance.
 Span = wide enough to fully capture the emission being measured
 RBW = 200Hz
 VBW ≥ RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data. Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the limit. Submit this data.
 Repeat above procedures until all frequency measured was complete.

7.5.5 Test Results

| | |
|--------------------|-----------|
| Temperature: | 28.1° C |
| Relative Humidity: | 43% |
| ATM Pressure: | 1011 mbar |

■ Spurious Emission below 30MHz(9KHz to 30MHz)

| Freq. (MHz) | Ant. Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|-------------|---------------|------------------------|----|------------------|----|----------|----|
| | | PK | AV | PK | AV | PK | AV |
| -- | -- | -- | -- | -- | -- | -- | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})$ (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

- Spurious Emission Above 1GHz(1GHz to 25GHz)
- All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

| Freq. (MHz) | Ant.Pol. | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Margin(dB) | |
|-------------|----------|------------------------|-------|------------------|-------|------------|-------|
| | H/V | PK | AV | PK | AV | PK | AV |
| 11493.7 | V | 60.35 | 42.43 | 74.00 | 54.00 | 13.65 | 11.57 |
| 14628.7 | V | 61.49 | 44.29 | 74.00 | 54.00 | 12.51 | 9.71 |
| 17600.6 | V | 67.14 | 46.31 | 74.00 | 54.00 | 6.86 | 7.69 |
| 11499.3 | H | 59.90 | 42.15 | 74.00 | 54.00 | 14.10 | 11.85 |
| 14611.8 | H | 62.61 | 44.54 | 74.00 | 54.00 | 11.39 | 9.46 |
| 17621.2 | H | 66.97 | 45.51 | 74.00 | 54.00 | 7.03 | 8.49 |

Test mode: 802.11 b Frequency: Channel 6: 2437MHz

| Freq. (MHz) | Ant.Pol. | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Margin(dB) | |
|-------------|----------|------------------------|-------|------------------|-------|------------|-------|
| | H/V | PK | AV | PK | AV | PK | AV |
| 11340 | V | 59.66 | 41.56 | 74.00 | 54.00 | 14.34 | 12.44 |
| 14568.7 | V | 63.13 | 43.85 | 74.00 | 54.00 | 10.87 | 10.15 |
| 17602.5 | V | 67.41 | 46.28 | 74.00 | 54.00 | 6.59 | 7.72 |
| 11446.8 | H | 60.36 | 41.68 | 74.00 | 54.00 | 13.64 | 12.32 |
| 14634.3 | H | 62.81 | 44.07 | 74.00 | 54.00 | 11.19 | 9.93 |
| 17023.1 | H | 65.66 | 44.93 | 74.00 | 54.00 | 8.34 | 9.07 |

Test mode: 802.11 b Frequency: Channel 11: 2462MHz

| Freq. (MHz) | Ant.Pol. | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Margin(dB) | |
|-------------|----------|------------------------|-------|------------------|-------|------------|-------|
| | H/V | PK | AV | PK | AV | PK | AV |
| 11478.7 | V | 59.20 | 42.05 | 74.00 | 54.00 | 14.80 | 11.95 |
| 14705.6 | V | 62.24 | 42.65 | 74.00 | 54.00 | 11.76 | 11.35 |
| 17625 | V | 66.92 | 45.28 | 74.00 | 54.00 | 7.08 | 8.72 |
| 11533.1 | H | 60.27 | 41.78 | 74.00 | 54.00 | 13.73 | 12.22 |
| 15140.6 | H | 63.09 | 40.95 | 74.00 | 54.00 | 10.91 | 13.05 |
| 17630.6 | H | 66.84 | 45.12 | 74.00 | 54.00 | 7.16 | 8.88 |

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Corrected Reading= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) Margin = Limit - Corrected Reading
 - (5)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
 All modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Test mode: 802.11 b Frequency: Channel 1: 2412MHz

| Frequency (MHz) | Polarity | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|----------|-----------------------|-------------------|-----------------------|-------------------|
| 2388.98 | H | 44.25 | 74.00 | 35.40 | 54.00 |
| 2388.58 | V | 44.51 | 74.00 | 35.99 | 54.00 |


Test mode: 802.11 b Frequency: Channel 11: 2462MHz

| Frequency (MHz) | Polarity | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|----------|-----------------------|-------------------|-----------------------|-------------------|
| 2484.39 | H | 46.22 | 74 | 34.67 | 54.00 |
| 2484.54 | V | 45.70 | 74 | 34.01 | 54.00 |

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Corrected Reading= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) Margin = Limit - Corrected Reading
 - (5)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1:2412MHz Channel 3: 2422MHz Polarity: H
 VBW=3MHz

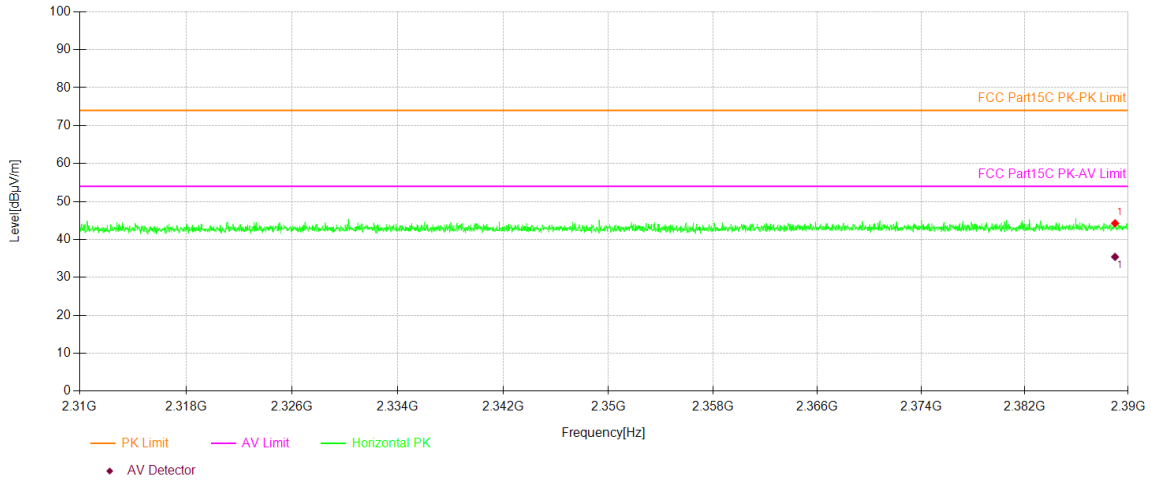

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1:2412MHz Channel 3: 2422MHz Polarity: V
 VBW=3MHz

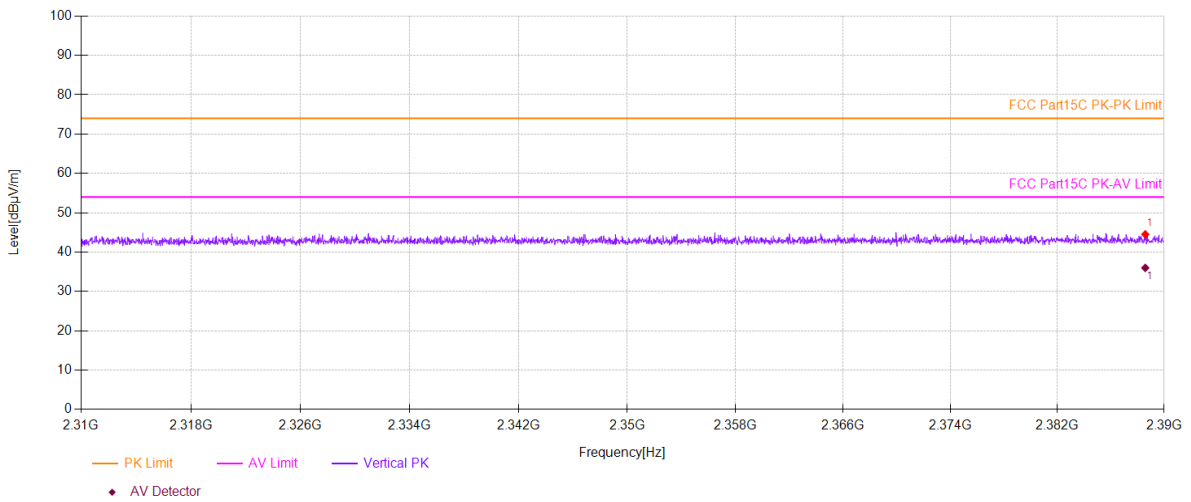


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 11: 2462MHz Channel 9: 2452MHz Polarity: H

 VBW=3MHz

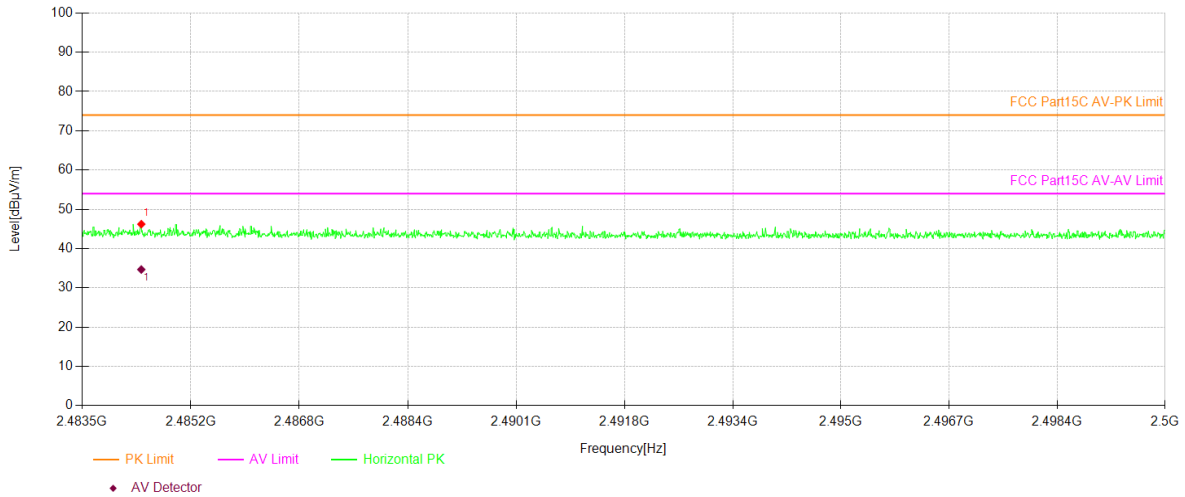


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 11: 2462MHz Channel 9: 2452MHz Polarity: V


 VBW=3MHz

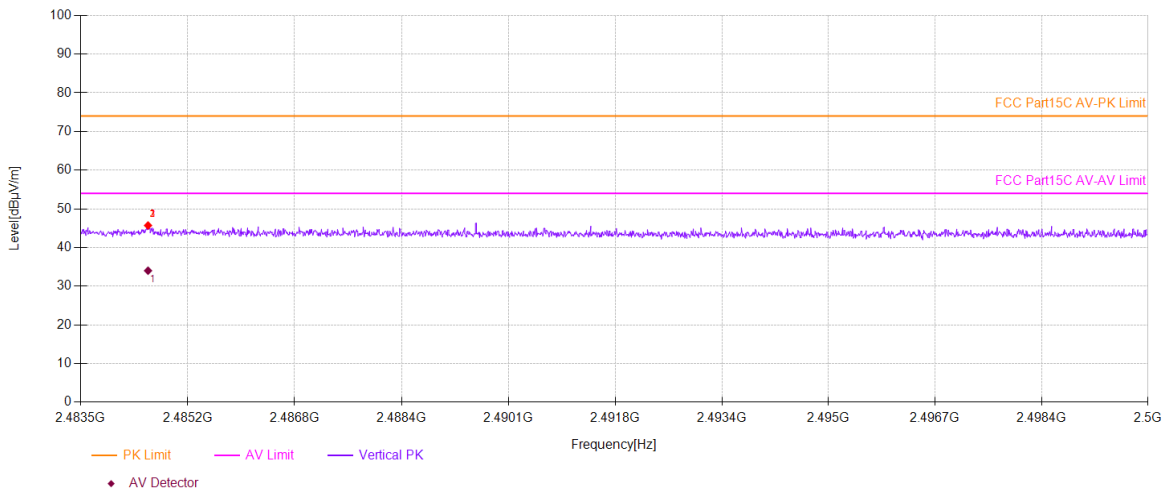


■ Spurious Emission below 1GHz (30MHz to 1GHz)

All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11n20 recorded was report as below:

2412

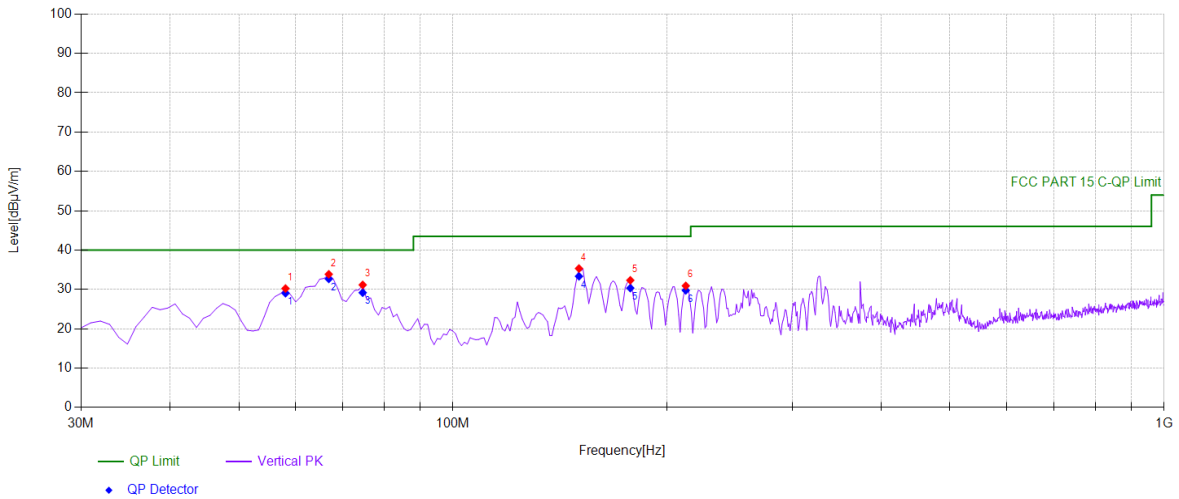


| Suspected Data List | | | | | | | | |
|---------------------|-------------|----------------|---------------|----------------|----------|----------------|-------------|----------|
| NO. | Freq. [MHz] | Reading [dBµV] | Factor [dB/m] | Level [dBµV/m] | Detector | Limit [dBµV/m] | Margin [dB] | Polarity |
| 1 | 58.1582 | 48.53 | -18.30 | 30.23 | PK | 40.00 | 9.77 | Vertical |
| 2 | 66.8969 | 53.39 | -19.53 | 33.86 | PK | 40.00 | 6.14 | Vertical |
| 3 | 74.6647 | 51.84 | -20.68 | 31.16 | PK | 40.00 | 8.84 | Vertical |
| 4 | 150.400 | 55.07 | -19.75 | 35.32 | PK | 43.50 | 8.18 | Vertical |
| 5 | 177.587 | 50.85 | -18.52 | 32.33 | PK | 43.50 | 11.17 | Vertical |
| 6 | 212.542 | 48.04 | -17.12 | 30.92 | PK | 43.50 | 12.58 | Vertical |

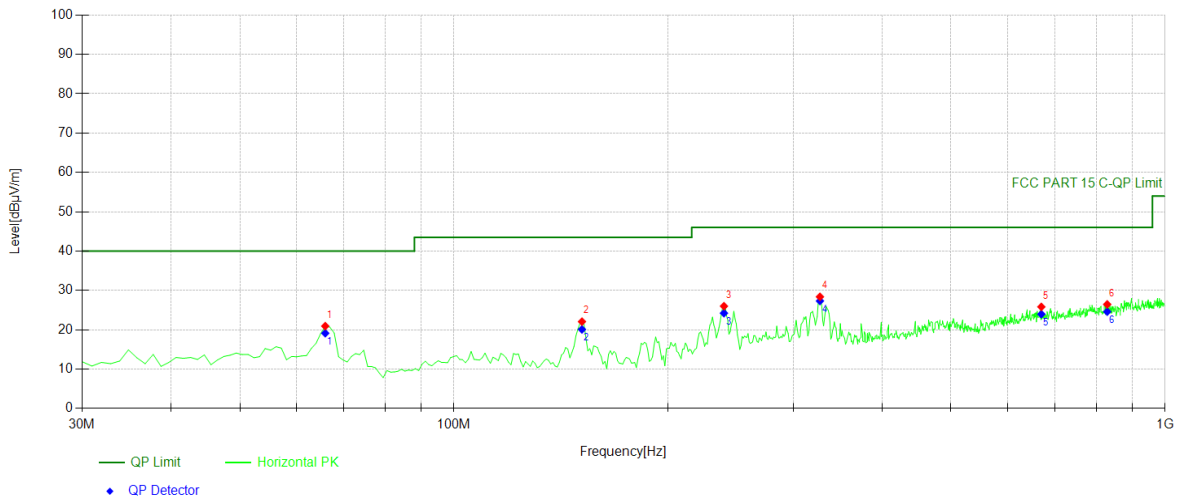


| Suspected Data List | | | | | | | | |
|---------------------|-------------|----------------|---------------|----------------|----------|----------------|-------------|------------|
| NO. | Freq. [MHz] | Reading [dBµV] | Factor [dB/m] | Level [dBµV/m] | Detector | Limit [dBµV/m] | Margin [dB] | Polarity |
| 1 | 65.9259 | 40.33 | -19.39 | 20.94 | PK | 40.00 | 19.06 | Horizontal |
| 2 | 151.371 | 41.81 | -19.74 | 22.07 | PK | 43.50 | 21.43 | Horizontal |
| 3 | 239.729 | 41.22 | -15.21 | 26.01 | PK | 46.00 | 19.99 | Horizontal |
| 4 | 327.117 | 42.26 | -13.87 | 28.39 | PK | 46.00 | 17.61 | Horizontal |
| 5 | 669.869 | 31.98 | -6.15 | 25.83 | PK | 46.00 | 20.17 | Horizontal |
| 6 | 829.109 | 30.60 | -4.14 | 26.46 | PK | 46.00 | 19.54 | Horizontal |

2437

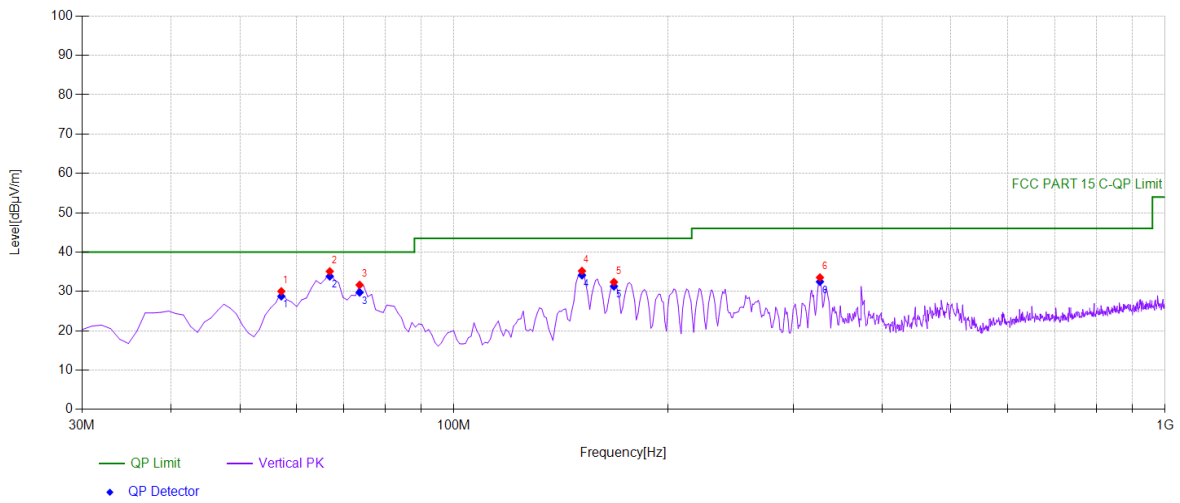


| Suspected Data List | | | | | | | | |
|---------------------|-------------|----------------|---------------|----------------|----------|----------------|-------------|----------|
| NO. | Freq. [MHz] | Reading [dBµV] | Factor [dB/m] | Level [dBµV/m] | Detector | Limit [dBµV/m] | Margin [dB] | Polarity |
| 1 | 57.1872 | 48.20 | -18.16 | 30.04 | PK | 40.00 | 9.96 | Vertical |
| 2 | 66.8969 | 54.63 | -19.53 | 35.10 | PK | 40.00 | 4.90 | Vertical |
| 3 | 73.6937 | 52.19 | -20.53 | 31.66 | PK | 40.00 | 8.34 | Vertical |
| 4 | 151.371 | 54.94 | -19.74 | 35.20 | PK | 43.50 | 8.30 | Vertical |
| 5 | 167.877 | 51.48 | -19.10 | 32.38 | PK | 43.50 | 11.12 | Vertical |
| 6 | 327.117 | 47.41 | -13.87 | 33.54 | PK | 46.00 | 12.46 | Vertical |

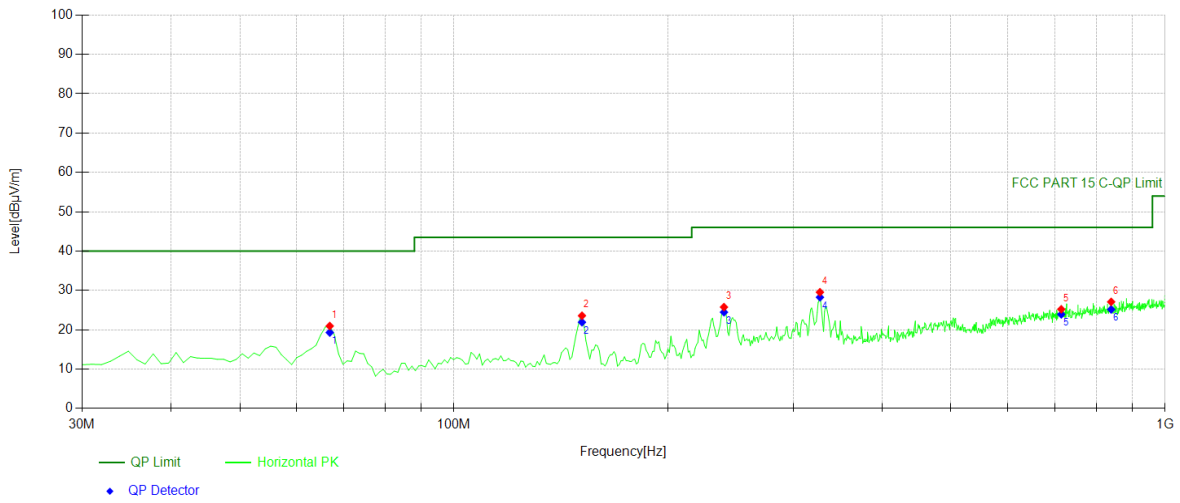


| Suspected Data List | | | | | | | | |
|---------------------|-------------|----------------|---------------|----------------|----------|----------------|-------------|------------|
| NO. | Freq. [MHz] | Reading [dBµV] | Factor [dB/m] | Level [dBµV/m] | Detector | Limit [dBµV/m] | Margin [dB] | Polarity |
| 1 | 66.8969 | 40.49 | -19.53 | 20.96 | PK | 40.00 | 19.04 | Horizontal |
| 2 | 151.371 | 43.32 | -19.74 | 23.58 | PK | 43.50 | 19.92 | Horizontal |
| 3 | 239.729 | 40.98 | -15.21 | 25.77 | PK | 46.00 | 20.23 | Horizontal |
| 4 | 327.117 | 43.42 | -13.87 | 29.55 | PK | 46.00 | 16.45 | Horizontal |
| 5 | 714.534 | 31.04 | -5.83 | 25.21 | PK | 46.00 | 20.79 | Horizontal |
| 6 | 839.789 | 30.96 | -3.86 | 27.10 | PK | 46.00 | 18.90 | Horizontal |

2462

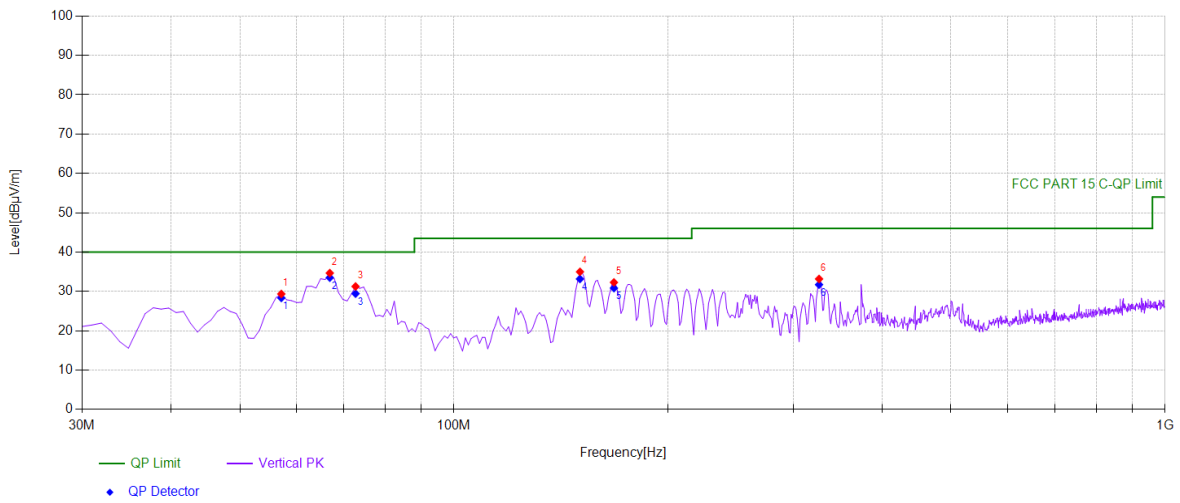

| Suspected Data List | | | | | | | | |
|---------------------|-------------|----------------|---------------|----------------|----------|----------------|-------------|----------|
| NO. | Freq. [MHz] | Reading [dBµV] | Factor [dB/m] | Level [dBµV/m] | Detector | Limit [dBµV/m] | Margin [dB] | Polarity |
| 1 | 57.1872 | 47.52 | -18.16 | 29.36 | PK | 40.00 | 10.64 | Vertical |
| 2 | 66.8969 | 54.20 | -19.53 | 34.67 | PK | 40.00 | 5.33 | Vertical |
| 3 | 72.7227 | 51.64 | -20.38 | 31.26 | PK | 40.00 | 8.74 | Vertical |
| 4 | 150.400 | 54.74 | -19.75 | 34.99 | PK | 43.50 | 8.51 | Vertical |
| 5 | 167.877 | 51.40 | -19.10 | 32.30 | PK | 43.50 | 11.20 | Vertical |
| 6 | 326.146 | 47.09 | -13.91 | 33.18 | PK | 46.00 | 12.82 | Vertical |

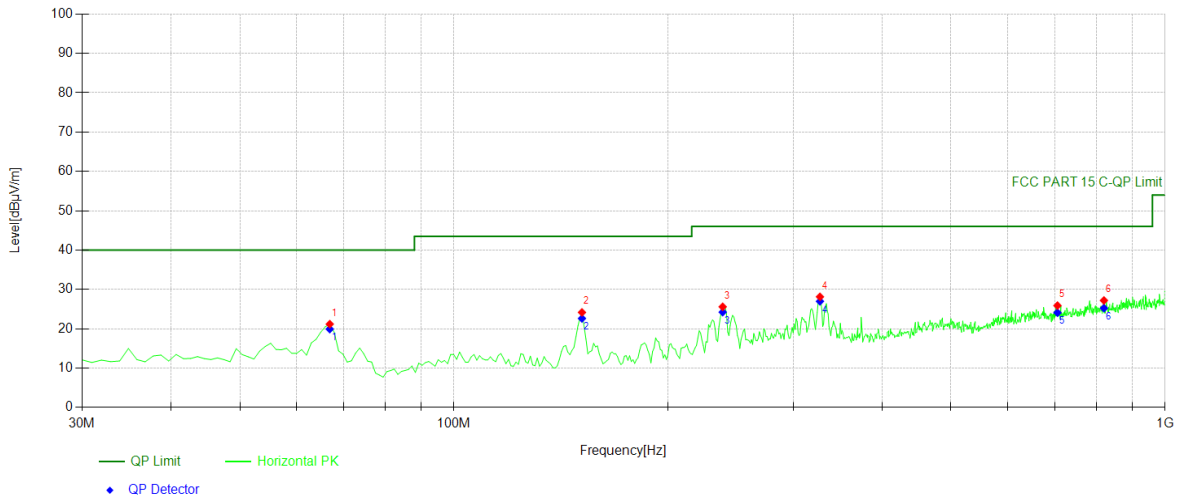

| Suspected Data List | | | | | | | | |
|---------------------|-------------|----------------|---------------|----------------|----------|----------------|-------------|------------|
| NO. | Freq. [MHz] | Reading [dBµV] | Factor [dB/m] | Level [dBµV/m] | Detector | Limit [dBµV/m] | Margin [dB] | Polarity |
| 1 | 66.8969 | 40.72 | -19.53 | 21.19 | PK | 40.00 | 18.81 | Horizontal |
| 2 | 151.371 | 43.91 | -19.74 | 24.17 | PK | 43.50 | 19.33 | Horizontal |
| 3 | 238.758 | 40.90 | -15.31 | 25.59 | PK | 46.00 | 20.41 | Horizontal |
| 4 | 327.117 | 42.00 | -13.87 | 28.13 | PK | 46.00 | 17.87 | Horizontal |
| 5 | 705.795 | 31.77 | -5.88 | 25.89 | PK | 46.00 | 20.11 | Horizontal |
| 6 | 820.370 | 31.49 | -4.28 | 27.21 | PK | 46.00 | 18.79 | Horizontal |

7.6 CONDUCTED EMISSION TEST

7.6.1 Applicable Standard

According to FCC Part 15.207(a)

7.6.2 Conformance Limit

| Frequency(MHz) | Conducted Emission Limit | |
|----------------|--------------------------|---------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66-56 | 56-46 |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup


7.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

7.6.5 Test Results


Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

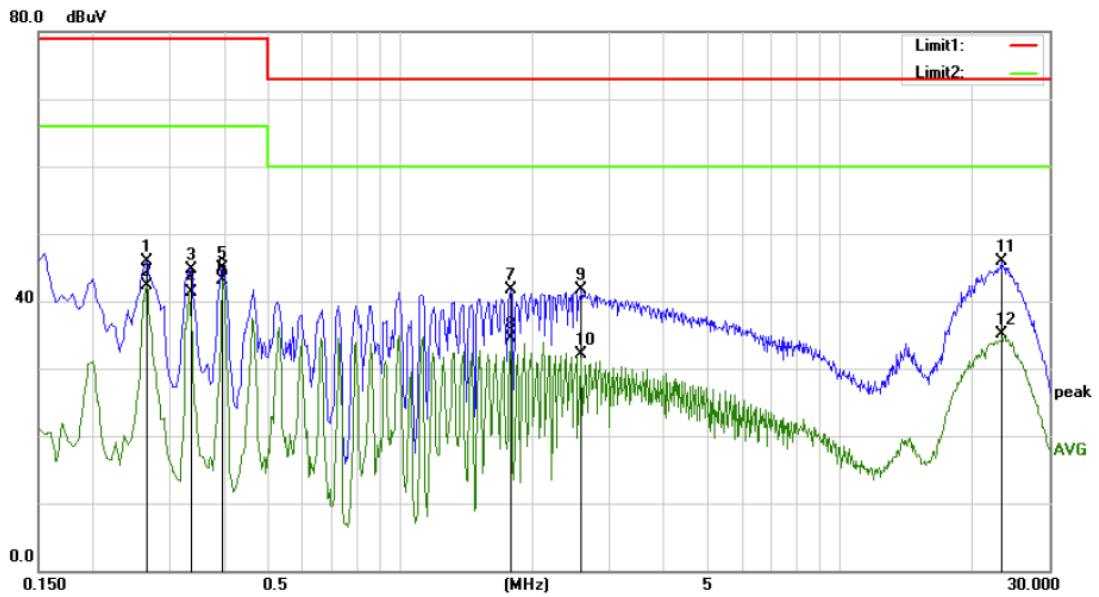

Site Conduction #1 Phase: **L1** Temperature: 20.8
 Limit: (CE)FCC PART 15 class A_QP Power: AC 120V/60Hz Humidity: 61 %
 Mode: WIFI MODE
 Note:

| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Over | | |
|-----|-----|---------|---------|---------|----------|-------|--------|----------|---------|
| | | MHz | Level | Factor | ment | | | Detector | Comment |
| | | | dBuV | dB | dBuV | dBuV | dB | | |
| 1 | | 0.2650 | 35.81 | 10.01 | 45.82 | 79.00 | -33.18 | QP | |
| 2 | | 0.2650 | 32.33 | 10.01 | 42.34 | 66.00 | -23.66 | AVG | |
| 3 | | 0.3350 | 34.74 | 9.96 | 44.70 | 79.00 | -34.30 | QP | |
| 4 | | 0.3350 | 31.35 | 9.96 | 41.31 | 66.00 | -24.69 | AVG | |
| 5 | | 0.3950 | 34.96 | 9.87 | 44.83 | 79.00 | -34.17 | QP | |
| 6 | * | 0.3950 | 33.17 | 9.87 | 43.04 | 66.00 | -22.96 | AVG | |
| 7 | | 1.7900 | 31.92 | 9.83 | 41.75 | 73.00 | -31.25 | QP | |
| 8 | | 1.7900 | 24.59 | 9.83 | 34.42 | 60.00 | -25.58 | AVG | |
| 9 | | 2.5850 | 31.90 | 9.78 | 41.68 | 73.00 | -31.32 | QP | |
| 10 | | 2.5850 | 22.42 | 9.78 | 32.20 | 60.00 | -27.80 | AVG | |
| 11 | | 23.2800 | 35.80 | 10.07 | 45.87 | 73.00 | -27.13 | QP | |
| 12 | | 23.2800 | 25.10 | 10.07 | 35.17 | 60.00 | -24.83 | AVG | |

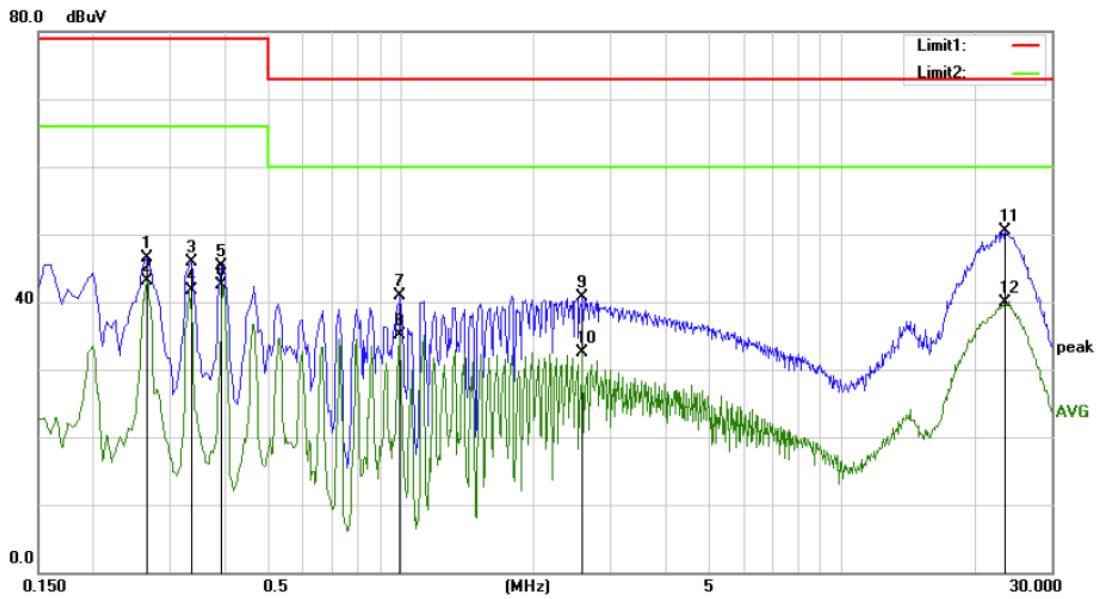

Site Conduction #1 Phase: **N** Temperature: 20.8
 Limit: (CE)FCC PART 15 class A_QP Power: AC 120V/60Hz Humidity: 61 %
 Mode: WIFI MODE
 Note:

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | | 0.2650 | 36.43 | 10.01 | 46.44 | 79.00 | -32.56 | QP | |
| 2 | | 0.2650 | 33.19 | 10.01 | 43.20 | 66.00 | -22.80 | AVG | |
| 3 | | 0.3350 | 35.98 | 9.96 | 45.94 | 79.00 | -33.06 | QP | |
| 4 | | 0.3350 | 31.66 | 9.96 | 41.62 | 66.00 | -24.38 | AVG | |
| 5 | | 0.3900 | 35.47 | 9.88 | 45.35 | 79.00 | -33.65 | QP | |
| 6 | | 0.3900 | 32.67 | 9.88 | 42.55 | 66.00 | -23.45 | AVG | |
| 7 | | 0.9950 | 30.95 | 9.92 | 40.87 | 73.00 | -32.13 | QP | |
| 8 | | 0.9950 | 25.24 | 9.92 | 35.16 | 60.00 | -24.84 | AVG | |
| 9 | | 2.5850 | 30.87 | 9.78 | 40.65 | 73.00 | -32.35 | QP | |
| 10 | | 2.5850 | 22.64 | 9.78 | 32.42 | 60.00 | -27.58 | AVG | |
| 11 | | 23.5300 | 40.38 | 10.05 | 50.43 | 73.00 | -22.57 | QP | |
| 12 | * | 23.5300 | 29.95 | 10.05 | 40.00 | 60.00 | -20.00 | AVG | |

7.7 ANTENNA APPLICATION

7.7.1 Antenna Requirement

| Standard | Requirement |
|--------------------|--|
| FCC CRF Part15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi..

7.7.2 Result

PASS.

- The EUT has one antenna: antenna gain is 1.0 dBi ;
 - Antenna uses a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos

Detail of factor for radiated emission

| Frequency(MHz) | Ant_F(dB) | Cab_L(dB) | Preamp(dB) | Correct Factor(dB) |
|----------------|-----------|-----------|------------|--------------------|
| 0.009 | 20.6 | 0.03 | \ | 20.63 |
| 0.15 | 20.7 | 0.1 | \ | 20.8 |
| 1 | 20.9 | 0.15 | \ | 21.05 |
| 10 | 20.1 | 0.28 | \ | 20.38 |
| 30 | 18.8 | 0.45 | \ | 19.25 |
| | | | | |
| 30 | 11.7 | 0.62 | 27.9 | -15.58 |
| 100 | 12.5 | 1.02 | 27.8 | -14.28 |
| 300 | 12.9 | 1.91 | 27.5 | -12.69 |
| 600 | 19.2 | 2.92 | 27 | -4.88 |
| 800 | 21.1 | 3.54 | 26.6 | -1.96 |
| 1000 | 22.3 | 4.17 | 26.2 | 0.27 |
| | | | | |
| 1000 | 25.6 | 1.76 | 41.4 | -14.04 |
| 3000 | 28.9 | 3.27 | 43.2 | -11.03 |
| 5000 | 31.1 | 4.2 | 44.6 | -9.3 |
| 8000 | 36.2 | 5.95 | 44.7 | -2.55 |
| 10000 | 38.4 | 6.3 | 43.9 | 0.8 |
| 12000 | 38.5 | 7.14 | 42.3 | 3.34 |
| 15000 | 40.2 | 8.15 | 41.4 | 6.95 |
| 18000 | 45.4 | 9.02 | 41.3 | 13.12 |
| | | | | |
| 18000 | 37.9 | 1.81 | 47.9 | -8.19 |
| 21000 | 37.9 | 1.95 | 48.7 | -8.85 |
| 25000 | 39.3 | 2.01 | 42.8 | -1.49 |
| 28000 | 39.6 | 2.16 | 46.0 | -4.24 |
| 31000 | 41.2 | 2.24 | 44.5 | -1.06 |
| 34000 | 41.5 | 2.29 | 46.6 | -2.81 |
| 37000 | 43.8 | 2.30 | 46.4 | -0.3 |
| 40000 | 43.2 | 2.50 | 42.2 | 3.5 |

*** End of Report ***